

RF Test Data for 5G Wi-Fi (Conducted Measurements)

General Description of EUT	
Product Name:	Smart POS Payment Terminal
Test Model:	CM30
Sample ID:	202311-0170-7-2#
Environmental Conditions	
Temperature:	25°C
Relative Humidity:	55%
Test Voltage:	DC 24V
Test Engineer:	Yan zhen ming
Note: For a more detailed features description, please refer to the report TBR-C-202311-0170-83 The report only show the worst case data.	

Contents

1. Emission Bandwidth.....	3
1.1. Test Result.....	3
2.1. Test Graphs	4
2. Occupied channel bandwidth	13
2.1. Test Result.....	13
2.2. Test Graphs	14
3. Min emission bandwidth	23
3.1. Test Result.....	23
3.2. Test Graphs	24
4. Maximum conducted output power.....	29
4.1. Test Result.....	29
5. Maximum power spectral density	30
5.1. Test Result.....	30
5.2. Test Graphs	31
6. Band edge measurements	40
6.1. Test Result.....	40
6.2. Test Graphs	42
7. Emissions in Restricted Bands.....	50
7.1. Test Result.....	50
7.2. Test Graphs	53
8. Conducted Spurious Emission.....	64
8.1. Test Result.....	64
8.2. Test Graphs	66
9. Frequency Stability	84
9.1. Test Result.....	84
10. Duty Cycle	92
10.1. Test Result.....	92
10.2. Test Graphs.....	93


1. Emission Bandwidth

1.1. Test Result

TestMode	Antenna	Channel	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	19.96	5170.04	5190.00	---	---
		5200	20.04	5190.00	5210.04	---	---
		5240	19.72	5230.04	5249.76	---	---
		5745	24.92	5732.08	5757.00	---	---
		5785	19.88	5775.00	5794.88	---	---
		5825	24.80	5812.76	5837.56	---	---
11N20SISO	Ant1	5180	20.28	5169.76	5190.04	---	---
		5200	20.08	5190.00	5210.08	---	---
		5240	20.12	5229.84	5249.96	---	---
		5745	25.48	5733.32	5758.80	---	---
		5785	23.32	5773.28	5796.60	---	---
		5825	23.08	5814.48	5837.56	---	---
11N40SISO	Ant1	5190	40.88	5169.44	5210.32	---	---
		5230	41.04	5209.60	5250.64	---	---
		5755	41.12	5734.04	5775.16	---	---
		5795	40.96	5774.36	5815.32	---	---
11AC20SISO	Ant1	5180	20.24	5169.84	5190.08	---	---
		5200	20.48	5189.80	5210.28	---	---
		5240	20.28	5229.76	5250.04	---	---
		5745	23.24	5734.28	5757.52	---	---
		5785	26.68	5771.76	5798.44	---	---
		5825	20.44	5814.72	5835.16	---	---
11AC40SISO	Ant1	5190	40.40	5169.84	5210.24	---	---
		5230	40.96	5209.68	5250.64	---	---
		5755	42.96	5732.84	5775.80	---	---
		5795	48.08	5774.44	5822.52	---	---


2.1. Test Graphs



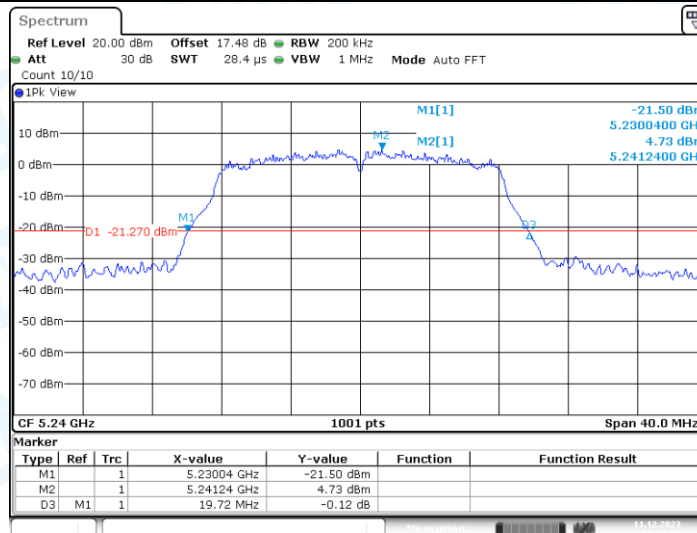


Date: 11.DEC.2023 09:02:59

11A_Ant1_5745

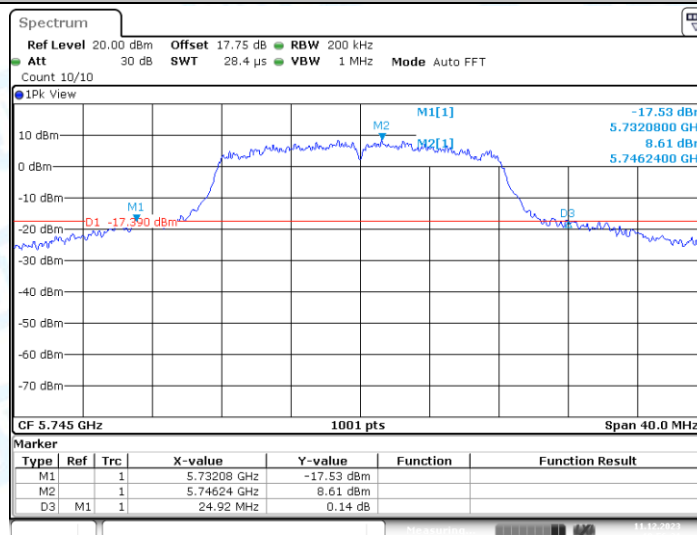


Date: 11.DEC.2023 10:56:31

11A_Ant1_5785

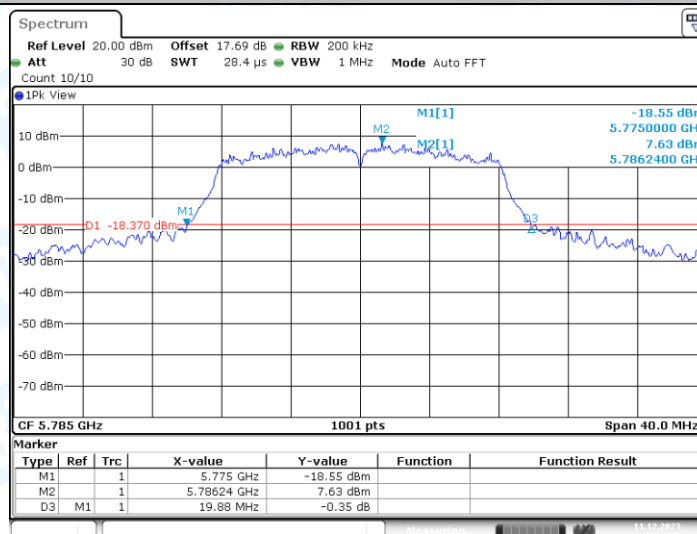


Date: 11.DEC.2023 11:14:35

11A_Ant1_5825

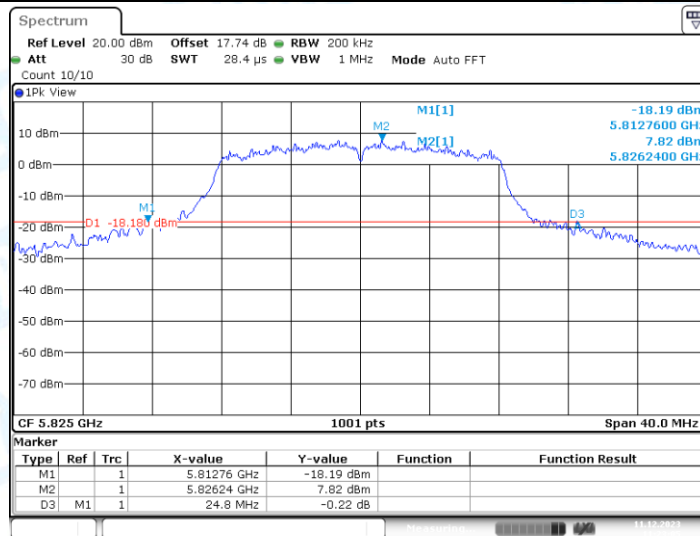


Date: 11.DEC.2023 11:23:05

11N20SISO_Ant1_5180

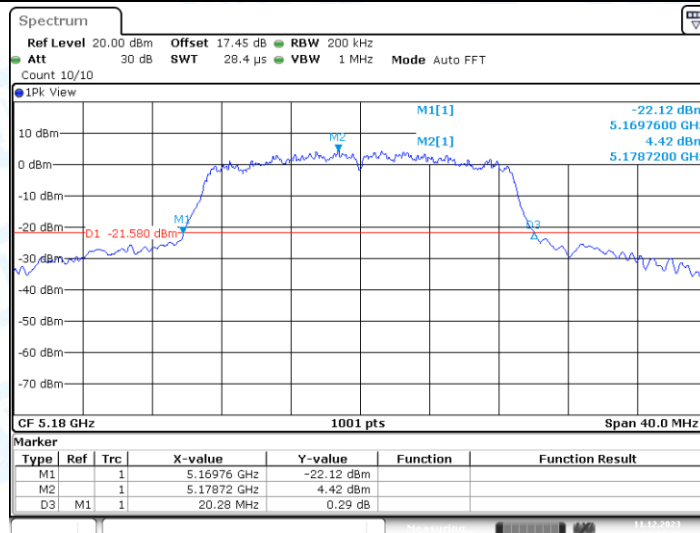


Date: 11.DEC.2023 09:09:49

11N20SISO_Ant1_5200

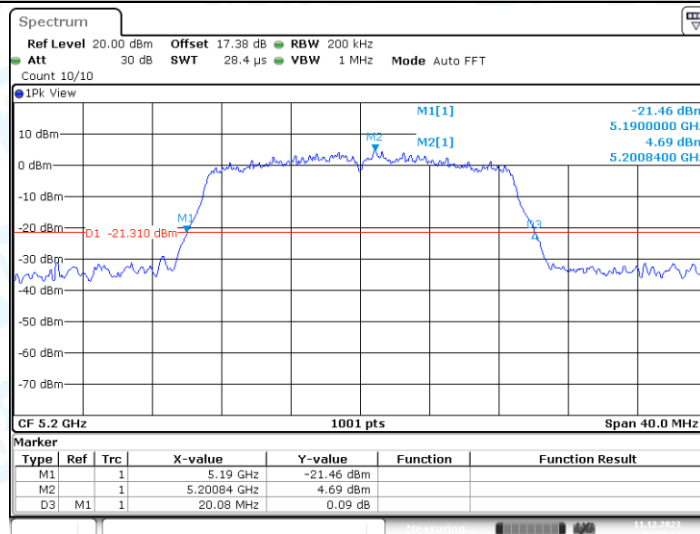


Date: 11.DEC.2023 09:27:14

11N20SISO_Ant1_5240

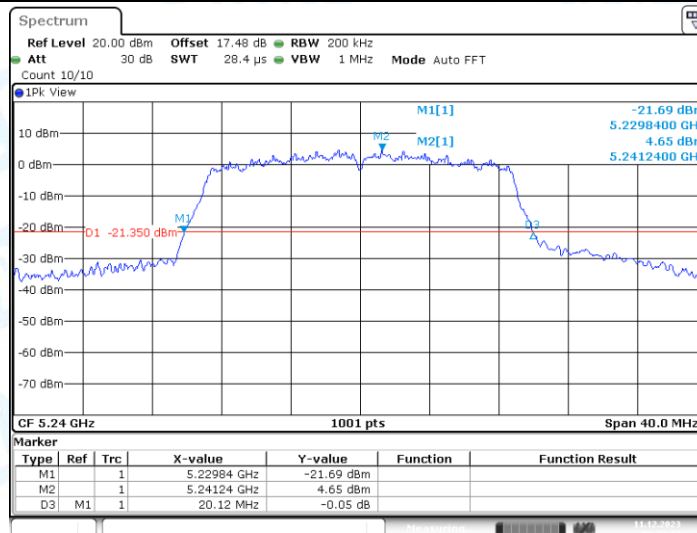


Date: 11.DEC.2023 09:33:17

11N20SISO_Ant1_5745

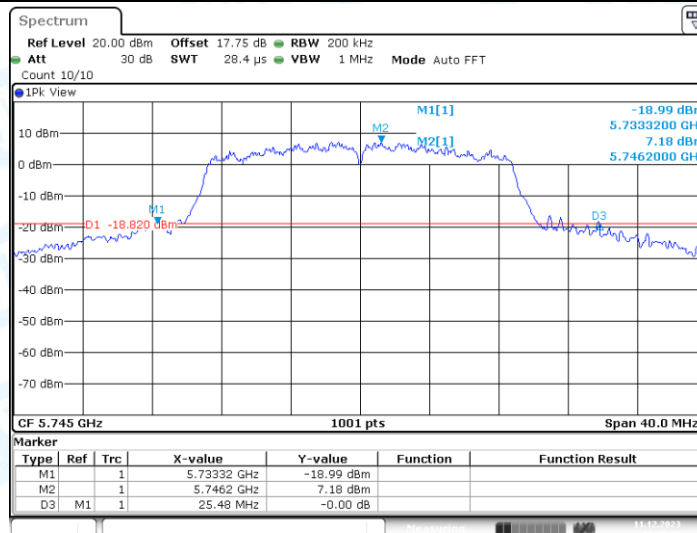


Date: 11.DEC.2023 11:29:48

11N20SISO_Ant1_5785

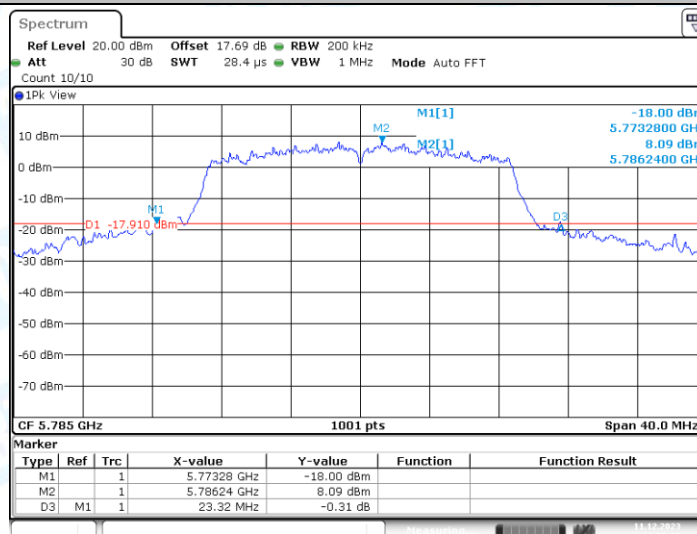


Date: 11.DEC.2023 11:58:18

11N20SISO_Ant1_5825

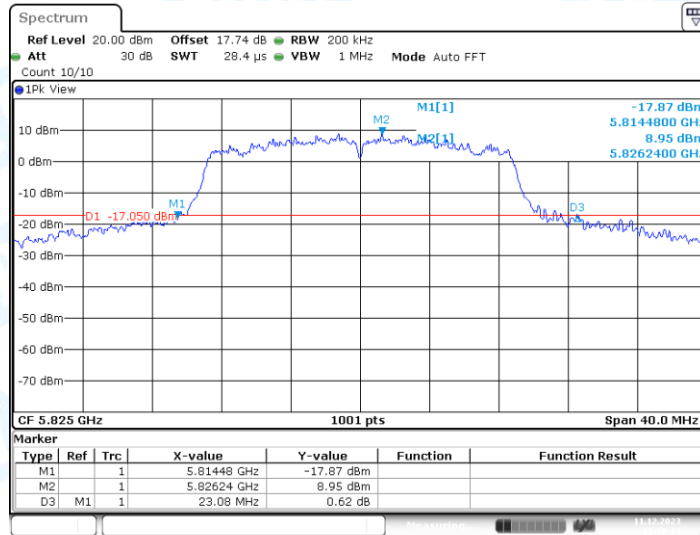


Date: 11.DEC.2023 13:30:34

11N40SISO_Ant1_5190

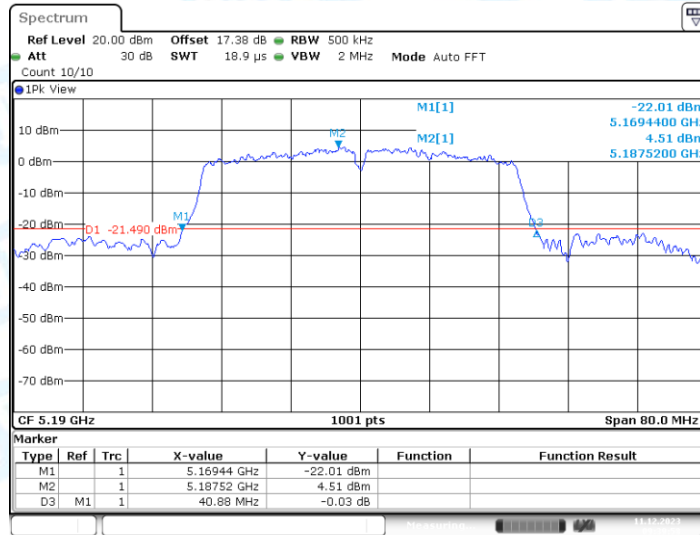


Date: 11.DEC.2023 09:39:58

11N40SISO_Ant1_5230

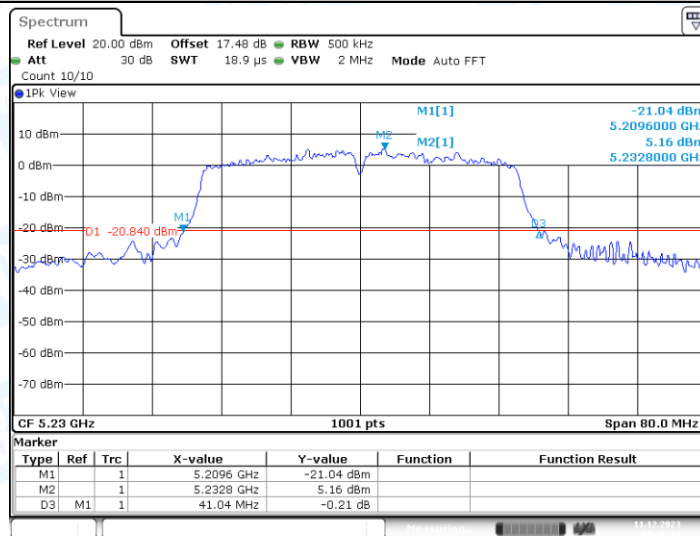


Date: 11.DEC.2023 09:46:34

11N40SISO_Ant1_5755

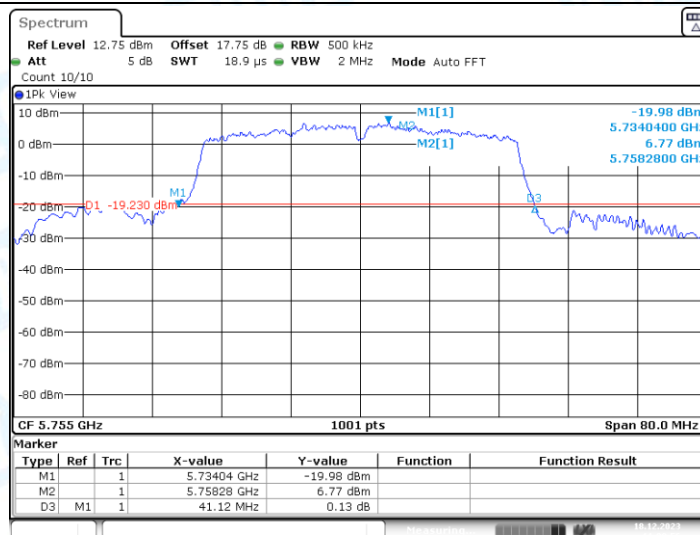


Date: 18.DEC.2023 11:00:56

11N40SISO_Ant1_5795

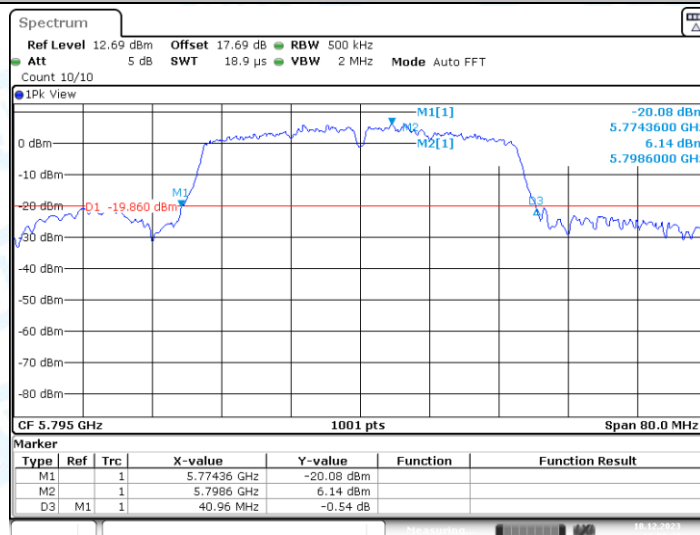


Date: 18.DEC.2023 11:01:29

11AC20SISO_Ant1_5180

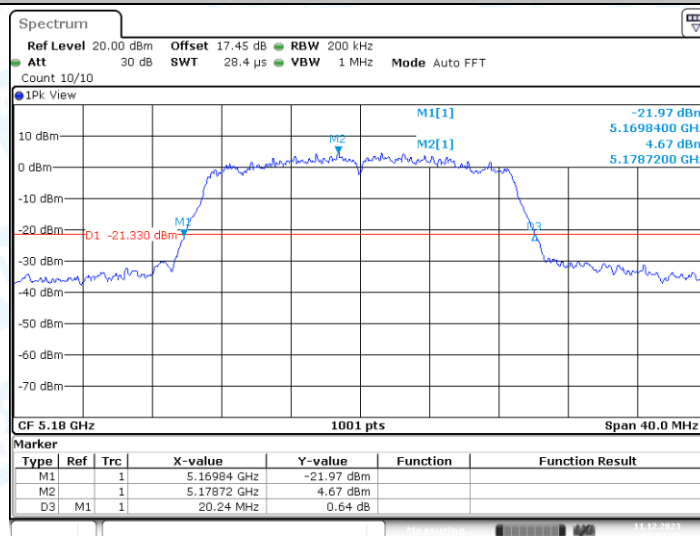


Date: 11.DEC.2023 09:53:36

11AC20SISO_Ant1_5200

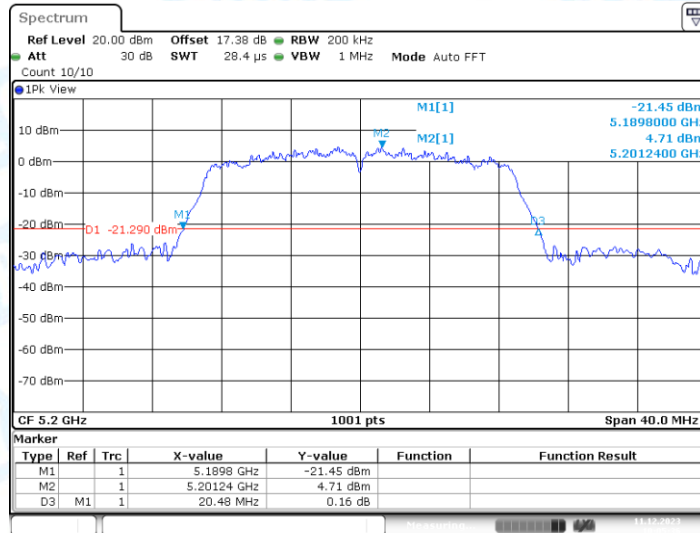


Date: 11.DEC.2023 10:05:37

11AC20SISO_Ant1_5240

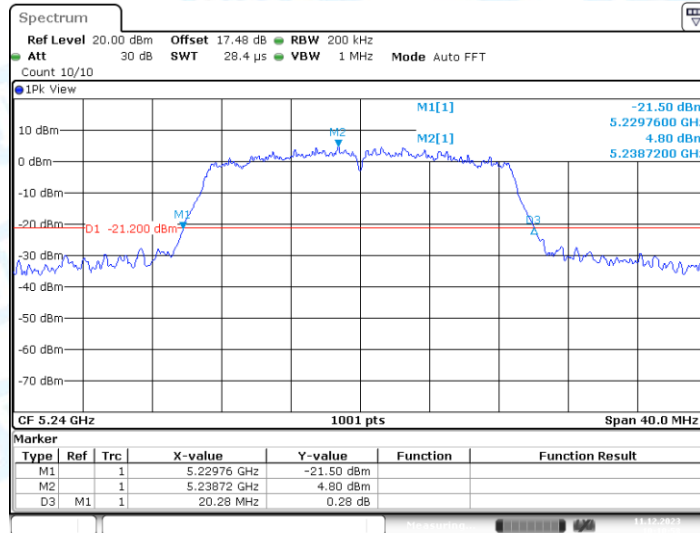


Date: 11.DEC.2023 10:10:57

11AC20SISO_Ant1_5745

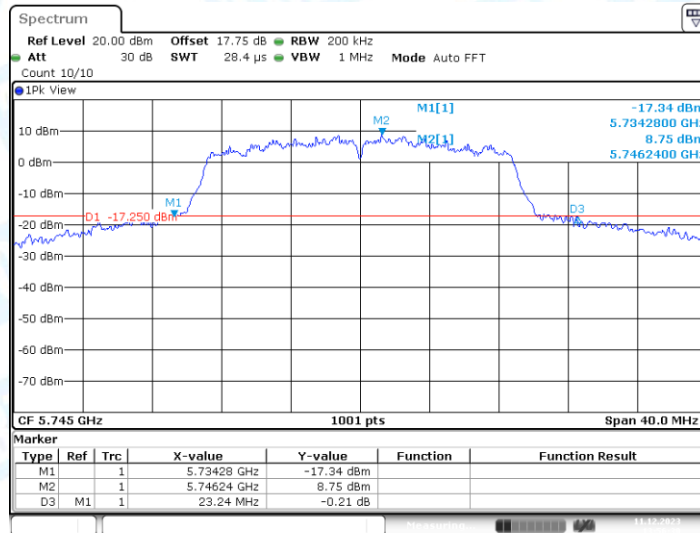


Date: 11.DEC.2023 13:56:31

11AC20SISO_Ant1_5785

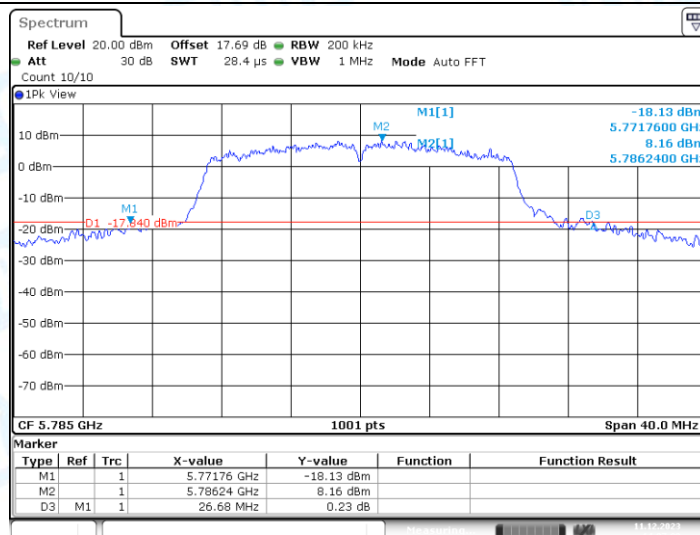


Date: 11.DEC.2023 14:07:08

11AC20SISO_Ant1_5825

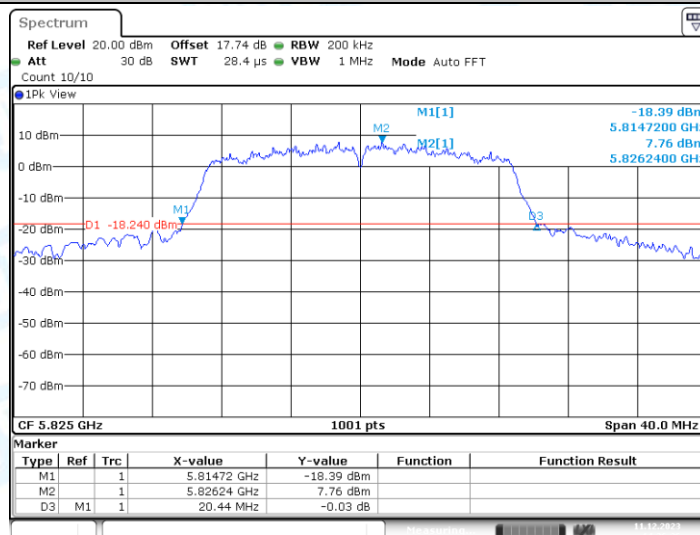


Date: 11.DEC.2023 14:26:26

11AC40SISO_Ant1_5190

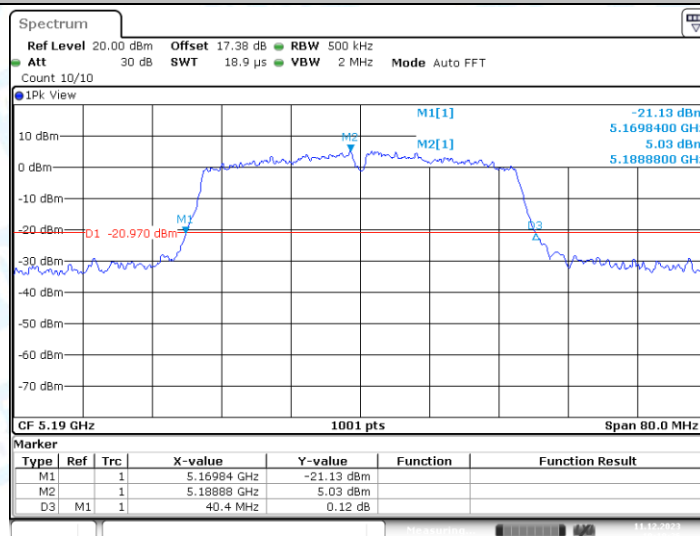


Date: 11.DEC.2023 10:19:36

11AC40SISO_Ant1_5230

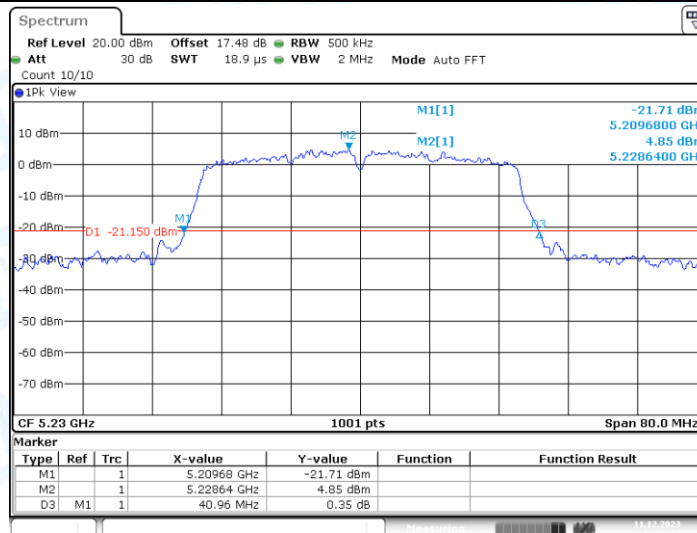


Date: 11.DEC.2023 10:26:17

11AC40SISO_Ant1_5755

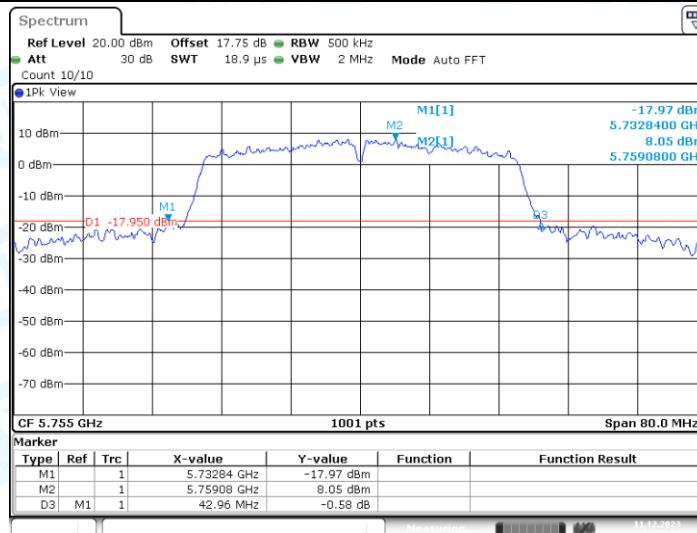

Date: 11.DEC.2023 14:33:04

11AC40SISO_Ant1_5795

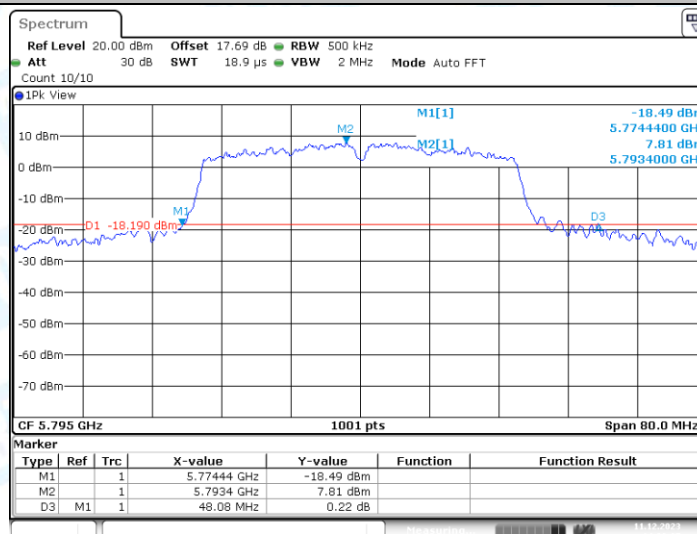

Date: 11.DEC.2023 14:39:27


2. Occupied channel bandwidth

2.1. Test Result

TestMode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5180	16.623	5171.7283	5188.3516	---	---
		5200	16.823	5191.4486	5208.2717	---	---
		5240	17.023	5231.4885	5248.5115	---	---
		5745	17.143	5736.3287	5753.4715	---	---
		5785	17.023	5776.6484	5793.6713	---	---
		5825	16.983	5816.5684	5833.5514	---	---
11N20SISO	Ant1	5180	17.622	5171.1688	5188.7912	---	---
		5200	17.902	5191.1688	5209.0709	---	---
		5240	17.702	5231.1289	5248.8312	---	---
		5745	17.982	5736.0090	5753.9910	---	---
		5785	17.782	5776.0889	5793.8711	---	---
		5825	18.661	5815.4496	5834.1109	---	---
11N40SISO	Ant1	5190	36.044	5171.9381	5207.9820	---	---
		5230	36.044	5212.0180	5248.0619	---	---
		5755	36.284	5736.8581	5773.1419	---	---
		5795	36.284	5776.7782	5813.0619	---	---
11AC20SISO	Ant1	5180	17.902	5171.0090	5188.9111	---	---
		5200	17.742	5191.1688	5208.9111	---	---
		5240	18.022	5230.9291	5248.9510	---	---
		5745	17.782	5736.1289	5753.9111	---	---
		5785	18.142	5775.7293	5793.8711	---	---
		5825	17.822	5816.0889	5833.9111	---	---
11AC40SISO	Ant1	5190	35.884	5172.0180	5207.9021	---	---
		5230	36.204	5211.8581	5248.0619	---	---
		5755	36.284	5736.8581	5773.1419	---	---
		5795	36.044	5776.9381	5812.9820	---	---


2.2. Test Graphs



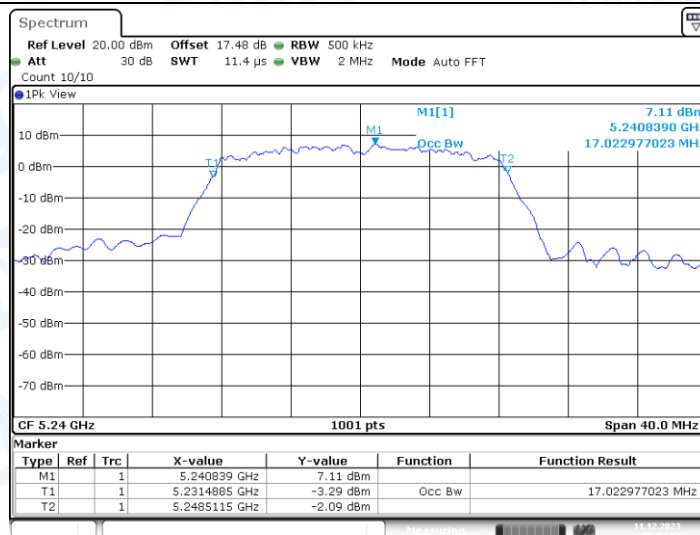


Date: 11.DEC.2023 09:03:06

11A_Ant1_5745

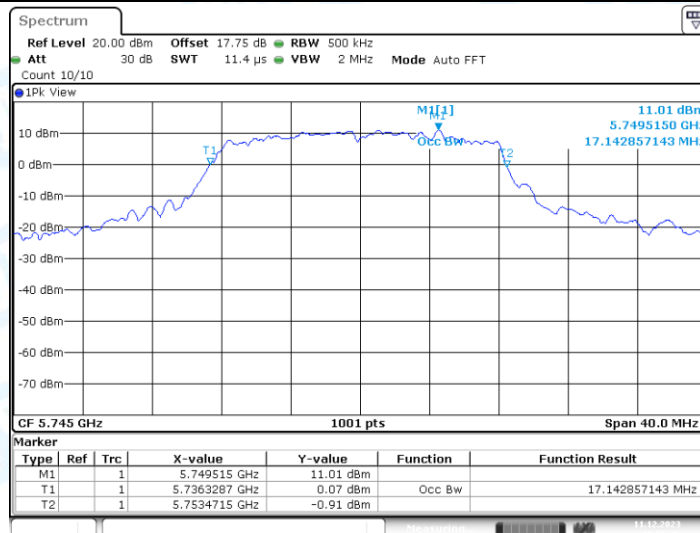


Date: 11.DEC.2023 10:56:46

11A_Ant1_5785

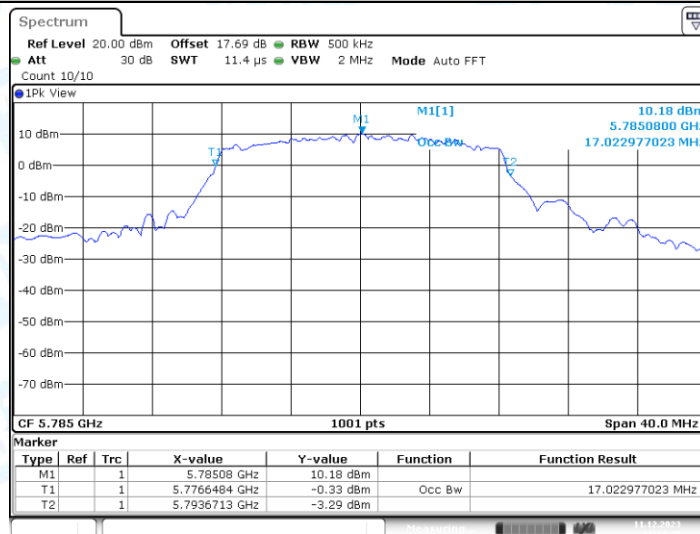


Date: 11.DEC.2023 11:14:49

11A_Ant1_5825

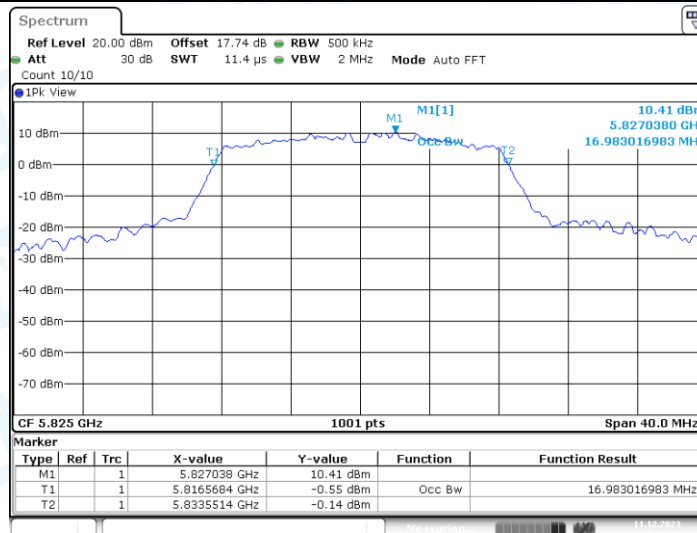


Date: 11.DEC.2023 11:23:20

11N20SISO_Ant1_5180

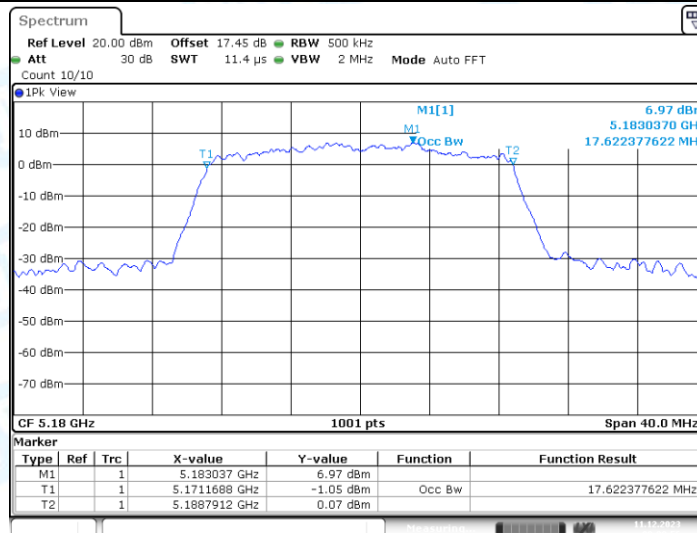


Date: 11.DEC.2023 09:09:56

11N20SISO_Ant1_5200

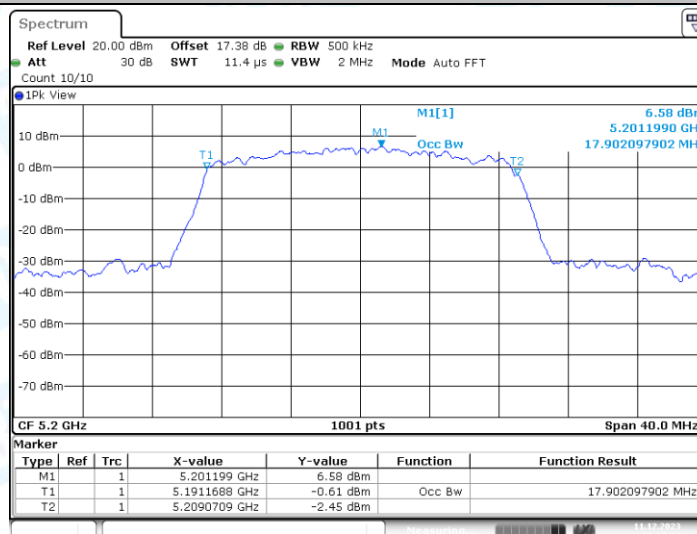


Date: 11.DEC.2023 09:27:21

11N20SISO_Ant1_5240

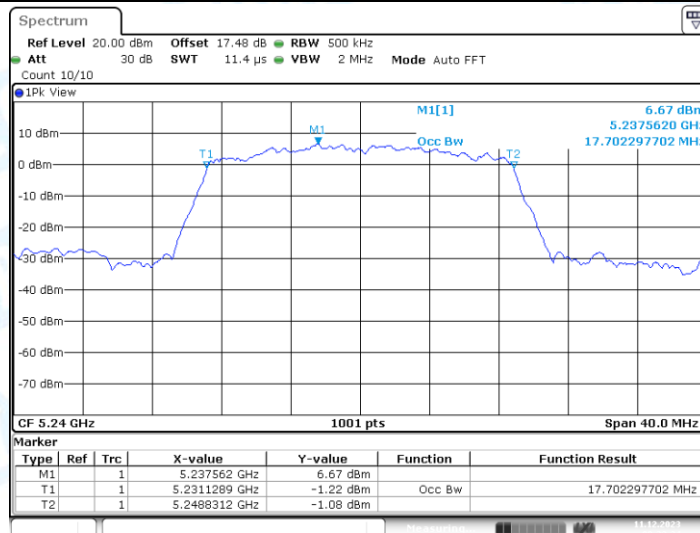


Date: 11.DEC.2023 09:33:24

11N20SISO_Ant1_5745

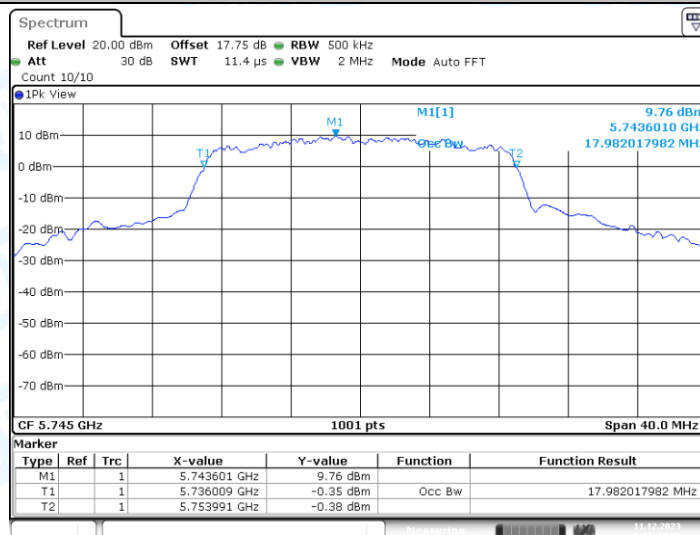


Date: 11.DEC.2023 11:30:03

11N20SISO_Ant1_5785

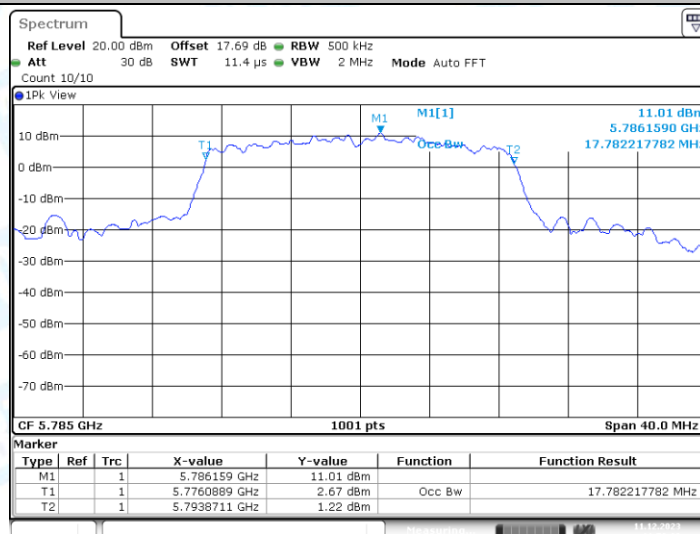


Date: 11.DEC.2023 11:58:32


11N20SISO_Ant1_5825

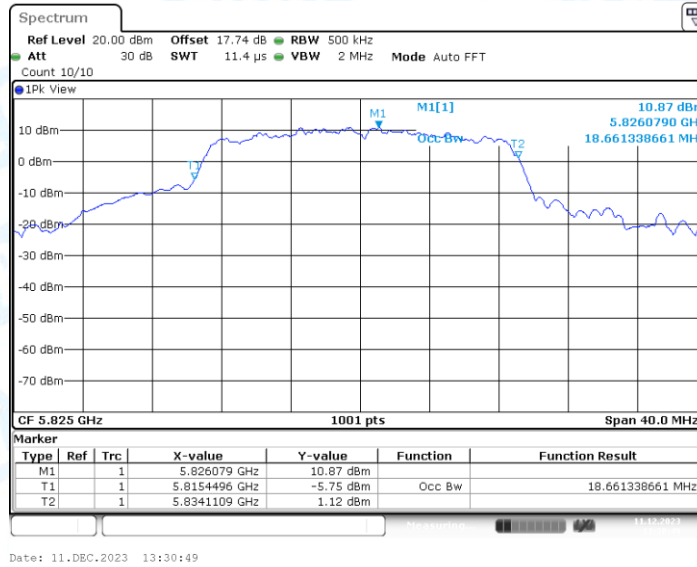


11N40SISO_Ant1_5190

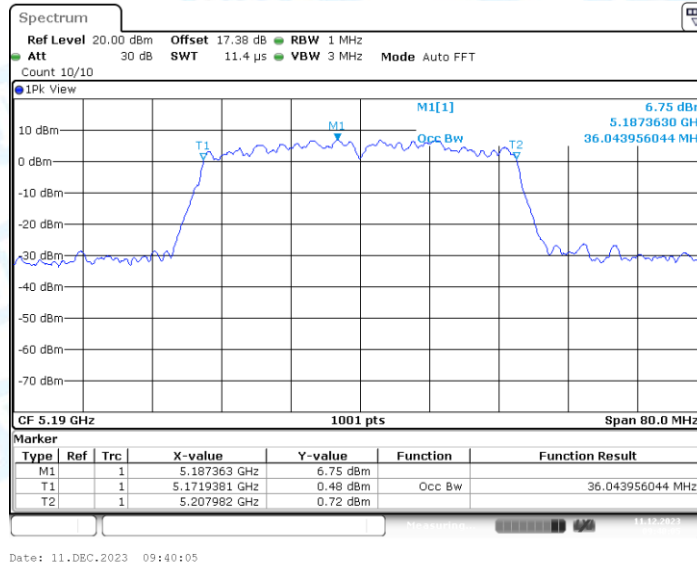

11N40SISO_Ant1_5230

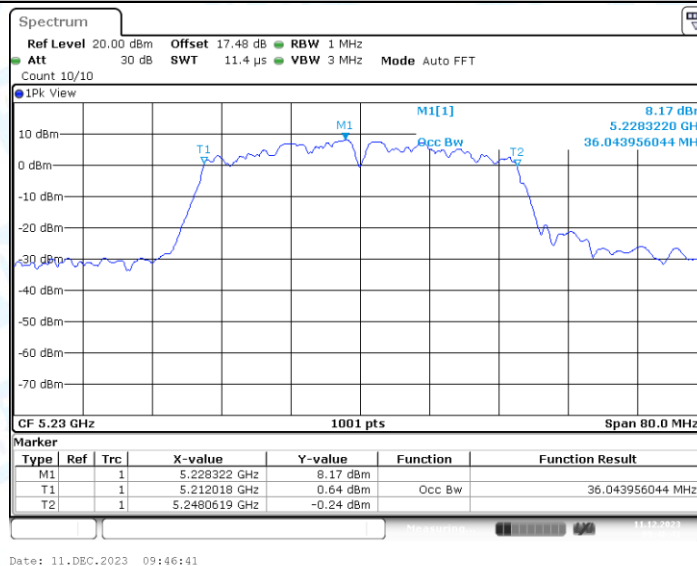


11N40SISO_Ant1_5755

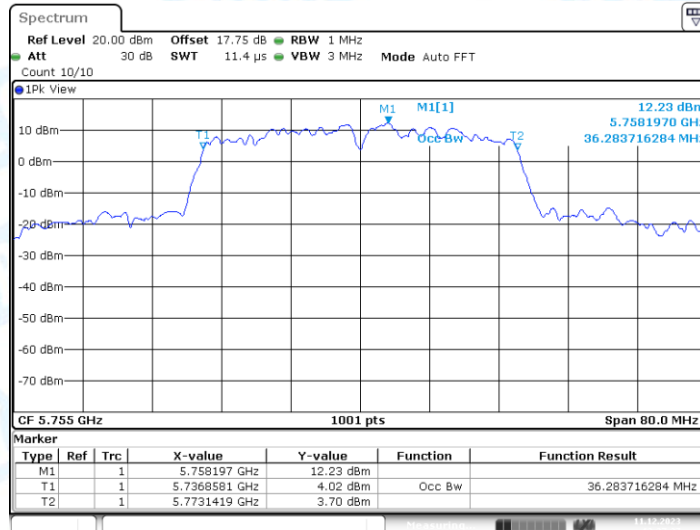


Date: 11.DEC.2023 13:37:26

11N40SISO_Ant1_5795

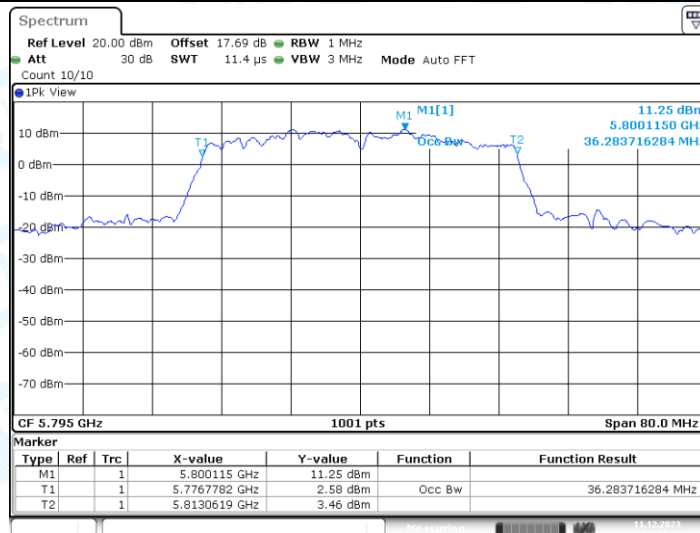


Date: 11.DEC.2023 13:44:27

11AC20SISO_Ant1_5180

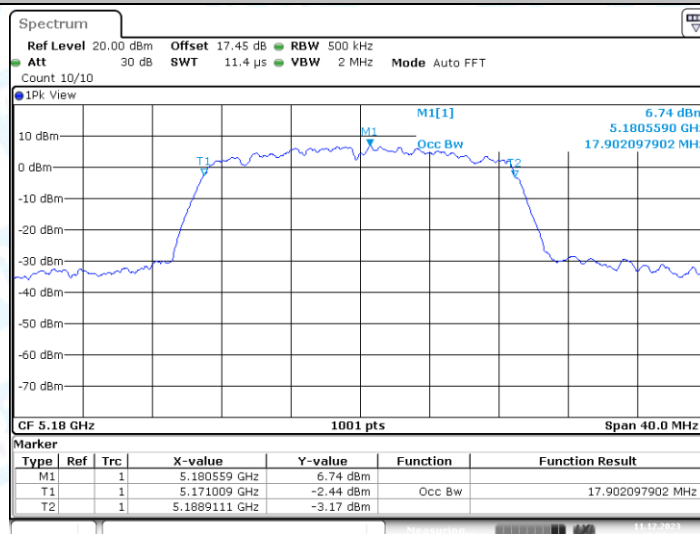


Date: 11.DEC.2023 09:53:43

11AC20SISO_Ant1_5200

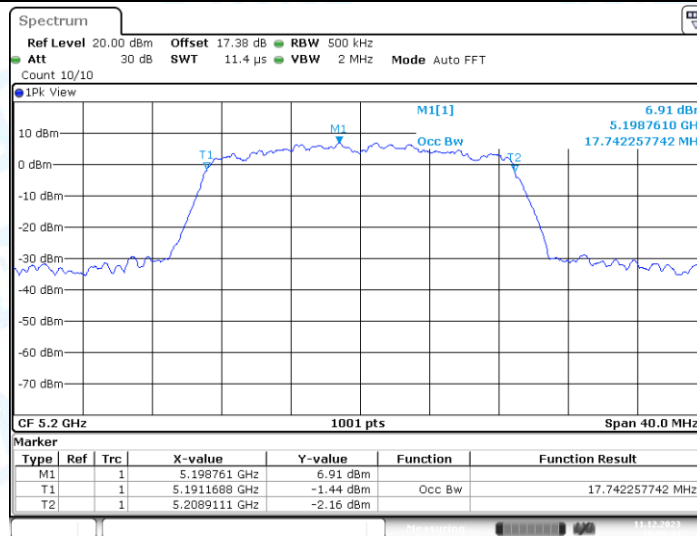


Date: 11.DEC.2023 10:05:43

11AC20SISO_Ant1_5240

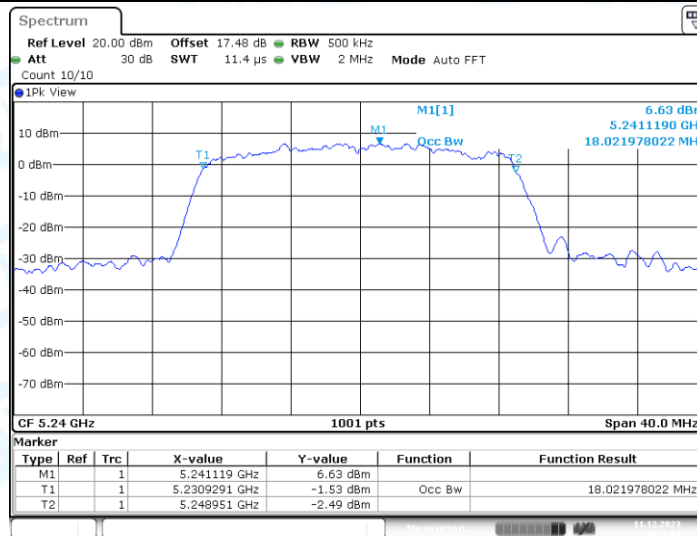


Date: 11.DEC.2023 10:11:04

11AC20SISO_Ant1_5745

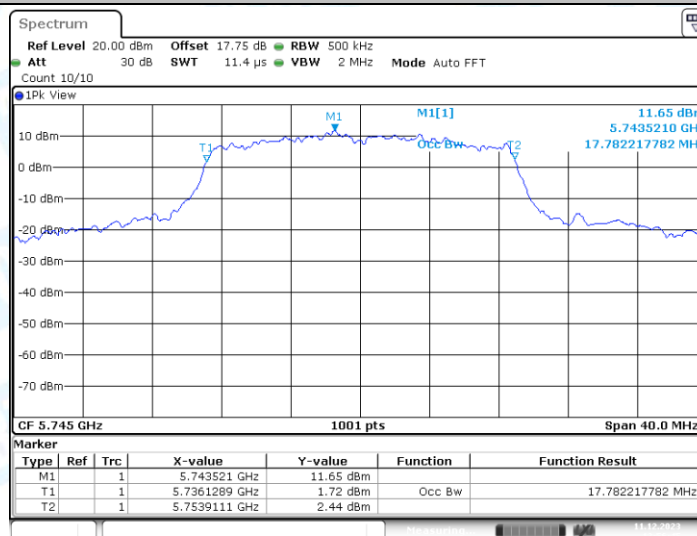


Date: 11.DEC.2023 13:56:45

11AC20SISO_Ant1_5785

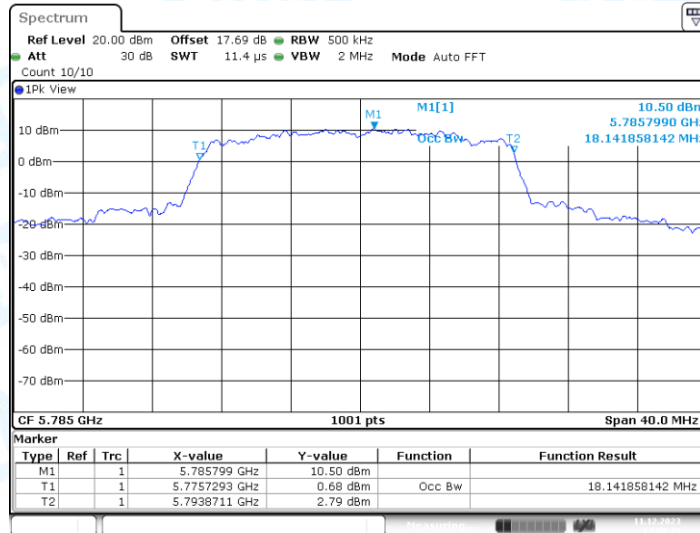


Date: 11.DEC.2023 14:07:23

11AC20SISO_Ant1_5825

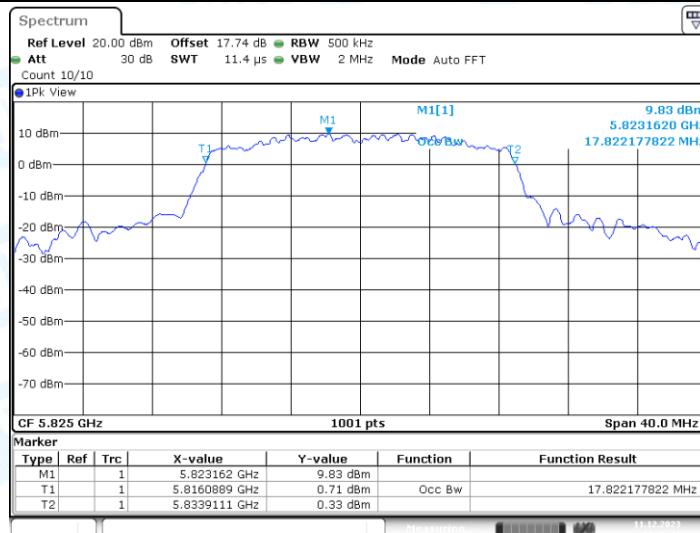


Date: 11.DEC.2023 14:26:41

11AC40SISO_Ant1_5190

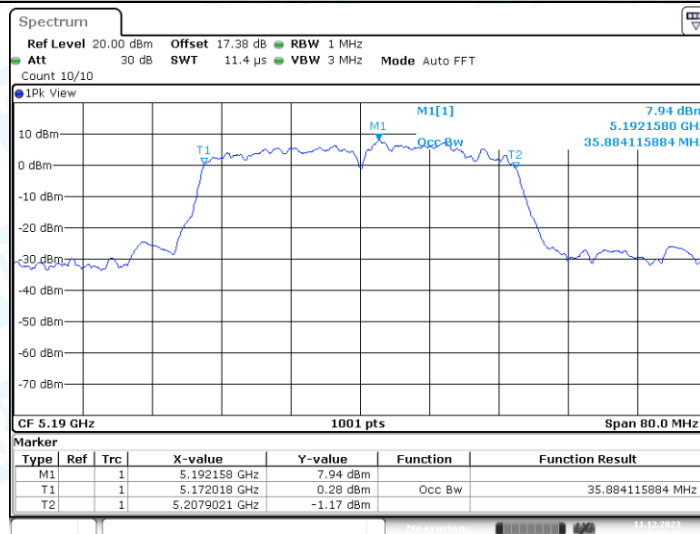


Date: 11.DEC.2023 10:19:43


11AC40SISO_Ant1_5230

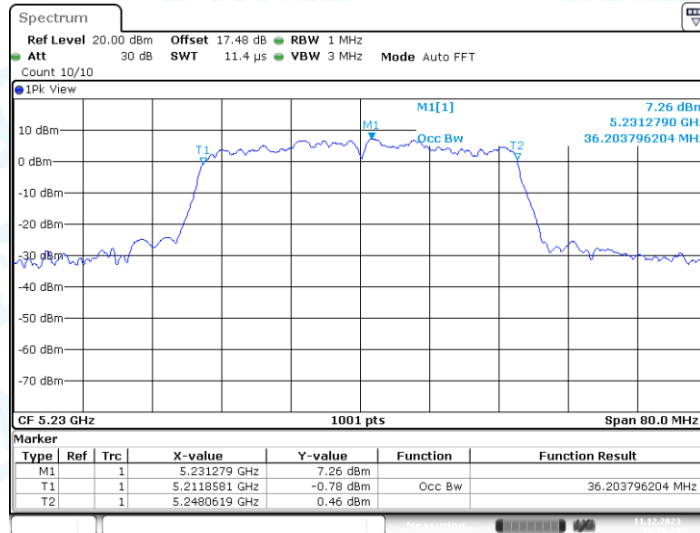

11AC40SISO_Ant1_5755

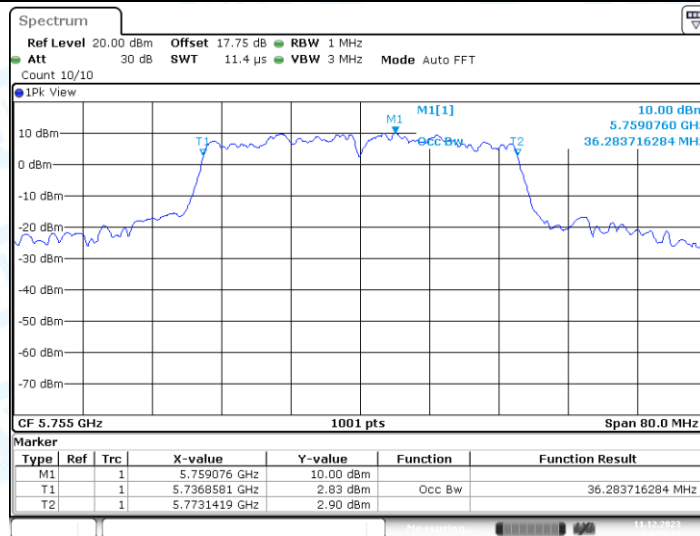

11AC40SISO_Ant1_5795

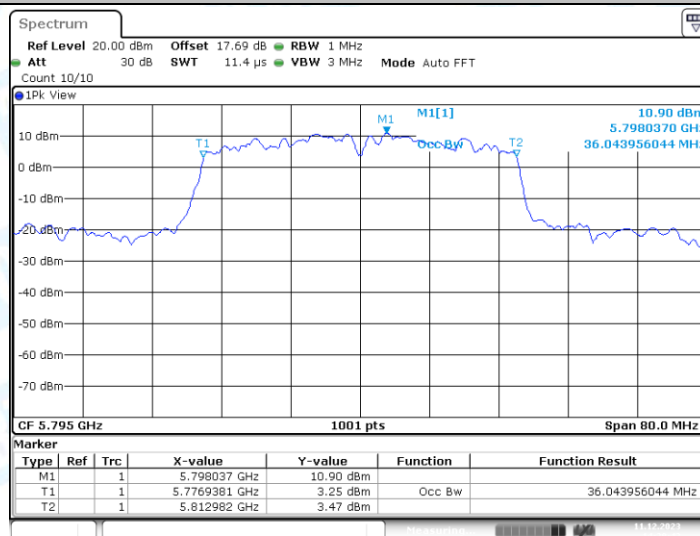



3. Min emission bandwidth

3.1. Test Result

TestMode	Antenna	Channel	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	16.32	5736.80	5753.12	0.5	PASS
		5785	16.36	5776.80	5793.16	0.5	PASS
		5825	13.84	5817.44	5831.28	0.5	PASS
11N20SISO	Ant1	5745	15.08	5737.44	5752.52	0.5	PASS
		5785	16.68	5776.84	5793.52	0.5	PASS
		5825	15.08	5817.44	5832.52	0.5	PASS
11N40SISO	Ant1	5755	33.84	5738.68	5772.52	0.5	PASS
		5795	34.96	5777.80	5812.76	0.5	PASS
11AC20SISO	Ant1	5745	13.88	5738.64	5752.52	0.5	PASS
		5785	15.32	5777.40	5792.72	0.5	PASS
		5825	17.60	5816.20	5833.80	0.5	PASS
11AC40SISO	Ant1	5755	35.20	5737.40	5772.60	0.5	PASS
		5795	33.84	5778.68	5812.52	0.5	PASS


3.2. Test Graphs

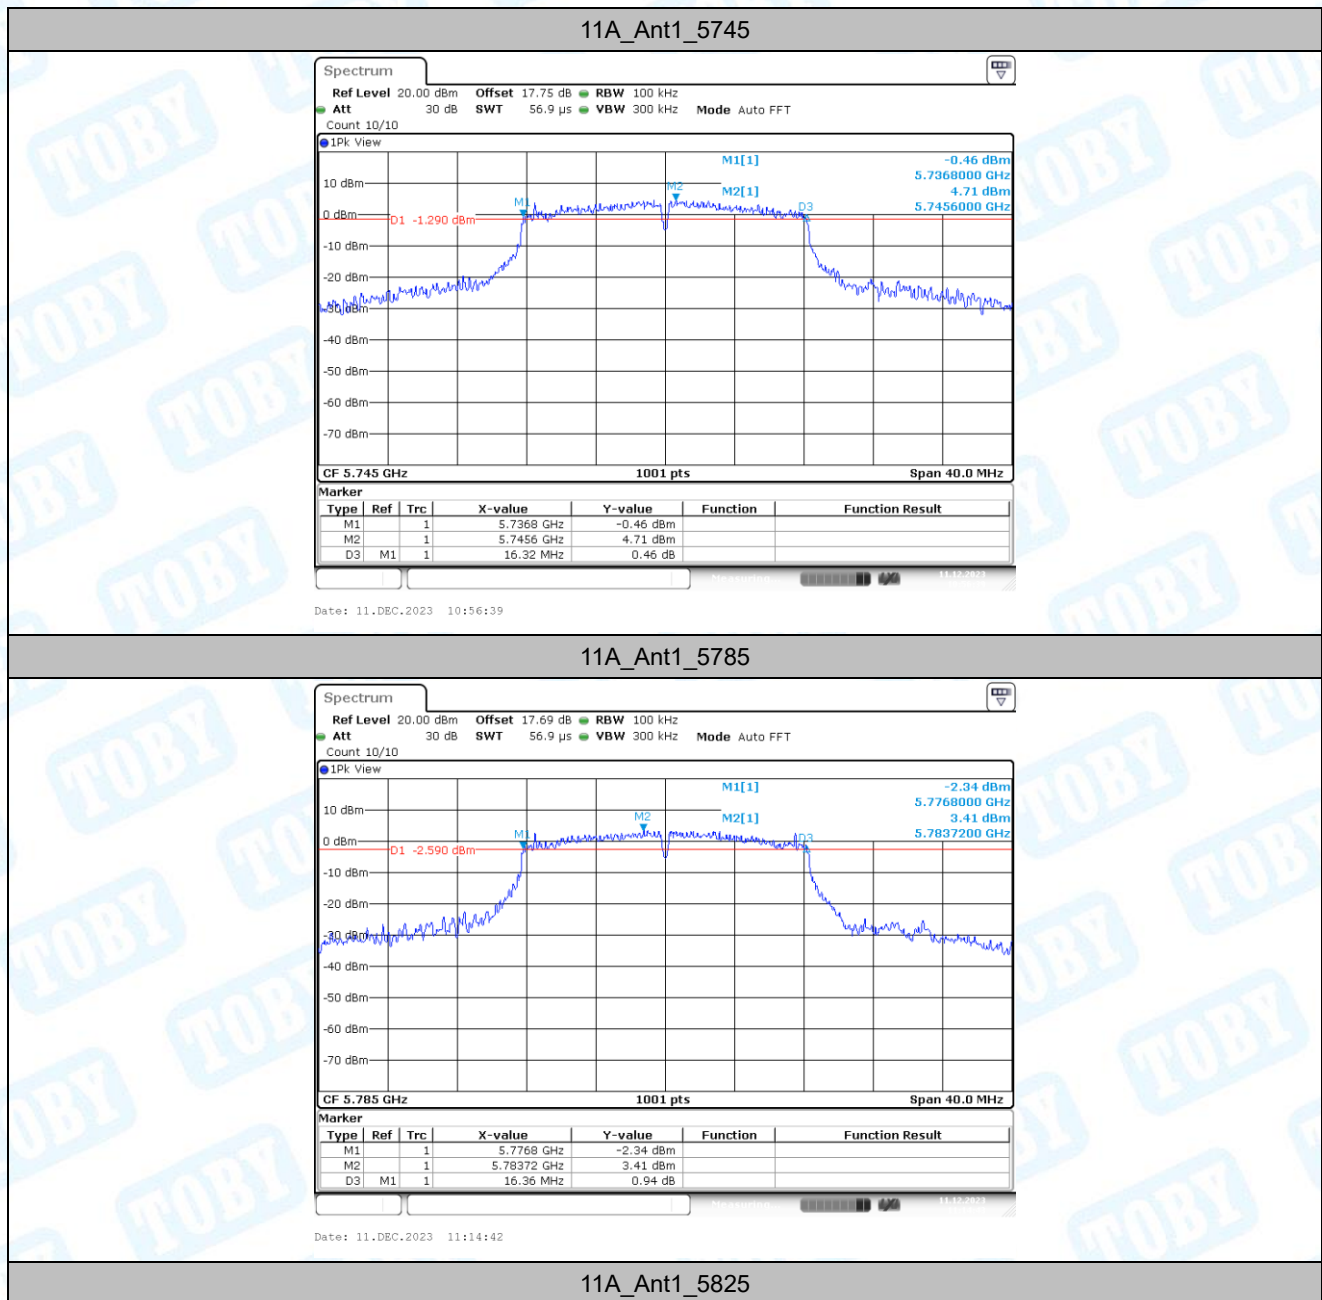

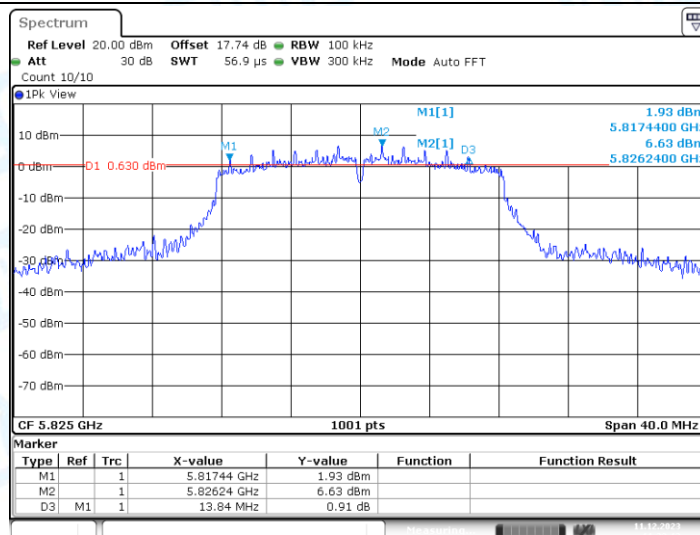


Date: 11.DEC.2023 11:23:13

11N20SISO_Ant1_5745

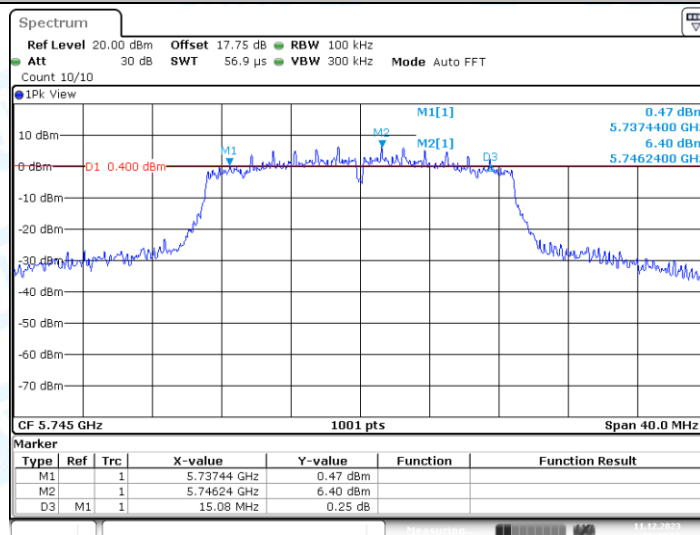


Date: 11.DEC.2023 11:29:56

11N20SISO_Ant1_5785

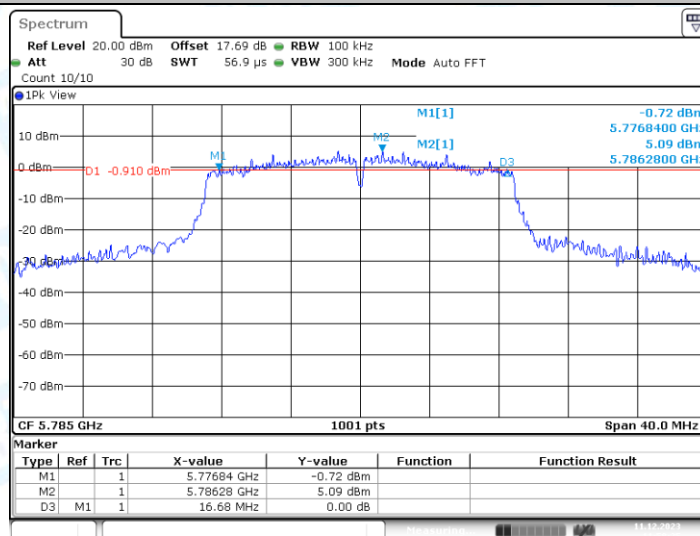


Date: 11.DEC.2023 11:58:25

11N20SISO_Ant1_5825

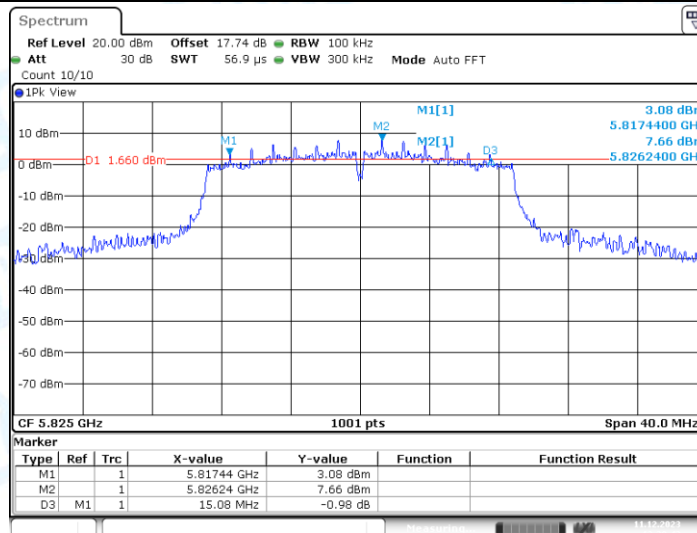


Date: 11.DEC.2023 13:30:42

11N40SISO_Ant1_5755

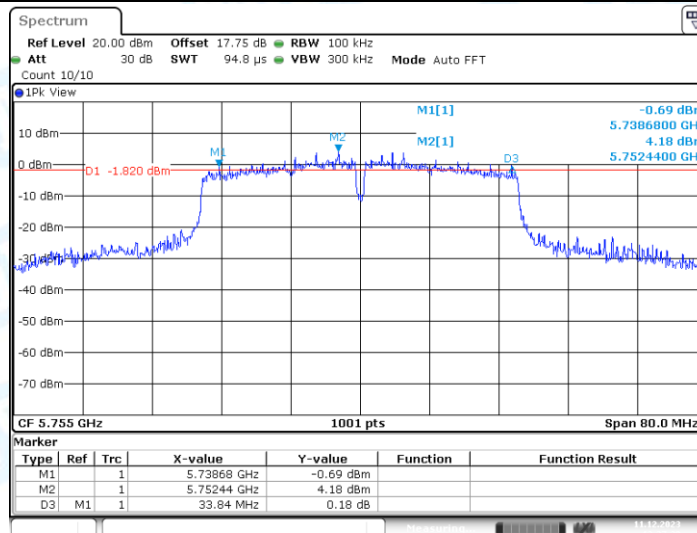


Date: 11.DEC.2023 13:37:20

11N40SISO_Ant1_5795

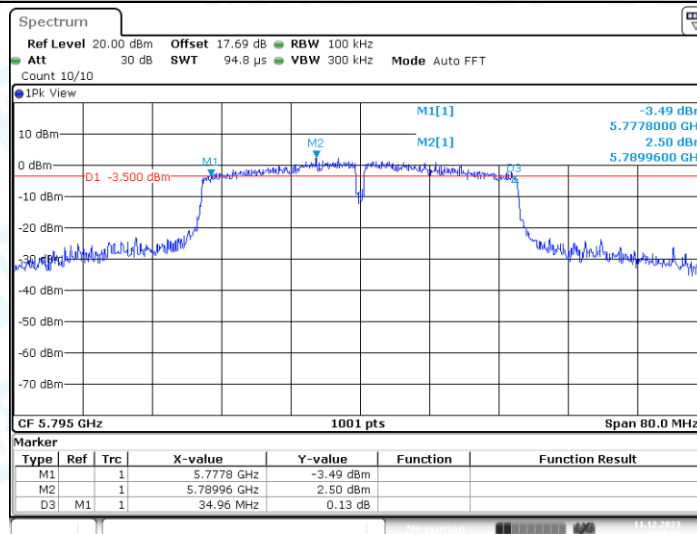


Date: 11.DEC.2023 13:44:20

11AC20SISO_Ant1_5745

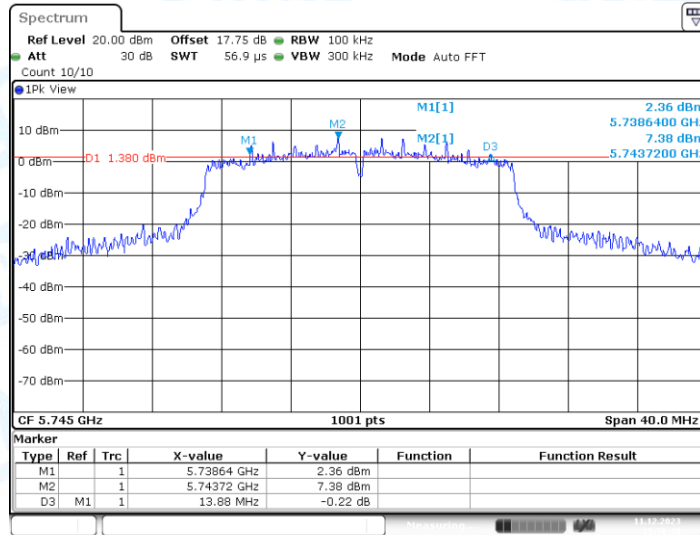


Date: 11.DEC.2023 13:56:39

11AC20SISO_Ant1_5785

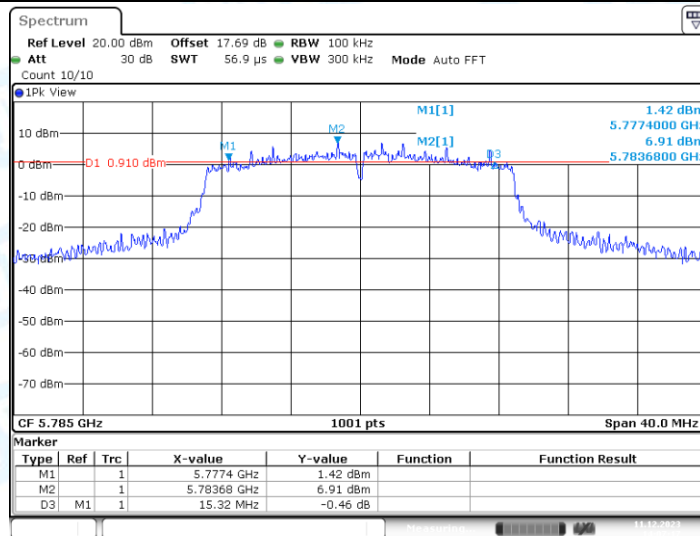


Date: 11.DEC.2023 14:07:16

11AC20SISO_Ant1_5825

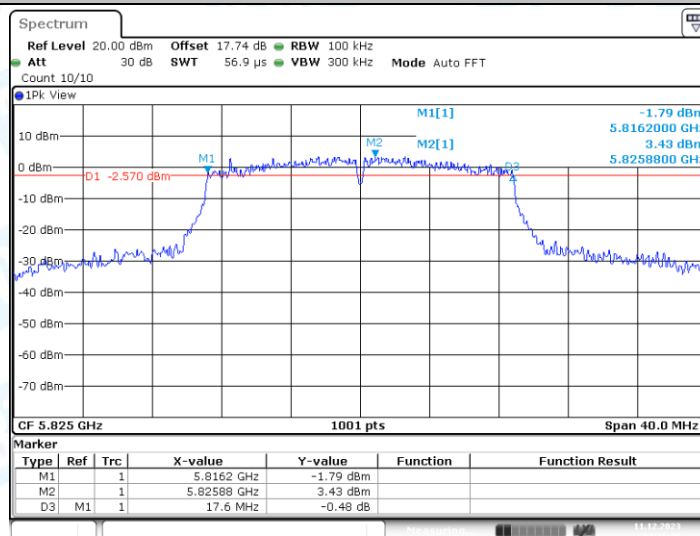


Date: 11.DEC.2023 14:26:34

11AC40SISO_Ant1_5755

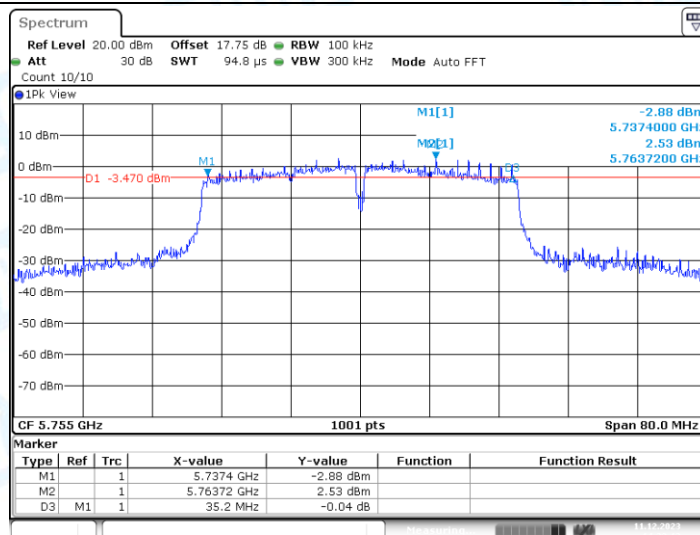

11AC40SISO_Ant1_5795

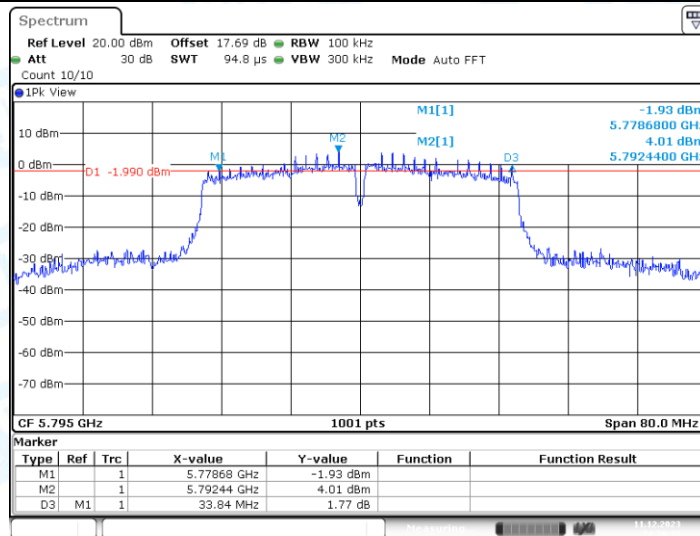

4. Maximum conducted output power

4.1. Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	5180	14.17	≤23.98	PASS
		5200	14.32	≤23.98	PASS
		5240	14.43	≤23.98	PASS
		5745	17.40	≤30.00	PASS
		5785	16.80	≤30.00	PASS
		5825	16.73	≤30.00	PASS
11N20SISO	Ant1	5180	14.27	≤23.98	PASS
		5200	14.05	≤23.98	PASS
		5240	14.11	≤23.98	PASS
		5745	16.64	≤30.00	PASS
		5785	17.19	≤30.00	PASS
		5825	17.85	≤30.00	PASS
11N40SISO	Ant1	5190	14.13	≤23.98	PASS
		5230	14.14	≤23.98	PASS
		5755	17.73	≤30.00	PASS
		5795	17.94	≤30.00	PASS
11AC20SISO	Ant1	5180	14.16	≤23.98	PASS
		5200	14.23	≤23.98	PASS
		5240	14.14	≤23.98	PASS
		5745	17.65	≤30.00	PASS
		5785	17.84	≤30.00	PASS
		5825	16.68	≤30.00	PASS
11AC40SISO	Ant1	5190	14.17	≤23.98	PASS
		5230	14.21	≤23.98	PASS
		5755	16.80	≤30.00	PASS
		5795	16.97	≤30.00	PASS

Note: The Duty Cycle Factor is compensated in the graph.

5. Maximum power spectral density


5.1. Test Result


TestMode	Antenna	Channel	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5180	3.88	≤11.00	PASS
		5200	3.83	≤11.00	PASS
		5240	3.67	≤11.00	PASS
		5745	3.61	≤30.00	PASS
		5785	3.41	≤30.00	PASS
		5825	4.05	≤30.00	PASS
11N20SISO	Ant1	5180	3.60	≤11.00	PASS
		5200	3.82	≤11.00	PASS
		5240	3.27	≤11.00	PASS
		5745	4.17	≤30.00	PASS
		5785	3.93	≤30.00	PASS
		5825	4.60	≤30.00	PASS
11N40SISO	Ant1	5190	0.87	≤11.00	PASS
		5230	0.65	≤11.00	PASS
		5755	1.96	≤30.00	PASS
		5795	2.39	≤30.00	PASS
11AC20SISO	Ant1	5180	3.41	≤11.00	PASS
		5200	4.07	≤11.00	PASS
		5240	3.58	≤11.00	PASS
		5745	4.99	≤30.00	PASS
		5785	4.90	≤30.00	PASS
		5825	3.85	≤30.00	PASS
11AC40SISO	Ant1	5190	1.00	≤11.00	PASS
		5230	1.04	≤11.00	PASS
		5755	1.18	≤30.00	PASS
		5795	0.97	≤30.00	PASS

Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.


2.The Duty Cycle Factor and RBW Factor is compensated in the graph.

5.2. Test Graphs

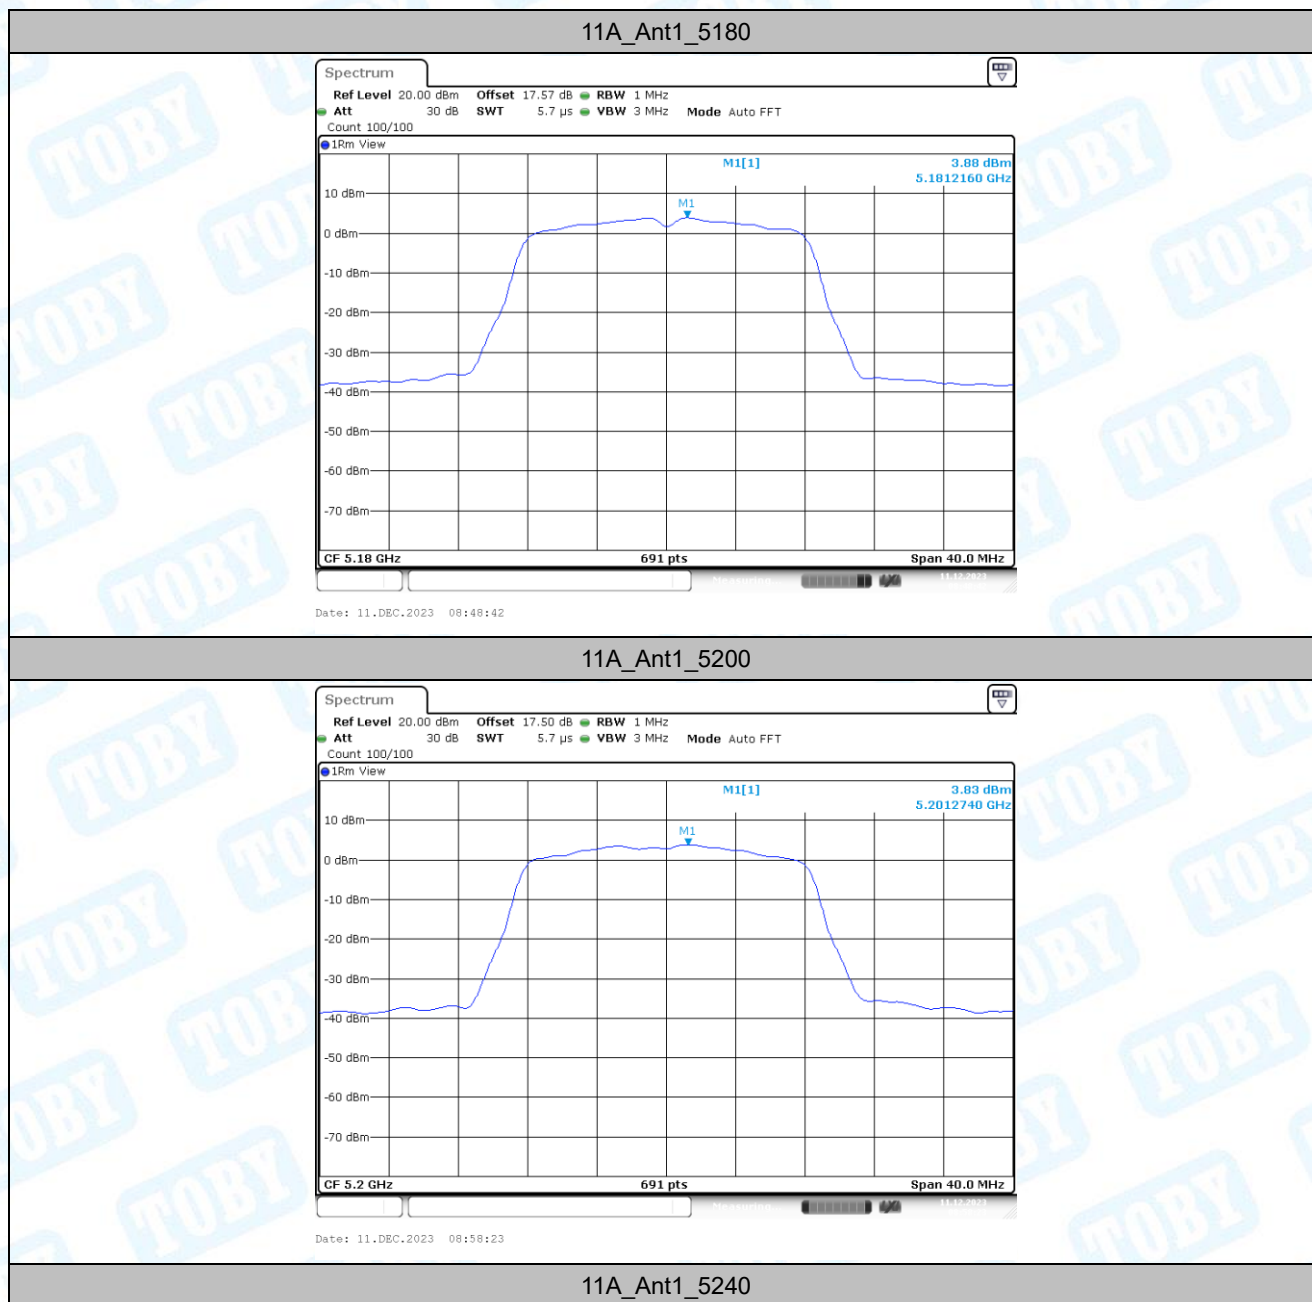


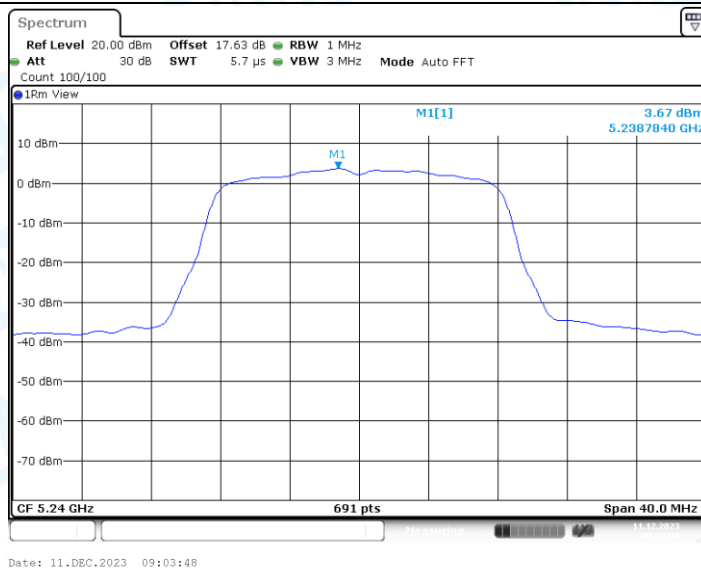

11A_Ant1_5745

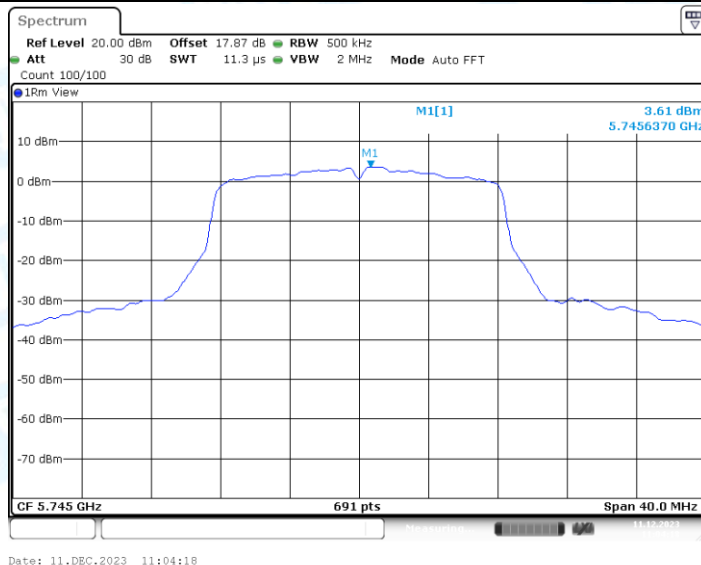


11A_Ant1_5785

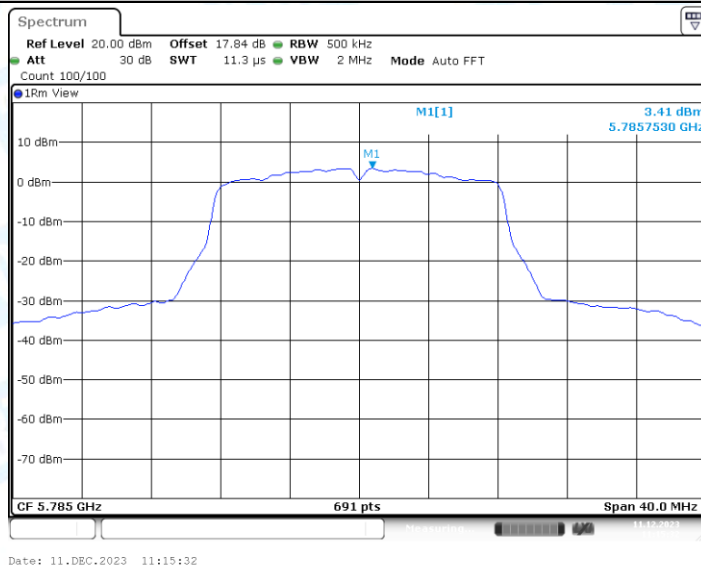


11A_Ant1_5825




11N20SISO_Ant1_5180

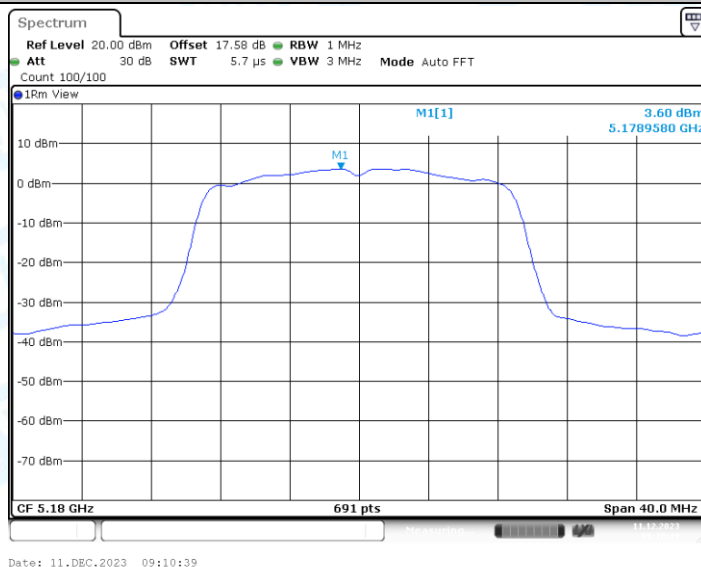


11N20SISO_Ant1_5200

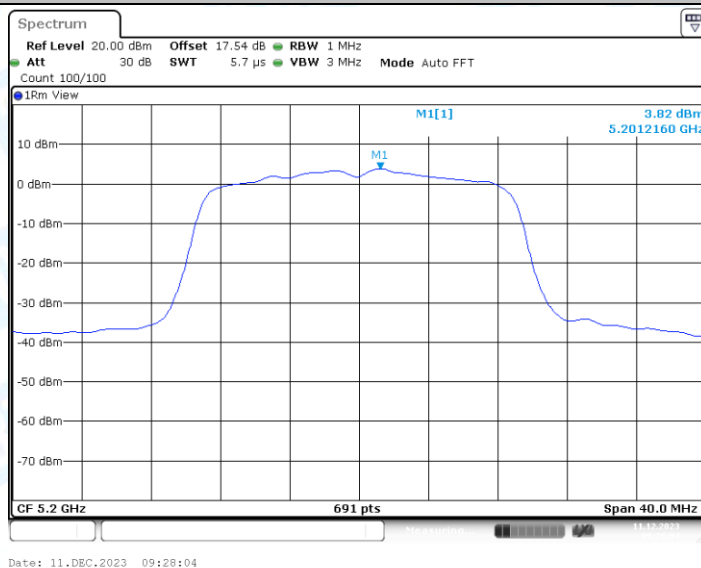


11N20SISO_Ant1_5240

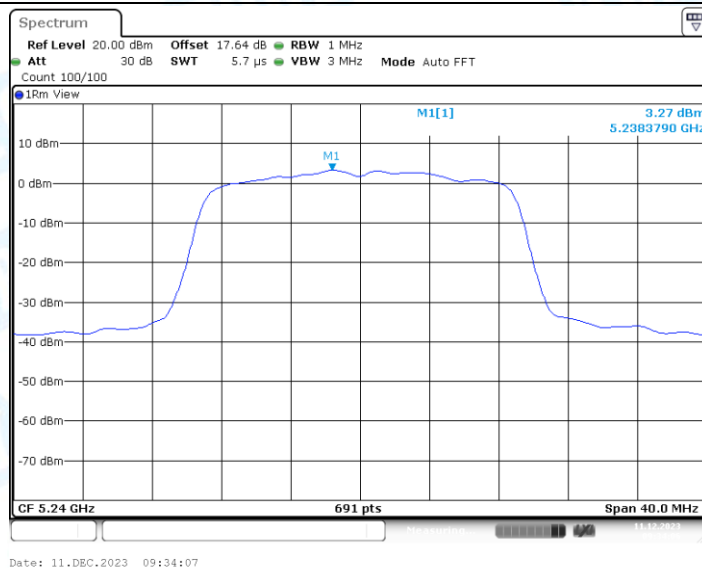


11N20SISO_Ant1_5745

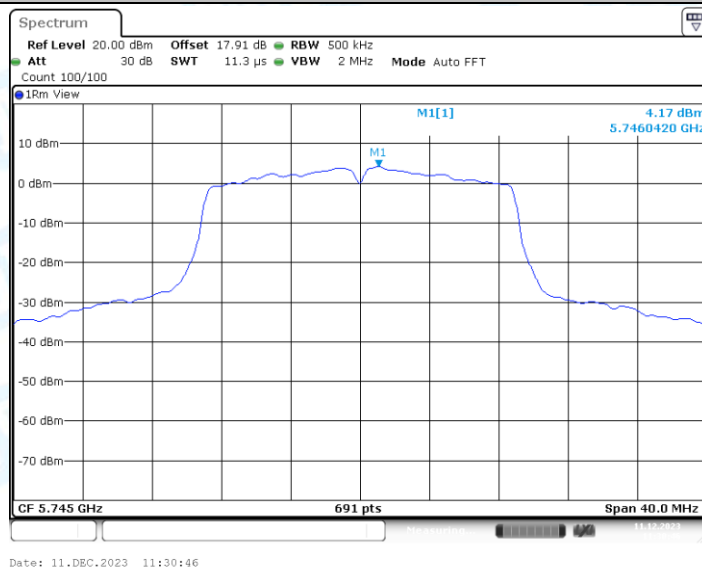


11N20SISO_Ant1_5785

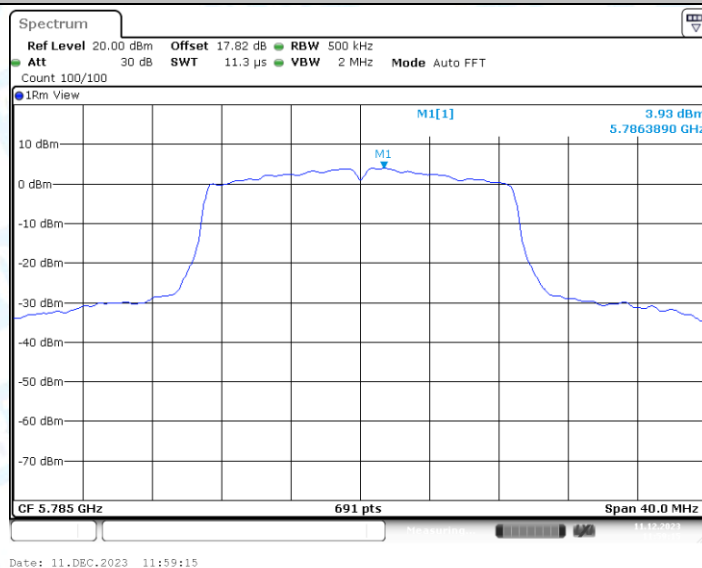


11N20SISO_Ant1_5825

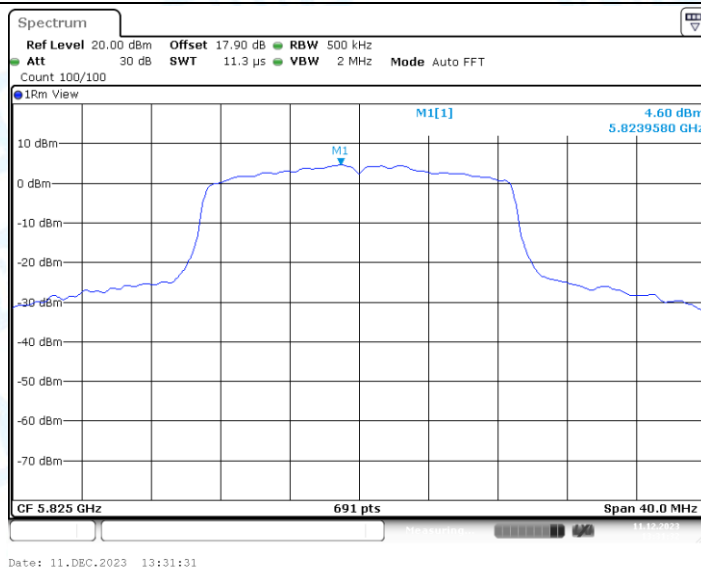


11N40SISO_Ant1_5190

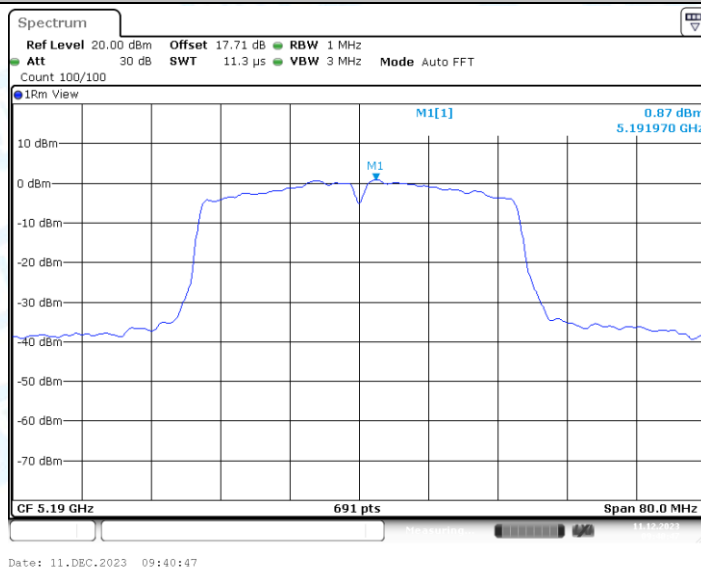


11N40SISO_Ant1_5230

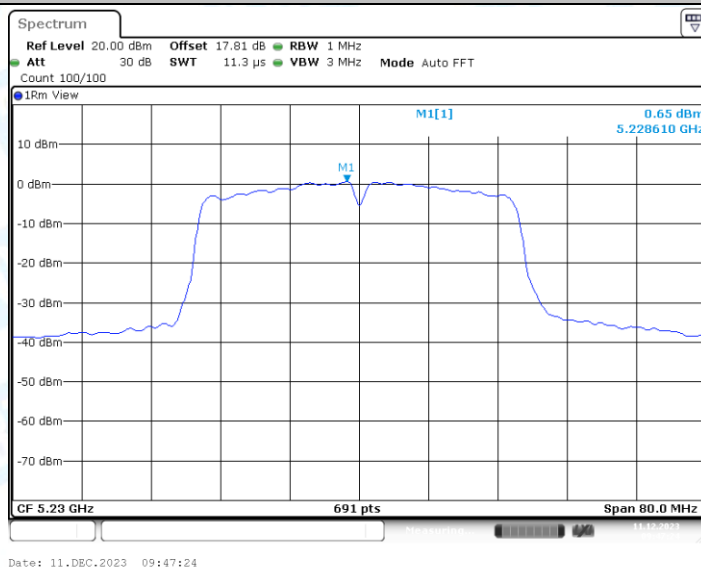


11N40SISO_Ant1_5755

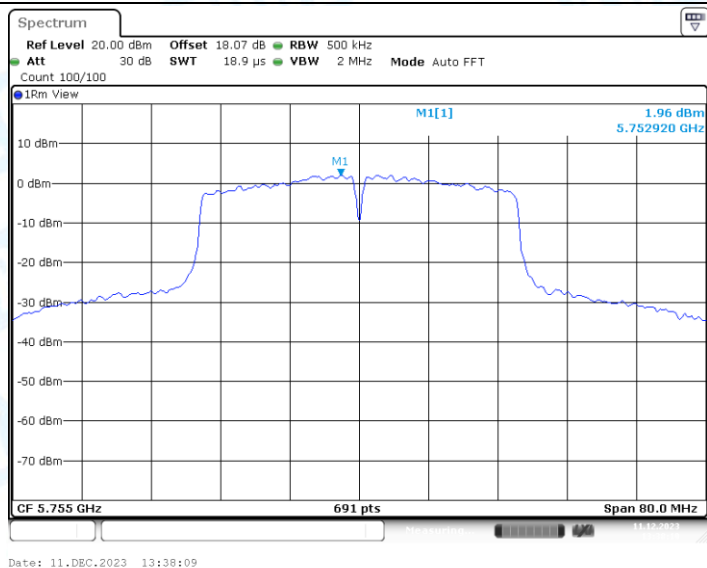


11N40SISO_Ant1_5795

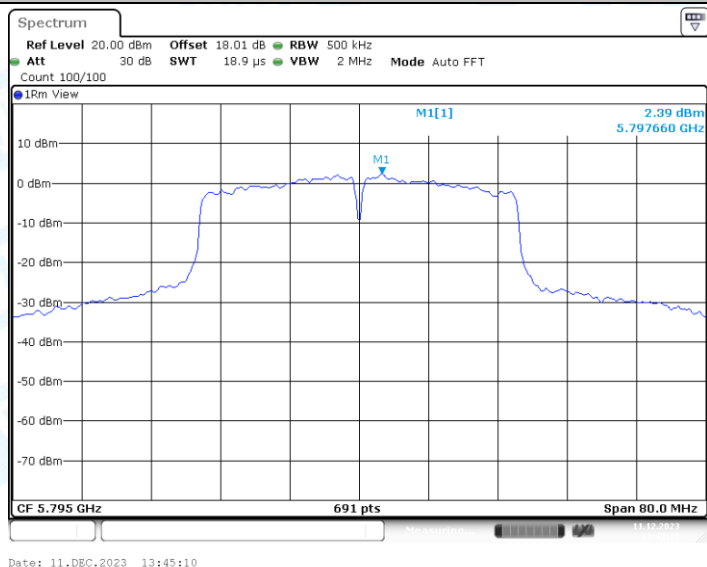


11AC20SISO_Ant1_5180

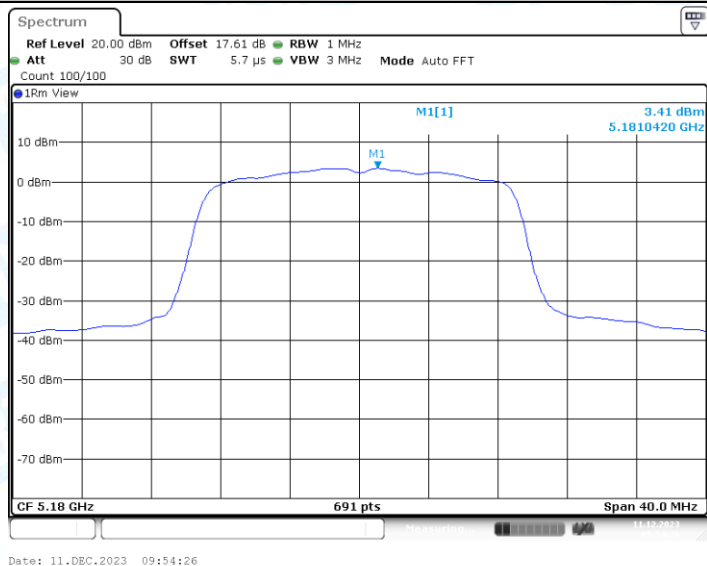


11AC20SISO_Ant1_5200

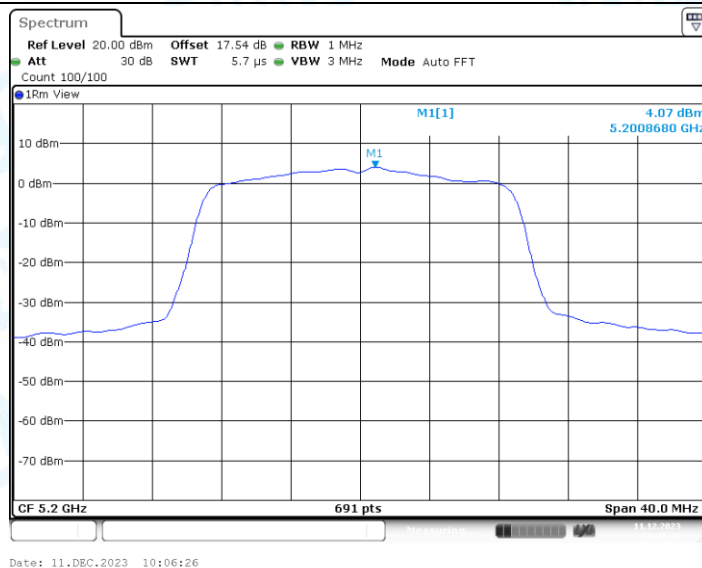

11AC20SISO_Ant1_5240

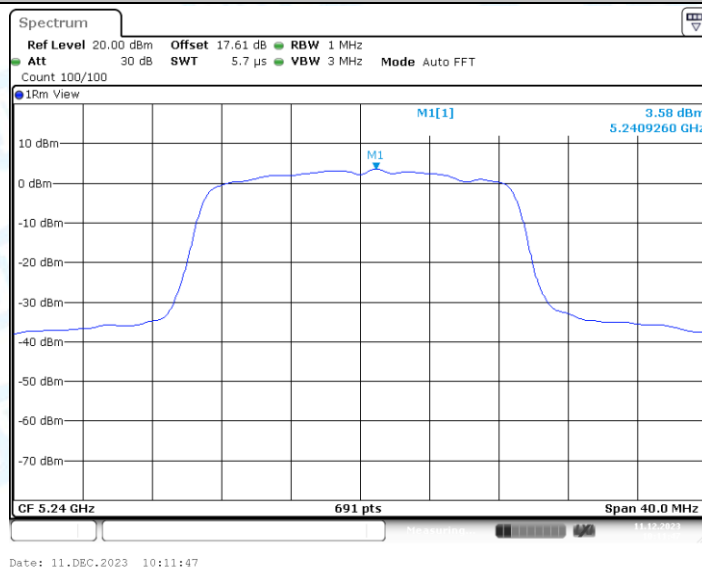

11AC20SISO_Ant1_5745

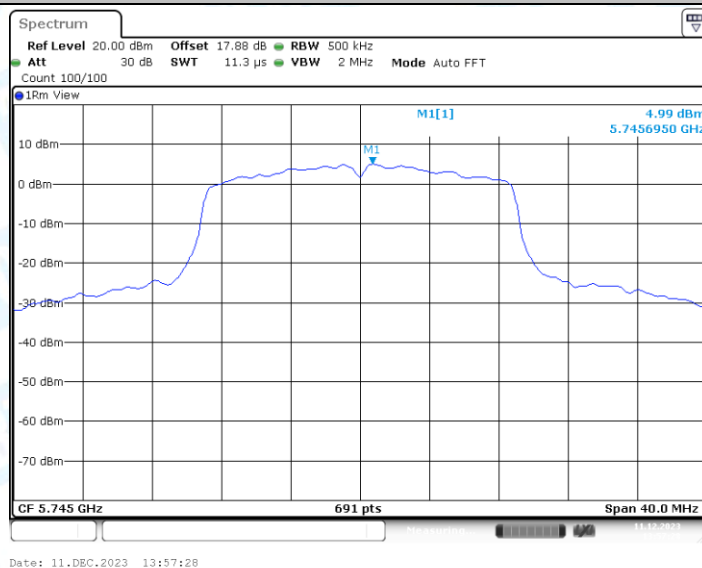

11AC20SISO_Ant1_5785