


Test Report No.: RF260623B002

CHANNEL BANDWIDTH	20MHz/QPSK	MODE	TX channel 381000
FREQUENCY RANGE	18G-19.5G	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH
INPUT POWER	120Vac 60HZ	TESTED BY	Carl Xie

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

Data List

NO.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	18351.970	-57.92	-49.95	7.97	-13.00	36.95	Horizon	PK	PASS
2	18871.974	-56.00	-47.73	8.27	-13.00	34.73	Horizon	PK	PASS
3	19400.680	-56.38	-47.14	9.24	-13.00	34.14	Horizon	PK	PASS

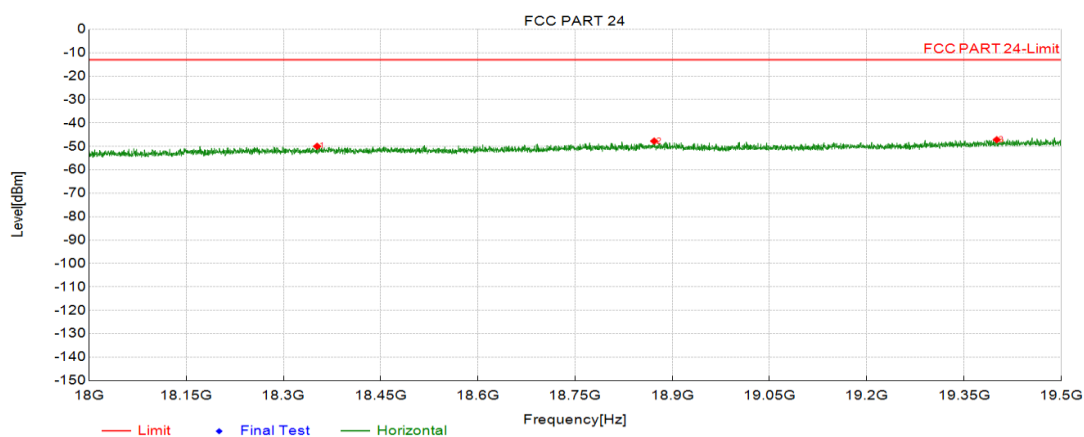

CHANNEL BANDWIDTH	20MHz/QPSK	MODE	TX channel 381000						
FREQUENCY RANGE	18G-19.5G	ENVIRONMENTAL CONDITIONS	23deg. C, 70%RH						
INPUT POWER	120Vac 60HZ	TESTED BY	Carl Xie						
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M									
Data List									
NO.	Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
1	18168.933	-57.49	-51.11	6.38	-13.00	38.11	Vertical	PK	PASS
2	18793.058	-56.64	-49.48	7.16	-13.00	36.48	Vertical	PK	PASS
3	19410.882	-56.01	-48.61	7.40	-13.00	35.61	Vertical	PK	PASS

FCC PART 24

Level[dBm]

Frequency[Hz]


— Limit • Final Test — Vertical

3.7 PEAK TO AVERAGE RATIO

3.7.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

3.7.2 TEST SETUP

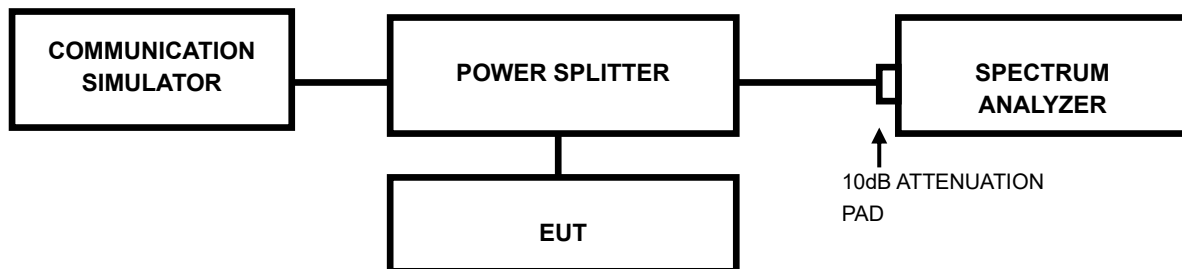

3.7.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.

3.7.4 TEST RESULTS

Please Refer to Appendix of this test report.



Test Report No.: RF260623B002

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: RF260623B002

5 INFORMATION ON THE TESTING LABORATORIES

We, BOOMWAVE TEST (SHENZHEN) CO., LTD., were founded in 2025 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

BOOMWAVE TEST (SHENZHEN) CO., LTD.

Lab Address:

Room B38, Warehouse A5(Chiwan No.1), No.3 Chiwan 4th Road, Chiwan Community, Zhaoshang Street, Nanshan District, Shenzhen, Guangdong, P.R. CHINA

Accredited Test Lab Cert 7607.01

Shenzhen EMC/RF Lab:

Mobile: +86 15118052731

Email: shimin.wang@boomwavelab.com

6 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

7 Appendix

LTE BAND 25 (INCLUDING B2)

Peak-to-Average Ratio(CCDF)


Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dB)	Limit(dB)	Verdict
Band25	1.4MHz	QPSK	26047	1RB#0	6.50	13	PASS
Band25	1.4MHz	QPSK	26047	6RB#0	6.90	13	PASS
Band25	1.4MHz	QPSK	26365	1RB#0	6.32	13	PASS
Band25	1.4MHz	QPSK	26365	6RB#0	6.95	13	PASS
Band25	1.4MHz	QPSK	26683	1RB#0	5.70	13	PASS
Band25	1.4MHz	QPSK	26683	6RB#0	6.03	13	PASS
Band25	1.4MHz	64QAM	26047	1RB#0	7.62	13	PASS
Band25	1.4MHz	64QAM	26047	6RB#0	7.86	13	PASS
Band25	1.4MHz	64QAM	26365	1RB#0	7.69	13	PASS
Band25	1.4MHz	64QAM	26365	6RB#0	7.85	13	PASS
Band25	1.4MHz	64QAM	26683	1RB#0	6.91	13	PASS
Band25	1.4MHz	64QAM	26683	6RB#0	7.26	13	PASS
Band25	1.4MHz	16QAM	26047	1RB#0	7.07	13	PASS
Band25	1.4MHz	16QAM	26047	6RB#0	7.54	13	PASS
Band25	1.4MHz	16QAM	26365	1RB#0	7.22	13	PASS
Band25	1.4MHz	16QAM	26365	6RB#0	7.52	13	PASS
Band25	1.4MHz	16QAM	26683	1RB#0	6.15	13	PASS
Band25	1.4MHz	16QAM	26683	6RB#0	6.73	13	PASS
Band25	3MHz	QPSK	26055	1RB#0	6.48	13	PASS
Band25	3MHz	QPSK	26055	15RB#0	7.06	13	PASS
Band25	3MHz	QPSK	26365	1RB#0	6.36	13	PASS
Band25	3MHz	QPSK	26365	15RB#0	6.90	13	PASS
Band25	3MHz	QPSK	26675	1RB#0	5.76	13	PASS
Band25	3MHz	QPSK	26675	15RB#0	6.31	13	PASS
Band25	3MHz	64QAM	26055	1RB#0	7.72	13	PASS
Band25	3MHz	64QAM	26055	15RB#0	7.87	13	PASS
Band25	3MHz	64QAM	26365	1RB#0	7.56	13	PASS
Band25	3MHz	64QAM	26365	15RB#0	7.77	13	PASS
Band25	3MHz	64QAM	26675	1RB#0	7.11	13	PASS
Band25	3MHz	64QAM	26675	15RB#0	7.32	13	PASS
Band25	3MHz	16QAM	26055	1RB#0	7.11	13	PASS
Band25	3MHz	16QAM	26055	15RB#0	7.62	13	PASS
Band25	3MHz	16QAM	26365	1RB#0	7.20	13	PASS
Band25	3MHz	16QAM	26365	15RB#0	7.59	13	PASS
Band25	3MHz	16QAM	26675	1RB#0	6.47	13	PASS
Band25	3MHz	16QAM	26675	15RB#0	6.67	13	PASS
Band25	5MHz	QPSK	26065	1RB#0	6.21	13	PASS
Band25	5MHz	QPSK	26065	25RB#0	7.04	13	PASS
Band25	5MHz	QPSK	26365	1RB#0	6.44	13	PASS
Band25	5MHz	QPSK	26365	25RB#0	6.94	13	PASS
Band25	5MHz	QPSK	26665	1RB#0	6.01	13	PASS
Band25	5MHz	QPSK	26665	25RB#0	6.34	13	PASS
Band25	5MHz	64QAM	26065	1RB#0	7.63	13	PASS
Band25	5MHz	64QAM	26065	25RB#0	7.93	13	PASS
Band25	5MHz	64QAM	26365	1RB#0	7.53	13	PASS
Band25	5MHz	64QAM	26365	25RB#0	7.87	13	PASS
Band25	5MHz	64QAM	26665	1RB#0	7.39	13	PASS

Test Report No.: RF260623B002

Band25	5MHz	64QAM	26665	25RB#0	7.43	13	PASS
Band25	5MHz	16QAM	26065	1RB#0	7.15	13	PASS
Band25	5MHz	16QAM	26065	25RB#0	7.69	13	PASS
Band25	5MHz	16QAM	26365	1RB#0	7.14	13	PASS
Band25	5MHz	16QAM	26365	25RB#0	7.54	13	PASS
Band25	5MHz	16QAM	26665	1RB#0	6.73	13	PASS
Band25	5MHz	16QAM	26665	25RB#0	7.06	13	PASS
Band25	10MHz	QPSK	26090	1RB#0	6.57	13	PASS
Band25	10MHz	QPSK	26090	50RB#0	7.00	13	PASS
Band25	10MHz	QPSK	26365	1RB#0	6.05	13	PASS
Band25	10MHz	QPSK	26365	50RB#0	6.98	13	PASS
Band25	10MHz	QPSK	26640	1RB#0	6.53	13	PASS
Band25	10MHz	QPSK	26640	50RB#0	6.62	13	PASS
Band25	10MHz	64QAM	26090	1RB#0	7.51	13	PASS
Band25	10MHz	64QAM	26090	50RB#0	7.99	13	PASS
Band25	10MHz	64QAM	26365	1RB#0	7.26	13	PASS
Band25	10MHz	64QAM	26365	50RB#0	7.60	13	PASS
Band25	10MHz	64QAM	26640	1RB#0	7.82	13	PASS
Band25	10MHz	64QAM	26640	50RB#0	7.53	13	PASS
Band25	10MHz	16QAM	26090	1RB#0	7.05	13	PASS
Band25	10MHz	16QAM	26090	50RB#0	7.80	13	PASS
Band25	10MHz	16QAM	26365	1RB#0	6.65	13	PASS
Band25	10MHz	16QAM	26365	50RB#0	7.56	13	PASS
Band25	10MHz	16QAM	26640	1RB#0	7.19	13	PASS
Band25	10MHz	16QAM	26640	50RB#0	7.29	13	PASS
Band25	15MHz	QPSK	26115	1RB#0	6.72	13	PASS
Band25	15MHz	QPSK	26115	75RB#0	7.24	13	PASS
Band25	15MHz	QPSK	26365	1RB#0	5.80	13	PASS
Band25	15MHz	QPSK	26365	75RB#0	7.20	13	PASS
Band25	15MHz	QPSK	26615	1RB#0	6.24	13	PASS
Band25	15MHz	QPSK	26615	75RB#0	6.96	13	PASS
Band25	15MHz	64QAM	26115	1RB#0	7.61	13	PASS
Band25	15MHz	64QAM	26115	75RB#0	8.10	13	PASS
Band25	15MHz	64QAM	26365	1RB#0	6.95	13	PASS
Band25	15MHz	64QAM	26365	75RB#0	7.90	13	PASS
Band25	15MHz	64QAM	26615	1RB#0	7.21	13	PASS
Band25	15MHz	64QAM	26615	75RB#0	7.94	13	PASS
Band25	15MHz	16QAM	26115	1RB#0	7.12	13	PASS
Band25	15MHz	16QAM	26115	75RB#0	7.89	13	PASS
Band25	15MHz	16QAM	26365	1RB#0	6.35	13	PASS
Band25	15MHz	16QAM	26365	75RB#0	7.69	13	PASS
Band25	15MHz	16QAM	26615	1RB#0	6.74	13	PASS
Band25	15MHz	16QAM	26615	75RB#0	7.60	13	PASS
Band25	20MHz	QPSK	26140	1RB#0	6.53	13	PASS
Band25	20MHz	QPSK	26140	100RB#0	7.05	13	PASS
Band25	20MHz	QPSK	26365	1RB#0	5.69	13	PASS
Band25	20MHz	QPSK	26365	100RB#0	7.01	13	PASS
Band25	20MHz	QPSK	26590	1RB#0	6.01	13	PASS
Band25	20MHz	QPSK	26590	100RB#0	7.03	13	PASS
Band25	20MHz	64QAM	26140	1RB#0	7.59	13	PASS
Band25	20MHz	64QAM	26140	100RB#0	7.82	13	PASS
Band25	20MHz	64QAM	26365	1RB#0	6.88	13	PASS
Band25	20MHz	64QAM	26365	100RB#0	7.73	13	PASS
Band25	20MHz	64QAM	26590	1RB#0	7.04	13	PASS
Band25	20MHz	64QAM	26590	100RB#0	7.80	13	PASS
Band25	20MHz	16QAM	26140	1RB#0	7.07	13	PASS
Band25	20MHz	16QAM	26140	100RB#0	7.62	13	PASS
Band25	20MHz	16QAM	26365	1RB#0	6.23	13	PASS
Band25	20MHz	16QAM	26365	100RB#0	7.63	13	PASS
Band25	20MHz	16QAM	26590	1RB#0	6.44	13	PASS
Band25	20MHz	16QAM	26590	100RB#0	7.48	13	PASS

Test Graphs

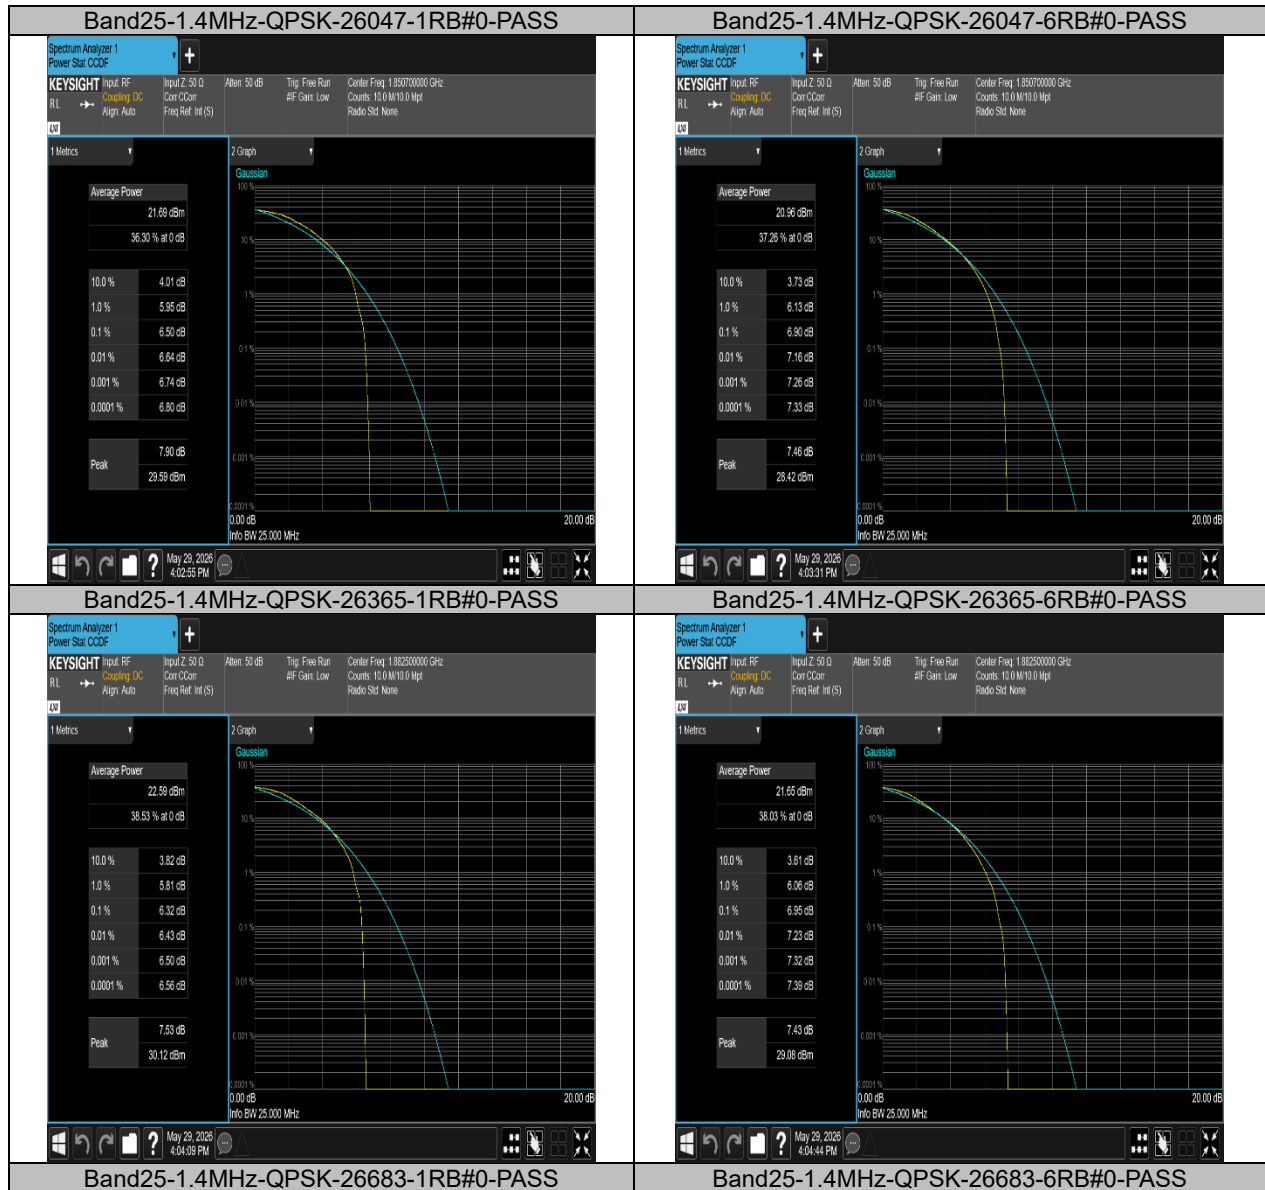


Test Report No.: RF260623B002



Test Report No.: RF260623B002



Test Report No.: RF260623B002

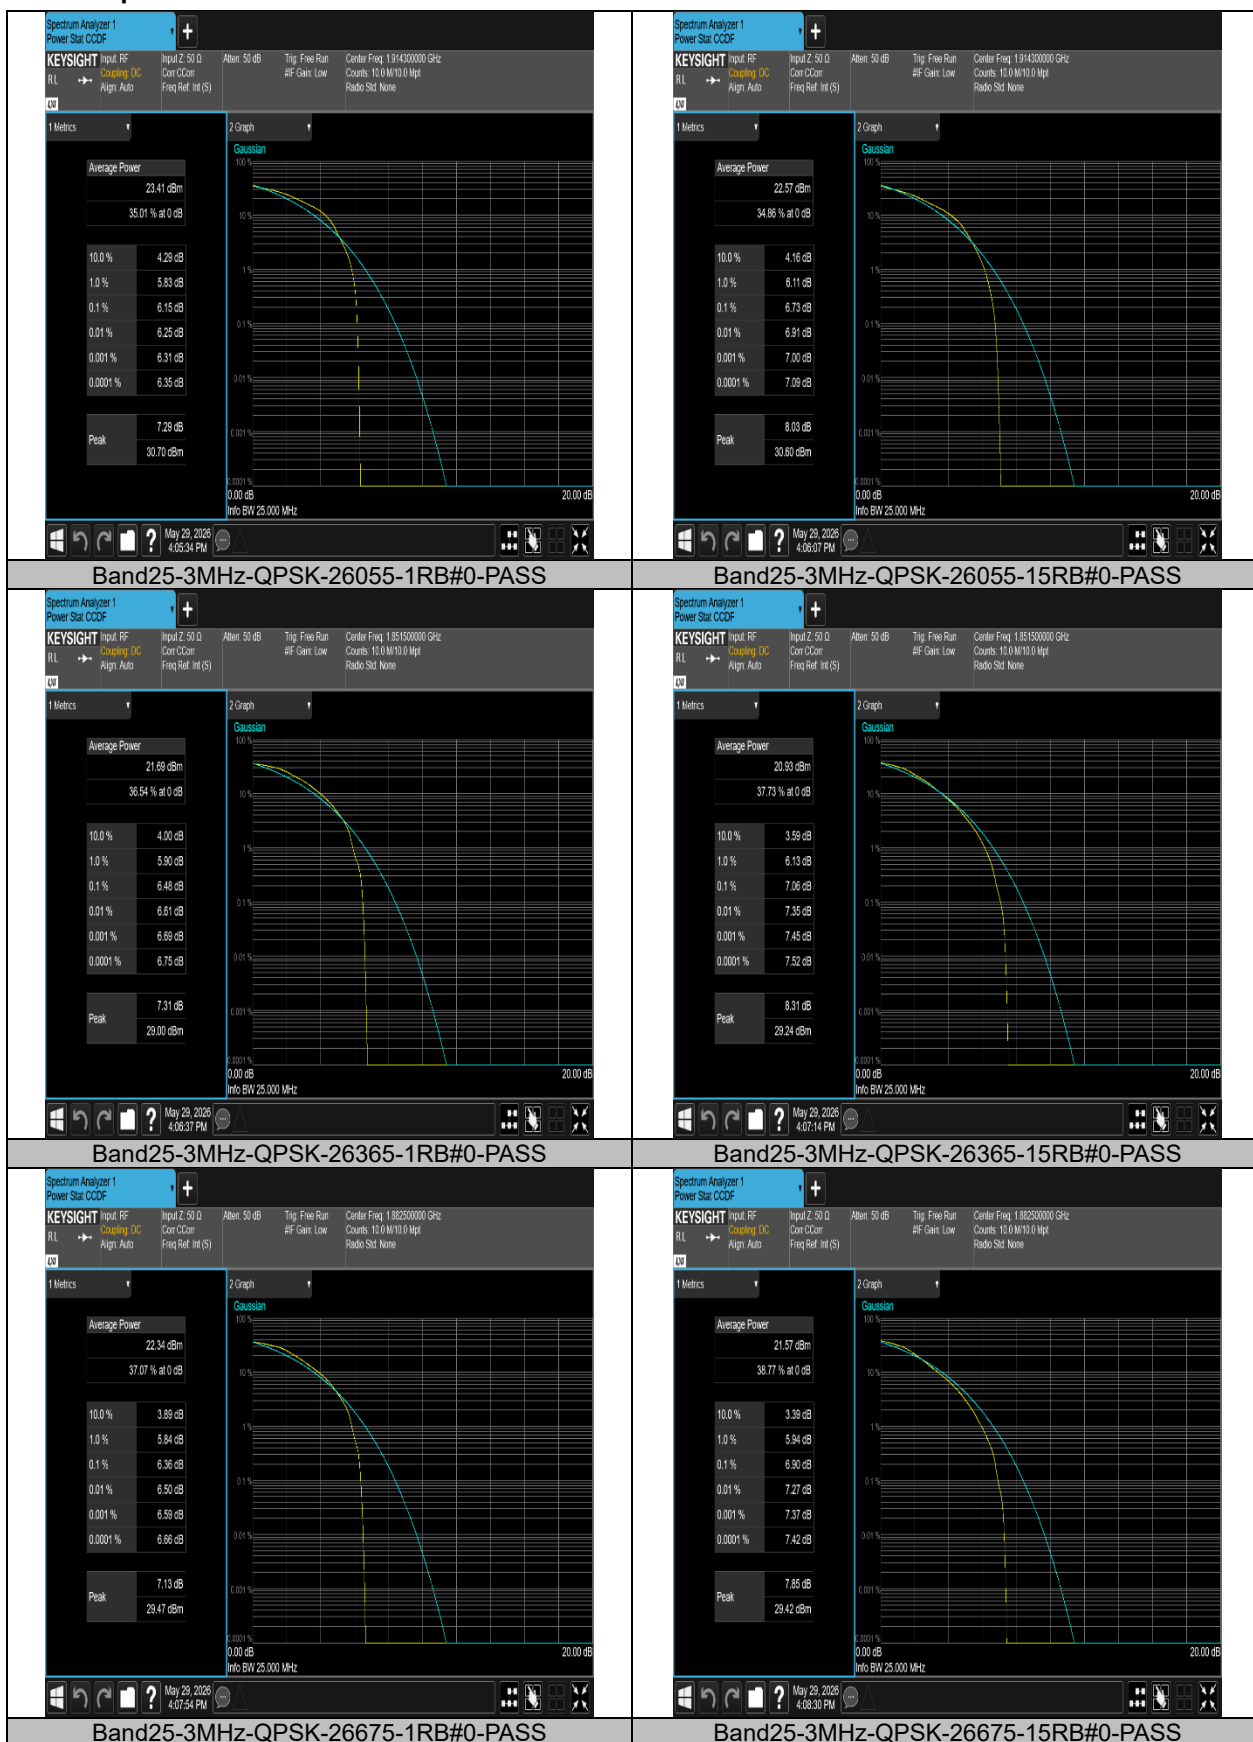

Test Report No.: RF260623B002



Test Report No.: RF260623B002




BOOMWAVE TEST (SHENZHEN)
CO., LTD.

Room B38, Warehouse A5(Chiwan No.1), No.3 Chiwan
4th Road, Chiwan Community, Zhaoshang Street,
Nanshan District, Shenzhen, Guangdong, P.R. CHINA

Mobile: +86 15118052731
Email:shimin.wang@boomwavelab.com

Test Report No.: RF260623B002

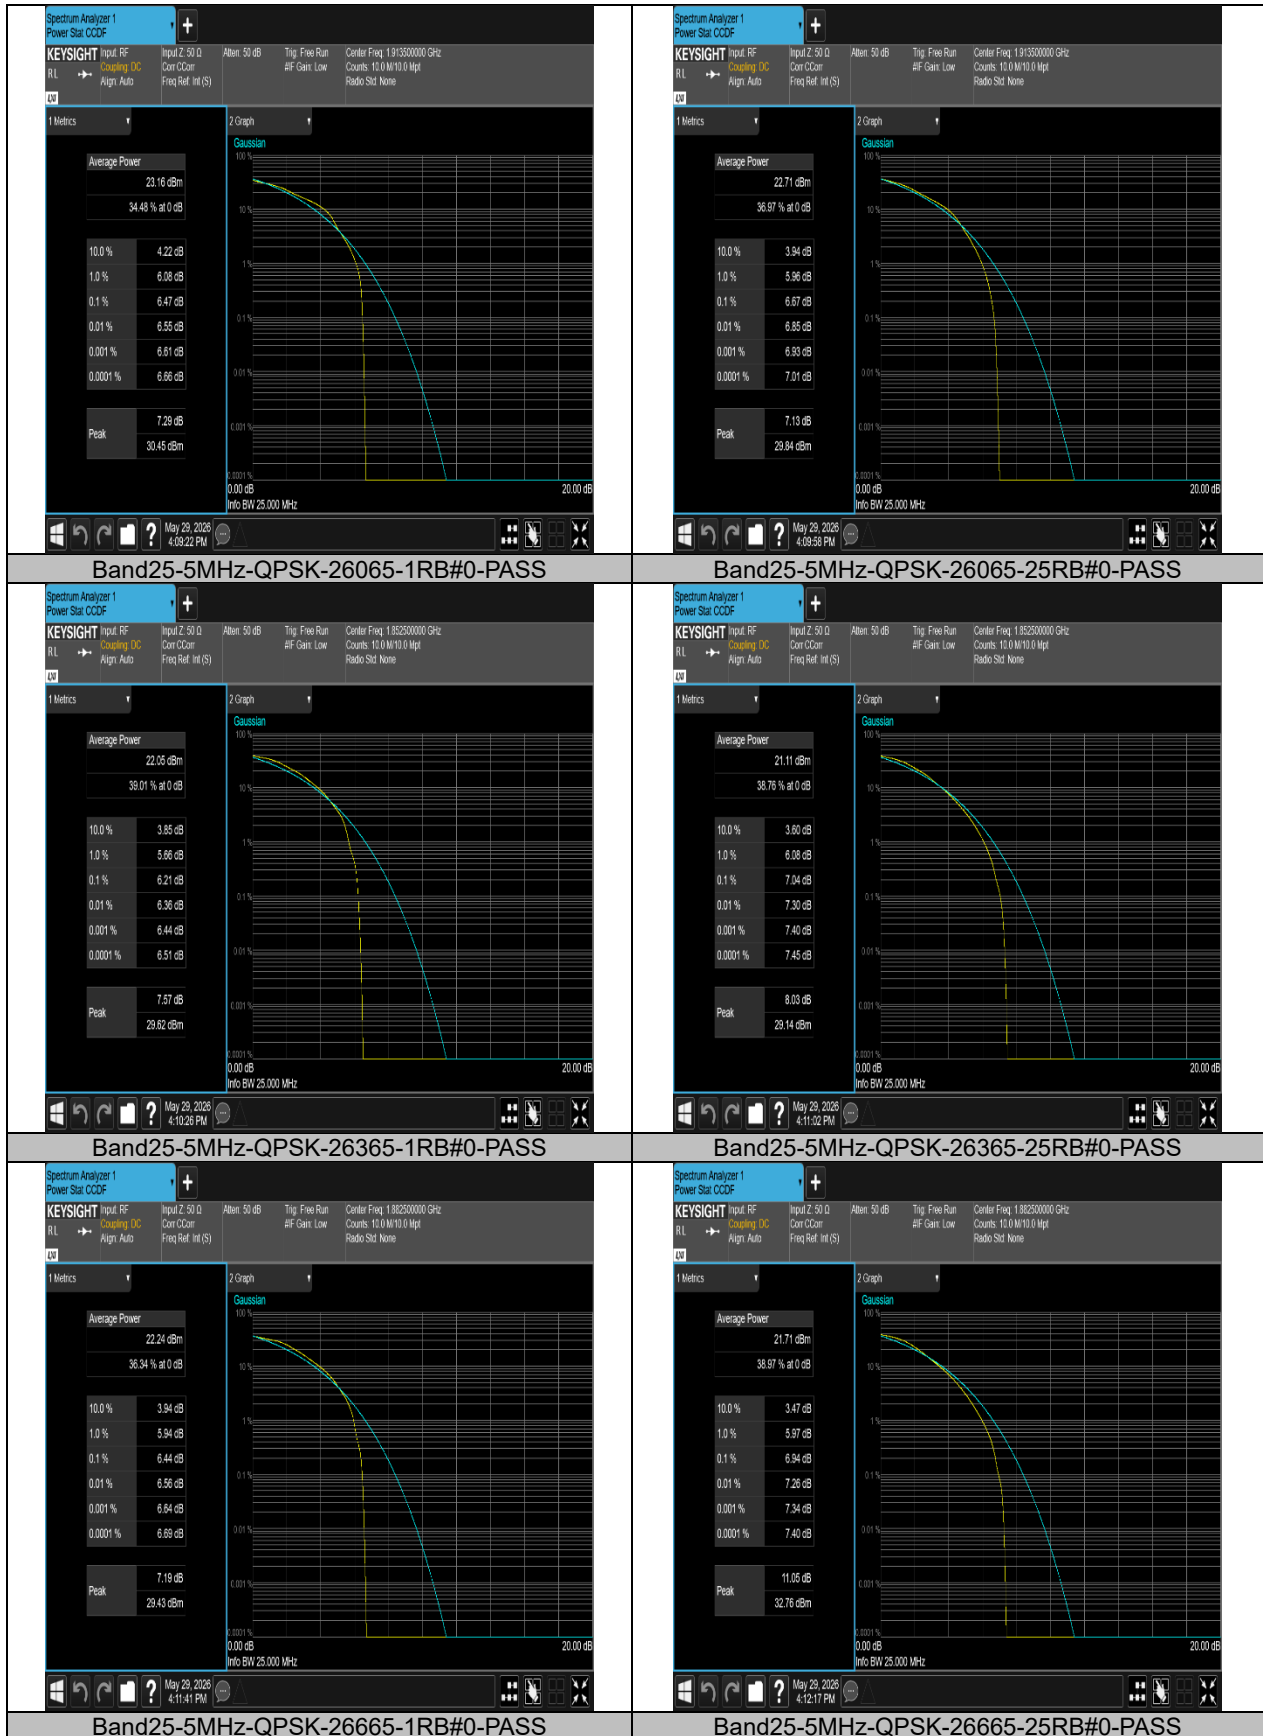

BOOMWAVE TEST (SHENZHEN)
CO., LTD.

Room B38, Warehouse A5(Chiwan No.1), No.3 Chiwan
4th Road, Chiwan Community, Zhaoshang Street,
Nanshan District, Shenzhen, Guangdong, P.R. CHINA

Mobile: +86 15118052731
Email:shimin.wang@boomwavelab.com

Test Report No.: RF260623B002



Test Report No.: RF260623B002



Test Report No.: RF260623B002



Test Report No.: RF260623B002



BOOMWAVE TEST (SHENZHEN)
CO., LTD.

Room B38, Warehouse A5(Chiwan No.1), No.3 Chiwan
4th Road, Chiwan Community, Zhaoshang Street,
Nanshan District, Shenzhen, Guangdong, P.R. CHINA

Mobile: +86 15118052731
Email:shimin.wang@boomwavelab.com

Test Report No.: RF260623B002



Test Report No.: RF260623B002



Test Report No.: RF260623B002



BOOMWAVE TEST (SHENZHEN)
CO., LTD.

Room B38, Warehouse A5(Chiwan No.1), No.3 Chiwan
4th Road, Chiwan Community, Zhaoshang Street,
Nanshan District, Shenzhen, Guangdong, P.R. CHINA

Mobile: +86 15118052731
Email:shimin.wang@boomwavelab.com

Test Report No.: RF260623B002



BOOMWAVE TEST (SHENZHEN)
CO., LTD.

Room B38, Warehouse A5(Chiwan No.1), No.3 Chiwan
4th Road, Chiwan Community, Zhaoshang Street,
Nanshan District, Shenzhen, Guangdong, P.R. CHINA

Mobile: +86 15118052731
Email:shimin.wang@boomwavelab.com

Test Report No.: RF260623B002

