




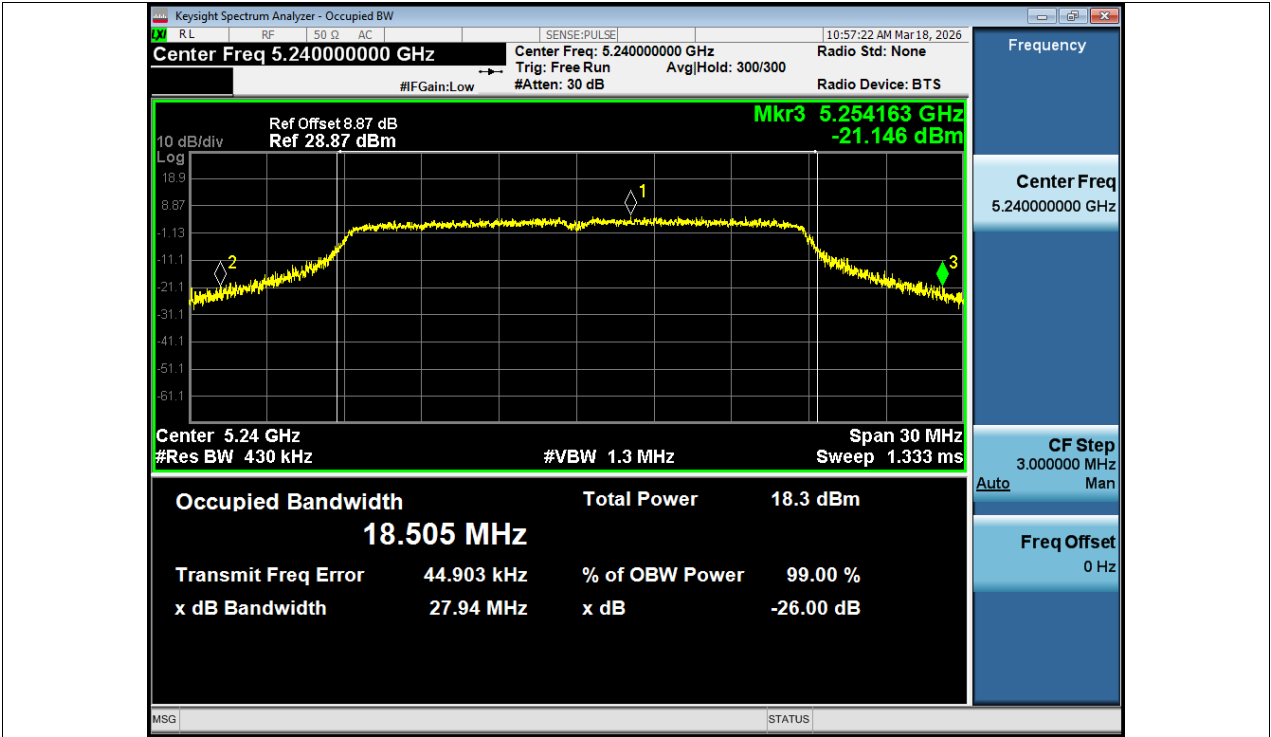


-26dB Bandwidth NVNT ac20 5240MHz Ant1

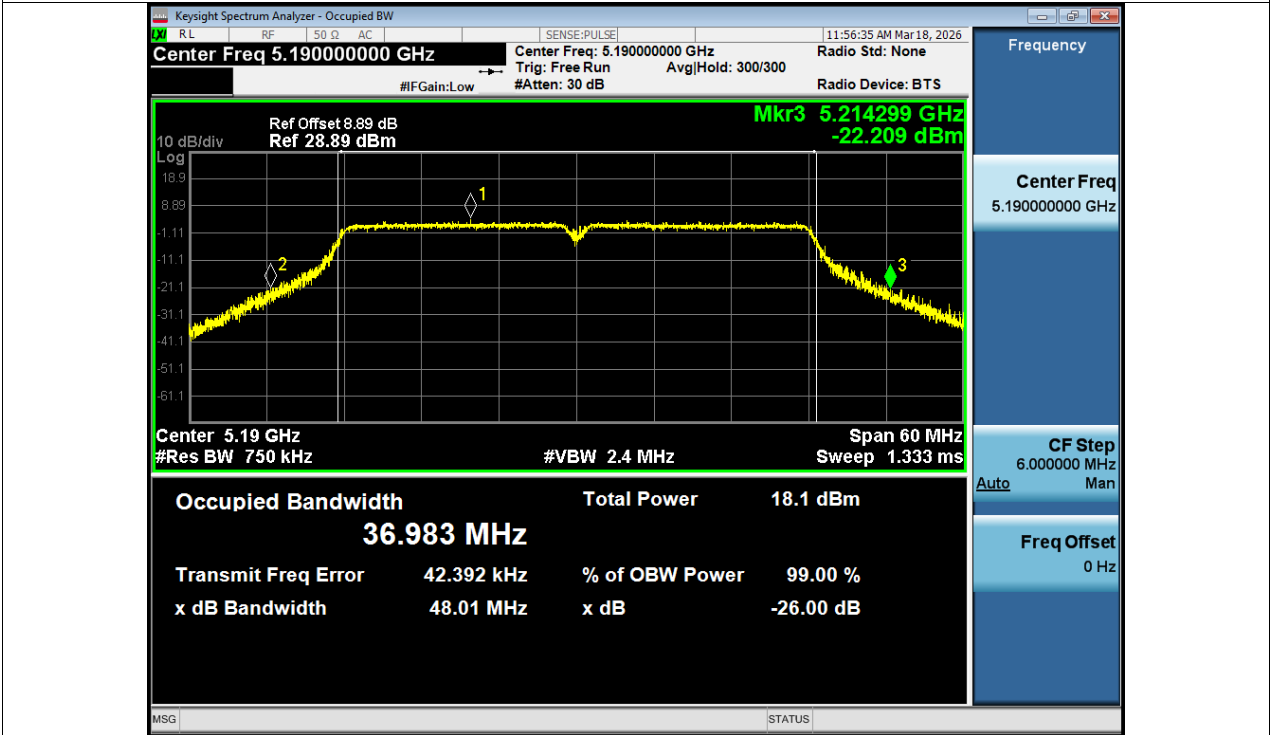


-26dB Bandwidth NVNT ac40 5190MHz Ant1

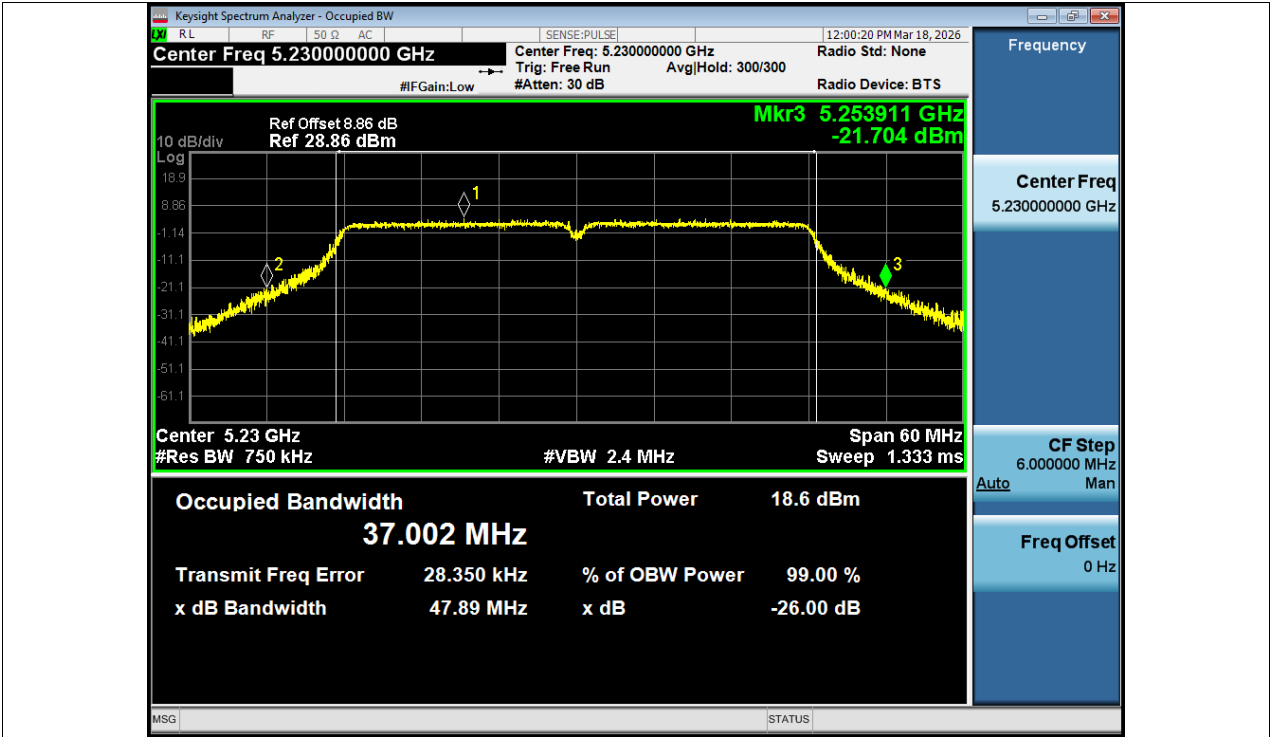


-26dB Bandwidth NVNT ac40 5230MHz Ant1

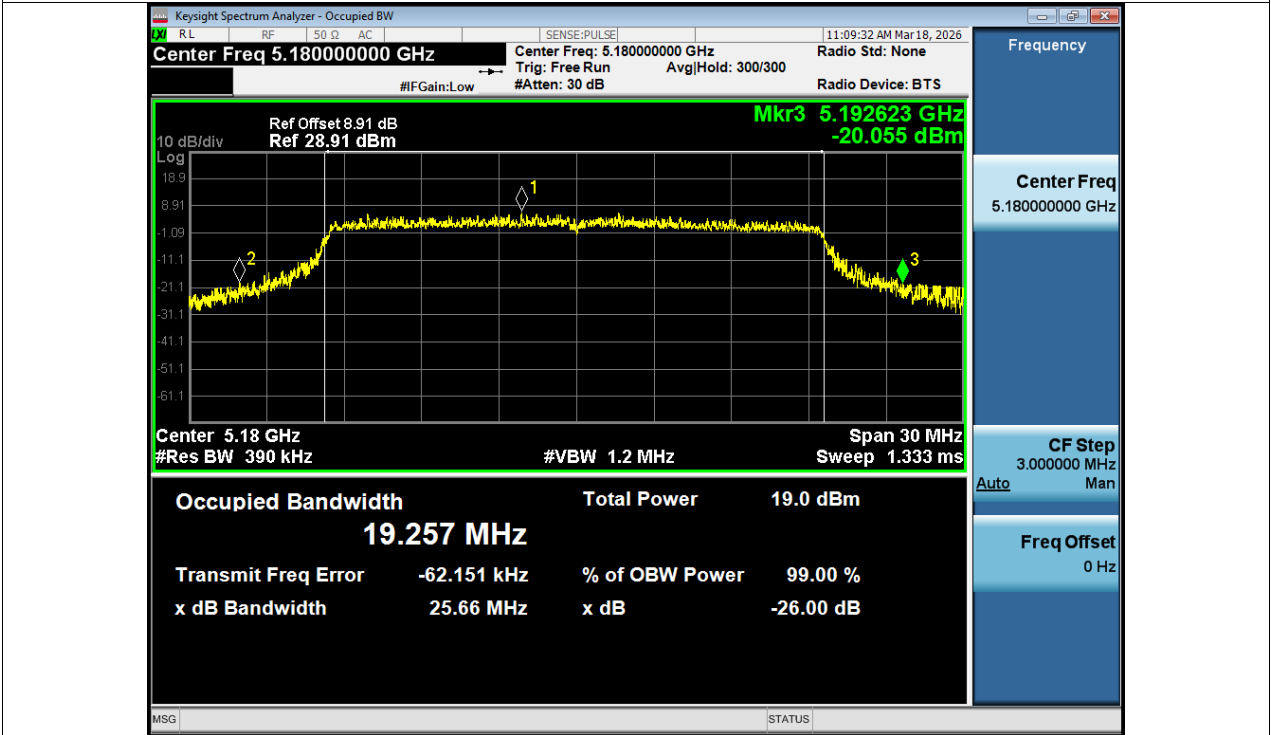


-26dB Bandwidth NVNT ax20 5180MHz Ant1

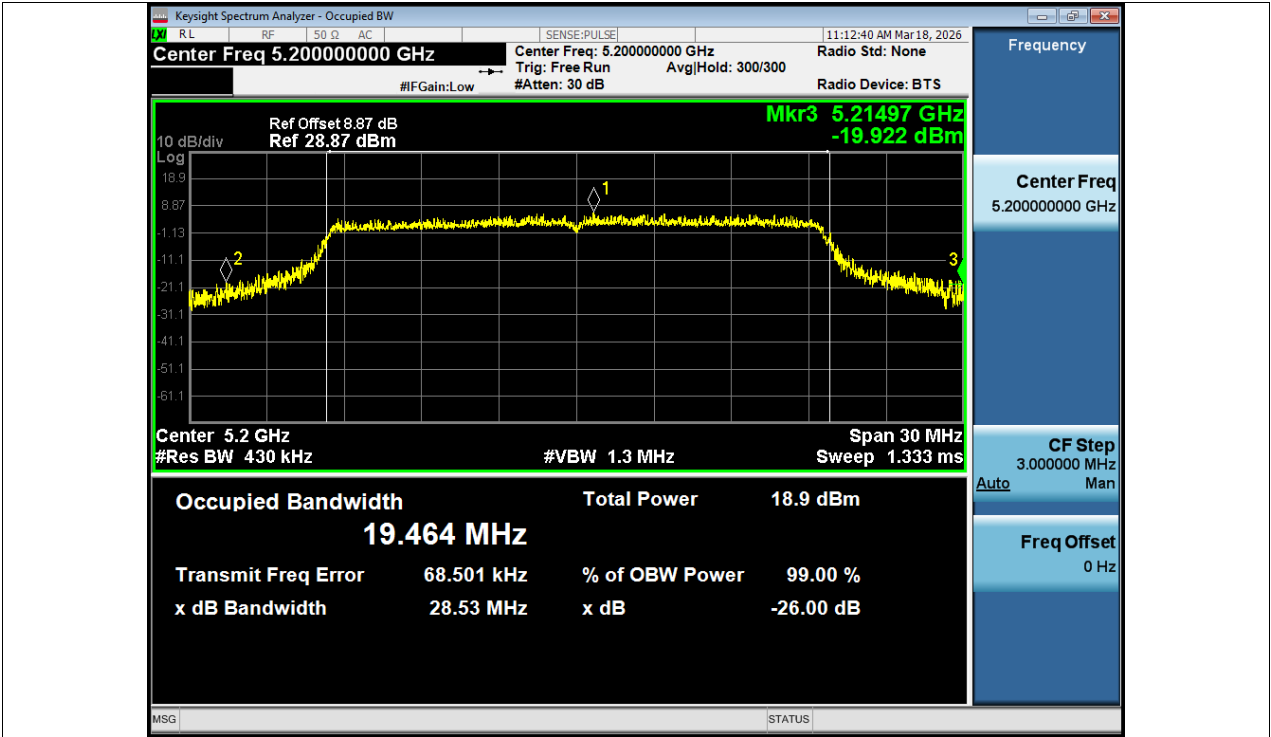


-26dB Bandwidth NVNT ax20 5200MHz Ant1

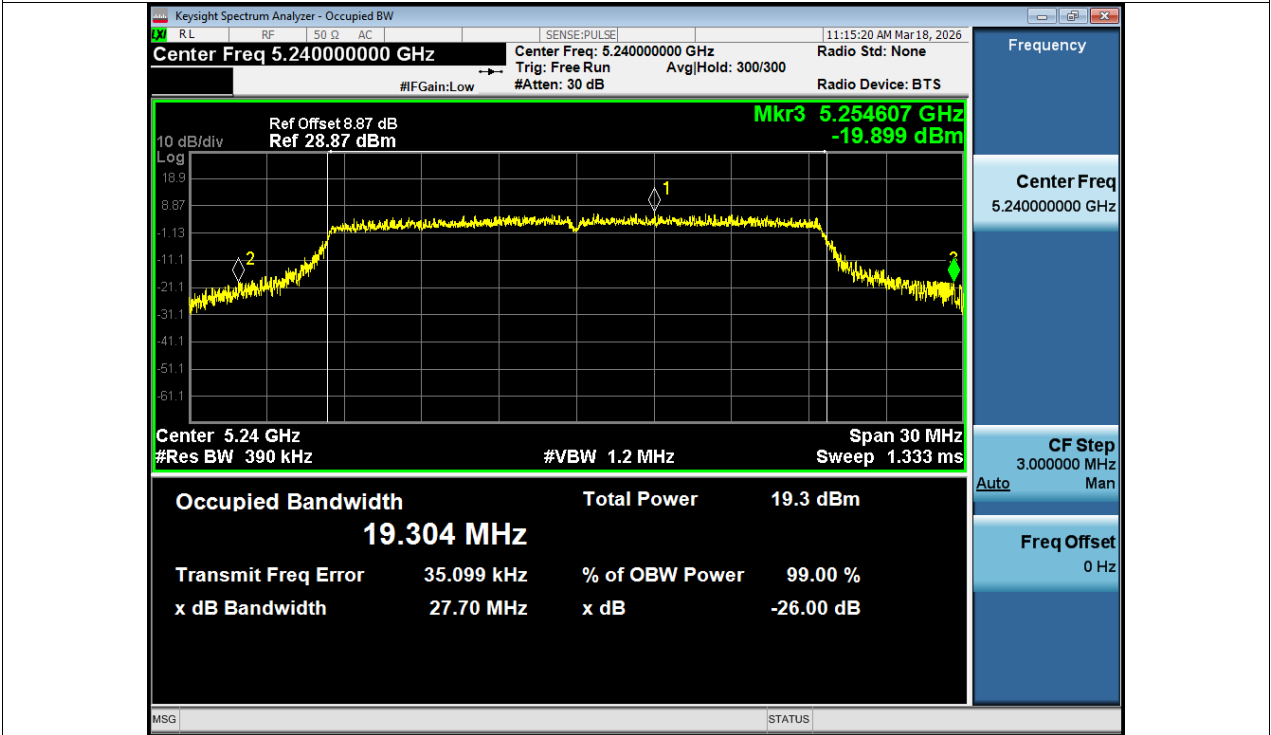

-26dB Bandwidth NVNT ax20 5240MHz Ant1

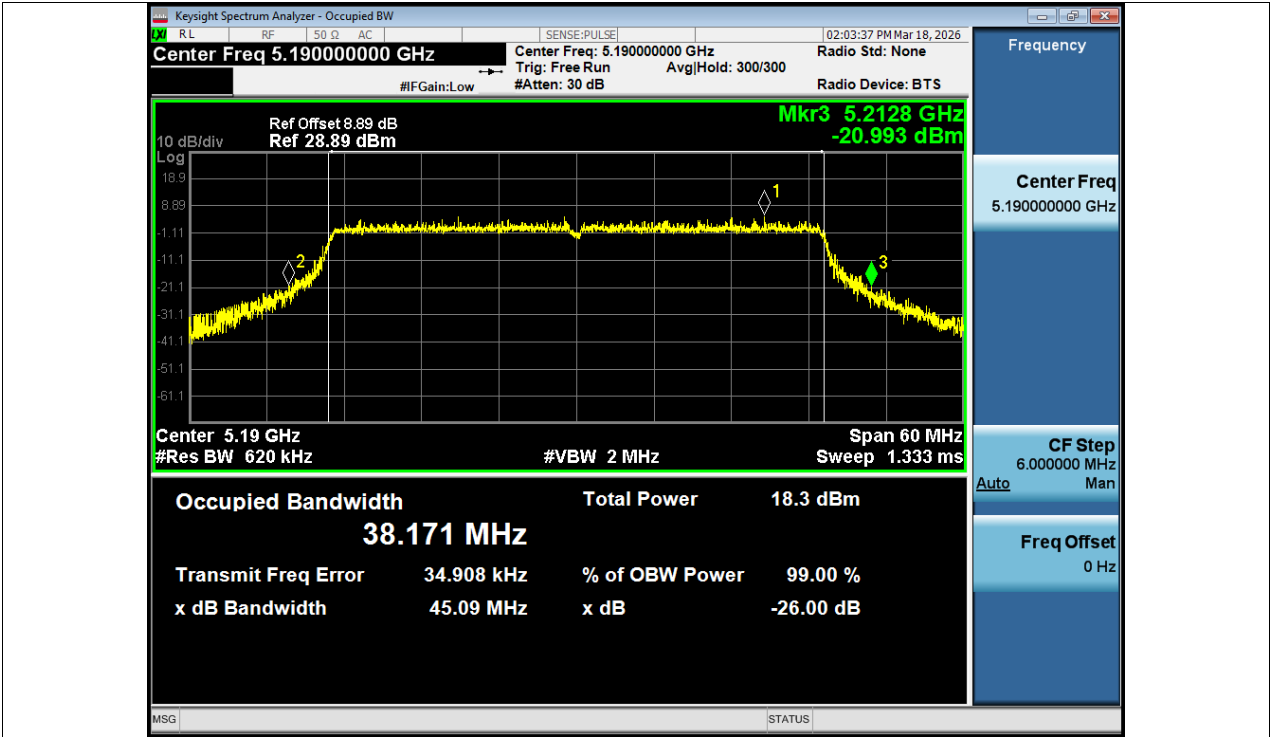


-26dB Bandwidth NVNT ax40 5190MHz Ant1

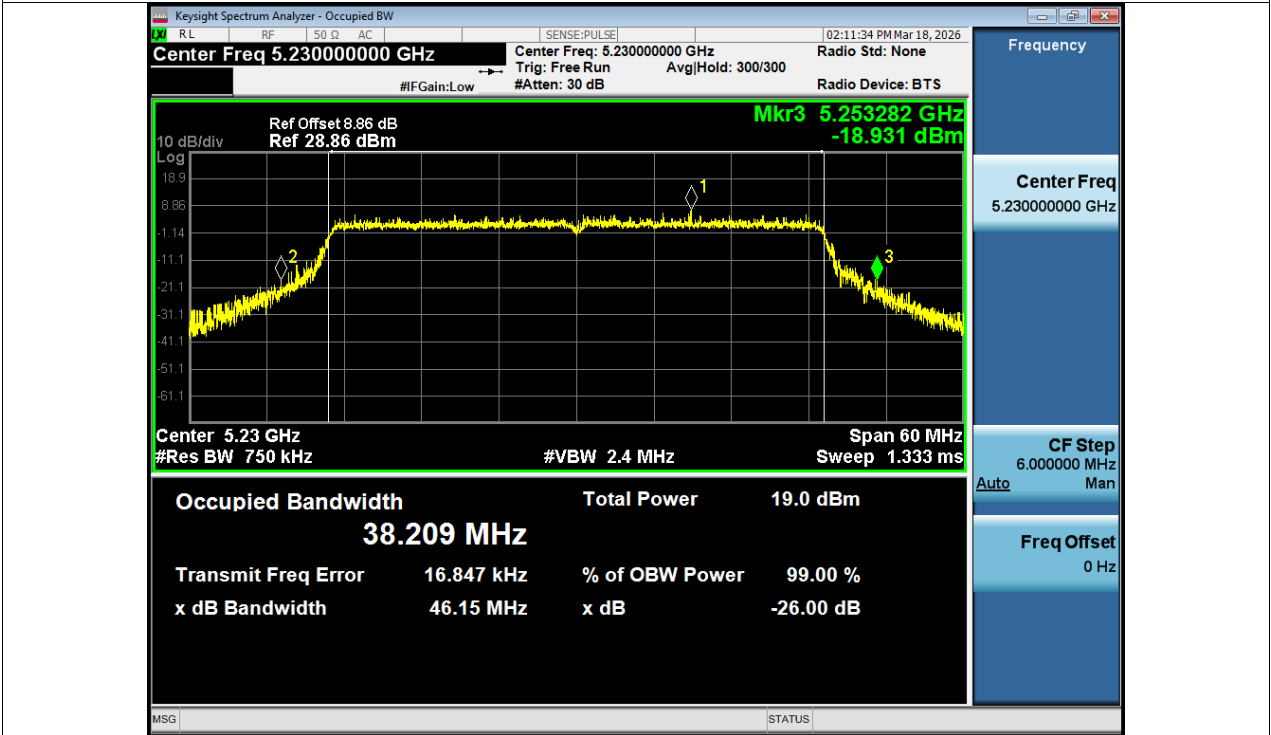


-26dB Bandwidth NVNT ax40 5230MHz Ant1

Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5180	Ant1	16.606
NVNT	a	5200	Ant1	16.657
NVNT	a	5240	Ant1	16.649
NVNT	a	5745	Ant1	16.835
NVNT	a	5785	Ant1	16.972
NVNT	a	5825	Ant1	16.82
NVNT	n20	5180	Ant1	17.816
NVNT	n20	5200	Ant1	17.849
NVNT	n20	5240	Ant1	17.825
NVNT	n20	5745	Ant1	18.025
NVNT	n20	5785	Ant1	18.074
NVNT	n20	5825	Ant1	18.043
NVNT	n40	5190	Ant1	36.559
NVNT	n40	5230	Ant1	36.479
NVNT	n40	5755	Ant1	36.28
NVNT	n40	5795	Ant1	36.209
NVNT	ac20	5180	Ant1	17.841
NVNT	ac20	5200	Ant1	17.848
NVNT	ac20	5240	Ant1	17.849
NVNT	ac20	5745	Ant1	18.041
NVNT	ac20	5785	Ant1	18.105
NVNT	ac20	5825	Ant1	18.032
NVNT	ac40	5190	Ant1	36.492
NVNT	ac40	5230	Ant1	36.471
NVNT	ac40	5755	Ant1	36.297
NVNT	ac40	5795	Ant1	36.196
NVNT	ax20	5180	Ant1	18.992
NVNT	ax20	5200	Ant1	19.05
NVNT	ax20	5240	Ant1	19.019
NVNT	ax20	5745	Ant1	19.181
NVNT	ax20	5785	Ant1	19.166
NVNT	ax20	5825	Ant1	19.156
NVNT	ax40	5190	Ant1	37.964
NVNT	ax40	5230	Ant1	37.997
NVNT	ax40	5755	Ant1	37.88
NVNT	ax40	5795	Ant1	37.782

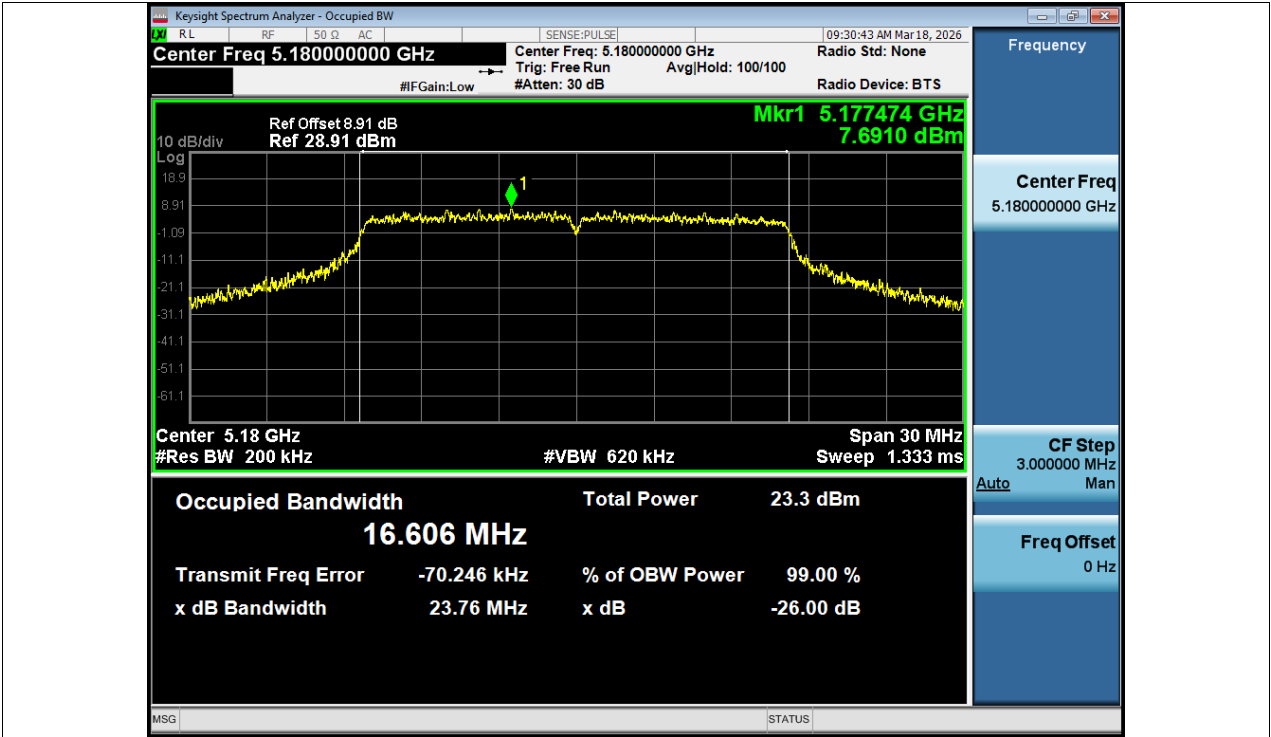


OBW NVNT a 5180MHz Ant1

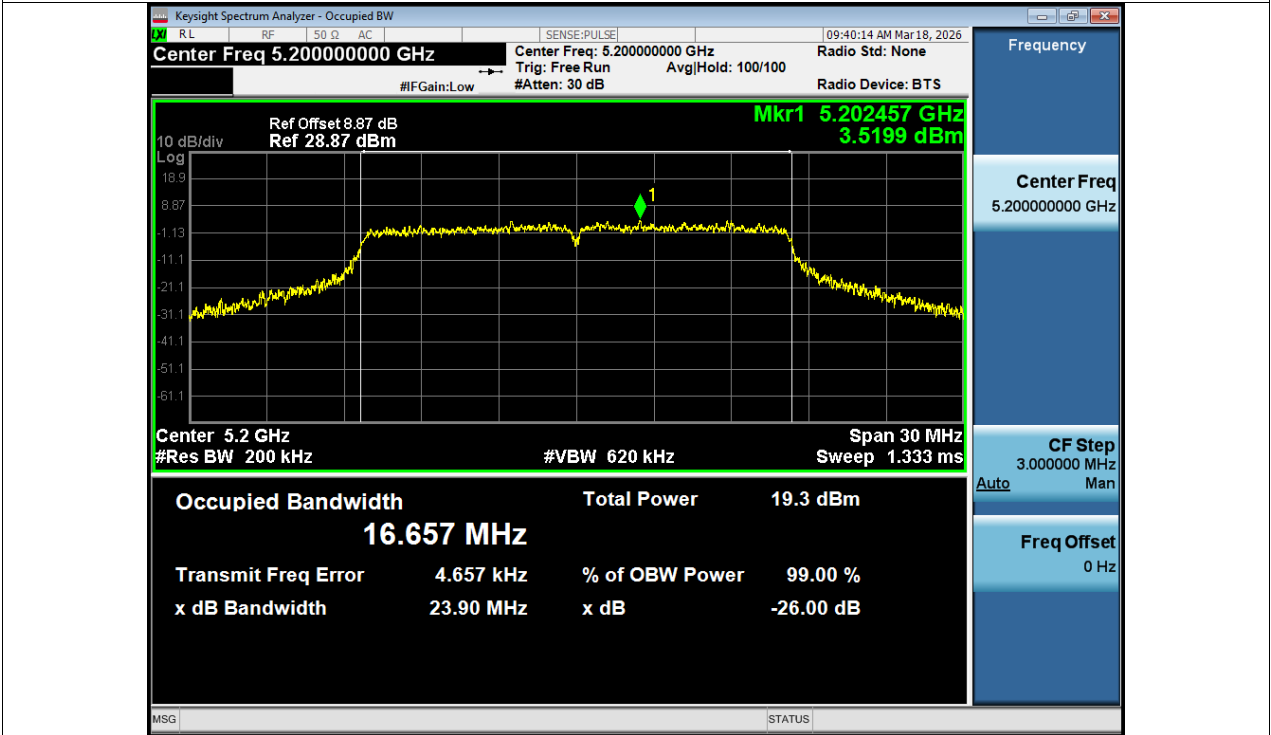


OBW NVNT a 5200MHz Ant1

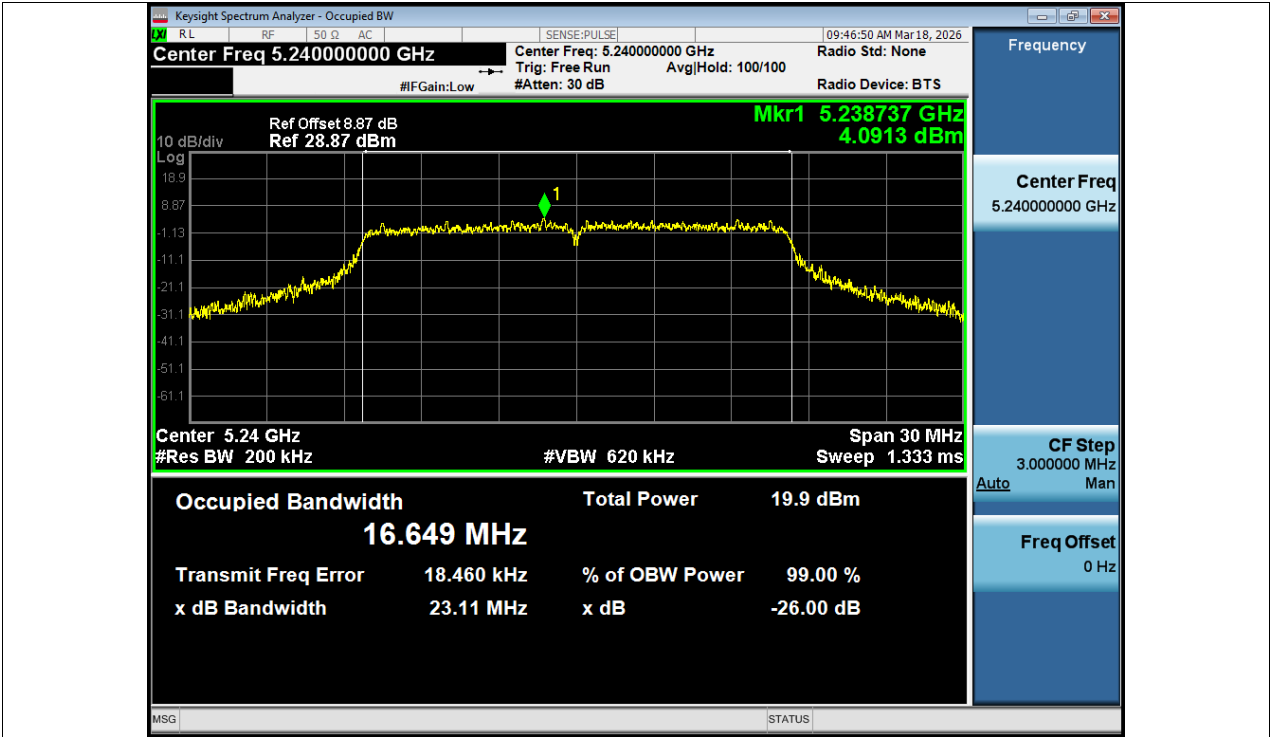


OBW NVNT a 5240MHz Ant1

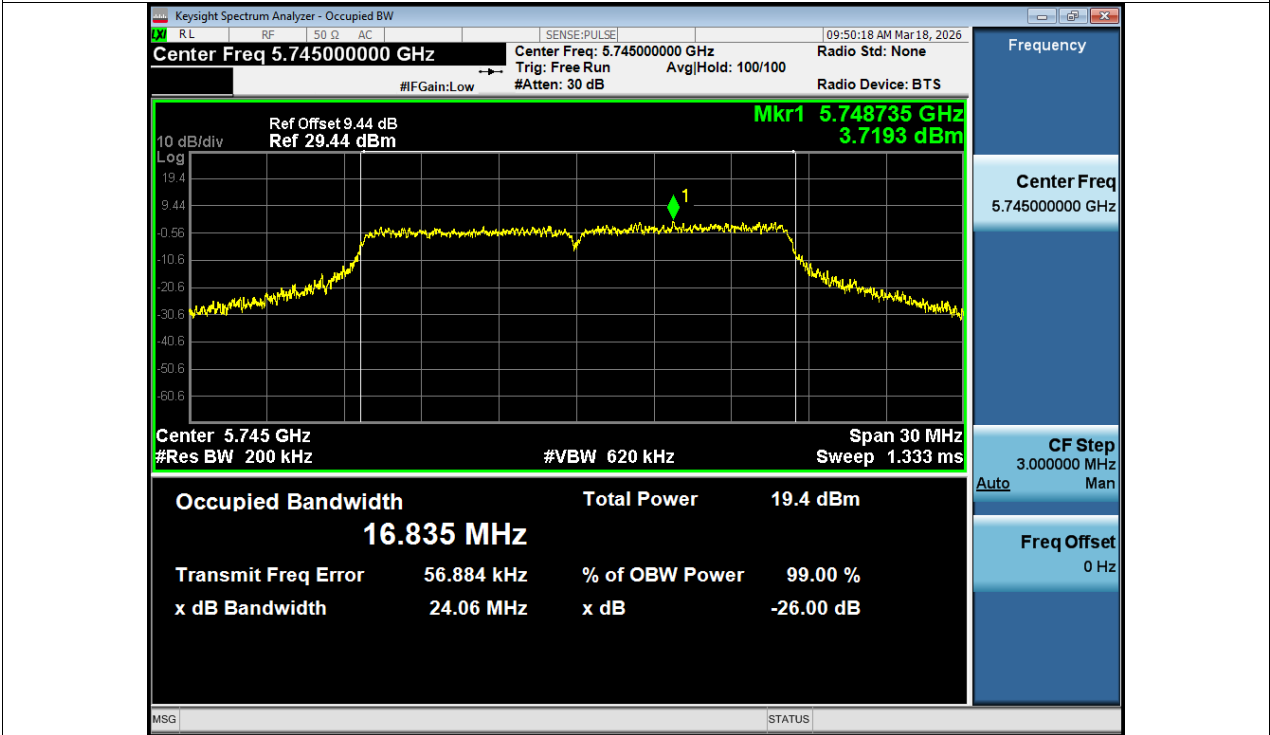


OBW NVNT a 5745MHz Ant1

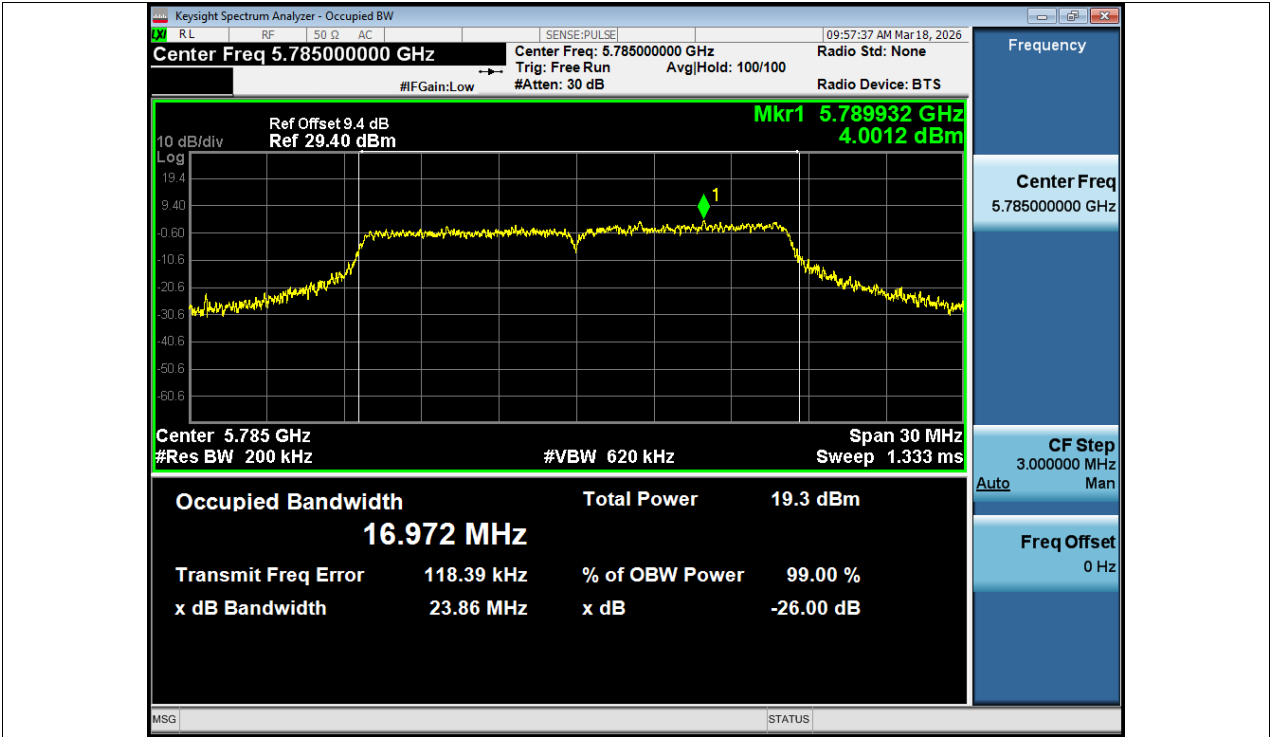


OBW NVNT a 5785MHz Ant1

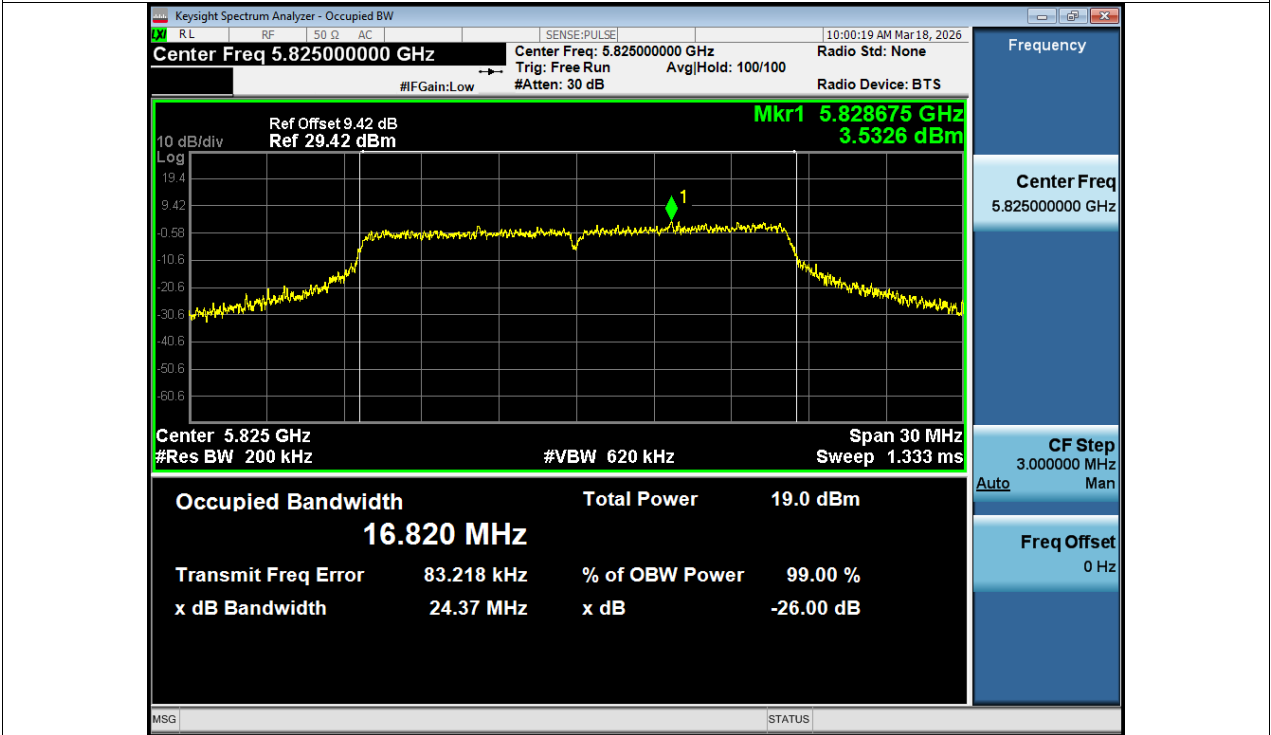


OBW NVNT a 5825MHz Ant1

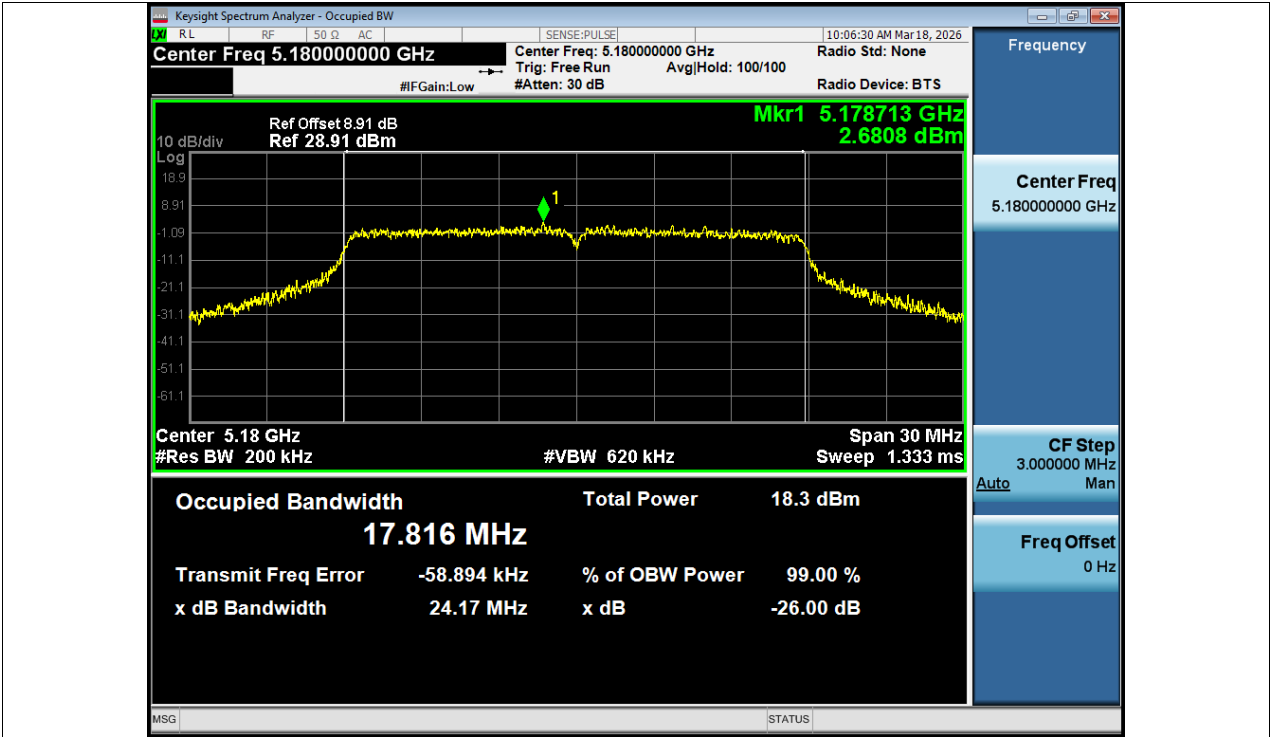


OBW NVNT n20 5180MHz Ant1

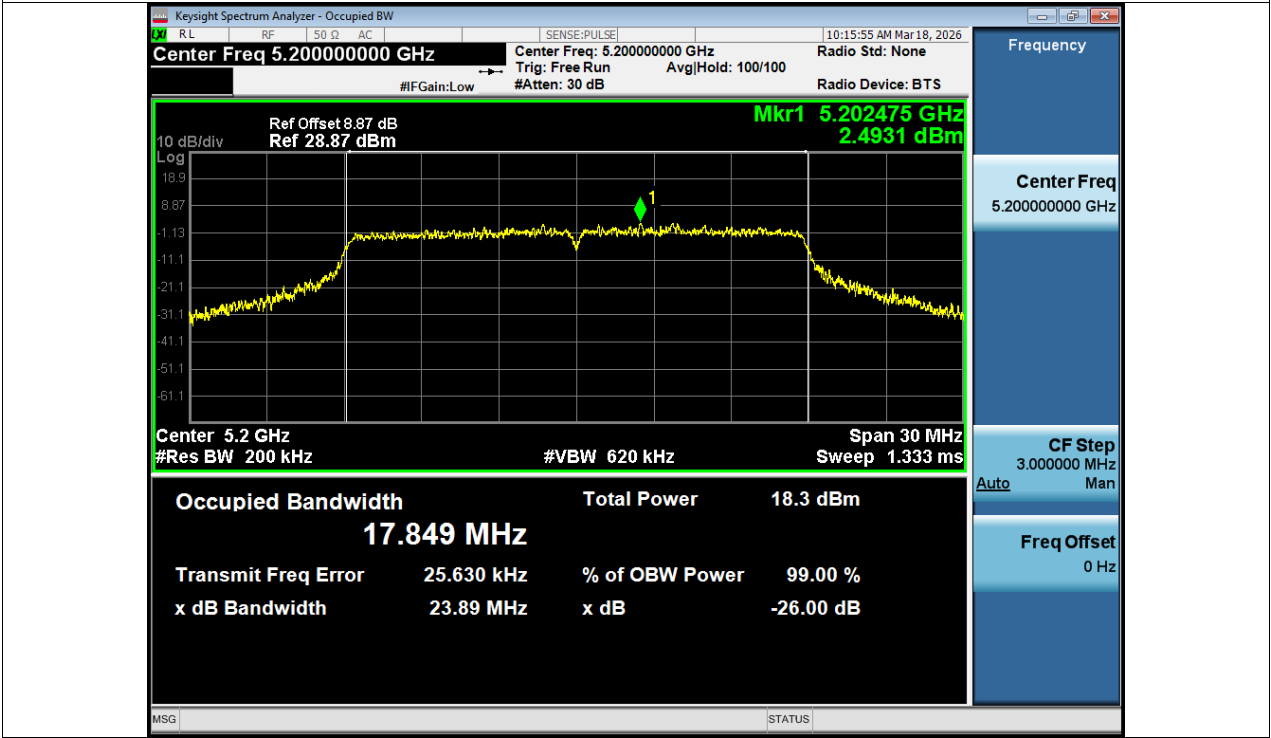


OBW NVNT n20 5200MHz Ant1

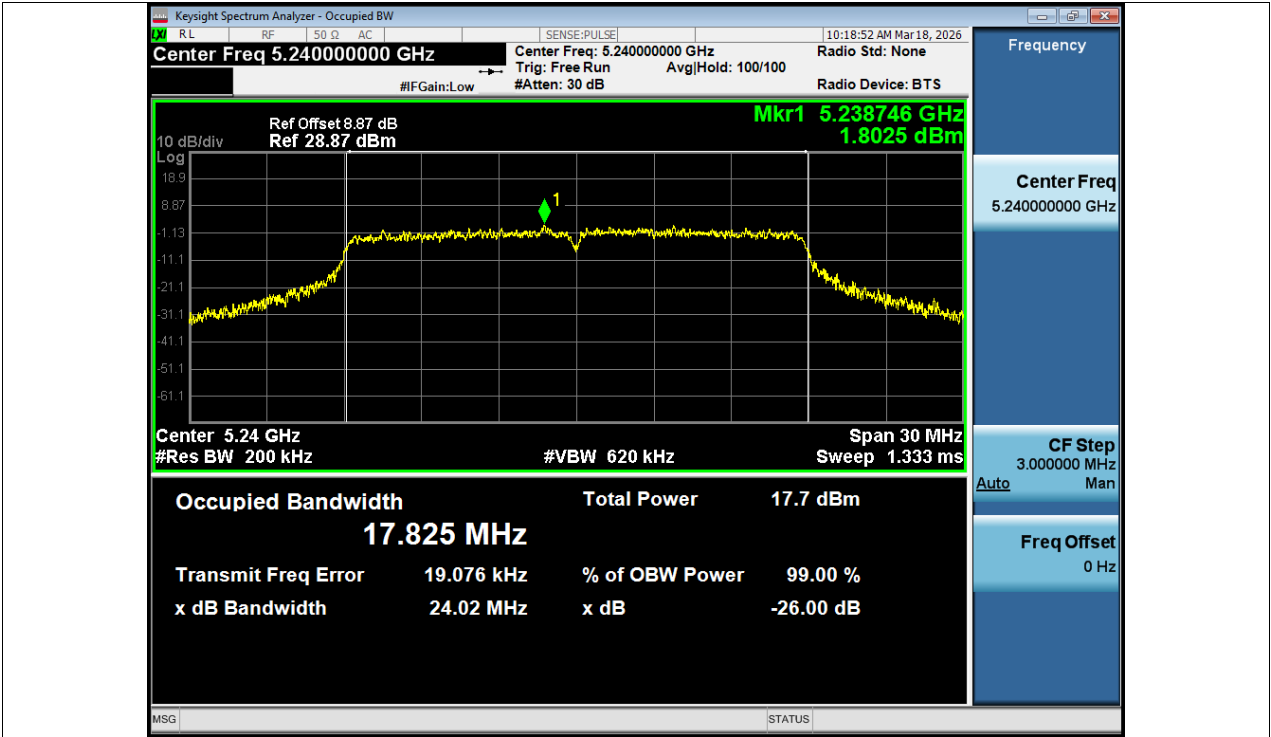


OBW NVNT n20 5240MHz Ant1

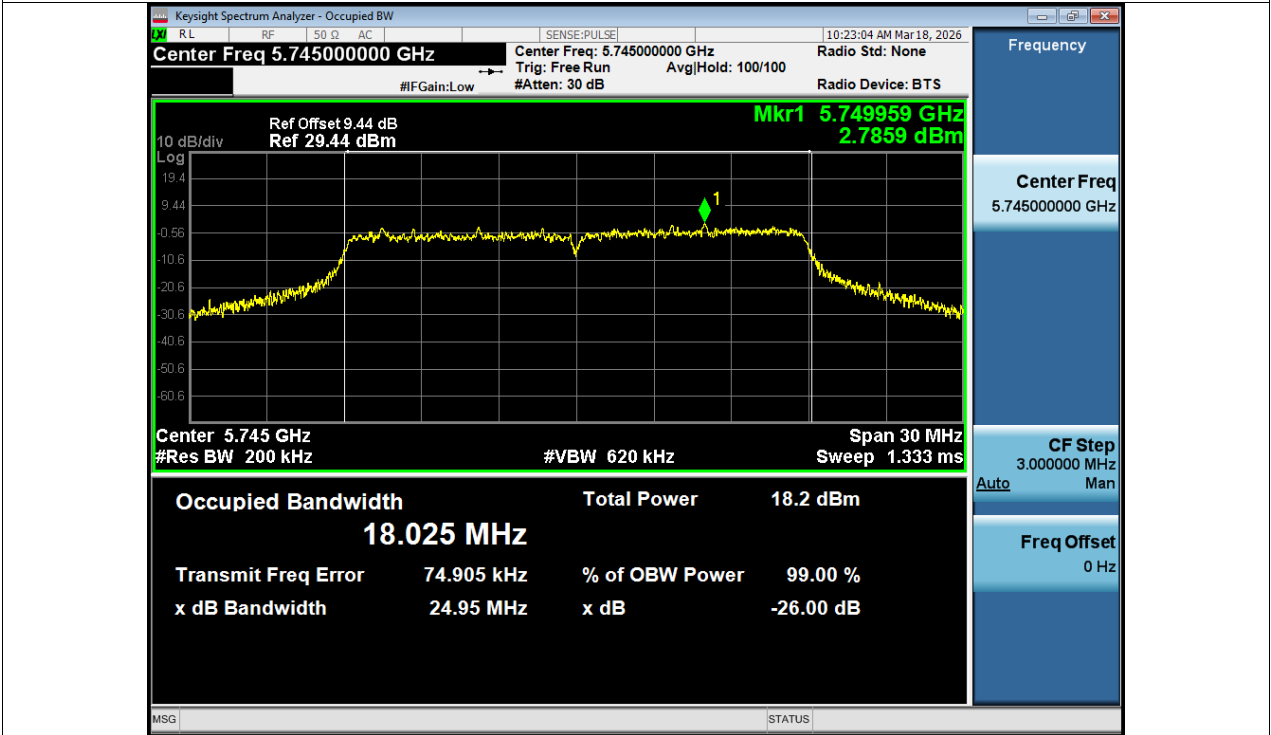


OBW NVNT n20 5745MHz Ant1

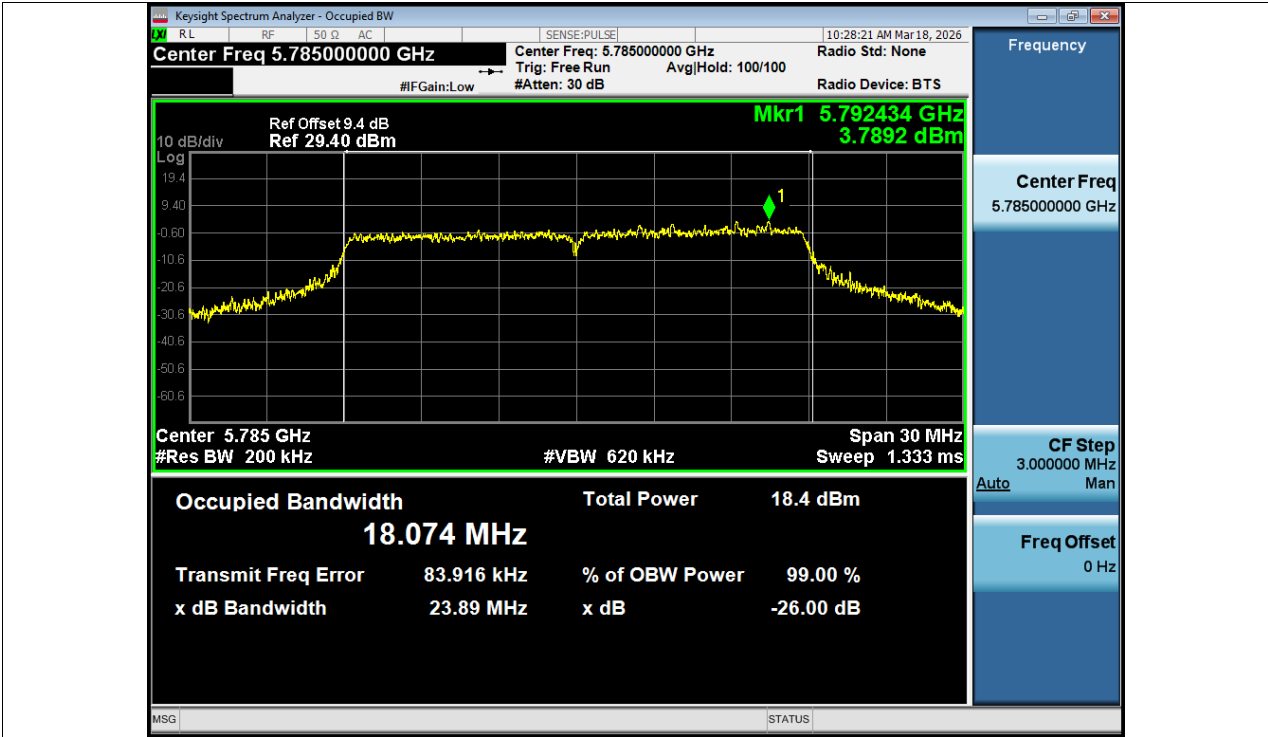


OBW NVNT n20 5785MHz Ant1

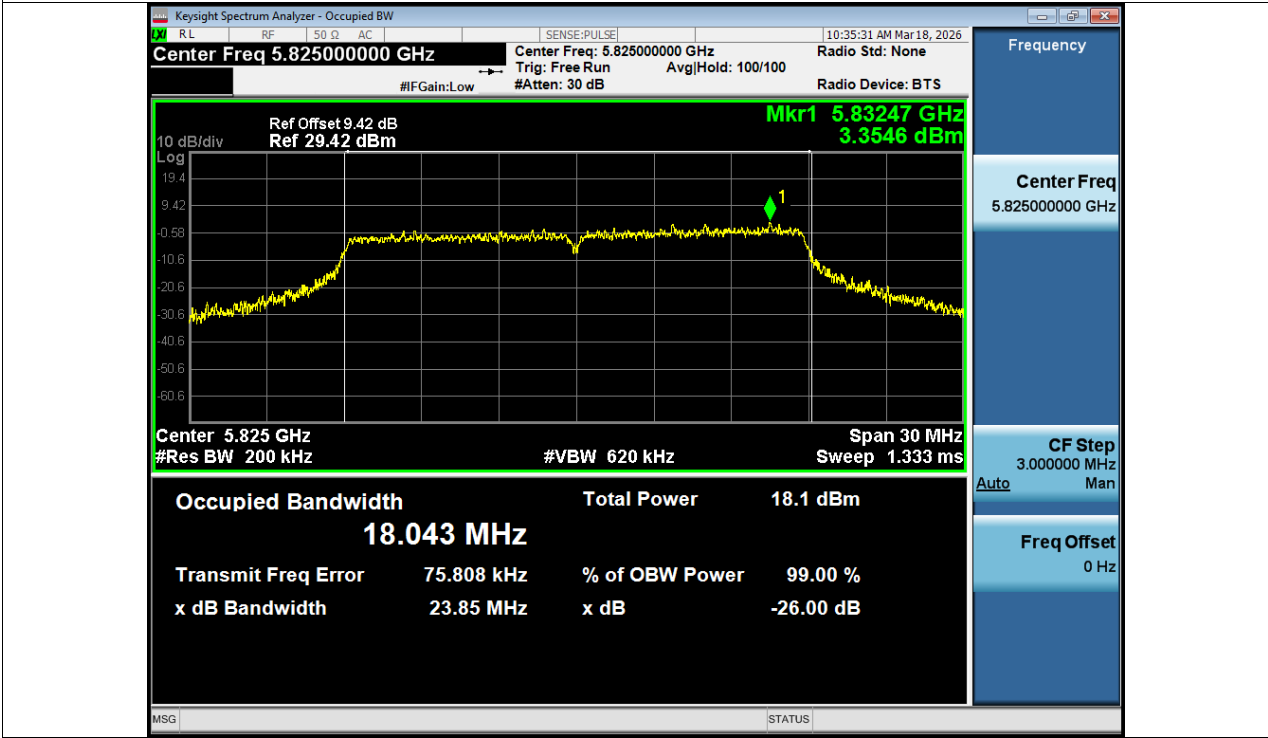


OBW NVNT n20 5825MHz Ant1

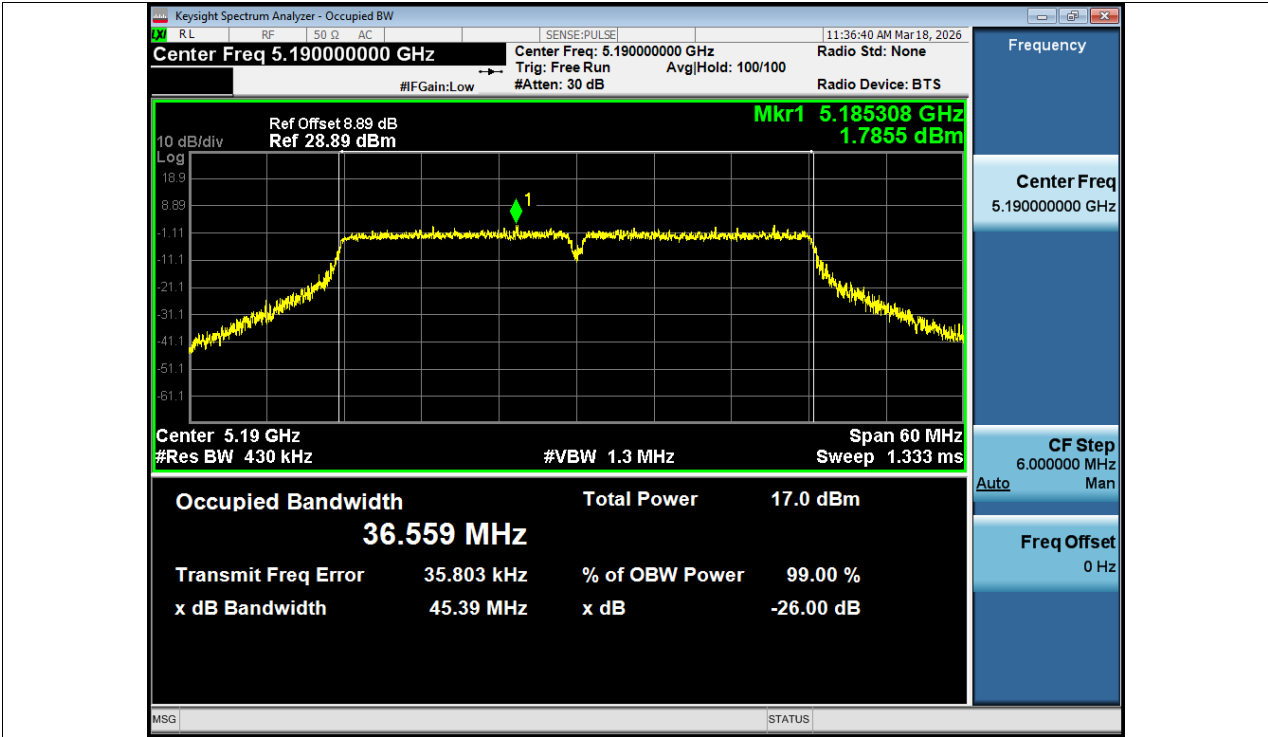


OBW NVNT n40 5190MHz Ant1

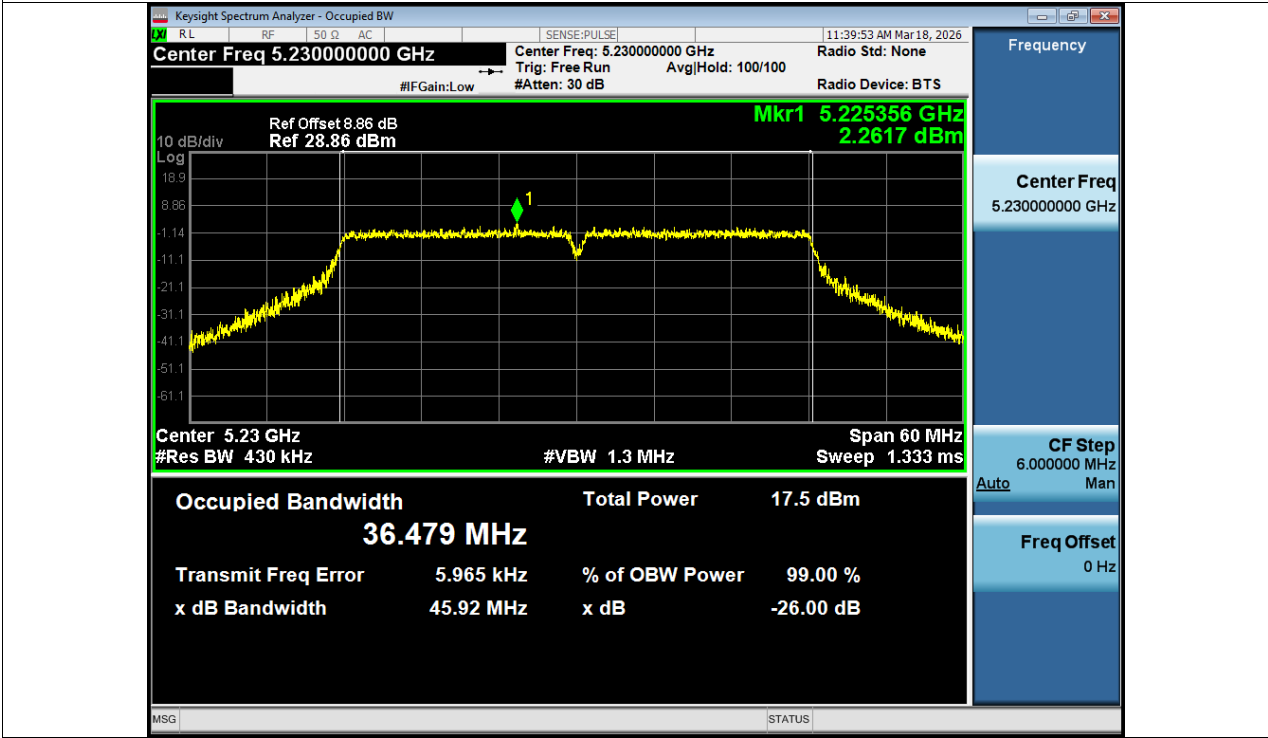


OBW NVNT n40 5230MHz Ant1

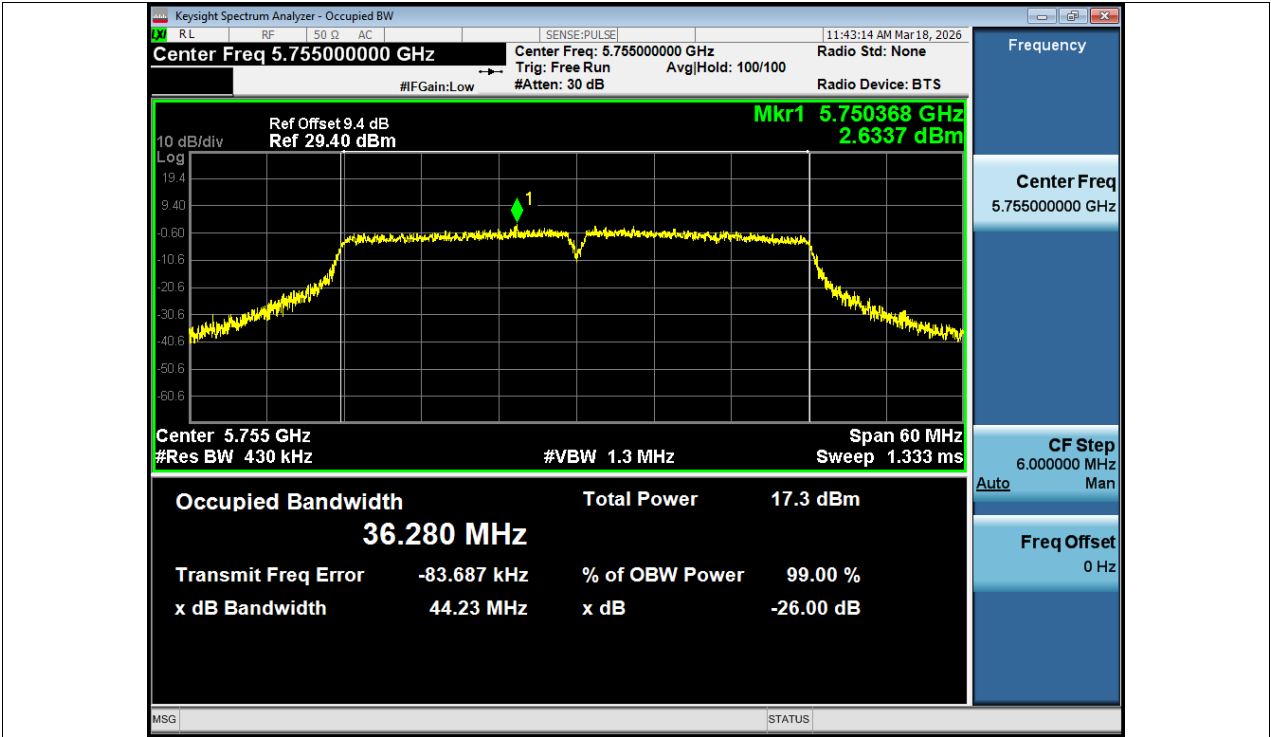


OBW NVNT n40 5755MHz Ant1

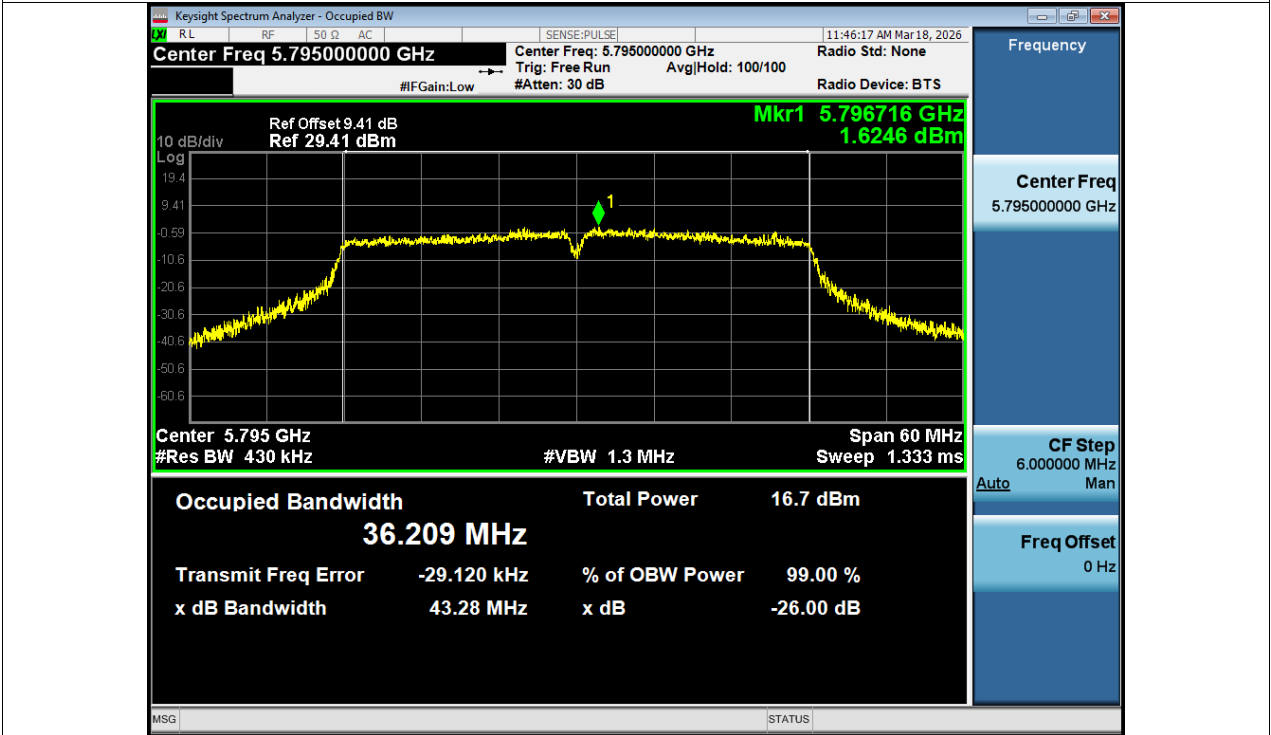


OBW NVNT n40 5795MHz Ant1

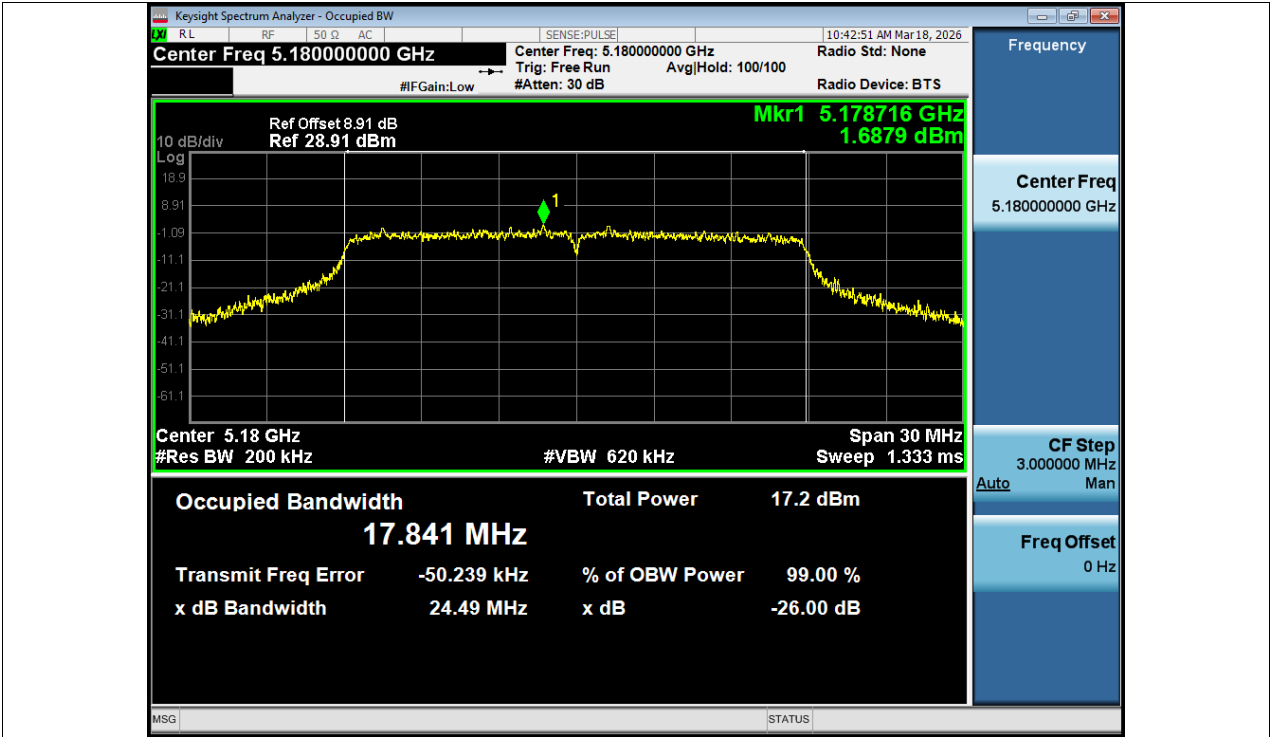


OBW NVNT ac20 5180MHz Ant1

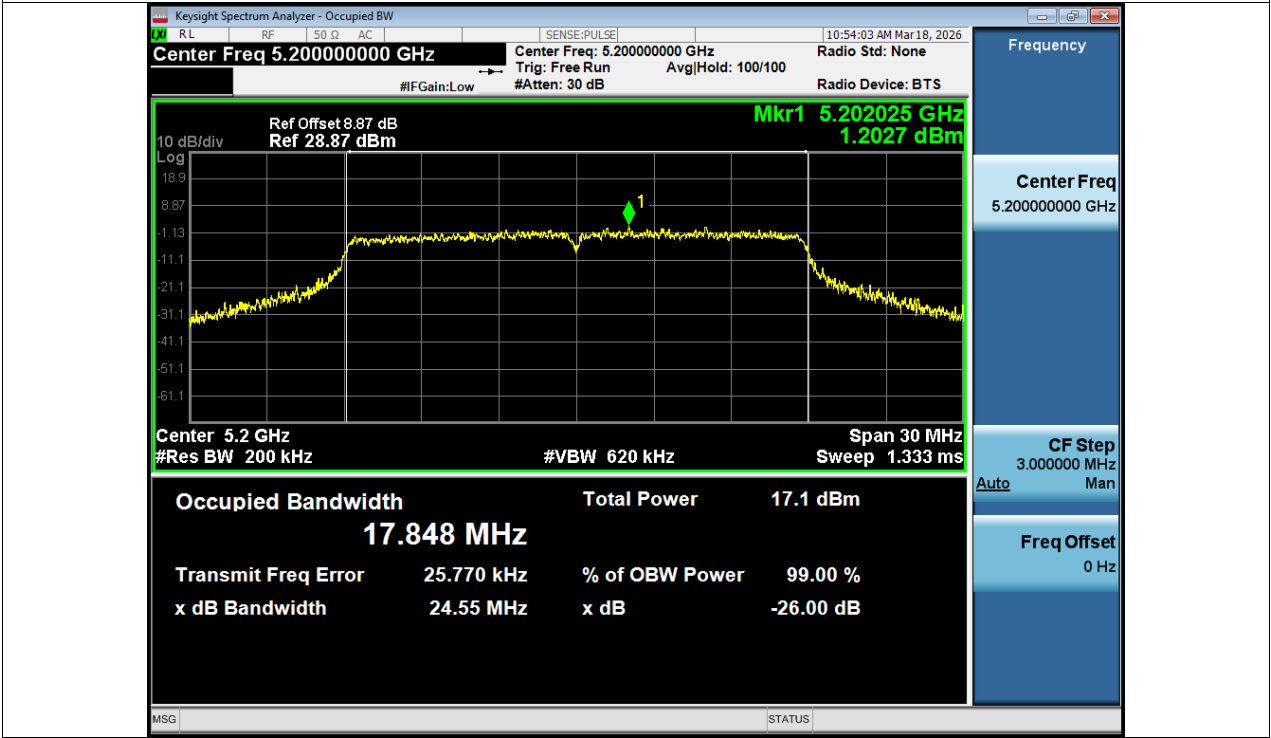


OBW NVNT ac20 5200MHz Ant1

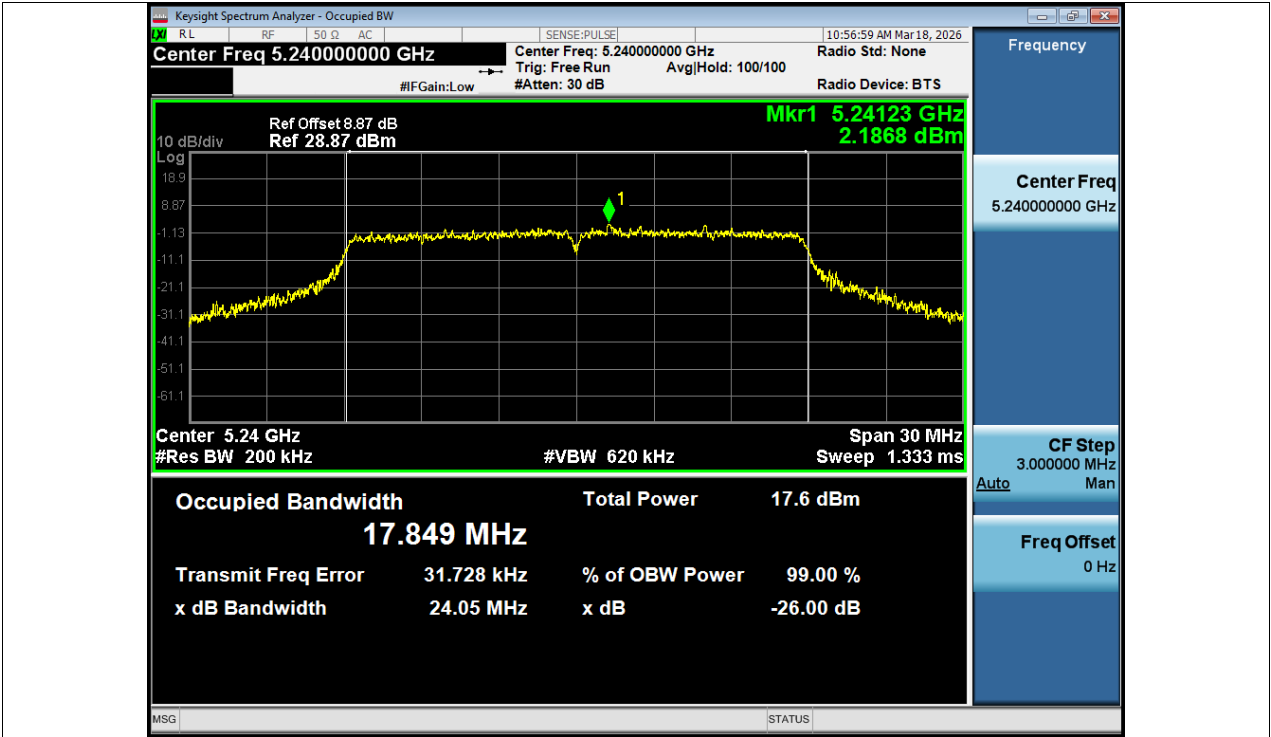


OBW NVNT ac20 5240MHz Ant1

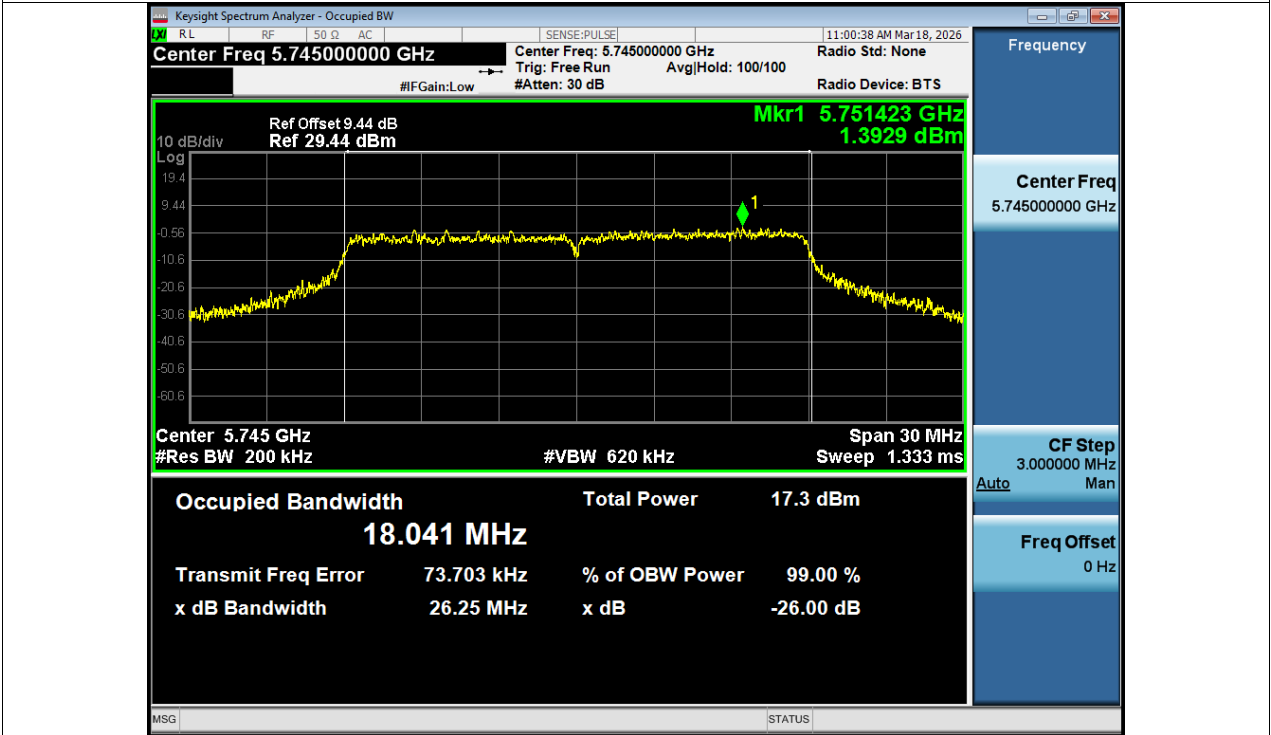


OBW NVNT ac20 5745MHz Ant1

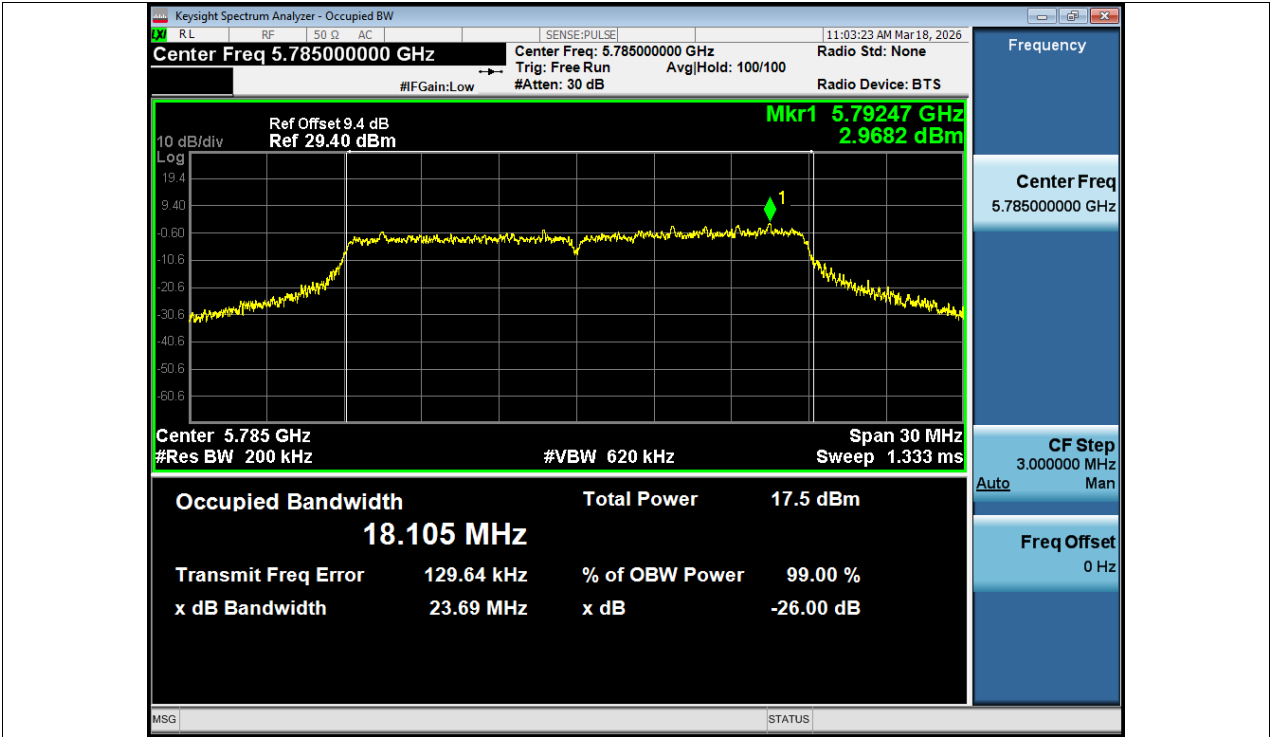


OBW NVNT ac20 5785MHz Ant1

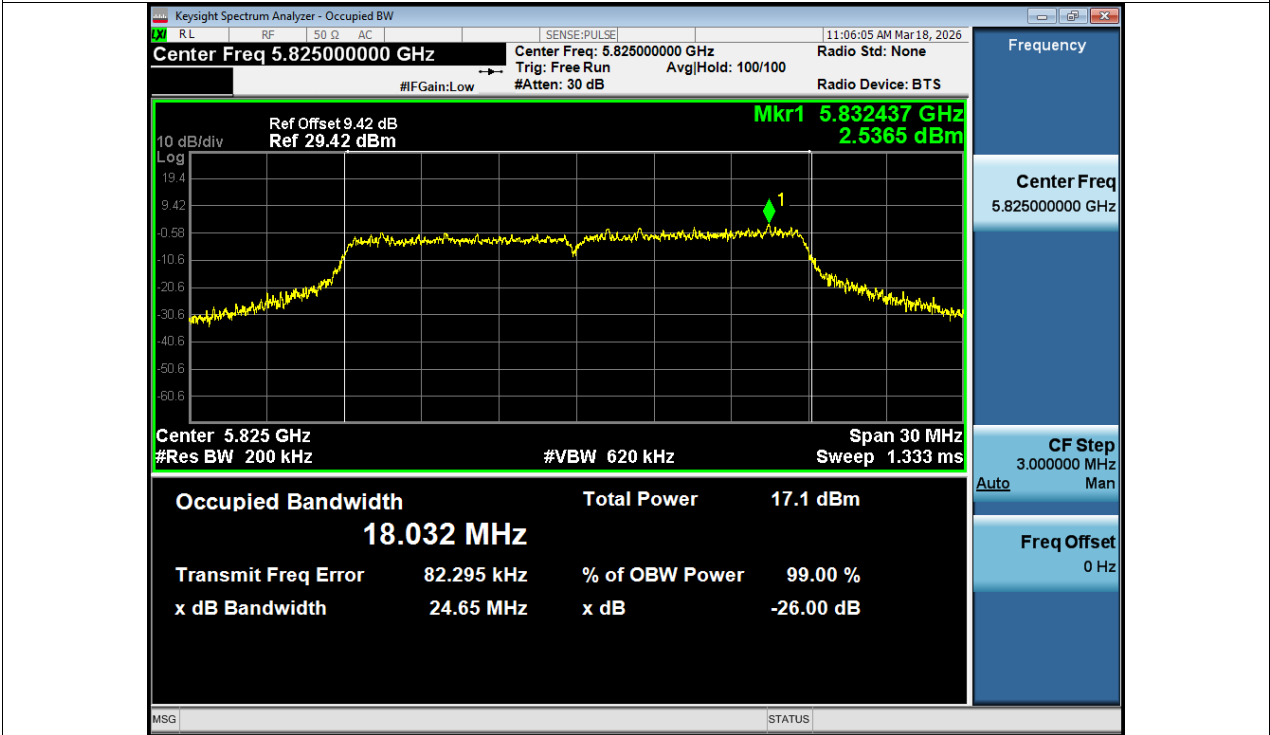


OBW NVNT ac20 5825MHz Ant1

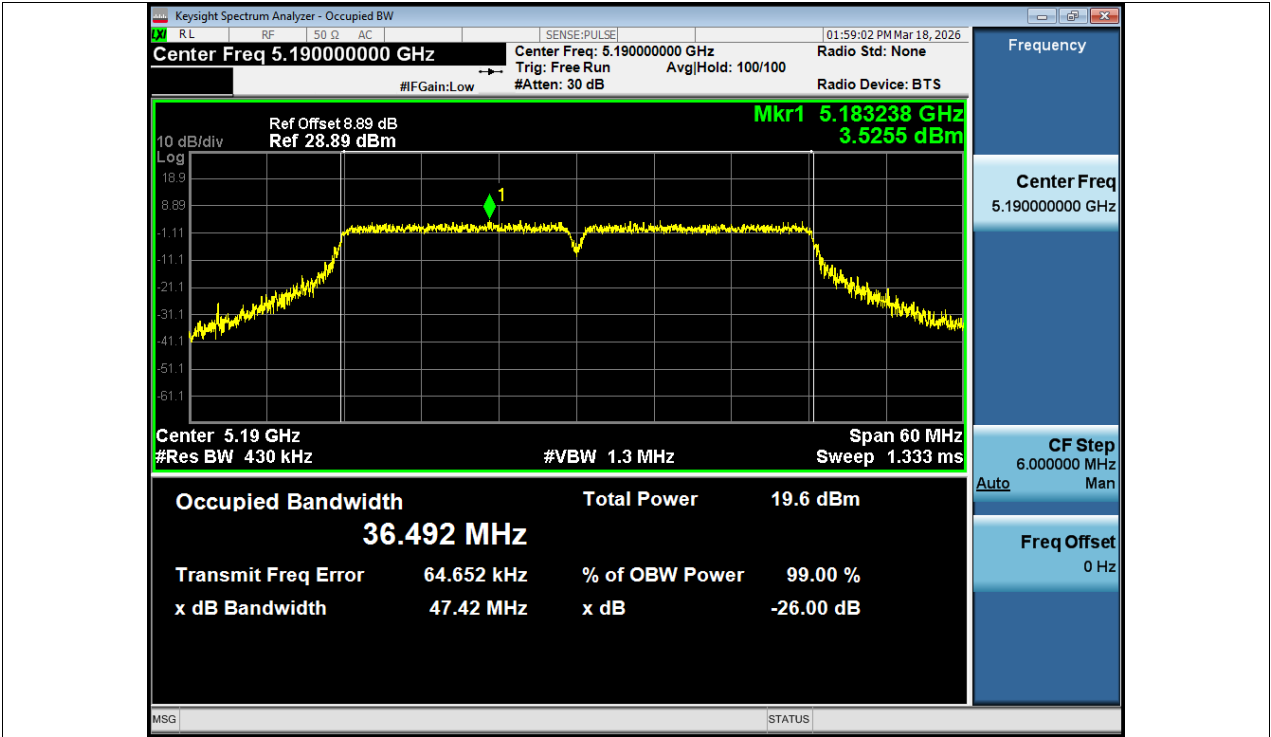

OBW NVNT ac40 5190MHz Ant1

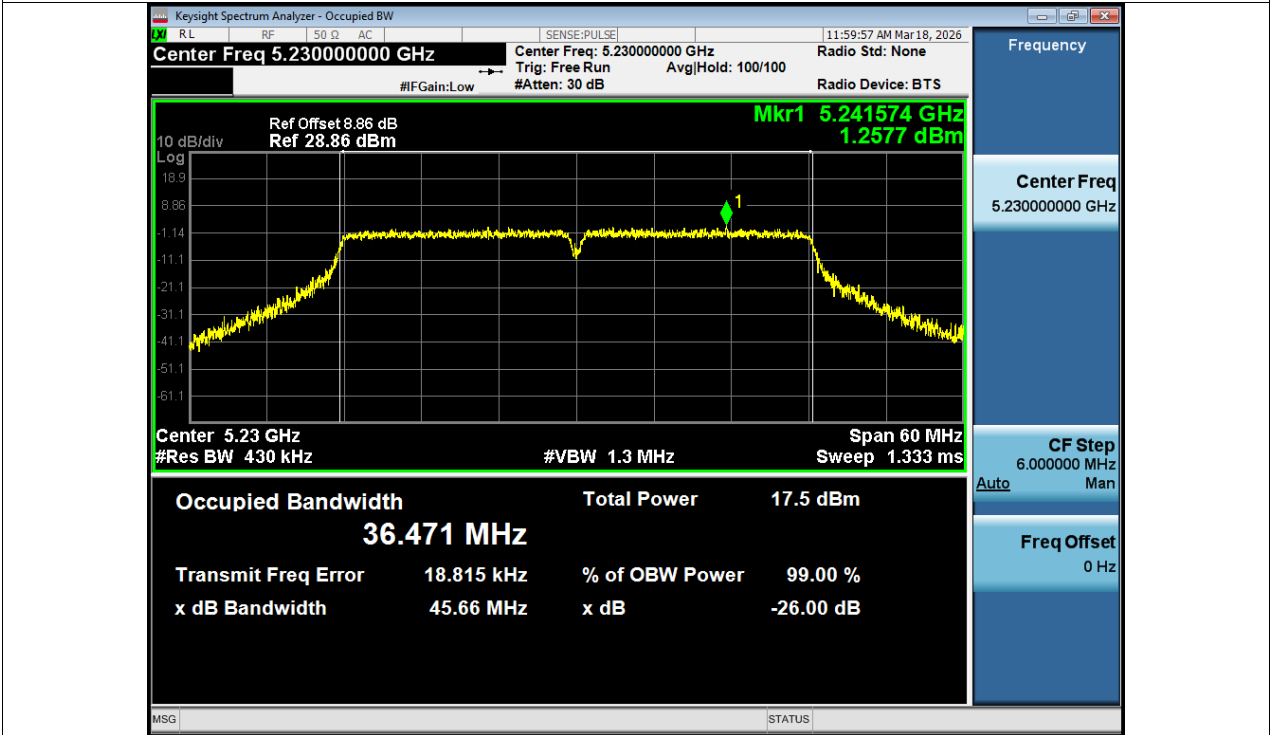


OBW NVNT ac40 5230MHz Ant1

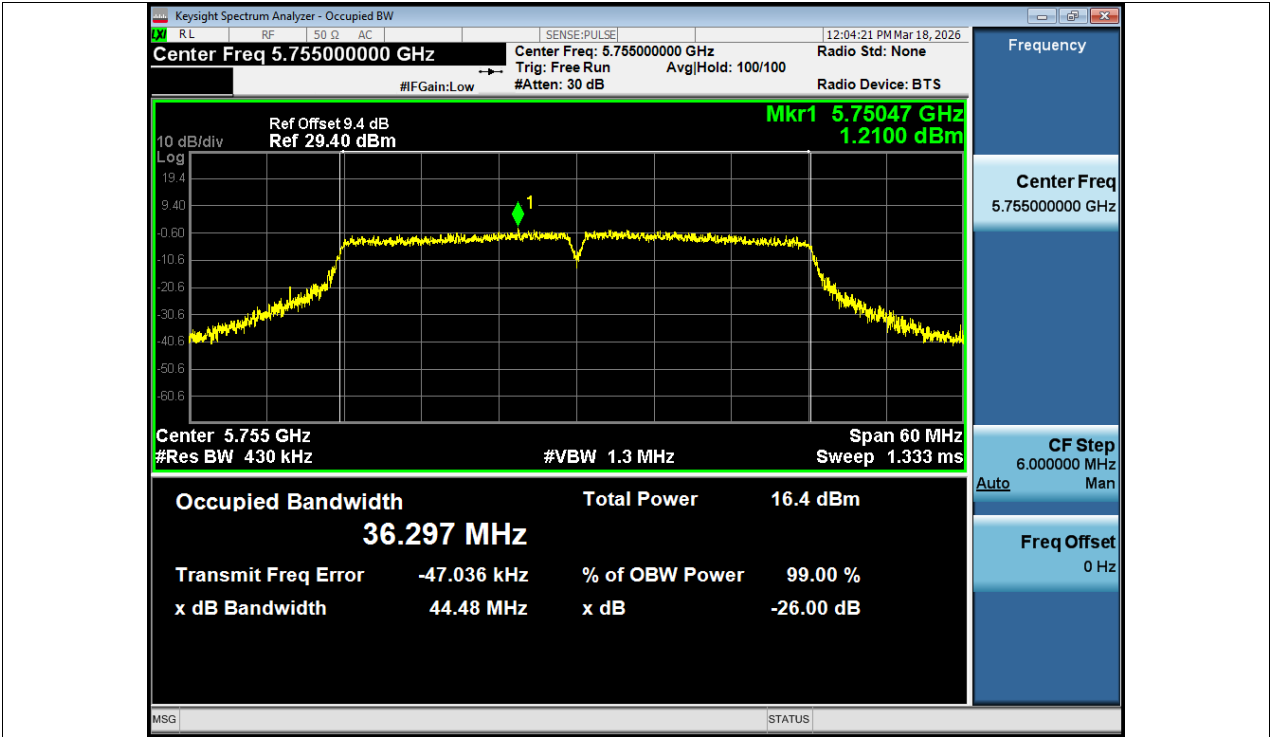


OBW NVNT ac40 5755MHz Ant1




OBW NVNT ac40 5795MHz Ant1

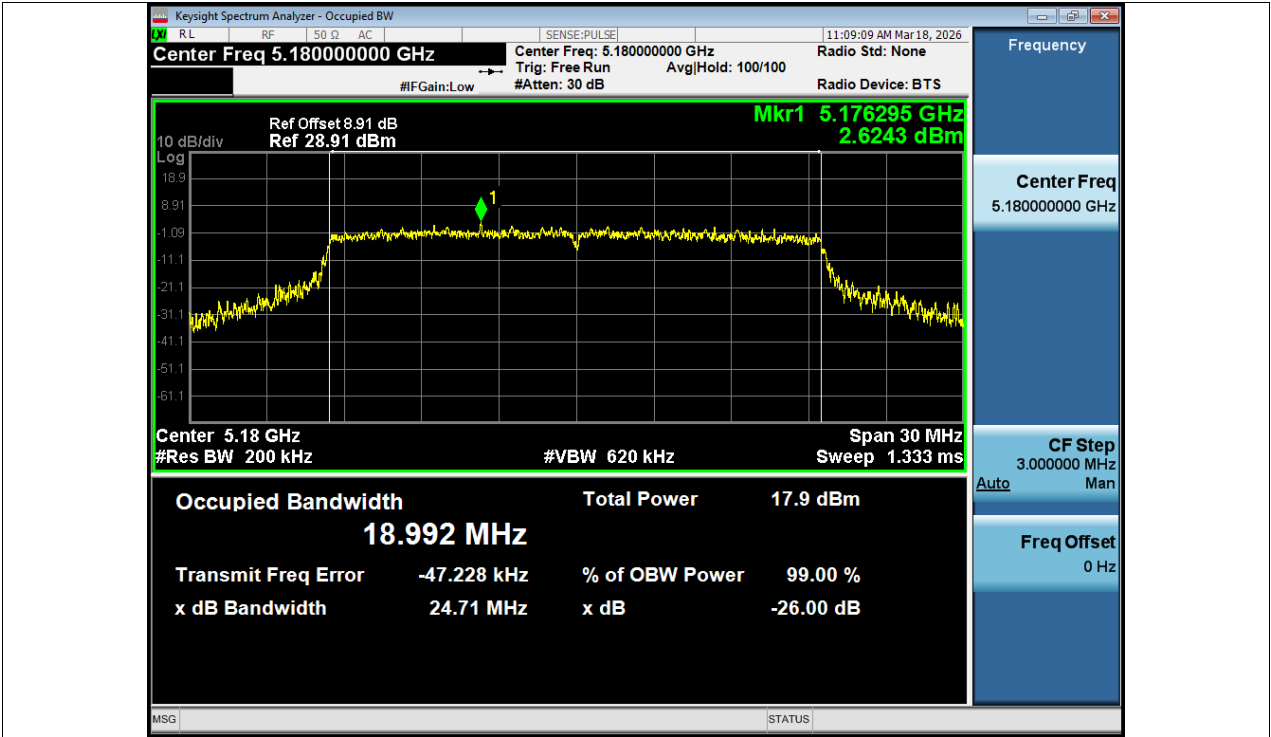


OBW NVNT ax20 5180MHz Ant1

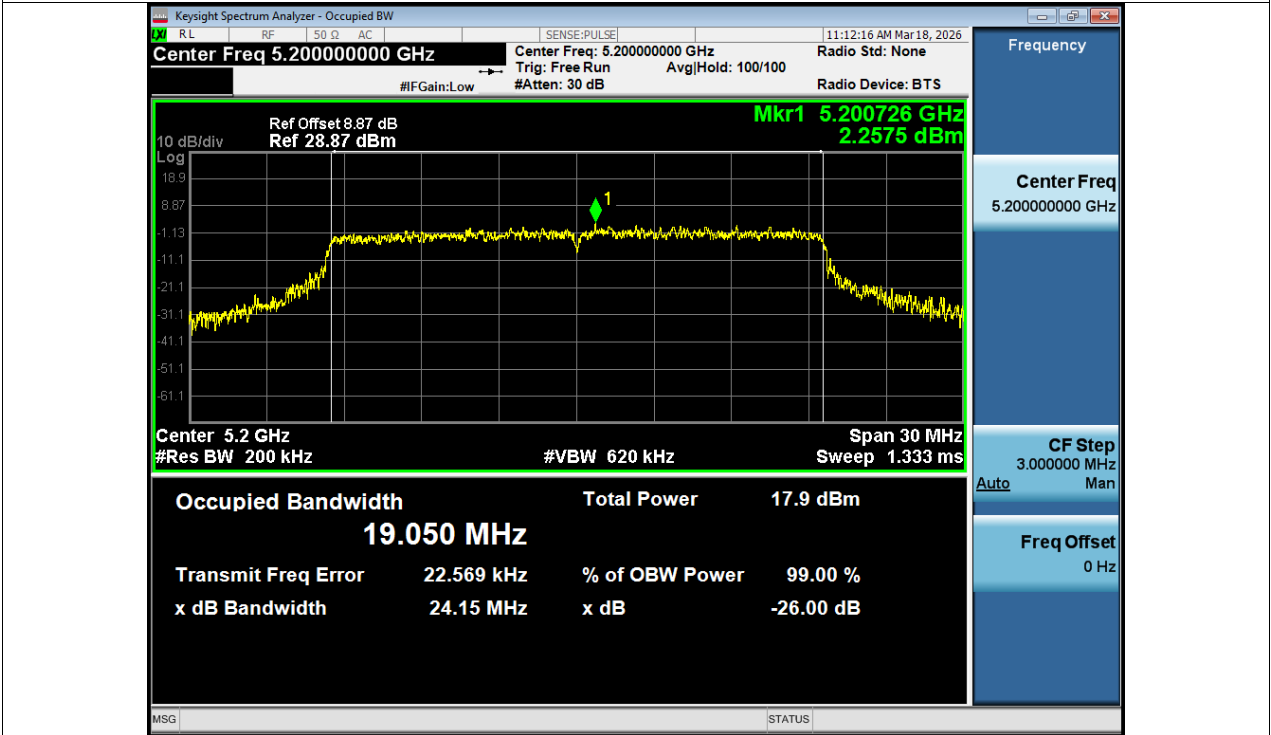


OBW NVNT ax20 5200MHz Ant1

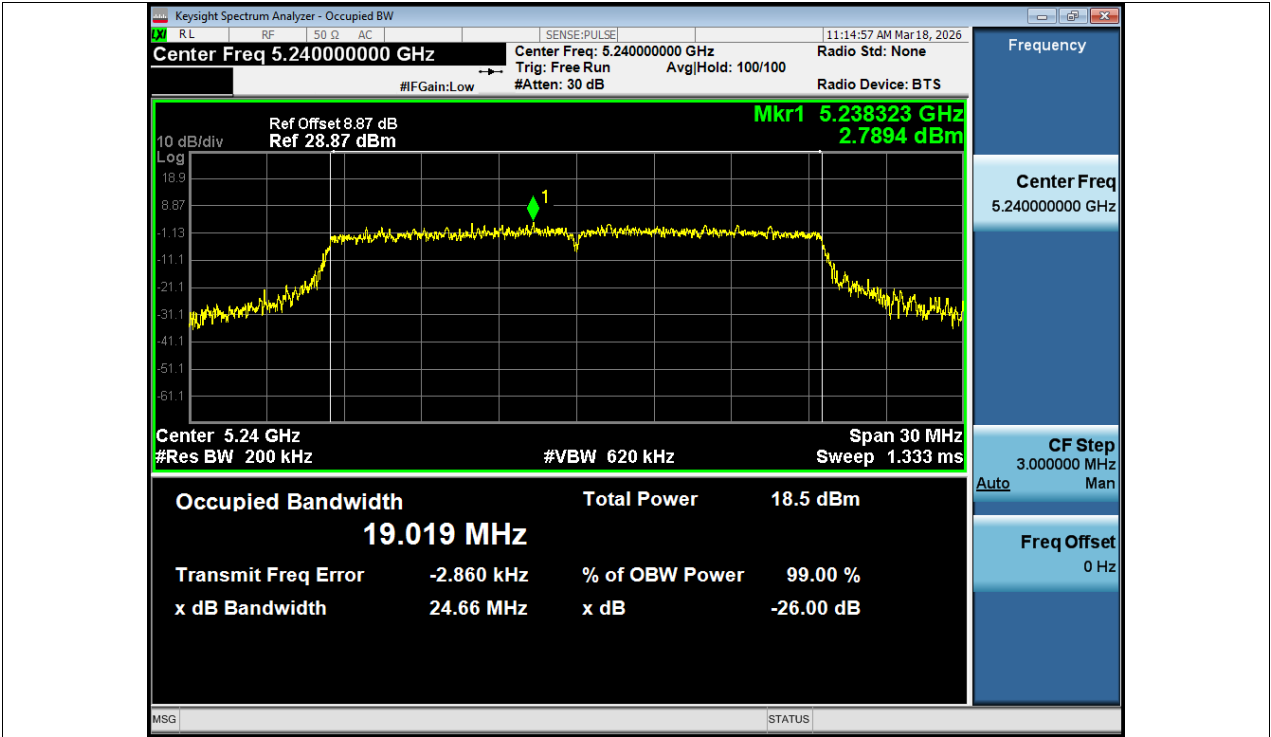


OBW NVNT ax20 5240MHz Ant1

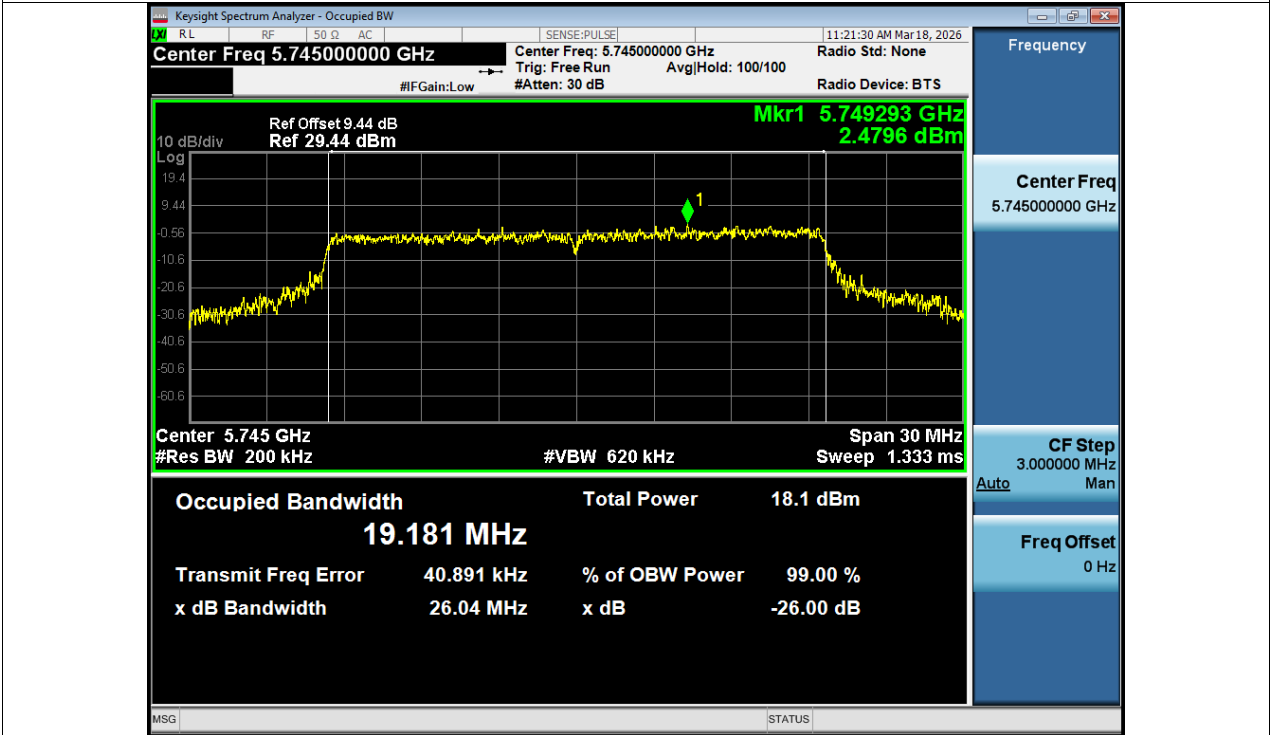


OBW NVNT ax20 5745MHz Ant1

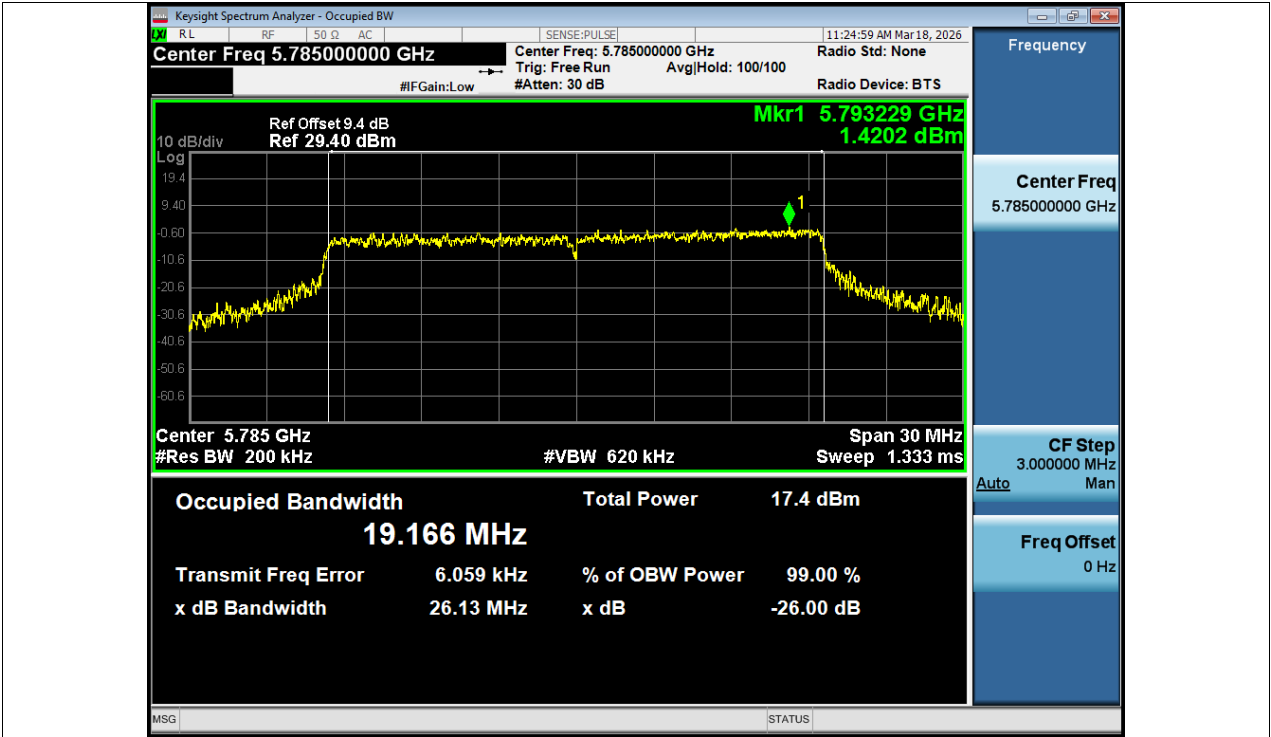


OBW NVNT ax20 5785MHz Ant1

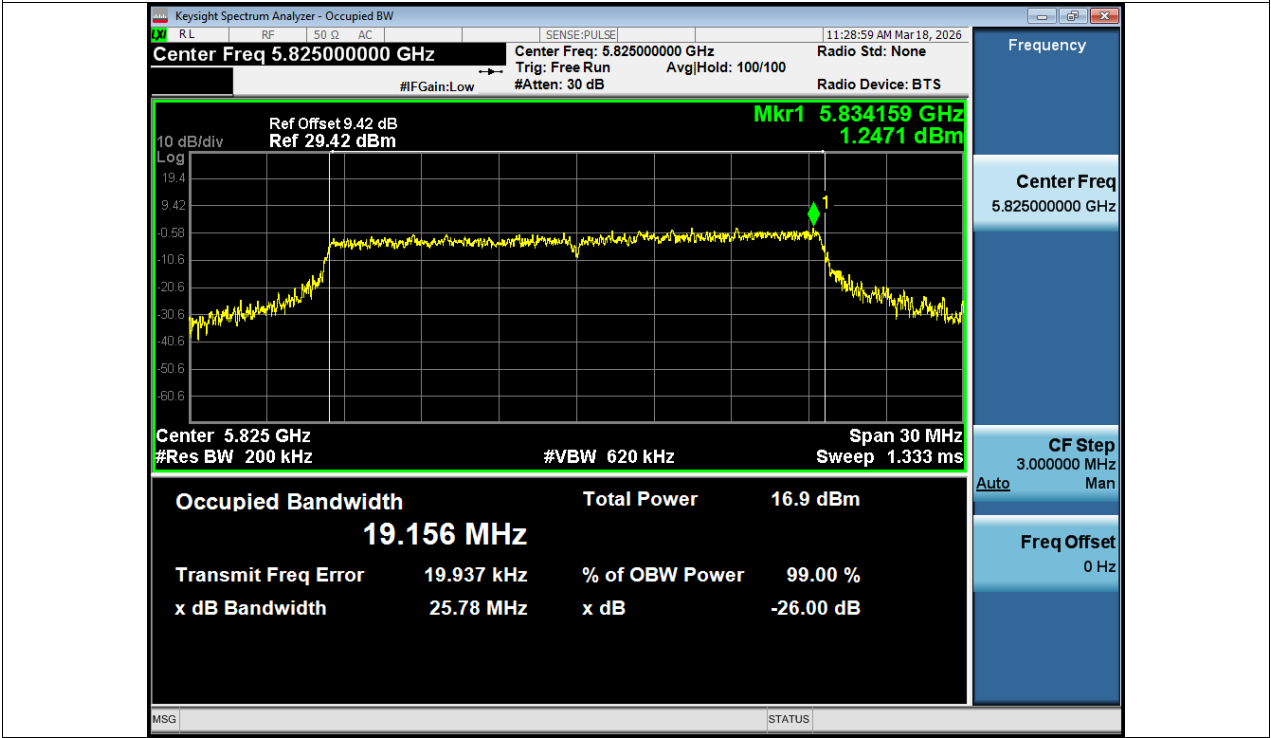

OBW NVNT ax20 5825MHz Ant1

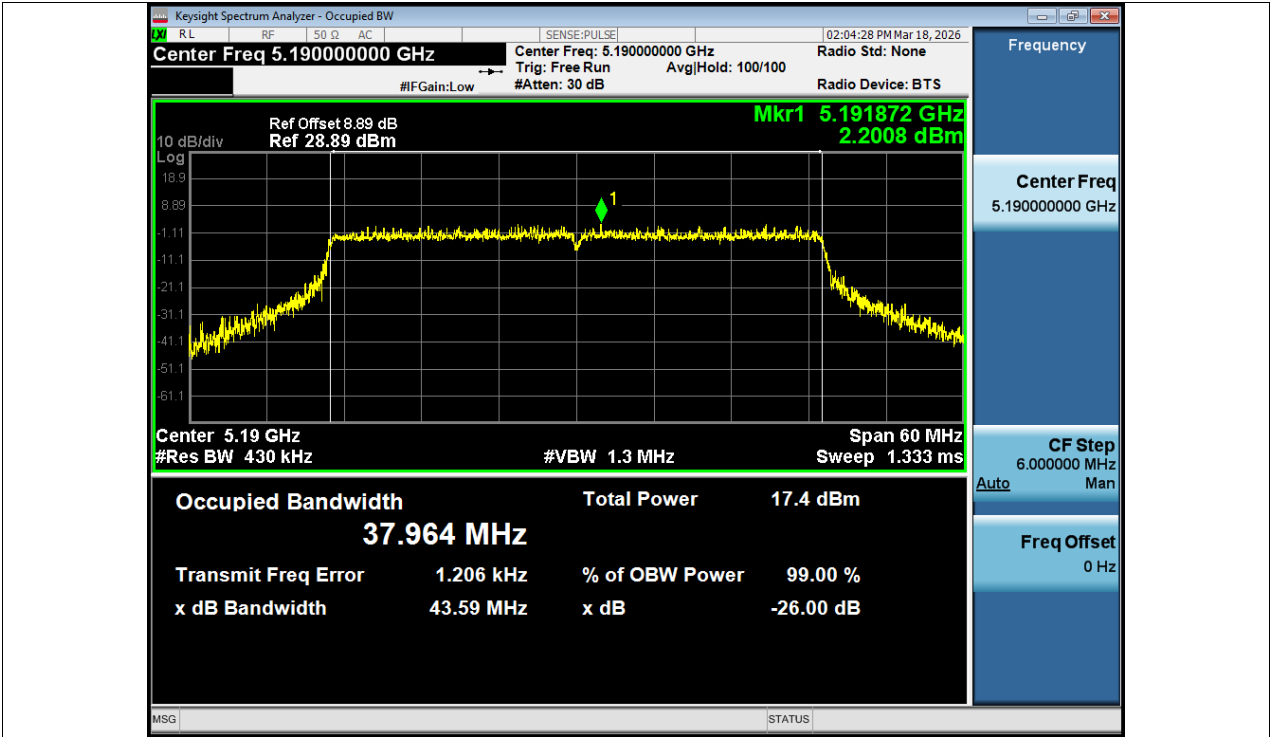


OBW NVNT ax40 5190MHz Ant1

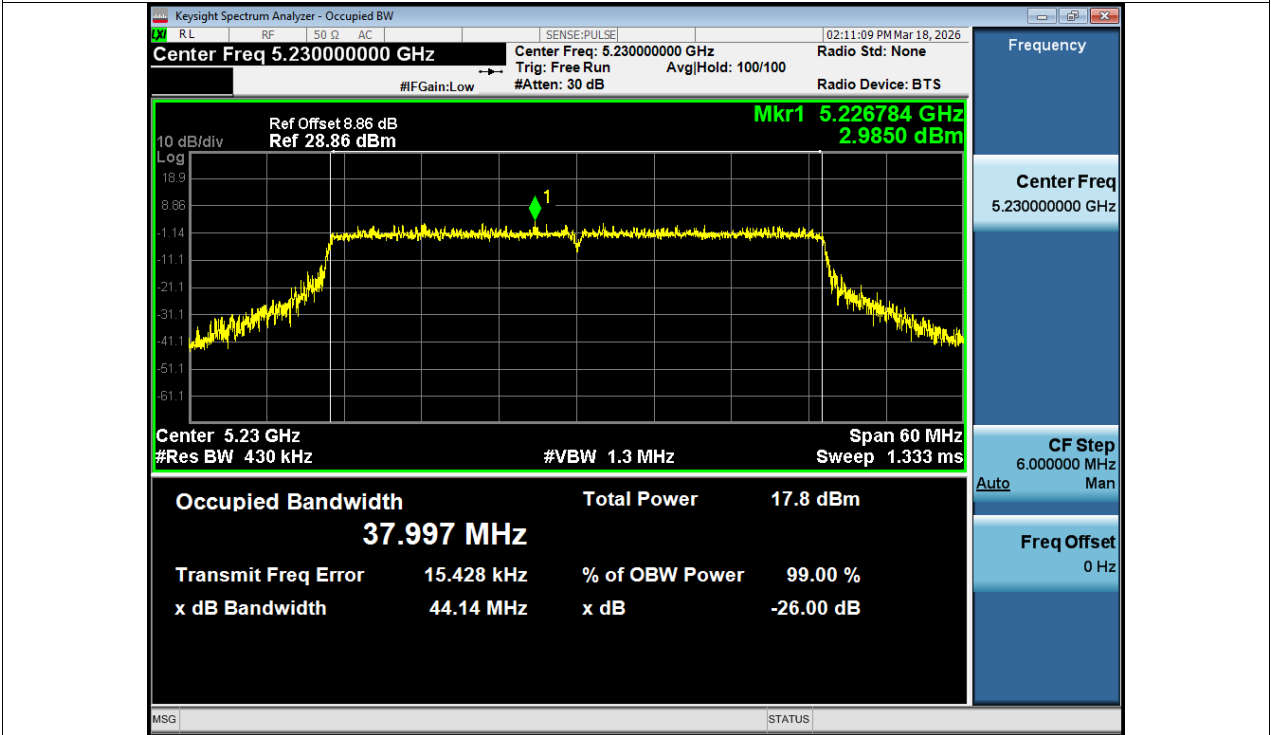

OBW NVNT ax40 5230MHz Ant1



OBW NVNT ax40 5755MHz Ant1

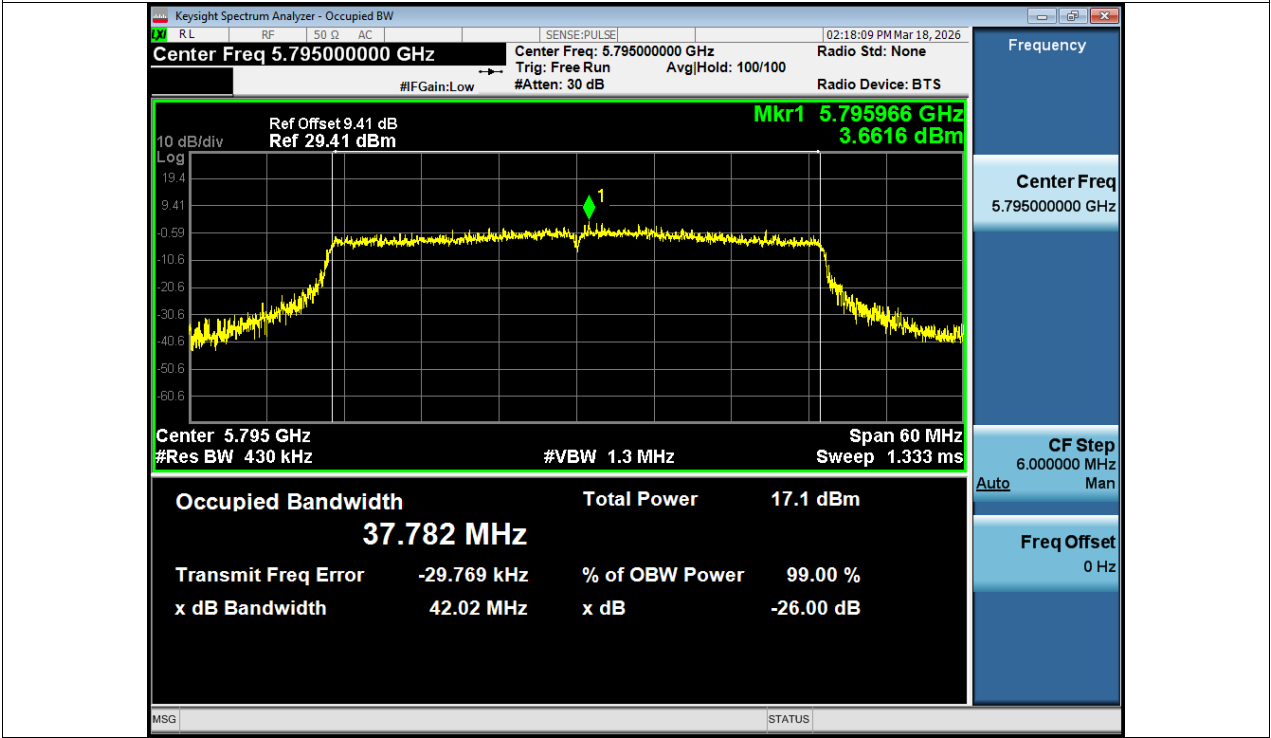

OBW NVNT ax40 5795MHz Ant1

Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total Conducted PSD (dBm)	Limit Conducted(dBm)	Verdict
NVNT	a	5180	Ant1	2.19	0.62	2.81	11	Pass
NVNT	a	5200	Ant1	2.34	0.58	2.92	11	Pass
NVNT	a	5240	Ant1	2.86	0.9	3.76	11	Pass
NVNT	a	5745	Ant1	-0.47	0.65	0.18	30	Pass
NVNT	a	5785	Ant1	0.42	0.65	1.07	30	Pass
NVNT	a	5825	Ant1	-0.11	0.65	0.54	30	Pass
NVNT	n20	5180	Ant1	1.17	0.46	1.63	11	Pass
NVNT	n20	5200	Ant1	1.02	0.54	1.56	11	Pass
NVNT	n20	5240	Ant1	0.55	0.45	1	11	Pass
NVNT	n20	5745	Ant1	-1.65	0.45	-1.2	30	Pass
NVNT	n20	5785	Ant1	-0.82	0.69	-0.13	30	Pass
NVNT	n20	5825	Ant1	-1.13	0.66	-0.47	30	Pass
NVNT	n40	5190	Ant1	-4.16	0.86	-3.3	11	Pass
NVNT	n40	5230	Ant1	-3.33	0.81	-2.52	11	Pass
NVNT	n40	5755	Ant1	-5.72	0.75	-4.97	30	Pass
NVNT	n40	5795	Ant1	-5.68	0.93	-4.75	30	Pass
NVNT	ac20	5180	Ant1	-0.15	0.71	0.56	11	Pass
NVNT	ac20	5200	Ant1	-0.09	0.42	0.33	11	Pass
NVNT	ac20	5240	Ant1	0.26	0.45	0.71	11	Pass
NVNT	ac20	5745	Ant1	-2.47	0.39	-2.08	30	Pass
NVNT	ac20	5785	Ant1	-1.79	0.86	-0.93	30	Pass
NVNT	ac20	5825	Ant1	-2.15	0.57	-1.58	30	Pass
NVNT	ac40	5190	Ant1	-4.09	1.3	-2.79	11	Pass
NVNT	ac40	5230	Ant1	-3.66	1.13	-2.53	11	Pass
NVNT	ac40	5755	Ant1	-6.77	0.75	-6.02	30	Pass
NVNT	ac40	5795	Ant1	-7.07	0.81	-6.26	30	Pass
NVNT	ax20	5180	Ant1	-0.65	0.84	0.19	11	Pass
NVNT	ax20	5200	Ant1	-0.58	0.53	-0.05	11	Pass
NVNT	ax20	5240	Ant1	0.07	0.73	0.8	11	Pass
NVNT	ax20	5745	Ant1	-2.46	0.8	-1.66	30	Pass
NVNT	ax20	5785	Ant1	-2.82	0.73	-2.09	30	Pass
NVNT	ax20	5825	Ant1	-3.46	0.54	-2.92	30	Pass
NVNT	ax40	5190	Ant1	-5.02	0.53	-4.49	11	Pass
NVNT	ax40	5230	Ant1	-4.52	1.27	-3.25	11	Pass
NVNT	ax40	5755	Ant1	-6.31	0.89	-5.42	30	Pass
NVNT	ax40	5795	Ant1	-6.64	1.23	-5.41	30	Pass



PSD NVNT a 5180MHz Ant1



PSD NVNT a 5200MHz Ant1



PSD NVNT a 5240MHz Ant1



PSD NVNT a 5745MHz Ant1



PSD NVNT a 5785MHz Ant1



PSD NVNT a 5825MHz Ant1




PSD NVNT n20 5180MHz Ant1



PSD NVNT n20 5200MHz Ant1



PSD NVNT n20 5240MHz Ant1

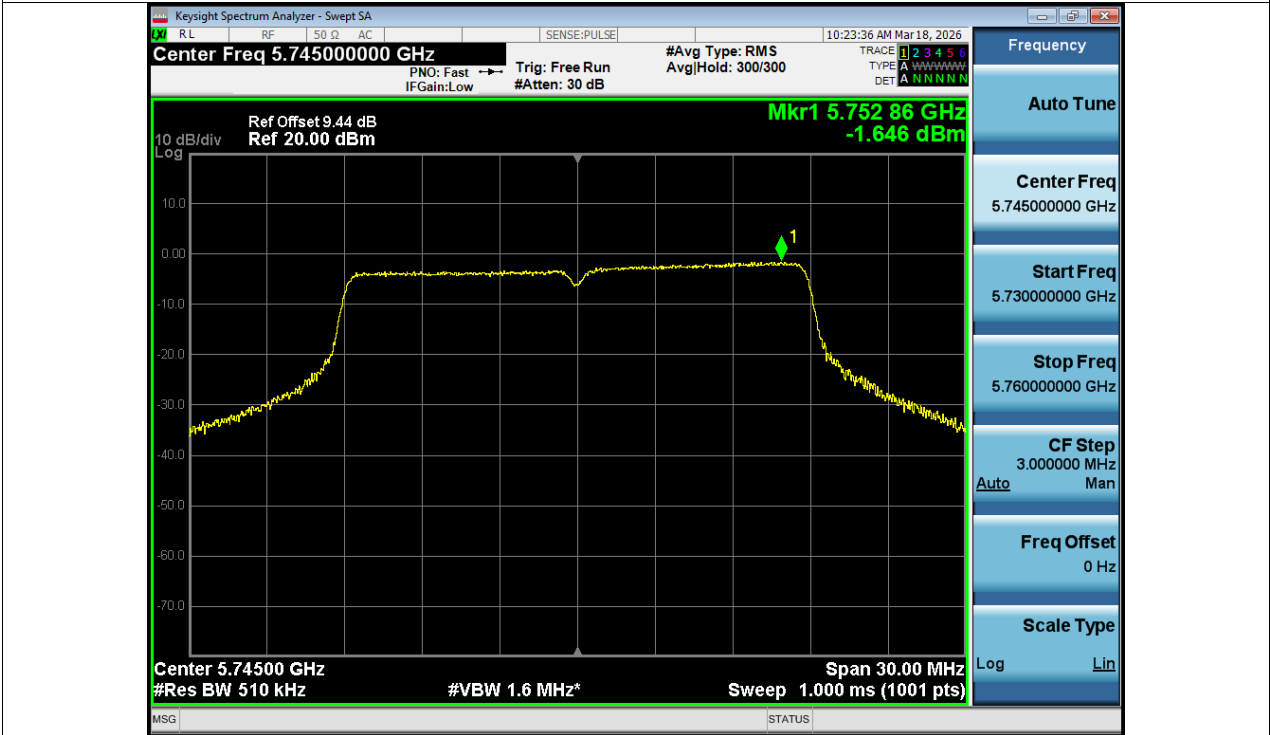


PSD NVNT n20 5745MHz Ant1



PSD NVNT n20 5785MHz Ant1



PSD NVNT n20 5825MHz Ant1

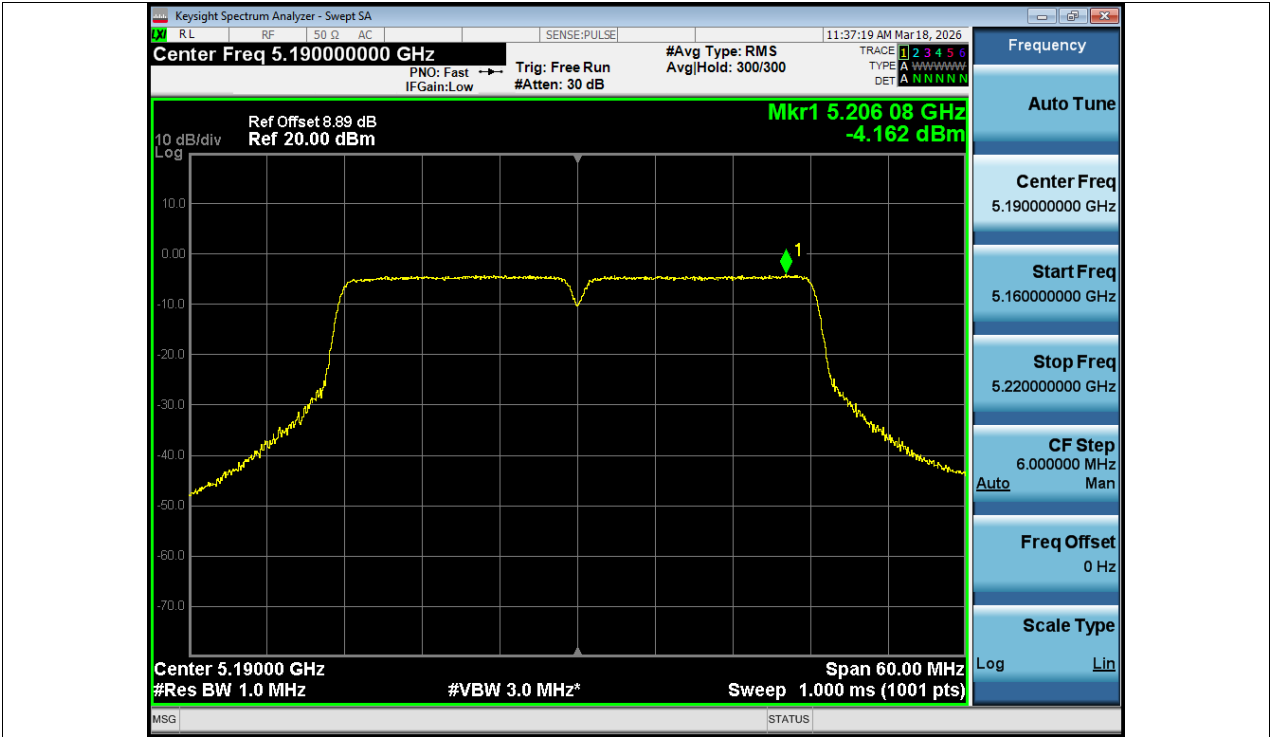

PSD NVNT n40 5190MHz Ant1



PSD NVNT n40 5230MHz Ant1




PSD NVNT n40 5755MHz Ant1



PSD NVNT n40 5795MHz Ant1




PSD NVNT ac20 5180MHz Ant1

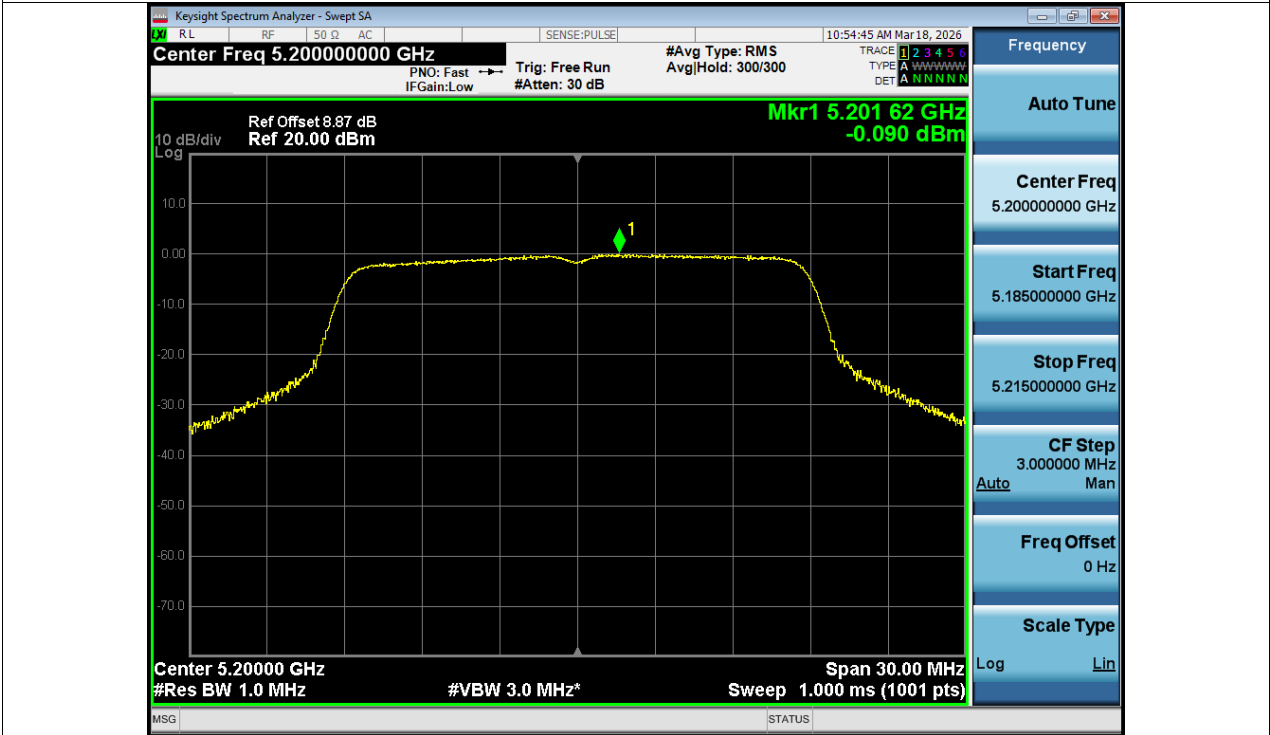

PSD NVNT ac20 5200MHz Ant1



PSD NVNT ac20 5240MHz Ant1

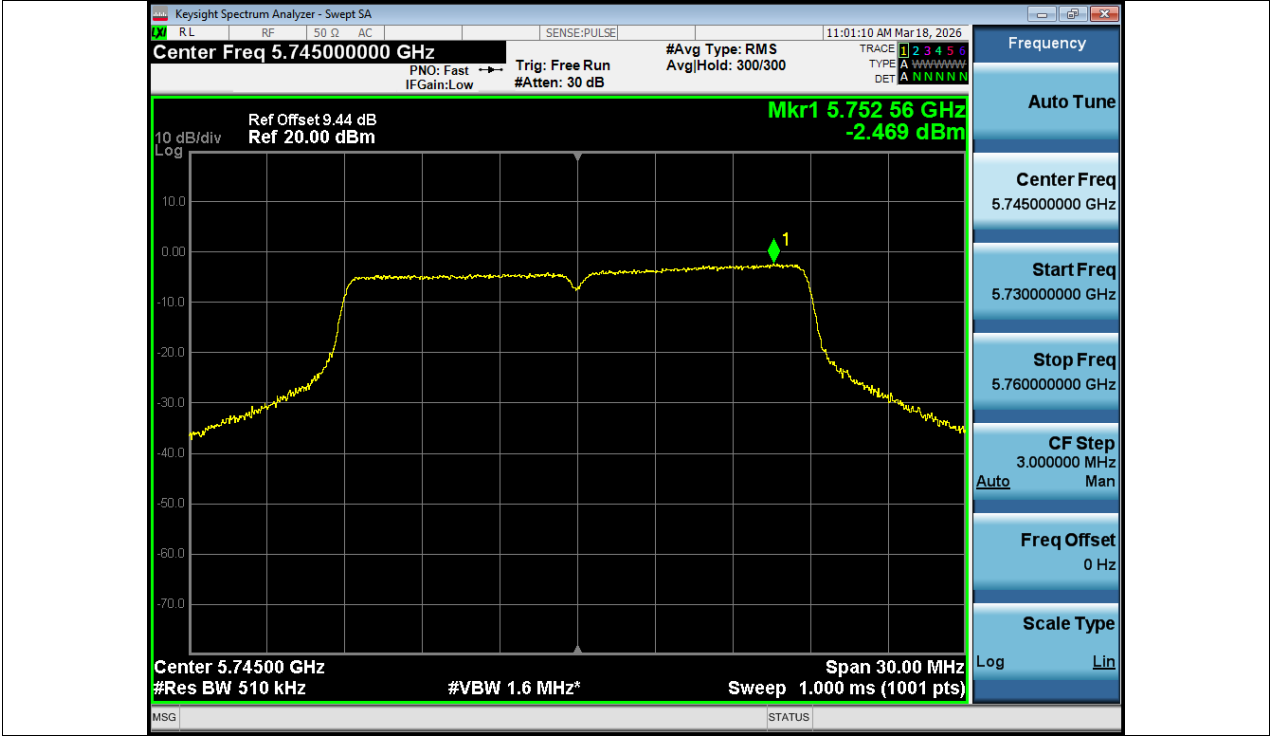

PSD NVNT ac20 5745MHz Ant1




PSD NVNT ac20 5785MHz Ant1



PSD NVNT ac20 5825MHz Ant1



PSD NVNT ac40 5190MHz Ant1

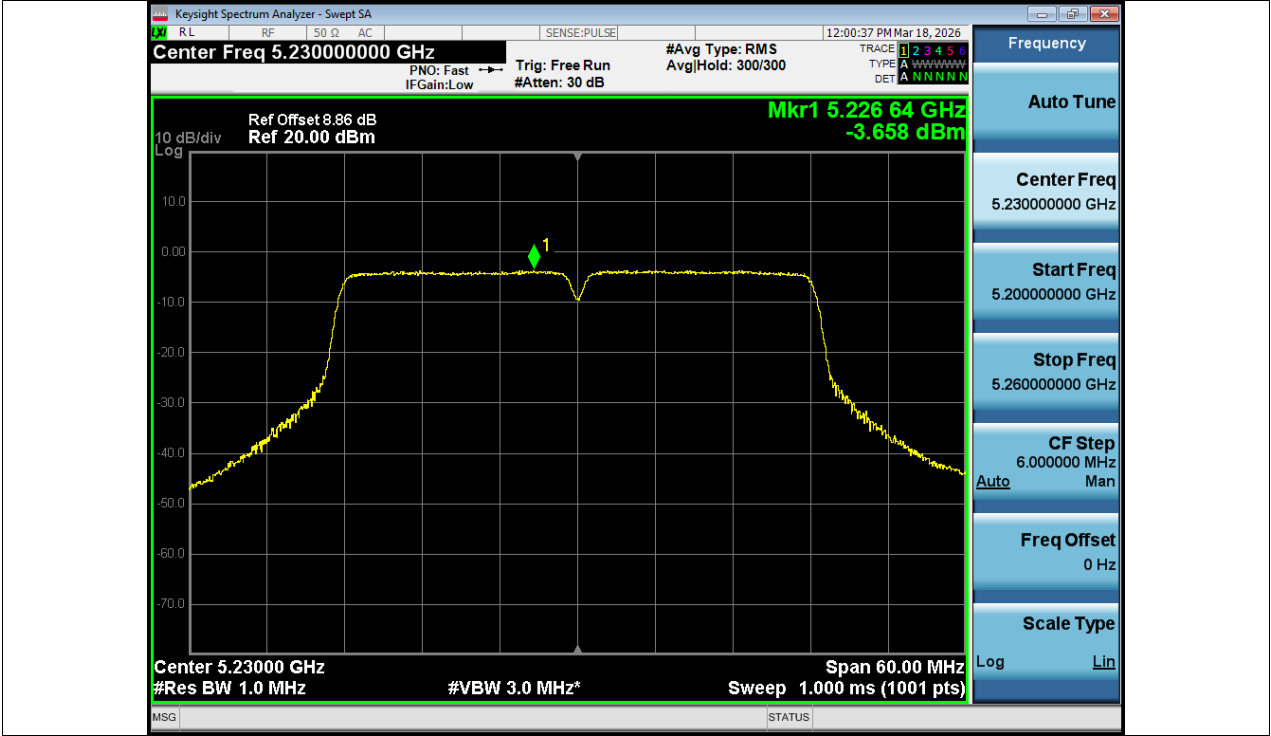

PSD NVNT ac40 5230MHz Ant1



PSD NVNT ac40 5755MHz Ant1



PSD NVNT ac40 5795MHz Ant1



PSD NVNT ax20 5180MHz Ant1



PSD NVNT ax20 5200MHz Ant1



PSD NVNT ax20 5240MHz Ant1




PSD NVNT ax20 5745MHz Ant1




PSD NVNT ax20 5785MHz Ant1



PSD NVNT ax20 5825MHz Ant1

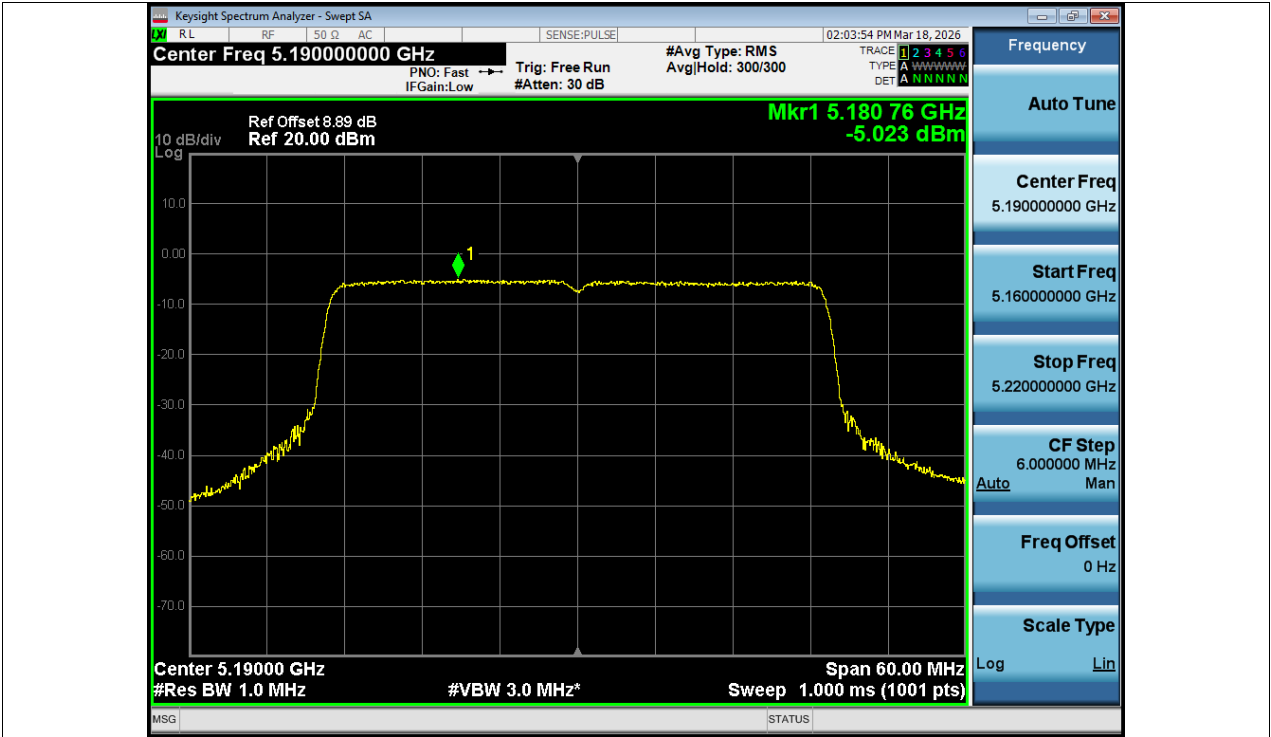


PSD NVNT ax40 5190MHz Ant1

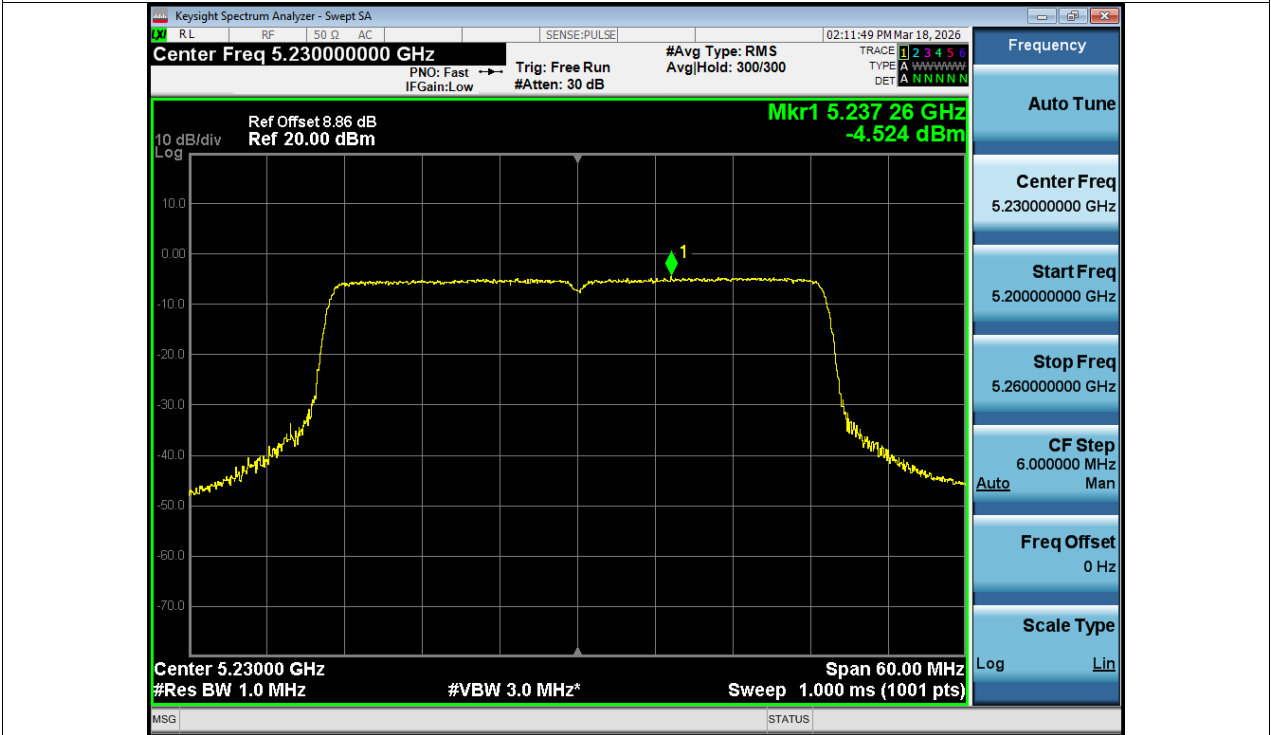

PSD NVNT ax40 5230MHz Ant1



PSD NVNT ax40 5755MHz Ant1

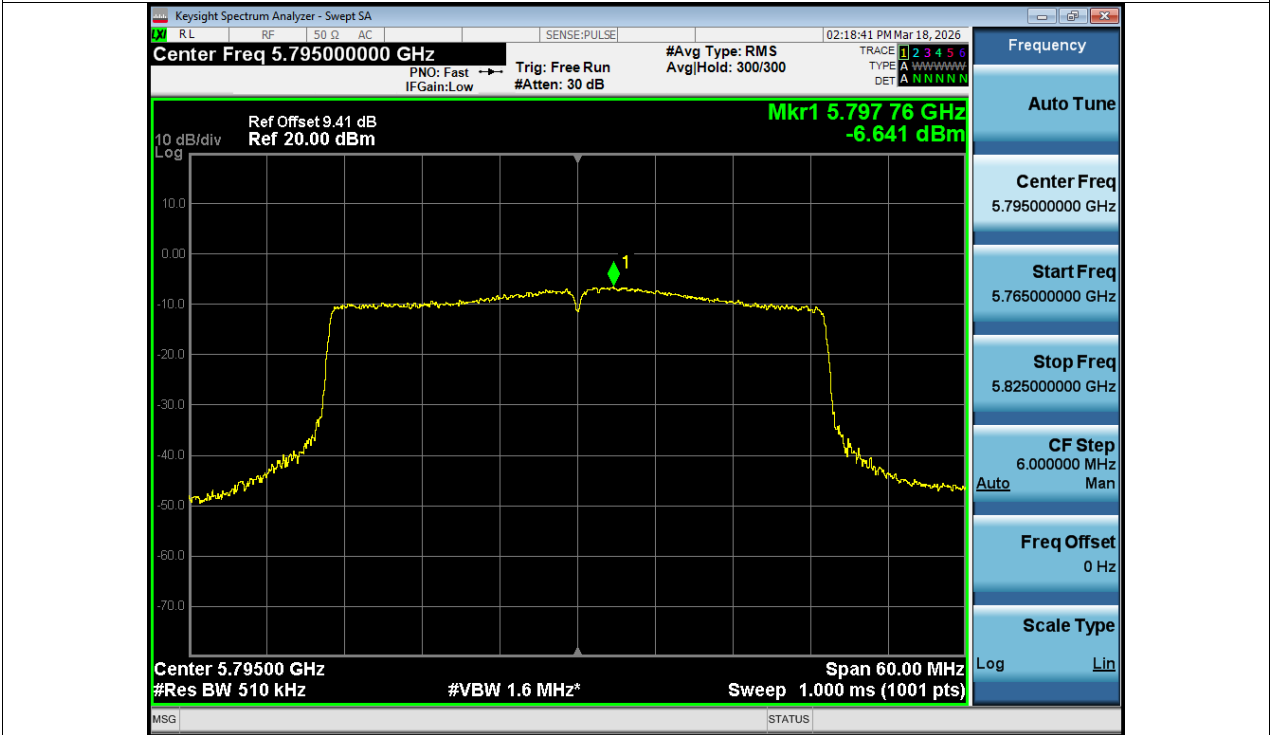

PSD NVNT ax40 5795MHz Ant1

Frequency Stability

Condition	Mode	Frequency (MHz)	Antenna	Measured Frequency (MHz)	Frequency Error (Hz)	Deviation (ppm)	Limit (ppm)	Verdict
20C 4.5V	a	5180	Ant1	5179.92	-80000	-15.44	25	Pass
20C 5V	a	5180	Ant1	5179.92	-80000	-15.44	25	Pass
20C 5.5V	a	5180	Ant1	5179.94	-60000	-11.58	25	Pass
-10C 5V	a	5180	Ant1	5179.94	-60000	-11.58	25	Pass
0C 5V	a	5180	Ant1	5179.92	-80000	-15.44	25	Pass
10C 5V	a	5180	Ant1	5179.92	-80000	-15.44	25	Pass
30C 5V	a	5180	Ant1	5179.94	-60000	-11.58	25	Pass
40C 5V	a	5180	Ant1	5179.92	-80000	-15.44	25	Pass
20C 4.5V	a	5200	Ant1	5199.96	-40000	-7.69	25	Pass
20C 5V	a	5200	Ant1	5199.94	-60000	-11.54	25	Pass
20C 5.5V	a	5200	Ant1	5199.94	-60000	-11.54	25	Pass
-10C 5V	a	5200	Ant1	5199.94	-60000	-11.54	25	Pass
0C 5V	a	5200	Ant1	5199.94	-60000	-11.54	25	Pass
10C 5V	a	5200	Ant1	5199.94	-60000	-11.54	25	Pass
30C 5V	a	5200	Ant1	5199.94	-60000	-11.54	25	Pass
40C 5V	a	5200	Ant1	5199.94	-60000	-11.54	25	Pass
20C 4.5V	a	5240	Ant1	5239.96	-40000	-7.63	25	Pass
20C 5V	a	5240	Ant1	5239.96	-40000	-7.63	25	Pass
20C 5.5V	a	5240	Ant1	5239.96	-40000	-7.63	25	Pass
-10C 5V	a	5240	Ant1	5239.94	-60000	-11.45	25	Pass
0C 5V	a	5240	Ant1	5239.96	-40000	-7.63	25	Pass
10C 5V	a	5240	Ant1	5239.94	-60000	-11.45	25	Pass
30C 5V	a	5240	Ant1	5239.94	-60000	-11.45	25	Pass
40C 5V	a	5240	Ant1	5239.94	-60000	-11.45	25	Pass
20C 4.5V	a	5745	Ant1	5744.96	-40000	-6.96	25	Pass
20C 5V	a	5745	Ant1	5744.94	-60000	-10.44	25	Pass
20C 5.5V	a	5745	Ant1	5744.94	-60000	-10.44	25	Pass
-10C 5V	a	5745	Ant1	5744.94	-60000	-10.44	25	Pass
0C 5V	a	5745	Ant1	5744.94	-60000	-10.44	25	Pass
10C 5V	a	5745	Ant1	5744.94	-60000	-10.44	25	Pass
30C 5V	a	5745	Ant1	5744.96	-40000	-6.96	25	Pass
40C 5V	a	5745	Ant1	5744.96	-40000	-6.96	25	Pass
20C 4.5V	a	5785	Ant1	5784.92	-80000	-13.83	25	Pass
20C 5V	a	5785	Ant1	5784.92	-80000	-13.83	25	Pass
20C 5.5V	a	5785	Ant1	5784.92	-80000	-13.83	25	Pass
-10C 5V	a	5785	Ant1	5784.92	-80000	-13.83	25	Pass
0C 5V	a	5785	Ant1	5784.94	-60000	-10.37	25	Pass
10C 5V	a	5785	Ant1	5784.9	-100000	-17.29	25	Pass
30C 5V	a	5785	Ant1	5784.92	-80000	-13.83	25	Pass
40C 5V	a	5785	Ant1	5784.92	-80000	-13.83	25	Pass
20C 4.5V	a	5825	Ant1	5824.92	-80000	-13.73	25	Pass
20C 5V	a	5825	Ant1	5824.92	-80000	-13.73	25	Pass
20C 5.5V	a	5825	Ant1	5824.94	-60000	-10.3	25	Pass
-10C 5V	a	5825	Ant1	5824.92	-80000	-13.73	25	Pass
0C 5V	a	5825	Ant1	5824.92	-80000	-13.73	25	Pass
10C 5V	a	5825	Ant1	5824.92	-80000	-13.73	25	Pass
30C 5V	a	5825	Ant1	5824.92	-80000	-13.73	25	Pass
40C 5V	a	5825	Ant1	5824.94	-60000	-10.3	25	Pass
20C 4.5V	n20	5180	Ant1	5179.94	-60000	-11.58	25	Pass

20C 5V	n20	5180	Ant1	5179.96	-40000	-7.72	25	Pass
20C 5.5V	n20	5180	Ant1	5179.94	-60000	-11.58	25	Pass
-10C 5V	n20	5180	Ant1	5179.96	-40000	-7.72	25	Pass
0C 5V	n20	5180	Ant1	5179.96	-40000	-7.72	25	Pass
10C 5V	n20	5180	Ant1	5179.94	-60000	-11.58	25	Pass
30C 5V	n20	5180	Ant1	5179.96	-40000	-7.72	25	Pass
40C 5V	n20	5180	Ant1	5179.94	-60000	-11.58	25	Pass
20C 4.5V	n20	5200	Ant1	5199.96	-40000	-7.69	25	Pass
20C 5V	n20	5200	Ant1	5199.96	-40000	-7.69	25	Pass
20C 5.5V	n20	5200	Ant1	5199.94	-60000	-11.54	25	Pass
-10C 5V	n20	5200	Ant1	5199.94	-60000	-11.54	25	Pass
0C 5V	n20	5200	Ant1	5199.94	-60000	-11.54	25	Pass
10C 5V	n20	5200	Ant1	5199.96	-40000	-7.69	25	Pass
30C 5V	n20	5200	Ant1	5199.94	-60000	-11.54	25	Pass
40C 5V	n20	5200	Ant1	5199.96	-40000	-7.69	25	Pass
20C 4.5V	n20	5240	Ant1	5239.96	-40000	-7.63	25	Pass
20C 5V	n20	5240	Ant1	5239.96	-40000	-7.63	25	Pass
20C 5.5V	n20	5240	Ant1	5239.94	-60000	-11.45	25	Pass
-10C 5V	n20	5240	Ant1	5239.96	-40000	-7.63	25	Pass
0C 5V	n20	5240	Ant1	5239.98	-20000	-3.82	25	Pass
10C 5V	n20	5240	Ant1	5239.96	-40000	-7.63	25	Pass
30C 5V	n20	5240	Ant1	5239.96	-40000	-7.63	25	Pass
40C 5V	n20	5240	Ant1	5239.94	-60000	-11.45	25	Pass
20C 4.5V	n20	5745	Ant1	5744.94	-60000	-10.44	25	Pass
20C 5V	n20	5745	Ant1	5744.94	-60000	-10.44	25	Pass
20C 5.5V	n20	5745	Ant1	5744.96	-40000	-6.96	25	Pass
-10C 5V	n20	5745	Ant1	5744.96	-40000	-6.96	25	Pass
0C 5V	n20	5745	Ant1	5744.94	-60000	-10.44	25	Pass
10C 5V	n20	5745	Ant1	5744.94	-60000	-10.44	25	Pass
30C 5V	n20	5745	Ant1	5744.94	-60000	-10.44	25	Pass
40C 5V	n20	5745	Ant1	5744.94	-60000	-10.44	25	Pass
20C 4.5V	n20	5785	Ant1	5784.94	-60000	-10.37	25	Pass
20C 5V	n20	5785	Ant1	5784.92	-80000	-13.83	25	Pass
20C 5.5V	n20	5785	Ant1	5784.92	-80000	-13.83	25	Pass
-10C 5V	n20	5785	Ant1	5784.94	-60000	-10.37	25	Pass
0C 5V	n20	5785	Ant1	5784.92	-80000	-13.83	25	Pass
10C 5V	n20	5785	Ant1	5784.92	-80000	-13.83	25	Pass
30C 5V	n20	5785	Ant1	5784.92	-80000	-13.83	25	Pass
40C 5V	n20	5785	Ant1	5784.94	-60000	-10.37	25	Pass
20C 4.5V	n20	5825	Ant1	5824.94	-60000	-10.3	25	Pass
20C 5V	n20	5825	Ant1	5824.94	-60000	-10.3	25	Pass
20C 5.5V	n20	5825	Ant1	5824.94	-60000	-10.3	25	Pass
-10C 5V	n20	5825	Ant1	5824.92	-80000	-13.73	25	Pass
0C 5V	n20	5825	Ant1	5824.92	-80000	-13.73	25	Pass
10C 5V	n20	5825	Ant1	5824.92	-80000	-13.73	25	Pass
30C 5V	n20	5825	Ant1	5824.92	-80000	-13.73	25	Pass
40C 5V	n20	5825	Ant1	5824.92	-80000	-13.73	25	Pass
20C 4.5V	n40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
20C 5V	n40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
20C 5.5V	n40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
-10C 5V	n40	5190	Ant1	5189.92	-80000	-15.41	25	Pass
0C 5V	n40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
10C 5V	n40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
30C 5V	n40	5190	Ant1	5189.96	-40000	-7.71	25	Pass

40C 5V	n40	5190	Ant1	5189.92	-80000	-15.41	25	Pass
20C 4.5V	n40	5230	Ant1	5229.92	-80000	-15.3	25	Pass
20C 5V	n40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
20C 5.5V	n40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
-10C 5V	n40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
0C 5V	n40	5230	Ant1	5229.92	-80000	-15.3	25	Pass
10C 5V	n40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
30C 5V	n40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
40C 5V	n40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
20C 4.5V	n40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
20C 5V	n40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
20C 5.5V	n40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
-10C 5V	n40	5755	Ant1	5754.96	-40000	-6.95	25	Pass
0C 5V	n40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
10C 5V	n40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
30C 5V	n40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
40C 5V	n40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
20C 4.5V	n40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
20C 5V	n40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
20C 5.5V	n40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
-10C 5V	n40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
0C 5V	n40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
10C 5V	n40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
30C 5V	n40	5795	Ant1	5795	0	0	25	Pass
40C 5V	n40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
20C 4.5V	ac20	5180	Ant1	5179.96	-40000	-7.72	25	Pass
20C 5V	ac20	5180	Ant1	5179.94	-60000	-11.58	25	Pass
20C 5.5V	ac20	5180	Ant1	5179.94	-60000	-11.58	25	Pass
-10C 5V	ac20	5180	Ant1	5179.92	-80000	-15.44	25	Pass
0C 5V	ac20	5180	Ant1	5179.96	-40000	-7.72	25	Pass
10C 5V	ac20	5180	Ant1	5179.96	-40000	-7.72	25	Pass
30C 5V	ac20	5180	Ant1	5179.96	-40000	-7.72	25	Pass
40C 5V	ac20	5180	Ant1	5179.96	-40000	-7.72	25	Pass
20C 4.5V	ac20	5200	Ant1	5199.96	-40000	-7.69	25	Pass
20C 5V	ac20	5200	Ant1	5199.96	-40000	-7.69	25	Pass
20C 5.5V	ac20	5200	Ant1	5199.96	-40000	-7.69	25	Pass
-10C 5V	ac20	5200	Ant1	5199.98	-20000	-3.85	25	Pass
0C 5V	ac20	5200	Ant1	5199.96	-40000	-7.69	25	Pass
10C 5V	ac20	5200	Ant1	5199.94	-60000	-11.54	25	Pass
30C 5V	ac20	5200	Ant1	5199.98	-20000	-3.85	25	Pass
40C 5V	ac20	5200	Ant1	5199.96	-40000	-7.69	25	Pass
20C 4.5V	ac20	5240	Ant1	5239.94	-60000	-11.45	25	Pass
20C 5V	ac20	5240	Ant1	5239.96	-40000	-7.63	25	Pass
20C 5.5V	ac20	5240	Ant1	5239.94	-60000	-11.45	25	Pass
-10C 5V	ac20	5240	Ant1	5239.96	-40000	-7.63	25	Pass
0C 5V	ac20	5240	Ant1	5239.94	-60000	-11.45	25	Pass
10C 5V	ac20	5240	Ant1	5239.94	-60000	-11.45	25	Pass
30C 5V	ac20	5240	Ant1	5239.96	-40000	-7.63	25	Pass
40C 5V	ac20	5240	Ant1	5239.96	-40000	-7.63	25	Pass
20C 4.5V	ac20	5745	Ant1	5744.94	-60000	-10.44	25	Pass
20C 5V	ac20	5745	Ant1	5744.96	-40000	-6.96	25	Pass
20C 5.5V	ac20	5745	Ant1	5744.96	-40000	-6.96	25	Pass
-10C 5V	ac20	5745	Ant1	5744.94	-60000	-10.44	25	Pass
0C 5V	ac20	5745	Ant1	5744.96	-40000	-6.96	25	Pass


10C 5V	ac20	5745	Ant1	5744.94	-60000	-10.44	25	Pass
30C 5V	ac20	5745	Ant1	5744.94	-60000	-10.44	25	Pass
40C 5V	ac20	5745	Ant1	5744.94	-60000	-10.44	25	Pass
20C 4.5V	ac20	5785	Ant1	5784.94	-60000	-10.37	25	Pass
20C 5V	ac20	5785	Ant1	5784.94	-60000	-10.37	25	Pass
20C 5.5V	ac20	5785	Ant1	5784.94	-60000	-10.37	25	Pass
-10C 5V	ac20	5785	Ant1	5784.94	-60000	-10.37	25	Pass
0C 5V	ac20	5785	Ant1	5784.94	-60000	-10.37	25	Pass
10C 5V	ac20	5785	Ant1	5784.92	-80000	-13.83	25	Pass
30C 5V	ac20	5785	Ant1	5784.92	-80000	-13.83	25	Pass
40C 5V	ac20	5785	Ant1	5784.94	-60000	-10.37	25	Pass
20C 4.5V	ac20	5825	Ant1	5824.94	-60000	-10.3	25	Pass
20C 5V	ac20	5825	Ant1	5824.94	-60000	-10.3	25	Pass
20C 5.5V	ac20	5825	Ant1	5824.96	-40000	-6.87	25	Pass
-10C 5V	ac20	5825	Ant1	5824.92	-80000	-13.73	25	Pass
0C 5V	ac20	5825	Ant1	5824.92	-80000	-13.73	25	Pass
10C 5V	ac20	5825	Ant1	5824.94	-60000	-10.3	25	Pass
30C 5V	ac20	5825	Ant1	5824.92	-80000	-13.73	25	Pass
40C 5V	ac20	5825	Ant1	5824.94	-60000	-10.3	25	Pass
20C 4.5V	ac40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
20C 5V	ac40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
20C 5.5V	ac40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
-10C 5V	ac40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
0C 5V	ac40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
10C 5V	ac40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
30C 5V	ac40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
40C 5V	ac40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
20C 4.5V	ac40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
20C 5V	ac40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
20C 5.5V	ac40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
-10C 5V	ac40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
0C 5V	ac40	5230	Ant1	5229.92	-80000	-15.3	25	Pass
10C 5V	ac40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
30C 5V	ac40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
40C 5V	ac40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
20C 4.5V	ac40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
20C 5V	ac40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
20C 5.5V	ac40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
-10C 5V	ac40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
0C 5V	ac40	5755	Ant1	5754.96	-40000	-6.95	25	Pass
10C 5V	ac40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
30C 5V	ac40	5755	Ant1	5754.92	-80000	-13.9	25	Pass
40C 5V	ac40	5755	Ant1	5754.96	-40000	-6.95	25	Pass
20C 4.5V	ac40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
20C 5V	ac40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
20C 5.5V	ac40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
-10C 5V	ac40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
0C 5V	ac40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
10C 5V	ac40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
30C 5V	ac40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
40C 5V	ac40	5795	Ant1	5794.92	-80000	-13.81	25	Pass
20C 4.5V	ax20	5180	Ant1	5179.96	-40000	-7.72	25	Pass
20C 5V	ax20	5180	Ant1	5179.94	-60000	-11.58	25	Pass
20C 5.5V	ax20	5180	Ant1	5179.96	-40000	-7.72	25	Pass

-10C 5V	ax20	5180	Ant1	5179.96	-40000	-7.72	25	Pass
0C 5V	ax20	5180	Ant1	5179.96	-40000	-7.72	25	Pass
10C 5V	ax20	5180	Ant1	5179.94	-60000	-11.58	25	Pass
30C 5V	ax20	5180	Ant1	5179.94	-60000	-11.58	25	Pass
40C 5V	ax20	5180	Ant1	5179.96	-40000	-7.72	25	Pass
20C 4.5V	ax20	5200	Ant1	5199.96	-40000	-7.69	25	Pass
20C 5V	ax20	5200	Ant1	5199.96	-40000	-7.69	25	Pass
20C 5.5V	ax20	5200	Ant1	5199.96	-40000	-7.69	25	Pass
-10C 5V	ax20	5200	Ant1	5199.94	-60000	-11.54	25	Pass
0C 5V	ax20	5200	Ant1	5199.96	-40000	-7.69	25	Pass
10C 5V	ax20	5200	Ant1	5199.96	-40000	-7.69	25	Pass
30C 5V	ax20	5200	Ant1	5199.96	-40000	-7.69	25	Pass
40C 5V	ax20	5200	Ant1	5199.96	-40000	-7.69	25	Pass
20C 4.5V	ax20	5240	Ant1	5239.94	-60000	-11.45	25	Pass
20C 5V	ax20	5240	Ant1	5239.96	-40000	-7.63	25	Pass
20C 5.5V	ax20	5240	Ant1	5239.96	-40000	-7.63	25	Pass
-10C 5V	ax20	5240	Ant1	5239.96	-40000	-7.63	25	Pass
0C 5V	ax20	5240	Ant1	5239.96	-40000	-7.63	25	Pass
10C 5V	ax20	5240	Ant1	5239.96	-40000	-7.63	25	Pass
30C 5V	ax20	5240	Ant1	5239.96	-40000	-7.63	25	Pass
40C 5V	ax20	5240	Ant1	5239.96	-40000	-7.63	25	Pass
20C 4.5V	ax20	5745	Ant1	5744.94	-60000	-10.44	25	Pass
20C 5V	ax20	5745	Ant1	5744.94	-60000	-10.44	25	Pass
20C 5.5V	ax20	5745	Ant1	5744.94	-60000	-10.44	25	Pass
-10C 5V	ax20	5745	Ant1	5744.94	-60000	-10.44	25	Pass
0C 5V	ax20	5745	Ant1	5744.94	-60000	-10.44	25	Pass
10C 5V	ax20	5745	Ant1	5744.94	-60000	-10.44	25	Pass
30C 5V	ax20	5745	Ant1	5744.94	-60000	-10.44	25	Pass
40C 5V	ax20	5745	Ant1	5744.94	-60000	-10.44	25	Pass
20C 4.5V	ax20	5785	Ant1	5784.92	-80000	-13.83	25	Pass
20C 5V	ax20	5785	Ant1	5784.92	-80000	-13.83	25	Pass
20C 5.5V	ax20	5785	Ant1	5784.96	-40000	-6.91	25	Pass
-10C 5V	ax20	5785	Ant1	5784.92	-80000	-13.83	25	Pass
0C 5V	ax20	5785	Ant1	5784.92	-80000	-13.83	25	Pass
10C 5V	ax20	5785	Ant1	5784.92	-80000	-13.83	25	Pass
30C 5V	ax20	5785	Ant1	5784.92	-80000	-13.83	25	Pass
40C 5V	ax20	5785	Ant1	5784.92	-80000	-13.83	25	Pass
20C 4.5V	ax20	5825	Ant1	5824.92	-80000	-13.73	25	Pass
20C 5V	ax20	5825	Ant1	5824.92	-80000	-13.73	25	Pass
20C 5.5V	ax20	5825	Ant1	5824.92	-80000	-13.73	25	Pass
-10C 5V	ax20	5825	Ant1	5824.92	-80000	-13.73	25	Pass
0C 5V	ax20	5825	Ant1	5824.92	-80000	-13.73	25	Pass
10C 5V	ax20	5825	Ant1	5824.92	-80000	-13.73	25	Pass
30C 5V	ax20	5825	Ant1	5824.92	-80000	-13.73	25	Pass
40C 5V	ax20	5825	Ant1	5824.92	-80000	-13.73	25	Pass
20C 4.5V	ax40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
20C 5V	ax40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
20C 5.5V	ax40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
-10C 5V	ax40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
0C 5V	ax40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
10C 5V	ax40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
30C 5V	ax40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
40C 5V	ax40	5190	Ant1	5189.96	-40000	-7.71	25	Pass
20C 4.5V	ax40	5230	Ant1	5229.96	-40000	-7.65	25	Pass


20C 5V	ax40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
20C 5.5V	ax40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
-10C 5V	ax40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
0C 5V	ax40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
10C 5V	ax40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
30C 5V	ax40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
40C 5V	ax40	5230	Ant1	5229.96	-40000	-7.65	25	Pass
20C 4.5V	ax40	5755	Ant1	5754.96	-40000	-6.95	25	Pass
20C 5V	ax40	5755	Ant1	5754.96	-40000	-6.95	25	Pass
20C 5.5V	ax40	5755	Ant1	5754.96	-40000	-6.95	25	Pass
-10C 5V	ax40	5755	Ant1	5754.96	-40000	-6.95	25	Pass
0C 5V	ax40	5755	Ant1	5754.96	-40000	-6.95	25	Pass
10C 5V	ax40	5755	Ant1	5754.96	-40000	-6.95	25	Pass
30C 5V	ax40	5755	Ant1	5754.96	-40000	-6.95	25	Pass
40C 5V	ax40	5755	Ant1	5754.96	-40000	-6.95	25	Pass
20C 4.5V	ax40	5795	Ant1	5794.96	-40000	-6.9	25	Pass
20C 5V	ax40	5795	Ant1	5794.96	-40000	-6.9	25	Pass
20C 5.5V	ax40	5795	Ant1	5794.96	-40000	-6.9	25	Pass
-10C 5V	ax40	5795	Ant1	5794.96	-40000	-6.9	25	Pass
0C 5V	ax40	5795	Ant1	5794.96	-40000	-6.9	25	Pass
10C 5V	ax40	5795	Ant1	5794.96	-40000	-6.9	25	Pass
30C 5V	ax40	5795	Ant1	5794.96	-40000	-6.9	25	Pass
40C 5V	ax40	5795	Ant1	5794.96	-40000	-6.9	25	Pass

-6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	Ant1	16.34	0.5	Pass
NVNT	a	5785	Ant1	15.75	0.5	Pass
NVNT	a	5825	Ant1	15.75	0.5	Pass
NVNT	n20	5745	Ant1	17.32	0.5	Pass
NVNT	n20	5785	Ant1	17.37	0.5	Pass
NVNT	n20	5825	Ant1	16.58	0.5	Pass
NVNT	n40	5755	Ant1	35.13	0.5	Pass
NVNT	n40	5795	Ant1	35.12	0.5	Pass
NVNT	ac20	5745	Ant1	17.31	0.5	Pass
NVNT	ac20	5785	Ant1	16.36	0.5	Pass
NVNT	ac20	5825	Ant1	16.38	0.5	Pass
NVNT	ac40	5755	Ant1	35.08	0.5	Pass
NVNT	ac40	5795	Ant1	35.11	0.5	Pass
NVNT	ax20	5745	Ant1	18.67	0.5	Pass
NVNT	ax20	5785	Ant1	18.81	0.5	Pass
NVNT	ax20	5825	Ant1	18.72	0.5	Pass
NVNT	ax40	5755	Ant1	35.25	0.5	Pass
NVNT	ax40	5795	Ant1	35.49	0.5	Pass

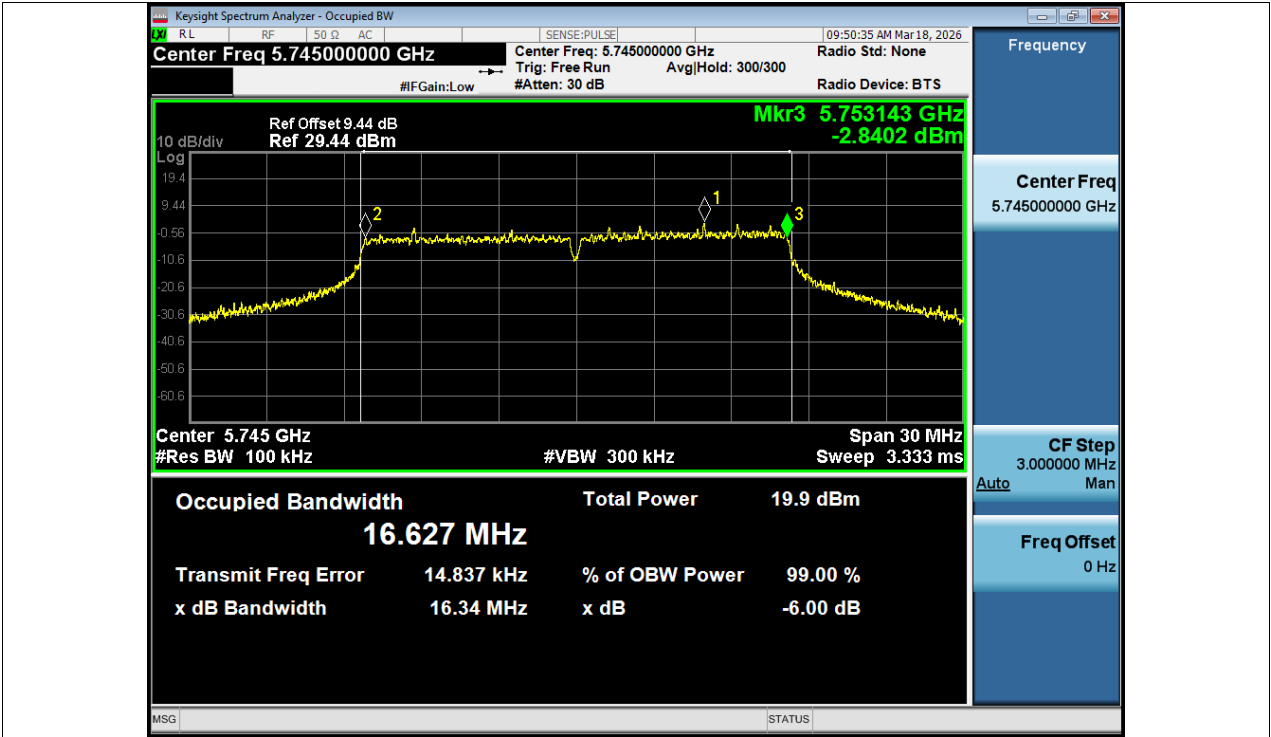


-6dB Bandwidth NVNT a 5745MHz Ant1

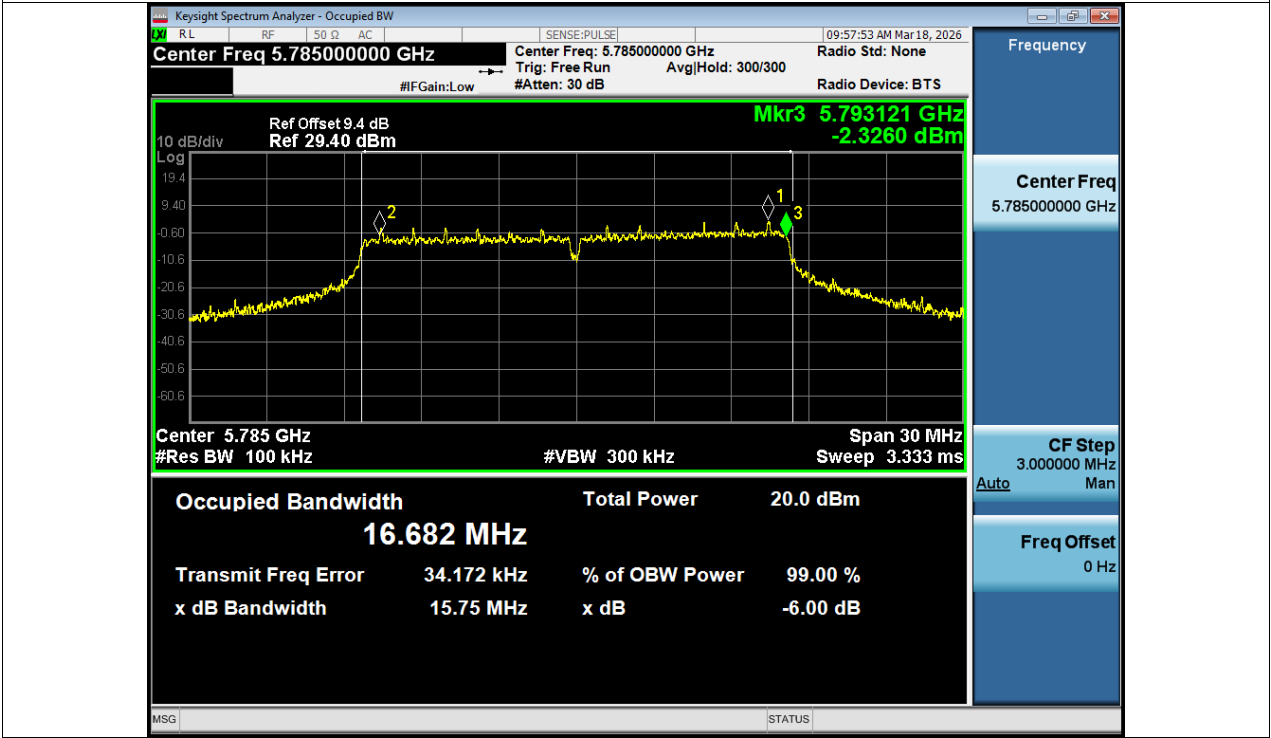


-6dB Bandwidth NVNT a 5785MHz Ant1

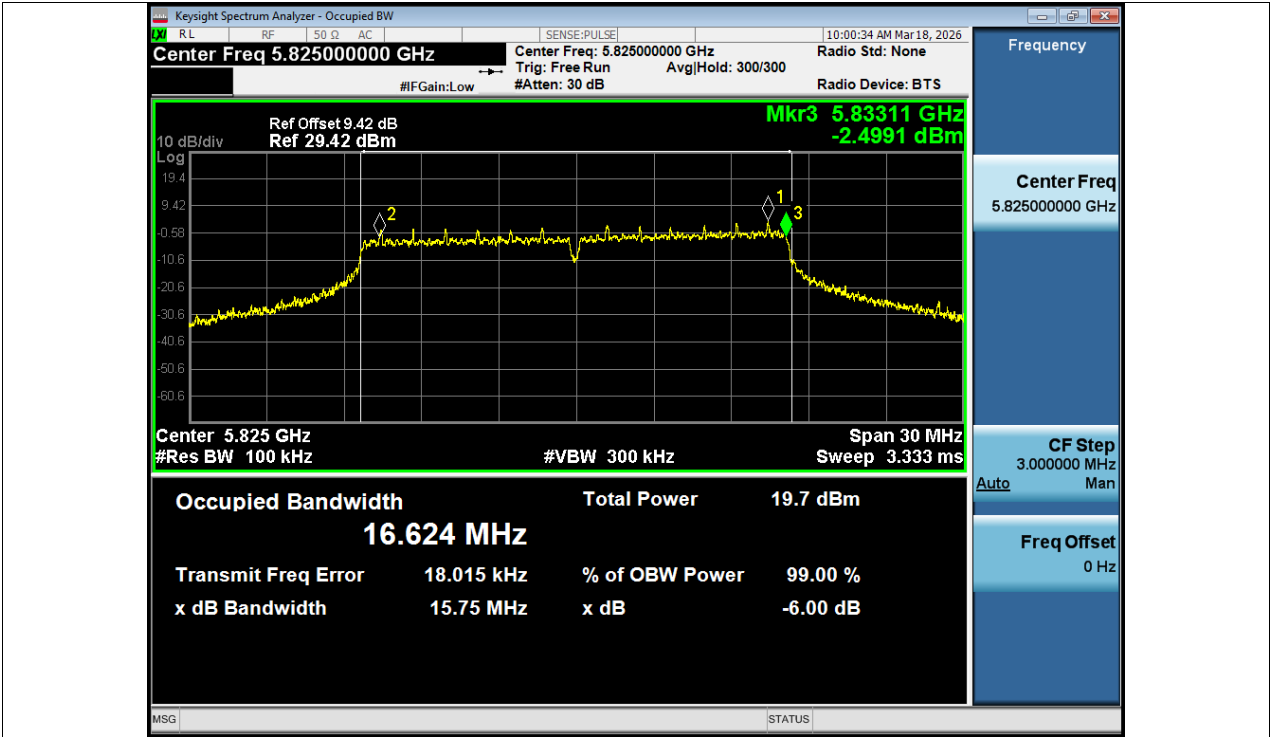


-6dB Bandwidth NVNT a 5825MHz Ant1

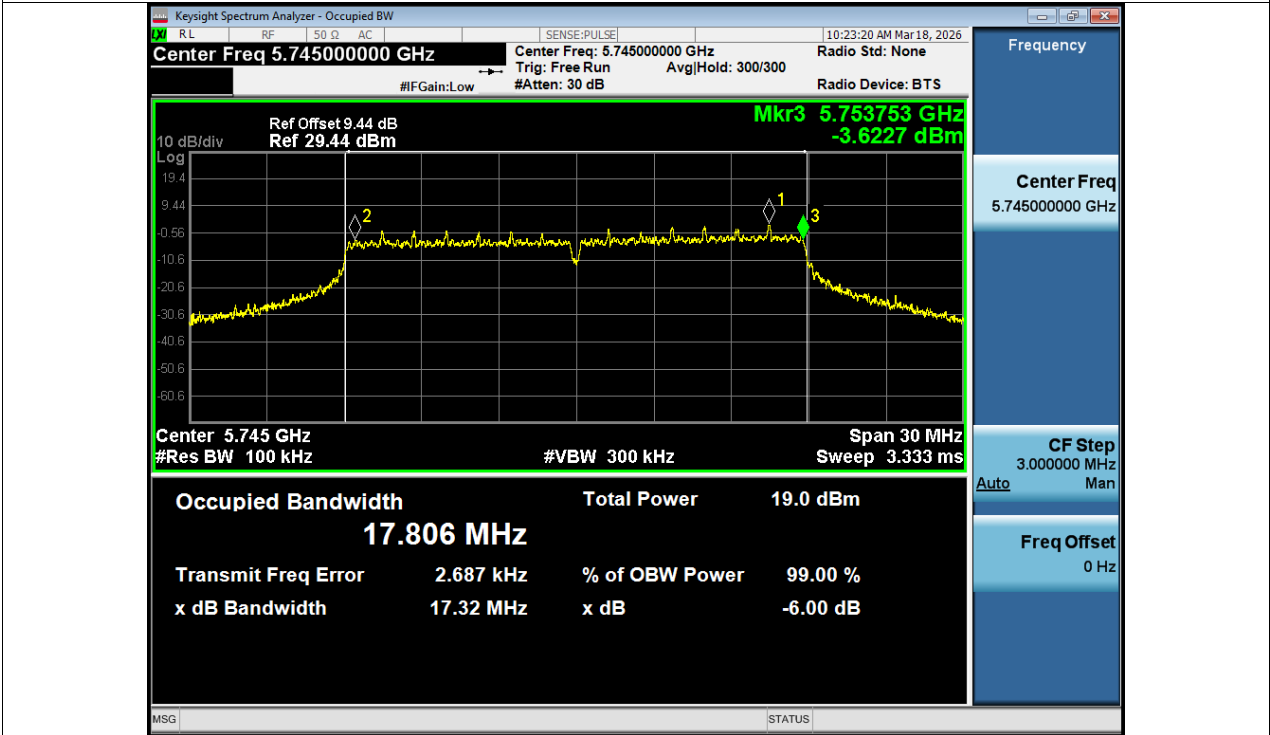


-6dB Bandwidth NVNT n20 5745MHz Ant1

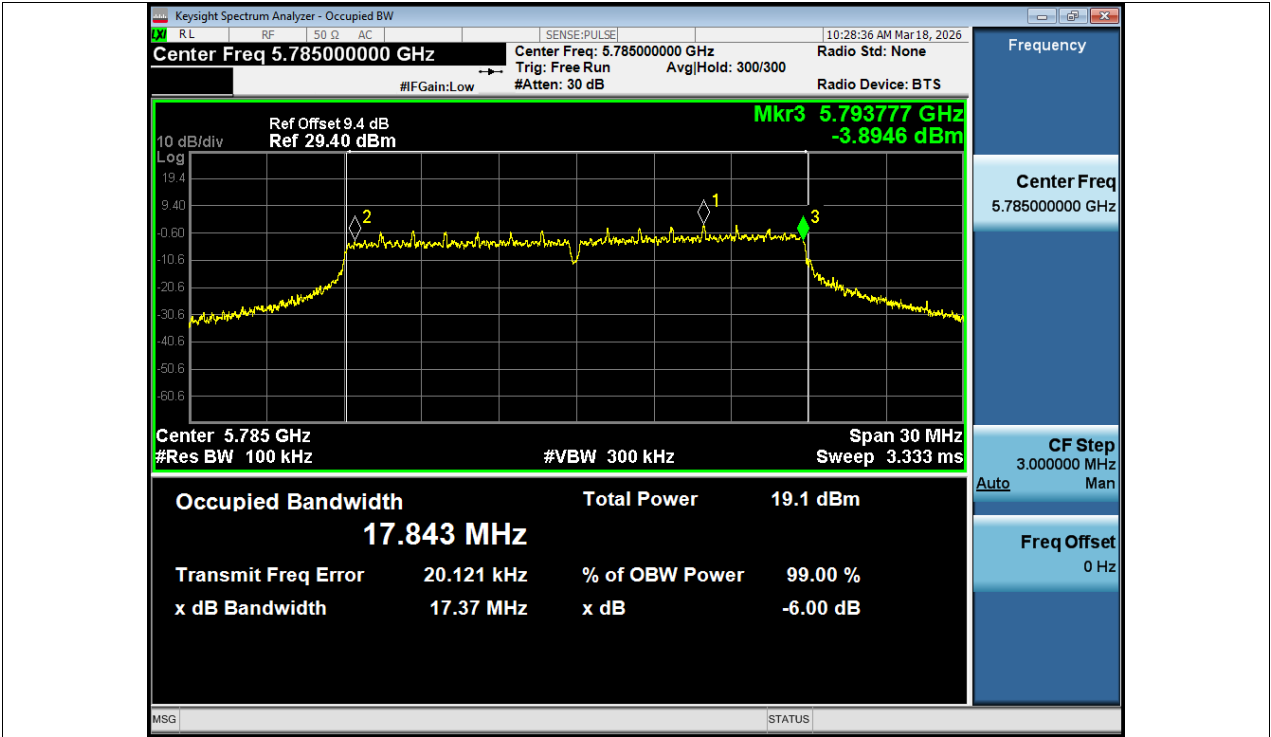


-6dB Bandwidth NVNT n20 5785MHz Ant1

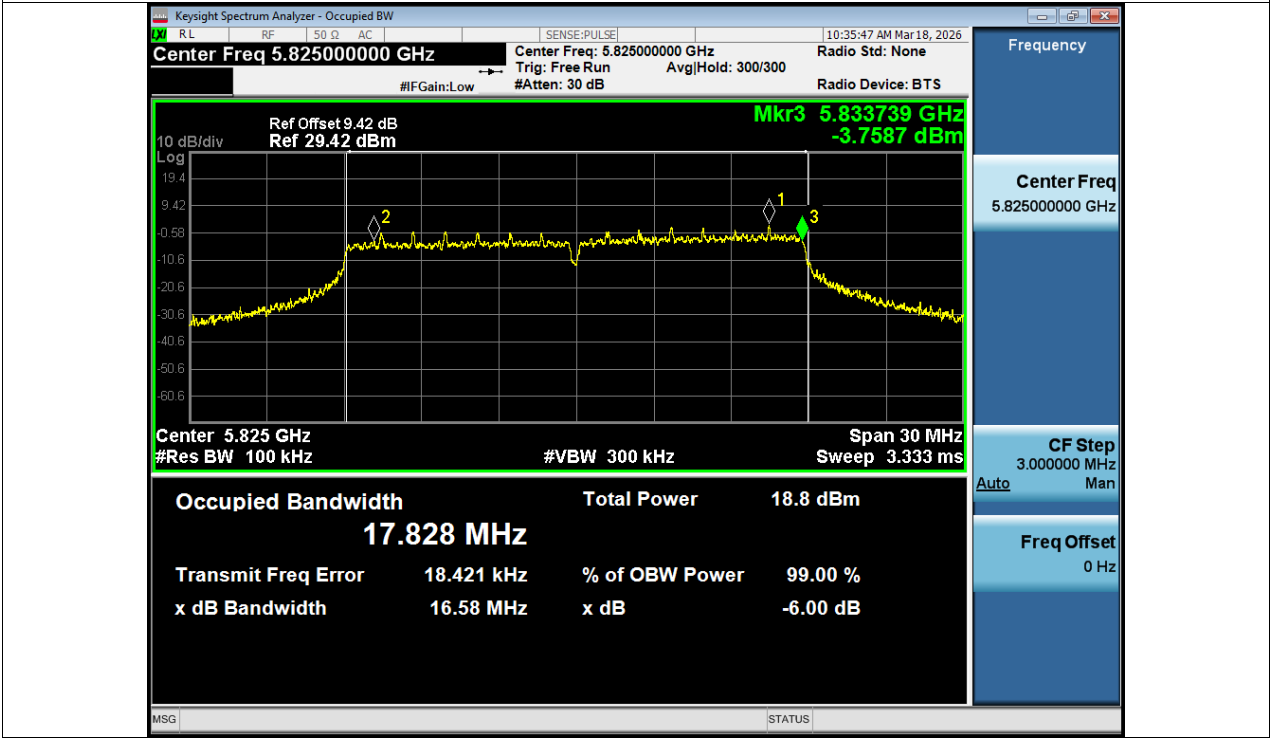


-6dB Bandwidth NVNT n20 5825MHz Ant1

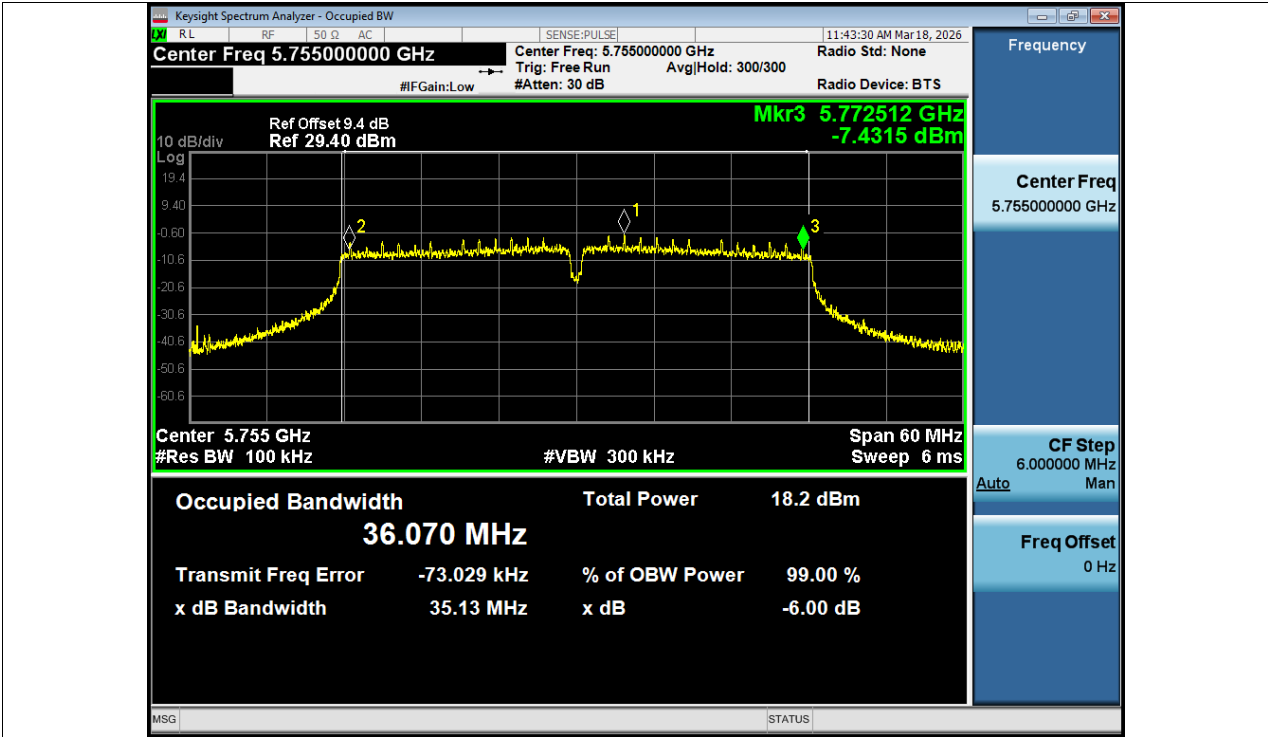


-6dB Bandwidth NVNT n40 5755MHz Ant1

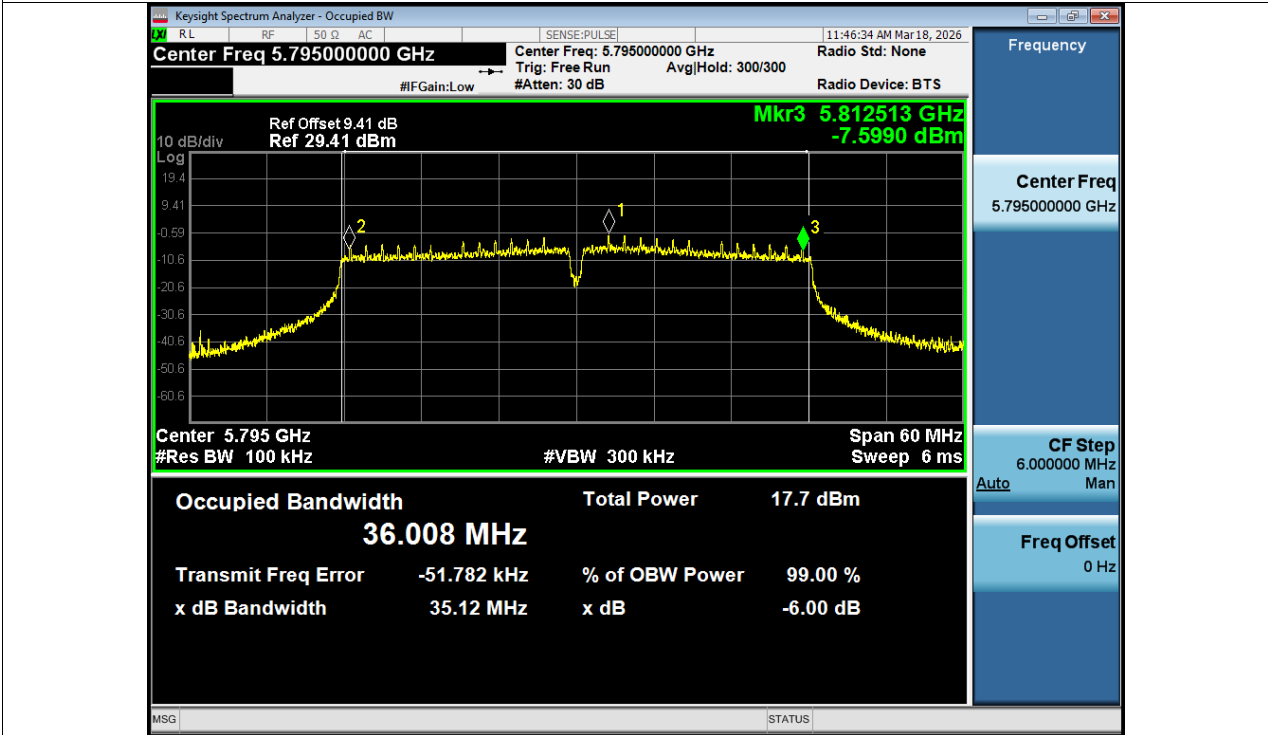


-6dB Bandwidth NVNT n40 5795MHz Ant1

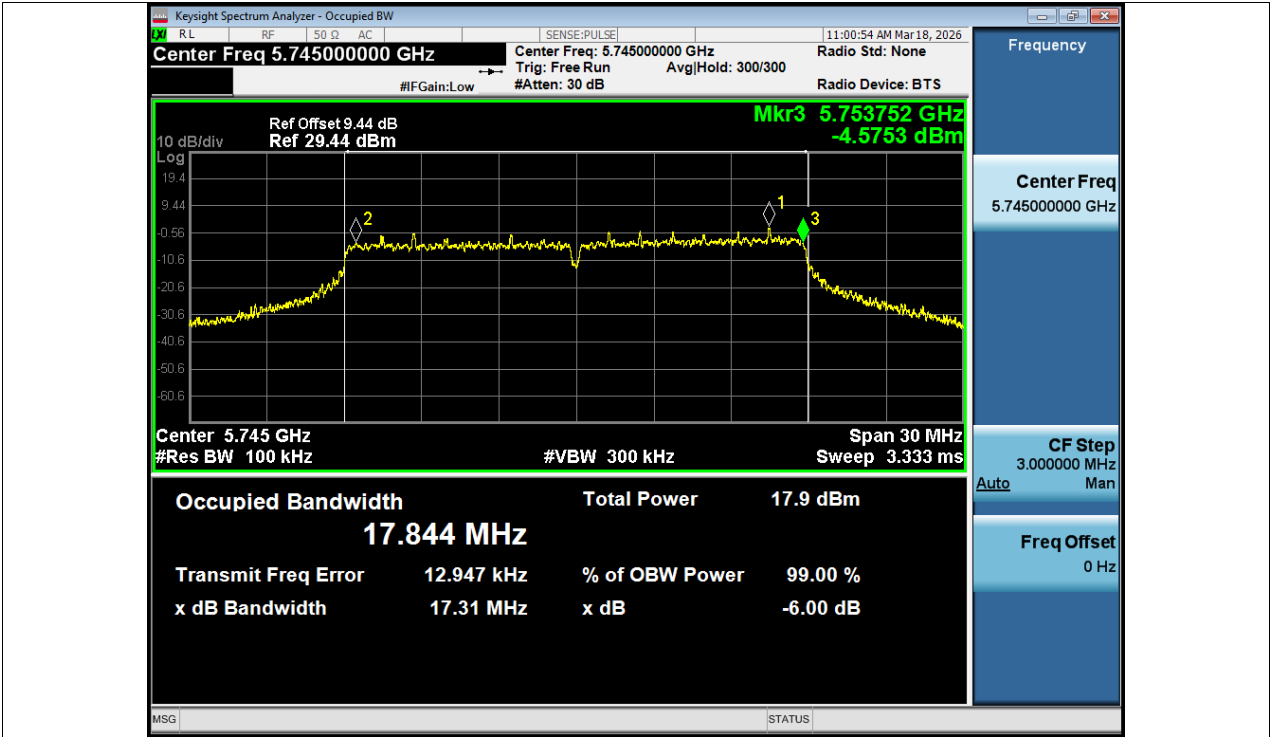


-6dB Bandwidth NVNT ac20 5745MHz Ant1

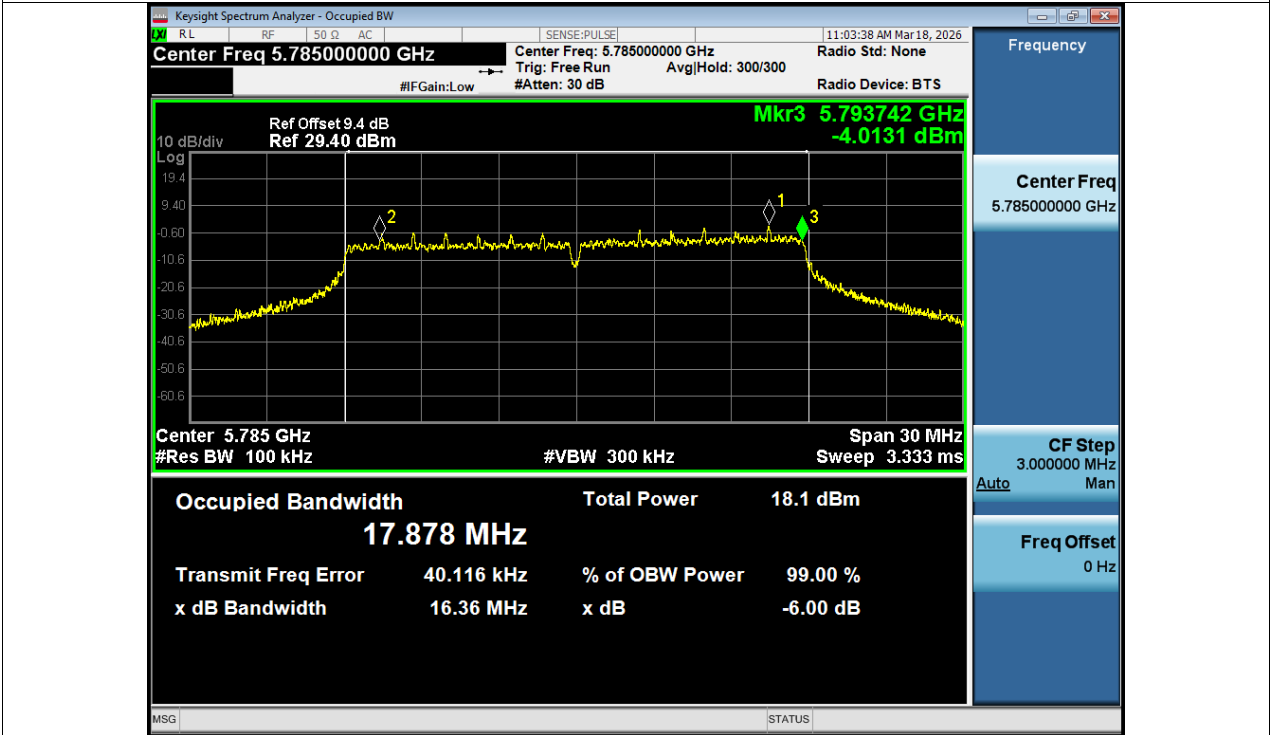


-6dB Bandwidth NVNT ac20 5785MHz Ant1

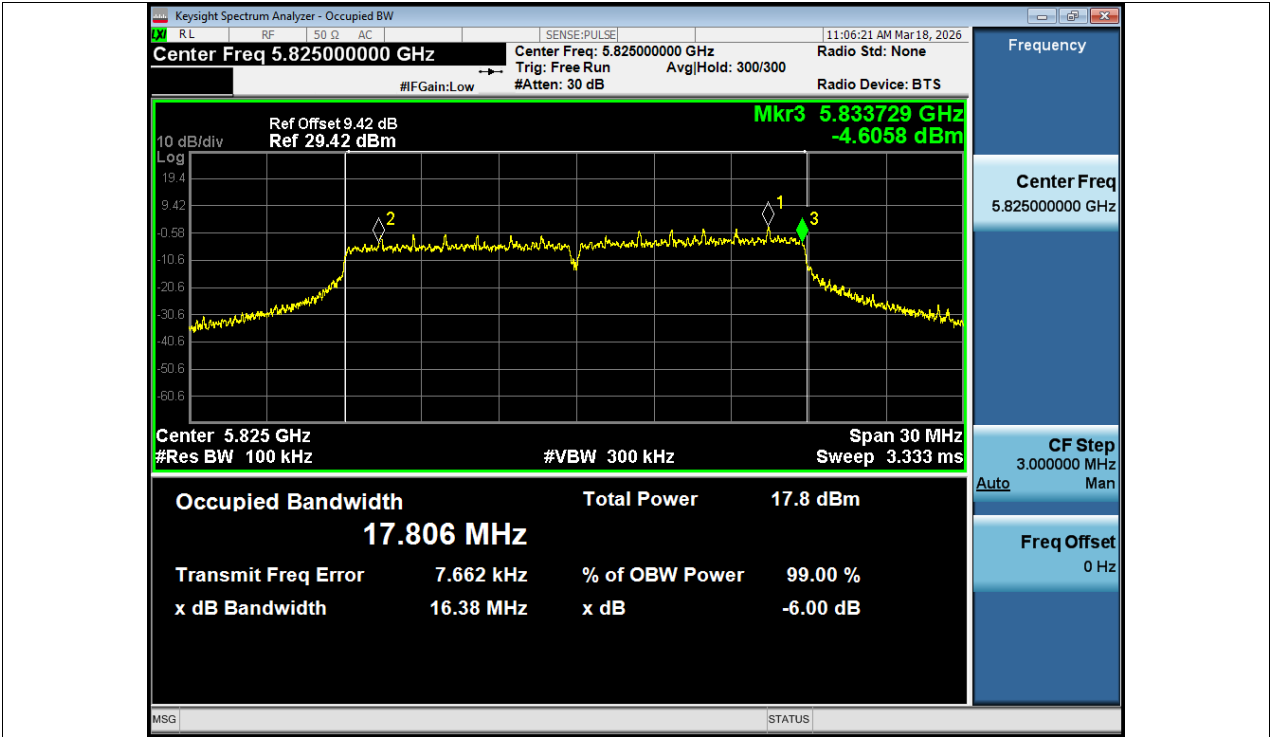


-6dB Bandwidth NVNT ac20 5825MHz Ant1

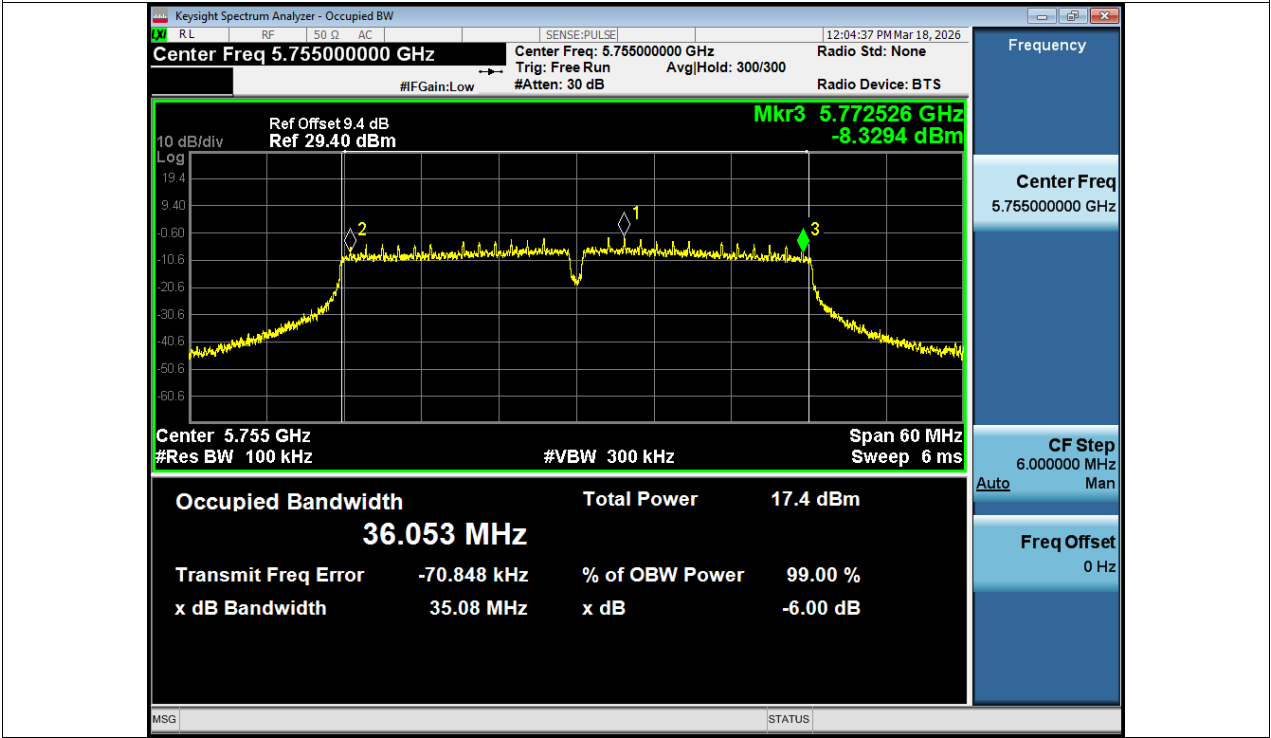


-6dB Bandwidth NVNT ac40 5755MHz Ant1

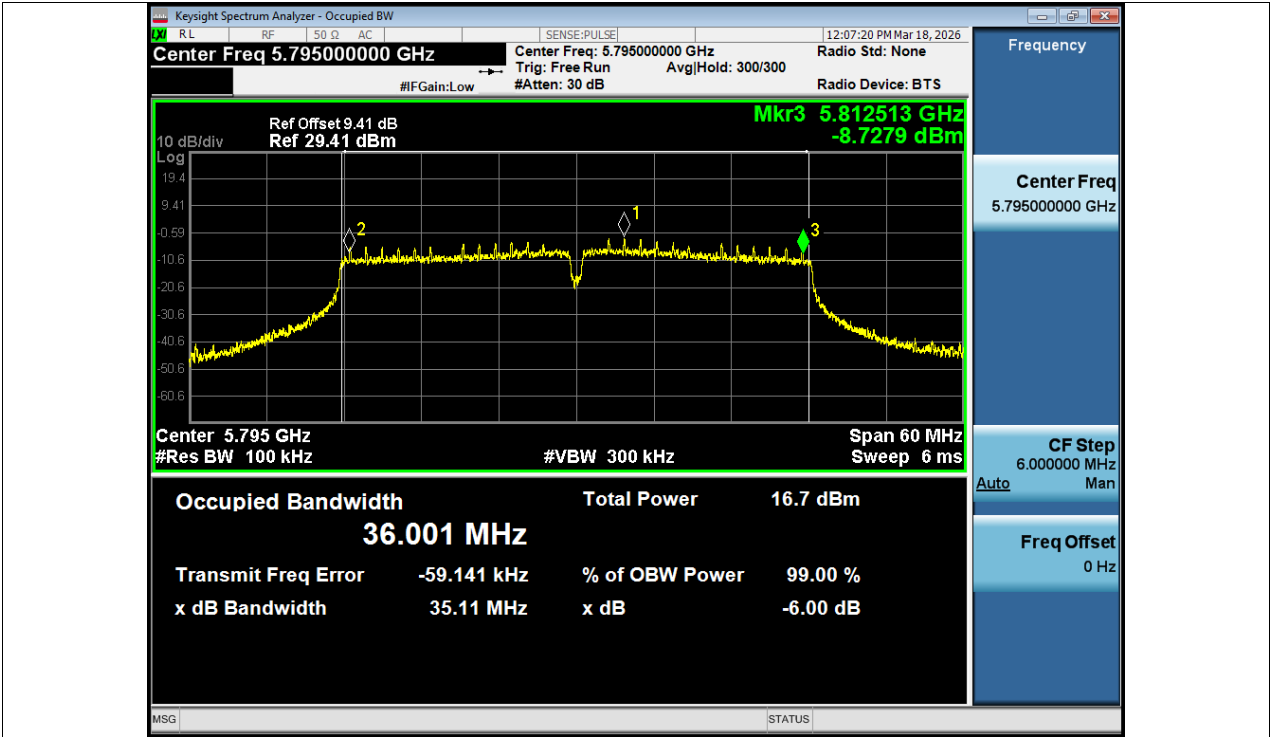


-6dB Bandwidth NVNT ac40 5795MHz Ant1

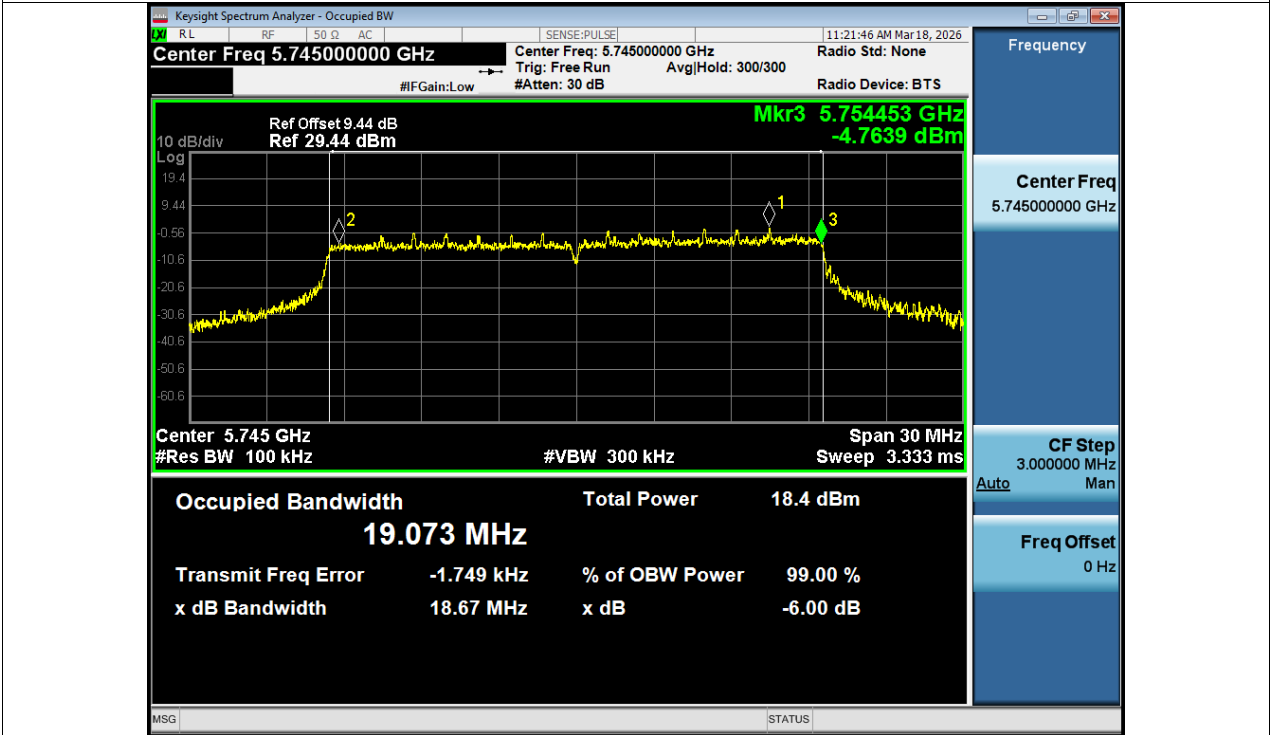


-6dB Bandwidth NVNT ax20 5745MHz Ant1

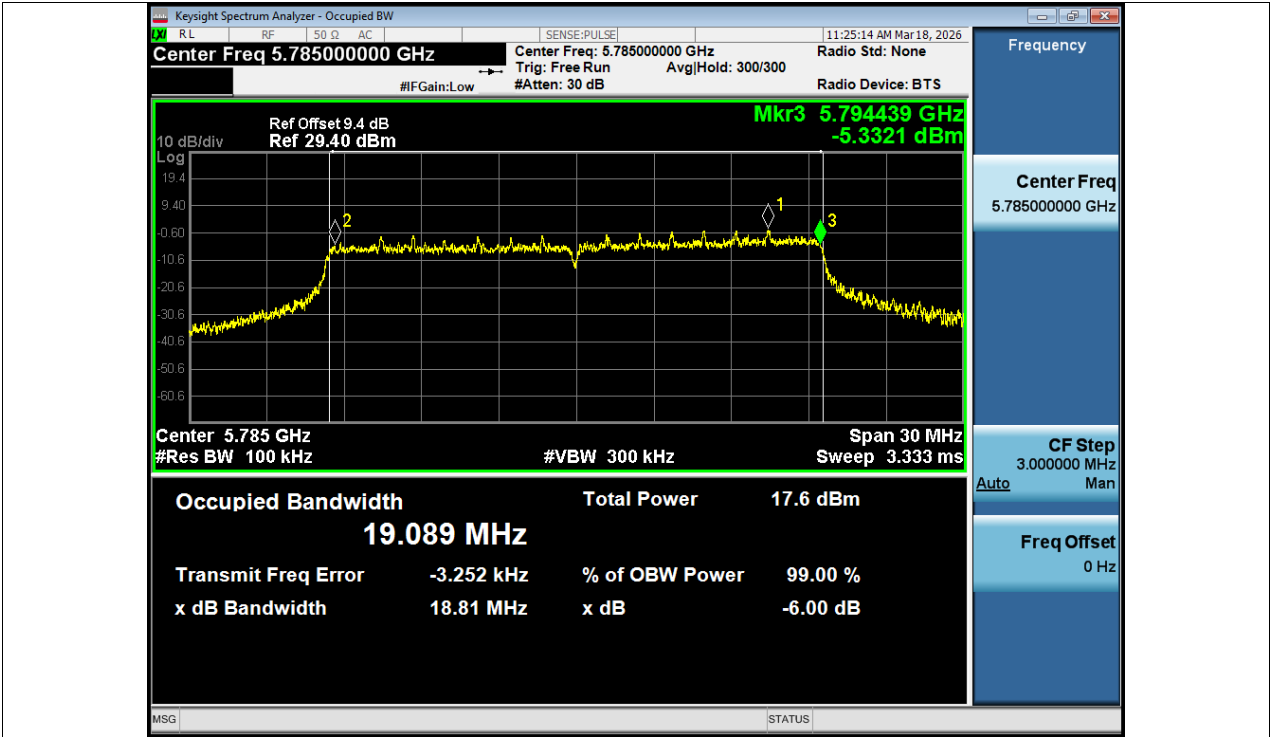


-6dB Bandwidth NVNT ax20 5785MHz Ant1

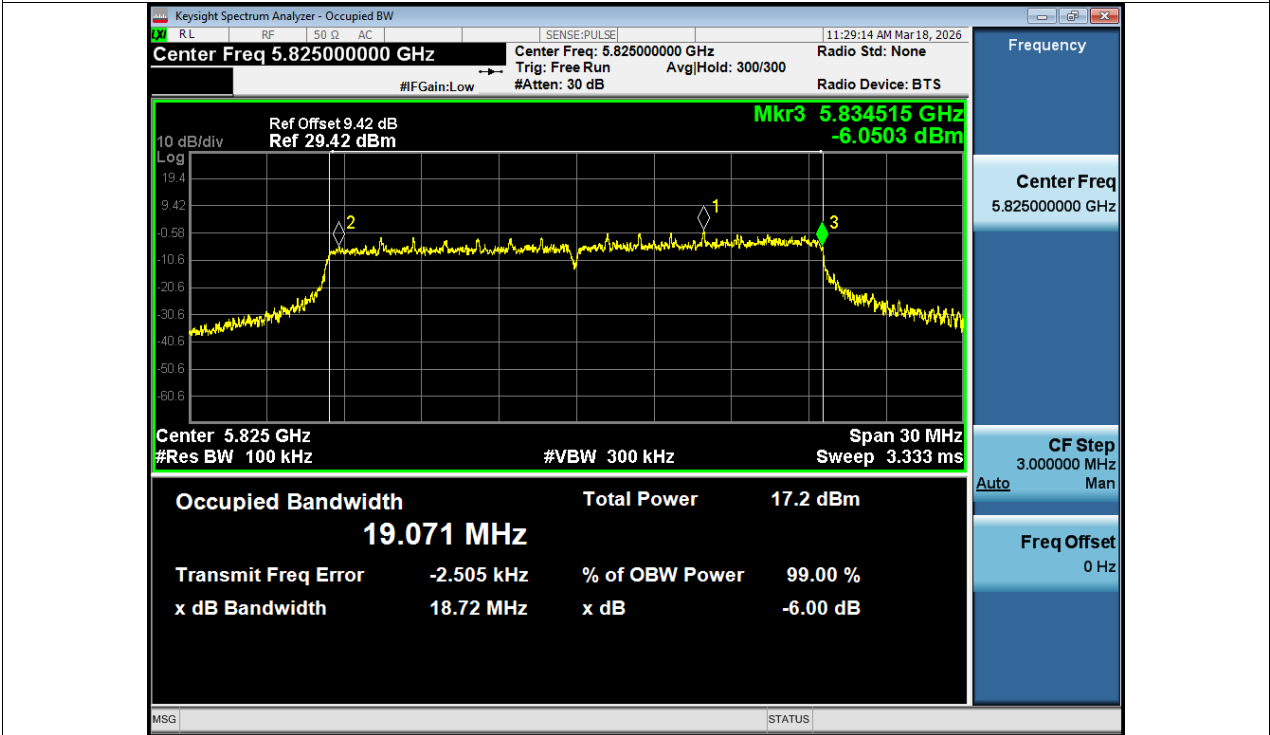

-6dB Bandwidth NVNT ax20 5825MHz Ant1

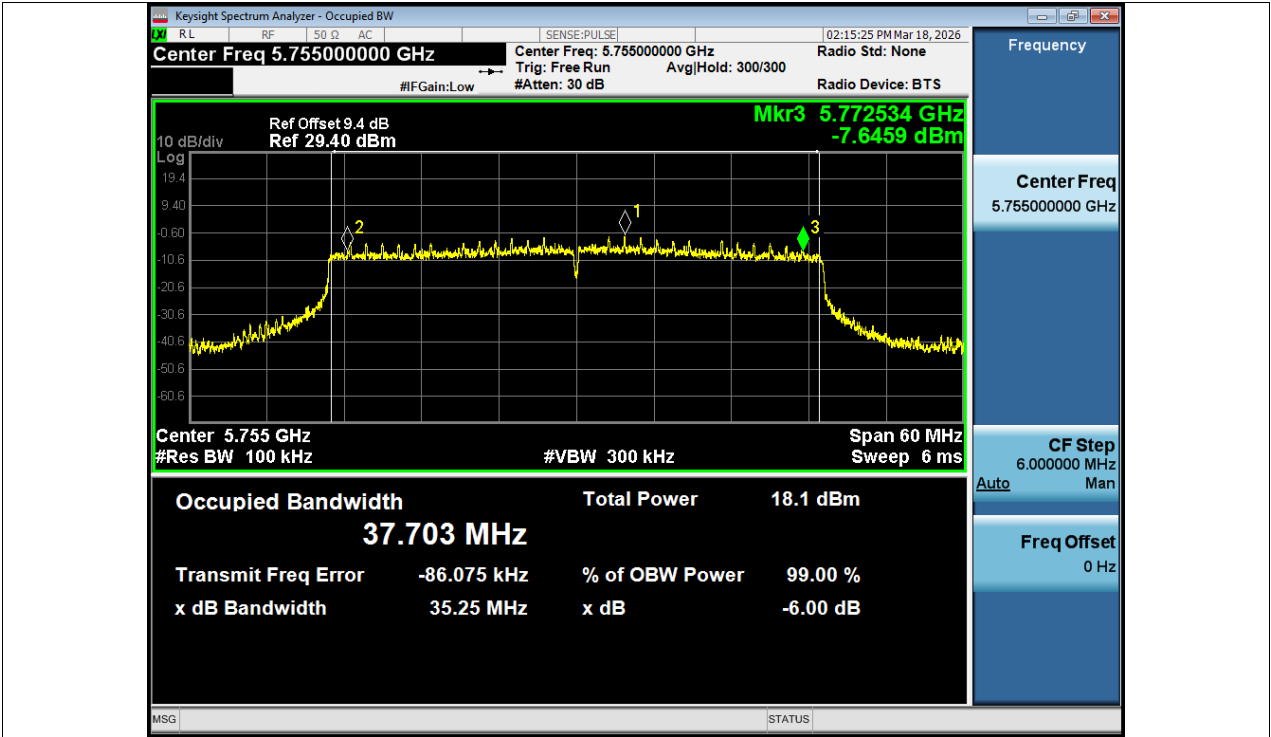

-6dB Bandwidth NVNT ax40 5755MHz Ant1

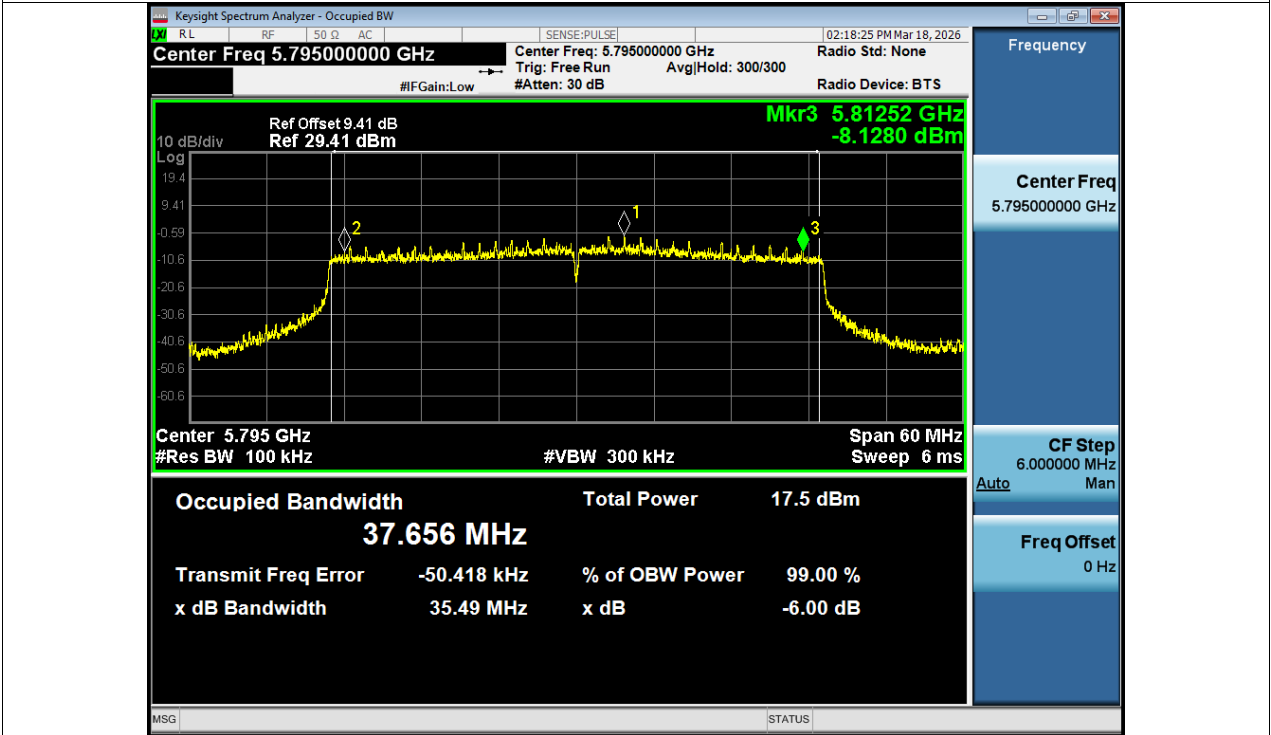

-6dB Bandwidth NVNT ax40 5795MHz Ant1

END OF REPORT