

KC.WA.00054

Antenna Specification

1. Application:

This application shall apply for antenna unit which shall be used such as automotive, conventional communications, smart home, etc..

2. Electrical Specification:

Those specifications were specially defined for customer's model, and all characteristics were measured under the model's handset testing jig .

2-1. Frequency Band:

Frequency Band	MHz
BT /WiFi	2400-2500/5150-5850MHz

2-2. Impedance

50 ohm nominal

2-3. VSWR

2-3-1. Measurement frequency points and VSWR value


Frequency Band(MHz)	2400	2500	5150	5850
Typical Value: (VSWR)	2.4	2.8	3.9	2.2

UNLESS OTHER SPECIFIED TOLERANCES ON : X=± X.X=± X.XX=± ANGLES=± HOLEDIA=±		 TOXU TECHNOLOGY CO., LTD.
SCALE :	UNIT : mm	
DRAWN BY: LI	CHECKED BY: YS	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DESIGNED BY: De wen	APPROVED BY: YS	
TITLE : KC.WA.00054 Antenna Specification		SPEC REV.
		P0

2-3-4 Measuring Method

1. A 50 Ω coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the VSWR.
2. Keeping this jig away from metal at least 20 cm

2-3-5 Picture

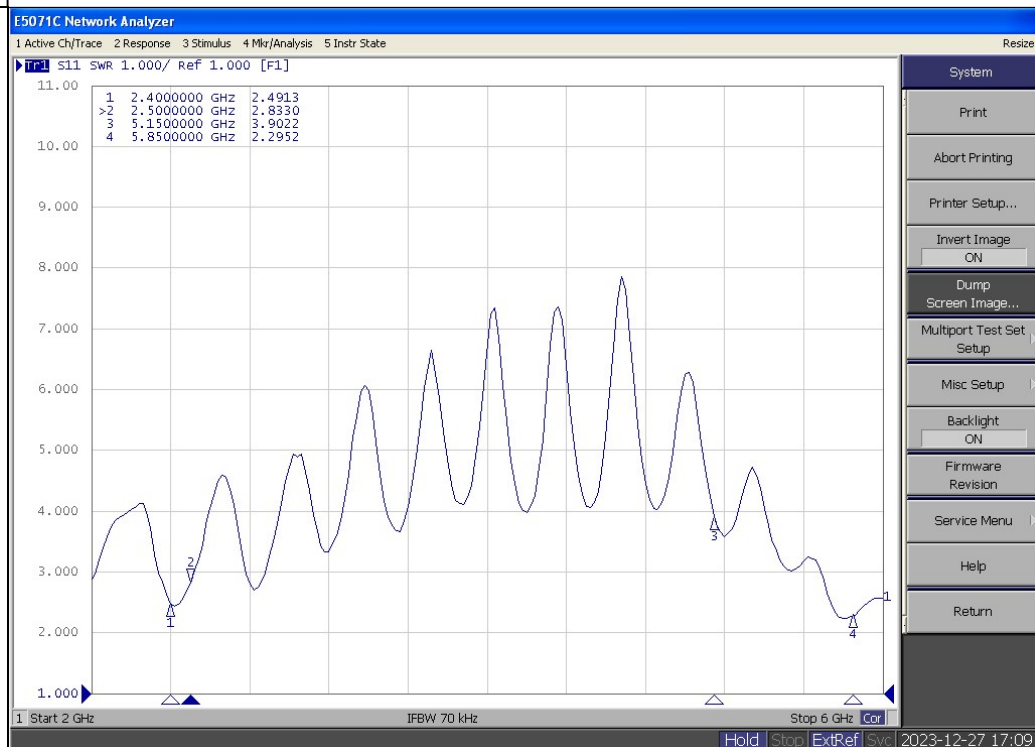


UNLESS OTHER SPECIFIED TOLERANCES ON :			TOXU TECHNOLOGY CO., LTD.
X=±	X.X=±		
ANGLES=±	HOLEDIA=±		
SCALE :		UNIT : mm	
DRAWN BY: LI		CHECKED BY: YS	
DESIGNED BY: De wen		APPROVED BY: YS	
THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION			
TITLE : KC.WA.00054 Antenna Specification			SPEC REV.
			P0

2-4. Efficiency and Gain

4-5.1 Measure method

1. Using a low loss coaxial cable to link a standard handset jig
2. Fixed this handset jig on chamber's rotator plane
3. Linking jig into network analyzer port and using a probing horn antenna to collect data.
4. Using another standard gain horn antenna to calibrated those data

4-5.2 Chamber definition








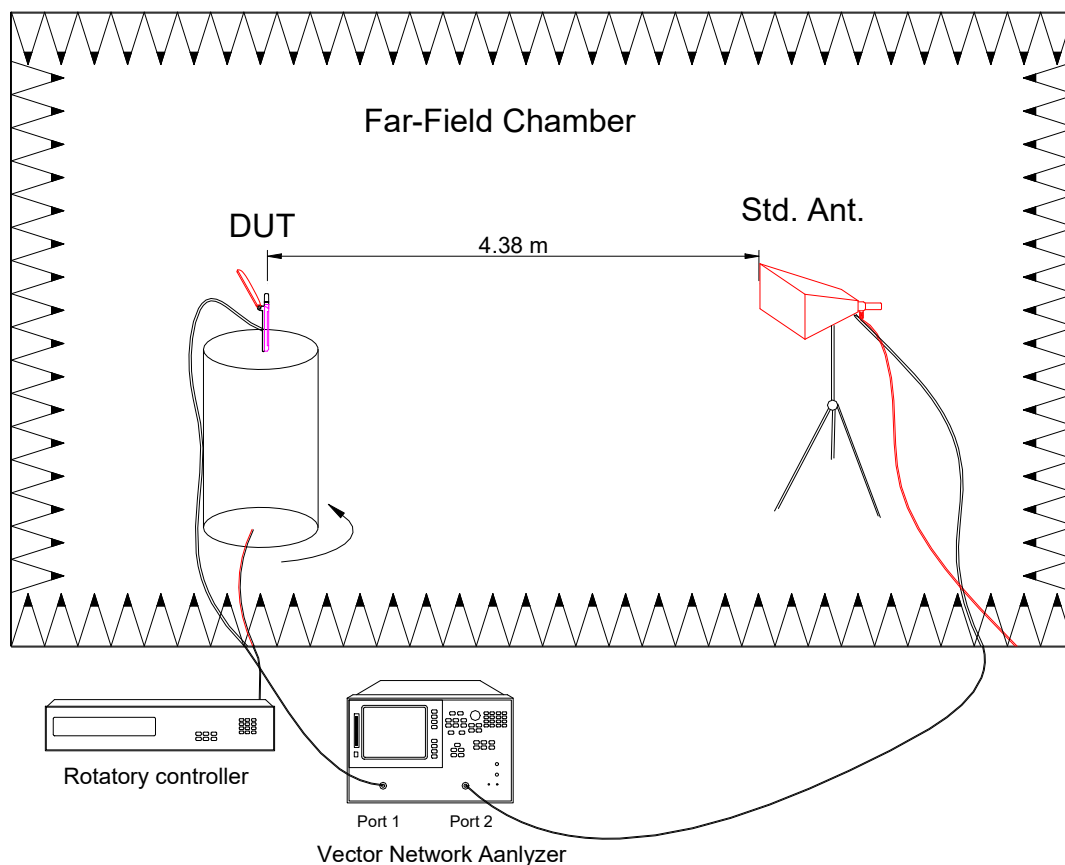


1. An anechoic chamber (7mx4mx3m) which satisfied far-field condition was applied to avoid multi-path effect
2. The quite room region is 40cmx40cmx40cm at the center of rotator
3. The distance between DUT and standard antenna is 4.38 m
4. Probing antenna (9120D horn antenna) and standard gain horn antenna (BBHA9120 LPF 700MHz ~6GHz)

UNLESS OTHER SPECIFIED TOLERANCES ON :			TOXU TECHNOLOGY CO., LTD.
X=±	X.X=±		
ANGLES=±	HOLEDIA=±		
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY: LI	CHECKED BY: YS		
DESIGNED BY: De wen	APPROVED BY: YS		
TITLE : KC.WA.00054 Antenna Specification			SPEC REV.
			P0

2-4-1 Efficiency and Gain and 3D Date

Frequency/Mhz	MaxGain/dBi	Efficiency / %
2400	0.26	34.12
2405	0.44	37.07
2410	0.09	34.59
2415	0.06	35.73
2420	0.03	37.33
2425	-0.31	36.73
2430	-0.47	37.5
2435	-0.41	38.73
2440	-0.38	38.73
2445	-0.75	35.48
2450	-0.45	37.84
2455	-0.31	39.26
2460	-0.4	39.08
2465	-0.16	42.85
2470	-0.24	40.83
2475	-0.42	40.36
2480	-0.27	41.5
2485	-0.59	38.11
2490	-0.32	40.74
2495	-0.23	41.5
2500	-0.5	39.08

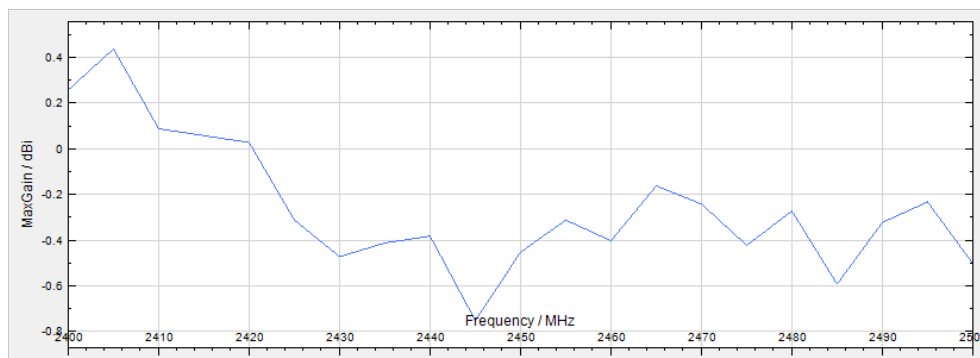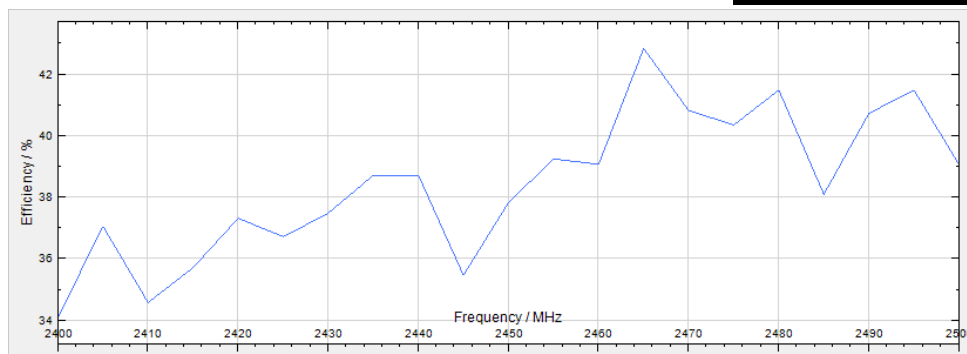

UNLESS OTHER SPECIFIED TOLERANCES ON :

$X = \pm$ $X.X = \pm$ $X.XX = \pm$

ANGLES = $\pm$ HOLEDIA = $\pm$

SCALE :

UNIT : mm

DRAWN BY: LI

CHECKED BY: YS

DESIGNED BY: De wen

APPROVED BY: YS

TOXU
同讯技术

TOXU TECHNOLOGY CO., LTD.





THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : KC.WA.00054 Antenna Specification

SPEC REV.

P0

Frequency/Mhz	MaxGain/dBi	Efficiency / %
5150	-3.92	13.58
5180	-3.13	16.11
5210	-2.24	18.62
5240	-1.89	19.54
5270	-1.57	20.46
5300	-1.45	20.8
5330	-1.16	22.13
5360	-0.45	25.06
5390	-0.2	25.7
5420	0.04	26.98
5450	-0.22	28.25
5480	-0.54	26.24
5510	-0.46	28.44
5540	-0.14	30.76
5570	-0.14	29.85
5600	0.08	30.62
5630	0.83	33.5
5660	0.69	30.76
5690	0.77	29.79
5720	0.98	30.13
5750	1.19	29.38
5780	1.59	31.99
5810	2.09	33.57
5840	2.35	36.31

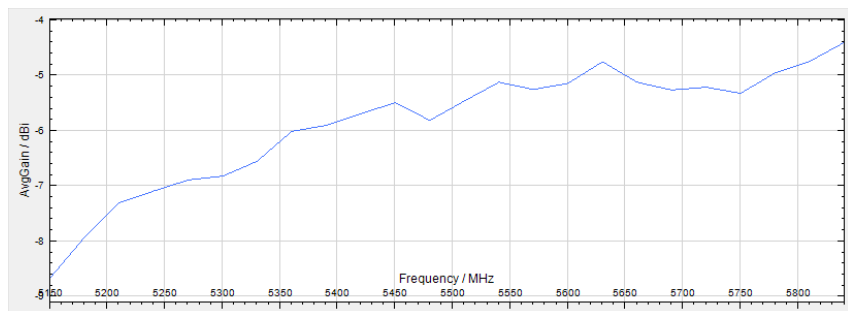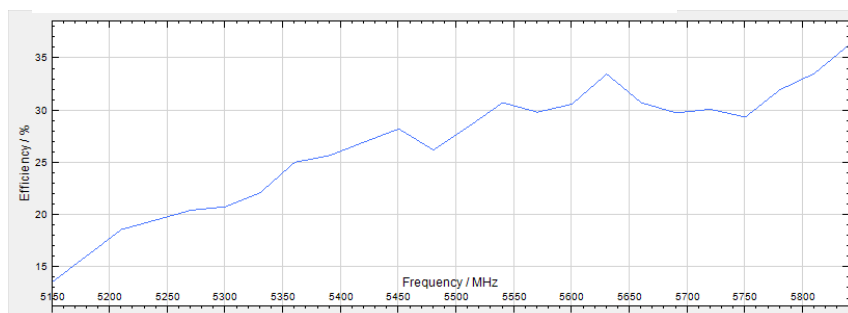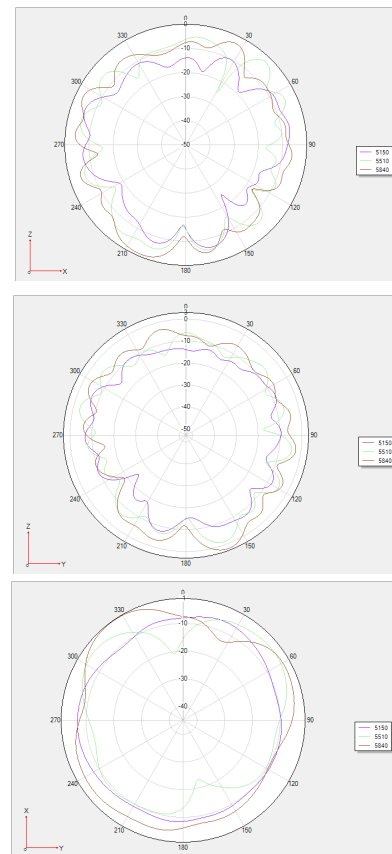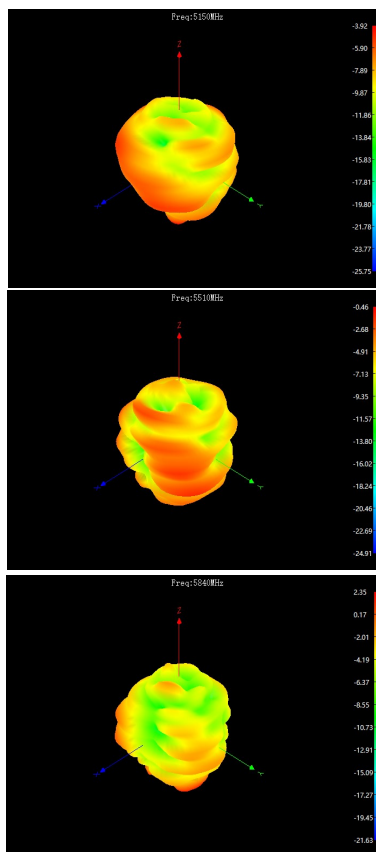


UNLESS OTHER SPECIFIED TOLERANCES ON :		TOXU 同讯技术 TOXU TECHNOLOGY CO., LTD.
$X = \pm$	$X.X = \pm$	
$ANGLES = \pm$	$HOLEDIA = \pm$	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DRAWN BY: LI	CHECKED BY: YS	
DESIGNED BY: De wen	APPROVED BY: YS	
TITLE : KC.WA.00054 Antenna Specification		SPEC REV.
		P0

3. Mechanical Specification:

3-1. Mechanical Configuration (Unit: mm)

The appearance of the antenna is according to drawing

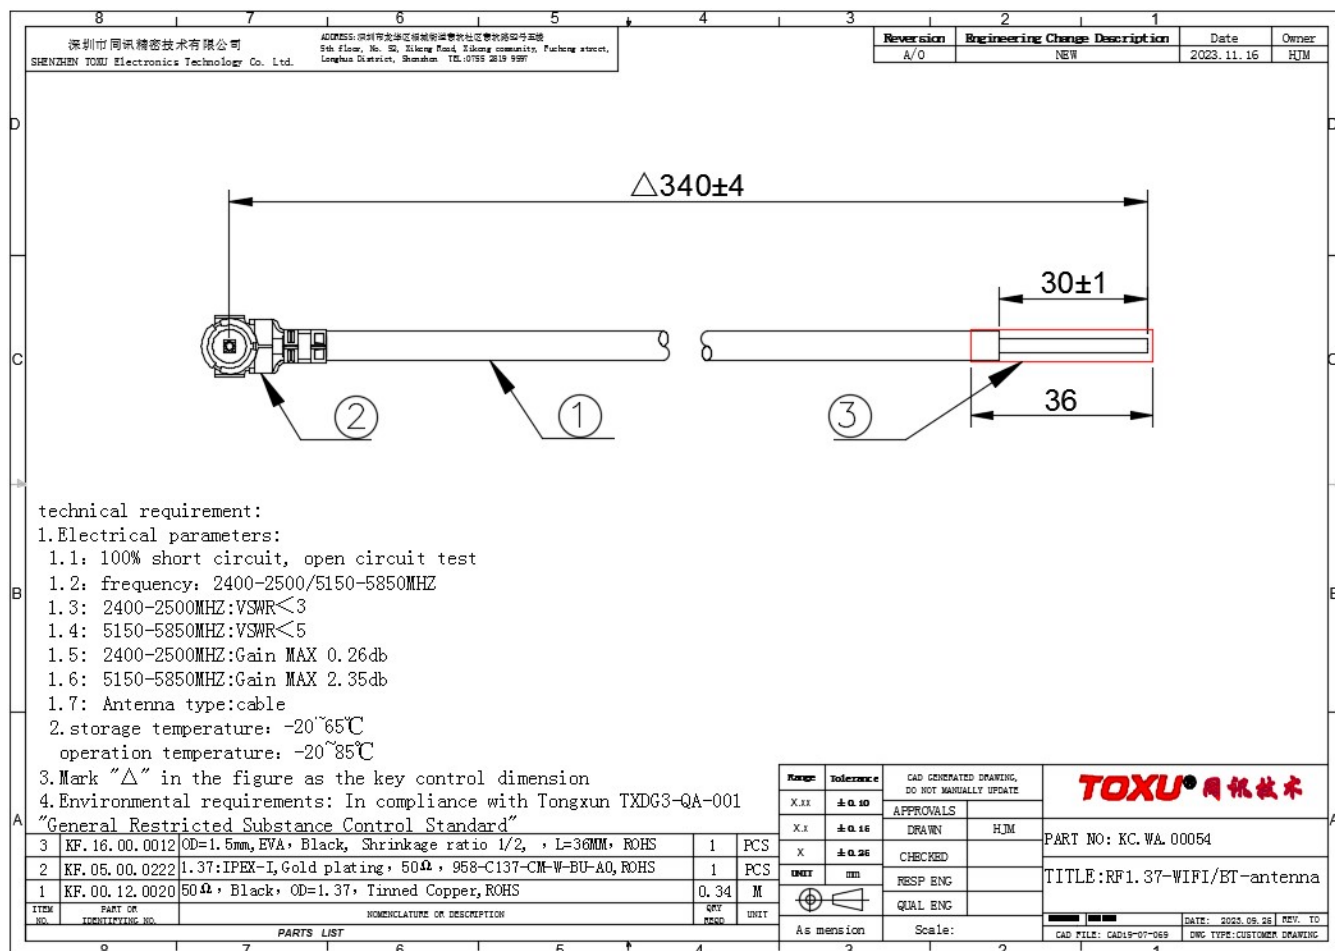

UNLESS OTHER SPECIFIED TOLERANCES ON :		TOXU 同讯技术 TOXU TECHNOLOGY CO., LTD.
$X = \pm$	$X.X = \pm$	
$ANGLES = \pm$	$HOLEDIA = \pm$	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION
DRAWN BY: LI	CHECKED BY: YS	
DESIGNED BY: De wen	APPROVED BY: YS	
TITLE : KC.WA.00054 Antenna Specification		SPEC REV.
		P0

4.Packaging specification:

深圳市同讯精密技术有限公司 SHENZHEN TOXU Electronics Technology Co., Ltd.		ADDRESS: 深圳市宝安区福海街道福海社区福海路40号五楼 5th Floor, No. 50, Fuhai Road, Fuhai Community, Fuhai Street, Longhua District, Shenzhen TEL: 0755 2819 9597		Revision A/0	Engineering Change Description NEW	Date 2023.11.16	Owner HJM
---	--	--	--	------------------------	--	---------------------------	---------------------




1. product: 1PCS




2. Divide 100PCS products into 1 group




3. Wrap the connectors of 100PCS products with pearl cotton



4. Two sets of products packed in PE bags
A total of 200PCS



6. Attach labels, 1 box of product (quantity of full box to be determined)



5. Put each bag of products into a cardboard box in sequence, (The quantity of the entire box is to be determined), and the box should be sealed

Note: The weight of a single box shall not exceed 12KG

ITEM NO.	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	QTY PER BOX	UNIT
4	KF.22.00.0003	LxWxH=480x300x185mm, K3-K3, K12KG, khaki, ROHS	1	PCS
3	KF.20.00.0001	PE bag-L*W*H=320*240*0.05mm, PE, transparent, Opening at one end, ROHS	0.005	PCS
2	KF.22.07.0001	Pearl cotton-L*W*H100mm*1m/*3mm, ROHS	0.1	PCS
1	KC.WA.00054	RF1.37 cable, 50Ω, Connect to IPEN-I, L=340MM, ROHS	1	PCS

Range	Tolerance	CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE	
X.XX	±0.10	APPROVALS	
X.x	±0.15	DRAWN	HJM
X	±0.25	CHECKED	
UNIT	mm	RESP	ENG
		QUAL	ENG
AS dimension		Scale:	

TOXU 同讯技术

PART NO: KC.WA.00054

TITLE: Packaging specifications

CAD FILE: CAD19-07-069

DATE: 2023.02.27

REV: TO

DWG TYPE: CUSTOMER DRAWING

UNLESS OTHER SPECIFIED TOLERANCES ON : X=± X.X=± X.XX=± ANGLES=± HOLEDIA=±		TOXU 同讯技术	TOXU TECHNOLOGY CO., LTD.
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF TOXU TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY: LI	CHECKED BY: YS		
DESIGNED BY: De wen	APPROVED BY: YS		
TITLE : KC.WA.00054 Antenna Specification			SPEC REV. P0