





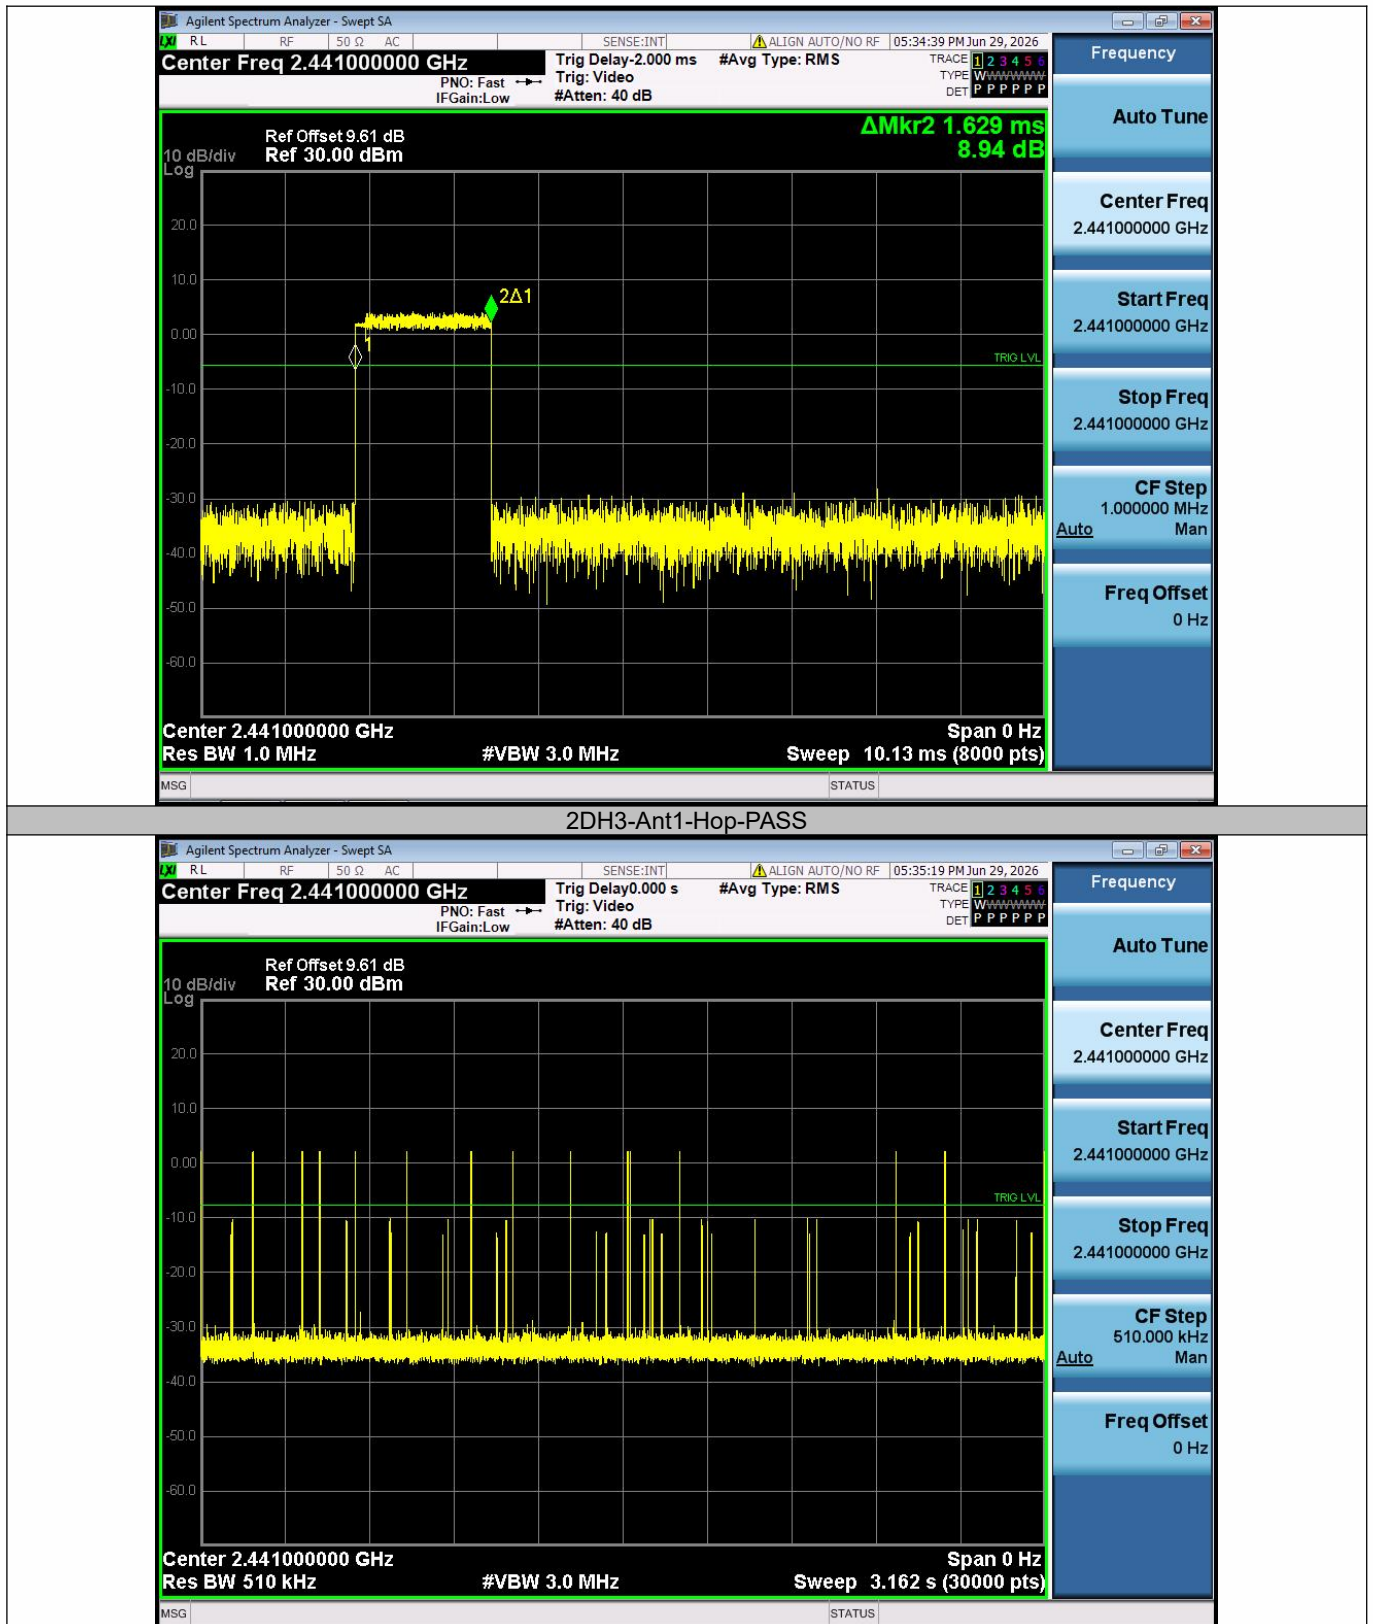

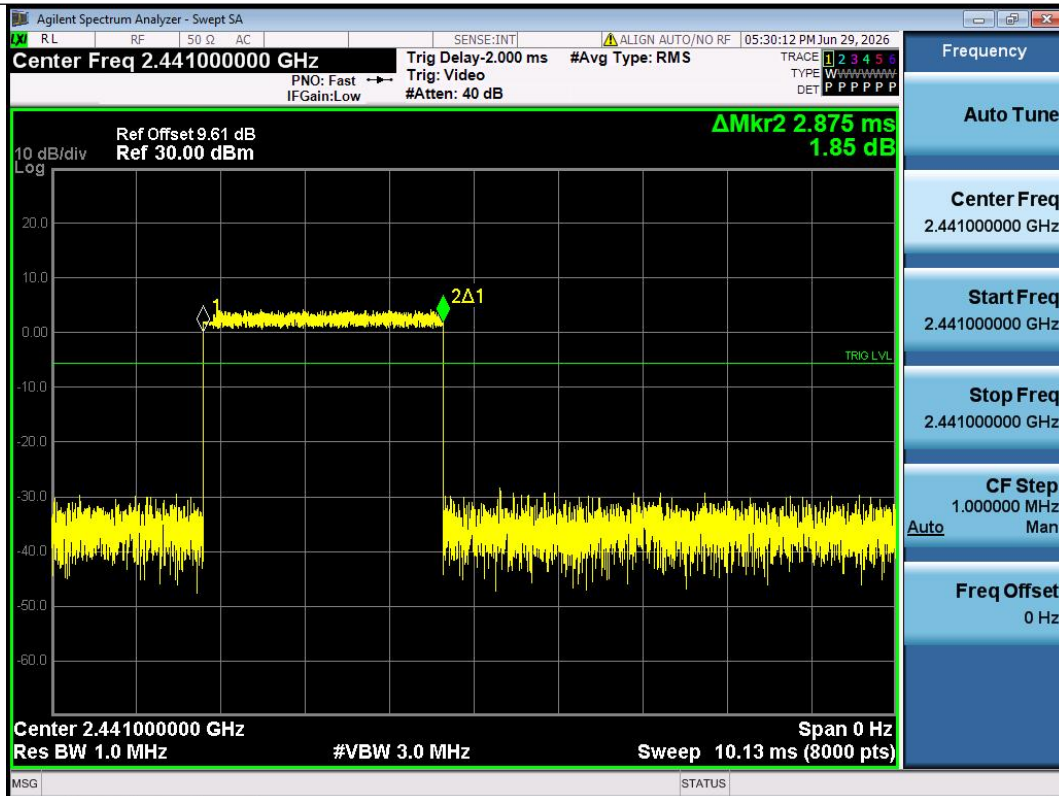



2DH5-Ant1-Hop-PASS

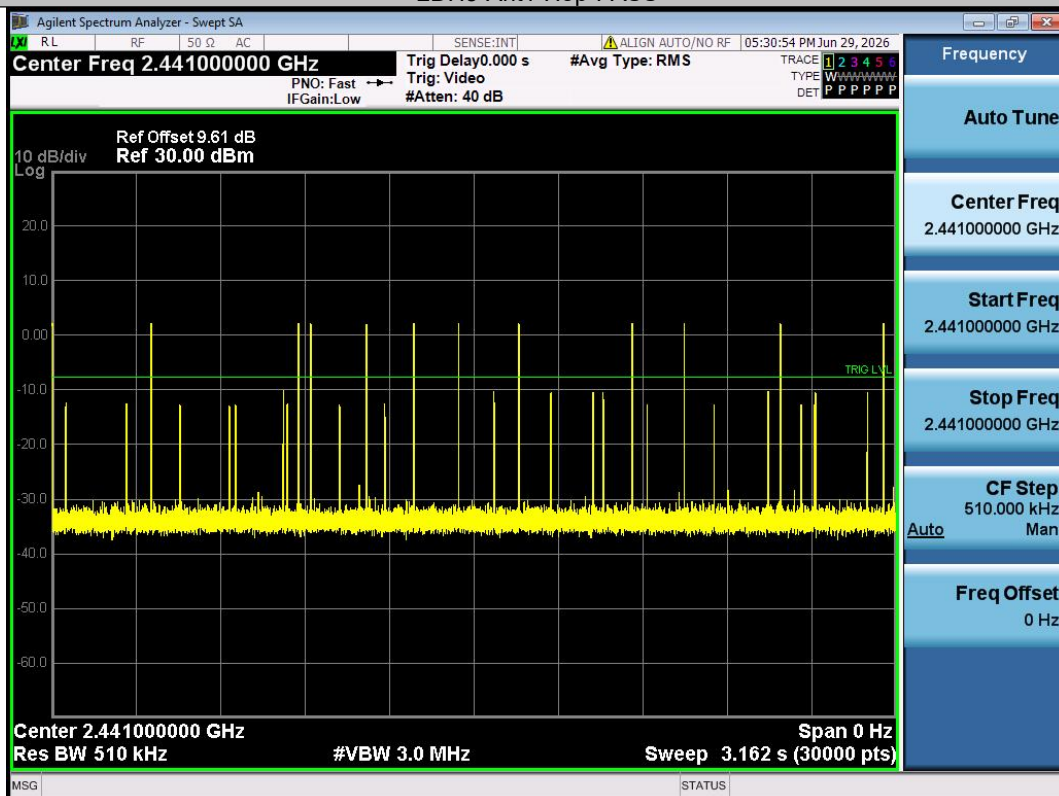


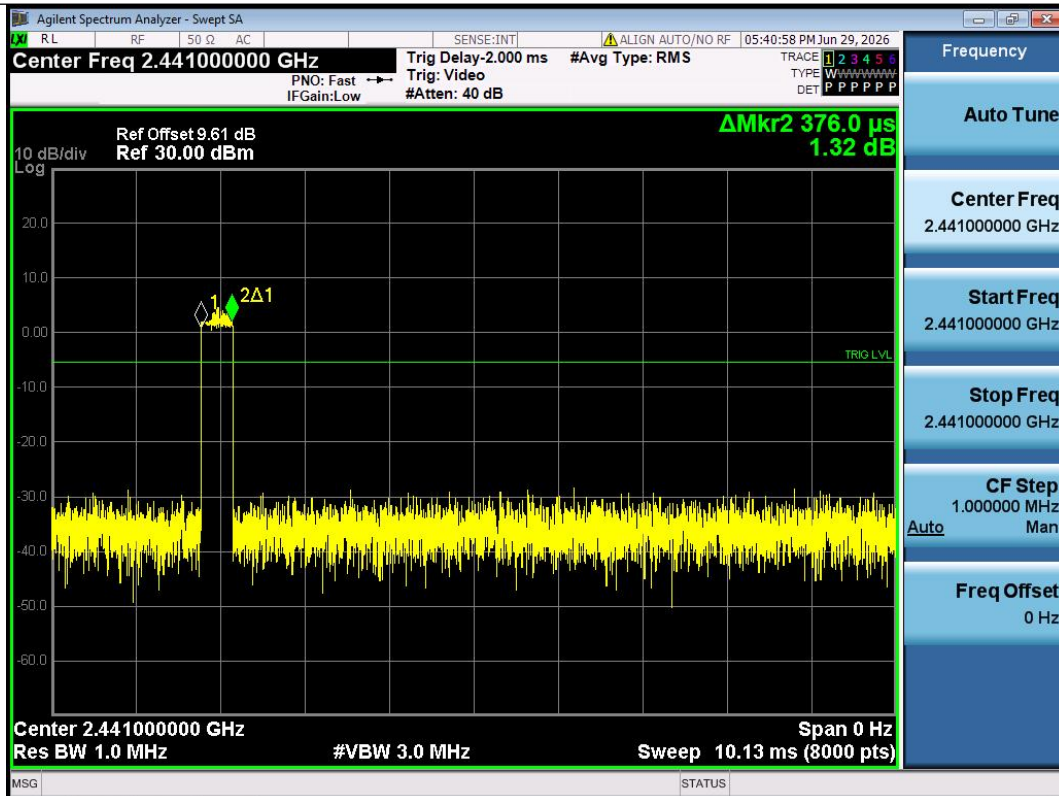


3DH1-Ant1-Hop-PASS

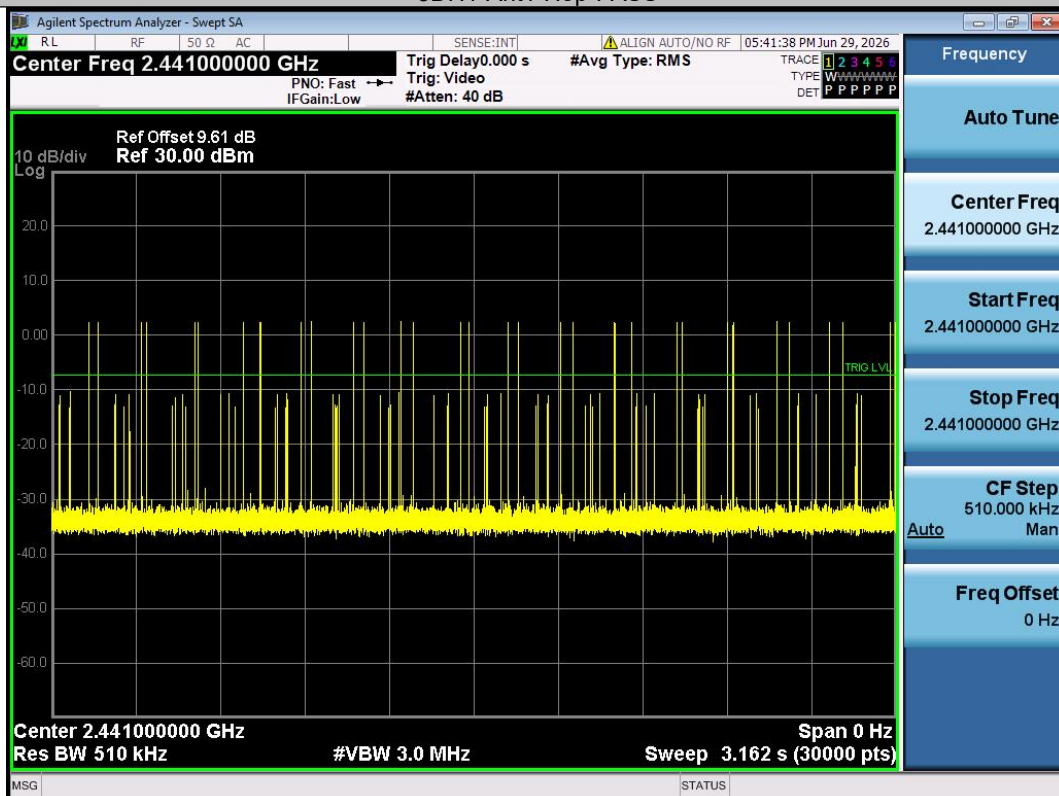

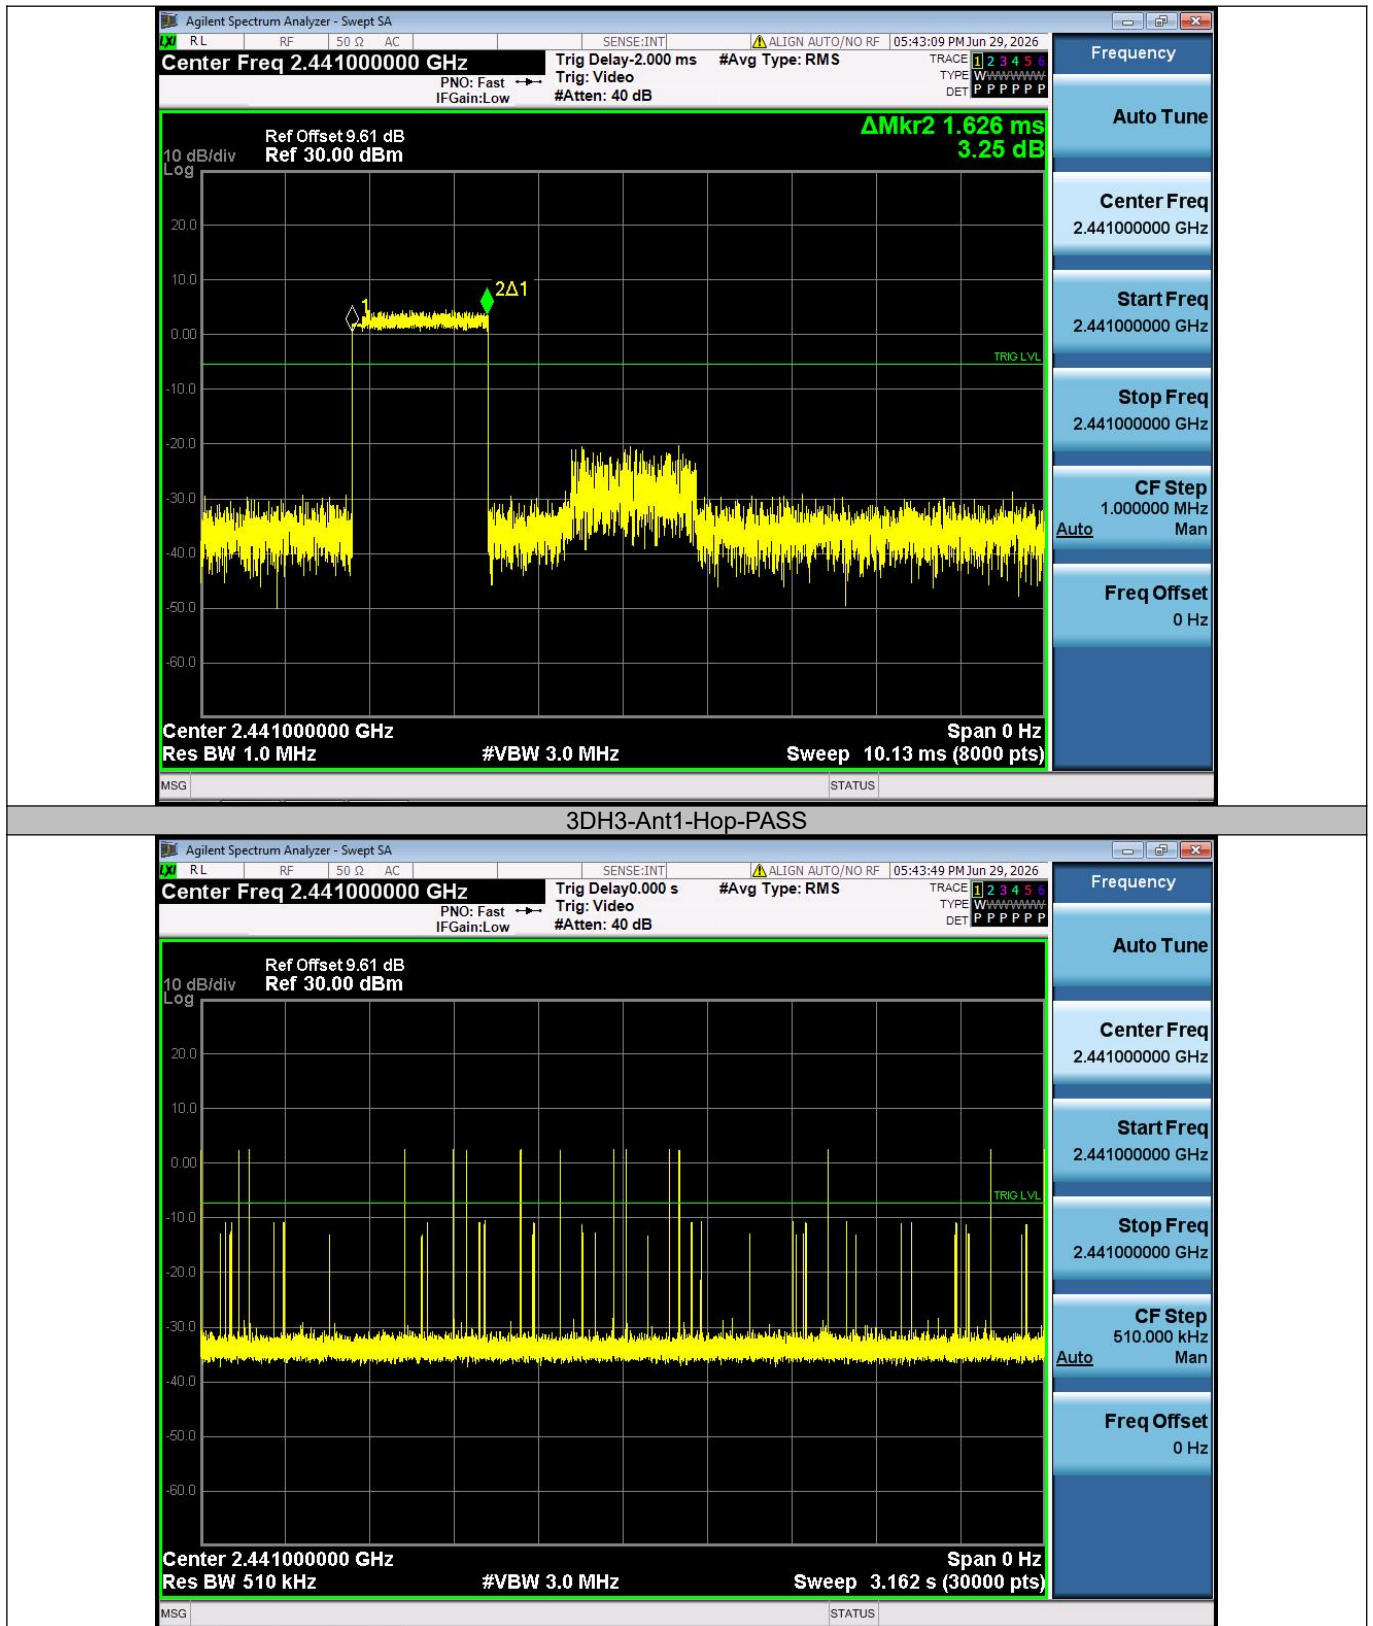

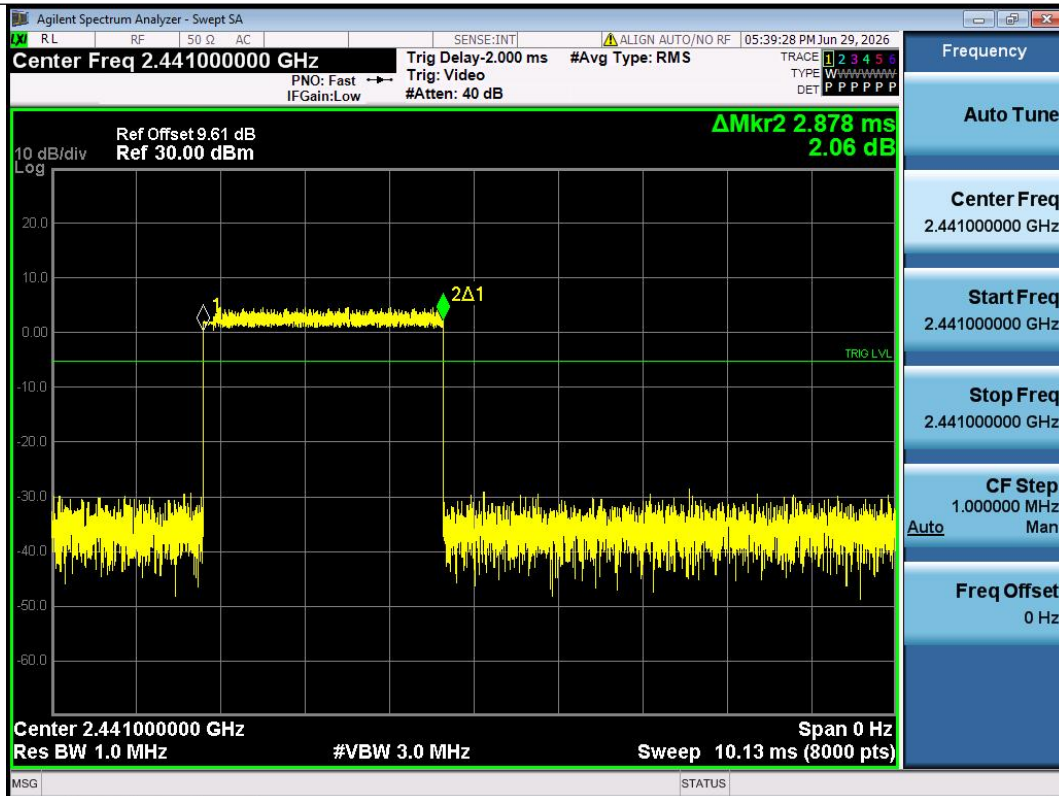

3DH5-Ant1-Hop-PASS

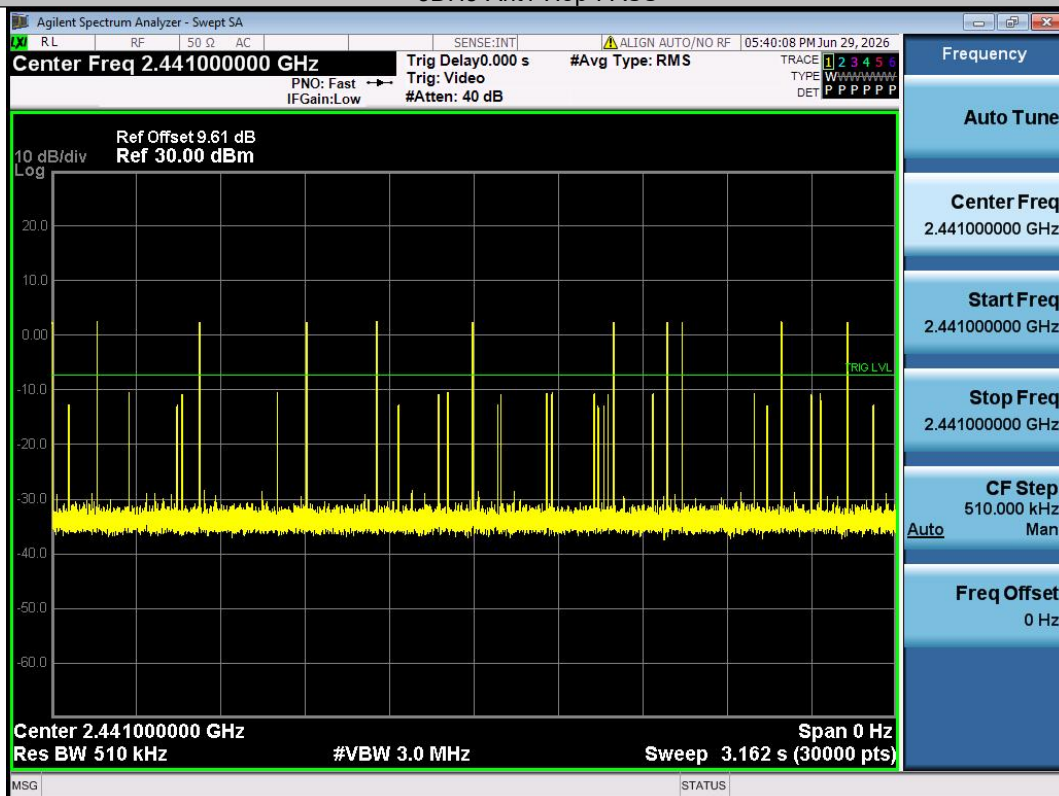

9.5 MAXIMUM PEAK CONDUCTED OUTPUT POWER

9.5.1 Applicable Standard

According to FCC Part 15.247(b)(1) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02
According to IC RSS-247 and RSS-Gen

9.5.2 Conformance Limit

The max For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

9.5.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.5.4 Test Procedure

As an alternative to a peak power measurement, compliance with the limit can be based on a measurement of the maximum conducted output power.

Use the following spectrum analyzer settings:

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel(about 8MHz)

Set RBW > the 20 dB bandwidth of the emission being measured(about 3MHz)

Set VBW $\geq$ RBW

Set Sweep = auto

Set Detector function = peak

Set Trace = max hold


Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission to determine the peak amplitude level.

Test Results


Temperature:	23.5° C
Relative Humidity:	59%
ATM Pressure:	1011 mbar

Note: N/A


Test Mode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	Verdict
DH5	Ant1	2402	5.54	≤ 30	PASS
DH5	Ant1	2441	5.36	≤ 30	PASS
DH5	Ant1	2480	5.57	≤ 30	PASS
2DH5	Ant1	2402	5.02	≤ 30	PASS
2DH5	Ant1	2441	4.84	≤ 30	PASS
2DH5	Ant1	2480	4.96	≤ 30	PASS
3DH5	Ant1	2402	5.40	≤ 30	PASS
3DH5	Ant1	2441	5.21	≤ 30	PASS
3DH5	Ant1	2480	5.40	≤ 30	PASS

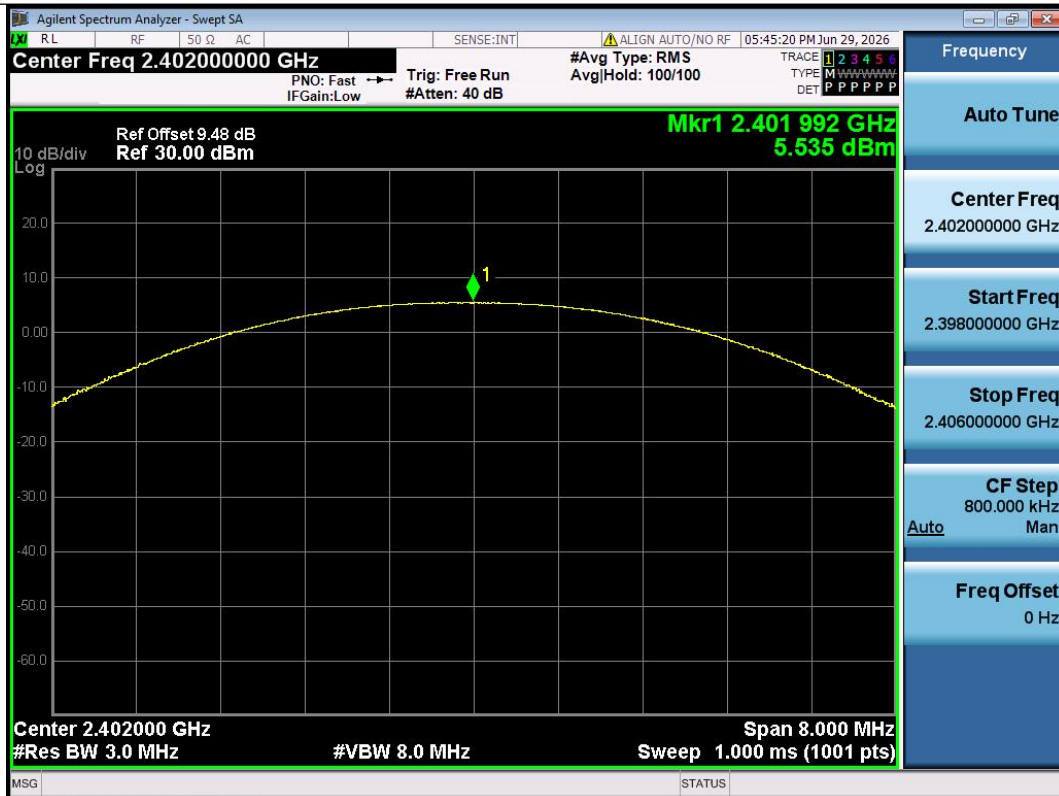


DH5-Ant1-2402-PASS

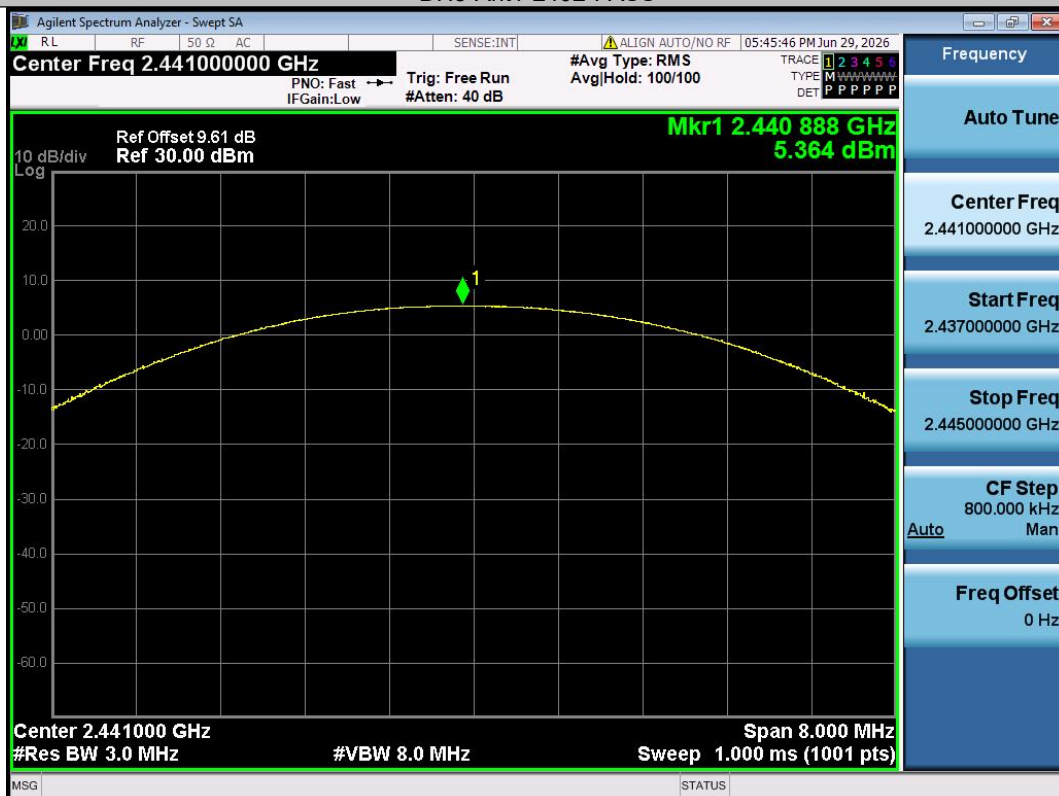



DH5-Ant1-2441-PASS

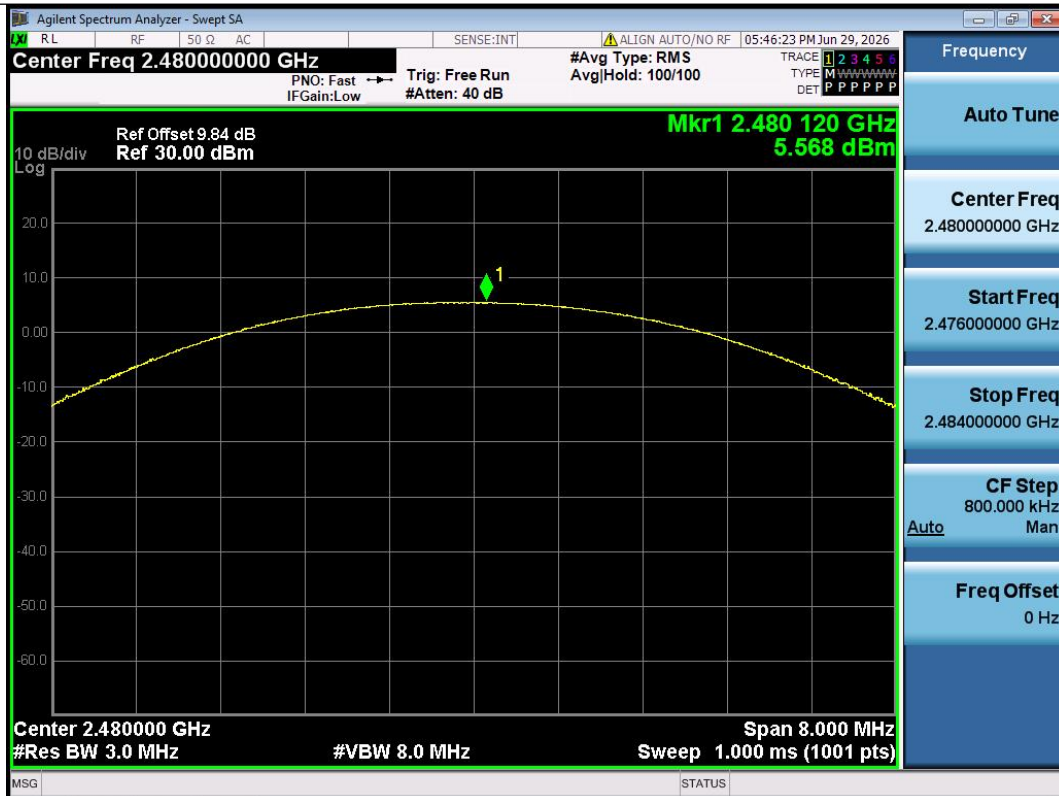


DH5-Ant1-2480-PASS

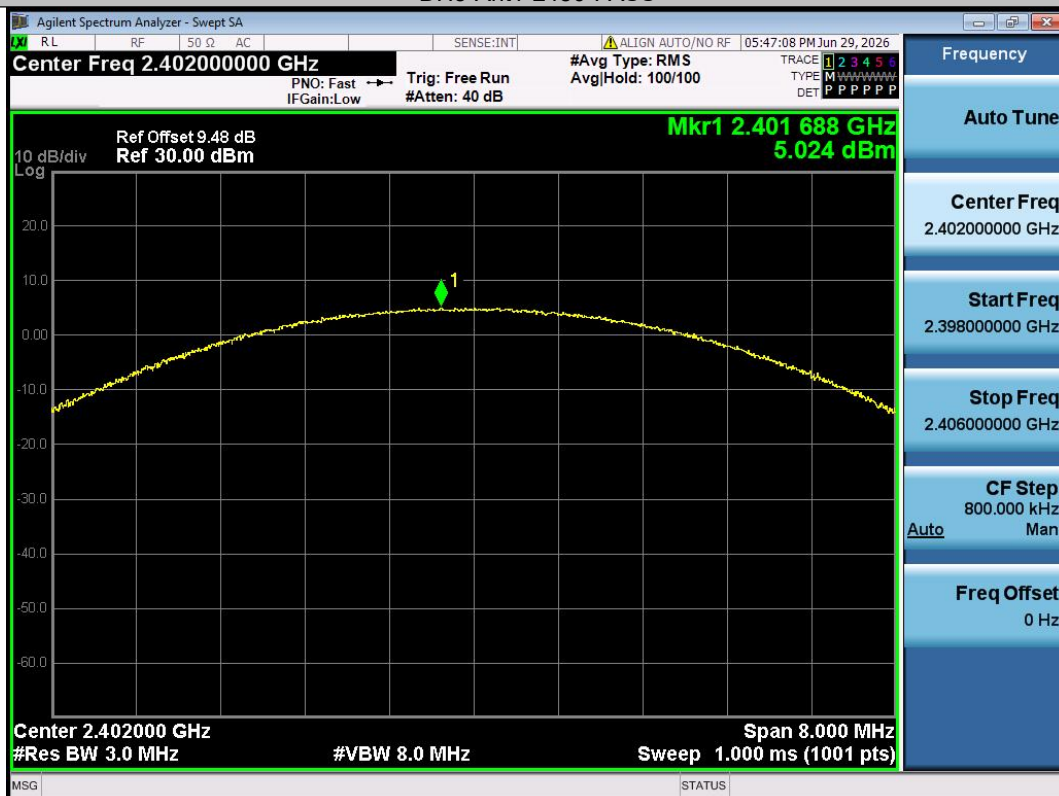


2DH5-Ant1-2402-PASS

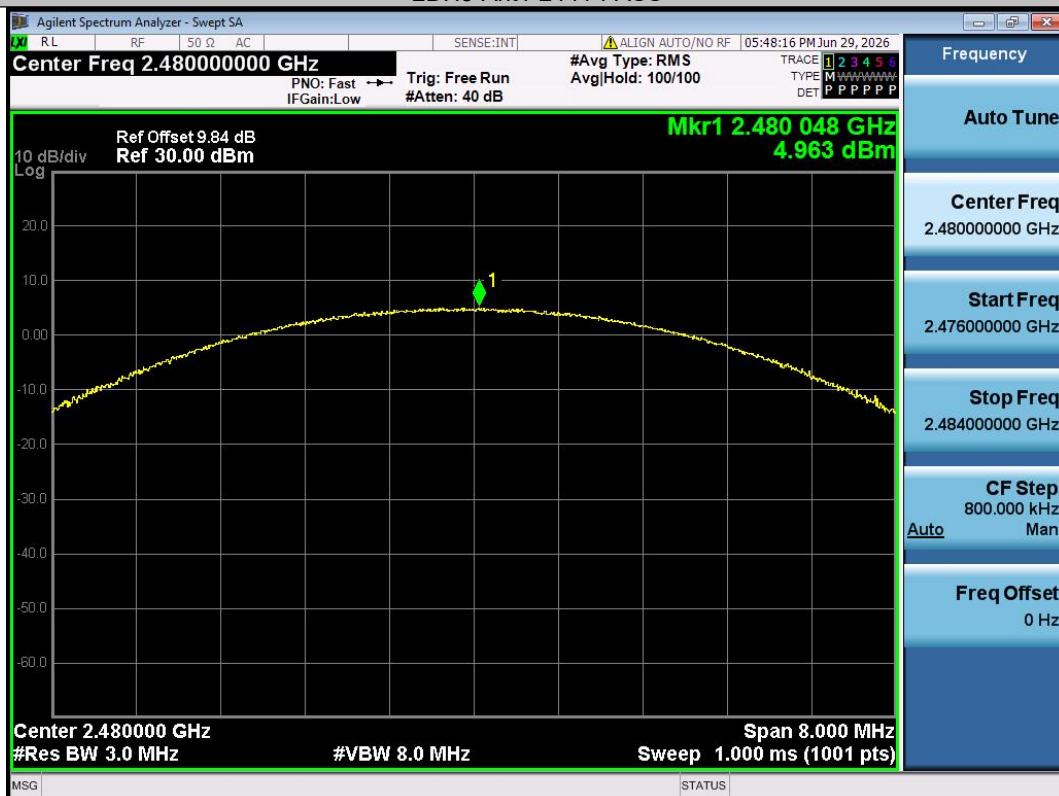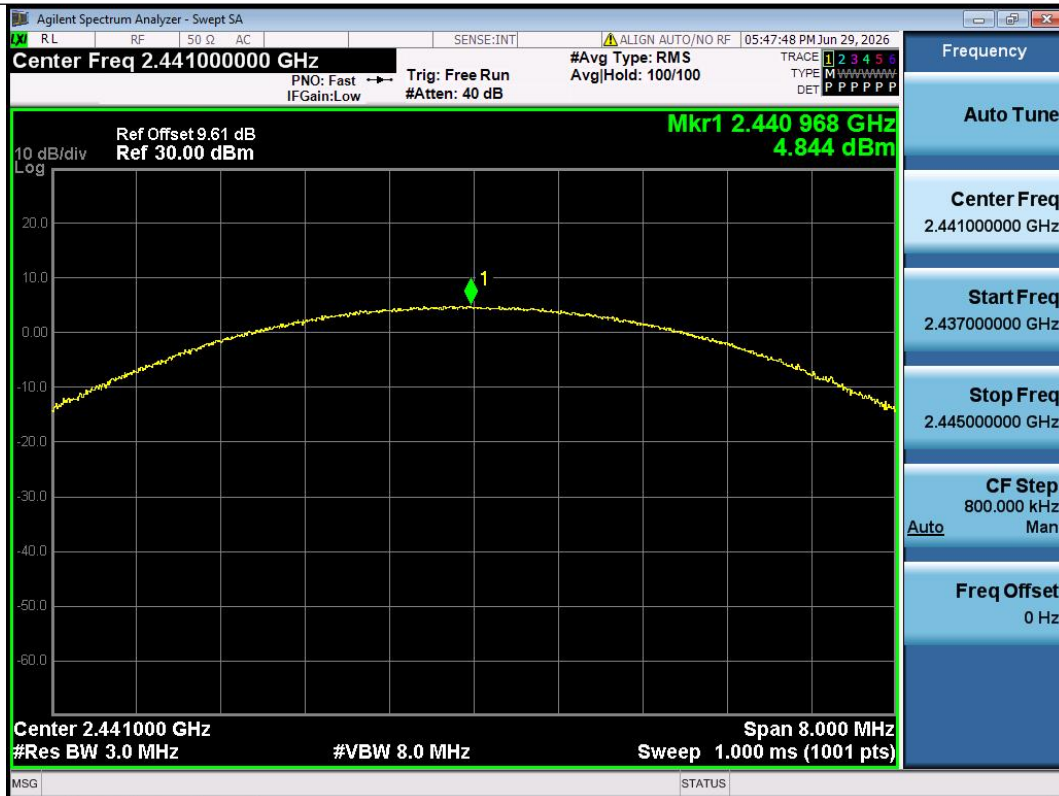

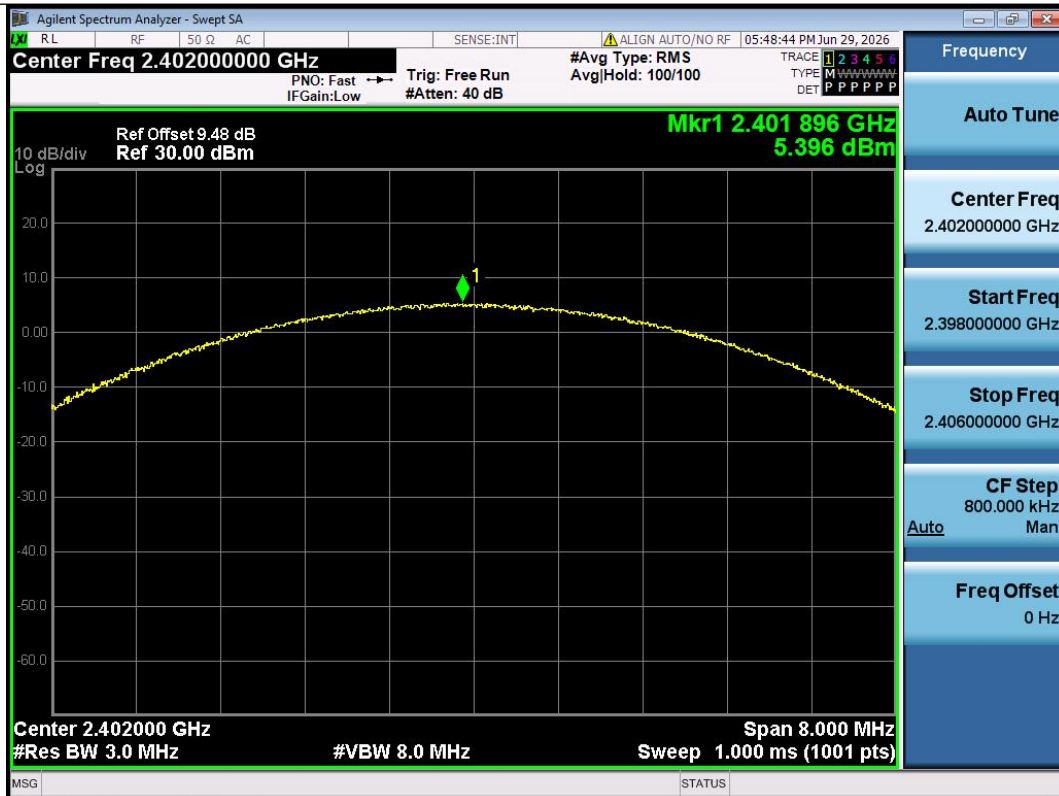

3DH5-Ant1-2402-PASS

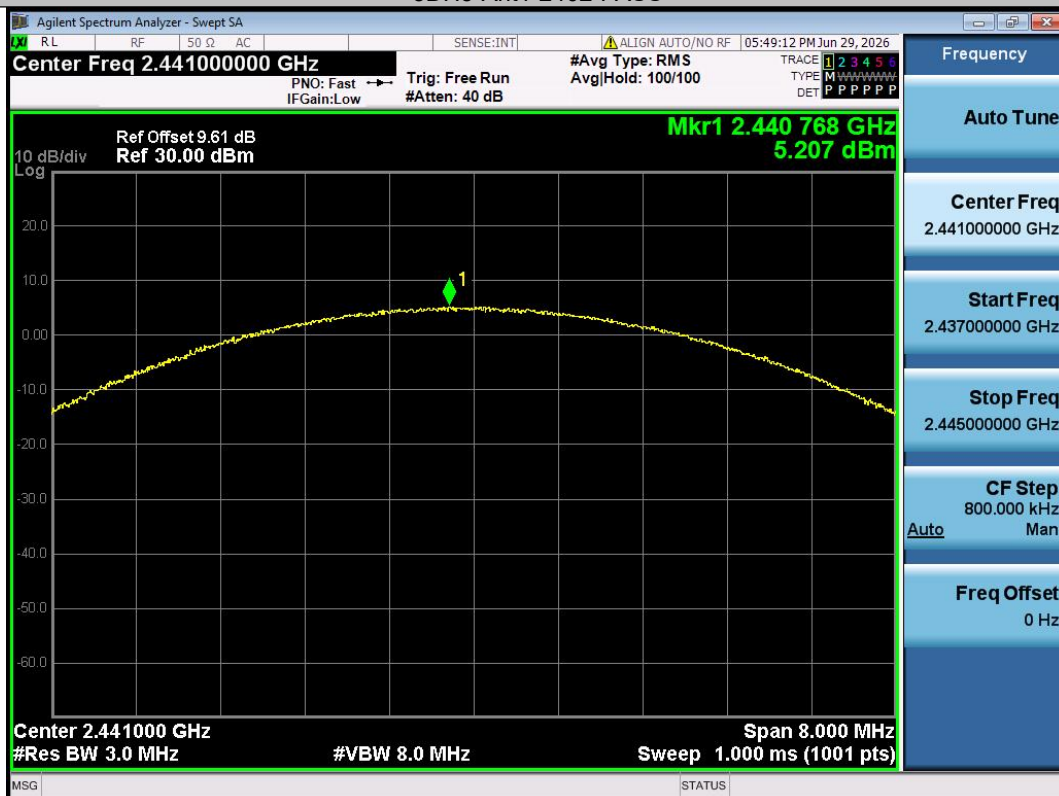

3DH5-Ant1-2441-PASS



9.6 CONDUCTED SUPRIIOUS EMISSION

9.6.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 MEAS GUIDANCE v05r02
According to IC RSS-247

9.6.2 Conformance Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted, provided the transmitter demonstrates compliance with the peak conducted power limits.

9.6.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

9.6.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DSS channel center frequency.

Set Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel.

Set the RBW = 100 kHz. Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak. Set Sweep time = auto couple.

Set Trace mode = max hold. Allow trace to fully stabilize.

Use the peak marker function to determine the maximum Maximumconducetedlevel.

Note that the channel found to contain the maximum conduceted level can be used to establish the reference level.

■ Band-edge measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band-edge, as well as any modulation products which fall outside of the authorized band of operation

Set RBW $\geq 1\%$ of the span=100kHzSet VBW $\geq 3 \times$ RBW

Set Sweep = autoSet Detector function = peakSet Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

■ Emission level measurement

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic.(30MHz to 25GHz).Set RBW = 100 kHzSet VBW $\geq$ RBW

Set Sweep = autoSet Detector function = peakSet Trace = max hold

Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section.


9.6.5 Test Results

Temperature:	23.5° C
Relative Humidity:	59%
ATM Pressure:	1011 mbar


Note: N/A

Band edge measurements


TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	5.10	-44.56	≤-14.9	PASS
DH5	Ant1	High	2480	5.04	-46.22	≤-14.96	PASS
DH5	Ant1	Low	Hop_2402	4.82	-46.77	≤-15.18	PASS
DH5	Ant1	High	Hop_2480	4.79	-45.53	≤-15.21	PASS
2DH5	Ant1	Low	2402	1.93	-44.72	≤-18.07	PASS
2DH5	Ant1	High	2480	1.83	-45.09	≤-18.17	PASS
2DH5	Ant1	Low	Hop_2402	-2.88	-46.59	≤-22.88	PASS
2DH5	Ant1	High	Hop_2480	0.36	-45.32	≤-19.64	PASS
3DH5	Ant1	Low	2402	0.97	-44.11	≤-19.03	PASS
3DH5	Ant1	High	2480	1.46	-46.4	≤-18.54	PASS
3DH5	Ant1	Low	Hop_2402	-0.76	-46.2	≤-20.76	PASS
3DH5	Ant1	High	Hop_2480	1.22	-45.16	≤-18.78	PASS

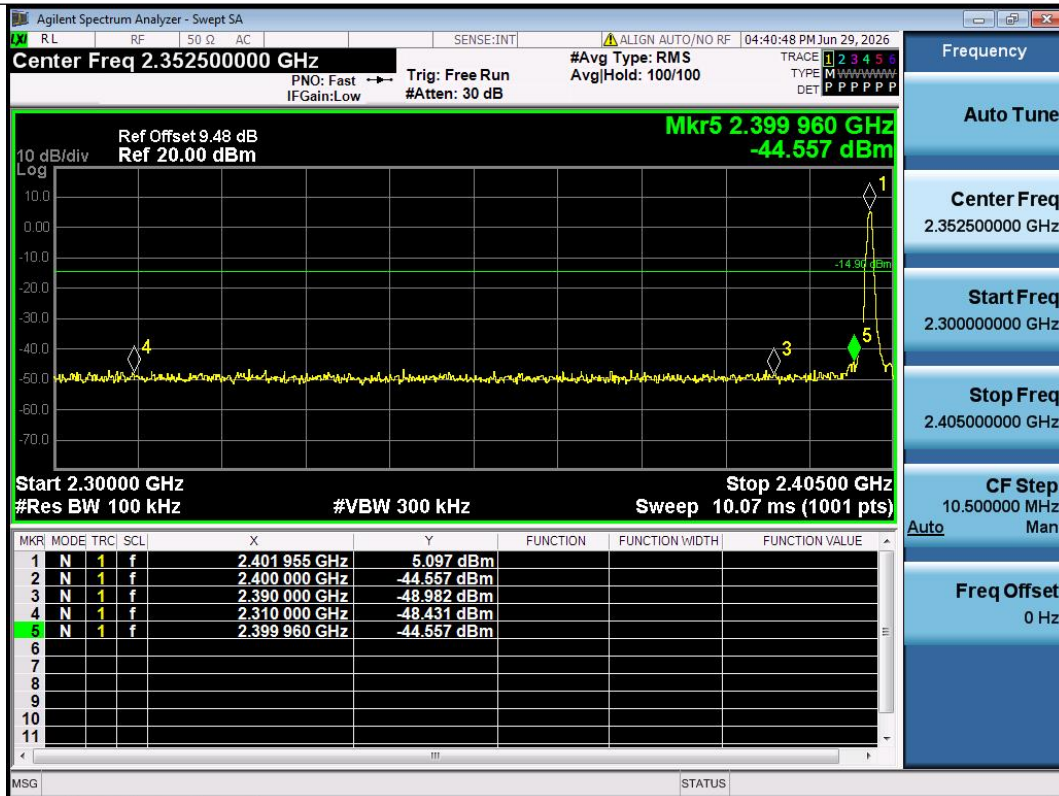


DH5-Ant1-2402-PASS

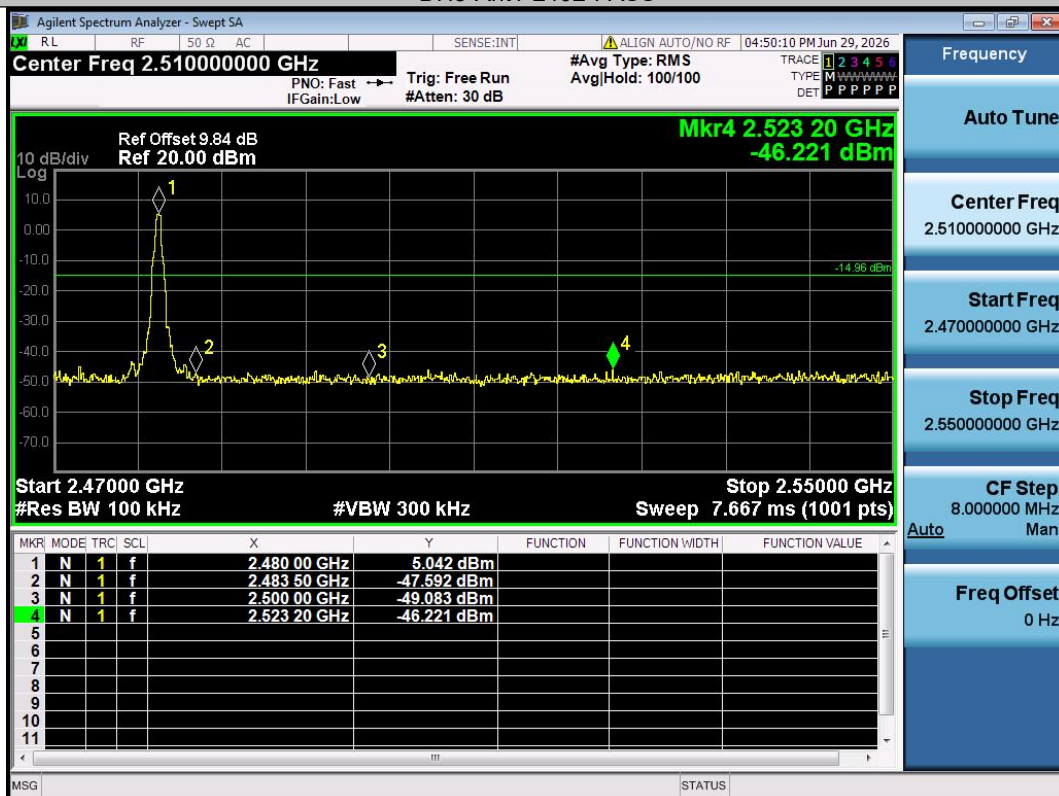


DH5-Ant1-2480-PASS

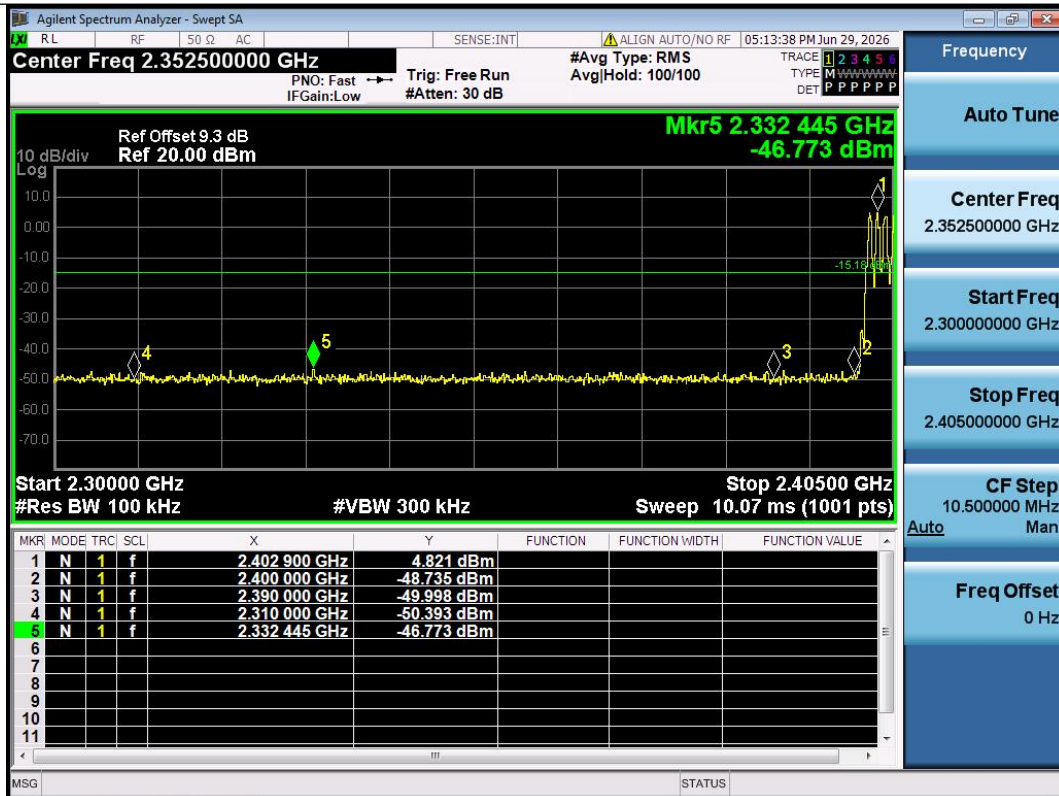


DH5-Ant1-Hop_2402-PASS

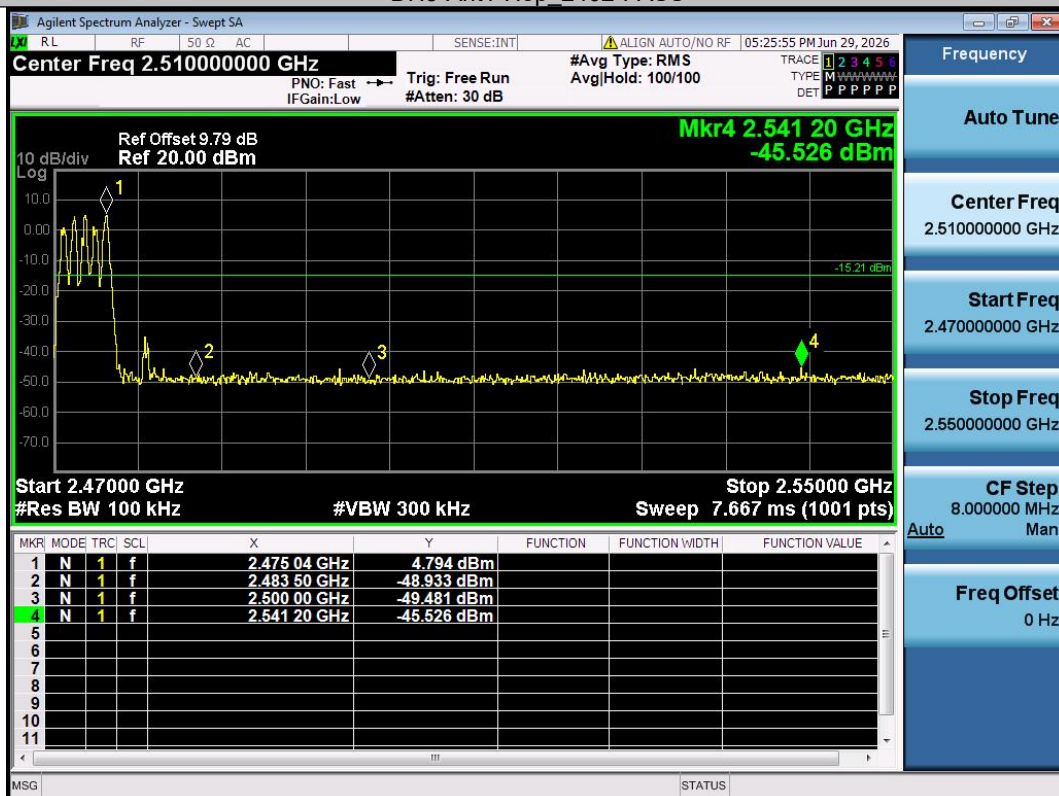


DH5-Ant1-Hop_2480-PASS

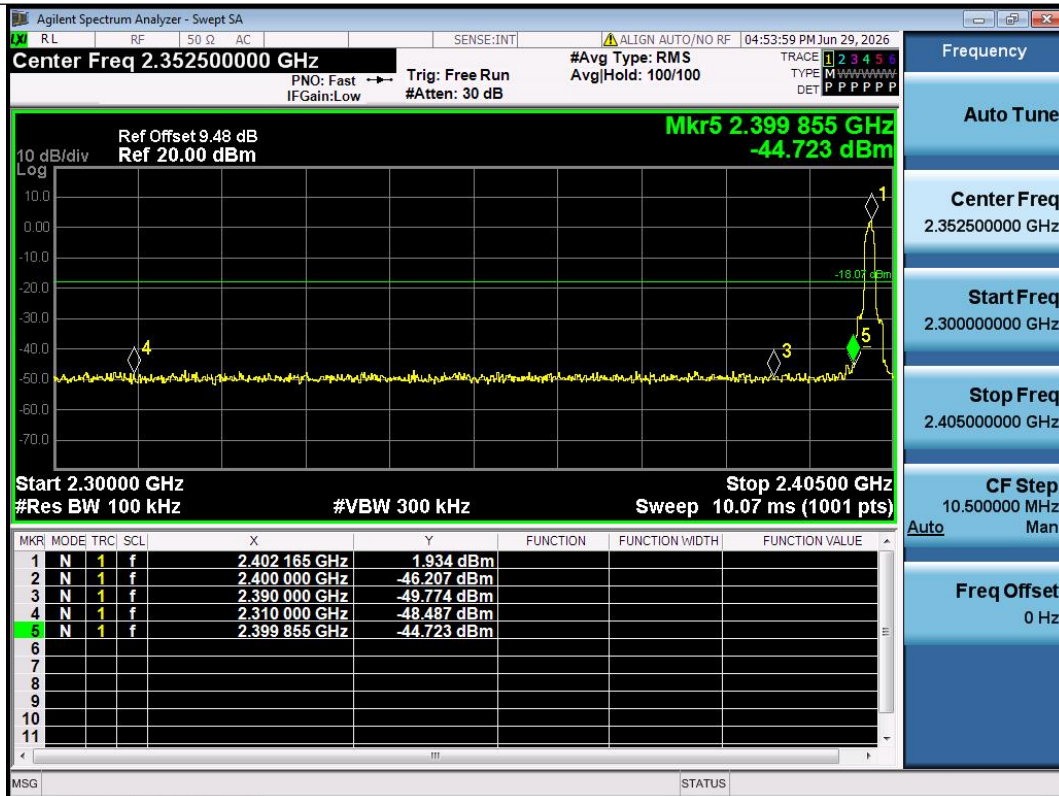


2DH5-Ant1-2402-PASS

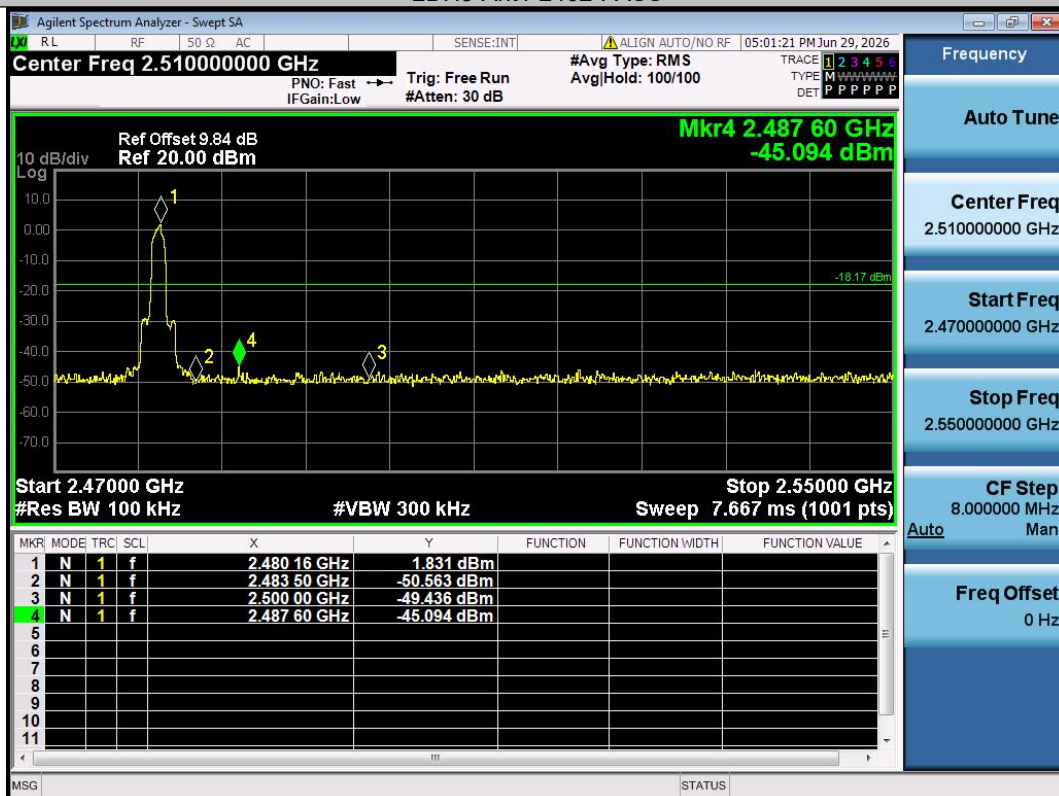


2DH5-Ant1-2480-PASS

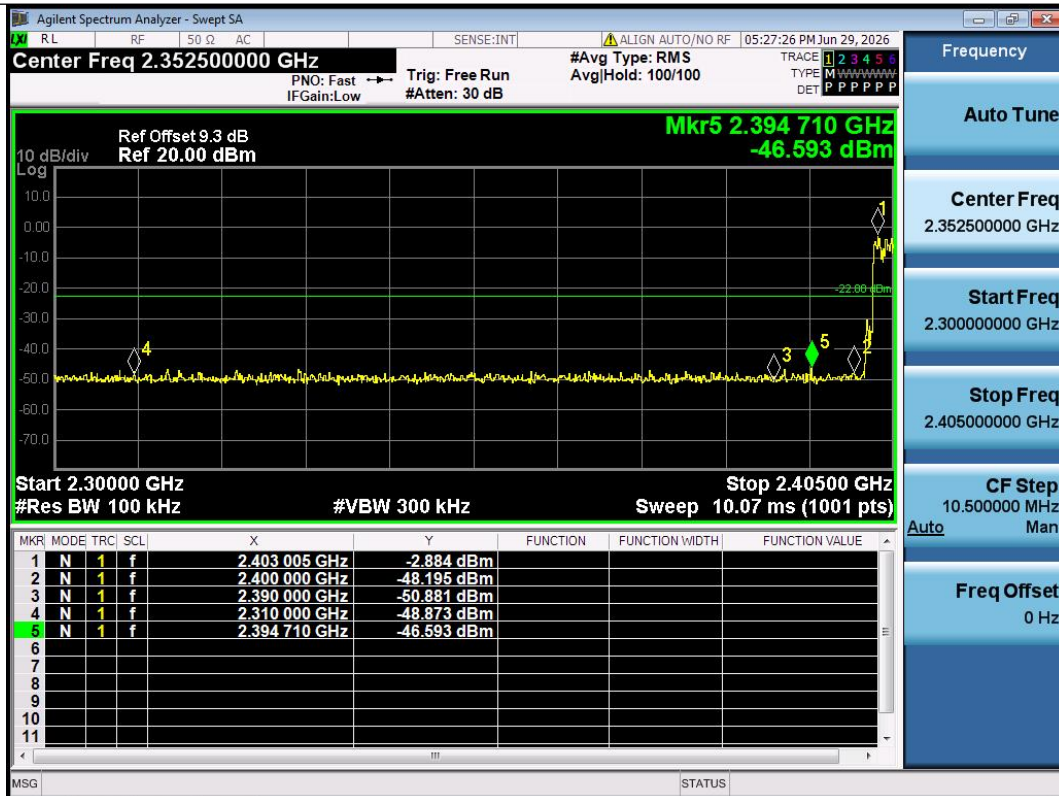


2DH5-Ant1-Hop_2402-PASS

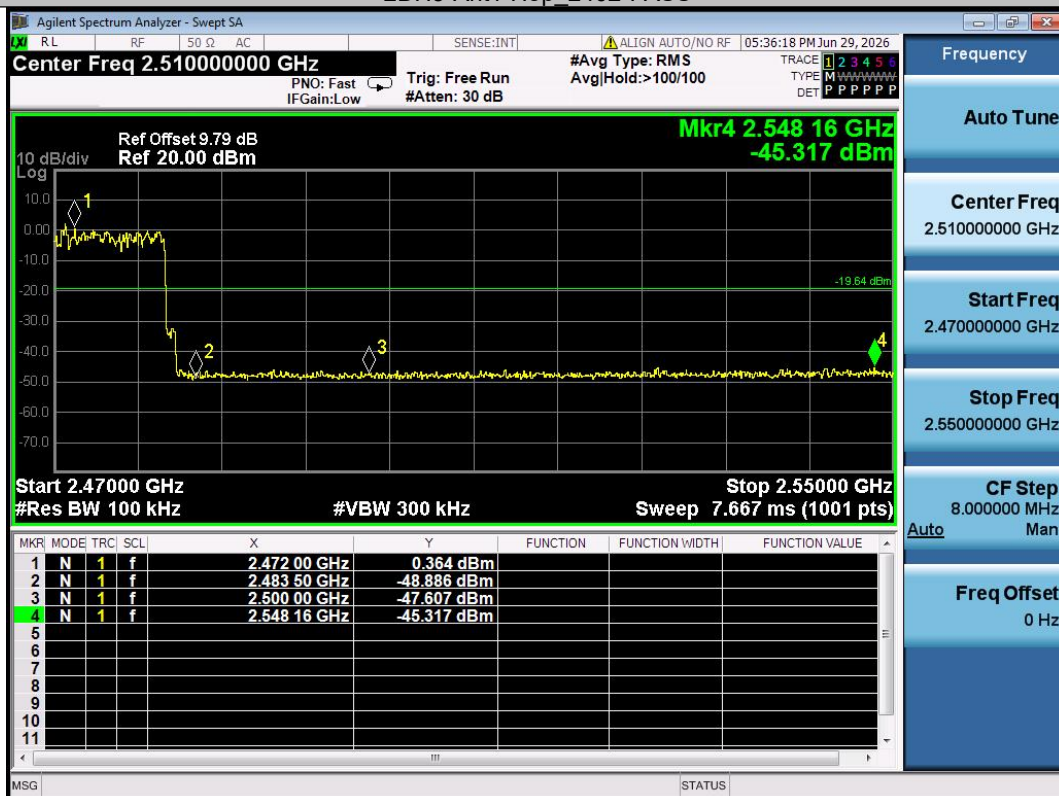


2DH5-Ant1-Hop_2480-PASS

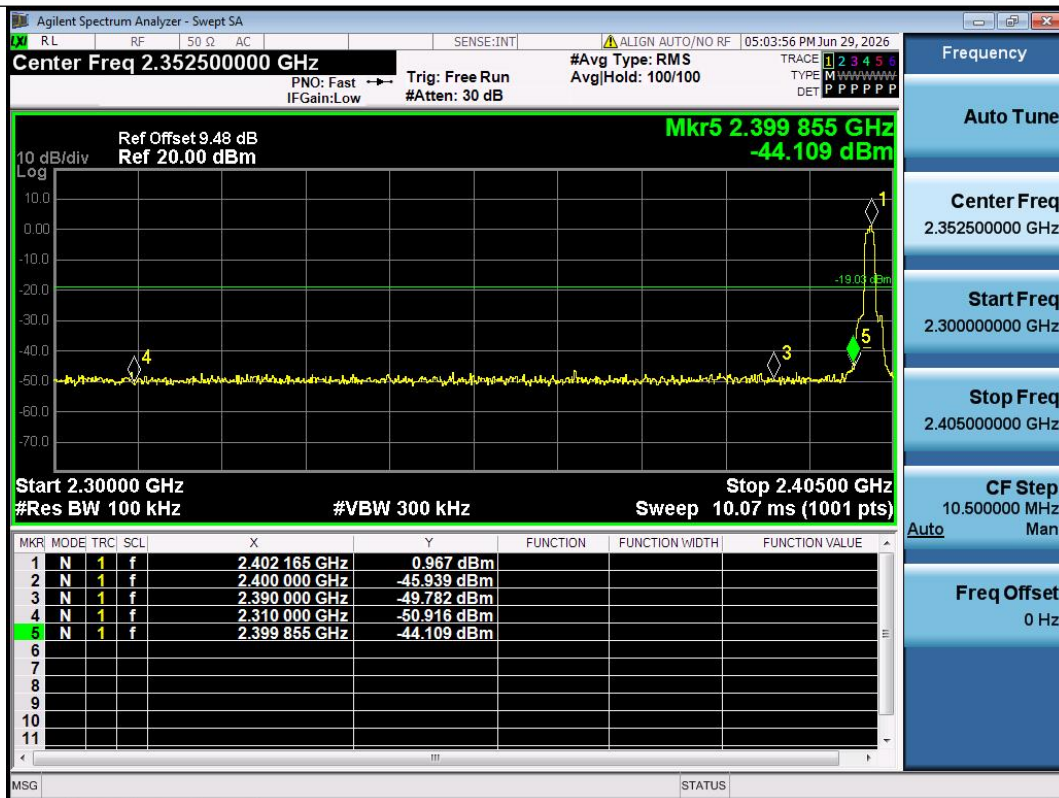


3DH5-Ant1-2402-PASS

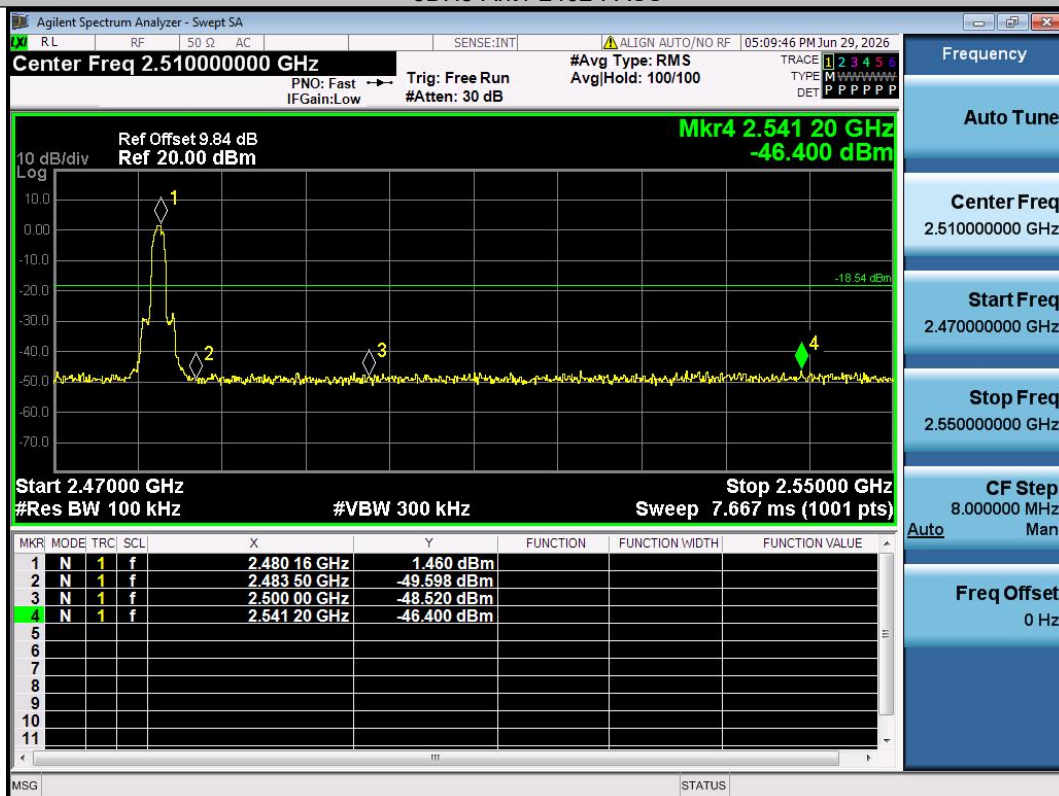

3DH5-Ant1-2480-PASS

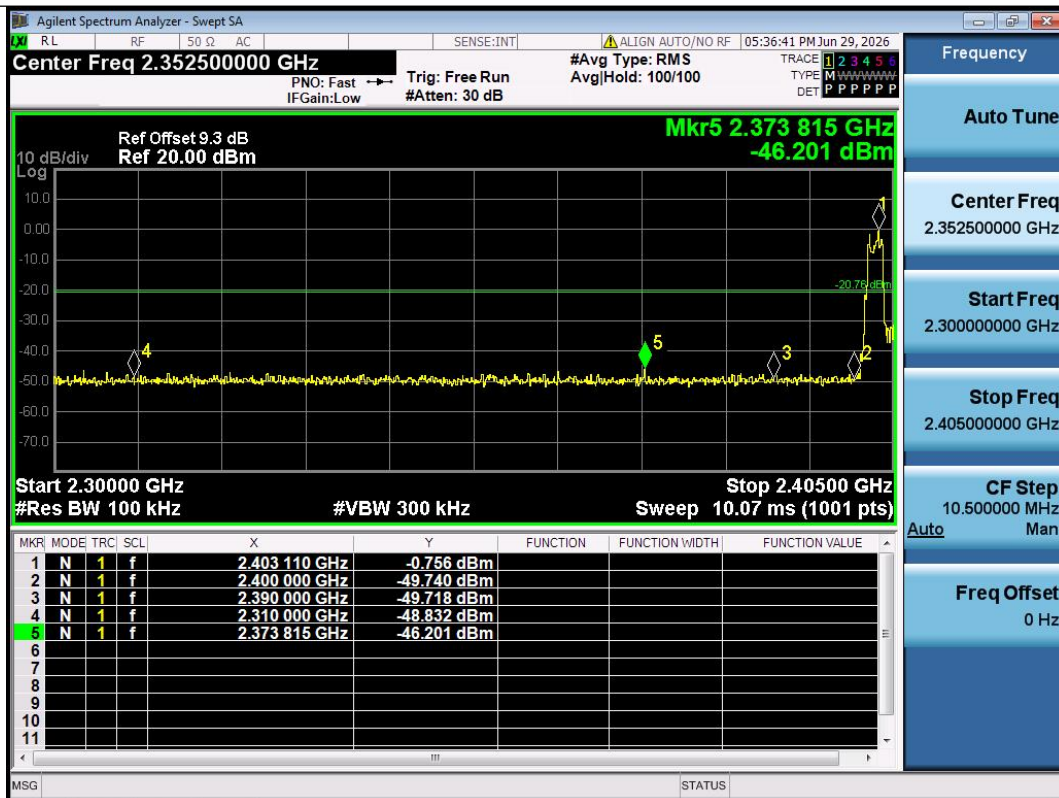

3DH5-Ant1-Hop_2402-PASS

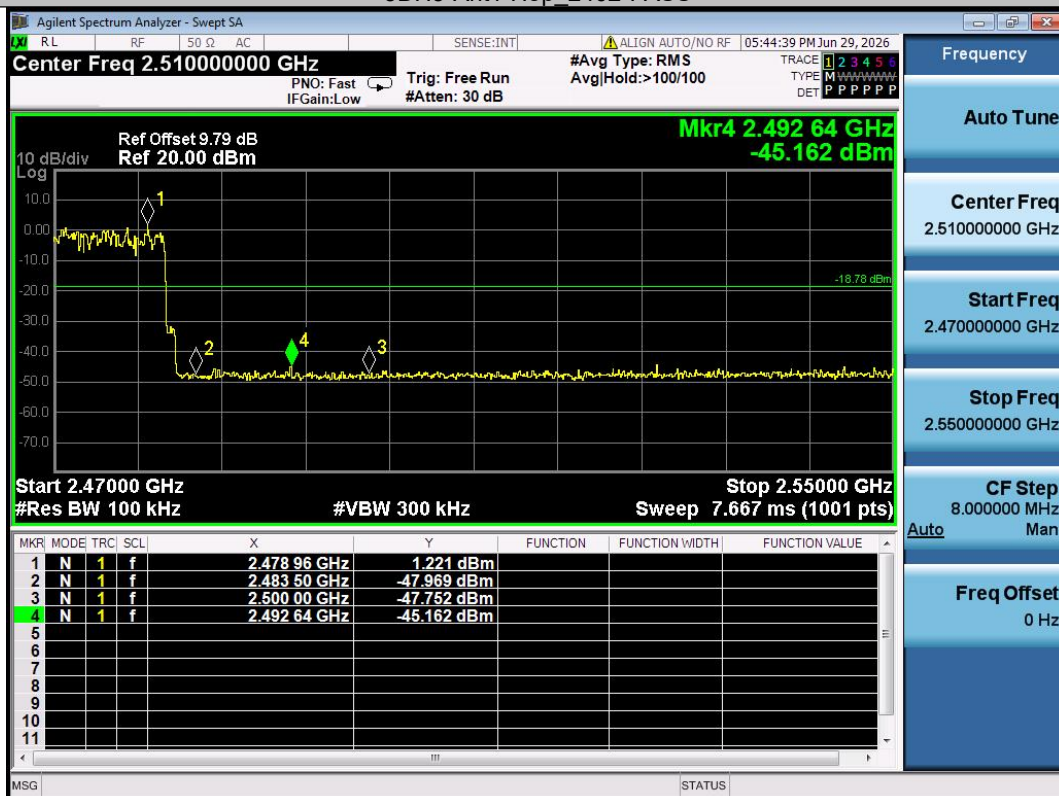


3DH5-Ant1-Hop_2480-PASS

Conducted Spurious Emission


TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	0~Reference	4.67	4.67	---	PASS
DH5	Ant1	2402	30~1000	4.67	-60.33	≤-15.33	PASS
DH5	Ant1	2402	1000~26500	4.67	-32.96	≤-15.33	PASS
DH5	Ant1	2441	0~Reference	3.99	3.99	---	PASS
DH5	Ant1	2441	30~1000	3.99	-60.09	≤-16.01	PASS
DH5	Ant1	2441	1000~26500	3.99	-33.09	≤-16.01	PASS
DH5	Ant1	2480	0~Reference	5.05	5.05	---	PASS
DH5	Ant1	2480	30~1000	5.05	-59.77	≤-14.95	PASS
DH5	Ant1	2480	1000~26500	5.05	-32.34	≤-14.95	PASS
2DH5	Ant1	2402	0~Reference	1.07	1.07	---	PASS
2DH5	Ant1	2402	30~1000	1.07	-64.36	≤-18.93	PASS
2DH5	Ant1	2402	1000~26500	1.07	-38.42	≤-18.93	PASS
2DH5	Ant1	2441	0~Reference	0.50	0.50	---	PASS
2DH5	Ant1	2441	30~1000	0.50	-64.97	≤-19.5	PASS
2DH5	Ant1	2441	1000~26500	0.50	-38.14	≤-19.5	PASS
2DH5	Ant1	2480	0~Reference	1.15	1.15	---	PASS
2DH5	Ant1	2480	30~1000	1.15	-63.46	≤-18.85	PASS
2DH5	Ant1	2480	1000~26500	1.15	-36.87	≤-18.85	PASS
3DH5	Ant1	2402	0~Reference	-0.14	-0.14	---	PASS
3DH5	Ant1	2402	30~1000	-0.14	-63.53	≤-20.14	PASS
3DH5	Ant1	2402	1000~26500	-0.14	-37.46	≤-20.14	PASS
3DH5	Ant1	2441	0~Reference	0.56	0.56	---	PASS
3DH5	Ant1	2441	30~1000	0.56	-64.34	≤-19.44	PASS
3DH5	Ant1	2441	1000~26500	0.56	-38.39	≤-19.44	PASS
3DH5	Ant1	2480	0~Reference	1.13	1.13	---	PASS
3DH5	Ant1	2480	30~1000	1.13	-64.96	≤-18.87	PASS
3DH5	Ant1	2480	1000~26500	1.13	-37.33	≤-18.87	PASS



DH5-Ant1-2402-0~Reference-PASS

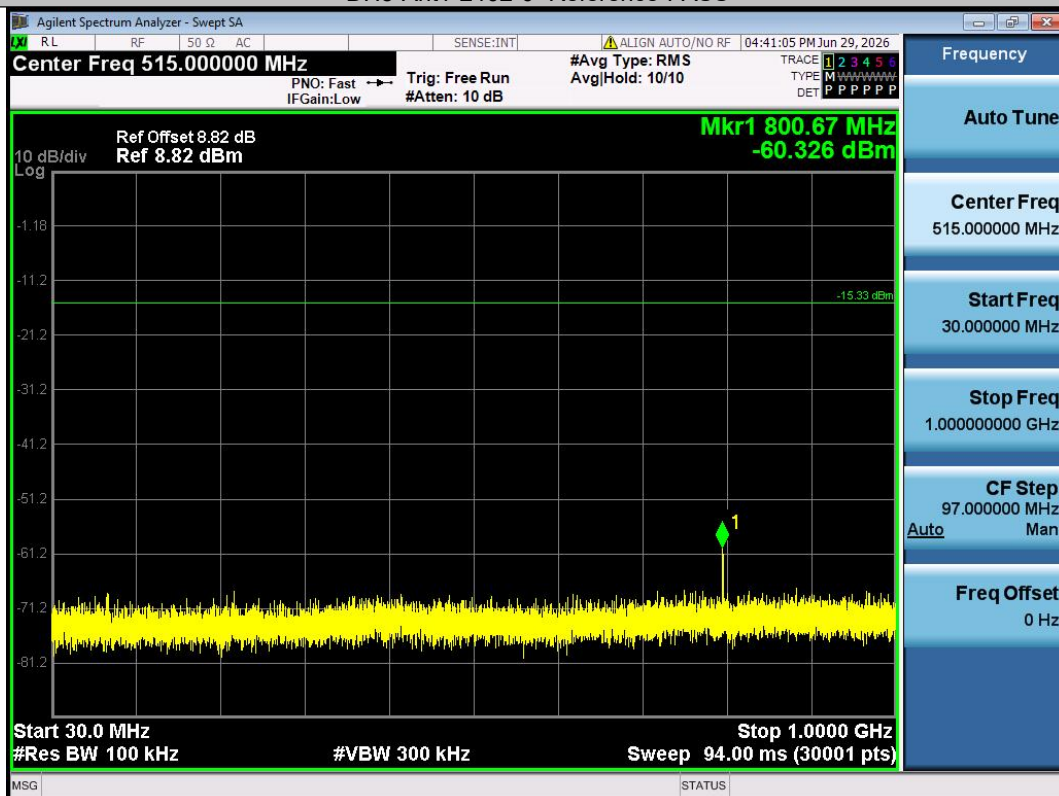

DH5-Ant1-2402-30~1000-PASS

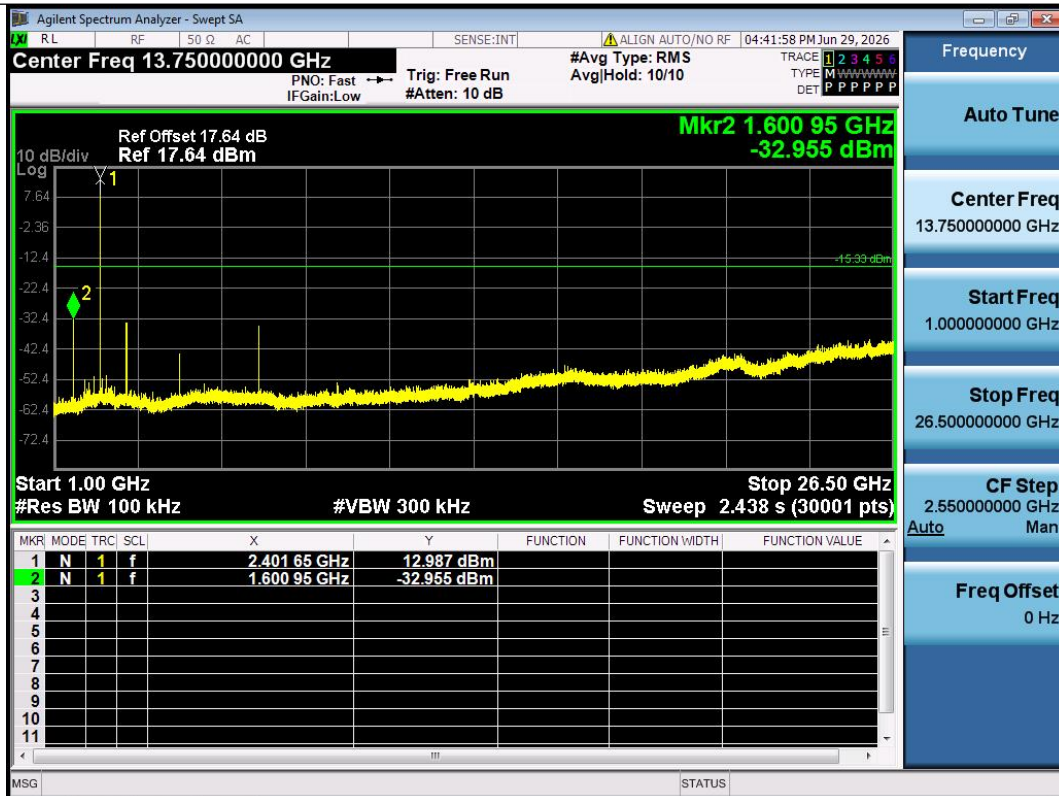

DH5-Ant1-2402-1000~26500-PASS



DH5-Ant1-2441-0~Reference-PASS