


Test Report No:
2570766R-RFUSV03S-A

VARIANT TEST REPORT

FCC Rules&Regulations

Product Name	System-On-Module
Brand Name	AMobile
Model No.	SoM-SD700, SoM-SD510
FCC ID	2AQ5W-SOM510-700
Applicant's Name / Address	AMobile Solutions Corp. 8F.-1, No.700, Zhongzheng Rd., Zhonghe Dist., New Taipei City 235, Taiwan
Manufacturer's Name / Address	AMobile Solutions Corp. 8F.-1, No.700, Zhongzheng Rd., Zhonghe Dist., New Taipei City 235, Taiwan
Test Method Requested, Standard	FCC CFR Title 47 Part 15 Subpart E Section 15.407 ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024
Verdict Summary	IN COMPLIANCE
Documented By	 Hailey Peng
Approved By	 Rueyyan Lin
Date of Receipt	Jul. 25, 2025
Date of Issue	Jun. 11, 2026
Report Version	V1.0

INDEX

	page
Competences and Guarantees.....	4
General Conditions.....	4
Revision History.....	5
Permissive Change.....	6
Summary of Test Result.....	7
Comments and Remarks.....	7
1. General Information	8
1.1. EUT Description.....	8
1.2. EUT Information.....	9
1.3. Applicable Standards.....	9
1.4. Testing Location Information.....	10
1.5. Measurement Uncertainty.....	10
1.6. List of Test Equipment	11
2. Test Configuration of EUT.....	12
2.1. Test Condition	12
2.2. Test Frequency Mode	12
2.3. Duty Cycle.....	14
2.4. The Worst Case Measurement Configuration	15
2.5. Tested System Details	16
2.6. Configuration of tested System	16
3. AC Power Line Conducted Emission.....	17
3.1. Test Setup.....	17
3.2. Test Limit.....	17
3.3. Test Procedure.....	17
3.4. Test Result of AC Power Line Conducted Emission.....	17
4. Maximum Conducted Output Power.....	18
4.1. Test Setup.....	18
4.2. Test Limit.....	19
4.3. Test Procedure.....	19
4.4. Test Result of Maximum Conducted Output Power.....	19
5. Transmitter Radiated Spurious Emission.....	20
5.1. Test Setup.....	20
5.2. Test Limit.....	21
5.3. Test Procedure.....	22
5.4. Test Result of Transmitter Radiated Spurious Emission (Below 30 MHz).....	22
5.5. Test Result of Transmitter Radiated Spurious Emission	22

Appendix A. Test Result of AC Power Line Conducted Emission

Appendix B. Test Result of Maximum Conducted Output Power

Appendix C. Test Result of Transmitter Radiated Spurious Emission

Appendix D. Test Setup Photograph

Competences and Guarantees

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

General Conditions

1. The test results relate only to the samples tested.
2. The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.
3. This report must not be used to claim product endorsement by TAF or any agency of the government.
4. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
5. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Revision History

Version	Description	Issued Date
V1.0	Initial issue of report	Jun. 11, 2026

Permissive Change

Report No.	Version	Description	Issued Date
2550032R-RFUSV03S-A	V1.0	Original application.	Jul. 15, 2025
2570766R-RFUSV03S-A	V1.0	1. Additional platform added, Product: 15.6" POS Panel PC, Brand: Amobile, Model Number: TC1560M-G510. 2. Add one set of Monopole antennas with an antenna type different from that in the original certificate. After evaluation, re-testing for AC power line conducted emission, maximum conducted output power, and radiated spurious emission was performed. The test results are documented in this report.	Jun. 11, 2026

Summary of Test Result

Report Clause	Test Items	Result (PASS/FAIL)	Remark
3	AC Power Line Conducted Emission	PASS	-
4	Maximum Conducted Output Power	PASS	-
5	Transmitter Radiated Spurious Emission	PASS	-

Note: The WLAN module was installed in the host (brand name: Amobile, model: TC1560M-G510) for testing.

Comments and Explanations

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Comments and Remarks

The product specification and testing instructions for the EUT declared in the report are provided by the manufacturer who will take all responsibilities for the accuracy.

1. General Information

1.1. EUT Description

Frequency Range	5150 ~ 5250 MHz 5250 ~ 5350 MHz 5470 ~ 5850 MHz	
Operating Frequency / Channel Number	IEEE 802.11a IEEE 802.11n/ac (20 MHz)	5180 ~ 5240 MHz / 4 Channels 5260 ~ 5320 MHz / 4 Channels 5500 ~ 5720 MHz / 12 Channels 5745 ~ 5825 MHz / 5 Channels
	IEEE 802.11n/ac (40 MHz)	5190 ~ 5230 MHz / 2 Channels 5270 ~ 5310 MHz / 2 Channels 5510 ~ 5710 MHz / 6 Channels 5755 ~ 5795 MHz / 2 Channels
	IEEE 802.11ac (80 MHz)	5210 MHz / 1 Channel 5290 MHz / 1 Channel 5530 ~ 5690 MHz / 3 Channels 5775 MHz / 1 Channel
Type of Modulation	IEEE 802.11a/n	OFDM-BPSK, QPSK, 16QAM, 64QAM
	IEEE 802.11ac	OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM

The difference for each model is shown as below:

EUT	Model No.	Platform	Description
1	SoM-SD700	MT8390	The differences are platform and CPU/GPU. All under same layout.
2	SoM-SD510	MT8370	

From the above models, model: SoM-SD510 was selected as representative model for the test and its data was recorded in this report.

Antenna Information				
Ant.	Brand Name	Part No.	Type	Antenna Gain (dBi)
1	AWAN	3452242000520M	Monopole	2.97
2	AWAN	3452242000530M	Monopole	2.98

For IEEE 802.11a/n/ac Mode: (2TX, 2RX)

Both Ant. 1 and Ant. 2 can be used as transmitting/receiving antennas, and they can transmit/receive signal simultaneously.

1.2. EUT Information

EUT Power Type	From Adapter / Host system			
EUT Function	☒	Point-to-multipoint	☐	Point-to-point
TPC Function	☒	With TPC Function	☐	Without TPC Function
Weather Band (5600 ~ 5650 MHz)	☒	With 5600 ~ 5650 MHz	☐	Without 5600 ~ 5650 MHz
Beamforming Function	☐	With beamforming	☒	Without beamforming

1.3. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024
- ♦ KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ KDB 662911 D01 v02r01
- ♦ KDB 412172 D01 v01r01
- ♦ KDB 414788 D01 v01r01

1.4. Testing Location Information

Testing Location Information		
Test Laboratory : DEKRA Testing and Certification Co., Ltd.		
1 (TAF: 3024)	ADD: No.372-2, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C. TEL: +886-3-582-8001 FAX: +886-3-582-8958 Test site Designation No. TW3024 with FCC. Conformity Assessment Body Identifier (CABID) TW3024 with ISED.	
2 (TAF: 3024)	ADD: No.372, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C. TEL: +886-3-582-8001 FAX: +886-3-582-8958 Test site Designation No. TW3024 with FCC. Conformity Assessment Body Identifier (CABID) TW3024 with ISED.	
Test site number for address 1 includes HC-SR02 and HC-CB10. Test site number for address 2 includes HC-CB02, HC-CB04, HC-SR10 and HC-SR12.		

Test Condition	Test Site No.	Test Engineer	Test Environment (°C / %)	Test Date
AC Conduction Emission	HC-SR02	Cyril Chen	25 / 65	2025/11/21
RF Conducted Emission	HC-SR12	Clemens Fang	22.4~24.2 / 52.4~54.2	2025/11/13~2026/05/12
Radiated Emission	HC-CB04	Ling Chen, Cyril Chen, Brook Cheng	20.1~24.2 / 58~63	2025/11/13~2026/05/05

1.5. Measurement Uncertainty

Uncertainties have been calculated according to the DEKRA internal document with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)).

Test Item	Uncertainty
AC Power Line Conducted Emission	± 2.39 dB
Maximum Conducted Output Power	± 1.11 dB
Transmitter Radiated Spurious Emission	± 3.72 dB below 1 GHz ± 3.18 dB above 1 GHz

1.6. List of Test Equipment

HC-SR02

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal. Date	Next Cal. Date
EMI Test Receiver	R&S	ESR3	102608	9 kHz - 3.6 GHz	2025/06/30	2026/06/29
Two-Line V-Network	R&S	ENV216	100096	9kHz-30MHz	2025/06/26	2026/06/25
Two-Line V-Network	R&S	ENV216	100092	9kHz-30MHz	2025/05/08	2026/05/07
Coaxial Cable(9 m)	Harbour	RG-400	HC-SR02	9 kHz–2500 MHz	2025/05/08	2026/05/07
EMI Testing System	AUDIX	e3 210616 dekra V9	HC-SR02	N/A	N/A	N/A

HC-SR12

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal. Date	Next Cal. Date
Signal & Spectrum Analyzer	R&S	FSV40	101869	10Hz-40GHz	2025/06/17	2026/06/16
USB Peak Power Sensor	Anritsu	MA24408A	11840	50 MHz to 8 GHz, High VBW(165 MHz / 350 kHz)	2025/07/18	2026/07/17

HC-CB04

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal. Date	Next Cal. Date
Magnetic Loop Antenna	Teseq	HLA 6121	44287	9kHz-30 MHz	2025/10/20	2026/10/19
Signal and Spectrum Analyzer	R&S	FSVA40	101435	10 Hz-40 GHz	2025/05/20	2026/05/19
Trilog Broadband Antenna	Schwarzbeck	VULB 9168	1209	30 MHz-2 GHz	2025/06/17	2026/06/16
Double Ridged Horn Antenna	RF SPIN	DRH18-E	211212A18EN	1G-18GHz	2025/11/03	2026/11/02
Horn Antenna	Schwarzbeck	BBHA 9170	203	18G-40GHz	2025/12/04	2026/12/03
Pre-Amplifier	DEKRA	AP-400C	201801231	18G-40 GHz,48 dB	2025/10/16	2026/10/15
Coaxial Cable	Huber+Suhner	SF104	HC-CB04	30 MHz-18 GHz, 11m	2025/08/07	2026/08/06
Coaxial Cable	Huber+Suhner, Rosnol	SF102_UP0264	HC-CB04-1	18-40 GHz, 3m	2025/08/13	2026/08/12
Pre-Amplifier	EMEC	EM01G18GA	060835	1-18 GHz,50 dB	2025/07/09	2026/07/08
Preamplifier	SGH	PRAMP0510	20200703	1G-8GHz	2026/01/10	2027/01/09
Radiated Software	AUDIX	e3 V9	HC-CB04_1	N/A	N/A	N/A

Note: All equipment upon which need to calibrated are with calibration period of 1 year.

2. Test Configuration of EUT

2.1. Test Condition

EUT Operational Condition	
Testing Voltage	AC 120V/60Hz

2.2. Test Frequency Mode

Test Software	cmd
---------------	-----

Modulation	Frequency (MHz)	Power Setting
802.11a	5180	18.5
	5220	19.0
	5240	17.0
	5260	17.5
	5300	17.5
	5320	18.5
	5500	18.5
	5580	16.5
	5700	14.0
	5720	14.0
	5745	13.5
	5785	14.0
	5825	16.5
802.11ac (20 MHz)	5180	19.5
	5220	20.0
	5240	18.0
	5260	18.5
	5300	18.5
	5320	20.0
	5500	19.5
	5580	18.5
	5700	17.0
	5720	18.0
	5745	15.0
	5785	15.0
	5825	17.5

Modulation	Frequency (MHz)	Power Setting
802.11ac (40 MHz)	5190	16.0
	5230	19.5
	5270	19.5
	5310	17.5
	5510	17.5
	5550	19.5
	5670	17.0
	5710	20.0
	5755	20.0
	5795	17.0
802.11ac (80 MHz)	5210	16.0
	5290	16.0
	5530	15.0
	5610	20.5
	5690	18.5
	5755	18.5

2.3. Duty Cycle

Modulation	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
802.11a	1.393	1.448	96.20	0.17	0.718
802.11ac (20 MHz)	1.310	1.368	95.80	0.19	0.763
802.11ac (40 MHz)	0.653	0.707	92.36	0.35	1.533
802.11ac (80 MHz)	0.323	0.377	85.68	0.67	3.096

Note: The duty factor will compensate for the total power and power spectral density.



2.4. The Worst Case Measurement Configuration

Tests Item	AC Power Line Conducted Emission
Test Condition	AC power line conducted measurement for line and neutral
Operating Mode	Transmit

Tests Item	Maximum Conducted Output Power
Test Condition	Conducted measurement at transmit chains

Tests Item	Transmitter Radiated Spurious Emission
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.
Operating Mode < 1GHz	Transmit
Operating Mode > 1GHz	Transmit
The EUT was performed at X axis, Y axis and Z axis position for radiated spurious emission test. The worst case was found at Z axis, so the measurement will follow this same test configuration.	

Tests Item	Simultaneous Transmission Analysis - Co-location RF Exposure Evaluation
Test Condition	
Operating Mode	Transmit
1	Wi-Fi 2.4 GHz + Bluetooth
2	Wi-Fi 5 GHz + Bluetooth
Refer to DEKRA Test Report No.: 2570766R-RFUSV17S-A1 for Co-location RF Exposure Evaluation.	


Note:

1. Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
2. For radiated emission below 1 GHz and AC power line conducted emission have performed all modes of operation were investigated and the worst-case emissions are reported.
3. The modulation and bandwidth are similar for 802.11n mode for HT20/HT40, 802.11ac mode for VHT20/VHT40 mode, therefore investigated worst case to representative mode in test report.

2.5. Tested System Details


No.	Equipment	Brand Name	Model No.	Serial No.
1	Adaptor	CWT	2AEK0655C	N/A
2	USB adapter	DEKRA	Z2	N/A
3	Notebook	ASUS	BX310U	J5N0CV04S32319B

2.6. Configuration of tested System

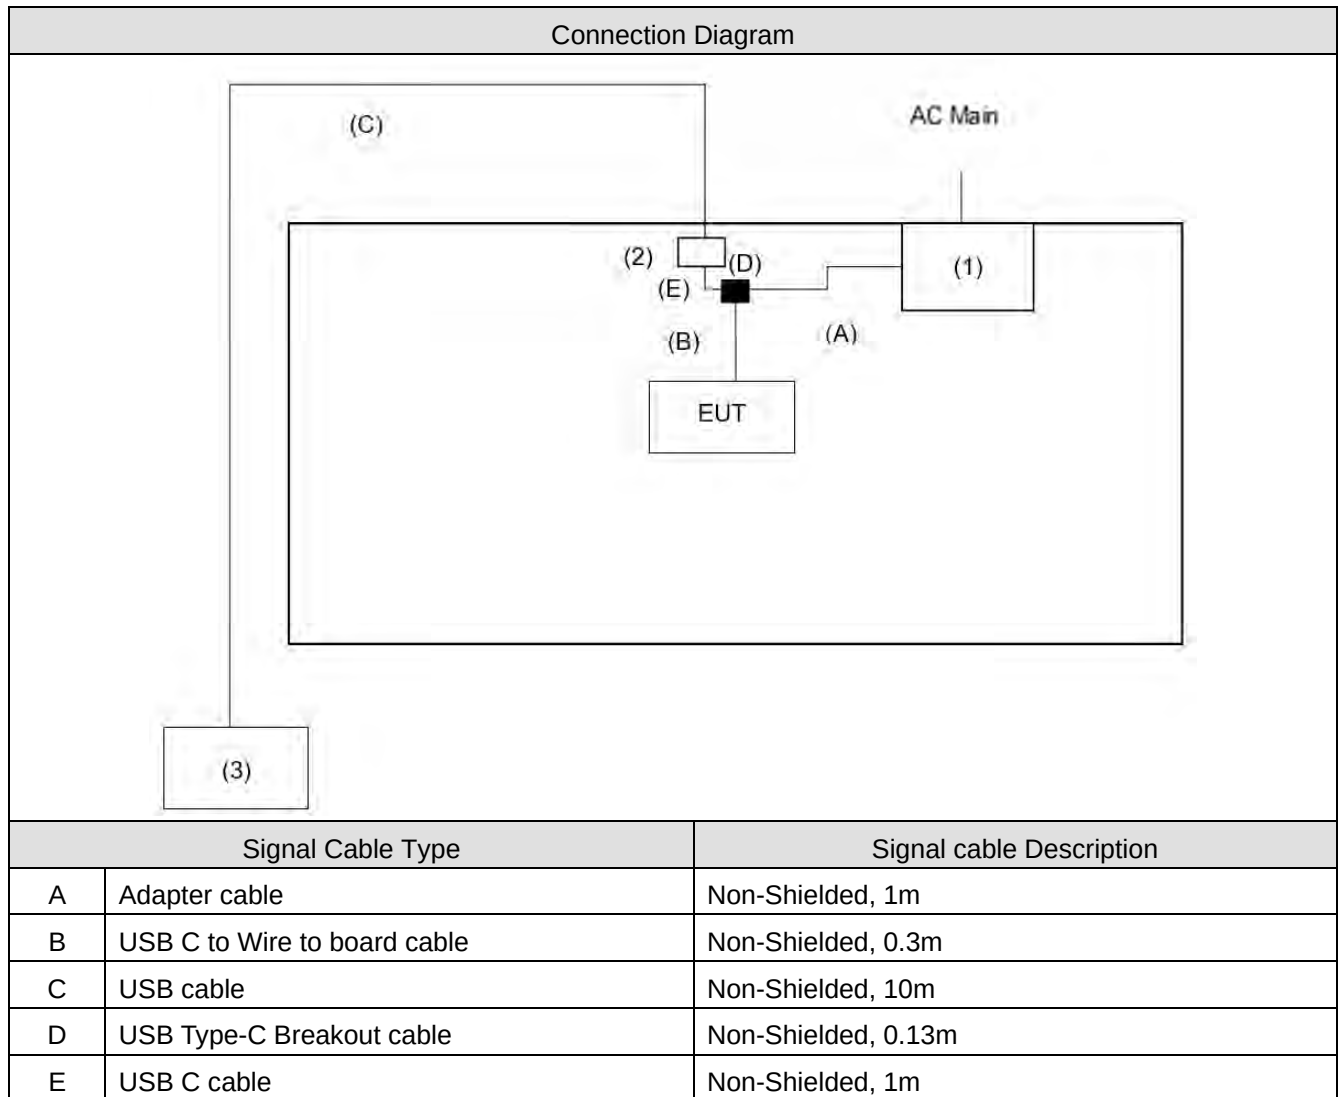

3. AC Power Line Conducted Emission

3.1. Test Setup

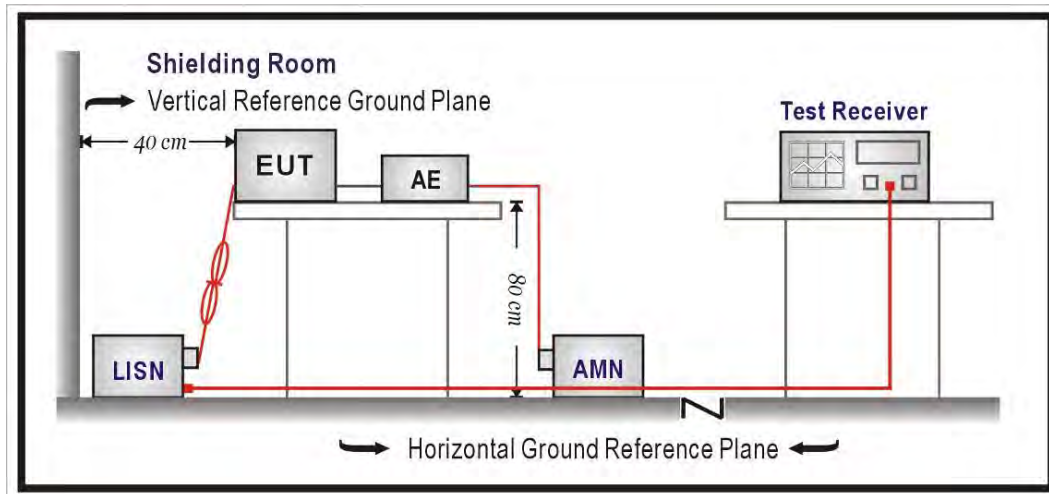

3.2. Test Limit

Frequency (MHz)	QP (dBuV)	AV (dBuV)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Remark: In the above table, the tighter limit applies at the band edges.

3.3. Test Procedure

The EUT was setup according to ANSI C63.10. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs.)

Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.

Conducted emissions were investigated over the frequency range from 0.15 MHz to 30 MHz using a receiver bandwidth of 9 kHz.


3.4. Test Result of AC Power Line Conducted Emission

Refer as Appendix A


4. Maximum Conducted Output Power

4.1. Test Setup

For straddle channels:

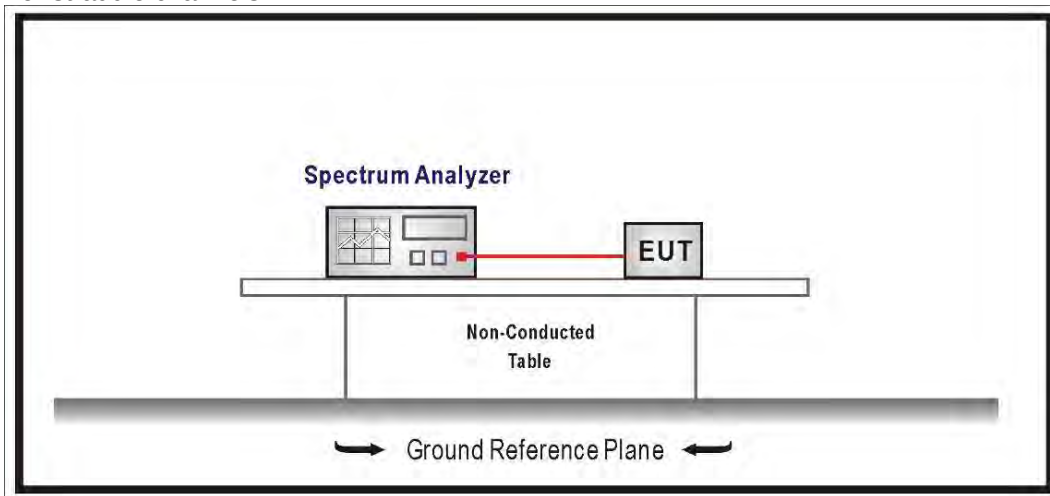

For other channels:

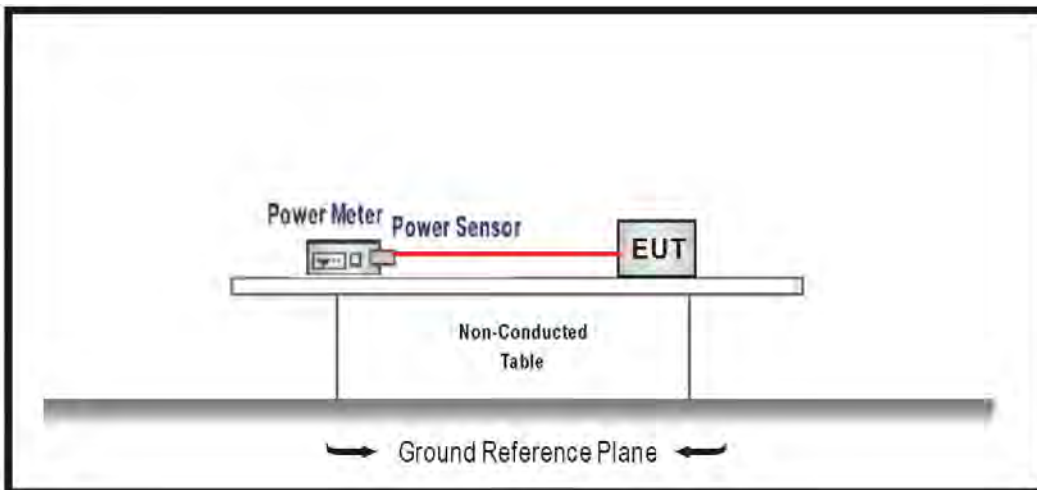

4.2. Test Limit

1. For an outdoor access point and an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
4. For the band 5.850–5.895 GHz:
For an indoor access point, the maximum e.i.r.p. over the frequency band of operation must not exceed 36 dBm. Indoor access points operating on a channel that spans the 5.725–5.850 GHz and 5.850–5.895 GHz bands must not exceed an e.i.r.p. of 36 dBm.
For client devices, the maximum e.i.r.p. over the frequency band of operation must not exceed 30 dBm. Client devices operating on a channel that spans the 5.725–5.850 GHz and 5.850–5.895 GHz bands must not exceed an e.i.r.p. of 30 dBm.
For a subordinate device, the maximum e.i.r.p. over the frequency band of operation must not exceed 36 dBm.

4.3. Test Procedure

The EUT was setup to ANSI C63.10; tested according to U-NII test procedure of KDB 789033.


4.4. Test Result of Maximum Conducted Output Power

Refer as Appendix B


5. Transmitter Radiated Spurious Emission

5.1. Test Setup


9 kHz ~ 30 MHz

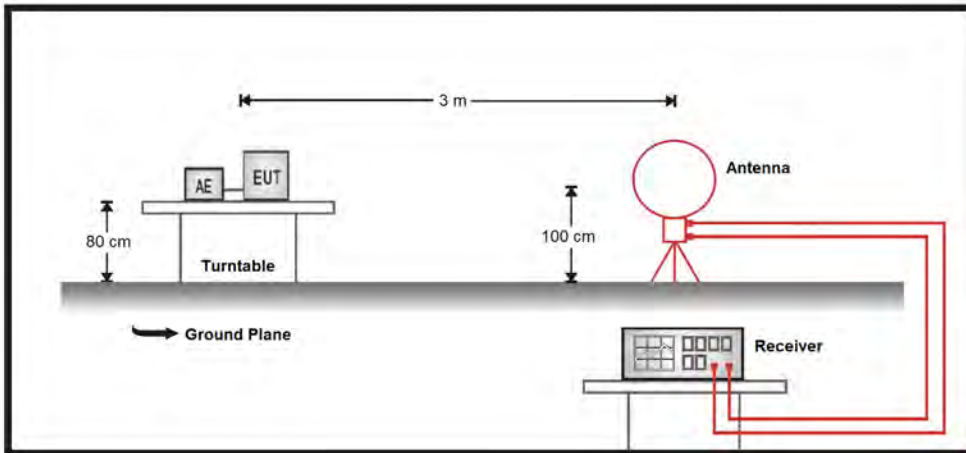

30 MHz ~ 1 GHz

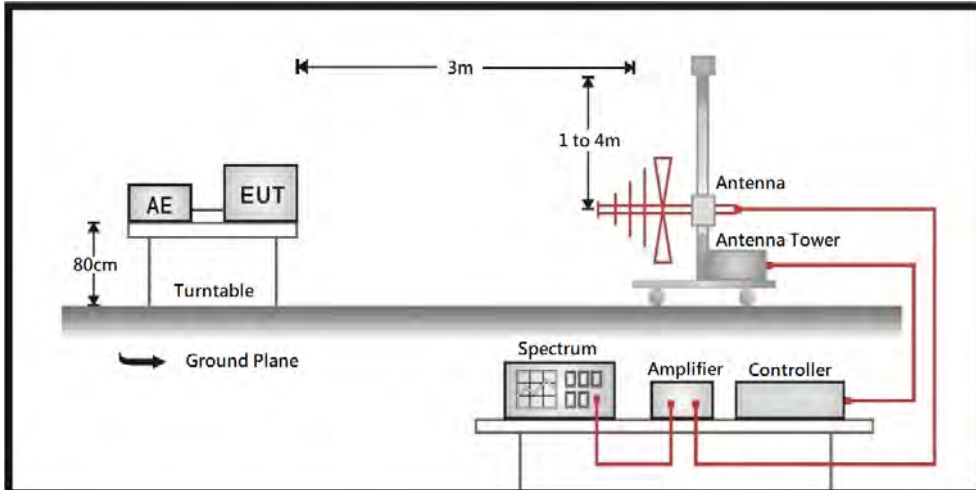

Above 1 GHz

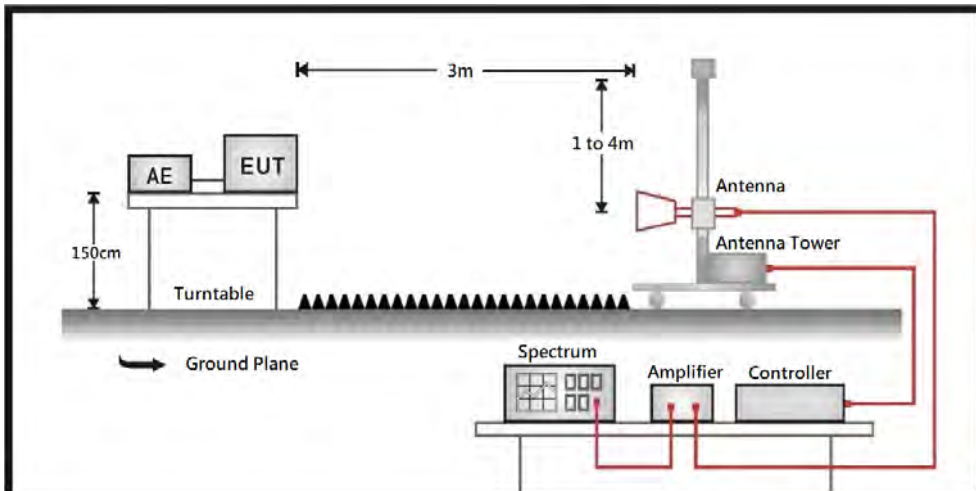

5.2. Test Limit

Frequency (MHz)	Field strength (uV/m)	Field strength (dBuV/m)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	20 log (2400/F(kHz))	300
0.490 – 1.705	24000/F(kHz)	20 log (24000/F(kHz))	30
1.705 - 30	30	29.5	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

Remarks:

1. Field strength (dBuV/m) = 20 log Field strength (uV/m)
2. In the Above Table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

Unwanted Emission out of the restricted bands Test Limit

Frequency (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength (dBuV/m@3m)
5150 – 5250	-27	68.2
5250 – 5350	-27	68.2
5470 – 5725	-27	68.2
5725 – 5850	-27 ^{*1}	68.2 ^{*1}
	10 ^{*2}	105.2 ^{*2}
	15.6 ^{*3}	110.8 ^{*3}
	27 ^{*4}	122.2 ^{*4}
5850 – 5895	(i) For an indoor access point or subordinate device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of 15 dBm/MHz and shall decrease linearly to an e.i.r.p. of -7 dBm/MHz at or above 5.925 GHz. (ii) For a client device, all emissions at or above 5.895 GHz shall not exceed an e.i.r.p. of -5 dBm/MHz and shall decrease linearly to an e.i.r.p. of -27 dBm/MHz at or above 5.925 GHz. (iii) For a client device or indoor access point or subordinate device, all emissions below 5.725 GHz shall not exceed an e.i.r.p. of -27 dBm/MHz at 5.65 GHz increasing linearly to 10 dBm/MHz at 5.7 GHz, and from 5.7 GHz increasing linearly to a level of 15.6 dBm/MHz at 5.72 GHz, and from 5.72 GHz increasing linearly to a level of 27 dBm/MHz at 5.725 GHz.	
^{*1} beyond 75 MHz or more above of the band edge.		
^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.		
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.		
^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.		

Remark:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \quad \text{uV/m, where P is the eirp (Watts).}$$

5.3. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 or 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10 on radiated measurement.

The additional latch filter below 1 GHz was used to measure the level of harmonics radiated emission during field strength of harmonics measurement.

The bandwidth below 1 GHz setting on the field strength meter is 120 kHz, above 1 GHz are 1 MHz.

The frequency range from 9 kHz to 10th harmonics and included The frequency range from the lowest oscillator frequency generated within the device up to the 10th harmonic was checked is checked.



5.4. Test Result of Transmitter Radiated Spurious Emission (Below 30 MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

5.5. Test Result of Transmitter Radiated Spurious Emission

Refer as Appendix C

Appendix A. Test Result of AC Power Line Conducted Emission

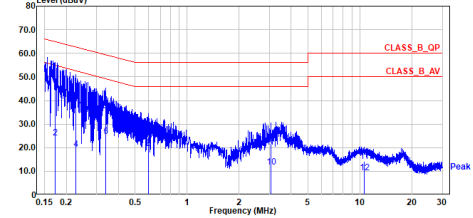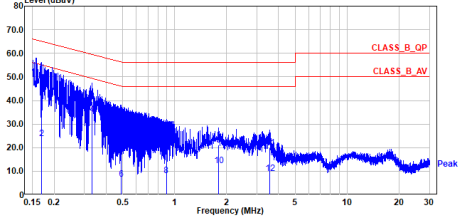TX_ac80_5530MHz_Line								TX_ac80_5530MHz_Neutral							
Site :HC-SR02 Condition :-----,Line Model No :TX_ac80_5530MHz Test By :Cyril Chen								Site :HC-SR02 Condition :-----,Neutral Model No :TX_ac80_5530MHz Test By :Cyril Chen							
															
No.	Frequency	Level	Limit	Over	Read	Factor	Remark	No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB			MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	0.173	45.68	64.81	-19.13	36.06	9.62	QP	1	0.170	46.88	64.98	-18.10	37.26	9.62	QP
2	0.173	24.02	54.81	-30.79	14.40	9.62	Average	2	0.170	23.87	54.98	-31.11	14.25	9.62	Average
3	0.227	39.74	62.57	-22.83	30.11	9.63	QP	3	0.333	39.46	59.39	-19.93	29.82	9.64	QP
4	0.227	19.41	52.57	-33.16	9.78	9.63	Average	4	0.333	33.97	49.39	-15.42	24.33	9.64	Average
5	0.337	35.65	59.27	-23.62	26.01	9.64	QP	5	0.488	28.02	56.20	-28.18	18.37	9.65	QP
6	0.337	24.90	49.27	-24.37	15.26	9.64	Average	6	0.488	6.74	46.20	-39.46	-2.91	9.65	Average
7	0.598	24.50	56.00	-31.50	14.84	9.66	QP	7	0.895	21.80	56.00	-34.20	12.10	9.70	QP
8	0.598	19.54	46.00	-26.46	9.88	9.66	Average	8	0.895	8.14	46.00	-37.86	-1.56	9.70	Average
9	3.055	21.66	56.00	-34.34	11.85	9.81	QP	9	1.805	21.18	56.00	-34.82	11.42	9.76	QP
10	3.055	11.68	46.00	-34.32	1.87	9.81	Average	10	1.805	12.38	46.00	-33.62	2.62	9.76	Average
11	10.585	14.23	60.00	-45.77	4.14	10.09	QP	11	3.570	19.83	56.00	-36.17	9.98	9.85	QP
12	10.585	9.21	50.00	-40.79	-0.88	10.09	Average	12	3.570	9.16	46.00	-36.84	-0.69	9.85	Average

Note:
1. *** means this data is the worst emission level.
2. Emission Level = Reading Level + Correct Factor
(Correct Factor = LISN Insertion Loss + Cable Loss).
3. Margin = Emission Level - Limit.

Note:
1. *** means this data is the worst emission level.
2. Emission Level = Reading Level + Correct Factor
(Correct Factor = LISN Insertion Loss + Cable Loss).
3. Margin = Emission Level - Limit.

Appendix B. Test Result of Maximum Conducted Output Power

Modulation	Frequency (MHz)	Maximum Conducted Output Power (dBm)				Antenna Gain (dBi)	E.I.R.P Power (dBm)	E.I.R.P Limit (dBm)
		Ant. 1	Ant. 2	Total	Limit			
802.11a	5180	19.070	18.690	21.894	24.00	2.980	24.874	30.00
	5220	19.040	18.680	21.874	24.00	2.980	24.854	30.00
	5240	18.570	18.740	21.666	24.00	2.980	24.646	30.00
	5260	19.220	19.390	22.316	24.00	2.980	25.296	30.00
	5300	19.290	19.510	22.412	24.00	2.980	25.392	30.00
	5320	19.110	18.710	21.925	24.00	2.980	24.905	30.00
	5500	19.100	18.960	22.041	24.00	2.980	25.021	30.00
	5580	19.020	18.620	21.835	24.00	2.980	24.815	30.00
	5700	15.030	15.140	18.096	24.00	2.980	21.076	30.00
	5720 (UNII-2C)	14.730	14.860	17.974	22.82	2.980	20.954	28.82
	5720 (UNII-3)	7.060	7.220	10.319	30.00	2.980	13.299	36.00
	5745	16.150	15.960	19.066	30.00	2.980	22.046	36.00
	5785	16.850	15.850	19.389	30.00	2.980	22.369	36.00
	5825	17.020	17.130	20.086	30.00	2.980	23.066	36.00
802.11ac (20 MHz)	5180	19.040	18.770	21.917	24.00	2.980	24.897	30.00
	5220	18.860	18.560	21.723	24.00	2.980	24.703	30.00
	5240	18.540	18.570	21.565	24.00	2.980	24.545	30.00
	5260	19.110	19.020	22.076	24.00	2.980	25.056	30.00
	5300	19.450	19.170	22.323	24.00	2.980	25.303	30.00
	5320	19.330	19.130	22.241	24.00	2.980	25.221	30.00
	5500	18.940	18.710	21.837	24.00	2.980	24.817	30.00
	5580	19.550	19.040	22.313	24.00	2.980	25.293	30.00
	5700	16.680	16.790	19.746	24.00	2.980	22.726	30.00
	5720 (UNII-2C)	16.460	17.240	20.064	22.82	2.980	23.044	28.82
	5720 (UNII-3)	9.210	9.860	12.744	30.00	2.980	15.724	36.00
	5745	16.780	16.080	19.454	30.00	2.980	22.434	36.00
	5785	16.720	16.270	19.511	30.00	2.980	22.491	36.00
	5825	16.740	17.120	19.944	30.00	2.980	22.924	36.00

Note: For straddle channels, the total power = conducted output power + duty factor, and the duty factor refer to section 2.3.


Modulation	Frequency (MHz)	Maximum Conducted Output Power (dBm)				Antenna Gain (dBi)	E.I.R.P Power (dBm)	E.I.R.P Limit (dBm)
		Ant. 1	Ant. 2	Total	Limit			
802.11ac (40 MHz)	5190	16.040	15.870	18.966	24.00	2.980	21.946	30.00
	5230	20.280	20.450	23.376	24.00	2.980	26.356	30.00
	5270	20.680	20.570	23.636	24.00	2.980	26.616	30.00
	5310	16.210	15.880	19.058	24.00	2.980	22.038	30.00
	5510	16.080	15.940	19.021	24.00	2.980	22.001	30.00
	5550	20.780	20.370	23.590	24.00	2.980	26.570	30.00
	5670	17.380	17.360	20.380	24.00	2.980	23.360	30.00
	5710 (UNII-2C)	18.930	19.620	22.644	24.00	2.980	25.624	30.00
	5710 (UNII-3)	7.200	7.420	10.667	30.00	2.980	13.647	36.00
	5755	19.490	20.040	22.784	30.00	2.980	25.764	36.00
	5795	18.420	18.070	21.259	30.00	2.980	24.239	36.00
802.11ac (80 MHz)	5210	15.720	15.420	18.583	24.00	2.980	21.563	30.00
	5290	15.870	15.460	18.680	24.00	2.980	21.660	30.00
	5530	15.030	15.140	18.096	24.00	2.980	21.076	30.00
	5610	20.040	19.990	23.025	24.00	2.980	26.005	30.00
	5690 (UNII-2C)	17.820	17.890	21.537	24.00	2.980	24.517	30.00
	5690 (UNII-3)	2.640	3.110	6.563	30.00	2.980	9.543	36.00
	5775	18.140	18.420	21.293	30.00	2.980	24.273	36.00

Note: For straddle channels, the total power = conducted output power + duty factor, and the duty factor refer to section 2.3.


For Straddle Channels:

Spectrum plot value of power


802.11a / Ant. 1 / 5720 MHz (UNII-2C)

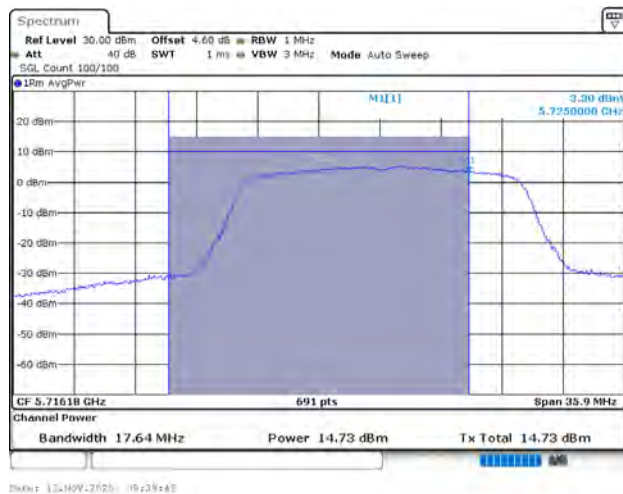


802.11a / Ant. 1 / 5720 MHz (UNII-3)

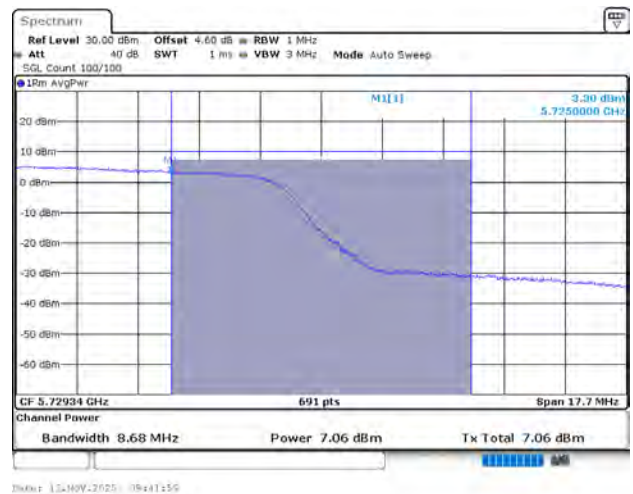


802.11a / Ant. 2 / 5720 MHz (UNII-2C)

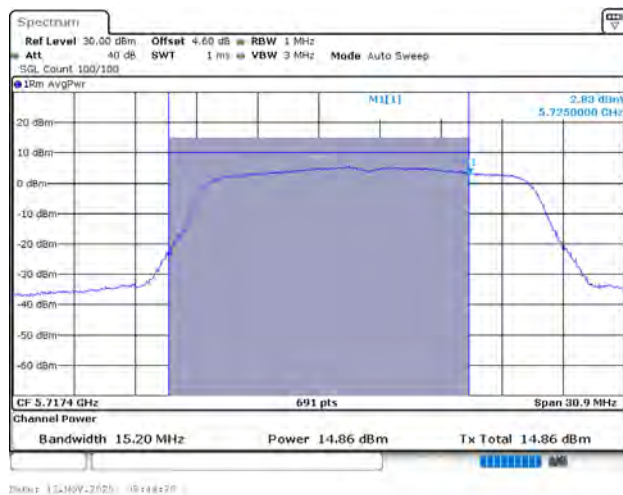


802.11a / Ant. 2 / 5720 MHz (UNII-3)

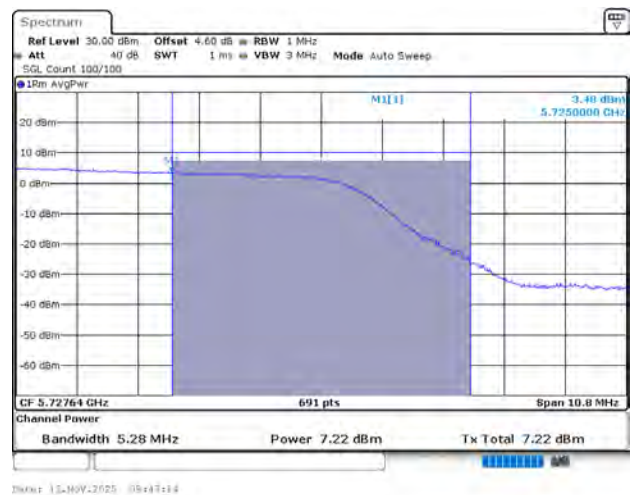

802.11ac (20 MHz) / Ant. 1 / 5720 MHz (UNII-2C)

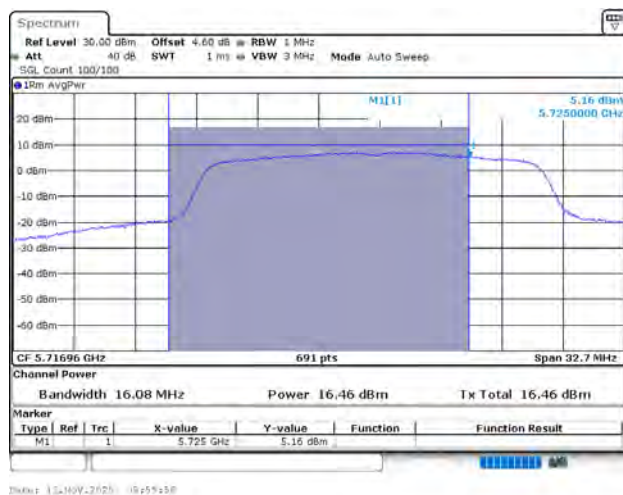


802.11ac (20 MHz) / Ant. 1 / 5720 MHz (UNII-3)

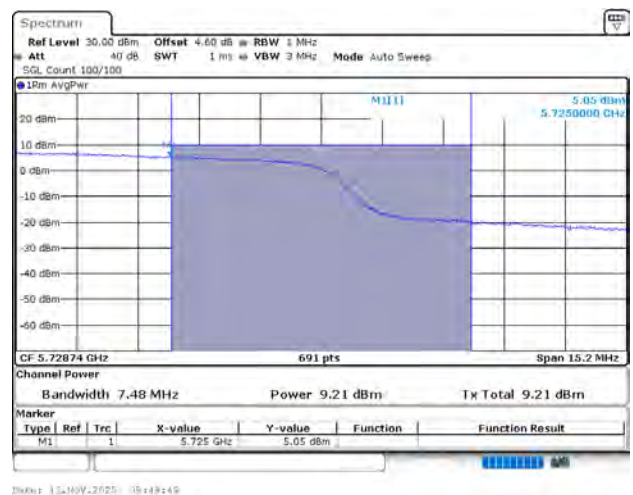


Spectrum plot value of power


802.11ac (20 MHz) / Ant. 2 / 5720 MHz (UNII-2C)

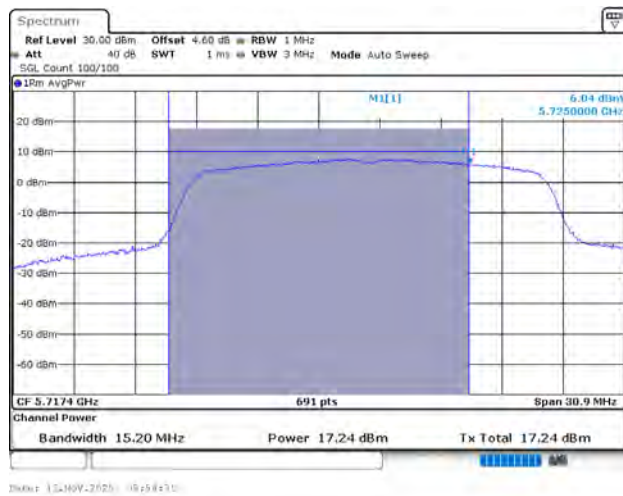


802.11ac (20 MHz) / Ant. 2 / 5720 MHz (UNII-3)

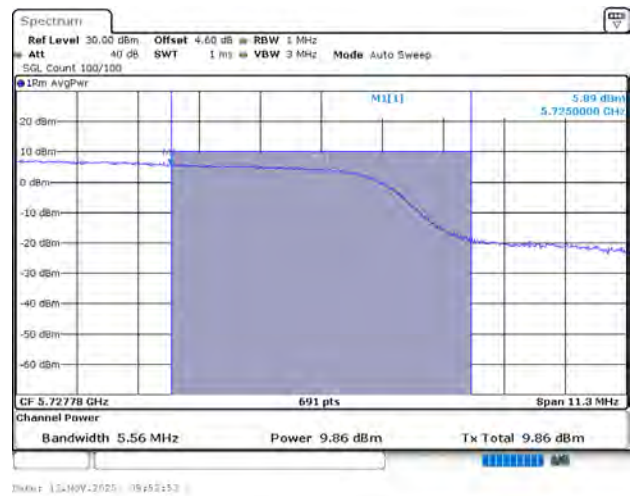


802.11ac (40 MHz) / Ant. 1 / 5710 MHz (UNII-2C)

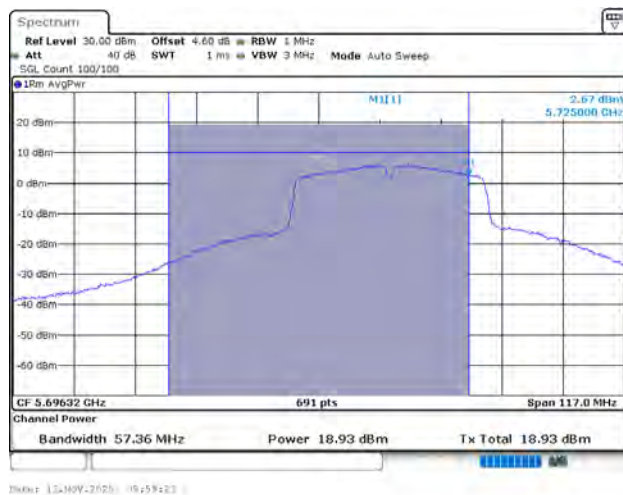


802.11ac (40 MHz) / Ant. 1 / 5710 MHz (UNII-3)

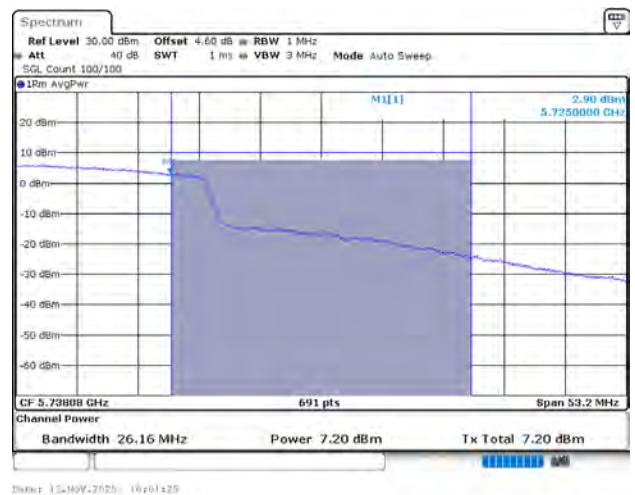

802.11ac (40 MHz) / Ant. 2 / 5710 MHz (UNII-2C)

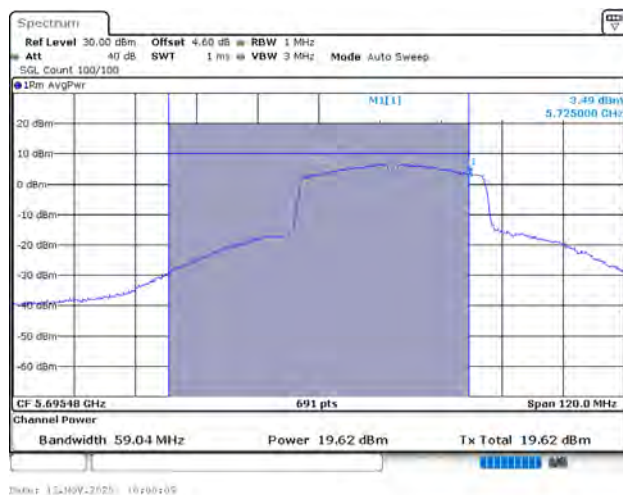


802.11ac (40 MHz) / Ant. 2 / 5710 MHz (UNII-3)

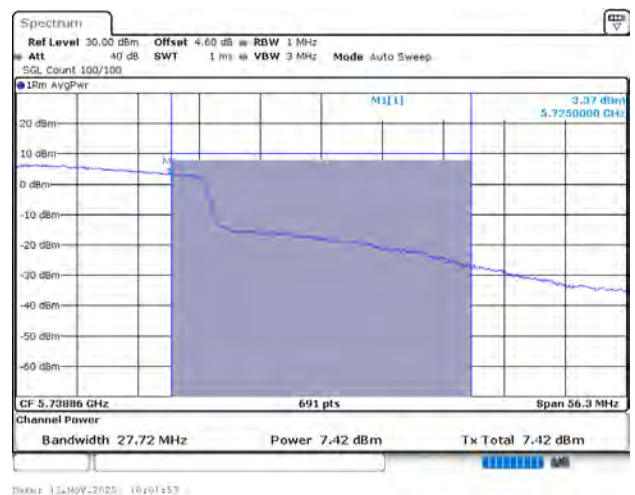


Spectrum plot value of power


802.11ac (80 MHz) / Ant. 1 / 5690 MHz (UNII-2C)

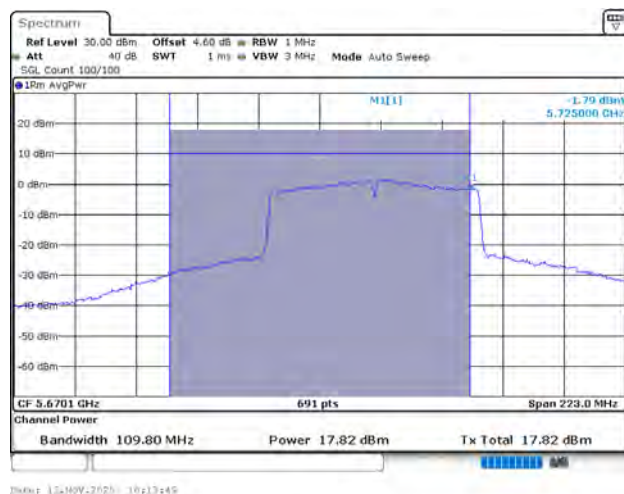


802.11ac (80 MHz) / Ant. 1 / 5690 MHz (UNII-3)

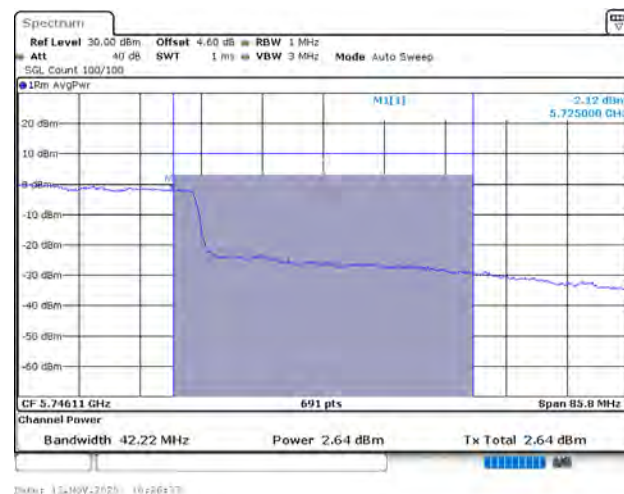

802.11ac (80 MHz) / Ant. 2 / 5690 MHz (UNII-2C)

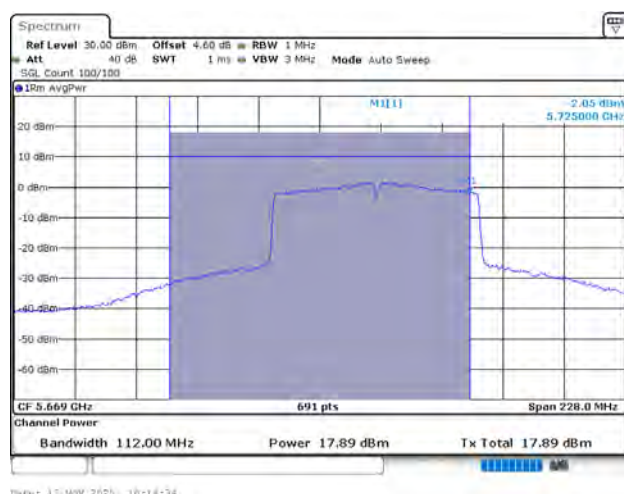


802.11ac (80 MHz) / Ant. 2 / 5690 MHz (UNII-3)

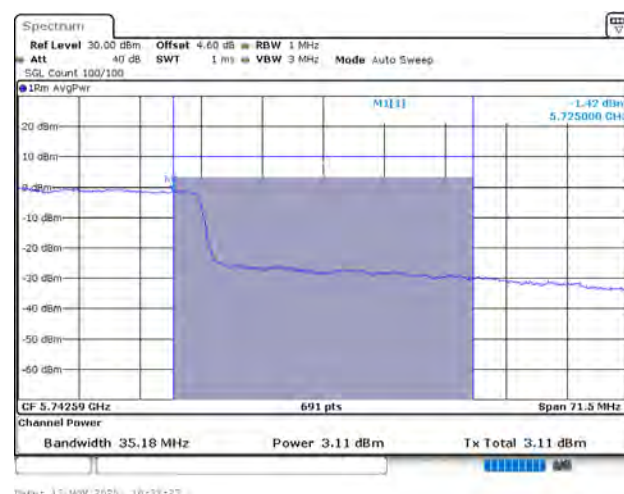

Appendix C. Test Result of Transmitter Radiated Spurious Emission

TX_a_5180MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5180MHz
Test By :Cyril Chen

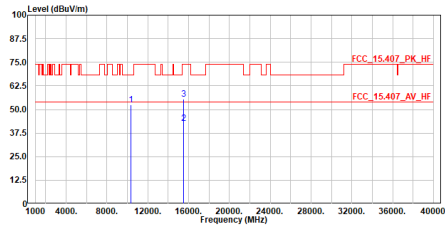


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10360.000	52.34	68.20	-15.86	59.86	-7.52	Peak
2	15540.000	42.67	54.00	-11.33	45.64	-2.97	Average
3	15540.000	55.56	74.00	-18.44	58.53	-2.97	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5180MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5180MHz
Test By :Cyril Chen

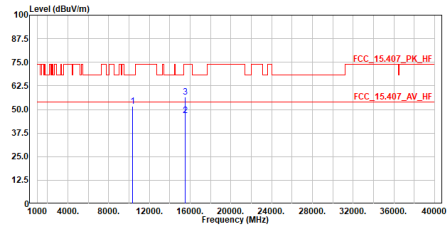


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10360.000	51.68	68.20	-16.52	59.20	-7.52	Peak
2	15540.000	46.71	54.00	-7.29	49.68	-2.97	Average
3	15540.000	56.58	74.00	-17.42	59.55	-2.97	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5220MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5220MHz
Test By :Cyril Chen

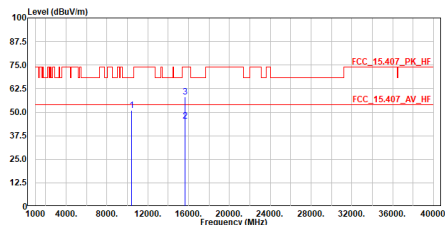


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10440.000	51.02	68.20	-17.18	58.40	-7.38	Peak
2	15660.000	45.43	54.00	-8.57	48.35	-2.92	Average
3	15660.000	58.30	74.00	-15.70	61.22	-2.92	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5220MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5220MHz
Test By :Cyril Chen

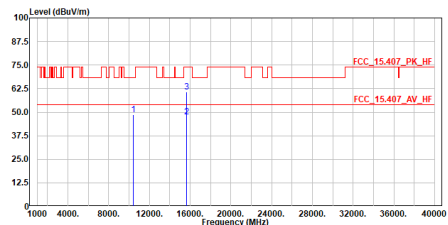


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	10440.000	48.59	68.20	-19.61	55.97	-7.38	Peak
2	15660.000	47.60	54.00	-6.40	50.52	-2.92	Average
3	15660.000	60.71	74.00	-13.29	63.63	-2.92	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5240MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5240MHz
Test By :Cyril Chen

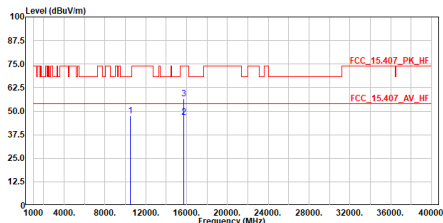


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10480.000	47.46	68.20	-20.74	54.78	-7.32	Peak
2	15720.000	46.65	54.00	-7.35	49.54	-2.89	Average
3	15720.000	56.43	74.00	-17.57	59.32	-2.89	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5240MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5240MHz
Test By :Cyril Chen

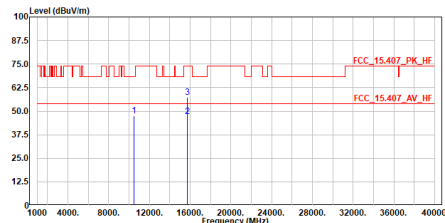


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10480.000	47.65	68.20	-20.55	54.97	-7.32	Peak
2	15720.000	47.29	54.00	-6.71	50.18	-2.89	Average
3	15720.000	57.30	74.00	-16.70	60.19	-2.89	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5260MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5260MHz
Test By :Cyril Chen

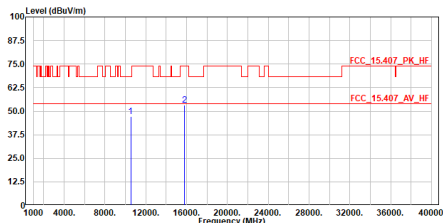


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10520.000	46.99	68.20	-21.21	54.25	-7.26	Peak
2	15780.000	53.22	74.00	-20.78	56.09	-2.87	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5260MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5260MHz
Test By :Cyril Chen

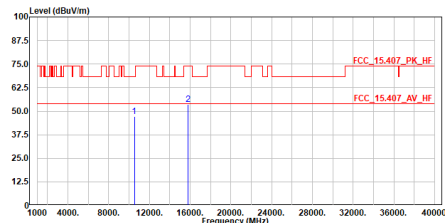


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10520.000	47.32	68.20	-20.88	54.58	-7.26	Peak
2	15780.000	53.76	74.00	-20.24	56.63	-2.87	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5300MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5300MHz
Test By :Cyril Chen

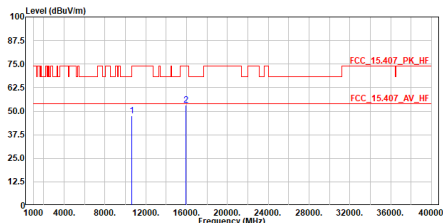


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10600.000	47.45	74.00	-26.55	54.60	-7.15	Peak
2	15900.000	53.12	74.00	-20.88	55.94	-2.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5300MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5300MHz
Test By :Cyril Chen

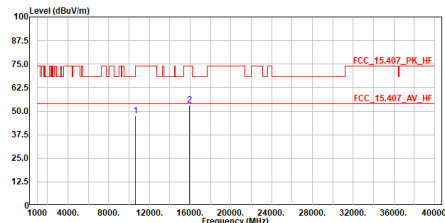


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10600.000	47.56	74.00	-26.44	54.71	-7.15	Peak
2	15900.000	53.16	74.00	-20.84	55.98	-2.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5320MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5320MHz
Test By :Cyril Chen

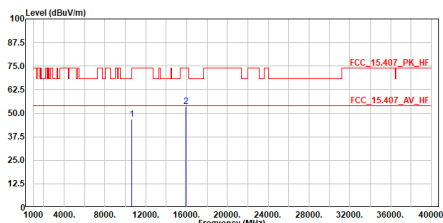


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10640.000	46.95	74.00	-27.05	54.03	-7.08	Peak
2	15960.000	53.74	74.00	-20.26	56.53	-2.79	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5320MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5320MHz
Test By :Cyril Chen

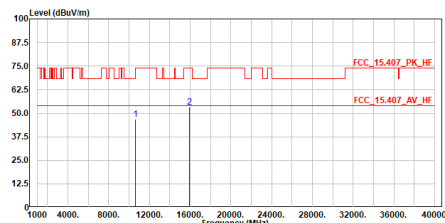


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10640.000	46.82	74.00	-27.18	53.90	-7.08	Peak
2	15960.000	53.17	74.00	-20.83	55.96	-2.79	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5500MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5500MHz
Test By :Cyril Chen

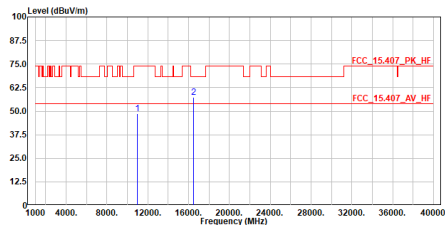


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11000.000	48.73	74.00	-25.27	55.29	-6.56	Peak
2	16500.000	57.19	68.20	-11.01	60.01	-2.82	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5500MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5500MHz
Test By :Cyril Chen

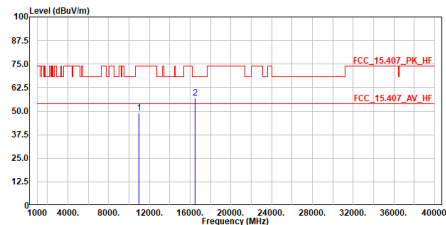


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11000.000	49.13	74.00	-24.87	55.69	-6.56	Peak
2	16500.000	57.06	68.20	-11.14	59.88	-2.82	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5580MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5580MHz
Test By :Cyril Chen

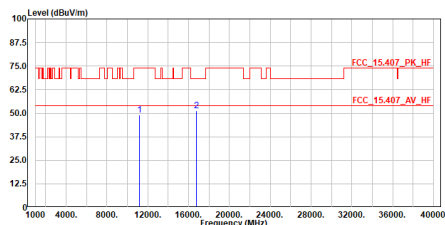


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11160.000	49.06	74.00	-24.94	55.31	-6.25	Peak
2	16740.000	51.25	68.20	-16.95	54.12	-2.87	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5580MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5580MHz
Test By :Cyril Chen

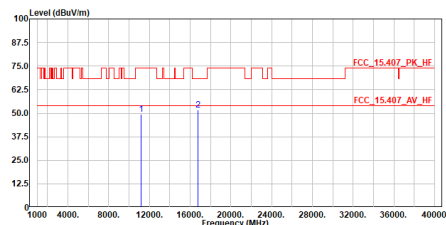


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11160.000	49.35	74.00	-24.65	55.60	-6.25	Peak
2	16740.000	51.58	68.20	-16.62	54.45	-2.87	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5700MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5700MHz
Test By :Cyril Chen

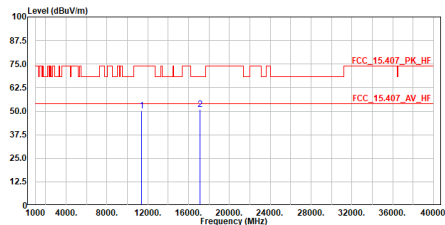


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11400.000	58.07	74.00	-23.93	55.85	-5.78	Peak
2	17100.000	51.13	68.20	-17.07	53.95	-2.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5700MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5700MHz
Test By :Cyril Chen

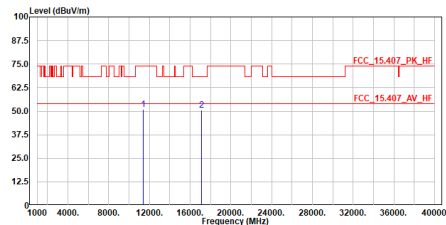


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11400.000	58.99	74.00	-23.01	56.77	-5.78	Peak
2	17100.000	58.43	68.20	-17.77	53.25	-2.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5720MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5720MHz
Test By :Cyril Chen

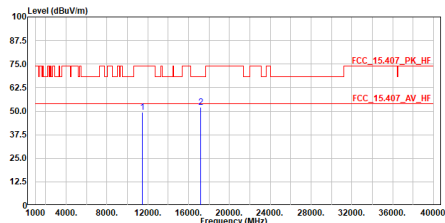


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11400.000	49.26	74.00	-24.74	54.96	-5.70	Peak
2	17100.000	52.26	68.20	-15.94	55.02	-2.76	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5720MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5720MHz
Test By :Cyril Chen

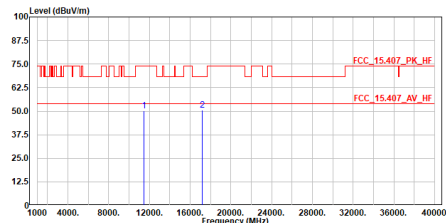


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11400.000	50.24	74.00	-23.76	55.94	-5.70	Peak
2	17100.000	50.61	68.20	-17.59	53.37	-2.76	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5745MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5745MHz
Test By :Cyril Chen

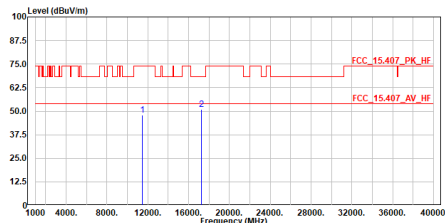


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11490.000	48.10	74.00	-25.90	53.70	-5.60	Peak
2	17235.000	50.97	68.20	-17.23	53.65	-2.68	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5745MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5745MHz
Test By :Cyril Chen

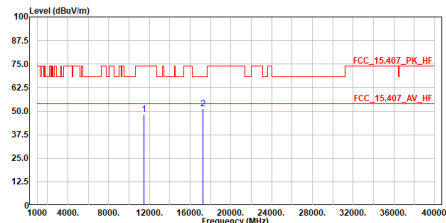


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11490.000	48.16	74.00	-25.84	53.76	-5.60	Peak
2	17235.000	51.42	68.20	-16.78	54.10	-2.68	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5785MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5785MHz
Test By :Cyril Chen

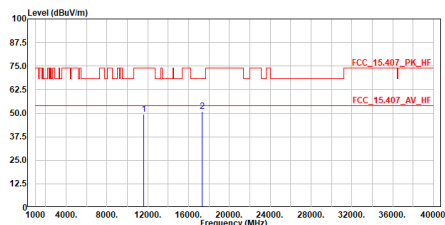


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11570.000	49.39	74.00	-24.61	54.90	-5.51	Peak
2	17355.000	50.78	68.20	-17.42	53.35	-2.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5785MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5785MHz
Test By :Cyril Chen

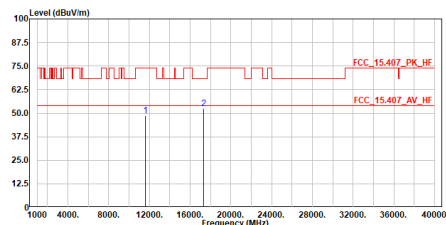


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11570.000	48.84	74.00	-25.16	54.35	-5.51	Peak
2	17355.000	52.28	68.20	-15.92	54.85	-2.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5825MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5825MHz
Test By :Cyril Chen

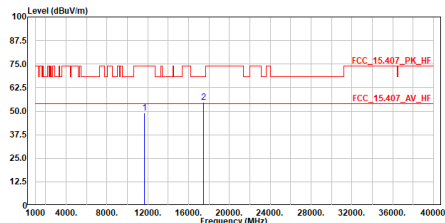


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11650.000	48.98	74.00	-25.02	54.40	-5.42	Peak
2	17475.000	54.58	68.20	-13.62	57.02	-2.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5825MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5825MHz
Test By :Cyril Chen

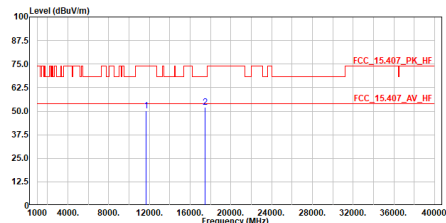


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11650.000	50.28	74.00	-23.72	55.70	-5.42	Peak
2	17475.000	52.26	68.20	-15.94	54.70	-2.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5180MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5180MHz
Test By :Cyril Chen

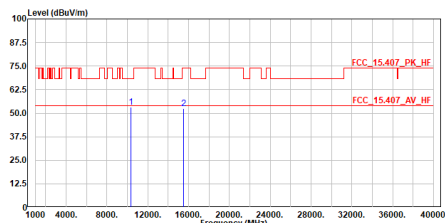


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10360.000	53.15	68.20	-15.05	60.67	-7.52	Peak
2	15540.000	52.58	74.00	-21.42	55.55	-2.97	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5180MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5180MHz
Test By :Cyril Chen

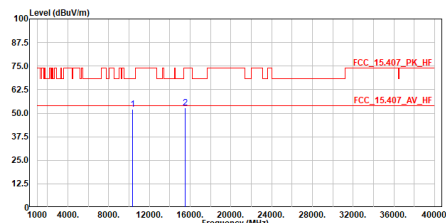


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10360.000	52.06	68.20	-16.14	59.58	-7.52	Peak
2	15540.000	52.90	74.00	-21.10	55.87	-2.97	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5220MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5220MHz
Test By :Cyril Chen

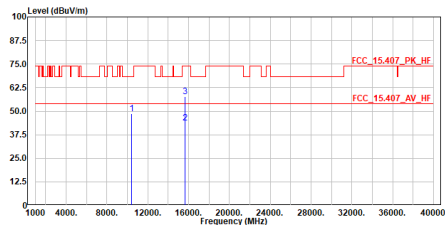


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10440.000	48.80	68.20	-19.40	56.18	-7.38	Peak
2	15660.000	43.83	54.00	-10.17	46.75	-2.92	Average
3	15660.000	57.92	74.00	-16.08	60.84	-2.92	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5220MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5220MHz
Test By :Cyril Chen

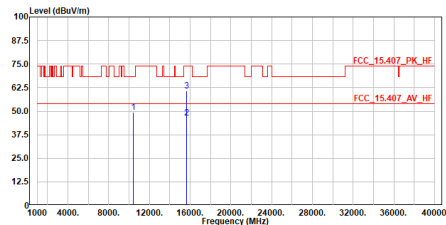


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10440.000	49.53	68.20	-18.67	56.91	-7.38	Peak
2	15660.000	46.31	54.00	-7.69	49.23	-2.92	Average
3	15660.000	60.59	74.00	-13.41	63.51	-2.92	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5240MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5240MHz
Test By :Cyril Chen

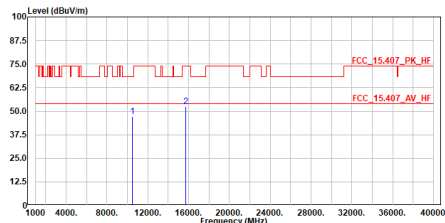


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10480.000	47.11	68.20	-21.09	54.43	-7.32	Peak
2	15720.000	52.38	74.00	-21.62	55.27	-2.89	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5240MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5240MHz
Test By :Cyril Chen

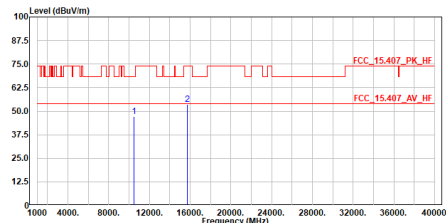


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10480.000	47.13	68.20	-21.07	54.45	-7.32	Peak
2	15720.000	53.62	74.00	-20.38	56.51	-2.89	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5260MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5260MHz
Test By :Cyril Chen

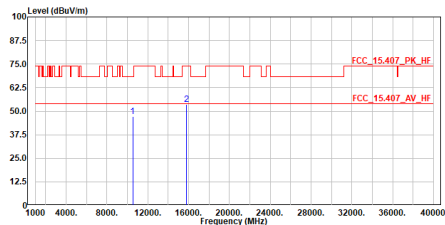


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10520.000	47.10	68.20	-21.10	54.36	-7.26	Peak
2	15780.000	53.41	74.00	-20.59	56.28	-2.87	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5260MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5260MHz
Test By :Cyril Chen

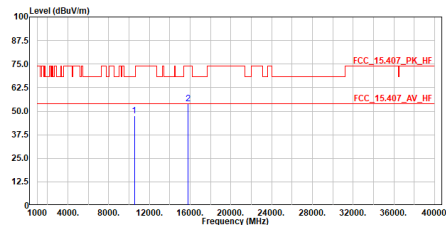


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10520.000	47.61	68.20	-20.59	54.87	-7.26	Peak
2	15780.000	53.97	74.00	-20.03	56.84	-2.87	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5300MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5300MHz
Test By :Cyril Chen

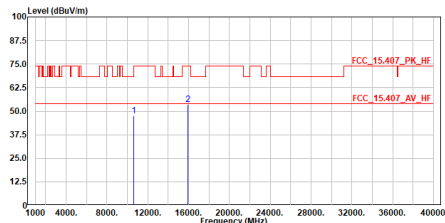


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10600.000	47.37	74.00	-26.63	54.52	-7.15	Peak
2	15900.000	53.75	74.00	-20.25	56.57	-2.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5300MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5300MHz
Test By :Cyril Chen

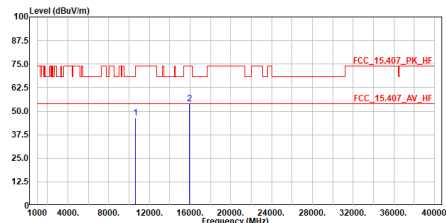


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10600.000	46.35	74.00	-27.65	53.50	-7.15	Peak
2	15900.000	53.95	74.00	-20.05	56.77	-2.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5320MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5320MHz
Test By :Cyril Chen

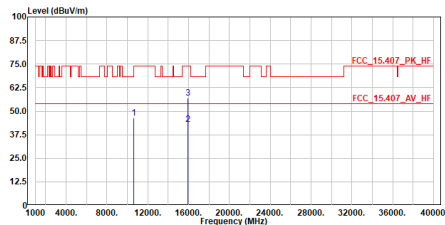


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10640.000	46.42	74.00	-27.58	53.50	-7.08	Peak
2	15960.000	42.99	54.00	-11.01	45.78	-2.79	Average
3	15960.000	56.92	74.00	-17.08	59.71	-2.79	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5320MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5320MHz
Test By :Cyril Chen

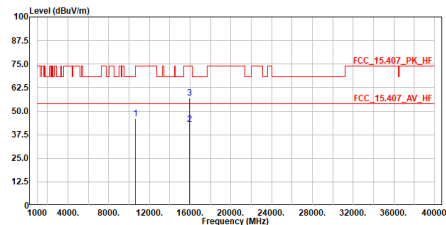


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	10640.000	45.93	74.00	-28.07	53.01	-7.08	Peak
2	15960.000	43.04	54.00	-10.96	45.83	-2.79	Average
3	15960.000	57.04	74.00	-16.96	59.83	-2.79	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5500MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5500MHz
Test By :Cyril Chen

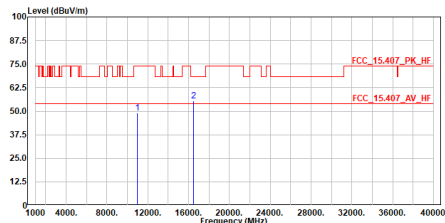


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11000.000	48.95	74.00	-25.05	55.51	-6.56	Peak
2	16500.000	55.57	68.20	-12.63	58.39	-2.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5500MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5500MHz
Test By :Cyril Chen

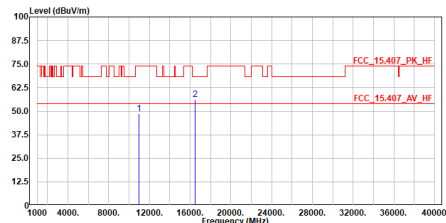


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	11000.000	48.72	74.00	-25.28	55.28	-6.56	Peak
2	16500.000	56.21	68.20	-11.99	59.03	-2.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5580MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5580MHz
Test By :Cyril Chen

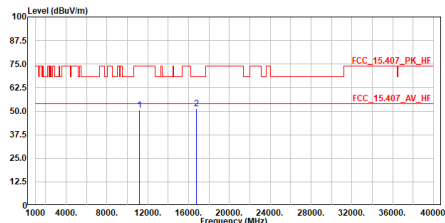


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11168.000	50.58	74.00	-23.42	56.83	-6.25	Peak
2	16740.000	51.17	68.20	-17.03	54.84	-2.87	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5580MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5580MHz
Test By :Cyril Chen

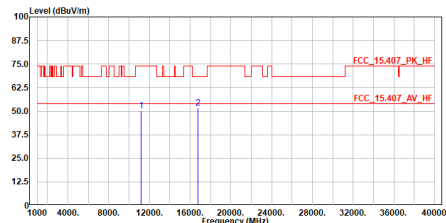


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11168.000	50.22	74.00	-23.78	56.47	-6.25	Peak
2	16740.000	51.79	68.20	-16.41	54.66	-2.87	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5700MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5700MHz
Test By :Cyril Chen

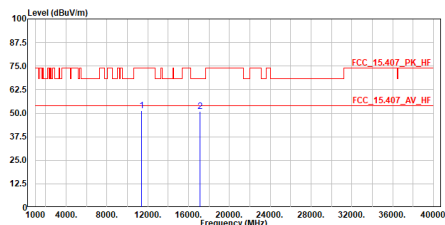


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11400.000	51.47	74.00	-22.53	57.25	-5.78	Peak
2	17100.000	50.84	68.20	-17.36	53.66	-2.82	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5700MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5700MHz
Test By :Cyril Chen

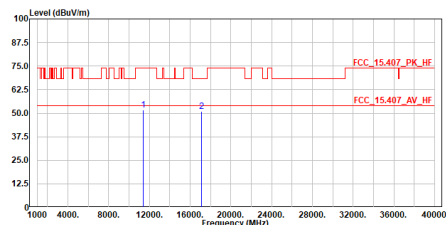


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11400.000	51.73	74.00	-22.27	57.51	-5.78	Peak
2	17100.000	50.83	68.20	-17.37	53.65	-2.82	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5720MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5720MHz
Test By :Cyril Chen

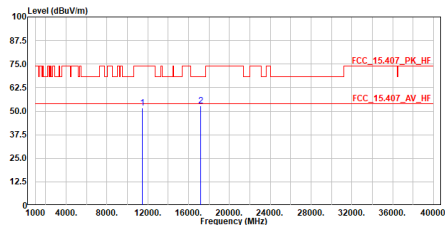


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11448.000	51.75	74.00	-22.25	57.45	-5.70	Peak
2	17160.000	52.81	68.20	-15.39	55.57	-2.76	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5720MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5720MHz
Test By :Cyril Chen

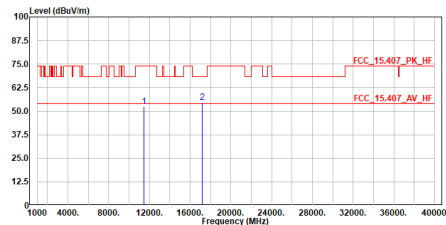


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11448.000	52.59	74.00	-21.41	58.29	-5.70	Peak
2	17160.000	54.60	68.20	-13.60	57.36	-2.76	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5745MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5745MHz
Test By :Cyril Chen

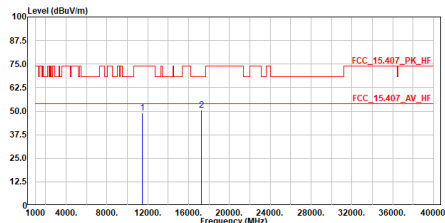


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11490.000	49.04	74.00	-24.96	54.64	-5.60	Peak
2	17235.000	50.38	68.20	-17.82	53.06	-2.68	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5745MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5745MHz
Test By :Cyril Chen

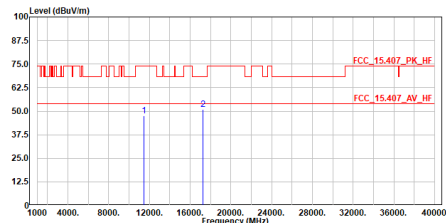


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11490.000	47.73	74.00	-26.27	53.33	-5.60	Peak
2	17235.000	50.95	68.20	-17.25	53.63	-2.68	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5785MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5785MHz
Test By :Cyril Chen

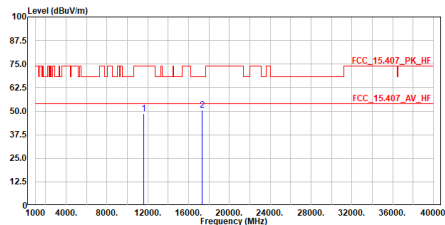


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11570.000	48.86	74.00	-25.14	54.37	-5.51	Peak
2	17355.000	50.62	68.20	-17.58	53.19	-2.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5785MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5785MHz
Test By :Cyril Chen

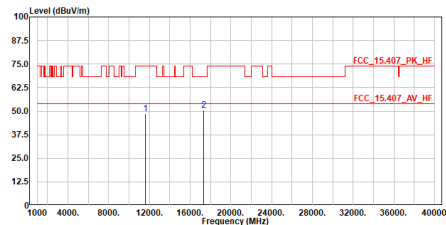


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11570.000	48.53	74.00	-25.47	54.04	-5.51	Peak
2	17355.000	50.46	68.20	-17.74	53.03	-2.57	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5825MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5825MHz
Test By :Cyril Chen

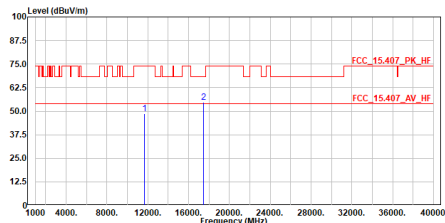


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11650.000	48.73	74.00	-25.27	54.15	-5.42	Peak
2	17475.000	54.67	68.20	-13.53	57.11	-2.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5825MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5825MHz
Test By :Cyril Chen

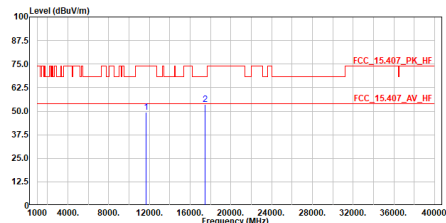


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11650.000	49.51	74.00	-24.49	54.93	-5.42	Peak
2	17475.000	53.46	68.20	-14.74	55.90	-2.44	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5190MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac40_5190MHz
Test By :Cyril Chen

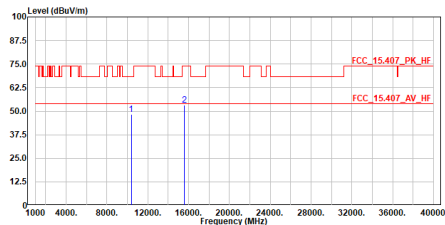


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10380.000	48.29	68.20	-19.91	55.76	-7.47	Peak
2	15570.000	53.22	74.00	-20.78	56.18	-2.96	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5190MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac40_5190MHz
Test By :Cyril Chen

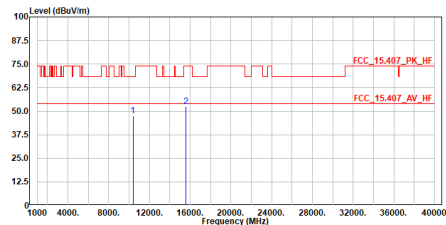


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10380.000	47.67	68.20	-20.53	55.14	-7.47	Peak
2	15570.000	52.27	74.00	-21.73	55.23	-2.96	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5230MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac40_5230MHz
Test By :Cyril Chen

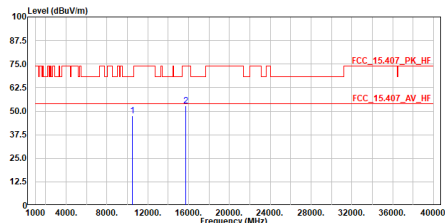


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10460.000	47.69	68.20	-20.51	55.04	-7.35	Peak
2	15690.000	52.94	74.00	-21.06	55.84	-2.90	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5230MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac40_5230MHz
Test By :Cyril Chen

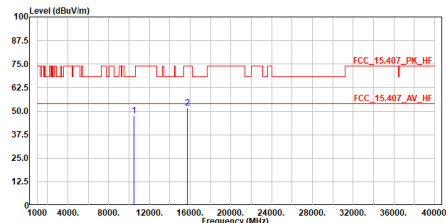


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10460.000	47.60	68.20	-20.60	54.95	-7.35	Peak
2	15690.000	51.53	74.00	-22.47	54.43	-2.90	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5270MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac40_5270MHz
Test By :Cyril Chen

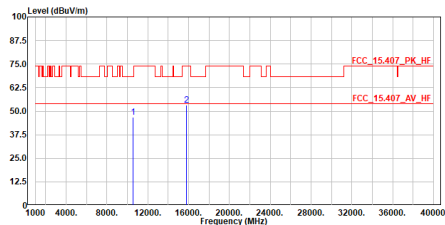


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10540.000	46.63	68.20	-21.57	53.87	-7.24	Peak
2	15810.000	53.34	74.00	-20.66	56.20	-2.86	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5270MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac40_5270MHz
Test By :Cyril Chen

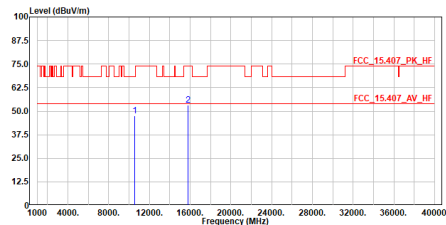


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10540.000	47.37	68.20	-20.83	54.61	-7.24	Peak
2	15810.000	53.37	74.00	-20.63	56.23	-2.86	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5310MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac40_5310MHz
Test By :Cyril Chen

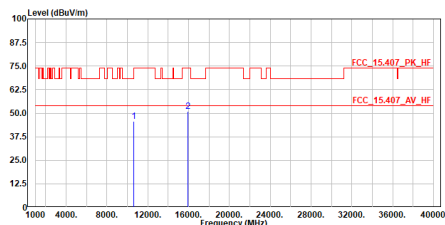


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10620.000	45.76	74.00	-28.24	52.88	-7.12	Peak
2	15930.000	50.83	74.00	-23.17	53.64	-2.81	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5310MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac40_5310MHz
Test By :Cyril Chen

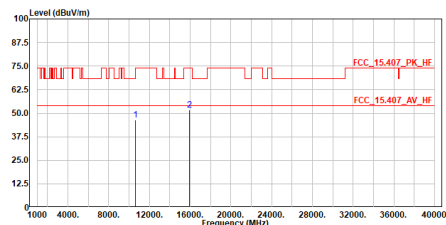


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10620.000	46.43	74.00	-27.57	53.55	-7.12	Peak
2	15930.000	51.64	74.00	-22.36	54.45	-2.81	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5510MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac40_5510MHz
Test By :Cyril Chen

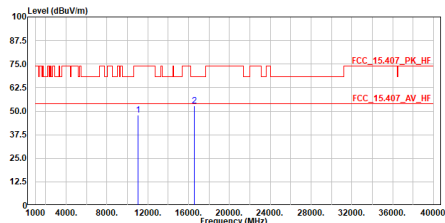


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11020.000	48.05	74.00	-25.95	54.57	-6.52	Peak
2	16530.000	52.90	68.20	-15.30	55.73	-2.83	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5510MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac40_5510MHz
Test By :Cyril Chen

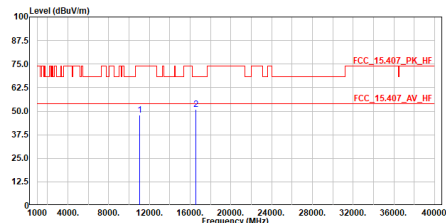


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11020.000	47.77	74.00	-26.23	54.29	-6.52	Peak
2	16530.000	51.10	68.20	-17.10	53.93	-2.83	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5550MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac40_5550MHz
Test By :Cyril Chen

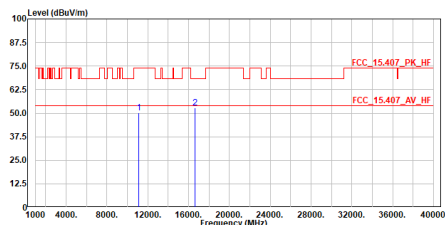


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11100.000	50.15	74.00	-23.85	56.52	-6.37	Peak
2	16650.000	52.72	68.20	-15.48	55.57	-2.85	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5550MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac40_5550MHz
Test By :Cyril Chen

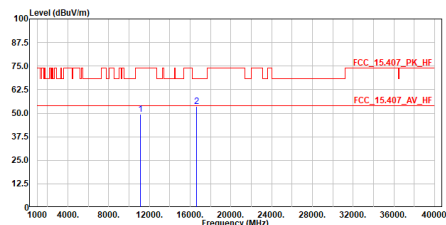


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11100.000	49.58	74.00	-24.42	55.95	-6.37	Peak
2	16650.000	53.52	68.20	-14.68	56.37	-2.85	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5670MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac40_5670MHz
Test By :Cyril Chen

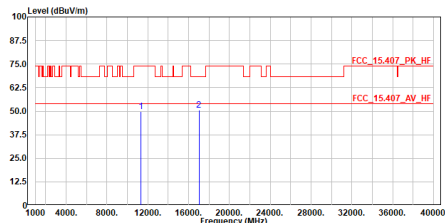


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11340.000	58.00	74.00	-24.00	55.89	-5.89	Peak
2	17010.000	58.66	68.20	-17.54	53.58	-2.92	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5670MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac40_5670MHz
Test By :Cyril Chen

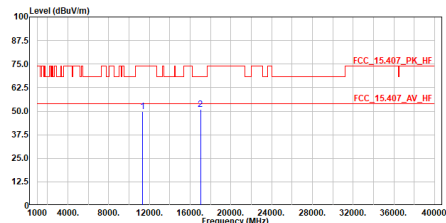


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11340.000	49.92	74.00	-24.08	55.81	-5.89	Peak
2	17010.000	58.84	68.20	-17.36	53.76	-2.92	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5710MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac40_5710MHz
Test By :Cyril Chen

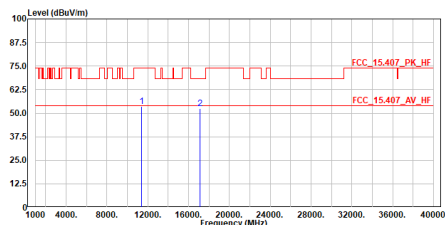


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11420.000	53.42	74.00	-20.58	59.17	-5.75	Peak
2	17130.000	52.61	68.20	-15.59	55.40	-2.79	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5710MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac40_5710MHz
Test By :Cyril Chen

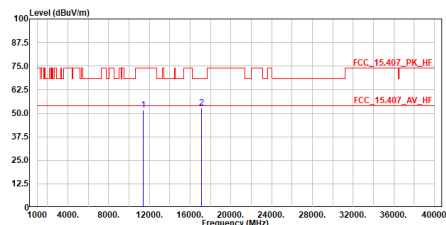


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	11420.000	51.87	74.00	-22.13	57.62	-5.75	Peak
2	17130.000	52.99	68.20	-15.21	55.78	-2.79	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5755MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac40_5755MHz
Test By :Cyril Chen

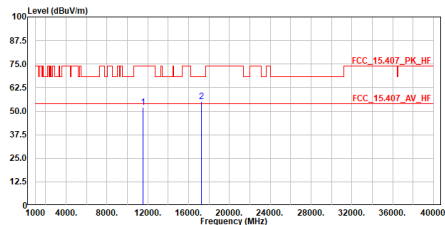


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11510.000	52.03	74.00	-21.97	57.60	-5.57	Peak
2	17265.000	54.93	68.20	-13.27	57.59	-2.66	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5755MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac40_5755MHz
Test By :Cyril Chen

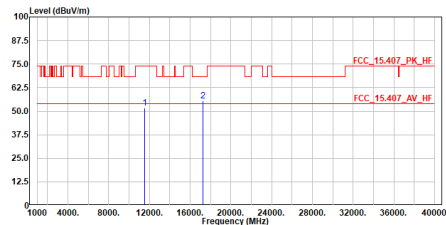


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11510.000	51.80	74.00	-22.20	57.37	-5.57	Peak
2	17265.000	55.38	68.20	-12.82	58.04	-2.66	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5795MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac40_5795MHz
Test By :Cyril Chen

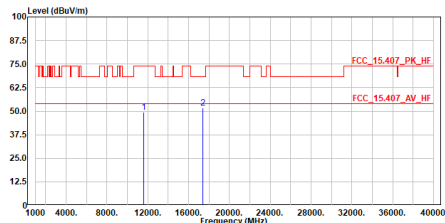


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11590.000	49.56	74.00	-24.44	55.05	-5.49	Peak
2	17385.000	51.76	68.20	-16.44	54.29	-2.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5795MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac40_5795MHz
Test By :Cyril Chen

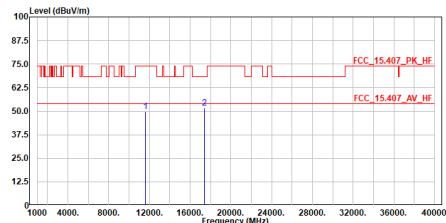


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11590.000	49.80	74.00	-24.20	55.29	-5.49	Peak
2	17385.000	51.86	68.20	-16.34	54.39	-2.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5210MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac80_5210MHz
Test By :Cyril Chen

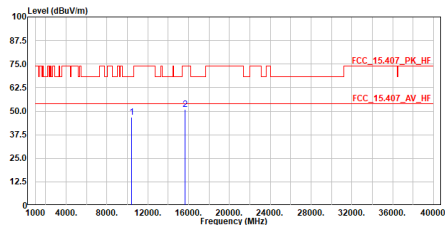


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10420.000	46.97	68.20	-21.23	54.38	-7.41	Peak
2	15630.000	51.13	74.00	-22.87	54.06	-2.93	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5210MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac80_5210MHz
Test By :Cyril Chen

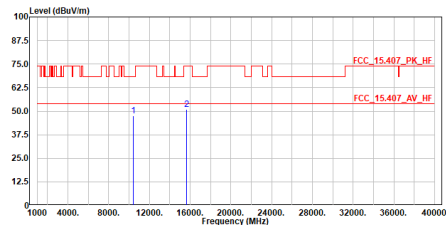


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10420.000	47.70	68.20	-20.50	55.11	-7.41	Peak
2	15630.000	50.91	74.00	-23.09	53.84	-2.93	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5290MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac80_5290MHz
Test By :Cyril Chen

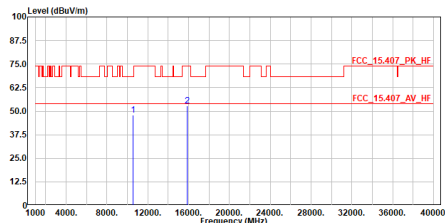


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10580.000	47.74	68.20	-20.46	54.92	-7.18	Peak
2	15870.000	52.90	74.00	-21.10	55.74	-2.84	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5290MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac80_5290MHz
Test By :Cyril Chen

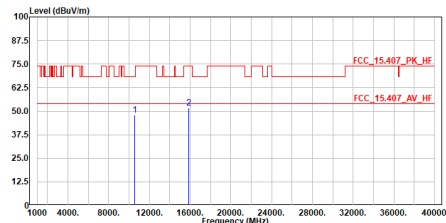


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	10580.000	47.83	68.20	-20.37	55.01	-7.18	Peak
2	15870.000	51.72	74.00	-22.28	54.56	-2.84	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5530MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac80_5530MHz
Test By :Cyril Chen

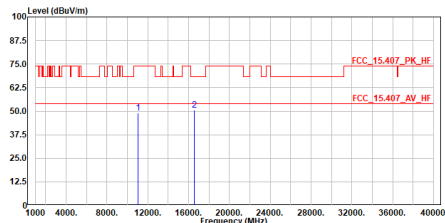


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11060.000	49.05	74.00	-24.95	55.50	-6.45	Peak
2	16590.000	50.72	68.20	-17.48	53.55	-2.83	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5530MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac80_5530MHz
Test By :Cyril Chen

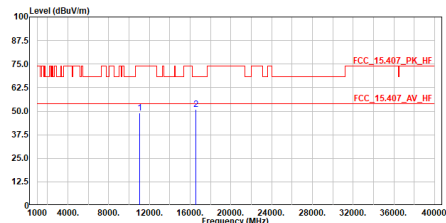


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11060.000	49.19	74.00	-24.81	55.64	-6.45	Peak
2	16590.000	51.06	68.20	-17.14	53.89	-2.83	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5610MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac80_5610MHz
Test By :Cyril Chen

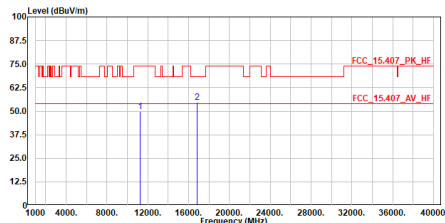


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11220.000	49.98	74.00	-24.02	56.12	-6.14	Peak
2	16830.000	54.61	68.20	-13.59	57.50	-2.89	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5610MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac80_5610MHz
Test By :Cyril Chen

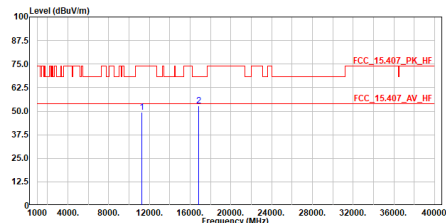


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11220.000	49.40	74.00	-24.60	55.54	-6.14	Peak
2	16830.000	52.97	68.20	-15.23	55.86	-2.89	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5690MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac80_5690MHz
Test By :Cyril Chen

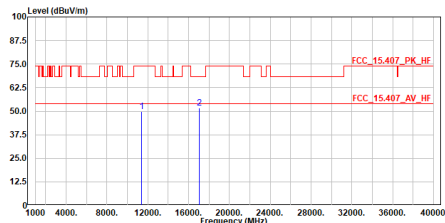


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11380.000	49.98	74.00	-24.02	55.79	-5.81	Peak
2	17070.000	51.70	68.20	-16.50	54.55	-2.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5690MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac80_5690MHz
Test By :Cyril Chen

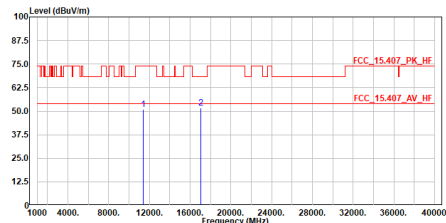


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11380.000	50.91	74.00	-23.09	56.72	-5.81	Peak
2	17070.000	51.63	68.20	-16.57	54.48	-2.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5775MHz_H

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac80_5775MHz
Test By :Cyril Chen

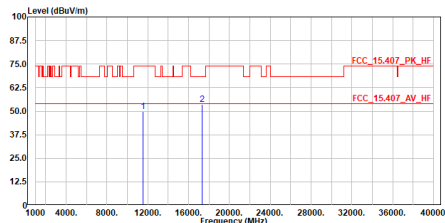


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11550.000	49.83	74.00	-24.17	55.35	-5.52	Peak
2	17325.000	53.58	68.20	-14.62	56.18	-2.60	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5775MHz_V

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac80_5775MHz
Test By :Cyril Chen

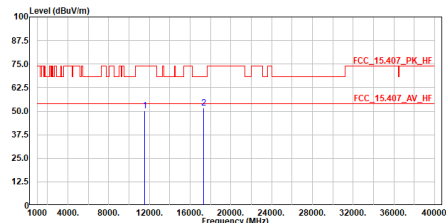


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	11550.000	50.06	74.00	-23.94	55.58	-5.52	Peak
2	17325.000	51.70	68.20	-16.50	54.30	-2.60	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5530MHz_H_QP

Site :HC-CB04
Condition :3m Horizontal
Mode :TX_ac80_5530MHz
Test By :Ling Chen

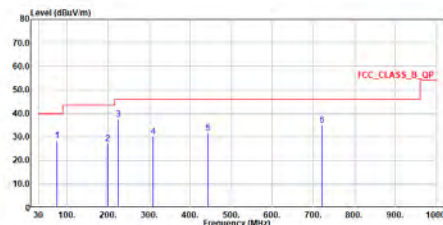


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	74.911	28.25	49.00	-11.75	34.15	-5.90	QP
2	197.422	27.28	43.50	-16.22	33.62	-6.34	QP
3	224.970	37.46	46.00	-8.54	43.63	-6.17	QP
4	310.039	30.22	46.00	-15.78	32.44	-2.22	QP
5	442.638	31.62	46.00	-14.38	30.21	1.41	QP
6	720.349	34.07	46.00	-11.13	28.16	6.71	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

TX_ac80_5530MHz_V_QP

Site :HC-CB04
Condition :3m Vertical
Mode :TX_ac80_5530MHz
Test By :Ling Chen

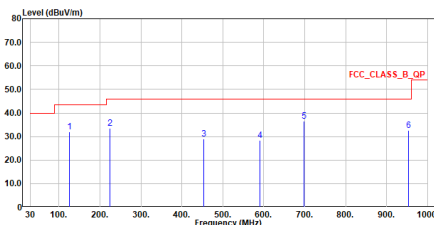


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	124.963	32.11	43.50	-11.39	37.04	-4.93	QP
2	224.970	33.52	46.00	-12.48	39.69	-6.17	QP
3	452.823	29.12	46.00	-16.88	27.43	1.69	QP
4	590.078	28.38	46.00	-17.62	23.89	4.49	QP
5	698.912	36.57	46.00	-9.43	30.23	6.34	QP
6	953.925	32.55	46.00	-13.45	22.58	9.97	QP

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

TX_a_5180MHz_H_AV

Site :HC-CB04
Condition :3m Horizontal
Mode :TX_a_5180MHz
Test By :Cyril Chen

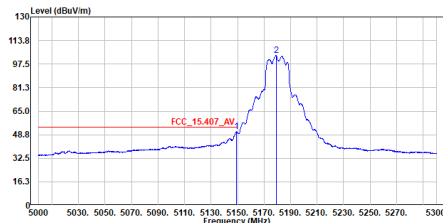


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5148.950	51.05	54.00	-2.95	37.09	13.96	Average
2	5179.100	103.35	-----	-----	89.34	14.01	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5180MHz_H_PK

Site :HC-CB04
Condition :3m Horizontal
Mode :TX_a_5180MHz
Test By :Cyril Chen

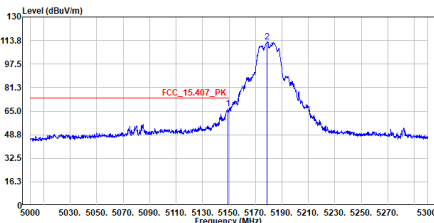


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5149.400	66.56	74.00	-7.44	52.60	13.96	Peak
2	5178.650	112.71	-----	-----	98.70	14.01	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5180MHz_V_AV

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5180MHz
Test By :Cyril Chen

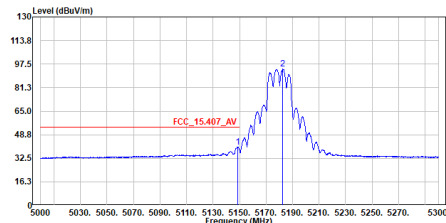


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5148.650	40.34	54.00	-13.66	26.38	13.96	Average
2	5182.400	93.90	-----	-----	79.96	14.02	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5180MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5180MHz
Test By :Cyril Chen

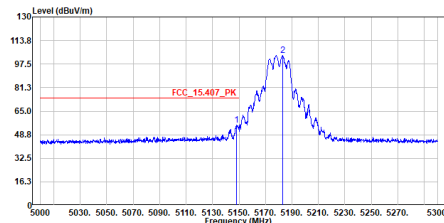


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5148.200	55.43	74.00	-18.57	41.47	13.96	Peak
2	5183.000	103.36	-----	-----	89.34	14.02	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5220MHz_H_AV

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5220MHz
Test By :Cyril Chen

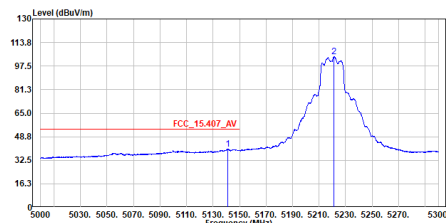


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5141.150	40.36	54.00	-13.64	26.41	13.95	Average
2	5221.250	104.06	-----	-----	89.99	14.07	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5220MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5220MHz
Test By :Cyril Chen

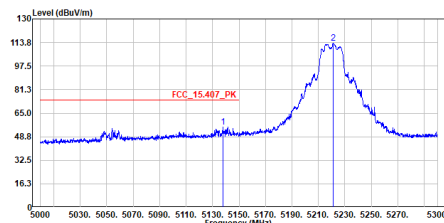


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5137.850	55.36	74.00	-18.64	41.42	13.94	Peak
2	5221.250	113.26	-----	-----	99.19	14.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5220MHz_V_AV

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5220MHz
Test By :Cyril Chen

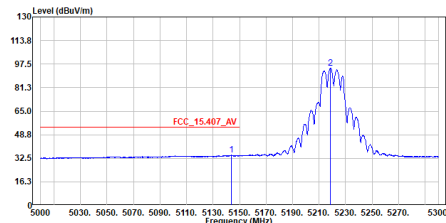


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5143.850	34.66	54.00	-19.34	20.70	13.96	Average
2	5218.700	94.52	-----	-----	80.46	14.06	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5220MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5220MHz
Test By :Cyril Chen

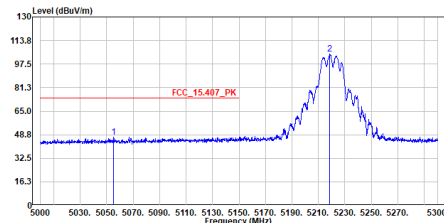


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5055.350	46.99	74.00	-27.01	33.18	13.81	Peak
2	5218.700	104.35	-----	-----	90.29	14.06	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5240MHz_H_AV

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5240MHz
Test By :Cyril Chen

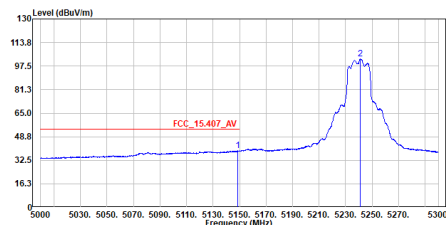


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5148.500	39.15	54.00	-14.85	25.19	13.96	Average
2	5241.050	102.56	-----	-----	88.46	14.10	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5240MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5240MHz
Test By :Cyril Chen

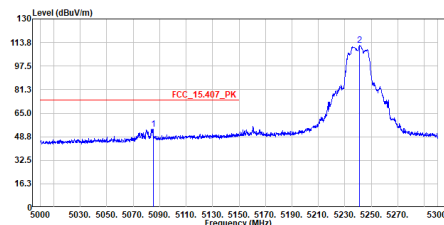


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5055.050	53.82	74.00	-20.18	39.95	13.87	Peak
2	5241.050	111.70	-----	-----	97.60	14.10	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5240MHz_V_AV

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5240MHz
Test By :Cyril Chen

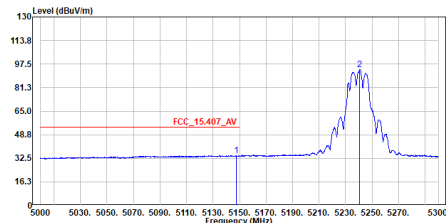


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5147.450	34.42	54.00	-19.58	20.46	13.96	Average
2	5240.680	93.60	-----	-----	79.50	14.10	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5240MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5240MHz
Test By :Cyril Chen

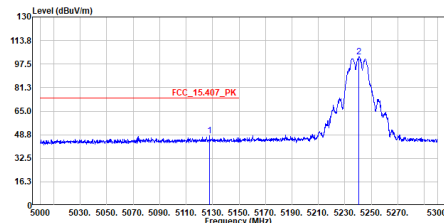


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5127.800	48.19	74.00	-25.81	34.26	13.93	Peak
2	5240.750	102.67	-----	-----	88.57	14.10	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5260MHz_H_AV

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5260MHz
Test By :Cyril Chen

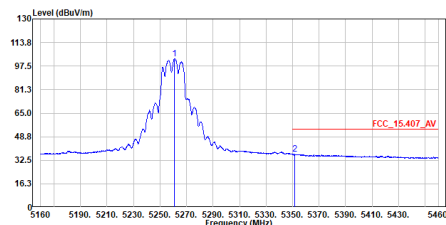


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5261.100	102.77	-----	-----	88.64	14.13	Average
2	5351.400	36.69	54.00	-17.31	22.42	14.27	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5260MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5260MHz
Test By :Cyril Chen

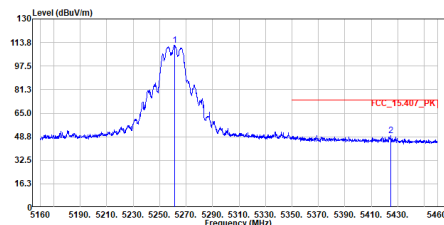


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5261.250	111.95	-----	-----	97.82	14.13	Peak
2	5424.750	49.36	74.00	-24.64	34.98	14.38	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5260MHz_V_AV

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5260MHz
Test By :Cyril Chen

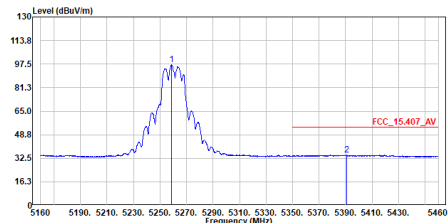


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5258.700	96.93	-----	-----	82.80	14.13	Average
2	5390.700	34.79	54.00	-19.21	20.46	14.33	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5260MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5260MHz
Test By :Cyril Chen

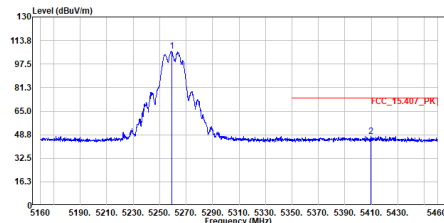


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5259.300	106.40	-----	-----	92.27	14.13	Peak
2	5409.600	47.74	74.00	-26.26	33.38	14.36	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5300MHz_H_AV

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5300MHz
Test By :Cyril Chen

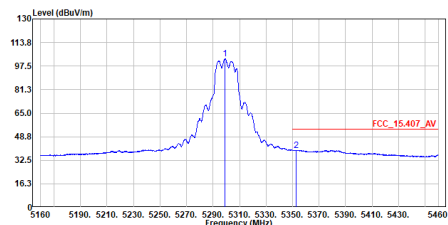


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5290.900	102.57	-----	-----	88.38	14.19	Average
2	5352.450	39.47	54.00	-14.53	25.20	14.27	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5300MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5300MHz
Test By :Cyril Chen

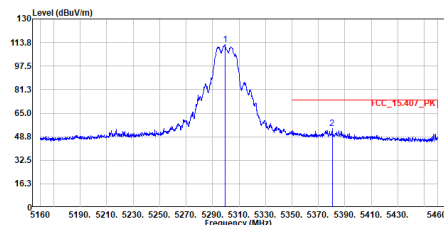


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5299.350	112.46	-----	-----	98.27	14.19	Peak
2	5380.350	54.26	74.00	-19.74	39.94	14.32	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5300MHz_V_AV

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5300MHz
Test By :Cyril Chen

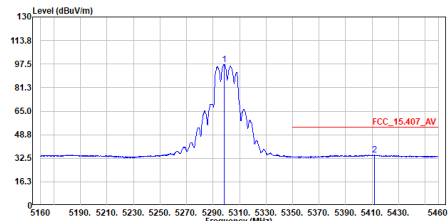


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5298.380	97.16	-----	-----	82.97	14.19	Average
2	5411.850	34.86	54.00	-19.14	28.50	14.36	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5300MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5300MHz
Test By :Cyril Chen

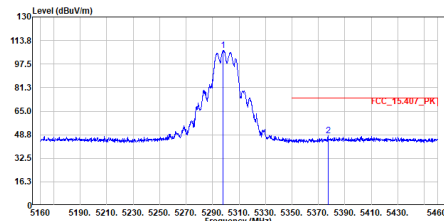


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5298.150	106.96	-----	-----	92.77	14.19	Peak
2	5377.200	48.06	74.00	-25.94	33.75	14.31	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5320MHz_H_AV

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5320MHz
Test By :Cyril Chen

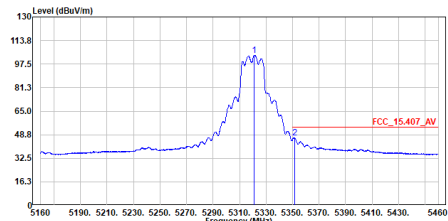


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5320.950	103.73	-----	-----	89.51	14.22	Average
2	5351.550	46.73	54.00	-7.27	32.46	14.27	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5320MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5320MHz
Test By :Cyril Chen

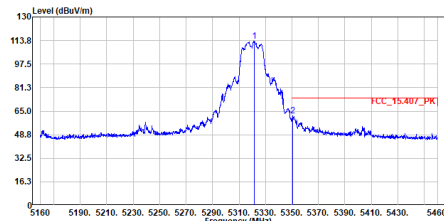


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5321.550	113.56	-----	-----	99.34	14.22	Peak
2	5350.800	61.58	74.00	-12.42	47.31	14.27	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5320MHz_V_AV

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5320MHz
Test By :Cyril Chen

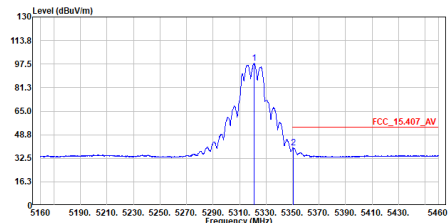


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5320.100	97.99	-----	-----	83.77	14.22	Average
2	5350.650	39.50	54.00	-14.50	25.23	14.27	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5320MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5320MHz
Test By :Cyril Chen

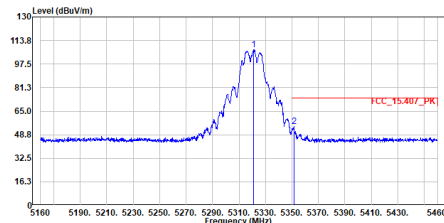


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5320.950	107.28	-----	-----	93.06	14.22	Peak
2	5351.400	54.35	74.00	-19.65	40.08	14.27	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5500MHz_H_AV

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5500MHz
Test By :Brook Cheng

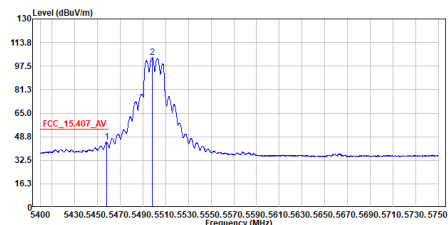


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5458.275	45.06	54.00	-8.94	30.62	14.44	Average
2	5498.175	103.58	-----	-----	89.08	14.50	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5500MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5500MHz
Test By :Brook Cheng

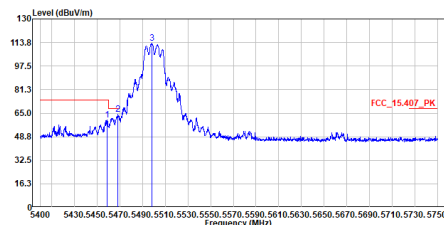


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5458.975	60.17	74.00	-13.83	45.73	14.44	Peak
2	5468.425	64.15	68.20	-4.05	49.71	14.44	Peak
3	5498.000	113.45	-----	-----	98.95	14.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5500MHz_V_AV

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5500MHz
Test By :Brook Cheng

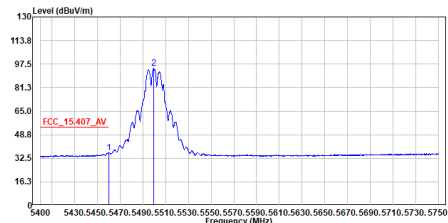


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5459.850	36.45	54.00	-17.55	22.01	14.44	Average
2	5499.400	94.50	-----	-----	80.00	14.50	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5500MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5500MHz
Test By :Brook Cheng

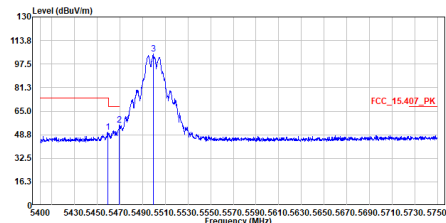


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5459.325	50.68	74.00	-23.32	36.24	14.44	Peak
2	5469.300	55.38	68.20	-12.82	40.93	14.45	Peak
3	5499.400	104.35	-----	-----	89.85	14.50	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5580MHz_H_AV

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5580MHz
Test By :Brook Cheng

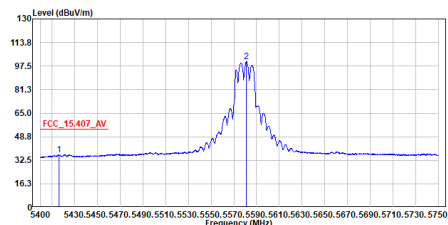


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5416.100	36.42	54.00	-17.58	22.06	14.36	Average
2	5581.125	100.65	-----	-----	85.94	14.71	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5580MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5580MHz
Test By :Brook Cheng

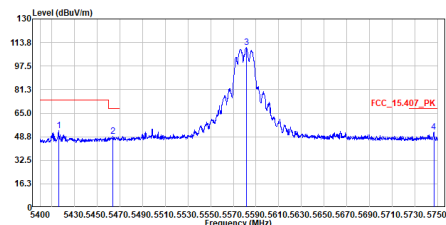


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5415.925	53.12	74.00	-20.88	38.76	14.36	Peak
2	5464.050	48.86	68.20	-19.34	34.42	14.44	Peak
3	5581.300	110.39	-----	-----	95.68	14.71	Peak
4	5746.675	52.23	68.20	-15.97	37.10	15.13	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5580MHz_V_AV

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5580MHz
Test By :Brook Cheng

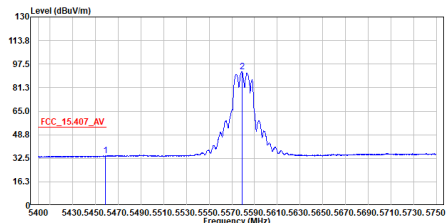


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5458.800	34.17	54.00	-19.83	19.73	14.44	Average
2	5579.025	92.21	-----	-----	77.51	14.70	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5580MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5580MHz
Test By :Brook Cheng

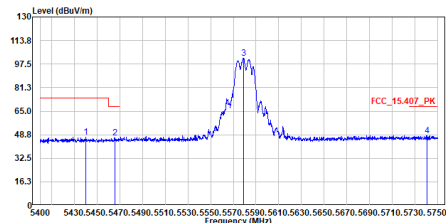


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5440.250	47.11	74.00	-26.89	32.70	14.41	Peak
2	5465.450	46.53	68.20	-21.67	32.09	14.44	Peak
3	5578.850	101.65	-----	-----	86.95	14.70	Peak
4	5740.550	47.99	68.20	-20.21	32.87	15.12	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5700MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5700MHz
Test By :Brook Cheng

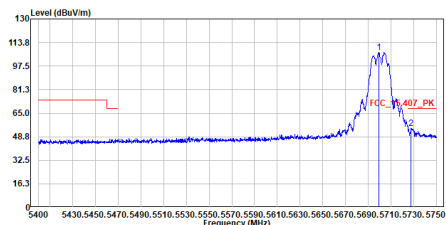


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5699.250	107.16	-----	-----	92.15	15.01	Peak
2	5727.775	54.58	68.20	-13.62	39.49	15.09	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5700MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5700MHz
Test By :Brook Cheng

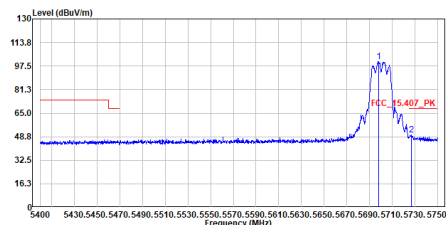


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5699.025	100.46	-----	-----	85.45	15.01	Peak
2	5727.075	50.08	68.20	-18.12	34.99	15.09	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5745MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5745MHz
Test By :Cyril Chen

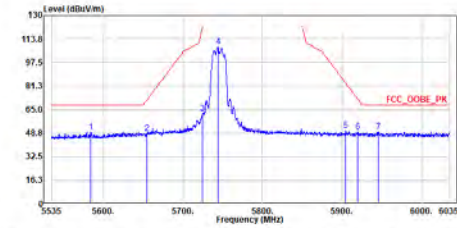


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5584.500	49.36	68.20	-18.84	54.85	14.71	Peak
2	5655.000	48.47	71.91	-23.44	53.57	14.90	Peak
3	5725.000	62.45	122.20	-59.75	47.36	15.09	Peak
4	5744.250	108.44	-----	-----	93.31	15.13	Peak
5	5904.750	50.30	83.19	-32.89	54.76	15.54	Peak
6	5920.000	49.68	71.91	-22.23	54.09	15.59	Peak
7	5940.000	49.77	68.20	-18.43	54.12	15.65	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5745MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5745MHz
Test By :Cyril Chen

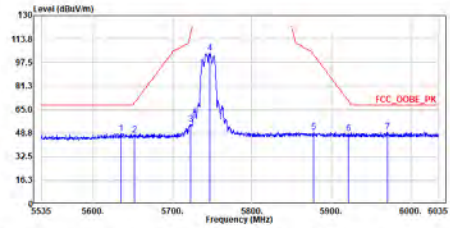


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5635.500	48.46	68.20	-19.74	53.62	14.84	Peak
2	5652.500	47.43	70.06	-22.63	52.55	14.88	Peak
3	5725.000	55.07	117.64	-62.57	59.99	15.08	Peak
4	5747.000	103.85	-----	-----	88.72	15.13	Peak
5	5877.500	49.64	103.35	-53.71	54.17	15.47	Peak
6	5921.250	48.68	78.98	-22.30	53.99	15.59	Peak
7	5970.500	49.60	68.20	-18.60	53.88	15.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5785MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5785MHz
Test By :Cyril Chen

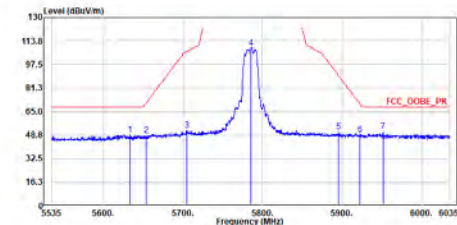


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5633.250	49.28	68.20	-18.92	54.44	14.84	Peak
2	5654.250	48.34	71.35	-23.01	53.44	14.90	Peak
3	5704.750	51.77	106.53	-54.76	56.74	15.03	Peak
4	5785.750	109.09	-----	-----	93.85	15.24	Peak
5	5895.750	51.01	89.85	-38.84	55.49	15.52	Peak
6	5922.500	49.30	70.06	-20.76	53.71	15.59	Peak
7	5951.500	50.78	68.20	-17.42	55.12	15.66	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5785MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5785MHz
Test By :Cyril Chen

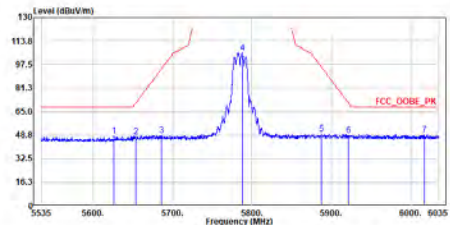


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5626.250	48.18	68.20	-20.02	53.35	14.83	Peak
2	5653.500	47.71	70.80	-23.09	52.81	14.90	Peak
3	5686.500	48.76	95.21	-46.45	53.77	14.99	Peak
4	5787.750	105.66	-----	-----	90.41	15.25	Peak
5	5807.500	49.58	95.95	-46.37	54.08	15.50	Peak
6	5921.500	48.55	70.80	-22.25	52.96	15.59	Peak
7	6017.000	49.16	68.20	-19.04	53.29	15.87	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5825MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_a_5825MHz
Test By :Cyril Chen

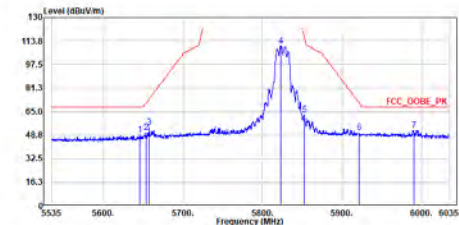


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5645.750	48.85	68.20	-19.35	53.98	14.87	Peak
2	5654.000	50.30	71.17	-20.87	35.40	14.90	Peak
3	5657.500	54.20	73.76	-19.56	39.29	14.91	Peak
4	5823.250	118.61	-----	-----	95.28	15.33	Peak
5	5852.750	62.64	115.93	-53.29	47.23	15.41	Peak
6	5921.750	50.36	70.61	-20.25	34.77	15.59	Peak
7	5990.500	51.99	68.20	-16.21	36.23	15.76	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_a_5825MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_a_5825MHz
Test By :Cyril Chen

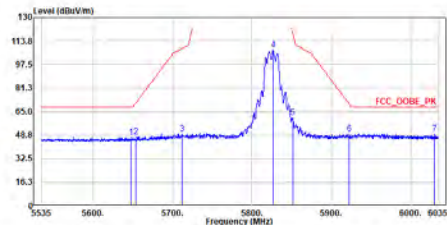


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5647.500	46.91	68.20	-21.29	52.83	14.88	Peak
2	5653.500	47.59	70.80	-23.41	52.69	14.90	Peak
3	5712.500	49.44	108.70	-59.26	34.40	15.04	Peak
4	5826.250	107.40	-----	-----	92.06	15.34	Peak
5	5851.250	60.83	119.35	-58.52	45.42	15.41	Peak
6	5922.500	49.52	70.86	-20.54	33.93	15.59	Peak
7	6029.750	49.71	68.20	-18.49	33.78	15.93	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5180MHz_H_AV

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5180MHz
Test By :Cyril Chen

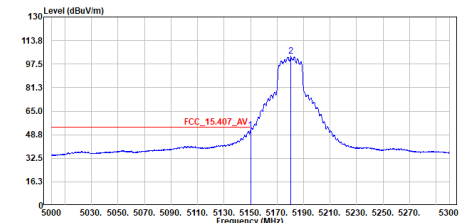


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5150.000	52.05	54.00	-1.95	38.09	13.96	Average
2	5180.450	102.87	-----	-----	88.86	14.01	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5180MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5180MHz
Test By :Cyril Chen

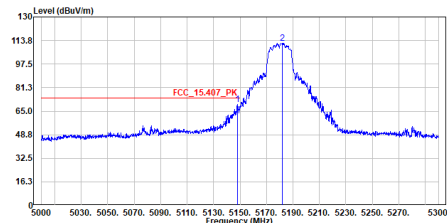


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5148.350	69.76	74.00	-4.24	55.80	13.96	Peak
2	5182.100	111.72	-----	-----	97.70	14.02	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5180MHz_V_AV

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5180MHz
Test By :Cyril Chen

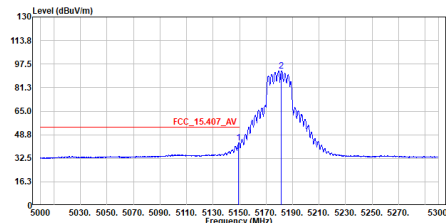


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5149.400	43.31	54.00	-10.69	29.35	13.96	Average
2	5181.650	92.90	-----	-----	78.88	14.02	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5180MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5180MHz
Test By :Cyril Chen

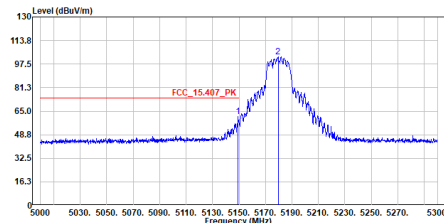


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5149.100	61.38	74.00	-12.62	47.42	13.96	Peak
2	5179.550	102.57	-----	-----	88.56	14.01	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5220MHz_H_AV

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5220MHz
Test By :Cyril Chen

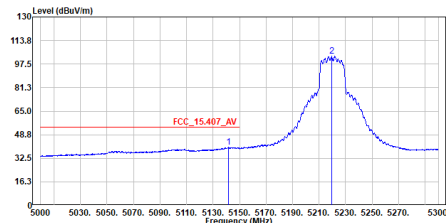


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5141.900	39.98	54.00	-14.02	26.03	13.95	Average
2	5219.600	102.97	-----	-----	88.90	14.07	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5220MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5220MHz
Test By :Cyril Chen

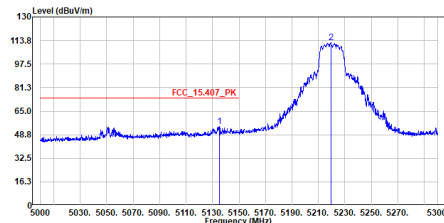


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5135.300	54.39	74.00	-19.61	40.45	13.94	Peak
2	5219.450	112.44	-----	-----	98.37	14.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5220MHz_V_AV

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5220MHz
Test By :Cyril Chen

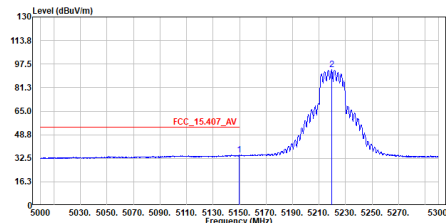


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5149.550	34.59	54.00	-19.41	20.63	13.96	Average
2	5219.600	93.45	-----	-----	79.38	14.07	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5220MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5220MHz
Test By :Cyril Chen

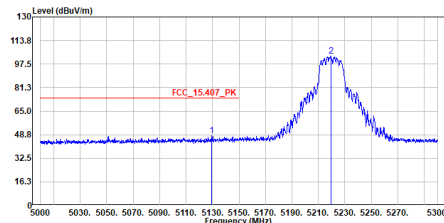


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5129.300	47.90	74.00	-26.10	33.97	13.93	Peak
2	5219.300	103.00	-----	-----	88.93	14.07	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5240MHz_H_AV

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5240MHz
Test By :Cyril Chen

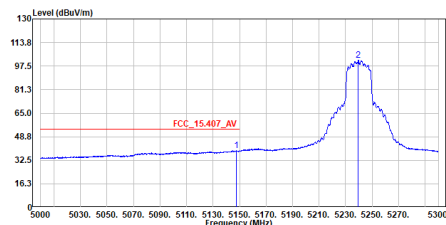


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5147.750	39.29	54.00	-14.71	25.33	13.96	Average
2	5239.550	101.49	-----	-----	87.39	14.10	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5240MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5240MHz
Test By :Cyril Chen

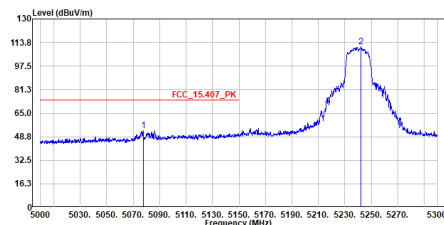


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5077.550	53.06	74.00	-20.94	39.21	13.85	Peak
2	5242.100	110.68	-----	-----	96.58	14.10	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5240MHz_V_AV

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5240MHz
Test By :Cyril Chen

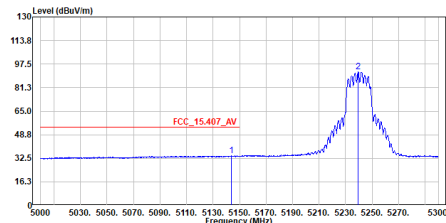


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5143.850	34.26	54.00	-19.74	20.30	13.96	Average
2	5239.550	92.16	-----	-----	78.06	14.10	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5240MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5240MHz
Test By :Cyril Chen

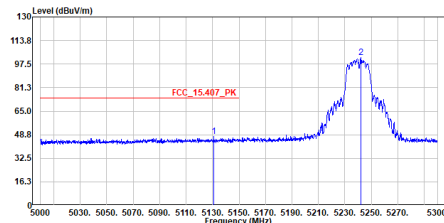


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5130.950	47.58	74.00	-26.42	33.65	13.93	Peak
2	5242.100	101.90	-----	-----	87.00	14.10	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5260MHz_H_AV

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5260MHz
Test By :Cyril Chen

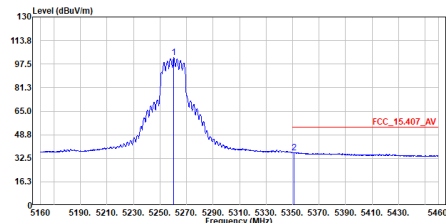


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5260.350	101.81	-----	-----	87.68	14.13	Average
2	5351.100	36.42	54.00	-17.58	22.15	14.27	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5260MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5260MHz
Test By :Cyril Chen

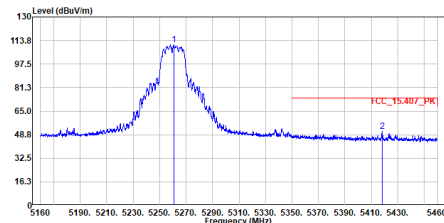


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5260.650	111.02	-----	-----	96.89	14.13	Peak
2	5418.300	51.13	74.00	-22.87	36.76	14.37	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5260MHz_V_AV

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5260MHz
Test By :Cyril Chen

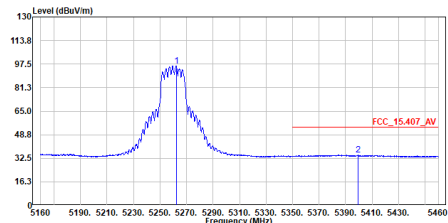


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5262.300	96.27	-----	-----	82.14	14.13	Average
2	5399.250	34.75	54.00	-19.25	20.40	14.35	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5260MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5260MHz
Test By :Cyril Chen

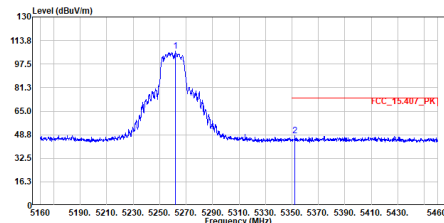


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5262.000	106.58	-----	-----	92.45	14.13	Peak
2	5352.150	47.92	74.00	-26.08	33.65	14.27	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5300MHz_H_AV

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5300MHz
Test By :Cyril Chen

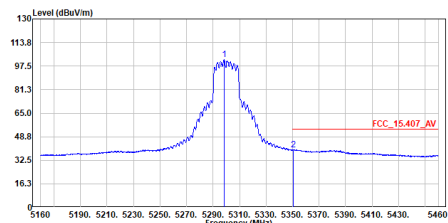


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5298.450	101.83	-----	-----	87.64	14.19	Average
2	5358.350	39.91	54.00	-14.09	25.64	14.27	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5300MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5300MHz
Test By :Cyril Chen

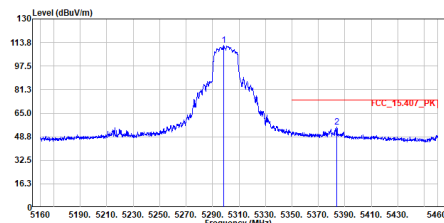


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5298.450	111.80	-----	-----	97.61	14.19	Peak
2	5383.950	55.35	74.00	-18.65	41.02	14.33	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5300MHz_V_AV

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5300MHz
Test By :Cyril Chen

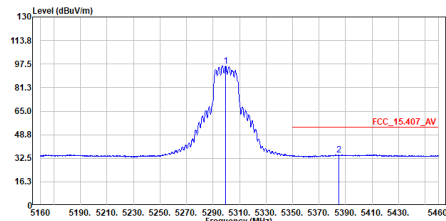


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5299.500	96.32	-----	-----	82.13	14.19	Average
2	5385.000	34.91	54.00	-19.09	20.58	14.33	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5300MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5300MHz
Test By :Cyril Chen

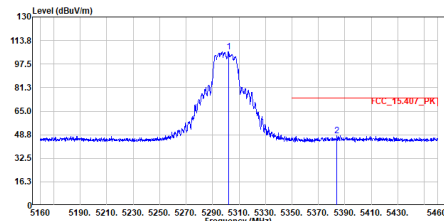


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5302.050	106.14	-----	-----	91.95	14.19	Peak
2	5384.100	48.27	74.00	-25.73	33.54	14.33	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5320MHz_H_AV

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5320MHz
Test By :Cyril Chen

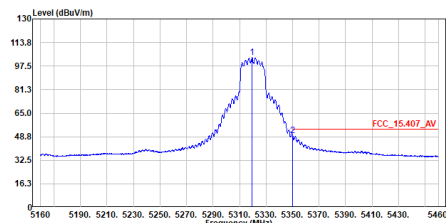


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5319.600	103.37	-----	-----	89.15	14.22	Average
2	5350.200	49.58	54.00	-4.42	35.31	14.27	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5320MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5320MHz
Test By :Cyril Chen

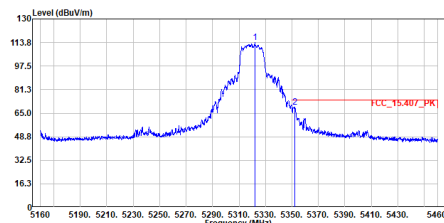


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5322.150	113.75	-----	-----	99.53	14.22	Peak
2	5352.300	69.24	74.00	-4.76	54.97	14.27	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5320MHz_V_AV

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5320MHz
Test By :Cyril Chen

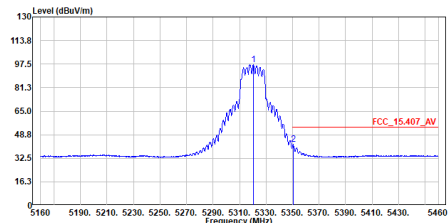


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5320.500	97.24	-----	-----	83.02	14.22	Average
2	5350.500	42.23	54.00	-11.77	27.96	14.27	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5320MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5320MHz
Test By :Cyril Chen

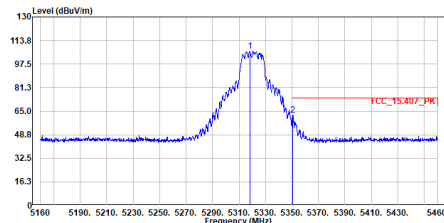


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5318.100	106.62	-----	-----	92.41	14.21	Peak
2	5350.800	62.22	74.00	-11.78	47.95	14.27	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5500MHz_H_AV

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5500MHz
Test By :Brook Cheng

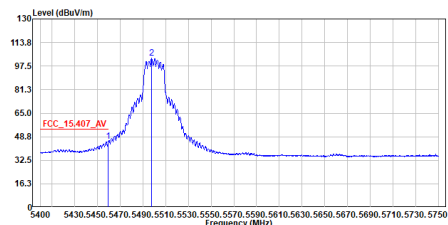


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5459.675	45.62	54.00	-8.38	31.18	14.44	Average
2	5497.650	103.06	-----	-----	88.56	14.50	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5500MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5500MHz
Test By :Brook Cheng

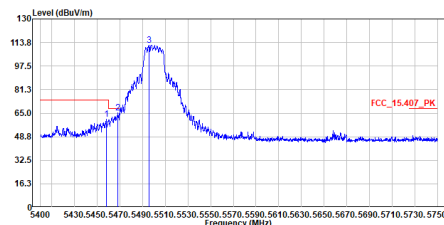


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5458.100	60.85	74.00	-13.15	46.41	14.44	Peak
2	5468.075	65.11	68.20	-3.09	50.67	14.44	Peak
3	5495.550	112.07	-----	-----	97.57	14.50	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5500MHz_V_AV

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5500MHz
Test By :Brook Cheng

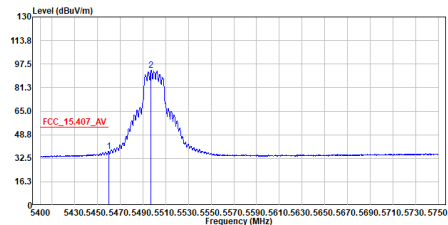


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5459.850	37.49	54.00	-16.51	23.05	14.44	Average
2	5497.300	93.02	-----	-----	78.52	14.50	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5500MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5500MHz
Test By :Brook Cheng

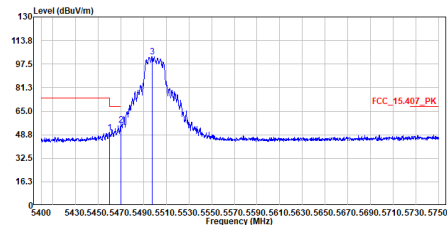


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5459.850	49.96	74.00	-24.04	35.52	14.44	Peak
2	5469.825	55.32	68.20	-12.88	40.87	14.45	Peak
3	5497.650	102.72	-----	-----	88.22	14.50	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5580MHz_H_AV

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5580MHz
Test By :Brook Cheng

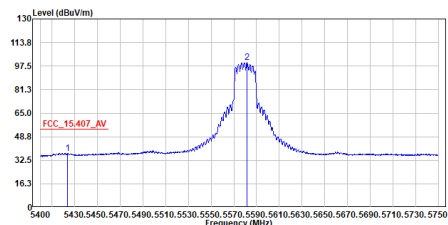


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5423.975	37.37	54.00	-16.63	22.99	14.38	Average
2	5581.650	100.16	-----	-----	85.45	14.71	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5580MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5580MHz
Test By :Brook Cheng

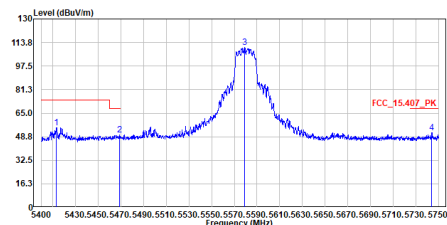


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5413.300	54.81	74.00	-19.19	40.45	14.36	Peak
2	5468.600	50.24	68.20	-17.96	35.80	14.44	Peak
3	5579.375	110.14	-----	-----	95.44	14.70	Peak
4	5743.875	51.60	68.20	-16.60	36.47	15.13	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5580MHz_V_AV

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5580MHz
Test By :Brook Cheng

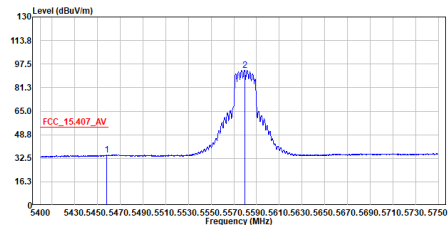


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5457.925	34.71	54.00	-19.29	20.27	14.44	Average
2	5579.550	93.35	-----	-----	78.65	14.70	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5580MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5580MHz
Test By :Brook Cheng

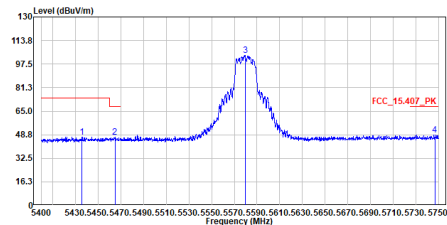


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5435.875	47.23	74.00	-26.77	32.82	14.41	Peak
2	5464.750	46.86	68.20	-21.34	32.42	14.44	Peak
3	5579.550	103.52	-----	-----	88.82	14.70	Peak
4	5746.675	48.70	68.20	-19.50	33.57	15.13	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5700MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5700MHz
Test By :Brook Cheng

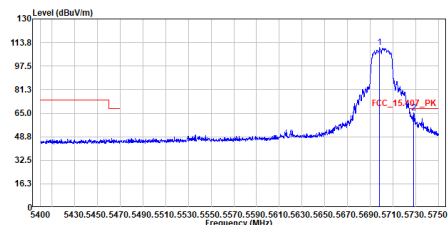


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5698.200	110.28	-----	-----	95.27	15.01	Peak
2	5728.125	65.13	68.20	-3.07	50.04	15.09	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5700MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5700MHz
Test By :Brook Cheng

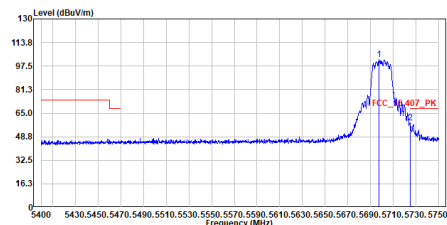


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5697.500	102.21	-----	-----	87.20	15.01	Peak
2	5725.150	58.28	68.20	-9.92	43.19	15.09	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5745MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5745MHz
Test By :Cyril Chen

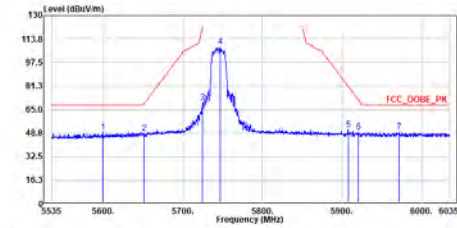


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5599.250	49.36	68.20	-18.84	34.50	14.76	Peak
2	5651.000	48.59	68.95	-20.36	33.71	14.88	Peak
3	5724.750	69.55	121.63	-52.08	54.47	15.88	Peak
4	5747.000	108.18	-----	-----	93.05	15.13	Peak
5	5907.750	51.24	80.97	-29.73	35.69	15.55	Peak
6	5921.000	49.39	71.17	-21.78	33.80	15.59	Peak
7	5972.000	49.68	68.20	-18.52	33.96	15.72	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5745MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5745MHz
Test By :Cyril Chen

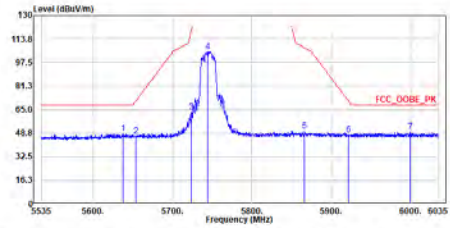


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5637.500	48.36	68.20	-19.84	33.50	14.86	Peak
2	5654.000	46.71	71.17	-24.46	31.81	14.90	Peak
3	5724.000	63.28	119.92	-56.64	48.20	15.88	Peak
4	5744.500	105.14	-----	-----	90.01	15.13	Peak
5	5866.250	50.08	107.65	-57.57	34.63	15.45	Peak
6	5921.250	47.42	78.98	-23.56	31.83	15.59	Peak
7	5999.250	49.98	68.20	-18.22	33.59	15.79	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5785MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5785MHz
Test By :Cyril Chen

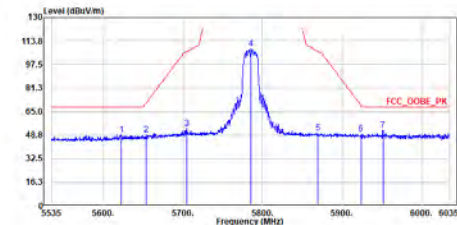


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5622.250	49.25	68.20	-18.95	34.43	14.82	Peak
2	5653.750	48.89	70.98	-22.09	33.99	14.90	Peak
3	5705.000	53.26	106.60	-53.34	38.23	15.03	Peak
4	5785.750	108.41	-----	-----	93.17	15.24	Peak
5	5869.750	50.21	106.67	-56.46	34.75	15.46	Peak
6	5921.750	49.64	69.13	-19.49	34.05	15.59	Peak
7	5951.500	51.90	68.20	-16.30	36.24	15.66	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5785MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5785MHz
Test By :Cyril Chen

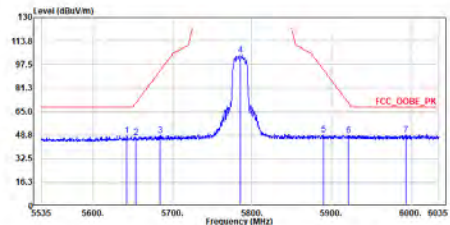


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5642.500	48.52	68.20	-19.68	33.65	14.87	Peak
2	5653.500	47.20	70.80	-23.60	32.30	14.90	Peak
3	5684.750	48.57	93.92	-45.35	33.60	14.97	Peak
4	5785.750	103.83	-----	-----	88.59	15.24	Peak
5	5890.250	49.03	93.92	-44.89	33.53	15.50	Peak
6	5921.500	48.39	70.80	-22.47	32.74	15.59	Peak
7	5994.000	49.28	68.20	-18.92	33.50	15.78	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5825MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac20_5825MHz
Test By :Cyril Chen

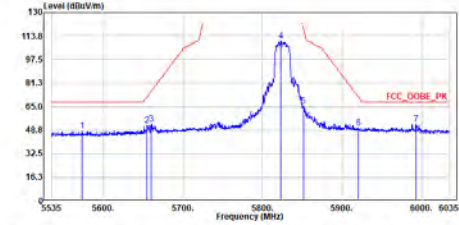


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5573.500	48.14	68.20	-20.06	53.45	14.69	Peak
2	5654.750	52.10	71.72	-19.62	57.20	14.90	Peak
3	5668.000	53.07	75.61	-22.54	58.15	14.92	Peak
4	5823.250	110.27	-----	-----	94.94	15.33	Peak
5	5851.250	65.37	119.35	-53.98	49.96	15.41	Peak
6	5921.000	49.88	71.17	-21.29	54.29	15.59	Peak
7	5993.000	53.07	68.20	-15.13	57.29	15.78	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac20_5825MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac20_5825MHz
Test By :Cyril Chen

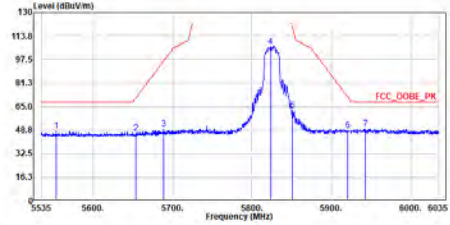


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5551.250	48.24	68.20	-19.96	53.60	14.64	Peak
2	5651.500	46.72	70.80	-24.08	51.82	14.90	Peak
3	5689.000	49.76	97.86	-47.30	54.77	14.99	Peak
4	5823.500	106.67	-----	-----	91.34	15.33	Peak
5	5850.750	62.07	120.49	-58.42	46.66	15.41	Peak
6	5921.000	48.54	71.17	-22.63	52.95	15.59	Peak
7	5942.750	49.72	68.20	-18.48	54.88	15.64	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5190MHz_H_AV

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac40_5190MHz
Test By :Cyril Chen

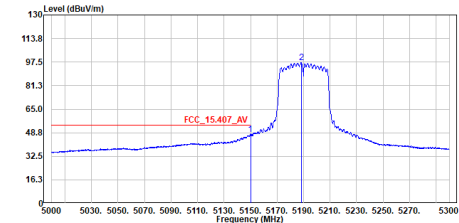


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5150.000	47.43	54.00	-6.57	33.47	13.96	Average
2	5188.250	97.15	-----	-----	83.13	14.02	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5190MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac40_5190MHz
Test By :Cyril Chen

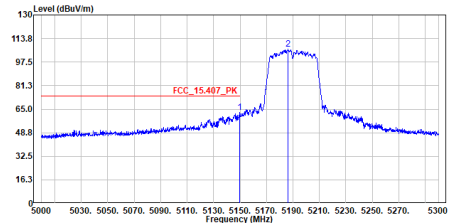


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5149.550	62.75	74.00	-11.25	48.79	13.96	Peak
2	5186.450	106.22	-----	-----	92.20	14.02	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5190MHz_V_AV

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac40_5190MHz
Test By :Cyril Chen

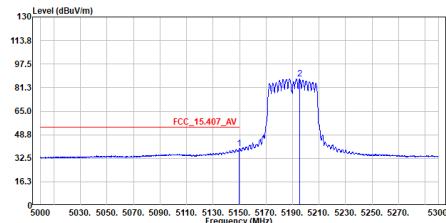


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5149.850	39.45	54.00	-14.55	25.49	13.96	Average
2	5195.300	87.37	-----	-----	73.33	14.04	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5190MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac40_5190MHz
Test By :Cyril Chen

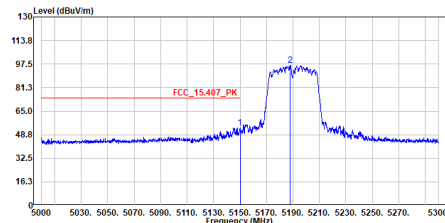


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5150.000	53.49	74.00	-20.51	39.53	13.96	Peak
2	5189.100	96.61	-----	-----	82.59	14.02	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5230MHz_H_AV

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac40_5230MHz
Test By :Cyril Chen

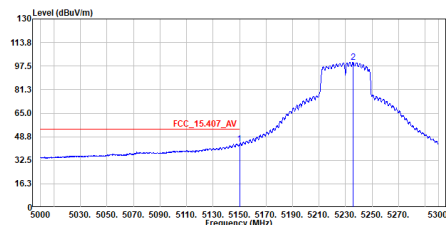


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5150.000	43.66	54.00	-10.34	29.79	13.96	Average
2	5235.800	100.16	-----	-----	86.06	14.10	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5230MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac40_5230MHz
Test By :Cyril Chen

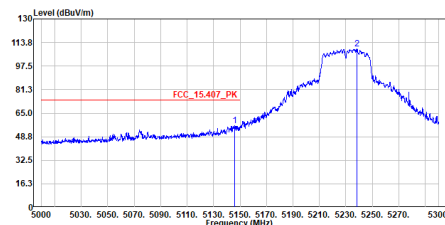


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5146.100	56.56	74.00	-17.44	42.60	13.96	Peak
2	5238.200	109.18	-----	-----	95.08	14.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5230MHz_V_AV

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac40_5230MHz
Test By :Cyril Chen

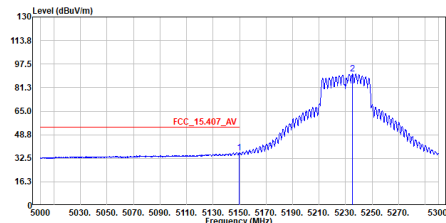


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5149.700	36.46	54.00	-17.54	22.50	13.96	Average
2	5235.200	90.97	-----	-----	76.87	14.10	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5230MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac40_5230MHz
Test By :Cyril Chen

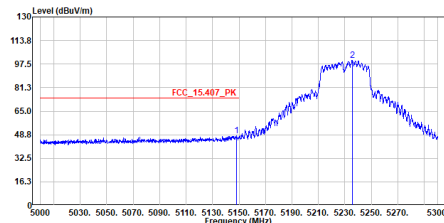


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5148.050	48.32	74.00	-25.68	34.36	13.96	Peak
2	5235.500	100.25	-----	-----	86.15	14.10	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5270MHz_H_AV

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac40_5270MHz
Test By :Brook Cheng

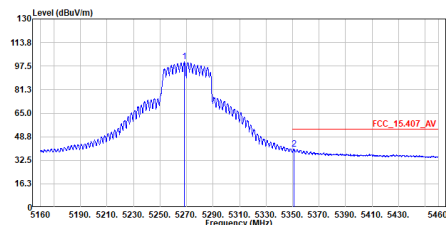


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5268.450	100.62	-----	-----	86.49	14.13	Average
2	5350.950	40.36	54.00	-13.64	26.09	14.27	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5270MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac40_5270MHz
Test By :Brook Cheng

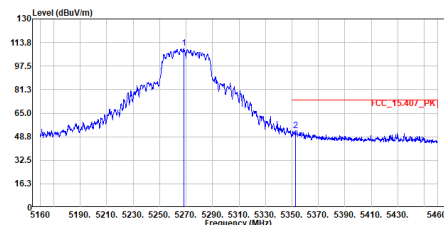


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5268.450	110.07	-----	-----	95.94	14.13	Peak
2	5352.600	53.16	74.00	-20.84	38.89	14.27	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5270MHz_V_AV

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac40_5270MHz
Test By :Brook Cheng

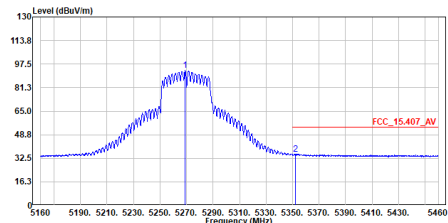


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5268.900	92.99	-----	-----	78.84	14.15	Average
2	5352.150	35.56	54.00	-18.44	21.29	14.27	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5270MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac40_5270MHz
Test By :Brook Cheng

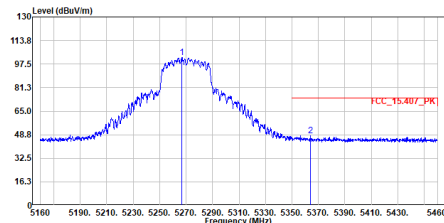


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5266.950	102.03	-----	-----	87.90	14.13	Peak
2	5363.850	48.31	74.00	-25.69	34.02	14.29	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5310MHz_H_AV

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac40_5310MHz
Test By :Brook Cheng

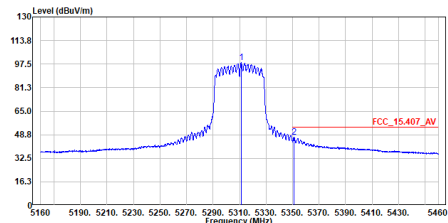


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5311.350	98.41	-----	-----	84.20	14.21	Average
2	5352.100	47.10	54.00	-6.90	32.83	14.27	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5310MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac40_5310MHz
Test By :Brook Cheng

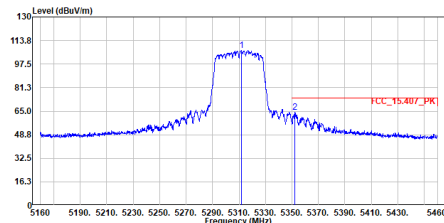


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5311.650	106.79	-----	-----	92.58	14.21	Peak
2	5352.150	64.35	74.00	-9.65	50.08	14.27	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5310MHz_V_AV

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac40_5310MHz
Test By :Brook Cheng

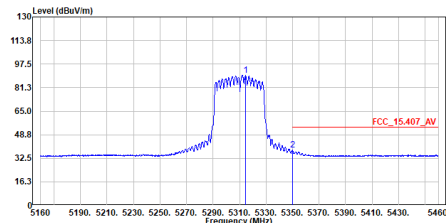


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5314.650	90.00	-----	-----	75.79	14.21	Average
2	5350.050	38.30	54.00	-15.70	24.83	14.27	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5310MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac40_5310MHz
Test By :Brook Cheng

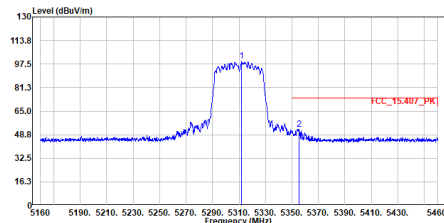


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5311.950	99.52	-----	-----	85.31	14.21	Peak
2	5355.150	52.63	74.00	-21.37	38.36	14.27	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5510MHz_H_AV

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac40_5510MHz
Test By :Brook Cheng

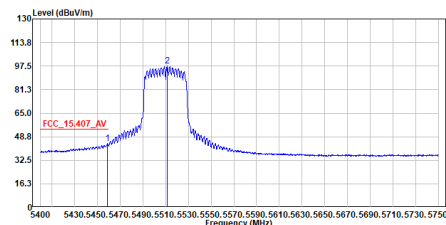


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5458.800	44.02	54.00	-9.98	29.58	14.44	Average
2	5511.300	97.40	-----	-----	82.87	14.53	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5510MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac40_5510MHz
Test By :Brook Cheng

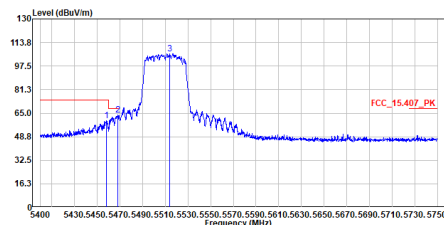


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5458.450	59.97	74.00	-14.03	45.53	14.44	Peak
2	5468.250	63.71	68.20	-4.49	49.27	14.44	Peak
3	5513.925	106.07	-----	-----	91.53	14.54	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5510MHz_V_AV

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac40_5510MHz
Test By :Brook Cheng

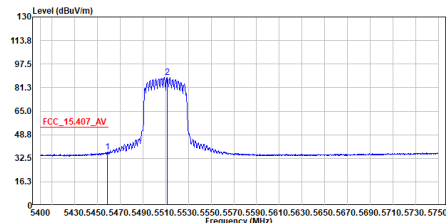


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5458.975	36.97	54.00	-17.03	22.53	14.44	Average
2	5511.475	88.43	-----	-----	73.90	14.53	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5510MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac40_5510MHz
Test By :Brook Cheng

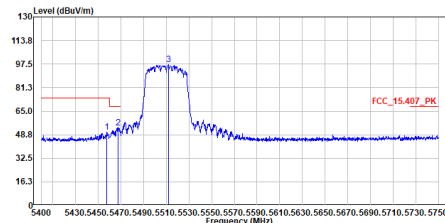


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5457.750	50.70	74.00	-23.30	36.26	14.44	Peak
2	5467.725	53.69	68.20	-14.51	39.25	14.44	Peak
3	5511.825	96.99	-----	-----	82.46	14.53	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5550MHz_H_AV

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac40_5550MHz
Test By :Brook Cheng

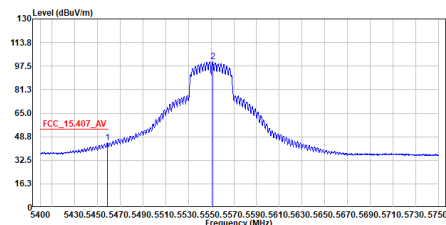


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5458.975	44.46	54.00	-9.54	30.02	14.44	Average
2	5551.375	100.62	-----	-----	85.99	14.63	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5550MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac40_5550MHz
Test By :Brook Cheng

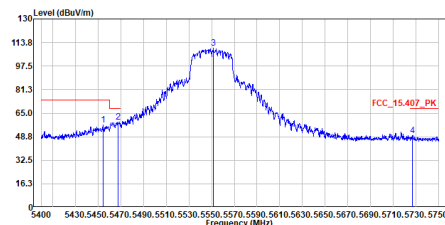


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5454.250	56.94	74.00	-17.06	42.51	14.43	Peak
2	5467.725	59.04	68.20	-9.16	44.60	14.44	Peak
3	5551.375	109.66	-----	-----	95.03	14.63	Peak
4	5727.075	49.65	68.20	-18.55	34.56	15.09	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5550MHz_V_AV

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac40_5550MHz
Test By :Brook Cheng

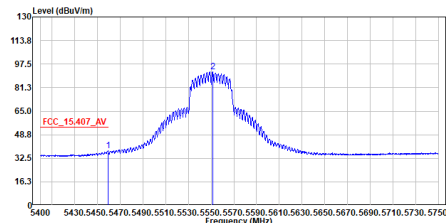


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5459.150	37.53	54.00	-16.47	23.09	14.44	Average
2	5551.375	92.21	-----	-----	77.58	14.63	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5550MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac40_5550MHz
Test By :Brook Cheng

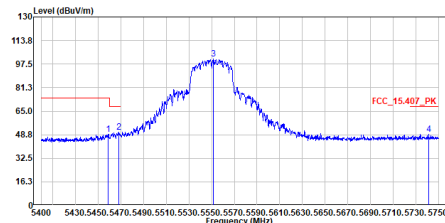


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5459.800	49.25	74.00	-24.75	34.81	14.44	Peak
2	5467.900	58.72	68.20	-17.48	36.28	14.44	Peak
3	5551.375	100.91	-----	-----	86.28	14.63	Peak
4	5741.250	49.10	68.20	-19.10	33.98	15.12	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5670MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac40_5670MHz
Test By :Brook Cheng

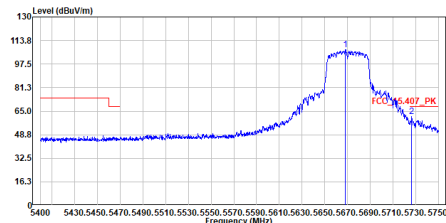


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5668.275	107.51	-----	-----	92.58	14.93	Peak
2	5726.550	61.27	68.20	-6.93	46.18	15.09	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5670MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac40_5670MHz
Test By :Brook Cheng

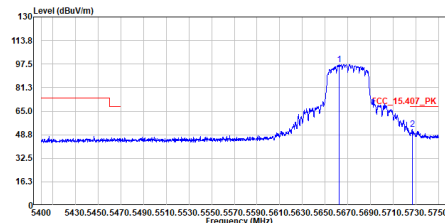


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5662.325	97.32	-----	-----	82.40	14.92	Peak
2	5727.075	52.41	68.20	-15.79	37.32	15.09	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5755MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac40_5755MHz
Test By :Cyril Chen

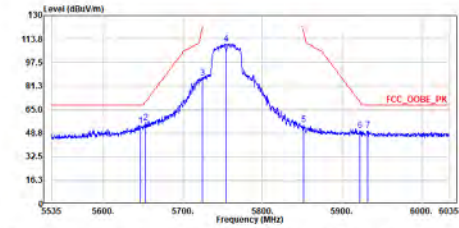


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5647.000	53.99	68.20	-14.21	59.12	14.87	Peak
2	5653.000	55.81	70.43	-14.62	60.92	14.89	Peak
3	5724.250	86.79	120.49	-33.70	71.71	15.08	Peak
4	5753.750	118.37	-----	-----	95.21	15.16	Peak
5	5851.500	54.60	118.78	-64.18	59.19	15.41	Peak
6	5922.250	50.33	70.24	-19.91	54.74	15.59	Peak
7	5992.000	50.32	68.20	-17.88	54.70	15.62	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5755MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac40_5755MHz
Test By :Cyril Chen

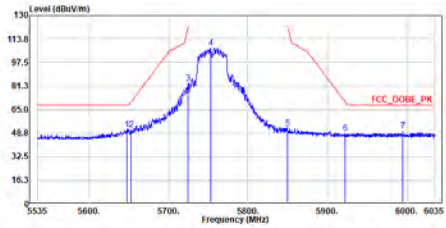


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5647.250	50.84	68.20	-17.36	55.96	14.88	Peak
2	5652.750	51.06	70.24	-19.18	56.18	14.88	Peak
3	5725.000	83.01	122.20	-39.19	67.92	15.09	Peak
4	5753.000	107.45	-----	-----	92.29	15.16	Peak
5	5850.000	51.97	122.20	-70.23	56.56	15.41	Peak
6	5922.000	48.81	70.43	-21.62	53.22	15.59	Peak
7	5994.750	50.05	68.20	-18.15	54.27	15.70	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5795MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac40_5795MHz
Test By :Cyril Chen

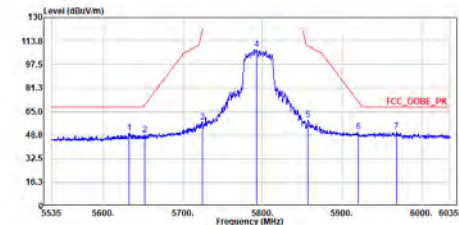


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5632.000	50.11	68.20	-18.09	55.77	14.84	Peak
2	5652.500	49.07	70.06	-20.99	54.19	14.88	Peak
3	5724.250	57.88	120.49	-62.61	42.80	15.08	Peak
4	5792.250	107.85	-----	-----	92.59	15.26	Peak
5	5857.250	59.27	118.17	-58.90	43.85	15.42	Peak
6	5921.000	50.84	71.17	-20.33	55.25	15.59	Peak
7	5958.500	50.95	68.20	-17.25	55.25	15.70	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac40_5795MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac40_5795MHz
Test By :Cyril Chen

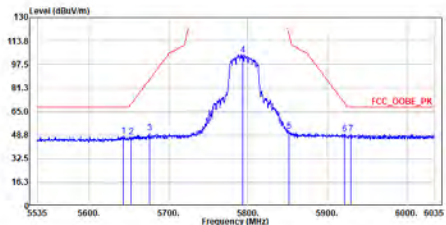


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5643.500	47.87	68.20	-20.33	53.00	14.87	Peak
2	5653.000	47.34	70.43	-23.09	52.45	14.89	Peak
3	5676.250	50.00	87.63	-37.63	55.04	14.96	Peak
4	5793.750	104.15	-----	-----	88.89	15.26	Peak
5	5852.000	51.53	117.64	-66.11	56.12	15.41	Peak
6	5921.750	49.31	70.61	-21.30	53.72	15.59	Peak
7	5929.750	49.38	68.20	-18.82	53.77	15.61	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5210MHz_H_AV

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac80_5210MHz
Test By :Cyril Chen

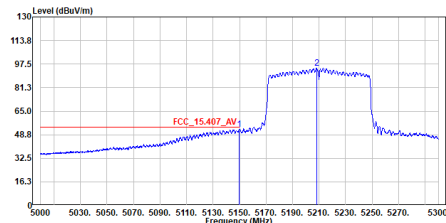


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5149.850	52.43	54.00	-1.57	38.47	13.96	Average
2	5208.050	94.77	-----	-----	80.72	14.05	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5210MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac80_5210MHz
Test By :Cyril Chen

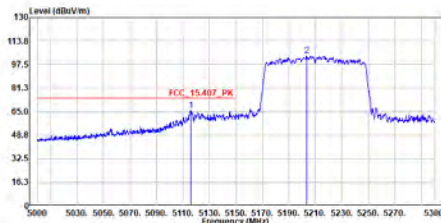


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5115.950	65.83	74.00	-8.17	51.93	13.90	Peak
2	5203.400	103.50	-----	-----	89.86	14.04	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5210MHz_V_AV

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac80_5210MHz
Test By :Cyril Chen

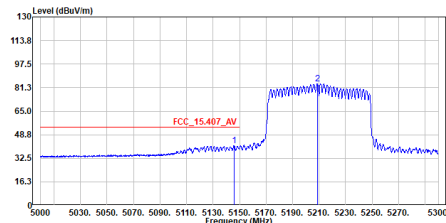


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5145.950	41.41	54.00	-12.59	27.45	13.96	Average
2	5208.800	84.02	-----	-----	69.97	14.05	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5210MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac80_5210MHz
Test By :Cyril Chen

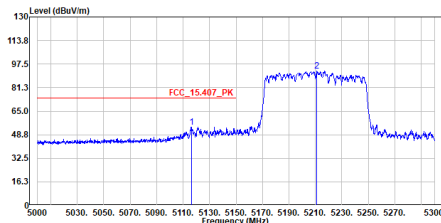


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5116.400	53.89	74.00	-20.11	39.99	13.90	Peak
2	5211.200	92.55	-----	-----	78.50	14.05	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5290MHz_H_AV

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac80_5290MHz
Test By :Brook Cheng

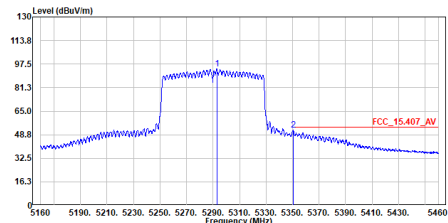


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5292.900	94.00	-----	-----	79.82	14.18	Average
2	5350.500	51.04	54.00	-2.16	37.57	14.27	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5290MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac80_5290MHz
Test By :Brook Cheng

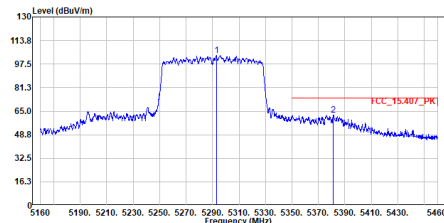


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5293.050	103.51	-----	-----	89.33	14.18	Peak
2	5381.400	62.44	74.00	-11.56	48.11	14.33	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5290MHz_V_AV

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac80_5290MHz
Test By :Brook Cheng

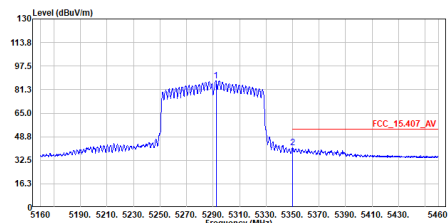


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5292.300	87.38	-----	-----	73.20	14.18	Average
2	5350.000	41.06	54.00	-12.94	26.79	14.27	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5290MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac80_5290MHz
Test By :Brook Cheng

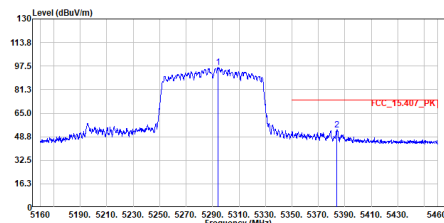


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5293.950	96.42	-----	-----	82.23	14.19	Peak
2	5384.100	53.57	74.00	-20.43	39.24	14.33	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5530MHz_H_AV

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac80_5530MHz
Test By :Cyril Chen

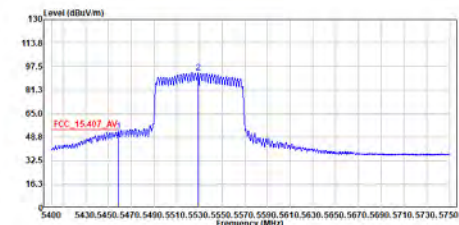


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5458.975	53.20	54.00	-0.80	38.76	14.44	Average
2	5528.975	93.23	-----	-----	78.66	14.57	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5530MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac80_5530MHz
Test By :Cyril Chen

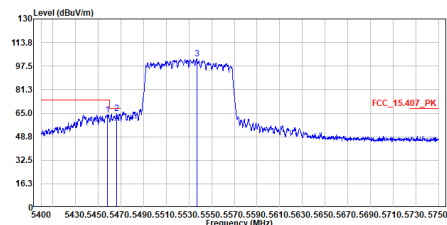


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5458.100	63.80	74.00	-10.20	49.36	14.44	Peak
2	5466.325	64.79	68.20	-3.41	50.35	14.44	Peak
3	5537.025	102.56	-----	-----	87.96	14.60	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5530MHz_V_AV

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac80_5530MHz
Test By :Cyril Chen

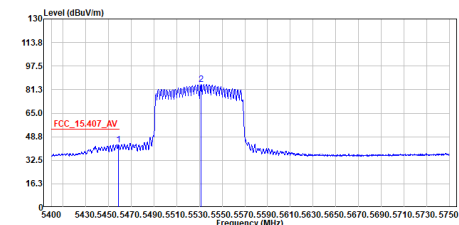


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5458.975	43.33	54.00	-10.67	28.89	14.44	Average
2	5531.425	84.82	-----	-----	70.23	14.59	Average

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5530MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac80_5530MHz
Test By :Cyril Chen

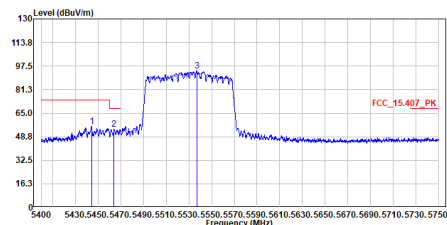


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	Limit	Level	dB	
1	5444.100	55.81	74.00	-18.19	41.39	14.42	Peak
2	5464.050	54.11	68.20	-14.09	39.67	14.44	Peak
3	5536.850	94.24	-----	-----	79.64	14.60	Peak

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5610MHz_H_AV

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac80_5610MHz
Test By :Cyril Chen

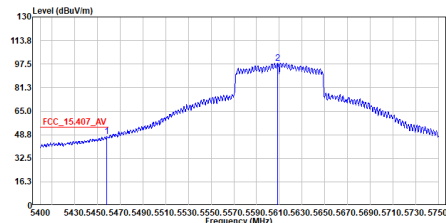


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5458.450	47.77	54.00	-6.23	33.33	14.44	Average
2	5688.775	98.25	-----	-----	83.46	14.79	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5610MHz_H_PK

Site :HC-CB04
Condition :3m ,Horizontal
Mode :TX_ac80_5610MHz
Test By :Cyril Chen

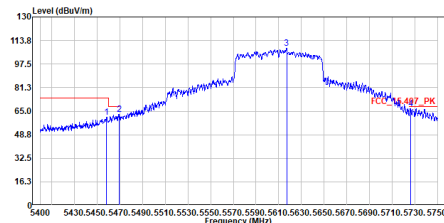


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5458.450	68.63	74.00	-13.37	46.19	14.44	Peak
2	5469.650	62.93	68.20	-5.27	48.48	14.45	Peak
3	5617.000	108.43	-----	-----	93.63	14.80	Peak
4	5726.200	66.60	68.20	-1.60	51.51	15.09	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5610MHz_V_AV

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac80_5610MHz
Test By :Cyril Chen

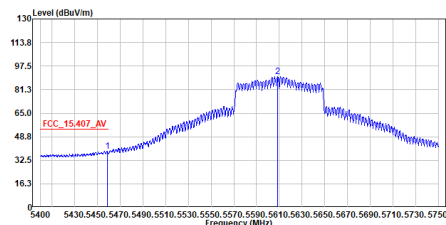


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5458.800	38.87	54.00	-15.13	24.43	14.44	Average
2	5688.600	98.12	-----	-----	75.33	14.79	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5610MHz_V_PK

Site :HC-CB04
Condition :3m ,Vertical
Mode :TX_ac80_5610MHz
Test By :Cyril Chen

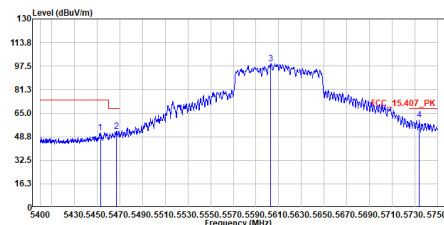


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	5452.850	51.45	74.00	-22.55	37.03	14.42	Peak
2	5467.025	52.37	68.20	-15.83	37.93	14.44	Peak
3	5603.175	99.21	-----	-----	84.44	14.77	Peak
4	5733.725	68.21	68.20	-7.99	45.11	15.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5775MHz_H_PK

Site :HC-CB04
 Condition :3m ,Horizontal
 Mode :TX_ac80_5775MHz
 Test By :Cyril Chen

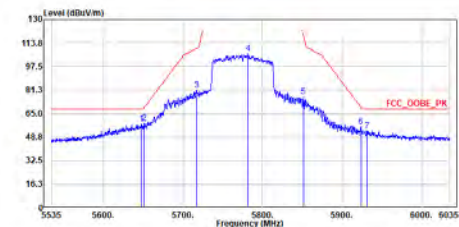


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5648.000	57.77	68.20	-10.43	42.89	14.88	Peak
2	5651.000	58.32	68.95	-10.63	43.44	14.88	Peak
3	5717.250	80.84	110.03	-29.19	65.79	15.05	Peak
4	5781.750	106.67	-----	-----	91.44	15.23	Peak
5	5851.250	76.73	119.35	-42.62	61.32	15.41	Peak
6	5921.750	55.05	69.13	-13.28	40.36	15.59	Peak
7	5931.250	53.21	68.20	-14.99	37.59	15.62	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

TX_ac80_5775MHz_V_PK

Site :HC-CB04
 Condition :3m ,Vertical
 Mode :TX_ac80_5775MHz
 Test By :Cyril Chen

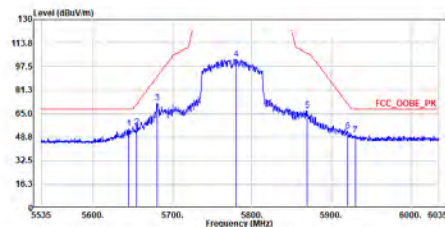

No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	5644.750	54.44	68.20	-13.76	39.57	14.87	Peak
2	5655.000	55.44	71.91	-16.47	40.54	14.90	Peak
3	5680.500	72.23	90.77	-18.54	57.27	14.96	Peak
4	5780.500	102.64	-----	-----	87.43	15.21	Peak
5	5869.250	67.05	106.81	-39.76	51.60	15.45	Peak
6	5920.500	53.19	71.54	-18.35	37.60	15.59	Peak
7	5930.000	50.21	68.20	-17.99	34.60	15.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.