

FCC Radio Test Report

FCC ID: 2AQ68W696S6

Report No. : BTL-FCCP-7-2512T053
Equipment : 5G WWAN Module
Model Name : T99W696
Brand Name : Foxconn
Applicant : Hon Lin Technology Co., Ltd
Address : 11F, No.32, Jihu Rd., Neihu Dist., Taipei City 114, Taiwan R.O.C.

Radio Function : NR

FCC Rule Part(s) : FCC CFR Title 47, Part 22, Subpart H

Date of Receipt : 2025/12/11
Date of Test : 2026/1/16 ~ 2026/3/13
 2026/5/13 ~ 2026/5/14
Issued Date : 2026/5/28

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by : Brett Shen
Brett Shen, Engineer

Approved by : Jerry Chuang
Jerry Chuang, Vice Manager



BTL Inc.

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com Service mail: btl_ga@newbtl.com



Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the Customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

1	SUMMARY OF TEST RESULTS	5
1.1	REFERENCE TEST GUIDANCE	6
1.2	TEST FACILITY	6
1.3	MEASUREMENT UNCERTAINTY	6
1.4	TEST ENVIRONMENT CONDITIONS	6
2	GENERAL INFORMATION	7
2.1	DESCRIPTION OF EUT	7
2.2	TEST MODES	10
2.3	BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.4	SUPPORT UNITS	11
3	EFFECTIVE RADIATED POWER MEASUREMENT	12
3.1	LIMIT	12
3.2	TEST PROCEDURE	12
3.3	DEVIATION FROM TEST STANDARD	12
3.4	TEST SETUP	12
3.5	EUT OPERATING CONDITIONS	12
3.6	TEST RESULT	12
4	RADIATED SPURIOUS EMISSIONS MEASUREMENT	13
4.1	LIMIT	13
4.2	TEST PROCEDURE	13
4.3	DEVIATION FROM TEST STANDARD	13
4.4	TEST SETUP	14
4.5	EUT OPERATING CONDITIONS	14
4.6	TEST RESULT	14
5	LIST OF MEASURING EQUIPMENTS	15
6	EUT TEST PHOTO	16
7	EUT PHOTOS	16
APPENDIX A	EFFECTIVE RADIATED POWER	17
APPENDIX B	RADIATED SPURIOUS EMISSIONS	38

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-7-2512T053	R00	Original Report.	2026/3/31	Invalid
BTL-FCCP-7-2512T053	R01	Revised report to address TCB's comments.	2026/5/18	Invalid
BTL-FCCP-7-2512T053	R02	Revised report to address TCB's comments.	2026/5/19	Invalid
BTL-FCCP-7-2512T053	R03	Revised report to address TCB's comments.	2026/5/28	Valid

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

Standard(s) Section	Description	Test Result	Judgement	Remark
2.1046 22.913(a)(5)	Effective Radiated Power	APPENDIX A	Pass	-----
2.1053 22.917(a)	Radiated Spurious Emissions	APPENDIX B	Pass	-----

Statement of Conformity

The statement of conformity is based on the binary decision rule according to IEC Guide 115 and ILAC G8 "simple acceptance" principle. Without considering measurement uncertainty, its specific risk is less than 50% PFA. (PFA: Probability of False Accept)

NOTE:

- (1) "N/A" denotes test is not applicable in this Test Report.
- (2) The report format version is TP.1.1.1.
- (3) This test report is issued for the RF module (FCC ID: 2AQ68W696S6) to be incorporated to the host device (Model number: TP00174A, TP00174B), Product name: Notebook Computer).
Since the RF module has been certificated, after evaluation, above test items were criticized and reconfirmed in this report.
- (4) After spot check, this revision does not change original radio parameters.
- (5) The only difference between TP00174A and TP00174B is the CPU. All other specifications, test methods, test conditions, and equipment configurations applicable to the current project are identical between the two host models.
Full testing was performed on TP00174A, while spot-check testing was performed on TP00174B. LTE Band 30 and 5G NR Band 30 were identified as the worst-case configurations and were therefore selected for spot-check evaluation.
The corresponding spot-check test data are documented in test reports BTL-FCCP-3-2512T053 and BTL-FCCP-9-2512T053.

1.1 REFERENCE TEST GUIDANCE

ANSI C63.26-2015
ANSI/TIA-603-E-2016
FCC KDB 971168 D01 Power Meas License Digital Systems v03r01

1.2 TEST FACILITY

The test locations stated below are under the TAF Accreditation Number 0659.

The test location(s) used to collect the test data in this report are:

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
(FCC RN: 674415) (FCC DN: TW0659)

☐ C05 ☒ SR10 ☐ SR11

No. 72, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
(FCC RN: 674415) (FCC DN: TW0659)

☐ C06 ☒ CB21 ☐ CB22

1.3 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**.

A. Radiated emissions test:

Test Site	Measurement Frequency Range (GHz)	U (dB)
CB21 (3m)	0.03~0.2	4.35
	0.2~1	4.78
	1 ~ 6	5.45
	6 ~ 18	5.04
	18 ~ 26	4.03
	26 ~ 40	4.33

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.4 TEST ENVIRONMENT CONDITIONS

Test Item	Environment Condition	Test Voltage	Tested by
Effective Radiated Power	24.5 °C, 55 %	AC 120V	Dolly Lin
Radiated Spurious Emissions	Refer to data	AC 120V	Emily Chang

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	5G WWAN Module			
Model Name	T99W696			
Brand Name	Foxconn			
Model Difference	N/A			
Power Source	Supplied from host system.			
Power Rating	3.3 Vdc			
Host device information				
Equipment	Notebook Computer			
Model Name	TP00174A, TP00174B			
Brand Name	Lenovo			
Model Difference	Different CPUs.			
Power Source	DC voltage supplied from External Power Supply. (Lenovo / ADL140YGSHC3A)			
Power Rating	I/P: 100-240V~, 2.5A, 50-60Hz O/P: 28.0VDC, 5.0A, 140.0W / 5.0VDC 3.0A 15.0W / 9.0VDC 3.0A 27.0W / 15.0VDC 3.0A 45.0W / 20.0VDC 5.0A 100.0W			
WIFI+BT Module	Intel® / BE211D2W			
WWAN Module	Foxconn / T99W696			
Operation Frequency	Band	UL Frequency (MHz)		DL Frequency (MHz)
	NR n5	824 ~ 849		869 ~ 894
	NR n26	824 ~ 849		869 ~ 894
Maximum ERP - Main Antenna	Band	BW (MHz)	Mode	Power (W)
	NR n5	5	PI/2 BPSK	0.063
			QPSK	0.065
			16QAM	0.052
			64QAM	0.039
			256QAM	0.023
		10	PI/2 BPSK	0.064
			QPSK	0.065
			16QAM	0.052
			64QAM	0.039
			256QAM	0.023
		15	PI/2 BPSK	0.064
			QPSK	0.066
			16QAM	0.052
			64QAM	0.039
			256QAM	0.023
		20	PI/2 BPSK	0.065
			QPSK	0.066
			16QAM	0.053
			64QAM	0.039
			256QAM	0.023
	NR n26	5	PI/2 BPSK	0.065
			QPSK	0.067
			16QAM	0.053
			64QAM	0.040
			256QAM	0.023

Maximum ERP - Main Antenna	NR n26	10	PI/2 BPSK	0.066
			QPSK	0.067
			16QAM	0.053
			64QAM	0.040
			256QAM	0.023
		15	PI/2 BPSK	0.066
			QPSK	0.068
			16QAM	0.054
			64QAM	0.041
			256QAM	0.023
		20	PI/2 BPSK	0.067
			QPSK	0.069
			16QAM	0.054
			64QAM	0.041
			256QAM	0.023
Maximum ERP	NSA B2-n5	5	PI/2 BPSK	0.062
			QPSK	0.064
			16QAM	0.049
			64QAM	0.038
			256QAM	0.022
		10	PI/2 BPSK	0.063
			QPSK	0.064
			16QAM	0.050
			64QAM	0.038
			256QAM	0.022
		15	PI/2 BPSK	0.063
			QPSK	0.064
			16QAM	0.050
			64QAM	0.038
			256QAM	0.022
		20	PI/2 BPSK	0.064
			QPSK	0.065
			16QAM	0.051
			64QAM	0.038
			256QAM	0.022
	NSA B30-n5	5	PI/2 BPSK	0.061
			QPSK	0.061
			16QAM	0.048
			64QAM	0.036
			256QAM	0.021
		10	PI/2 BPSK	0.061
			QPSK	0.062
			16QAM	0.048
			64QAM	0.036
			256QAM	0.021
		15	PI/2 BPSK	0.061
			QPSK	0.062
			16QAM	0.049
			64QAM	0.037
			256QAM	0.021
		20	PI/2 BPSK	0.061
			QPSK	0.062
			16QAM	0.049
			64QAM	0.037
			256QAM	0.022

Maximum ERP	NSA B7-n26	5	PI/2 BPSK	0.065
			QPSK	0.066
			16QAM	0.053
			64QAM	0.039
			256QAM	0.023
		10	PI/2 BPSK	0.065
			QPSK	0.066
			16QAM	0.054
			64QAM	0.040
			256QAM	0.023
		15	PI/2 BPSK	0.065
			QPSK	0.067
			16QAM	0.054
			64QAM	0.040
			256QAM	0.023
		20	PI/2 BPSK	0.066
			QPSK	0.068
			16QAM	0.054
			64QAM	0.041
			256QAM	0.023
Test Model		T99W696		
Sample Status		Engineering Sample		
EUT Modification(s)		N/A		

NOTE:

(1) The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

(2) Table for Filed Antenna:

Antenna	Manufacture	Parts Number	Type	Connector	Gain (dBi)	Note
Main (TX)	AWAN	DC33002C800	PIFA	I-PEX	-2.76	NR Band n5
					-2.81	NR Band n26
MIMO1 (RX)	AWAN	DC33002C800	PIFA	I-PEX	-	RX only

Antenna	Manufacture	Parts Number	Type	Connector	Gain (dBi)	Note
Main (TX)	Luxshare-ICT	DC33002C500	PIFA	I-PEX	-2.76	NR Band n5
					-2.81	NR Band n26
MIMO1 (RX)	Luxshare-ICT	DC33002C500	PIFA	I-PEX	-	RX only

SISO/NSA/SRS are evaluated based on the maximum gain of the corresponding antenna for the applicable band. For the MIMO mode, is completely uncorrelated, the directional gain is determined by selecting the maximum gain among all antennas.

(3) The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

(4) Antenna Configuration

Band	Main Ant. #	ENDC Ant. #	MIMO Ant. #	SRS Ant. #
NR n5	Main	Main	-	-
NR n26	Main	Main	-	-

2.2 TEST MODES


Test Items	Band	Test Mode	Note
Effective Radiated Power	NR n5	Refer to APPENDIX A	-
	NR n26		
	NSA B2-n5		
	NSA B30-n5		
	NSA B7-n26		
Radiated Spurious Emissions (Below 1G)	NR n26	Refer to APPENDIX B	-
Radiated Spurious Emissions (Above 1G)	NR n26	Refer to APPENDIX B	-

NOTE:

- (1) All X, Y and Z axes are evaluated, but only the worst case (X axis) is recorded.
- (2) For Radiated Spurious Emissions both PI/2 BPSK, QPSK, 16QAM, 64QAM and 256QAM are evaluated, but only the worst case (QPSK) is recorded.
- (3) NR n26 (824 ~ 849 MHz) overlaps the entire frequency range of NR n5 (824 ~ 849 MHz). Therefore, test data provided in this report covers n5 as well as n26.
- (4) SA band and NSA band are evaluated, the SA band is the worst and recorded as below test data.

2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

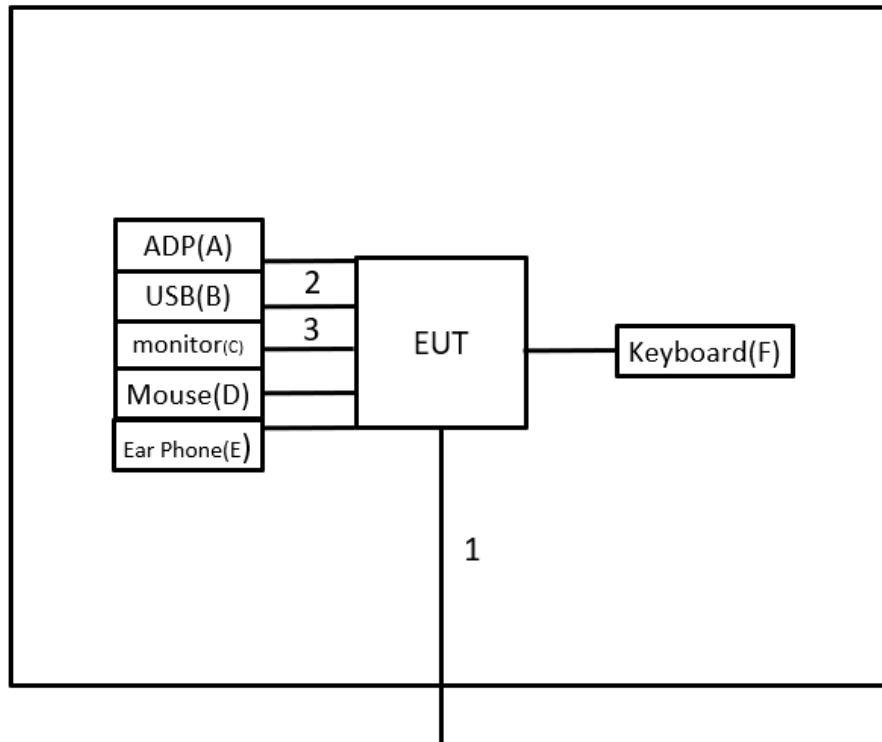

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	ADP	Lenovo	ADL140YGSHC3A	N/A	Supplied by test requester.
B	USB	ADATA	UV150	N/A	Furnished by test lab.
C	27" 4K Monitor	DELL	P2415Q	N/A	Furnished by test lab.
D	Mouse	Lenovo	SM-8823	N/A	Furnished by test lab.
E	Ear Phone	HTC	S260	N/A	Furnished by test lab.
F	Keyboard	Bloody	KB-8	N/A	Furnished by test lab.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	N/A	N/A	20m	RJ45 Cable	Furnished by test lab.
2	N/A	N/A	0.1m	USB-C to USB 3.0 CABLE	Furnished by test lab.
3	N/A	N/A	1.8m	HDMI	Furnished by test lab.

3 EFFECTIVE RADIATED POWER MEASUREMENT

3.1 LIMIT

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts (38.45 dBm).

3.2 TEST PROCEDURE

The testing follows FCC KDB 971168 v03r01 Section 5.8.


- Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
- $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$
- ERP can be calculated form EIRP by subtracting the gain of dipole, $ERP = EIPR - 2.15\text{dBi.}$
- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

Conducted Measurement:



3.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

3.6 TEST RESULT

Please refer to the APPENDIX A.

4 RADIATED SPURIOUS EMISSIONS MEASUREMENT

4.1 LIMIT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm.

NOTE:

(1) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level (dBm)		Correct Factor (dB/m)		Measurement Value (dBm)
-50.43	+	-2.11	=	-52.54

Measurement Value (dBm)		Limit Value (dBm)		Margin Level (dB)
-52.54	-	-13	=	-39.54

4.2 TEST PROCEDURE



The testing follows FCC KDB 971168 v03r01 Section 6.2.

- Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value " of step a. Record the power level of S.G
- EIRP = Output power level of S.G – TX cable loss + Antenna gain of substitution horn.
- ERP can be calculated form EIRP by subtracting the gain of dipole, $ERP = EIPR - 2.15\text{dBi}$.
- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.3 DEVIATION FROM TEST STANDARD

No deviation.

4.4 TEST SETUP

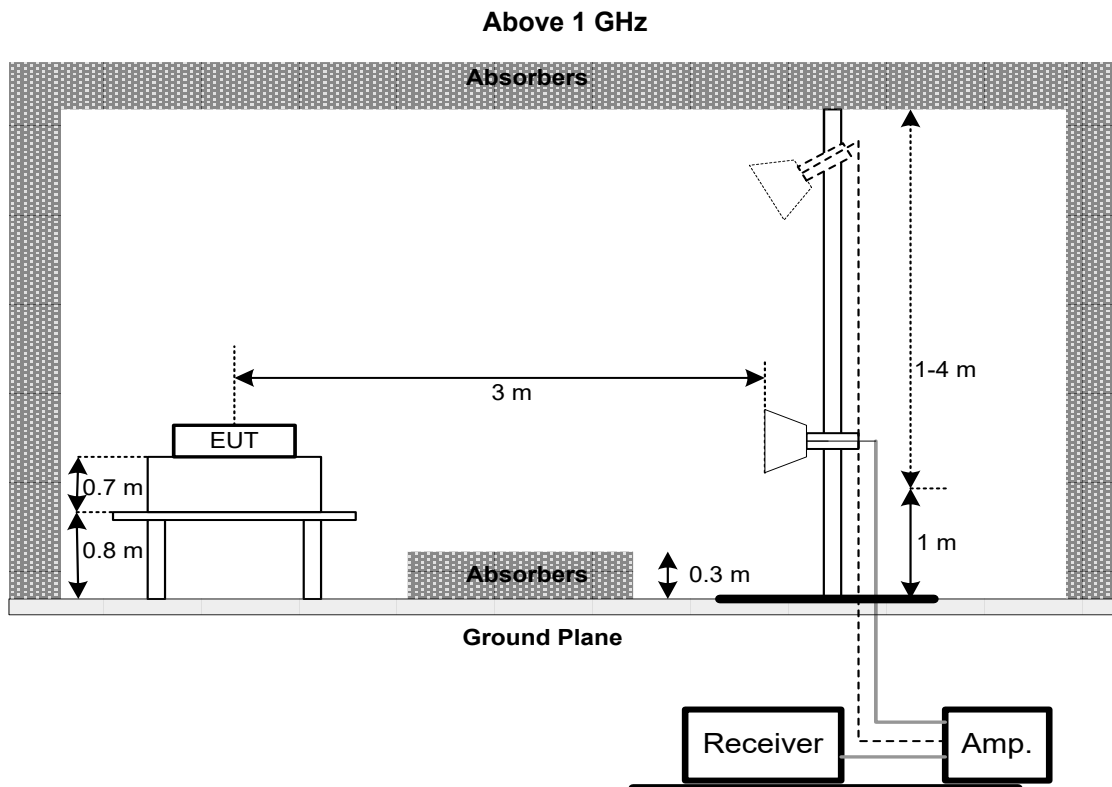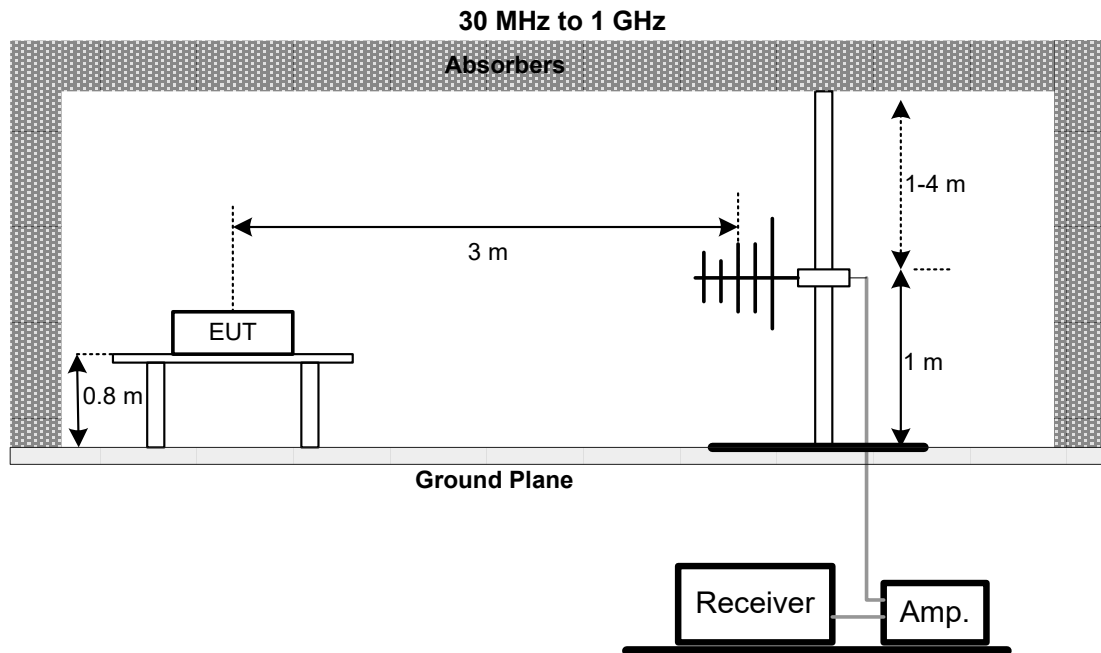

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT

Please refer to the APPENDIX B.

5 LIST OF MEASURING EQUIPMENTS

Effective Radiated Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	WIRELESS COMMUNICATION TEST SET	Agilent	E5515C	GB47390193	2025/7/2	2026/7/1
2	Radio Communication Test Station	ANRITSU	MT8821C	6262044728	2025/11/21	2026/11/20
3	Radio Communication Analyzer	ANRITSU	MT8000A	6262036844	2025/11/25	2026/11/24

Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Preamplifier	EMCI	EMC330N	980850	2025/9/3	2026/9/2
2	Preamplifier	EMCI	EMC118A45SE	980819	2025/3/5	2026/3/4
3	Pre-Amplifier	EMCI	EMC184045SE	980907	2025/9/3	2026/9/2
4	Preamplifier	EMCI	EMC001340	980579	2025/9/3	2026/9/2
5	Test Cable	EMCI	EMC104-SM-1000	180809	2025/3/5	2026/3/4
6	Test Cable	EMCI	EMC104-SM-SM-3000	220322	2025/3/5	2026/3/4
7	Test Cable	EMCI	EMC105-SM-SM-8000	220422	2025/10/15	2026/10/14
8	EXA Signal Analyzer	keysight	N9020B	MY57120120	2025/2/19	2026/2/18
9	Loop Ant	Electro-Metrics	EMCI-LPA600	291	2025/9/1	2026/8/31
10	Horn Antenna	RFSPIN	DRH18-E	211202A18EN	2025/5/9	2026/5/8
11	Horn Ant	Schwarzbeck	BBHA 9170D	1136	2025/5/15	2026/5/14
12	Log-bicon Antenna	Schwarzbeck	VULB9168	1369	2025/7/4	2026/7/3
13	6dB Attenuator	EMCI	EMCI-N-6-06	AT-06001	2025/7/4	2026/7/3
14	Test Cable	EMCI	EMC101G-KM-KM-3000	220329	2025/3/12	2026/3/11
15	Test Cable	EMCI	EMC102-KM-KM-1000	220327	2025/3/12	2026/3/11
16	Measurement Software	EZ	EZ EMC (Version NB-03A1-01)	N/A	N/A	N/A
17	Radio Communication Test Station	ANRITSU	MT8821C	6262044728	2025/11/21	2026/11/20
18	WIRELESS COMMUNICATION TEST SET	Agilent	E5515C	GB47390193	2025/7/2	2026/7/1

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

6 EUT TEST PHOTO

Please refer to document Appendix No.: TP-2512T053-FCCP-1 (APPENDIX-TEST PHOTOS).

7 EUT PHOTOS

Please refer to document Appendix No.: EP-2512T053-1 (APPENDIX-EUT PHOTOS).

APPENDIX A EFFECTIVE RADIATED POWER

NR Band n5 Power:

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	Average power (dBm)	ERP power (dBm)	ERP power (W)
5	5	165300	826.5	PI/2 BPSK	1	1	22.87	17.96	0.063
					1	23	22.86	17.95	0.062
					12	6	22.81	17.90	0.062
					1	0	22.42	17.51	0.056
					1	24	22.45	17.54	0.057
					25	0	22.35	17.44	0.055
				QPSK	1	1	22.92	18.01	0.063
					1	23	23.03	18.12	0.065
					12	6	22.98	18.07	0.064
					1	0	21.90	16.99	0.050
					1	24	21.92	17.01	0.050
					25	0	21.86	16.95	0.050
				16QAM	1	1	22.00	17.09	0.051
				64QAM	1	1	20.70	15.79	0.038
				256QAM	1	1	18.27	13.36	0.022
		167300	836.5	PI/2 BPSK	1	1	22.91	18.00	0.063
					1	23	22.91	18.00	0.063
					12	6	22.76	17.85	0.061
					1	0	22.50	17.59	0.057
					1	24	22.38	17.47	0.056
					25	0	22.42	17.51	0.056
				QPSK	1	1	23.04	18.13	0.065
					1	23	22.95	18.04	0.064
					12	6	22.91	18.00	0.063
					1	0	21.99	17.08	0.051
					1	24	22.07	17.16	0.052
					25	0	21.91	17.00	0.050
				16QAM	1	1	22.04	17.13	0.052
				64QAM	1	1	20.79	15.88	0.039
				256QAM	1	1	18.45	13.54	0.023
		169300	846.5	PI/2 BPSK	1	1	22.69	17.78	0.060
					1	23	22.72	17.81	0.060
					12	6	22.78	17.87	0.061
					1	0	22.27	17.36	0.054
					1	24	22.30	17.39	0.055
					25	0	22.20	17.29	0.054
				QPSK	1	1	22.76	17.85	0.061
					1	23	22.76	17.85	0.061
					12	6	22.82	17.91	0.062
					1	0	21.79	16.88	0.049
					1	24	21.79	16.88	0.049
					25	0	21.90	16.99	0.050
				16QAM	1	1	21.79	16.88	0.049
				64QAM	1	1	20.51	15.60	0.036
				256QAM	1	1	18.11	13.20	0.021

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	Average power (dBm)	ERP power (dBm)	ERP power (W)
5	10	165800	829.0	PI/2 BPSK	1	1	22.90	17.99	0.063
					1	50	22.87	17.96	0.063
					25	12	22.85	17.94	0.062
					1	0	22.46	17.55	0.057
					1	51	22.49	17.58	0.057
					50	0	22.37	17.46	0.056
				QPSK	1	1	22.96	18.05	0.064
					1	50	23.04	18.13	0.065
					25	12	22.99	18.08	0.064
					1	0	21.94	17.03	0.050
					1	51	21.97	17.06	0.051
					50	0	21.89	16.98	0.050
				16QAM	1	1	22.04	17.13	0.052
				64QAM	1	1	20.74	15.83	0.038
				256QAM	1	1	18.30	13.39	0.022
		167300	836.5	PI/2 BPSK	1	1	22.95	18.04	0.064
					1	50	22.95	18.04	0.064
					25	12	22.81	17.90	0.062
					1	0	22.52	17.61	0.058
					1	51	22.39	17.48	0.056
					50	0	22.45	17.54	0.057
				QPSK	1	1	23.06	18.15	0.065
					1	50	22.98	18.07	0.064
					25	12	22.94	18.03	0.064
					1	0	22.03	17.12	0.052
					1	51	22.08	17.17	0.052
					50	0	21.93	17.02	0.050
				16QAM	1	1	22.05	17.14	0.052
				64QAM	1	1	20.81	15.90	0.039
				256QAM	1	1	18.48	13.57	0.023
		168800	844.0	PI/2 BPSK	1	1	22.75	17.84	0.061
					1	50	22.74	17.83	0.061
					25	12	22.81	17.90	0.062
					1	0	22.33	17.42	0.055
					1	51	22.31	17.40	0.055
					50	0	22.23	17.32	0.054
				QPSK	1	1	22.82	17.91	0.062
					1	50	22.77	17.86	0.061
					25	12	22.84	17.93	0.062
					1	0	21.83	16.92	0.049
					1	51	21.80	16.89	0.049
					50	0	21.91	17.00	0.050
				16QAM	1	1	21.84	16.93	0.049
				64QAM	1	1	20.56	15.65	0.037
				256QAM	1	1	18.13	13.22	0.021

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	Average power (dBm)	ERP power (dBm)	ERP power (W)
5	15	166300	831.5	PI/2 BPSK	1	1	22.94	18.03	0.064
					1	77	22.89	17.98	0.063
					36	18	22.89	17.98	0.063
					1	0	22.47	17.56	0.057
					1	78	22.53	17.62	0.058
					75	0	22.42	17.51	0.056
				QPSK	1	1	23.01	18.10	0.065
					1	77	23.05	18.14	0.065
					36	18	23.02	18.11	0.065
					1	0	22.00	17.09	0.051
					1	78	22.01	17.10	0.051
					75	0	21.94	17.03	0.050
				16QAM	1	1	22.05	17.14	0.052
				64QAM	1	1	20.80	15.89	0.039
				256QAM	1	1	18.36	13.45	0.022
		167300	836.5	PI/2 BPSK	1	1	22.98	18.07	0.064
					1	77	22.98	18.07	0.064
					36	18	22.87	17.96	0.063
					1	0	22.58	17.67	0.058
					1	78	22.44	17.53	0.057
					75	0	22.46	17.55	0.057
				QPSK	1	1	23.10	18.19	0.066
					1	77	23.03	18.12	0.065
					36	18	22.99	18.08	0.064
					1	0	22.04	17.13	0.052
					1	78	22.12	17.21	0.053
					75	0	21.98	17.07	0.051
				16QAM	1	1	22.07	17.16	0.052
				64QAM	1	1	20.84	15.93	0.039
				256QAM	1	1	18.50	13.59	0.023
		168300	841.5	PI/2 BPSK	1	1	22.78	17.87	0.061
					1	77	22.77	17.86	0.061
					36	18	22.87	17.96	0.063
					1	0	22.35	17.44	0.055
					1	78	22.33	17.42	0.055
					75	0	22.28	17.37	0.055
				QPSK	1	1	22.85	17.94	0.062
					1	77	22.79	17.88	0.061
					36	18	22.89	17.98	0.063
					1	0	21.88	16.97	0.050
					1	78	21.84	16.93	0.049
					75	0	21.94	17.03	0.050
				16QAM	1	1	21.88	16.97	0.050
				64QAM	1	1	20.58	15.67	0.037
				256QAM	1	1	18.14	13.23	0.021

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 W \cdot 10^{(P(dBm) / 10)} / 1000$

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	Average power (dBm)	ERP power (dBm)	ERP power (W)
5	20	166800	834.0	PI/2 BPSK	1	1	22.98	18.07	0.064
					1	104	22.93	18.02	0.063
					50	25	22.93	18.02	0.063
					1	0	22.50	17.59	0.057
					1	105	22.56	17.65	0.058
					100	0	22.47	17.56	0.057
				QPSK	1	1	23.05	18.14	0.065
					1	104	23.08	18.17	0.066
					50	25	23.04	18.13	0.065
					1	0	22.03	17.12	0.052
					1	105	22.05	17.14	0.052
					100	0	21.98	17.07	0.051
				16QAM	1	1	22.09	17.18	0.052
				64QAM	1	1	20.82	15.91	0.039
				256QAM	1	1	18.42	13.51	0.022
		167300	836.5	PI/2 BPSK	1	1	23.02	18.11	0.065
					1	104	23.03	18.12	0.065
					50	25	22.91	18.00	0.063
					1	0	22.63	17.72	0.059
					1	105	22.49	17.58	0.057
					100	0	22.50	17.59	0.057
				QPSK	1	1	23.12	18.21	0.066
					1	104	23.08	18.17	0.066
					50	25	23.05	18.14	0.065
					1	0	22.05	17.14	0.052
					1	105	22.17	17.26	0.053
					100	0	22.04	17.13	0.052
				16QAM	1	1	22.12	17.21	0.053
				64QAM	1	1	20.86	15.95	0.039
				256QAM	1	1	18.51	13.60	0.023
		167800	839.0	PI/2 BPSK	1	1	22.84	17.93	0.062
					1	104	22.81	17.90	0.062
					50	25	22.89	17.98	0.063
					1	0	22.37	17.46	0.056
					1	105	22.34	17.43	0.055
					100	0	22.33	17.42	0.055
				QPSK	1	1	22.89	17.98	0.063
					1	104	22.85	17.94	0.062
					50	25	22.91	18.00	0.063
					1	0	21.91	17.00	0.050
					1	105	21.87	16.96	0.050
					100	0	21.96	17.05	0.051
				16QAM	1	1	21.92	17.01	0.050
				64QAM	1	1	20.62	15.71	0.037
				256QAM	1	1	18.15	13.24	0.021

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

NR Band n26 Power:

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	Average power (dBm)	ERP power (dBm)	ERP power (W)
26 (824-849)	5	165300	826.5	PI/2 BPSK	1	1	22.94	17.98	0.063
					1	23	22.84	17.88	0.061
					12	6	22.85	17.89	0.062
					1	0	22.42	17.46	0.056
					1	24	22.38	17.42	0.055
					25	0	22.42	17.46	0.056
				QPSK	1	1	22.97	18.01	0.063
					1	23	22.90	17.94	0.062
					12	6	22.87	17.91	0.062
					1	0	21.99	17.03	0.050
					1	24	21.95	16.99	0.050
					25	0	21.83	16.87	0.049
				16QAM	1	1	22.05	17.09	0.051
				64QAM	1	1	20.66	15.70	0.037
				256QAM	1	1	18.30	13.34	0.022
		167300	836.5	PI/2 BPSK	1	1	22.81	17.85	0.061
					1	23	22.83	17.87	0.061
					12	6	22.86	17.90	0.062
					1	0	22.46	17.50	0.056
					1	24	22.42	17.46	0.056
					25	0	22.38	17.42	0.055
				QPSK	1	1	22.92	17.96	0.063
					1	23	22.99	18.03	0.064
					12	6	22.89	17.93	0.062
					1	0	21.97	17.01	0.050
					1	24	22.00	17.04	0.051
					25	0	21.92	16.96	0.050
				16QAM	1	1	21.91	16.95	0.050
				64QAM	1	1	20.70	15.74	0.037
				256QAM	1	1	18.25	13.29	0.021
		169300	846.5	PI/2 BPSK	1	1	23.11	18.15	0.065
					1	23	23.07	18.11	0.065
					12	6	23.10	18.14	0.065
					1	0	22.76	17.80	0.060
					1	24	22.57	17.61	0.058
					25	0	22.60	17.64	0.058
				QPSK	1	1	23.19	18.23	0.067
					1	23	23.13	18.17	0.066
					12	6	23.19	18.23	0.067
					1	0	22.31	17.35	0.054
					1	24	22.08	17.12	0.052
					25	0	22.24	17.28	0.053
				16QAM	1	1	22.17	17.21	0.053
				64QAM	1	1	20.96	16.00	0.040
				256QAM	1	1	18.51	13.55	0.023

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	Average power (dBm)	ERP power (dBm)	ERP power (W)
26 (824-849)	10	165800	829.0	PI/2 BPSK	1	1	22.99	18.03	0.064
					1	50	22.85	17.89	0.062
					25	12	22.86	17.90	0.062
					1	0	22.44	17.48	0.056
					1	51	22.40	17.44	0.055
					50	0	22.43	17.47	0.056
				QPSK	1	1	23.00	18.04	0.064
					1	50	22.96	18.00	0.063
					25	12	22.89	17.93	0.062
					1	0	22.04	17.08	0.051
					1	51	21.98	17.02	0.050
					50	0	21.89	16.93	0.049
				16QAM	1	1	22.07	17.11	0.051
				64QAM	1	1	20.69	15.73	0.037
				256QAM	1	1	18.31	13.35	0.022
		167300	836.5	PI/2 BPSK	1	1	22.85	17.89	0.062
					1	50	22.88	17.92	0.062
					25	12	22.87	17.91	0.062
					1	0	22.50	17.54	0.057
					1	51	22.46	17.50	0.056
					50	0	22.43	17.47	0.056
				QPSK	1	1	22.96	18.00	0.063
					1	50	23.04	18.08	0.064
					25	12	22.92	17.96	0.063
					1	0	22.02	17.06	0.051
					1	51	22.03	17.07	0.051
					50	0	21.98	17.02	0.050
				16QAM	1	1	21.95	16.99	0.050
				64QAM	1	1	20.72	15.76	0.038
				256QAM	1	1	18.29	13.33	0.022
		168800	844.0	PI/2 BPSK	1	1	23.14	18.18	0.066
					1	50	23.12	18.16	0.065
					25	12	23.14	18.18	0.066
					1	0	22.78	17.82	0.061
					1	51	22.58	17.62	0.058
					50	0	22.66	17.70	0.059
				QPSK	1	1	23.22	18.26	0.067
					1	50	23.16	18.20	0.066
					25	12	23.23	18.27	0.067
					1	0	22.32	17.36	0.054
					1	51	22.12	17.16	0.052
					50	0	22.26	17.30	0.054
				16QAM	1	1	22.19	17.23	0.053
				64QAM	1	1	21.01	16.05	0.040
				256QAM	1	1	18.53	13.57	0.023

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	Average power (dBm)	ERP power (dBm)	ERP power (W)
26 (824-849)	15	166300	831.5	PI/2 BPSK	1	1	23.02	18.06	0.064
					1	77	22.89	17.93	0.062
					36	18	22.90	17.94	0.062
					1	0	22.47	17.51	0.056
					1	78	22.45	17.49	0.056
					75	0	22.45	17.49	0.056
				QPSK	1	1	23.04	18.08	0.064
					1	77	22.99	18.03	0.064
					36	18	22.94	17.98	0.063
					1	0	22.05	17.09	0.051
					1	78	21.99	17.03	0.050
					75	0	21.91	16.95	0.050
				16QAM	1	1	22.09	17.13	0.052
				64QAM	1	1	20.75	15.79	0.038
				256QAM	1	1	18.34	13.38	0.022
		167300	836.5	PI/2 BPSK	1	1	22.90	17.94	0.062
					1	77	22.93	17.97	0.063
					36	18	22.89	17.93	0.062
					1	0	22.52	17.56	0.057
					1	78	22.52	17.56	0.057
					75	0	22.48	17.52	0.056
				QPSK	1	1	23.00	18.04	0.064
					1	77	23.05	18.09	0.064
					36	18	22.97	18.01	0.063
					1	0	22.06	17.10	0.051
					1	78	22.04	17.08	0.051
					75	0	22.04	17.08	0.051
				16QAM	1	1	22.00	17.04	0.051
				64QAM	1	1	20.73	15.77	0.038
				256QAM	1	1	18.30	13.34	0.022
		168300	841.5	PI/2 BPSK	1	1	23.16	18.20	0.066
					1	77	23.13	18.17	0.066
					36	18	23.18	18.22	0.066
					1	0	22.80	17.84	0.061
					1	78	22.60	17.64	0.058
					75	0	22.68	17.72	0.059
				QPSK	1	1	23.24	18.28	0.067
					1	77	23.18	18.22	0.066
					36	18	23.27	18.31	0.068
					1	0	22.34	17.38	0.055
					1	78	22.14	17.18	0.052
					75	0	22.30	17.34	0.054
				16QAM	1	1	22.25	17.29	0.054
				64QAM	1	1	21.04	16.08	0.041
				256QAM	1	1	18.55	13.59	0.023

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 W \cdot 10^{(P(dBm) / 10)} / 1000$

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	Average power (dBm)	ERP power (dBm)	ERP power (W)
26 (824-849)	20	166800	834.0	PI/2 BPSK	1	1	23.04	18.08	0.064
					1	104	22.93	17.97	0.063
					50	25	22.94	17.98	0.063
					1	0	22.53	17.57	0.057
					1	105	22.48	17.52	0.056
					100	0	22.47	17.51	0.056
				QPSK	1	1	23.06	18.10	0.065
					1	104	23.04	18.08	0.064
					50	25	22.99	18.03	0.064
					1	0	22.07	17.11	0.051
					1	105	22.02	17.06	0.051
					100	0	21.95	16.99	0.050
				16QAM	1	1	22.12	17.16	0.052
				64QAM	1	1	20.77	15.81	0.038
				256QAM	1	1	18.40	13.44	0.022
		167300	836.5	PI/2 BPSK	1	1	22.93	17.97	0.063
					1	104	22.98	18.02	0.063
					50	25	22.95	17.99	0.063
					1	0	22.55	17.59	0.057
					1	105	22.54	17.58	0.057
					100	0	22.52	17.56	0.057
				QPSK	1	1	23.05	18.09	0.064
					1	104	23.09	18.13	0.065
					50	25	23.01	18.05	0.064
					1	0	22.07	17.11	0.051
					1	105	22.10	17.14	0.052
					100	0	22.08	17.12	0.052
				16QAM	1	1	22.05	17.09	0.051
				64QAM	1	1	20.77	15.81	0.038
				256QAM	1	1	18.35	13.39	0.022
		167800	839.0	PI/2 BPSK	1	1	23.20	18.24	0.067
					1	104	23.15	18.19	0.066
					50	25	23.23	18.27	0.067
					1	0	22.81	17.85	0.061
					1	105	22.64	17.68	0.059
					100	0	22.73	17.77	0.060
				QPSK	1	1	23.28	18.32	0.068
					1	104	23.20	18.24	0.067
					50	25	23.32	18.36	0.069
					1	0	22.36	17.40	0.055
					1	105	22.20	17.24	0.053
					100	0	22.31	17.35	0.054
				16QAM	1	1	22.31	17.35	0.054
				64QAM	1	1	21.06	16.10	0.041
				256QAM	1	1	18.59	13.63	0.023

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 W \cdot 10^{(P(dBm) / 10)} / 1000$

NSA B2-n5 Power:

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	Average power (dBm)	ERP power (dBm)	EIRP power (W)
NSA B2-n5	5	165300	826.5	PI/2 BPSK	1	1	22.71	17.80	0.060
					1	23	22.82	17.91	0.062
					12	6	22.71	17.80	0.060
					1	0	22.28	17.37	0.055
					1	24	22.47	17.56	0.057
					25	0	22.23	17.32	0.054
				QPSK	1	1	22.80	17.89	0.062
					1	23	22.94	18.03	0.064
					12	6	22.79	17.88	0.061
					1	0	21.87	16.96	0.050
					1	24	22.02	17.11	0.051
					25	0	21.75	16.84	0.048
				16QAM	1	1	21.72	16.81	0.048
				64QAM	1	1	20.54	15.63	0.037
				256QAM	1	1	18.11	13.20	0.021
		167300	836.5	PI/2 BPSK	1	1	22.81	17.90	0.062
					1	23	22.84	17.93	0.062
					12	6	22.74	17.83	0.061
					1	0	22.36	17.45	0.056
					1	24	22.36	17.45	0.056
					25	0	22.30	17.39	0.055
				QPSK	1	1	22.85	17.94	0.062
					1	23	22.84	17.93	0.062
					12	6	22.80	17.89	0.062
					1	0	21.90	16.99	0.050
					1	24	21.92	17.01	0.050
					25	0	21.69	16.78	0.048
				16QAM	1	1	21.83	16.92	0.049
				64QAM	1	1	20.60	15.69	0.037
				256QAM	1	1	18.03	13.12	0.021
		169300	846.5	PI/2 BPSK	1	1	22.76	17.85	0.061
					1	23	22.73	17.82	0.061
					12	6	22.67	17.76	0.060
					1	0	22.42	17.51	0.056
					1	24	22.34	17.43	0.055
					25	0	22.13	17.22	0.053
				QPSK	1	1	22.91	18.00	0.063
					1	23	22.84	17.93	0.062
					12	6	22.68	17.77	0.060
					1	0	22.00	17.09	0.051
					1	24	21.86	16.95	0.050
					25	0	21.59	16.68	0.047
				16QAM	1	1	21.81	16.90	0.049
				64QAM	1	1	20.67	15.76	0.038
				256QAM	1	1	18.27	13.36	0.022

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10) / 1000}$

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	Average power (dBm)	ERP power (dBm)	EIRP power (W)
NSA B2-n5	10	165800	829.0	PI/2 BPSK	1	1	22.76	17.85	0.061
					1	50	22.87	17.96	0.063
					25	12	22.74	17.83	0.061
					1	0	22.34	17.43	0.055
					1	51	22.50	17.59	0.057
				QPSK	50	0	22.25	17.34	0.054
					1	1	22.85	17.94	0.062
					1	50	22.95	18.04	0.064
					25	12	22.82	17.91	0.062
					1	0	21.88	16.97	0.050
					1	51	22.07	17.16	0.052
					50	0	21.77	16.86	0.049
				16QAM	1	1	21.75	16.84	0.048
				64QAM	1	1	20.58	15.67	0.037
				256QAM	1	1	18.16	13.25	0.021
		167300	836.5	PI/2 BPSK	1	1	22.84	17.93	0.062
					1	50	22.87	17.96	0.063
					25	12	22.80	17.89	0.062
					1	0	22.41	17.50	0.056
					1	51	22.42	17.51	0.056
				QPSK	50	0	22.34	17.43	0.055
					1	1	22.87	17.96	0.063
					1	50	22.89	17.98	0.063
					25	12	22.82	17.91	0.062
					1	0	21.94	17.03	0.050
					1	51	21.97	17.06	0.051
					50	0	21.71	16.80	0.048
				16QAM	1	1	21.89	16.98	0.050
				64QAM	1	1	20.63	15.72	0.037
				256QAM	1	1	18.08	13.17	0.021
		168800	844.0	PI/2 BPSK	1	1	22.80	17.89	0.062
					1	50	22.79	17.88	0.061
					25	12	22.69	17.78	0.060
					1	0	22.45	17.54	0.057
					1	51	22.39	17.48	0.056
					50	0	22.17	17.26	0.053
				QPSK	1	1	22.95	18.04	0.064
					1	50	22.87	17.96	0.063
					25	12	22.73	17.82	0.061
					1	0	22.03	17.12	0.052
					1	51	21.89	16.98	0.050
					50	0	21.62	16.71	0.047
				16QAM	1	1	21.86	16.95	0.050
				64QAM	1	1	20.70	15.79	0.038
				256QAM	1	1	18.30	13.39	0.022

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	Average power (dBm)	ERP power (dBm)	EIRP power (W)
NSA B2-n5	15	166300	831.5	PI/2 BPSK	1	1	22.77	17.86	0.061
					1	77	22.90	17.99	0.063
					36	18	22.76	17.85	0.061
					1	0	22.38	17.47	0.056
					1	78	22.52	17.61	0.058
					75	0	22.30	17.39	0.055
				QPSK	1	1	22.91	18.00	0.063
					1	77	23.00	18.09	0.064
					36	18	22.86	17.95	0.062
					1	0	21.91	17.00	0.050
					1	78	22.08	17.17	0.052
					75	0	21.82	16.91	0.049
				16QAM	1	1	21.78	16.87	0.049
				64QAM	1	1	20.62	15.71	0.037
				256QAM	1	1	18.18	13.27	0.021
		167300	836.5	PI/2 BPSK	1	1	22.86	17.95	0.062
					1	77	22.91	18.00	0.063
					36	18	22.83	17.92	0.062
					1	0	22.44	17.53	0.057
					1	78	22.45	17.54	0.057
					75	0	22.37	17.46	0.056
				QPSK	1	1	22.92	18.01	0.063
					1	77	22.90	17.99	0.063
					36	18	22.85	17.94	0.062
					1	0	21.95	17.04	0.051
					1	78	22.00	17.09	0.051
					75	0	21.74	16.83	0.048
				16QAM	1	1	21.91	17.00	0.050
				64QAM	1	1	20.68	15.77	0.038
				256QAM	1	1	18.13	13.22	0.021
		168300	841.5	PI/2 BPSK	1	1	22.84	17.93	0.062
					1	77	22.80	17.89	0.062
					36	18	22.73	17.82	0.061
					1	0	22.48	17.57	0.057
					1	78	22.40	17.49	0.056
					75	0	22.19	17.28	0.053
				QPSK	1	1	22.96	18.05	0.064
					1	77	22.88	17.97	0.063
					36	18	22.76	17.85	0.061
					1	0	22.04	17.13	0.052
					1	78	21.91	17.00	0.050
					75	0	21.67	16.76	0.047
				16QAM	1	1	21.89	16.98	0.050
				64QAM	1	1	20.71	15.80	0.038
				256QAM	1	1	18.33	13.42	0.022

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	Average power (dBm)	ERP power (dBm)	EIRP power (W)
NSA B2-n5	20	166800	834.0	PI/2 BPSK	1	1	22.82	17.91	0.062
					1	104	22.94	18.03	0.064
					50	25	22.79	17.88	0.061
					1	0	22.40	17.49	0.056
					1	105	22.53	17.62	0.058
					100	0	22.35	17.44	0.055
				QPSK	1	1	22.93	18.02	0.063
					1	104	23.03	18.12	0.065
					50	25	22.87	17.96	0.063
					1	0	21.93	17.02	0.050
					1	105	22.11	17.20	0.052
					100	0	21.84	16.93	0.049
				16QAM	1	1	21.83	16.92	0.049
				64QAM	1	1	20.66	15.75	0.038
				256QAM	1	1	18.23	13.32	0.021
		167300	836.5	PI/2 BPSK	1	1	22.89	17.98	0.063
					1	104	22.93	18.02	0.063
					50	25	22.86	17.95	0.062
					1	0	22.45	17.54	0.057
					1	105	22.46	17.55	0.057
					100	0	22.38	17.47	0.056
				QPSK	1	1	22.97	18.06	0.064
					1	104	22.96	18.05	0.064
					50	25	22.88	17.97	0.063
					1	0	22.01	17.10	0.051
					1	105	22.01	17.10	0.051
					100	0	21.79	16.88	0.049
				16QAM	1	1	21.95	17.04	0.051
				64QAM	1	1	20.72	15.81	0.038
				256QAM	1	1	18.19	13.28	0.021
		167800	839.0	PI/2 BPSK	1	1	22.88	17.97	0.063
					1	104	22.83	17.92	0.062
					50	25	22.78	17.87	0.061
					1	0	22.50	17.59	0.057
					1	105	22.42	17.51	0.056
					100	0	22.24	17.33	0.054
				QPSK	1	1	23.01	18.10	0.065
					1	104	22.93	18.02	0.063
					50	25	22.80	17.89	0.062
					1	0	22.09	17.18	0.052
					1	105	21.93	17.02	0.050
					100	0	21.73	16.82	0.048
				16QAM	1	1	21.93	17.02	0.050
				64QAM	1	1	20.76	15.85	0.038
				256QAM	1	1	18.38	13.47	0.022

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

NSA B30-n5 Power:

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	Average power (dBm)	ERP power (dBm)	EIRP power (W)
NSA B30-n5	5	165300	826.5	PI/2 BPSK	1	1	22.70	17.79	0.060
					1	23	22.65	17.74	0.059
					12	6	22.60	17.69	0.059
					1	0	22.22	17.31	0.054
					1	24	22.14	17.23	0.053
					25	0	22.14	17.23	0.053
				QPSK	1	1	22.74	17.83	0.061
					1	23	22.69	17.78	0.060
					12	6	22.75	17.84	0.061
					1	0	21.71	16.80	0.048
					1	24	21.63	16.72	0.047
					25	0	21.70	16.79	0.048
				16QAM	1	1	21.75	16.84	0.048
				64QAM	1	1	20.46	15.55	0.036
				256QAM	1	1	18.16	13.25	0.021
		167300	836.5	PI/2 BPSK	1	1	22.58	17.67	0.058
					1	23	22.64	17.73	0.059
					12	6	22.74	17.83	0.061
					1	0	22.04	17.13	0.052
					1	24	22.12	17.21	0.053
					25	0	22.20	17.29	0.054
				QPSK	1	1	22.64	17.73	0.059
					1	23	22.73	17.82	0.061
					12	6	22.75	17.84	0.061
					1	0	21.56	16.65	0.046
					1	24	21.78	16.87	0.049
					25	0	21.80	16.89	0.049
				16QAM	1	1	21.55	16.64	0.046
				64QAM	1	1	20.44	15.53	0.036
				256QAM	1	1	18.03	13.12	0.021
		169300	846.5	PI/2 BPSK	1	1	22.62	17.71	0.059
					1	23	22.59	17.68	0.059
					12	6	22.55	17.64	0.058
					1	0	22.07	17.16	0.052
					1	24	22.11	17.20	0.052
					25	0	22.09	17.18	0.052
				QPSK	1	1	22.71	17.80	0.060
					1	23	22.66	17.75	0.060
					12	6	22.63	17.72	0.059
					1	0	21.63	16.72	0.047
					1	24	21.70	16.79	0.048
					25	0	21.52	16.61	0.046
				16QAM	1	1	21.71	16.80	0.048
				64QAM	1	1	20.43	15.52	0.036
				256QAM	1	1	17.90	12.99	0.020

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	Average power (dBm)	ERP power (dBm)	EIRP power (W)
NSA B30-n5	10	165800	829.0	PI/2 BPSK	1	1	22.73	17.82	0.061
					1	50	22.69	17.78	0.060
					25	12	22.65	17.74	0.059
					1	0	22.25	17.34	0.054
					1	51	22.20	17.29	0.054
				QPSK	50	0	22.17	17.26	0.053
					1	1	22.79	17.88	0.061
					1	50	22.73	17.82	0.061
					25	12	22.79	17.88	0.061
					1	0	21.74	16.83	0.048
					1	51	21.68	16.77	0.048
					50	0	21.73	16.82	0.048
				16QAM	1	1	21.76	16.85	0.048
				64QAM	1	1	20.51	15.60	0.036
				256QAM	1	1	18.17	13.26	0.021
		167300	836.5	PI/2 BPSK	1	1	22.61	17.70	0.059
					1	50	22.67	17.76	0.060
					25	12	22.76	17.85	0.061
					1	0	22.07	17.16	0.052
					1	51	22.17	17.26	0.053
				QPSK	50	0	22.25	17.34	0.054
					1	1	22.67	17.76	0.060
					1	50	22.78	17.87	0.061
					25	12	22.80	17.89	0.062
					1	0	21.58	16.67	0.046
					1	51	21.84	16.93	0.049
					50	0	21.81	16.90	0.049
				16QAM	1	1	21.61	16.70	0.047
				64QAM	1	1	20.46	15.55	0.036
				256QAM	1	1	18.05	13.14	0.021
		168800	844.0	PI/2 BPSK	1	1	22.66	17.75	0.060
					1	50	22.63	17.72	0.059
					25	12	22.58	17.67	0.058
					1	0	22.11	17.20	0.052
					1	51	22.15	17.24	0.053
				QPSK	50	0	22.10	17.19	0.052
					1	1	22.74	17.83	0.061
					1	50	22.70	17.79	0.060
					25	12	22.68	17.77	0.060
					1	0	21.65	16.74	0.047
					1	51	21.71	16.80	0.048
					50	0	21.56	16.65	0.046
				16QAM	1	1	21.76	16.85	0.048
				64QAM	1	1	20.44	15.53	0.036
				256QAM	1	1	17.95	13.04	0.020

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	Average power (dBm)	ERP power (dBm)	EIRP power (W)
NSA B30-n5	15	166300	831.5	PI/2 BPSK	1	1	22.78	17.87	0.061
					1	77	22.75	17.84	0.061
					36	18	22.68	17.77	0.060
					1	0	22.28	17.37	0.055
					1	78	22.22	17.31	0.054
					75	0	22.23	17.32	0.054
				QPSK	1	1	22.84	17.93	0.062
					1	77	22.76	17.85	0.061
					36	18	22.83	17.92	0.062
					1	0	21.75	16.84	0.048
					1	78	21.71	16.80	0.048
					75	0	21.75	16.84	0.048
				16QAM	1	1	21.81	16.90	0.049
				64QAM	1	1	20.56	15.65	0.037
				256QAM	1	1	18.18	13.27	0.021
		167300	836.5	PI/2 BPSK	1	1	22.63	17.72	0.059
					1	77	22.71	17.80	0.060
					36	18	22.77	17.86	0.061
					1	0	22.10	17.19	0.052
					1	78	22.18	17.27	0.053
					75	0	22.28	17.37	0.055
				QPSK	1	1	22.70	17.79	0.060
					1	77	22.80	17.89	0.062
					36	18	22.83	17.92	0.062
					1	0	21.62	16.71	0.047
					1	78	21.90	16.99	0.050
					75	0	21.84	16.93	0.049
				16QAM	1	1	21.65	16.74	0.047
				64QAM	1	1	20.49	15.58	0.036
				256QAM	1	1	18.10	13.19	0.021
		168300	841.5	PI/2 BPSK	1	1	22.70	17.79	0.060
					1	77	22.69	17.78	0.060
					36	18	22.60	17.69	0.059
					1	0	22.16	17.25	0.053
					1	78	22.17	17.26	0.053
					75	0	22.14	17.23	0.053
				QPSK	1	1	22.76	17.85	0.061
					1	77	22.73	17.82	0.061
					36	18	22.70	17.79	0.060
					1	0	21.68	16.77	0.048
					1	78	21.74	16.83	0.048
					75	0	21.62	16.71	0.047
				16QAM	1	1	21.77	16.86	0.049
				64QAM	1	1	20.49	15.58	0.036
				256QAM	1	1	17.99	13.08	0.020

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	Average power (dBm)	ERP power (dBm)	EIRP power (W)
NSA B30-n5	20	166800	834.0	PI/2 BPSK	1	1	22.79	17.88	0.061
					1	104	22.77	17.86	0.061
					50	25	22.71	17.80	0.060
					1	0	22.31	17.40	0.055
					1	105	22.27	17.36	0.054
					100	0	22.26	17.35	0.054
				QPSK	1	1	22.86	17.95	0.062
					1	104	22.79	17.88	0.061
					50	25	22.84	17.93	0.062
					1	0	21.79	16.88	0.049
					1	105	21.77	16.86	0.049
					100	0	21.80	16.89	0.049
				16QAM	1	1	21.84	16.93	0.049
				64QAM	1	1	20.60	15.69	0.037
				256QAM	1	1	18.24	13.33	0.022
		167300	836.5	PI/2 BPSK	1	1	22.66	17.75	0.060
					1	104	22.72	17.81	0.060
					50	25	22.78	17.87	0.061
					1	0	22.14	17.23	0.053
					1	105	22.24	17.33	0.054
					100	0	22.32	17.41	0.055
				QPSK	1	1	22.73	17.82	0.061
					1	104	22.82	17.91	0.062
					50	25	22.85	17.94	0.062
					1	0	21.68	16.77	0.048
					1	105	21.92	17.01	0.050
					100	0	21.85	16.94	0.049
				16QAM	1	1	21.70	16.79	0.048
				64QAM	1	1	20.53	15.62	0.036
				256QAM	1	1	18.13	13.22	0.021
		167800	839.0	PI/2 BPSK	1	1	22.74	17.83	0.061
					1	104	22.72	17.81	0.060
					50	25	22.63	17.72	0.059
					1	0	22.20	17.29	0.054
					1	105	22.20	17.29	0.054
					100	0	22.17	17.26	0.053
				QPSK	1	1	22.80	17.89	0.062
					1	104	22.77	17.86	0.061
					50	25	22.74	17.83	0.061
					1	0	21.74	16.83	0.048
					1	105	21.78	16.87	0.049
					100	0	21.65	16.74	0.047
				16QAM	1	1	21.79	16.88	0.049
				64QAM	1	1	20.52	15.61	0.036
				256QAM	1	1	18.01	13.10	0.020

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

NSA B7-n26 Power:

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	Average power (dBm)	ERP power (dBm)	EIRP power (W)
NSA B7-n26 (824-849)	5	165300	826.5	PI/2 BPSK	1	1	23.06	18.10	0.065
					1	23	22.98	18.02	0.063
					12	6	22.93	17.97	0.063
					1	0	22.57	17.61	0.058
					1	24	22.53	17.57	0.057
					25	0	22.44	17.48	0.056
				QPSK	1	1	23.14	18.18	0.066
					1	23	23.04	18.08	0.064
					12	6	23.07	18.11	0.065
					1	0	22.17	17.21	0.053
					1	24	21.96	17.00	0.050
					25	0	22.02	17.06	0.051
				16QAM	1	1	22.21	17.25	0.053
				64QAM	1	1	20.91	15.95	0.039
				256QAM	1	1	18.51	13.55	0.023
		167300	836.5	PI/2 BPSK	1	1	22.98	18.02	0.063
					1	23	23.02	18.06	0.064
					12	6	22.88	17.92	0.062
					1	0	22.52	17.56	0.057
					1	24	22.61	17.65	0.058
					25	0	22.42	17.46	0.056
				QPSK	1	1	23.14	18.18	0.066
					1	23	23.10	18.14	0.065
					12	6	23.04	18.08	0.064
					1	0	22.15	17.19	0.052
					1	24	22.09	17.13	0.052
					25	0	22.15	17.19	0.052
				16QAM	1	1	22.02	17.06	0.051
				64QAM	1	1	20.85	15.89	0.039
				256QAM	1	1	18.40	13.44	0.022
		169300	846.5	PI/2 BPSK	1	1	23.01	18.05	0.064
					1	23	23.00	18.04	0.064
					12	6	22.93	17.97	0.063
					1	0	22.62	17.66	0.058
					1	24	22.49	17.53	0.057
					25	0	22.56	17.60	0.058
				QPSK	1	1	23.09	18.13	0.065
					1	23	23.07	18.11	0.065
					12	6	23.01	18.05	0.064
					1	0	22.14	17.18	0.052
					1	24	22.12	17.16	0.052
					25	0	22.01	17.05	0.051
				16QAM	1	1	22.17	17.21	0.053
				64QAM	1	1	20.83	15.87	0.039
				256QAM	1	1	18.44	13.48	0.022

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	Average power (dBm)	ERP power (dBm)	EIRP power (W)
NSA B7-n26 (824-849)	10	165800	829.0	PI/2 BPSK	1	1	23.08	18.12	0.065
					1	50	23.01	18.05	0.064
					25	12	22.98	18.02	0.063
					1	0	22.62	17.66	0.058
					1	51	22.57	17.61	0.058
					50	0	22.48	17.52	0.056
				QPSK	1	1	23.17	18.21	0.066
					1	50	23.08	18.12	0.065
					25	12	23.10	18.14	0.065
					1	0	22.19	17.23	0.053
					1	51	21.99	17.03	0.050
					50	0	22.06	17.10	0.051
				16QAM	1	1	22.25	17.29	0.054
				64QAM	1	1	20.95	15.99	0.040
				256QAM	1	1	18.55	13.59	0.023
		167300	836.5	PI/2 BPSK	1	1	23.01	18.05	0.064
					1	50	23.04	18.08	0.064
					25	12	22.92	17.96	0.063
					1	0	22.58	17.62	0.058
					1	51	22.67	17.71	0.059
					50	0	22.45	17.49	0.056
				QPSK	1	1	23.16	18.20	0.066
					1	50	23.11	18.15	0.065
					25	12	23.06	18.10	0.065
					1	0	22.17	17.21	0.053
					1	51	22.14	17.18	0.052
					50	0	22.17	17.21	0.053
				16QAM	1	1	22.05	17.09	0.051
				64QAM	1	1	20.88	15.92	0.039
				256QAM	1	1	18.43	13.47	0.022
		168800	844.0	PI/2 BPSK	1	1	23.06	18.10	0.065
					1	50	23.03	18.07	0.064
					25	12	22.98	18.02	0.063
					1	0	22.66	17.70	0.059
					1	51	22.55	17.59	0.057
					50	0	22.58	17.62	0.058
				QPSK	1	1	23.12	18.16	0.065
					1	50	23.13	18.17	0.066
					25	12	23.04	18.08	0.064
					1	0	22.19	17.23	0.053
					1	51	22.16	17.20	0.052
					50	0	22.03	17.07	0.051
				16QAM	1	1	22.19	17.23	0.053
				64QAM	1	1	20.88	15.92	0.039
				256QAM	1	1	18.46	13.50	0.022

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	Average power (dBm)	ERP power (dBm)	EIRP power (W)
NSA B7-n26 (824-849)	15	166300	831.5	PI/2 BPSK	1	1	23.11	18.15	0.065
					1	77	23.04	18.08	0.064
					36	18	23.03	18.07	0.064
					1	0	22.68	17.72	0.059
					1	78	22.59	17.63	0.058
					75	0	22.52	17.56	0.057
				QPSK	1	1	23.20	18.24	0.067
					1	77	23.11	18.15	0.065
					36	18	23.12	18.16	0.065
					1	0	22.23	17.27	0.053
					1	78	22.05	17.09	0.051
					75	0	22.10	17.14	0.052
				16QAM	1	1	22.26	17.30	0.054
				64QAM	1	1	20.99	16.03	0.040
				256QAM	1	1	18.58	13.62	0.023
		167300	836.5	PI/2 BPSK	1	1	23.05	18.09	0.064
					1	77	23.06	18.10	0.065
					36	18	22.97	18.01	0.063
					1	0	22.61	17.65	0.058
					1	78	22.71	17.75	0.060
					75	0	22.51	17.55	0.057
				QPSK	1	1	23.18	18.22	0.066
					1	77	23.15	18.19	0.066
					36	18	23.08	18.12	0.065
					1	0	22.20	17.24	0.053
					1	78	22.16	17.20	0.052
					75	0	22.18	17.22	0.053
				16QAM	1	1	22.09	17.13	0.052
				64QAM	1	1	20.92	15.96	0.039
				256QAM	1	1	18.46	13.50	0.022
		168300	841.5	PI/2 BPSK	1	1	23.10	18.14	0.065
					1	77	23.05	18.09	0.064
					36	18	23.02	18.06	0.064
					1	0	22.68	17.72	0.059
					1	78	22.59	17.63	0.058
					75	0	22.63	17.67	0.058
				QPSK	1	1	23.15	18.19	0.066
					1	77	23.16	18.20	0.066
					36	18	23.09	18.13	0.065
					1	0	22.21	17.25	0.053
					1	78	22.21	17.25	0.053
					75	0	22.05	17.09	0.051
				16QAM	1	1	22.20	17.24	0.053
				64QAM	1	1	20.94	15.98	0.040
				256QAM	1	1	18.51	13.55	0.023

NOTE:

(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

Band	BW (MHz)	Channel	Frequency (MHz)	Mode	UL RB Allocation	UL RB Offset	Average power (dBm)	ERP power (dBm)	EIRP power (W)
NSA B7-n26 (824-849)	20	166800	834.0	PI/2 BPSK	1	1	23.16	18.20	0.066
					1	104	23.07	18.11	0.065
					50	25	23.07	18.11	0.065
					1	0	22.70	17.74	0.059
					1	105	22.63	17.67	0.058
					100	0	22.55	17.59	0.057
				QPSK	1	1	23.26	18.30	0.068
					1	104	23.16	18.20	0.066
					50	25	23.14	18.18	0.066
					1	0	22.24	17.28	0.053
					1	105	22.08	17.12	0.052
					100	0	22.12	17.16	0.052
				16QAM	1	1	22.27	17.31	0.054
				64QAM	1	1	21.04	16.08	0.041
				256QAM	1	1	18.63	13.67	0.023
		167300	836.5	PI/2 BPSK	1	1	23.09	18.13	0.065
					1	104	23.11	18.15	0.065
					50	25	23.01	18.05	0.064
					1	0	22.63	17.67	0.058
					1	105	22.73	17.77	0.060
					100	0	22.54	17.58	0.057
				QPSK	1	1	23.22	18.26	0.067
					1	104	23.19	18.23	0.067
					50	25	23.11	18.15	0.065
					1	0	22.25	17.29	0.054
					1	105	22.19	17.23	0.053
					100	0	22.21	17.25	0.053
				16QAM	1	1	22.15	17.19	0.052
				64QAM	1	1	20.95	15.99	0.040
				256QAM	1	1	18.47	13.51	0.022
		167800	839.0	PI/2 BPSK	1	1	23.14	18.18	0.066
					1	104	23.10	18.14	0.065
					50	25	23.07	18.11	0.065
					1	0	22.69	17.73	0.059
					1	105	22.61	17.65	0.058
					100	0	22.64	17.68	0.059
				QPSK	1	1	23.20	18.24	0.067
					1	104	23.18	18.22	0.066
					50	25	23.12	18.16	0.065
					1	0	22.23	17.27	0.053
					1	105	22.24	17.28	0.053
					100	0	22.11	17.15	0.052
				16QAM	1	1	22.25	17.29	0.054
				64QAM	1	1	20.95	15.99	0.040
				256QAM	1	1	18.56	13.60	0.023

NOTE:


(1) EIRP = Average power + Antenna gain.

(2) ERP = EIRP - 2.15.

(3) $P(W) = 1 \text{ W} \cdot 10^{(P(\text{dBm}) / 10)} / 1000$

APPENDIX B RADIATED SPURIOUS EMISSIONS

Test Mode	NR n26	Test Date	2026/1/31
Test Channel	CH167300	Polarization	Vertical
Temp	23°C	Hum.	62 %

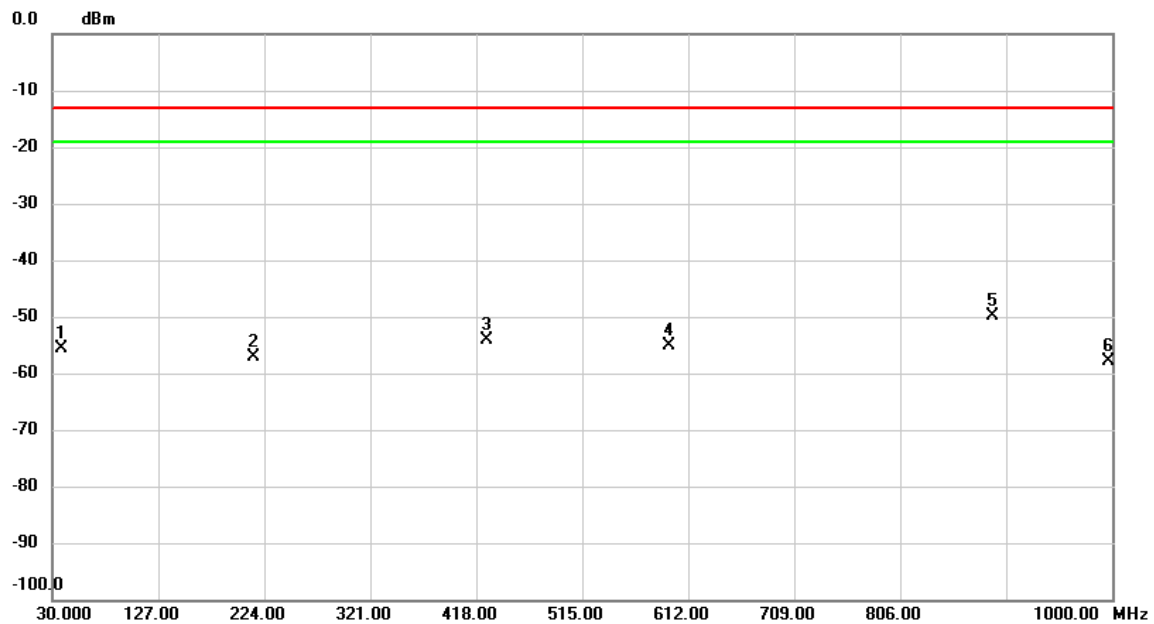


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		38.1480	-46.84	-8.84	-55.68	-13.00	-42.68	peak	
2		213.7180	-53.54	-3.57	-57.11	-13.00	-44.11	peak	
3		427.3767	-52.33	-1.75	-54.08	-13.00	-41.08	peak	
4		593.9903	-58.45	3.22	-55.23	-13.00	-42.23	peak	
5	*	891.0043	-56.26	6.39	-49.87	-13.00	-36.87	peak	
6		996.6697	-65.23	7.38	-57.85	-13.00	-44.85	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n26	Test Date	2026/1/31
Test Channel	CH167300	Polarization	Horizontal
Temp	23°C	Hum.	62 %

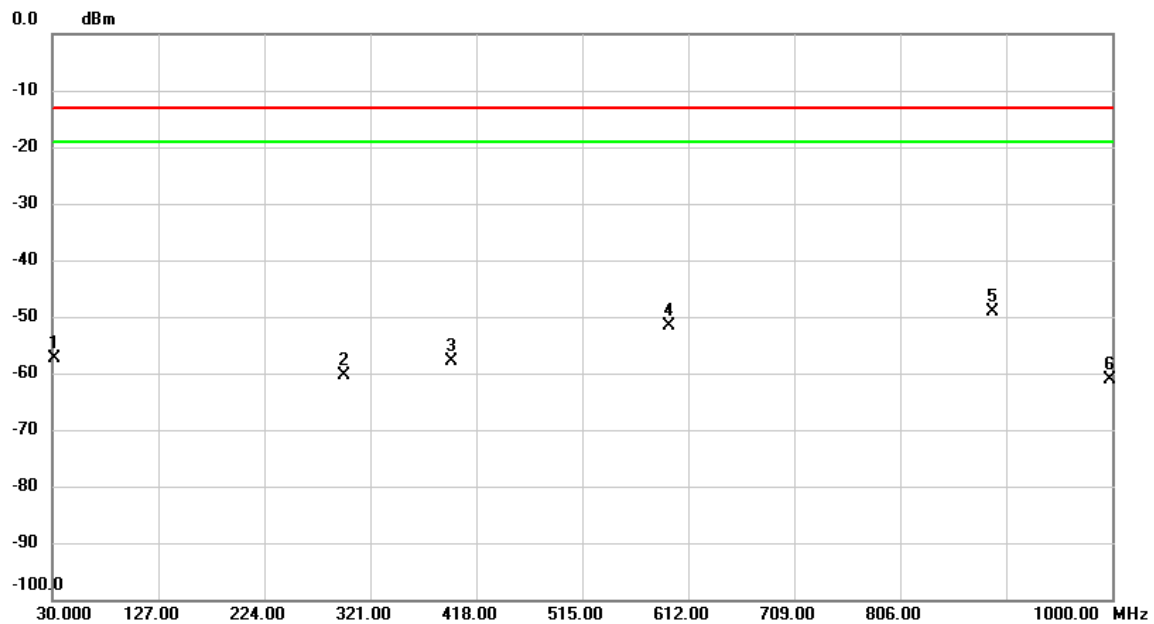


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1		31.6166	-60.11	2.81	-57.30	-13.00	-44.30	peak	
2		297.0086	-54.18	-6.31	-60.49	-13.00	-47.49	peak	
3		396.0133	-55.39	-2.50	-57.89	-13.00	-44.89	peak	
4		593.9903	-51.85	0.12	-51.73	-13.00	-38.73	peak	
5	*	891.0043	-53.92	4.74	-49.18	-13.00	-36.18	peak	
6		997.8336	-67.28	6.16	-61.12	-13.00	-48.12	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n26	Test Date	2026/2/2
Test Channel	CH166800	Polarization	Vertical
Temp	22°C	Hum.	67 %

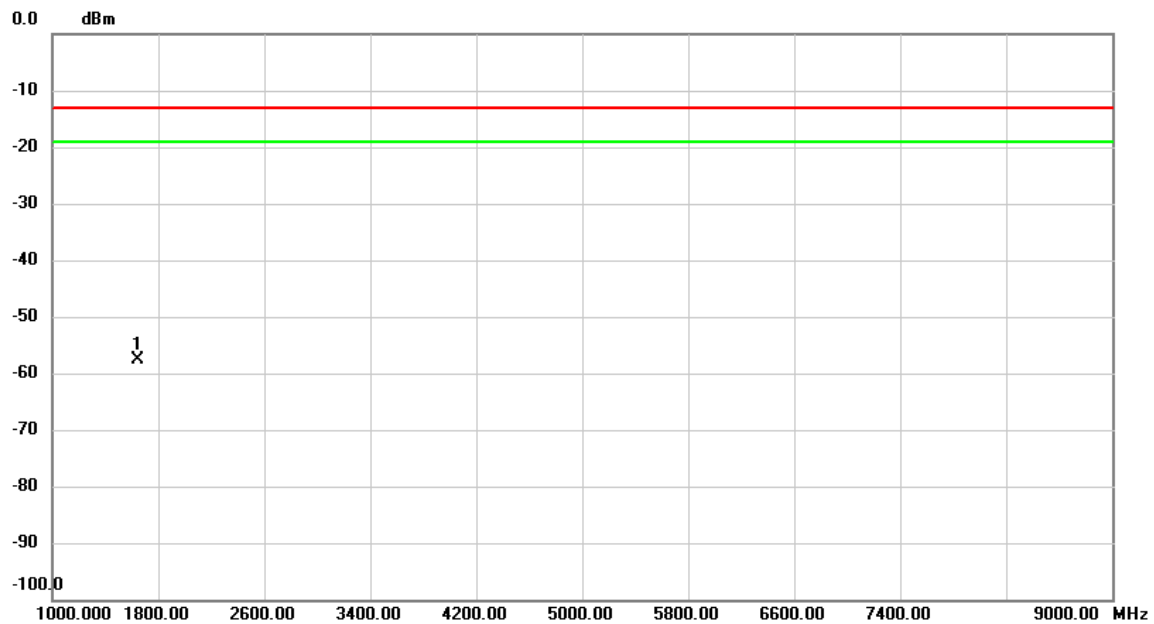


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	1648.000	-63.31	5.71	-57.60	-13.00	-44.60	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n26	Test Date	2026/2/2
Test Channel	CH166800	Polarization	Horizontal
Temp	22°C	Hum.	67 %

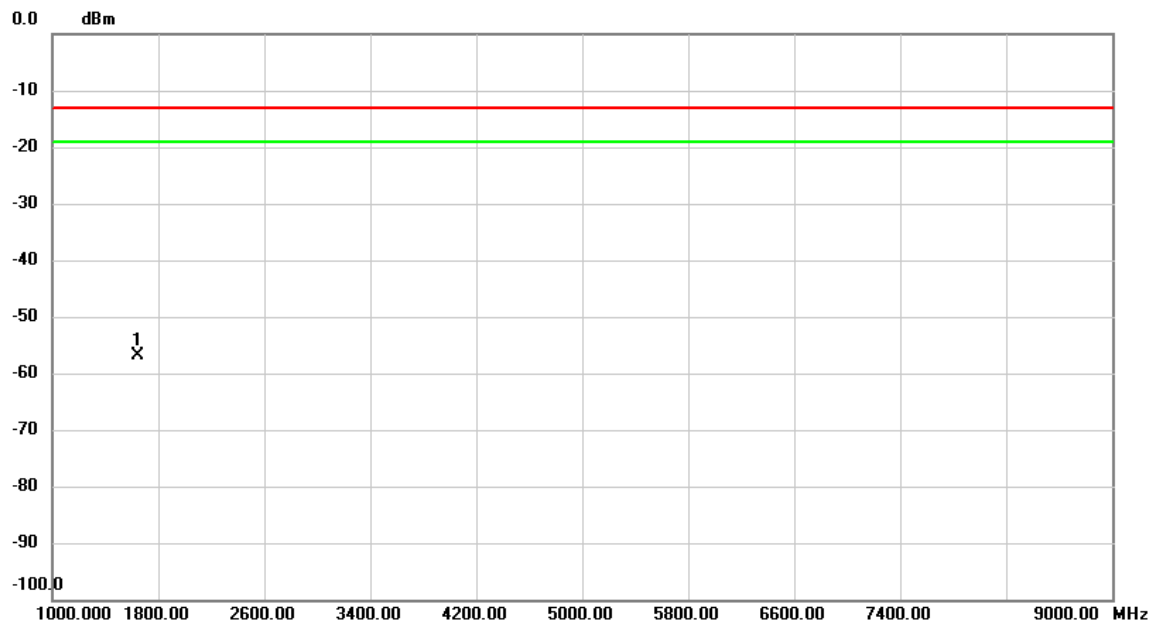


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1648.000	-62.27	5.41	-56.86	-13.00	-43.86	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n26	Test Date	2026/2/2
Test Channel	CH167300	Polarization	Vertical
Temp	22°C	Hum.	67 %

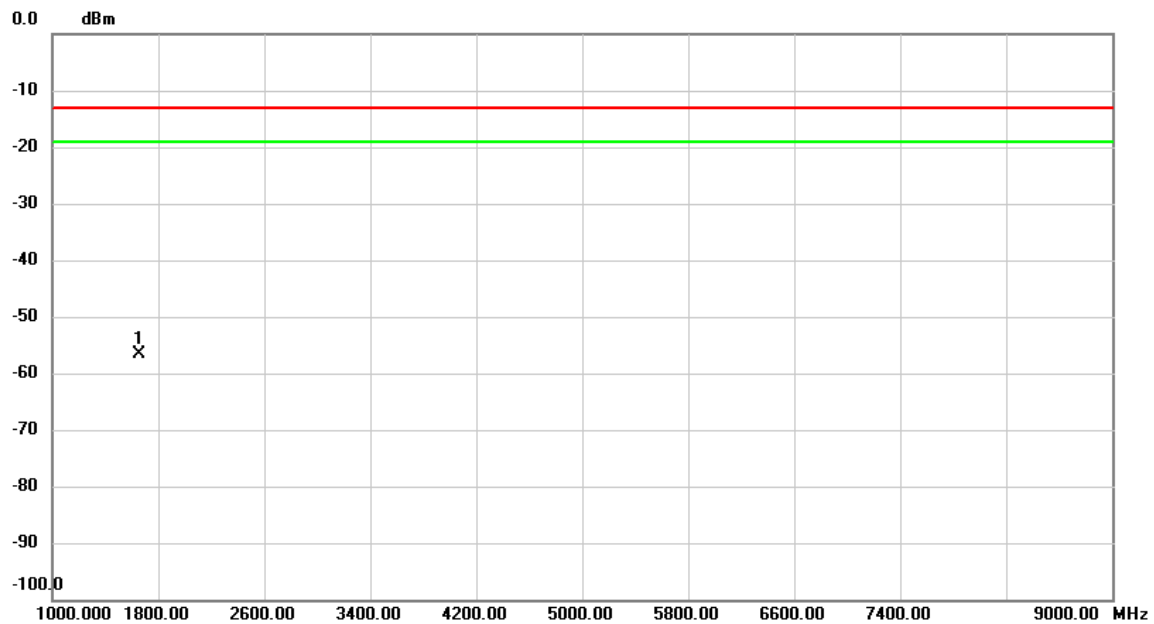


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	1653.000	-62.42	5.74	-56.68	-13.00	-43.68	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n26	Test Date	2026/2/2
Test Channel	CH167300	Polarization	Horizontal
Temp	22°C	Hum.	67 %

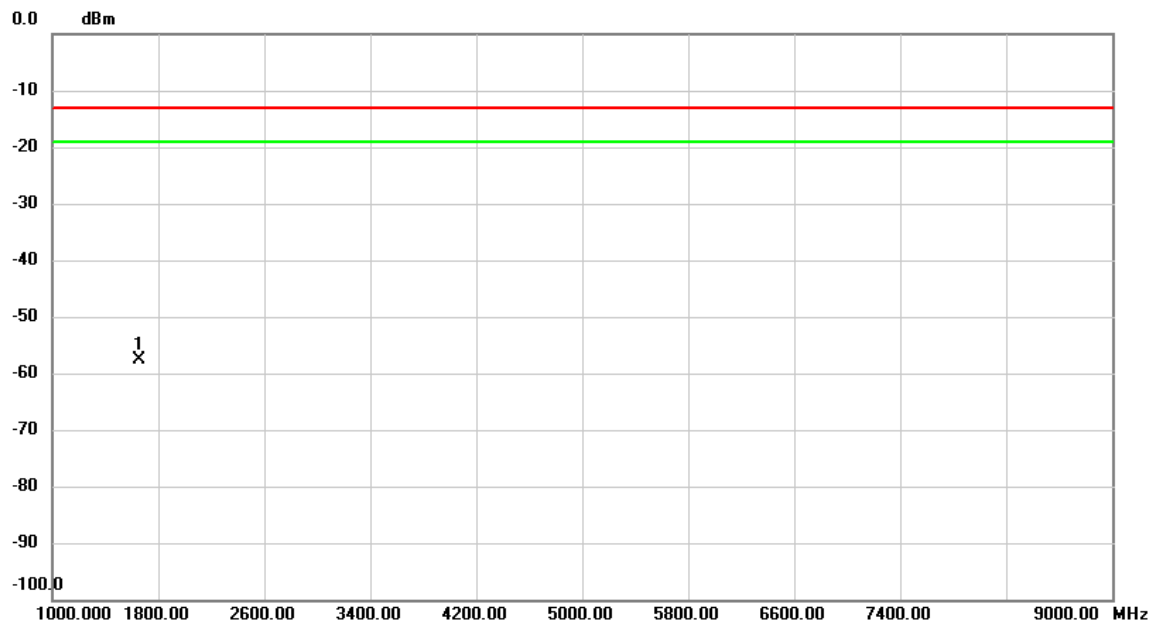


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	1653.000	-62.99	5.44	-57.55	-13.00	-44.55	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n26	Test Date	2026/2/2
Test Channel	CH167800	Polarization	Vertical
Temp	22°C	Hum.	67 %

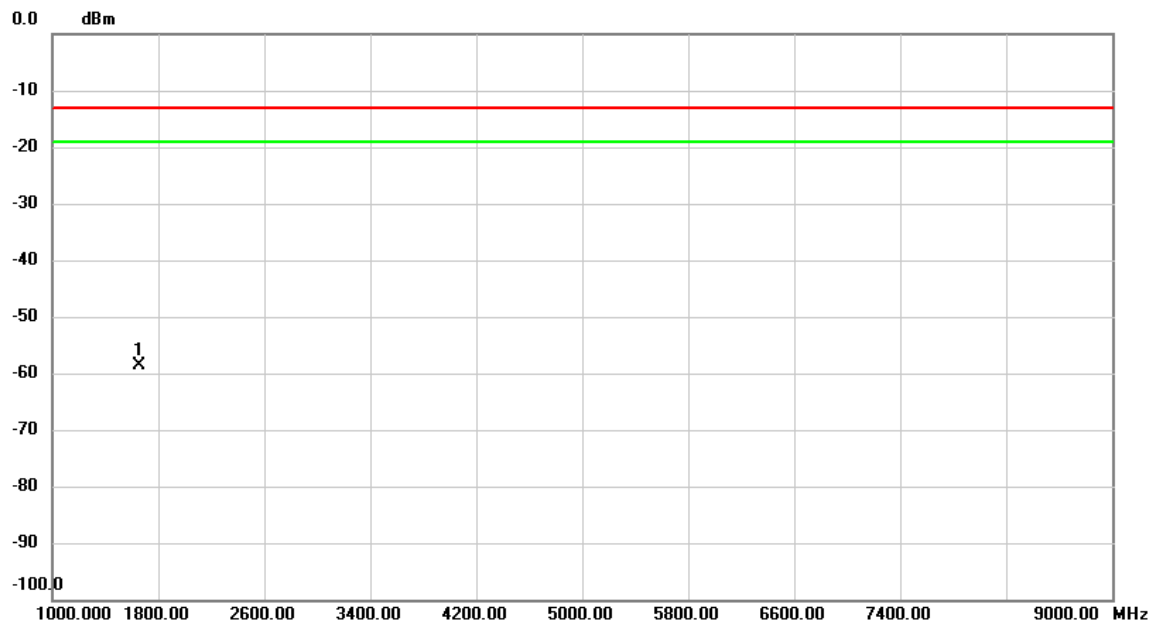


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBm	dB	dBm	dBm	dB		
1	*	1658.000	-64.31	5.75	-58.56	-13.00	-45.56	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	NR n26	Test Date	2026/2/2
Test Channel	CH167800	Polarization	Horizontal
Temp	22°C	Hum.	67 %

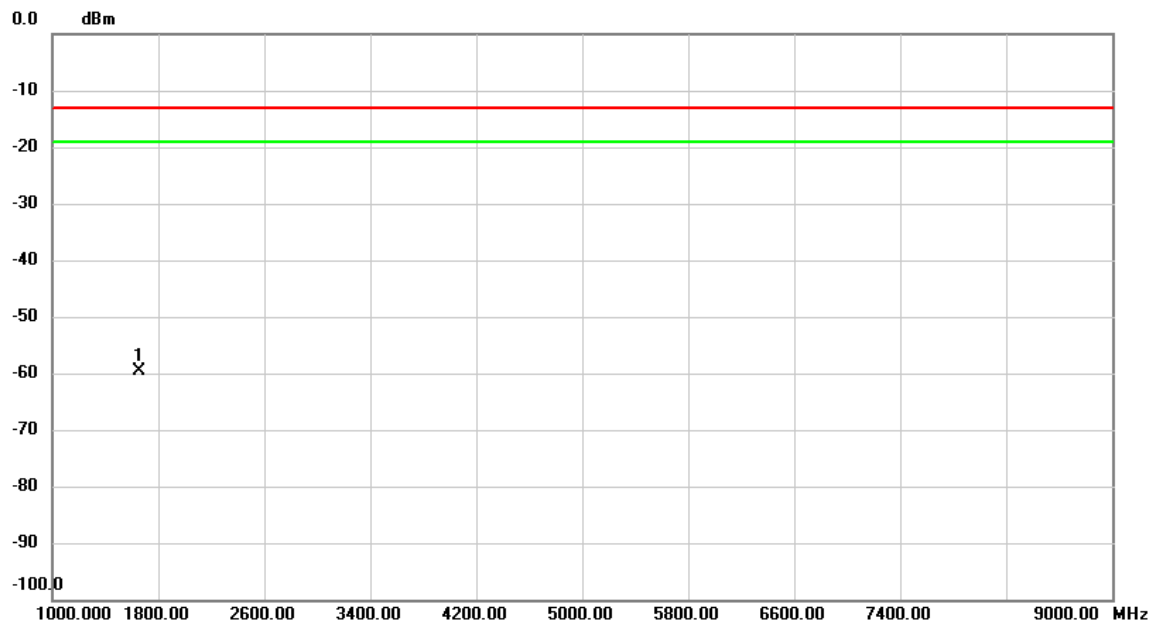

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBm	dB	dBm	dBm	dB	Detector	Comment
1	*	1658.000	-65.08	5.45	-59.63	-13.00	-46.63	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

End of Test Report