




YEELOCK Smart Drawer & Cabinet Lock Pro

Instruction For Use

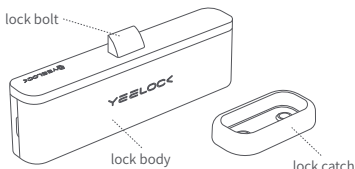

Basic Parameters

Product model: ZNGS09YSB

Lock body: 122.5x34x21mm

Standby time: 1.5 years

Lock catch: 56*30*10.5mm

Unlocking method: Bluetooth® 5.3 Low Energy

Power supply: 2 AAA alkaline batteries

Packing List

Lock body x 1 Lock catch x 1 3M double-sided tape x 2

Block blade(for double door cabinet) x 1 Install auxiliary card x 1

Lock body screw (ST3*12mm)x2 Lock catch screw (ST3*10mm) x2

Block blade screw (ST4*6mm) x2

Usage Guide

① Binding App

Download the APP of Yeelock, Android users and IOS users respectively search "YEELOCK" on Google play and App Store for downloads. Register in the App, scan the key QR code (In the Chinese manual) and bind. There is only one owner of a smart cabinet lock, and the QR code will be invalid after successful binding.


② Bluetooth unlocking

After successful binding, click "Unlock" of App to unlock it.

Installation Method


① Power on

Open the front cover of the lock body, put in two AAA alkaline batteries (if there are batteries, remove the insulation sheets on the batteries), emit startup prompt sound, the device is successfully powered on, use the App to unlock, and pop out the lock bolt.



② Determine location

Determine the position of the lock body and lock catch inside the cabinet, ensuring that the lock bolt is stuck inside the lock catch. Use 3M double-sided tapes to attach the lock body and lock catch to the drawer cabinet separately (or fix them with the provided screws as shown in the picture), and complete the installation.



▲ *Do not move the 3M double-sided tapes multiple times when it is first applied. Press it firmly and let it sit for 24 hours (it is recommended to install screws to fix it after the lock catch is fixed).

③ Test before closing the cabinet

After installation, do not directly close the cabinet door or drawer. First, make sure that the smart lock is installed correctly and the APP can unlock normally without any problems, and then close the drawer cabinet.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.
- This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.