# FCC TEST REPORT

**Test report**
**On Behalf of**
**SHENZHEN SUNVEYTECH CO.,LTD**
**For**
**Digital Wireless Monitor**
**Model No.:**
**CX77,CX27,CX57,CX97,CX107HD,CX207HD,CX307HD,CX507HD, CX707HD,SC907HD**

**FCC ID: 2AQNR-CX77**

| | |
|---|---|
| **Prepared for :** | **SHENZHEN SUNVEYTECH CO.,LTD**<br>**6/8F, Mantong Building, No. 13, Dafu Road, Guanlan,**<br>**Longhua District, ShenzhenChina** |
| **Prepared By :** | **Shenzhen HUAK Testing Technology Co., Ltd.**<br>**1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China** |
| **Date of Test:** | **Sep.10, 2018 ~ Sep.20, 2018** |
| **Date of Report:** | **Sep.20, 2018** |
| **Report Number:** | **HUAK180723585E** |

# TEST RESULT CERTIFICATION

| | |
|---|---|
| **Applicant's name** .....: | SHENZHEN SUNVEYTECH CO.,LTD |
| Address.....: | 6/8F, Mantong Building, No. 13, Dafu Road, Guanlan, Longhua District, ShenzhenChina |
| **Manufacture's Name**.....: | SHENZHEN SUNVEYTECH CO.,LTD |
| Address.....: | 6/8F, Mantong Building, No. 13, Dafu Road, Guanlan, Longhua District, ShenzhenChina |

**Product description**

| | |
|---|---|
| Trade Mark: | SVTCAM CARMOUR |
| Product name.....: | Digital Wireless Monitor |
| Model and/or type reference .: | CX77, CX27,CX57,CX97,CX107HD,CX207HD,CX307HD, CX507HD,CX707HD,SC907HD |
| **Standards**.....: | FCC Rules and Regulations Part 15 Subpart C Section 15.247<br>ANSI C63.10: 2013 |

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

| | |
|---|---|
| **Date of Test**..... : | |
| Date (s) of performance of tests..... : | Sep.10, 2018 ~ Sep.20, 2018 |
| Date of Issue ..... : | Sep.20, 2018 |
| Test Result ..... : | **Pass** |

Testing Engineer : Gary Qian

(Gary Qian)

Technical Manager : Eden Hu

(Eden Hu)

Authorized Signatory : Jason Zhou

(Jason Zhou)

# TABLE OF CONTENTS


1. Test Result Summary ..... 4
   1.1. TEST PROCEDURES AND RESULTS ..... 4
   1.2. TEST FACILITY ..... 4
   1.3. MEASUREMENT UNCERTAINTY ..... 5
2. EUT Description ..... 6
   2.1. GENERAL DESCRIPTION OF EUT ..... 6
   2.2. CARRIER FREQUENCY OF CHANNELS ..... 7
   2.3. OPERATION OF EUT DURING TESTING ..... 7
   2.4. DESCRIPTION OF TEST SETUP ..... 7
3. Genera Information ..... 8
   3.1. TEST ENVIRONMENT AND MODE ..... 8
   3.2. DESCRIPTION OF SUPPORT UNITS ..... 9
4. Test Results and Measurement Data ..... 10
   4.1. CONDUCTED EMISSION ..... 10
   4.2. MAXIMUM CONDUCTED OUTPUT POWER ..... 12
   4.3. EMISSION BANDWIDTH ..... 14
   4.4. POWER SPECTRAL DENSITY ..... 20
   4.5. CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT ..... 30
   4.6. RADIATED SPURIOUS EMISSION MEASUREMENT ..... 36
   4.7. ANTENNA REQUIREMENT ..... 62
   4.8. PHOTOGRAPH OF TEST ..... 63

# 1. Test Result Summary

## 1.1. TEST PROCEDURES AND RESULTS

| Requirement | CFR 47 Section | Result |
|---|---|---|
| Antenna requirement | §15.203/§15.247 (c) | PASS |
| AC Power Line Conducted Emission | §15.207 | N/A |
| Conducted Peak Output Power | §15.247 (b)(3)<br>§2.1046 | PASS |
| 6dB Emission Bandwidth | §15.247 (a)(2)<br>§2.1049 | PASS |
| Power Spectral Density | §15.247 (e) | PASS |
| Band Edge | 1§5.247(d)<br>§2.1051, §2.1057 | PASS |
| SpuriousEmission | §15.205/§15.209<br>§2.1053, §2.1057 | PASS |

***Note:***

*1. PASS: Test item meets the requirement.*

*2. Fail: Test item does not meet the requirement.*

*3. N/A: Test case does not apply to the test object.*

*4. The test result judgment is decided by the limit of test standard.*

## 1.2. TEST FACILITY

Test Firm : Shenzhen HUAK Testing Technology Co., Ltd.

Address 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China

## 1.3. Measurement Uncertainty

The reported uncertainty of measurement y ± U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95 %.

| No. | Item | MU |
|---|---|---|
| 1 | Conducted Emission | ±2.56dB |
| 2 | RF power, conducted | ±0.12dB |
| 3 | Spurious emissions, conducted | ±0.11dB |
| 4 | All emissions, radiated(<1G) | ±3.92dB |
| 5 | All emissions, radiated(>1G) | ±4.28dB |
| 6 | Temperature | ±0.1°C |
| 7 | Humidity | ±1.0% |

# 2. EUT Description

## 2.1. GENERAL DESCRIPTION OF EUT

| | |
|---|---|
| Equipment | Digital Wireless Monitor |
| Model Name | CX77 |
| Serial No. | CX27,CX57,CX97,CX107HD,CX207HD,CX307HD, CX507HD,CX707HD,SC907HD |
| Model Difference | The model name of the sample is different, and all the others are the same |
| Trade Mark | SVTCAM CARMOUR |
| FCC ID | **2AQNR-CX77** |
| Antenna Type | External Antenna |
| Antenna Gain | 2dBi |
| Operation frequency | 802.11b/g/n 20:2412~2462 MHz<br>802.11n 40: 2422~2452MHz |
| Number of Channels | 802.11b/g/n20: 11CH<br>802.11n 40: 7CH |
| Modulation Type | CCK/OFDM/DBPSK/DAPSK |
| PowerSource | DC12V |
| Power Rating | DC12V |

## 2.2. Carrier Frequency of Channels

| Channel List for 802.11b/802.11g/802.11n (HT20) | | | | | | | |
|---|---|---|---|---|---|---|---|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 01 | 2412 | 04 | 2427 | 07 | 2442 | 10 | 2457 |
| 02 | 2417 | 05 | 2432 | 08 | 2447 | 11 | 2462 |
| 03 | 2422 | 06 | 2437 | 09 | 2452 | | |

| Channel List For 802.11n(HT40) | | | | | | | |
|---|---|---|---|---|---|---|---|
| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| -- | -- | 04 | 2427 | 07 | 2442 | -- | -- |
| -- | -- | 05 | 2432 | 08 | 2447 | -- | -- |
| 03 | 2422 | 06 | 2437 | 09 | 2452 | | |

***Note:***

*In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:*

## 2.3. Operation of EUT during testing

Operating Mode
The mode is used: **Transmitting mode for 802.11b/802.11g/802.11n (HT20)**
Low Channel: 2412MHz
Middle Channel: 2437MHz
High Channel: 2462MHz

**The mode is used: Transmitting mode for 802.11n (HT40)**
Low Channel: 2422MHz
Middle Channel: 2437MHz
High Channel: 2452MHz

## 2.4. DESCRIPTION OF TEST SETUP

Operation of EUT during Radiation and Above1GHz Radiationtesting:



# 3. Genera Information

## 3.1. Test environment and mode

| **Operating Environment:** | |
|---|---|
| Temperature: | 25.0 °C |
| Humidity: | 56 % RH |
| Atmospheric Pressure: | 1010 mbar |
| **Test Mode:** | |
| Engineering mode: | Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 98.46%) |
| The sample was placed (0.8m below 1GHz, 1.5m above 1GHz)above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.For the full battery state and The output power to the maximum state. | |

| We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows: | |
|---|---|
| **Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.** | |
| Mode | Data rate |
| 802.11b | 1Mbps |
| 802.11g | 6Mbps |
| 802.11n(H20) | 6.5Mbps |
| 802.11n(H40) | 13.5Mbps |
| **Final Test Mode:** | |
| Operation mode: | Keep the EUT in continuous transmitting with modulation |
| 1. For WIFI function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.<br>2.According to ANSI C63.10 standards, the test results are both the “worst case” and “worst setup” 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n(H20),13.5Mbps for 802.11(H40).Duty cycle setting during the transmission is 98.5% with maximum power setting for all modulations. | |

## 3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Equipment | Model No. | Serial No. | FCC ID | Trade Name |
|---|---|---|---|---|
| / | / | / | / | / |

***Note:***

*1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*

*2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*

*3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.*

# 4. Test Results and Measurement Data

## 4.1. Conducted Emission

### Test Specification

<table>
<tr><td>Test Requirement:</td><td>FCC Part15 C Section 15.207</td></tr>
<tr><td>Test Method:</td><td>ANSI C63.10:2013</td></tr>
<tr><td>Frequency Range:</td><td>150 kHz to 30 MHz</td></tr>
<tr><td>Receiver setup:</td><td>RBW=9 kHz, VBW=30 kHz, Sweep time=auto</td></tr>
<tr><td>Limits:</td><td>
<table>
<tr><td rowspan="2">Frequency range (MHz)</td><td colspan="2">Limit (dBuV)</td></tr>
<tr><td>Quasi-peak</td><td>Average</td></tr>
<tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr>
<tr><td>0.5-5</td><td>56</td><td>46</td></tr>
<tr><td>5-30</td><td>60</td><td>50</td></tr>
</table>
</td></tr>
<tr><td>Test Setup:</td><td>
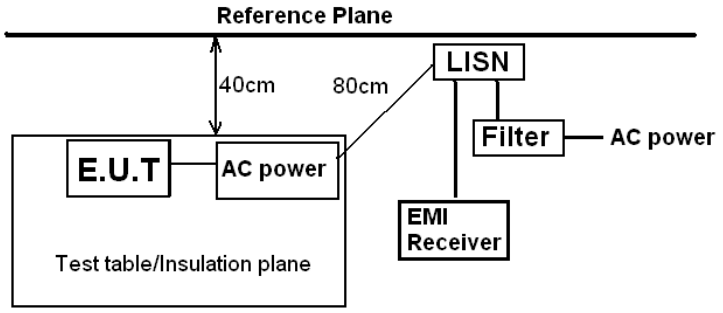

Remark:<br>E.U.T: Equipment Under Test<br>LISN: Line Impedence Stabilization Network<br>Test table height=0.8m
</td></tr>
<tr><td>Test Mode:</td><td>Charging + transmitting with modulation</td></tr>
<tr><td>Test Procedure:</td><td>1. The E.U.T is connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.<br>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).<br>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</td></tr>
<tr><td>Test Result:</td><td>PASS</td></tr>
</table>

## Test Instruments

| Conducted Emission Shielding Room Test Site (843) | | | | |
|---|---|---|---|---|
| **Equipment** | **Manufacturer** | **Model** | **Serial Number** | **Calibration Due** |
| Receiver | R&S | ESCI 7 | HKE-010 | Sep. 27, 2018 |
| LISN | R&S | ENV216 | HKE-002 | Sep. 27, 2018 |
| Conducted test software | Tonscend | TS+ Rev 2.5.0.0 | HKE-081 | N/A |

***Note:*** *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

## Test Result

**Not applicable for device which is DC Power supply.**

## 4.2. Maximum ConductedOutput Power

### Test Specification

| | |
|---|---|
| **Test Requirement:** | FCC Part15 C Section 15.247 (b)(3) |
| **Test Method:** | KDB 558074 |
| **Limit:** | 30dBm |
| **Test Setup:** | 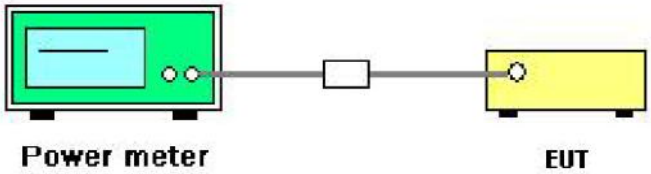 |
| **Test Mode:** | Transmitting mode with modulation |
| **Test Procedure:** | 1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04.<br>2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.<br>3. Set to the maximum power setting and enable the EUT transmit continuously.<br>4. Measure the Peak output power and record the results in the test report. |
| **Test Result:** | PASS |

### Test Instruments

| RF Test Room | | | | |
|---|---|---|---|---|
| **Equipment** | **Manufacturer** | **Model** | **Serial Number** | **Calibration Due** |
| Power meter | Agilent | E4417B | HKE-107 | Sep. 27, 2018 |
| Power Sensor | Agilent | E9327A | HKE-113 | Sep. 27, 2018 |
| RF cable | Times | 1-40G | HKE-034 | Sep. 27, 2018 |
| RF automatic control unit | Tonscend | JS0806-2 | HKE-060 | Sep. 27, 2018 |

***Note:*** *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

## Test Data

| TX 802.11b Mode | | | |
|---|---|---|---|
| Test Channe | Frequency | Maximum Peak Conducted Output Power | LIMIT |
| | (MHz) | (dBm) | dBm |
| CH01 | 2412 | 12.31 | 30 |
| CH06 | 2437 | 11.95 | 30 |
| CH11 | 2462 | 11.36 | 30 |
| **TX 802.11g Mode** | | | |
| CH01 | 2412 | 11.78 | 30 |
| CH06 | 2437 | 11.35 | 30 |
| CH11 | 2462 | 10.86 | 30 |
| **TX 802.11n20 Mode** | | | |
| CH01 | 2412 | 11.26 | 30 |
| CH06 | 2437 | 11.09 | 30 |
| CH11 | 2462 | 10.62 | 30 |
| **TX 802.11n40 Mode** | | | |
| CH03 | 2422 | 10.92 | 30 |
| CH06 | 2437 | 10.46 | 30 |
| CH09 | 2452 | 10.12 | 30 |

## 4.3. Emission Bandwidth

### Test Specification

| | |
|---|---|
| **Test Requirement:** | FCC Part15 C Section 15.247 (a)(2) |
| **Test Method:** | KDB 558074 |
| **Limit:** | >500kHz |
| **Test Setup:** | 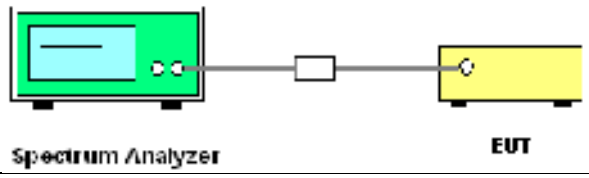 |
| **Test Mode:** | Transmitting mode with modulation |
| **Test Procedure:** | 1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v04.<br>2. Set to the maximum power setting and enable the EUT transmit continuously.<br>3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.<br>4. Measure and record the results in the test report. |
| **Test Result:** | PASS |

### Test Instruments

| RF Test Room | | | | |
|---|---|---|---|---|
| **Equipment** | **Manufacturer** | **Model** | **Serial Number** | **Calibration Due** |
| Spectrum analyzer | Agilent | N9020A | HKE-048 | Sep. 27, 2018 |
| RF Cable (9KHz-26.5GHz) | Tonscend | 170660 | N/A | Sep. 27, 2018 |
| RF automatic control unit | Tonscend | JS0806-2 | HKE-060 | Sep. 27, 2018 |

***Note:*** *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

## Test data

| Test channel | 6dB Emission Bandwidth (MHz) | | | |
|---|---|---|---|---|
| | 802.11b | 802.11g | 802.11n(H20) | 802.11n(H40) |
| Lowest | 10.11 | 16.36 | 16.87 | 35.42 |
| Middle | 10.08 | 16.37 | 16.98 | 35.44 |
| Highest | 10.13 | 16.36 | 17.22 | 35.40 |
| Limit: | >500k | | | |
| Test Result: | PASS | | | |

**Test plots as follows:**

**802.11b Modulation**

Lowest channel

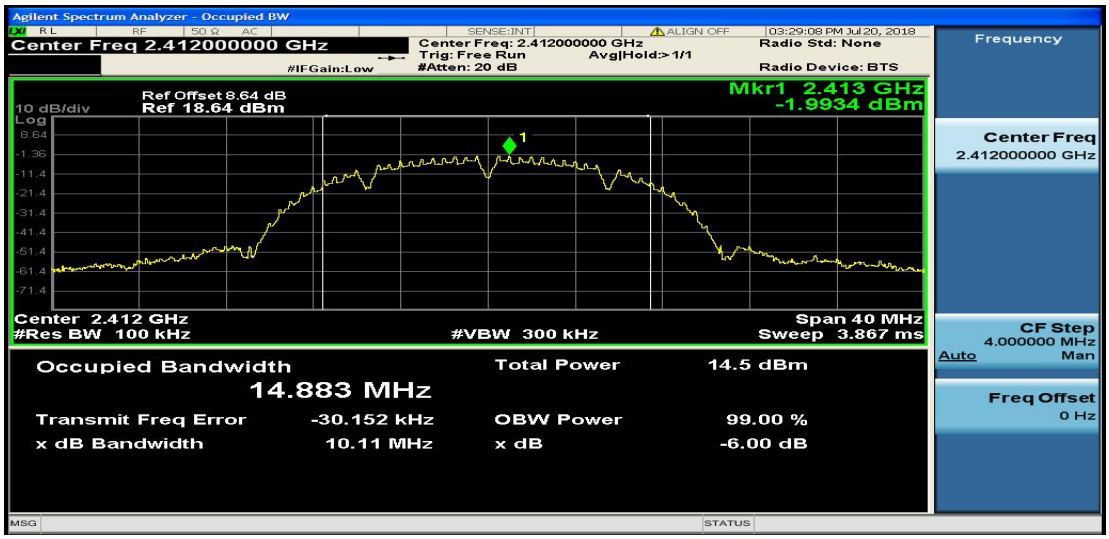


Middle channel

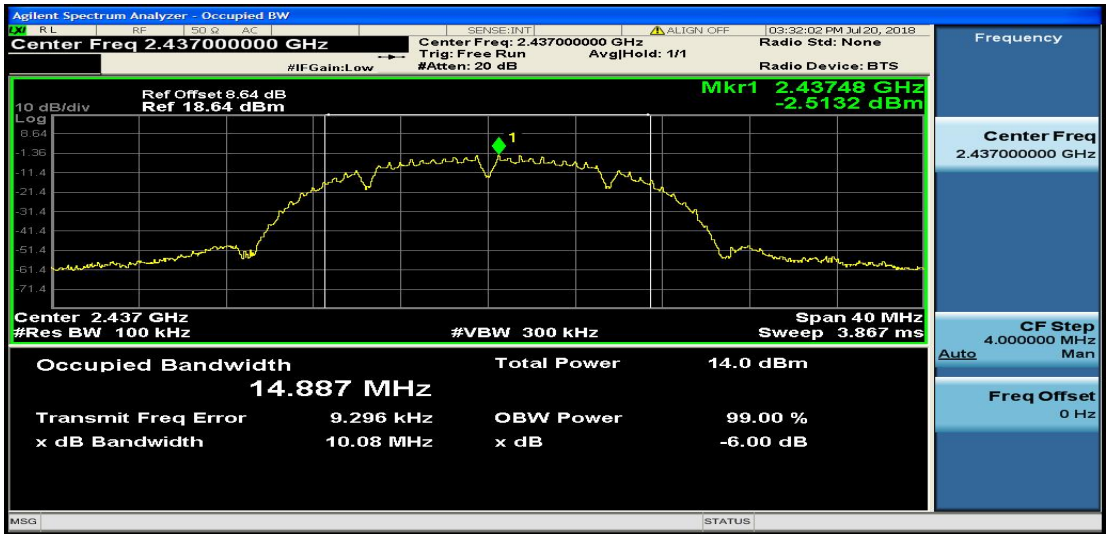


Highest channel

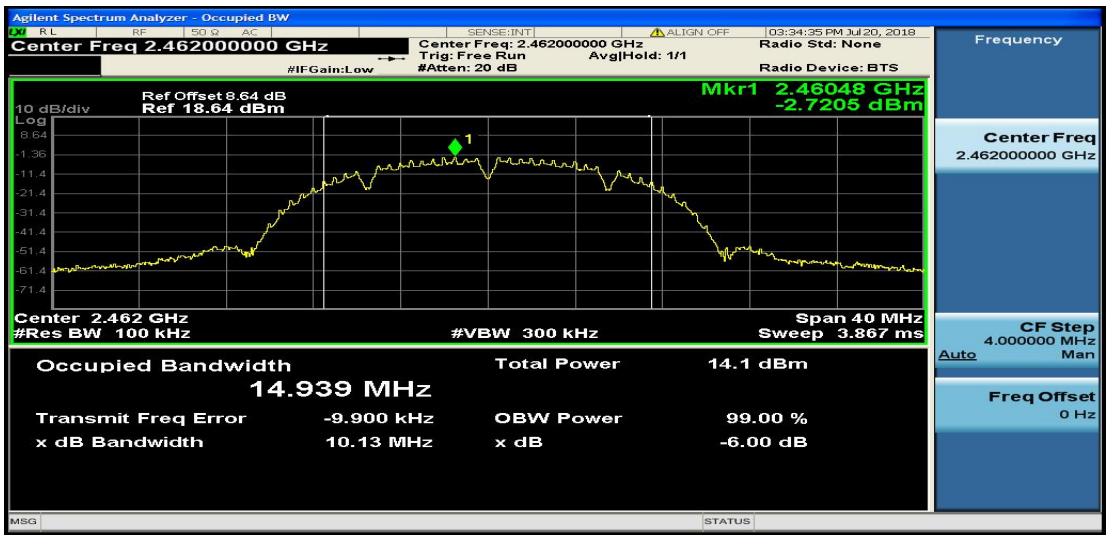

**802.11g Modulation**

Lowest channel

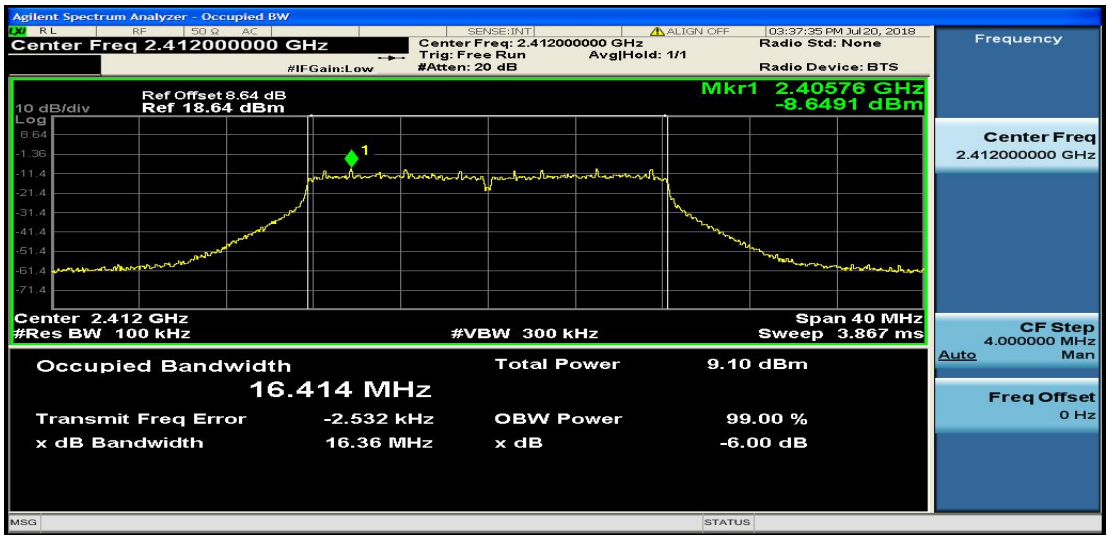


Middle channel

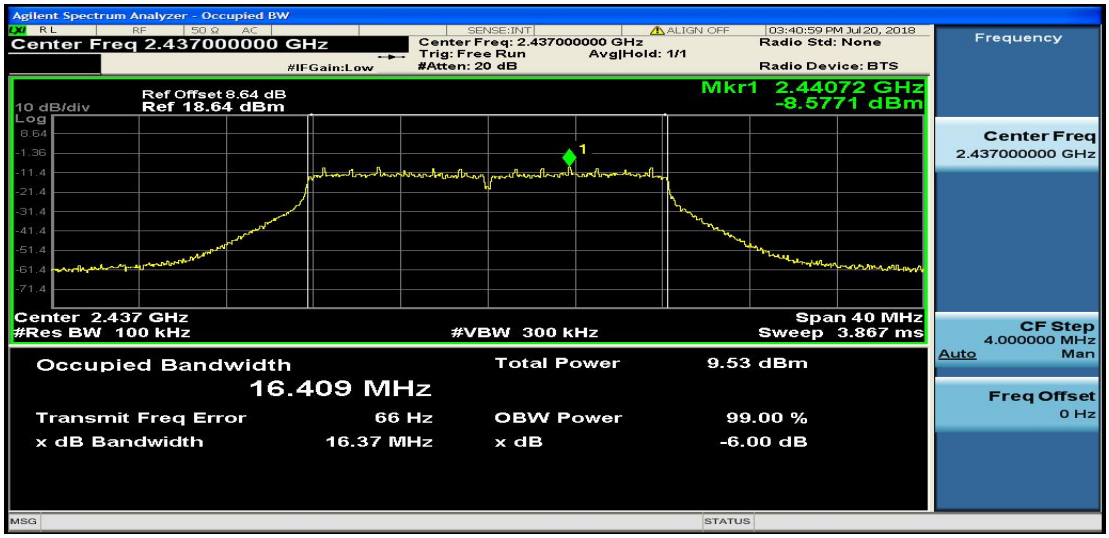


Highest channel

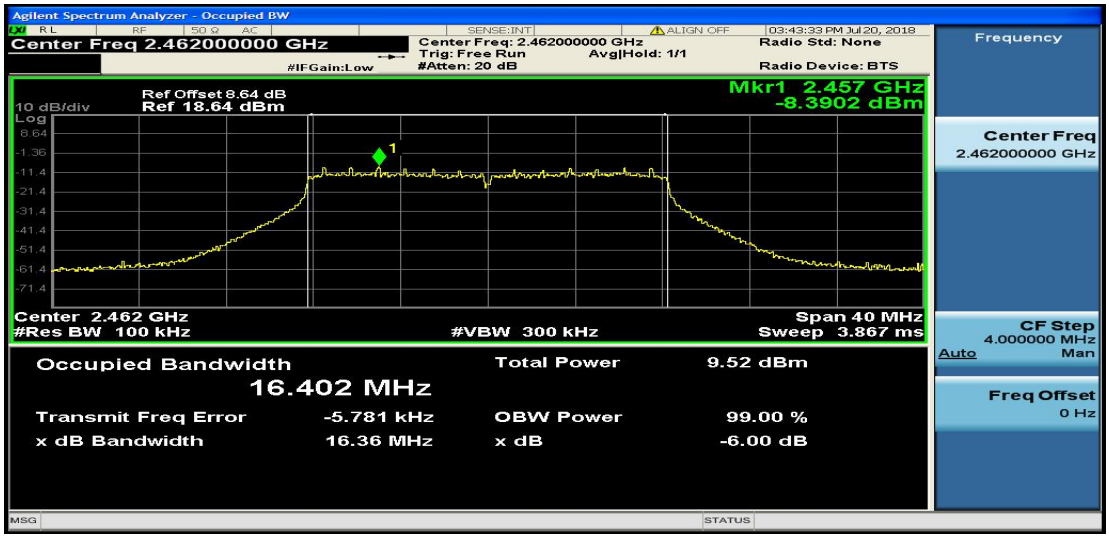

**802.11n (HT20) Modulation**

Lowest channel

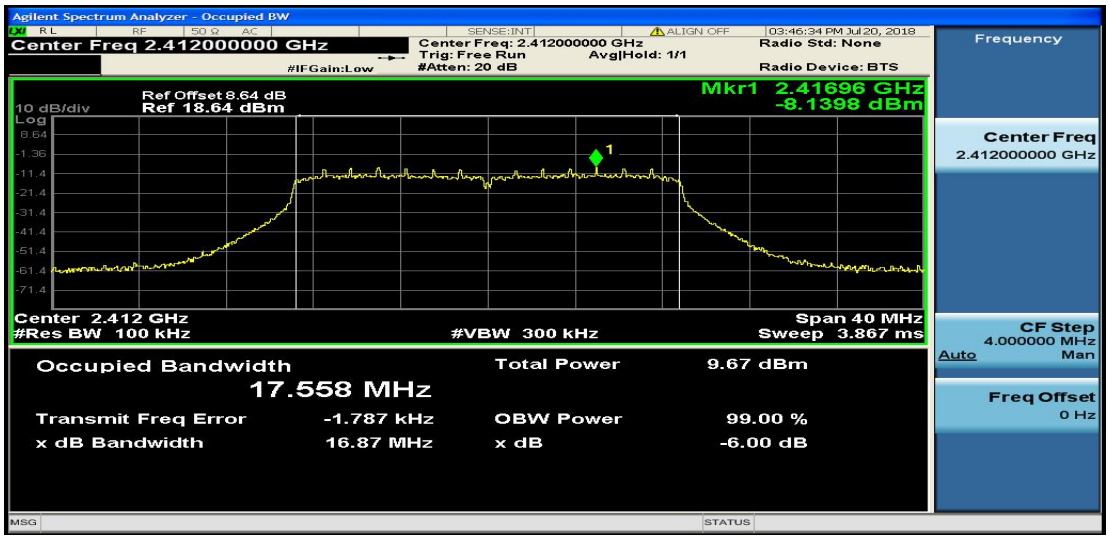


Middle channel

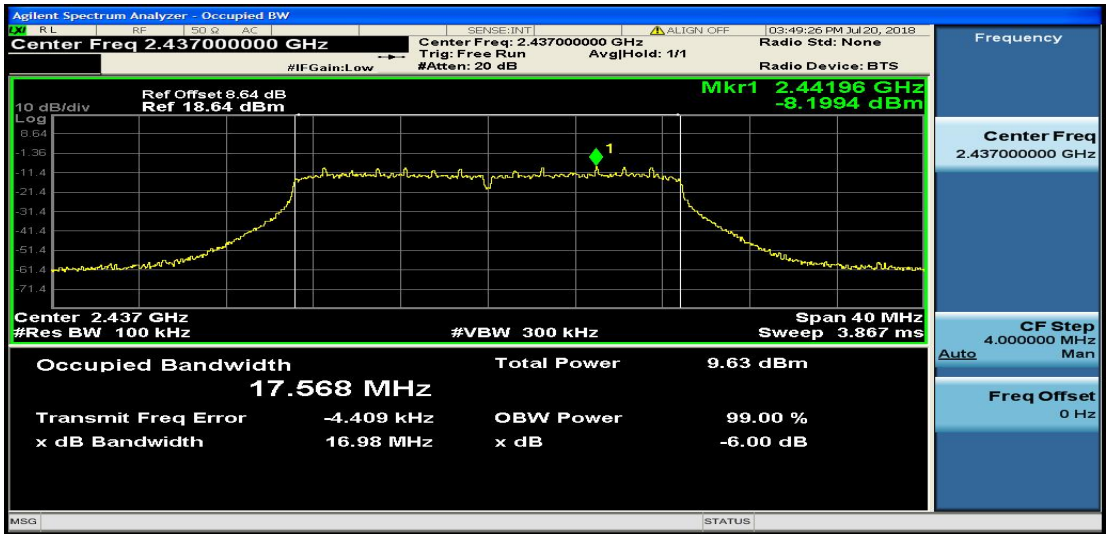


Highest channel

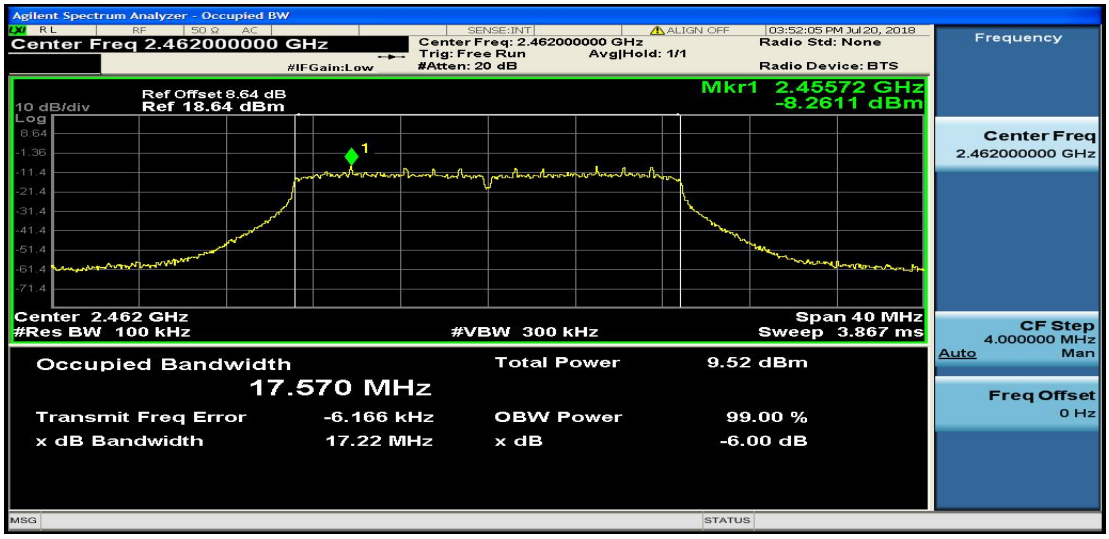

**802.11n (HT40) Modulation**

Lowest channel

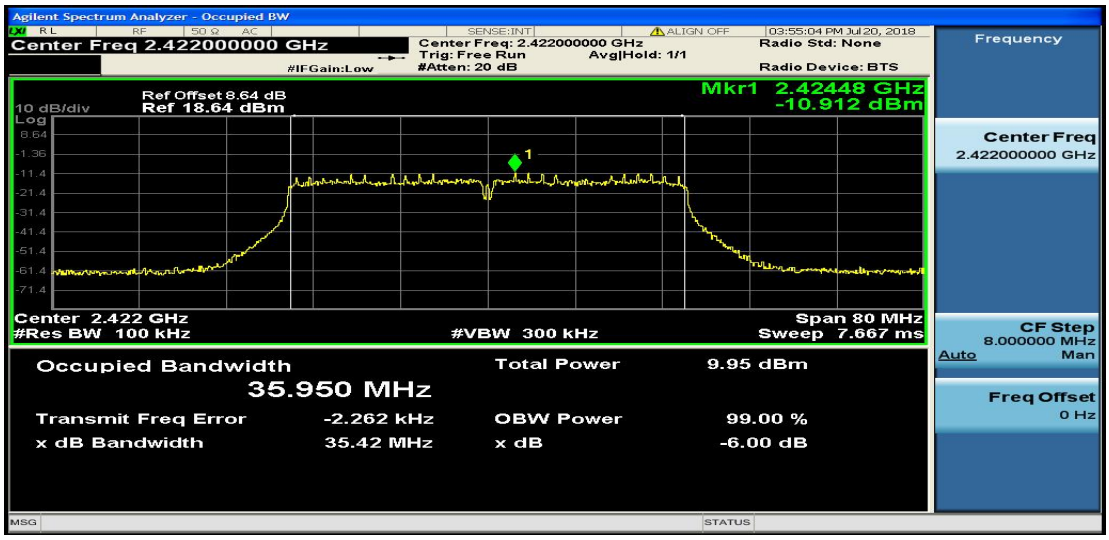


Middle channel

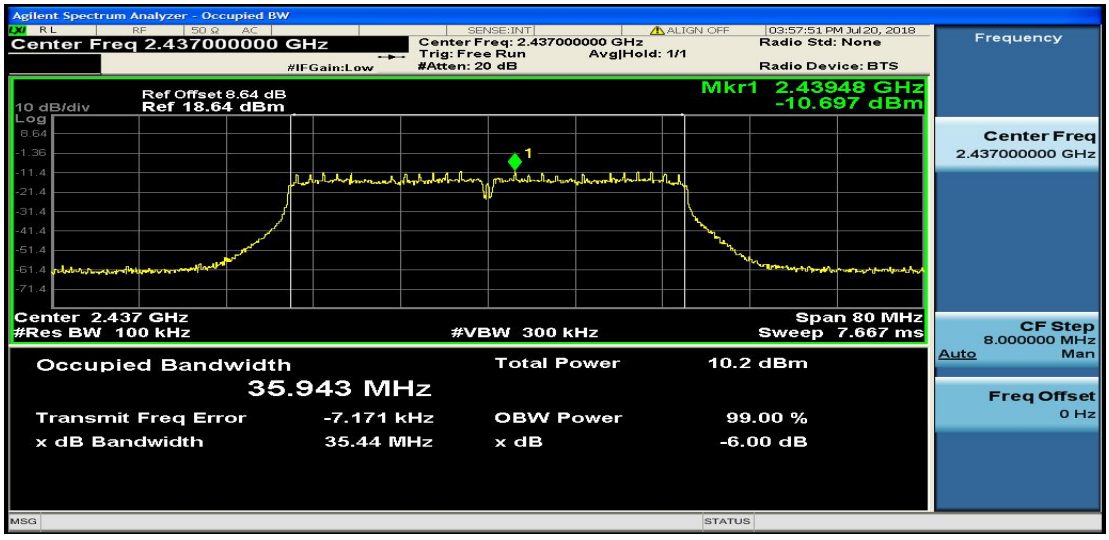


Highest channel

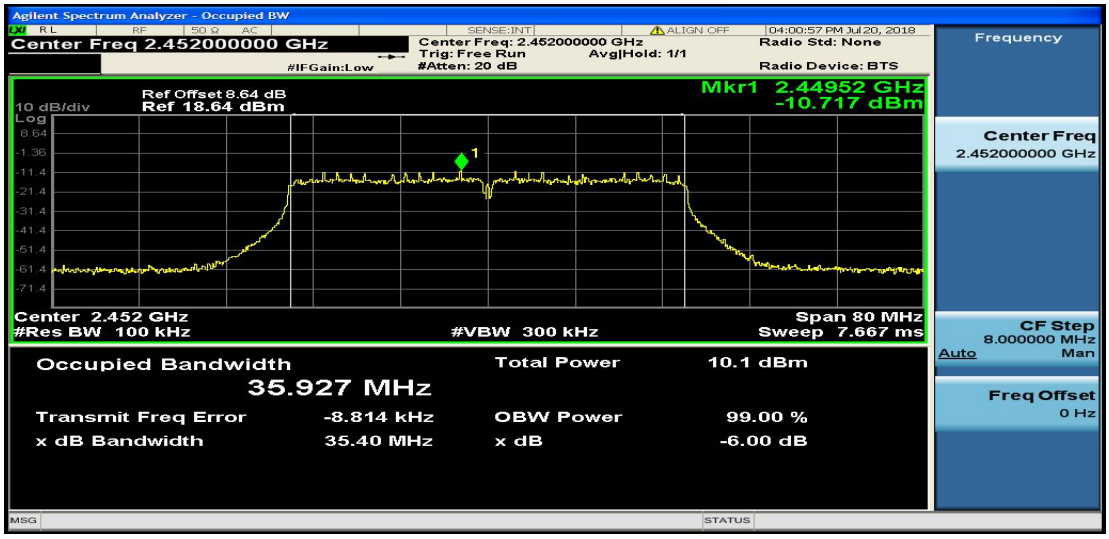

## 4.4. Power Spectral Density

### Test Specification

| | |
|---|---|
| **Test Requirement:** | FCC Part15 C Section 15.247 (e) |
| **Test Method:** | KDB 558074 |
| **Limit:** | The average power spectral density shall not be greater than 8dBm in any 3kHz band at any time intervalof continuous transmission. |
| **Test Setup:** | 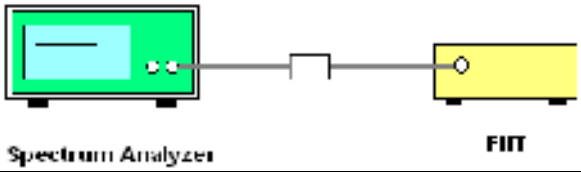 |
| **Test Mode:** | Transmitting mode with modulation |
| **Test Procedure:** | 1. The testing follows Measurement Procedure 10.3 Method AVGPSD of FCC KDB Publication No.558074 D01 DTS Meas. Guidance v04<br>2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.<br>3. Set to the maximum power setting and enable the EUT transmit continuously.<br>4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW): 3 kHz ≤ RBW ≤ 100 kHz. Video bandwidth VBW ≥ 3 x RBW. Set the span to at least 1.5 times the OBW.<br>5. Detector = RMS, Sweep time = auto couple.<br>6. Employ trace averaging (RMS) mode over a minimum of 100 traces.Use the peak marker function to determine the maximum power level.<br>6. Measure and record the results in the test report. |
| **Test Result:** | PASS |

### Test Instruments

| RF Test Room | | | | |
|---|---|---|---|---|
| **Equipment** | **Manufacturer** | **Model** | **Serial Number** | **Calibration Due** |
| Spectrum analyzer | Agilent | N9020A | HKE-048 | Sep. 27, 2018 |
| RF Cable (9KHz-26.5GHz) | Tonscend | 170660 | N/A | Sep. 27, 2018 |
| RF automatic control unit | Tonscend | JS0806-2 | HKE-060 | Sep. 27, 2018 |

***Note:*** *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

## Test data

| Test channel | Power Spectral Density (dBm/30kHz) | | | |
|---|---|---|---|---|
| | 802.11b | 802.11g | 802.11n(H20) | 802.11n(H40) |
| Lowest | -6.45 | -13.25 | -14.18 | -15.74 |
| Middle | -7.65 | -14.1 | -13.67 | -15.42 |
| Highest | -7.83 | -13.65 | -13.61 | -15.68 |
| Limit: | 18dBm/30kHz | | | |
| Test Result: | PASS | | | |

**Test plots as follows:**

**802.11b Modulation**

Lowest channel

Middle channel

Highest channel

Agilent Spectrum Analyzer - Swept SA
Center Freq 2.462000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 20 dB
Avg Type: Log-Pwr
Avg|Hold: 10/10
03:35:45 PM Jul 20, 2018
Ref Offset 8.64 dB
10 dB/div
Ref 18.64 dBm
Mkr1 2.461 494 GHz
-7.829 dBm
Center 2.46200 GHz
#Res BW 30 kHz
#VBW 100 kHz
Span 20.26 MHz
Sweep 21.40 ms (1001 pts)
Frequency
Auto Tune
Center Freq
2.462000000 GHz
Start Freq
2.451870000 GHz
Stop Freq
2.472130000 GHz
CF Step
2.026000 MHz
Auto
Man
Freq Offset
0 Hz

**802.11g Modulation**

Lowest channel

Middle channel

Highest channel

Agilent Spectrum Analyzer - Swept SA
Center Freq 2.462000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 20 dB
Avg Type: Log-Pwr
Avg|Hold: 10/10
03:44:44 PM Jul 20, 2018
Ref Offset 8.64 dB
10 dB/div
Ref 18.64 dBm
Mkr1 2.468 87 GHz
-13.645 dBm
Center 2.46200 GHz
#Res BW 30 kHz
#VBW 100 kHz
Span 32.72 MHz
Sweep 34.53 ms (1001 pts)
Frequency
Auto Tune
Center Freq
2.462000000 GHz
Start Freq
2.445640000 GHz
Stop Freq
2.478360000 GHz
CF Step
3.272000 MHz
Auto
Man
Freq Offset
0 Hz

**802.11n (HT20) Modulation**

Lowest channel

Middle channel

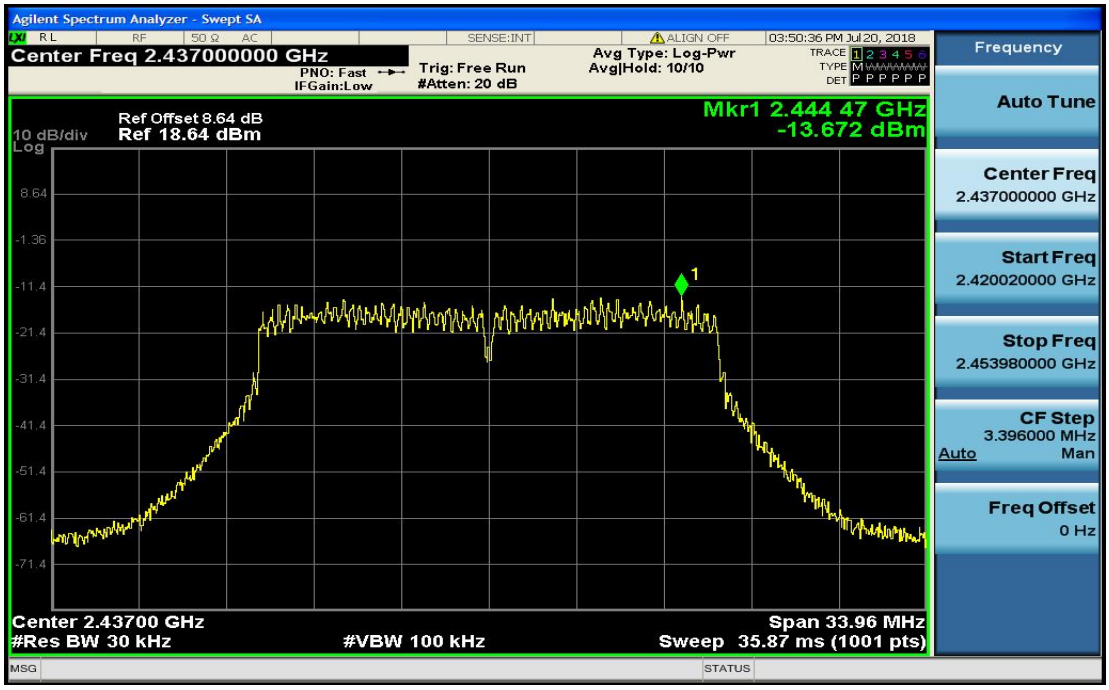


Highest channel

Agilent Spectrum Analyzer - Swept SA
Center Freq 2.462000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 20 dB
Avg Type: Log-Pwr
Avg|Hold: 10/10
03:53:16 PM Jul 20, 2018
Frequency
Auto Tune
Center Freq
2.462000000 GHz
Start Freq
2.444780000 GHz
Stop Freq
2.479220000 GHz
CF Step
3.444000 MHz
Auto
Man
Freq Offset
0 Hz
Ref Offset 8.64 dB
10 dB/div
Ref 18.64 dBm
Log
Mkr1 2.466 37 GHz
-13.608 dBm
Center 2.46200 GHz
#Res BW 30 kHz
#VBW 100 kHz
Span 34.44 MHz
Sweep 36.33 ms (1001 pts)

**802.11n (HT40) Modulation**

Lowest channel

Middle channel

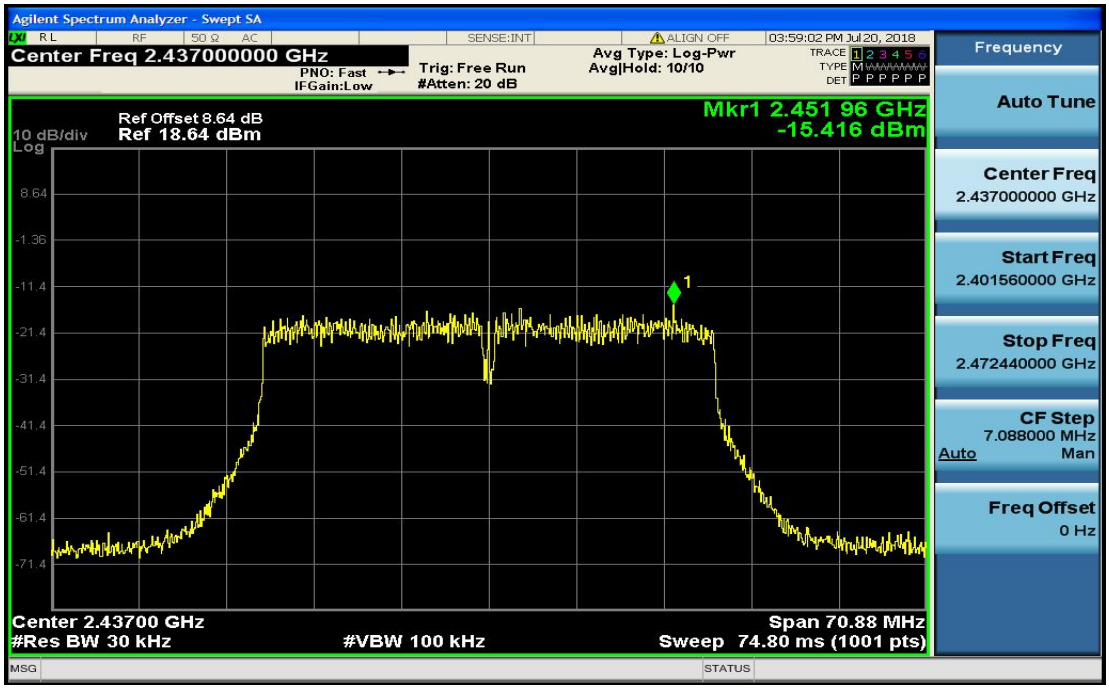


Highest channel

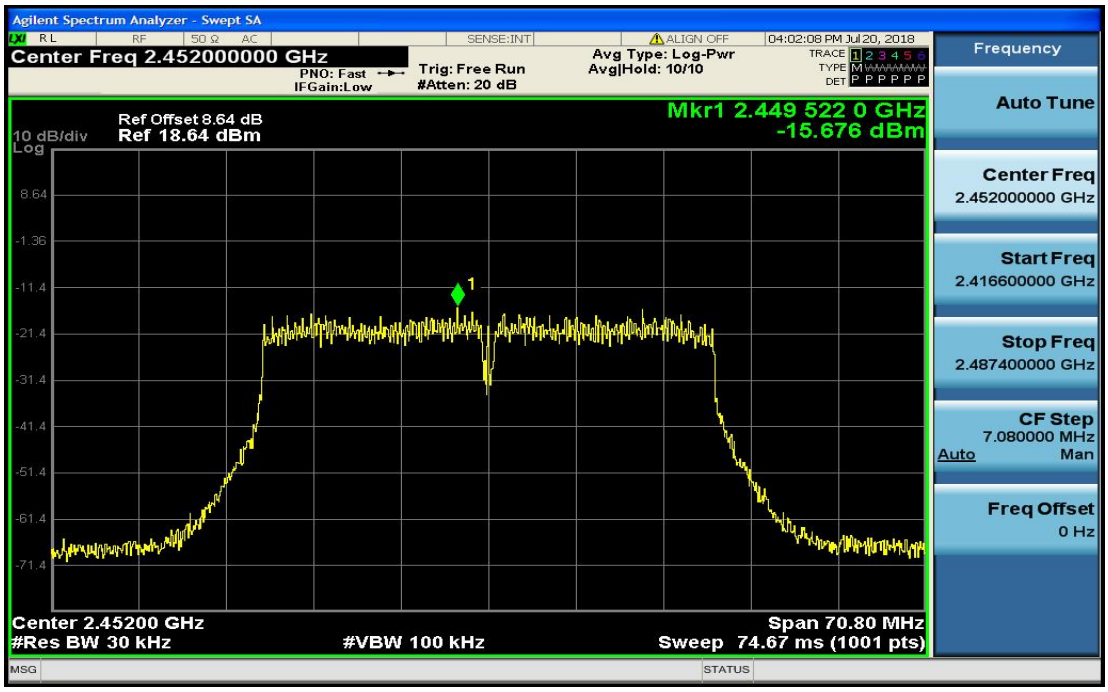
Agilent Spectrum Analyzer - Swept SA
R L
RF
50 Ω AC
SENSE:INT
ALIGN OFF
04:02:08 PM Jul 20, 2018
Center Freq 2.452000000 GHz
PNO: Fast
IFGain:Low
Trig: Free Run
#Atten: 20 dB
Avg Type: Log-Pwr
Avg|Hold: 10/10
TRACE 1 2 3 4 5 6
TYPE M
DET P P P P P P
Frequency
Auto Tune
Ref Offset 8.64 dB
10 dB/div
Log
Ref 18.64 dBm
Mkr1 2.449 522 0 GHz
-15.676 dBm
8.64
-1.36
-11.4
-21.4
-31.4
-41.4
-51.4
-61.4
-71.4
1
Center Freq
2.452000000 GHz
Start Freq
2.416600000 GHz
Stop Freq
2.487400000 GHz
CF Step
7.080000 MHz
Auto
Man
Freq Offset
0 Hz
Center 2.45200 GHz
#Res BW 30 kHz
#VBW 100 kHz
Span 70.80 MHz
Sweep 74.67 ms (1001 pts)
MSG
STATUS

]

## 4.5. Conducted Band Edge and Spurious Emission Measurement

### Test Specification

| | |
|---|---|
| **Test Requirement:** | FCC Part15 C Section 15.247 (d) |
| **Test Method:** | KDB558074 |
| **Limit:** | In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in thenon-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, asdefined in Section 15.205(a), must also comply with the radiated emission limits specified in Section15.209(a). |
| **Test Setup:** | 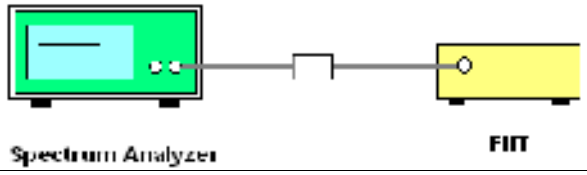 |
| **Test Mode:** | Transmitting mode with modulation |
| **Test Procedure:** | 1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.<br>2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.<br>3. Set to the maximum power setting and enable the EUT transmit continuously.<br>4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).<br>5. Measure and record the results in the test report.<br>6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band. |
| **Test Result:** | PASS |

## Test Instruments

| RF Test Room | | | | |
|---|---|---|---|---|
| **Equipment** | **Manufacturer** | **Model** | **Serial Number** | **Calibration Due** |
| Spectrum analyzer | Agilent | N9020A | HKE-048 | Sep. 27, 2018 |
| Signal generator | Agilent | N5183A | HKE-071 | Sep. 27, 2018 |
| RF Cable (9KHz-26.5GHz) | Tonscend | 170660 | N/A | Sep. 27, 2018 |
| RF automatic control unit | Tonscend | JS0806-2 | HKE-060 | Sep. 27, 2018 |

***Note:*** *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

## Test Data

### 802.11b Modulation

| Lowest Channel | Highest Channel |
|---|---|
| Band Edge | Band Edge |
| 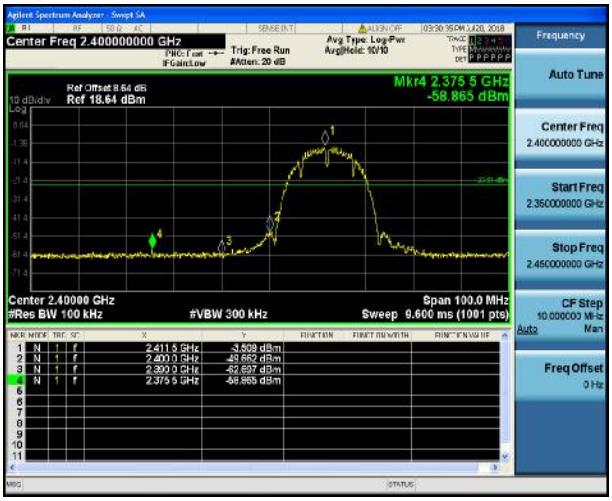 | |
| Spurious emission | Spurious emission |
| 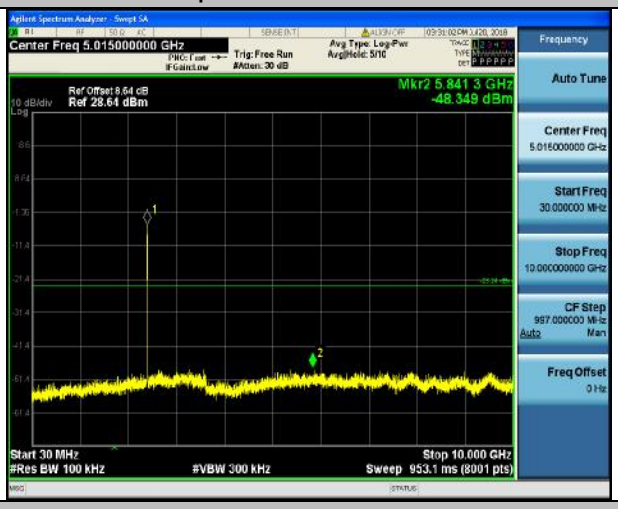 | 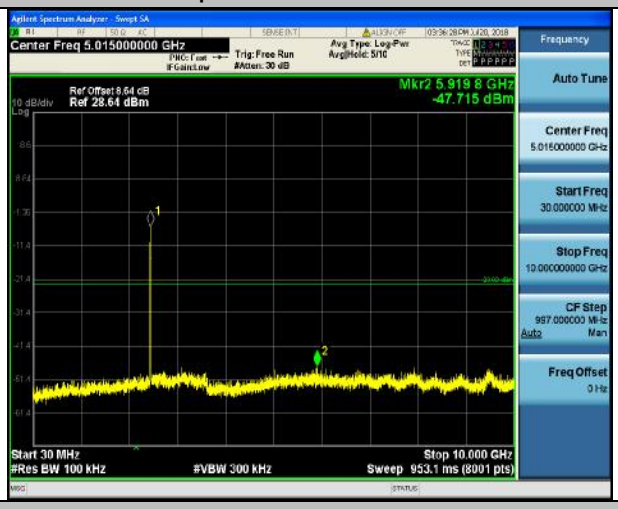 |
| | |

**802.11g Modulation**

| Lowest Channel | Highest Channel |
|---|---|
| Band Edge | Band Edge |
| 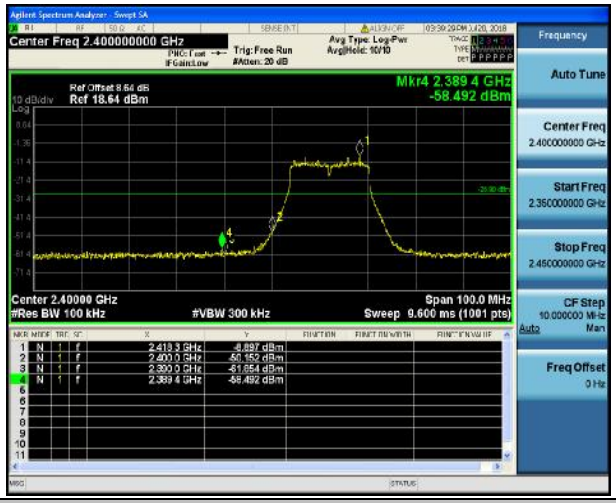 | 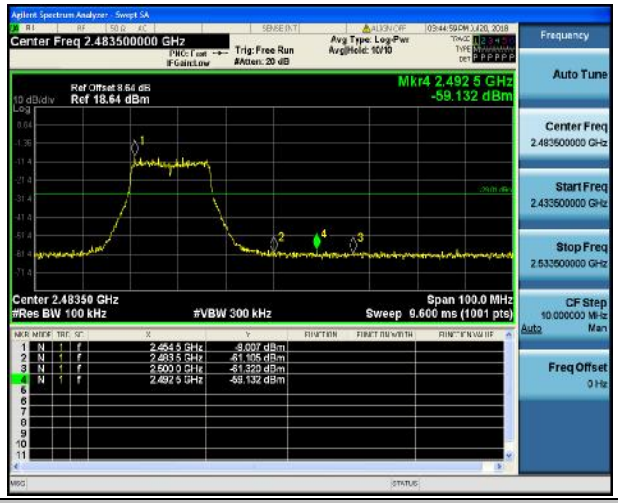 |
| Spurious emission | Spurious emission |
| 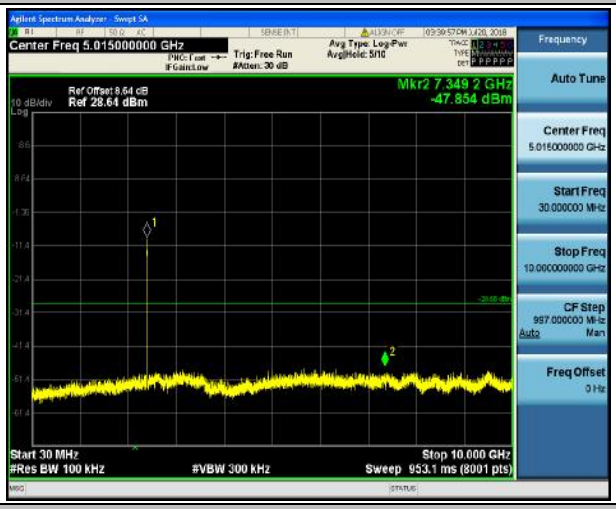 | 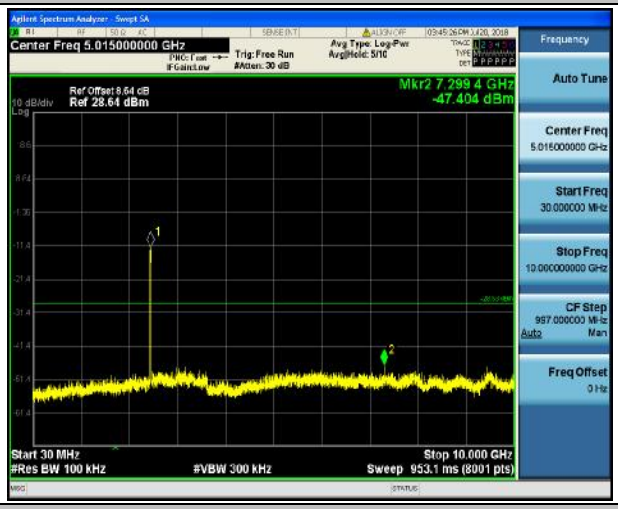 |
| | |
| | |

**802.11n (HT20) Modulation**

| Lowest Channel | Highest Channel |
|---|---|
| Band Edge | Band Edge |
| 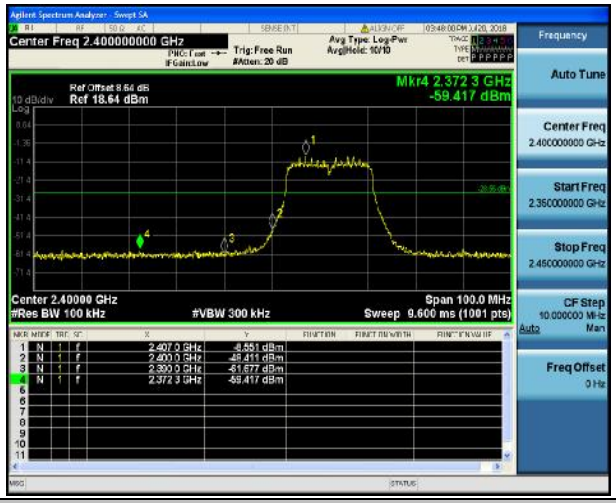 | 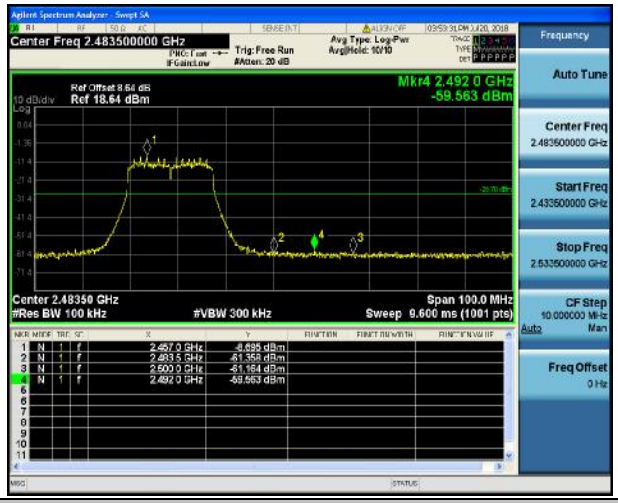 |
| Spurious emission | Spurious emission |
| 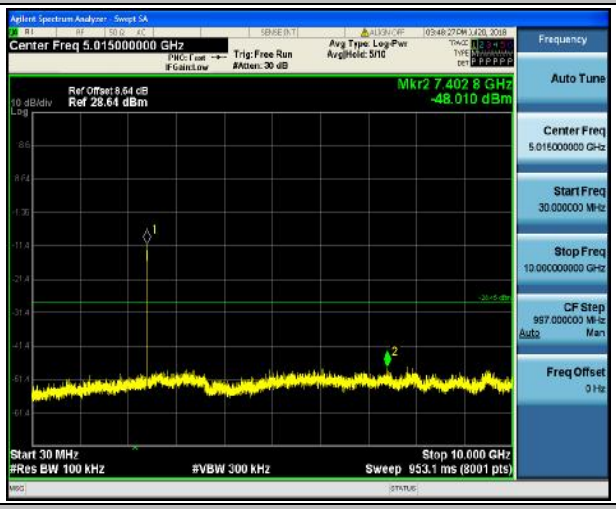 | 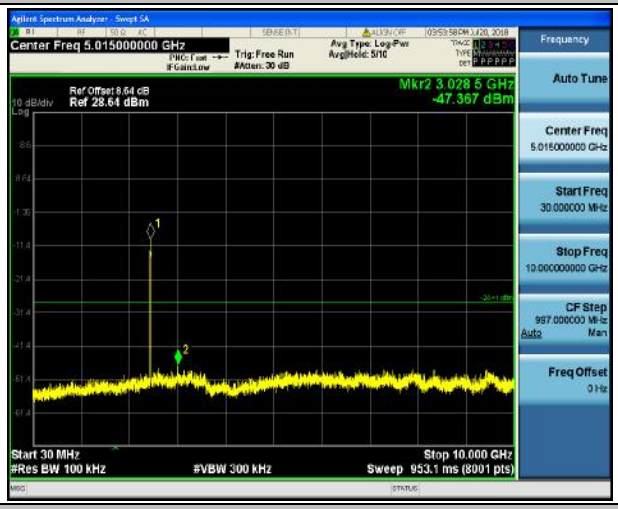 |
| | |
| | |

**802.11n (HT40) Modulation**

| Lowest Channel | Highest Channel |
|---|---|
| Band Edge | Band Edge |
| 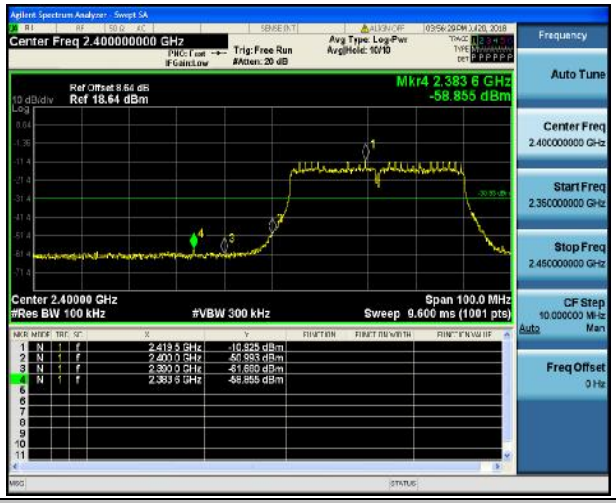 | 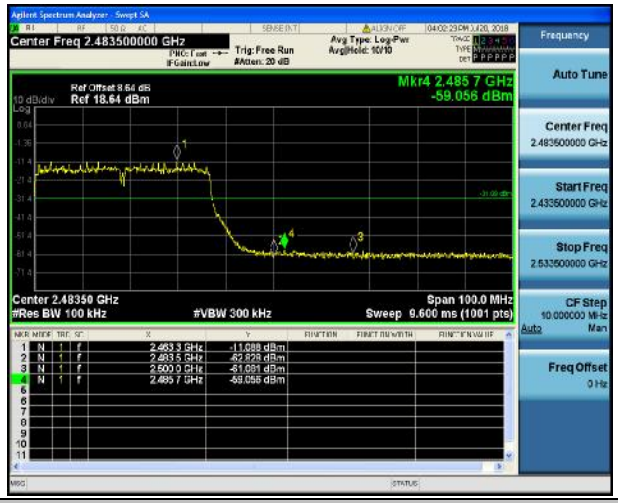 |
| Spurious emission | Spurious emission |
| 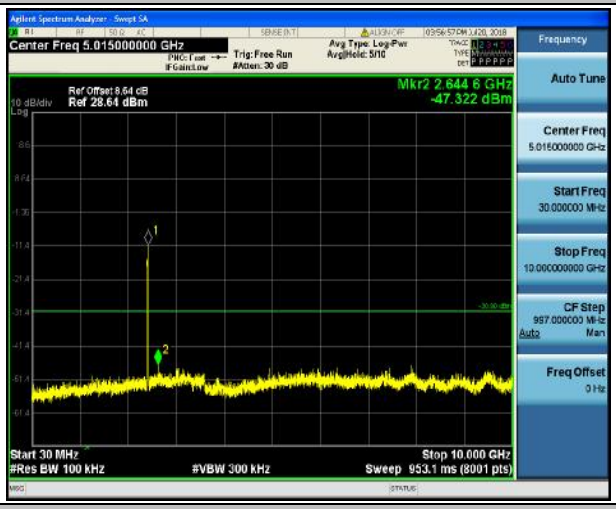 | 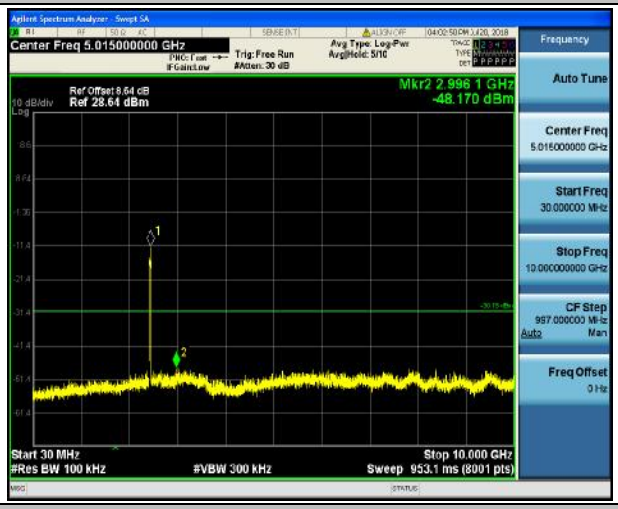 |
| | |
| | |













8

## 4.6. Radiated Spurious Emission Measurement

### Test Specification

<table>
<tr><td>Test Requirement:</td><td>FCC Part15 C Section 15.209</td></tr>
<tr><td>Test Method:</td><td>ANSI C63.10: 2013</td></tr>
<tr><td>Frequency Range:</td><td>9 kHz to 25 GHz</td></tr>
<tr><td>Measurement Distance:</td><td>3 m</td></tr>
<tr><td>Antenna Polarization:</td><td>Horizontal & Vertical</td></tr>
<tr><td>Operation mode:</td><td>Transmitting mode with modulation</td></tr>
<tr><td>Receiver Setup:</td><td>
<table>
<tr><td>Frequency</td><td>Detector</td><td>RBW</td><td>VBW</td><td>Remark</td></tr>
<tr><td>9kHz- 150kHz</td><td>Quasi-peak</td><td>200Hz</td><td>1kHz</td><td>Quasi-peak Value</td></tr>
<tr><td>150kHz-30MHz</td><td>Quasi-peak</td><td>9kHz</td><td>30kHz</td><td>Quasi-peak Value</td></tr>
<tr><td>30MHz-1GHz</td><td>Quasi-peak</td><td>100KHz</td><td>300KHz</td><td>Quasi-peak Value</td></tr>
<tr><td rowspan="2">Above 1GHz</td><td>Peak</td><td>1MHz</td><td>3MHz</td><td>Peak Value</td></tr>
<tr><td>Peak</td><td>1MHz</td><td>10Hz</td><td>Average Value</td></tr>
</table>
</td></tr>
<tr><td>Limit:</td><td>
<table>
<tr><td>Frequency</td><td>Field Strength (microvolts/meter)</td><td>Measurement Distance (meters)</td></tr>
<tr><td>0.009-0.490</td><td>2400/F(KHz)</td><td>300</td></tr>
<tr><td>0.490-1.705</td><td>24000/F(KHz)</td><td>30</td></tr>
<tr><td>1.705-30</td><td>30</td><td>30</td></tr>
<tr><td>30-88</td><td>100</td><td>3</td></tr>
<tr><td>88-216</td><td>150</td><td>3</td></tr>
<tr><td>216-960</td><td>200</td><td>3</td></tr>
<tr><td>Above 960</td><td>500</td><td>3</td></tr>
</table>
<table>
<tr><td>Frequency</td><td>Field Strength (microvolts/meter)</td><td>Measurement Distance (meters)</td><td>Detector</td></tr>
<tr><td rowspan="2">Above 1GHz</td><td>500</td><td>3</td><td>Average</td></tr>
<tr><td>5000</td><td>3</td><td>Peak</td></tr>
</table>
</td></tr>
<tr><td>Test setup:</td><td>For radiated emissions below 30MHz<br> <br>30MHz to 1GHz</td></tr>
</table>

<table>
<tr>
<td></td>
<td>
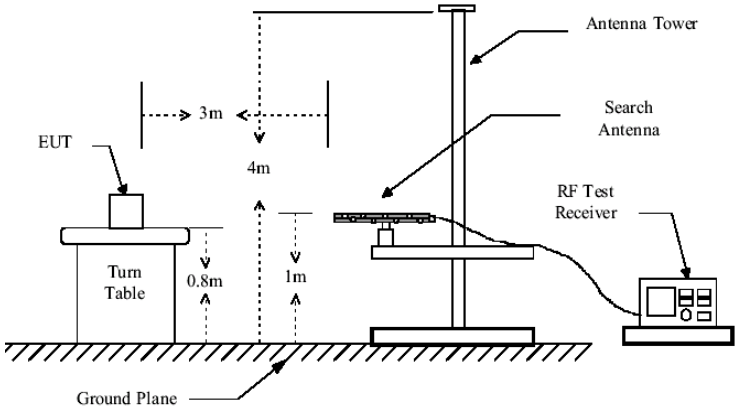

Above 1GHz
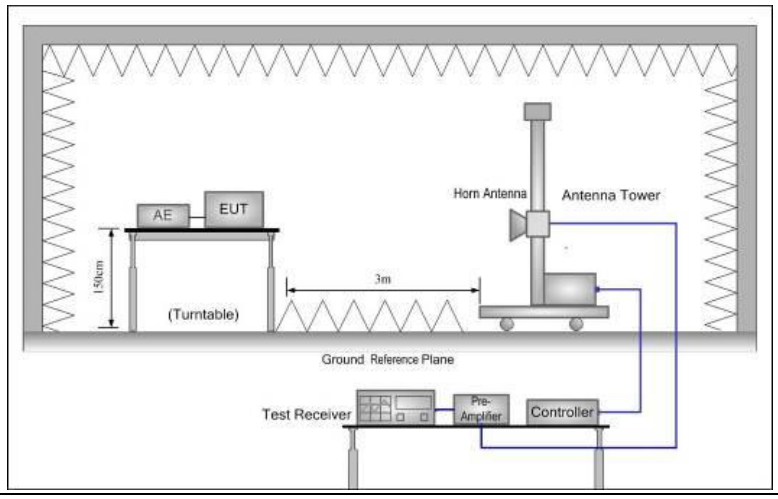

</td>
</tr>
<tr>
<td>Test Procedure:</td>
<td>1. For the radiated emission test below 1GHz:<br>The EUT was placed on a turntable with 0.8 meter above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on thetop of a variable height antenna tower.The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) andturntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a highPASS filter are used for the test in order to get better signal level.<br>For the radiated emission test above 1GHz:<br>Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissionsat the specified measurement distance, while keeping the measurement antenna aimed at the source ofemissions at each frequency of significant emissions, with polarization oriented for maximum response.The measurement antenna may have to be higher or lower than the EUT, depending on the radiationpattern of the emission and staying aimed at the emission source for receiving the maximum signal. Thefinalmeasurementantenna elevation shall be that which maximizes the</td>
</tr>
</table>

| | |
|---|---|
| | emissions. The measurementantenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 mabove the ground or reference ground plane.<br>3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level<br>4. For measurement below 1GHz, If the emission level of the EUT measured by the peak detectoris 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, theemission measurement will be repeated using the quasi-peak detector and reported.<br>5. Use the following spectrum analyzer settings:<br>(1) Span shall wide enough to fully capture the emission being measured;<br>(2) Set RBW=100 kHz for f < 1 GHz; VBW≥RBW; Sweep = auto; Detector function = peak;Trace = max hold;<br>(3) Set RBW = 1 MHz, VBW= 3MHz for f 1 GHz for peak measurement.<br>For average measurement:VBW = 10 Hz, when duty cycle is no less than 98 percent.VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimumtransmission duration over which the transmitter is on and is transmitting at its maximumpower control level for the tested mode of operation. |
| **Test results:** | PASS |

## Test Instruments

| Radiated Emission Test Site (966) | | | | |
|---|---|---|---|---|
| **Name of Equipment** | **Manufacturer** | **Model** | **Serial Number** | **Calibration Due** |
| Receiver | R&S | ESCI-7 | HKE-010 | Sep. 27, 2018 |
| Spectrum analyzer | Agilent | N9020A | HKE-048 | Sep. 27, 2018 |
| Preamplifier | EMCI | EMC051845 SE | HKE-015 | Sep. 27, 2018 |
| Preamplifier | Agilent | 83051A | HKE-016 | Sep. 27, 2018 |
| Loop antenna | Schwarzbeck | FMZB 1519 B | HKE-014 | Sep. 26, 2019 |
| Broadband antenna | Schwarzbeck | VULB 9163 | HKE-012 | Sep. 26, 2019 |
| Horn antenna | Schwarzbeck | 9120D | HKE-013 | Sep. 26, 2019 |
| Antenna Mast | Keleto | CC-A-4M | N/A | N/A |
| Position controller | Taiwan MF | MF7802 | HKE-011 | Sep. 27, 2018 |
| Radiated test software | Tonscend | TS+ Rev 2.5.0.0 | HKE-082 | N/A |
| RF cable (9KHz-1GHz) | Times | 381806-001 | N/A | N/A |
| RF cable | Times | 1-40G | HKE-034 | Sep. 27, 2018 |

***Note:*** *The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).*

## Test Data

**Please refer to following diagram for individual**
**Below 1GHz**

| | | | |
|---|---|---|---|
| EUT： | Digital Wireless Monitor | Model Name ： | CX77 |
| Temperature： | 25 ℃ | Relative Humidity： | 48% |
| Pressure： | 1010 hPa | Test Voltage ： | DC 12V |
| Test Mode ： | 802.11b 2412 | Polarization : | Horizontal |
| Note:test perform on all test mode, the worst mode and has been reported. | | | |

### Test Graph

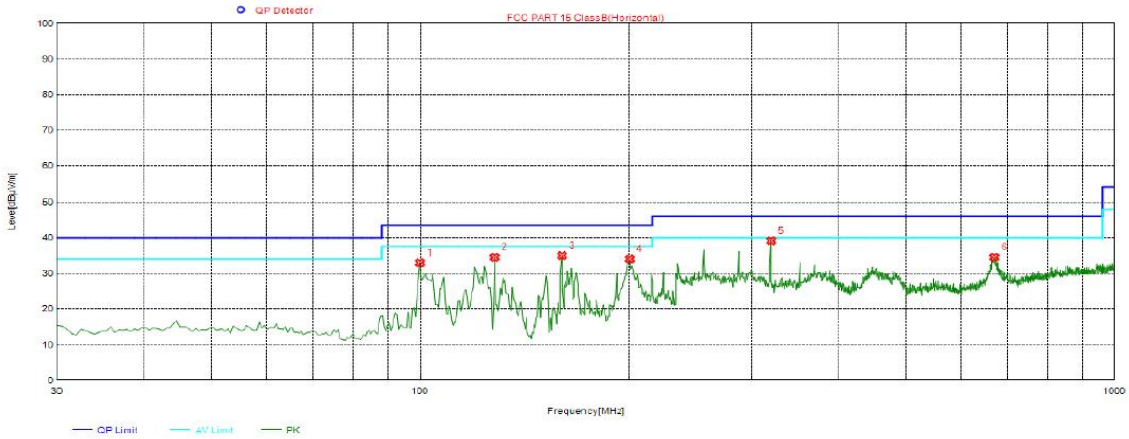


### Suspected List

| NO. | Freq. [MHz] | Level [dBµV/m] | Factor [dB] | Limit [dBµV/m] | Margin [dB] | Trace | Height [cm] | Angle [°] | Polarity |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 99.8400 | 32.98 | -16.22 | 43.50 | 10.52 | PK | 100 | 117 | Horizontal |
| 2 | 127.9700 | 34.51 | -14.12 | 43.50 | 8.99 | PK | 100 | 68 | Horizontal |
| 3 | 159.9800 | 35.01 | -9.12 | 43.50 | 8.49 | PK | 100 | 75 | Horizontal |
| 4 | 200.2350 | 34.04 | -15.56 | 43.50 | 9.46 | PK | 100 | 17 | Horizontal |
| 5 | 320.0300 | 39.16 | -12.46 | 46.00 | 6.84 | PK | 100 | 193 | Horizontal |
| 6 | 671.1700 | 34.53 | -4.17 | 46.00 | 11.47 | PK | 100 | 323 | Horizontal |

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

| | | | |
|---|---|---|---|
| EUT： | Digital Wireless Monitor | Model Name ： | CX77 |
| Temperature： | 25 ℃ | Relative Humidity： | 48% |
| Pressure： | 1010 hPa | Test Voltage ： | DC 12V |
| Test Mode ： | 802.11b 2412 | Polarization : | Vertical |
| Note:test perform on all test mode, the worst mode and has been reported. | | | |

**Test Graph**

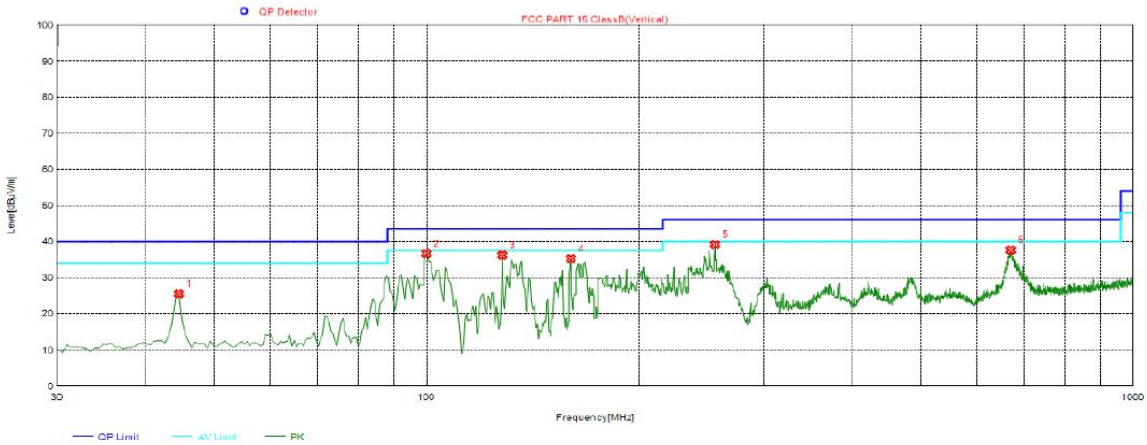


**Suspected List**

| NO. | Freq. [MHz] | Level [dBµV/m] | Factor [dB] | Limit [dBµV/m] | Margin [dB] | Trace | Height [cm] | Angle [°] | Polarity |
|---|---|---|---|---|---|---|---|---|---|
| 1 | 44.5500 | 25.53 | -16.59 | 40.00 | 14.47 | PK | 100 | 125 | Vertical |
| 2 | 99.8400 | 36.71 | -16.22 | 43.50 | 6.79 | PK | 100 | 261 | Vertical |
| 3 | 127.9700 | 36.27 | -14.12 | 43.50 | 7.23 | PK | 100 | 103 | Vertical |
| 4 | 159.9800 | 35.30 | -9.12 | 43.50 | 8.20 | PK | 100 | 101 | Vertical |
| 5 | 256.0100 | 39.18 | -14.40 | 46.00 | 6.82 | PK | 100 | 112 | Vertical |
| 6 | 671.1700 | 37.64 | -4.17 | 46.00 | 8.36 | PK | 100 | 186 | Vertical |

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

## Above 1GHz

RADIATED EMISSION TEST

LOW CH1 (802.11b Mode)/2412

Horizontal:

| Frequency (MHz) | Meter Reading (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 4824 | 63.59 | -3.64 | 58.74 | 74 | -15.26 | peak |
| 4824 | 47.24 | -3.64 | 41.68 | 54 | -12.32 | AVG |
| 7236 | 56.65 | -0.95 | 59.73 | 74 | -14.27 | peak |
| 7236 | 42.48 | -0.95 | 42.16 | 54 | -11.84 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency (MHz) | Meter Reading (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 4824 | 62.95 | -3.64 | 61.22 | 74 | -12.78 | peak |
| 4824 | 47.02 | -3.64 | 40.38 | 54 | -13.62 | AVG |
| 7236 | 56.38 | -0.95 | 59.61 | 74 | -14.39 | peak |
| 7236 | 42.16 | -0.95 | 41.37 | 54 | -12.63 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

MID CH6 (802.11b Mode)/2437

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4874 | 62.61 | -3.51 | 58.91 | 74 | -15.09 | peak |
| 4874 | 46.46 | -3.51 | 40.19 | 54 | -13.81 | AVG |
| 7311 | 56.35 | -0.82 | 56.37 | 74 | -17.63 | peak |
| 7311 | 41.67 | -0.82 | 41.32 | 54 | -12.68 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4874 | 62.34 | -3.51 | 56.74 | 74 | -17.26 | peak |
| 4874 | 46.25 | -3.51 | 41.93 | 54 | -12.07 | AVG |
| 7311 | 56.11 | -0.82 | 57.81 | 74 | -16.19 | peak |
| 7311 | 41.47 | -0.82 | 41.32 | 54 | -12.68 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

HIGH CH11 (802.11b Mode)/2462

Horizontal:

| Frequency (MHz) | Meter Reading (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 4924 | 61.85 | -3.43 | 57.28 | 74 | -16.72 | peak |
| 4924 | 46.03 | -3.43 | 41.61 | 54 | -12.39 | AVG |
| 7386 | 55.72 | -0.75 | 51.97 | 74 | -22.03 | peak |
| 7386 | 40.89 | -0.75 | 39.86 | 54 | -14.14 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency (MHz) | Meter Reading (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 4924 | 61.34 | -3.43 | 58.15 | 74 | -15.85 | peak |
| 4924 | 45.68 | -3.43 | 43.66 | 54 | -10.34 | AVG |
| 7386 | 55.45 | -0.75 | 55.92 | 74 | -18.08 | peak |
| 7386 | 40.21 | -0.75 | 40.16 | 54 | -13.84 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Remark:
(1) Measuring frequencies from 1 GHz to the 25 GHz。
(2) “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes bandedge frequency.
(3) * denotes emission frequency which appearing within the Restricted Bands specified inprovision of 15.205, then the general radiated emission limits in 15.209 apply.
(4) Data of measurement within this frequency range shown “--- ” in the table above meansthe reading of emissions are attenuated more than 20dB below the permissible limits orthe field strength is too small to be measured.
(5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHzfor measuring above 1 GHz, below 30MHz was 10KHz.
(6) When the test results of Peak Detected below the limits of Average Detected, theAverage Detected is not need completed. For example: Top Channel at Fundamental73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11g Mode)/2412

Horizontal:

| Frequency (MHz) | Meter Reading (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 4824 | 62.69 | -3.64 | 58.43 | 74 | -15.57 | peak |
| 4824 | 46.85 | -3.64 | 41.58 | 54 | -12.42 | AVG |
| 7236 | 56.72 | -0.95 | 57.42 | 74 | -16.58 | peak |
| 7236 | 42.64 | -0.95 | 40.95 | 54 | -13.05 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency (MHz) | Meter Reading (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 4824 | 62.36 | -3.64 | 56.14 | 74 | -17.86 | peak |
| 4824 | 46.42 | -3.64 | 41.37 | 54 | -12.63 | AVG |
| 7236 | 56.57 | -0.95 | 57.93 | 74 | -16.07 | peak |
| 7236 | 42.19 | -0.95 | 40.15 | 54 | -13.85 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

MID CH6 (802.11g Mode)/2437

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4874 | 62.12 | -3.51 | 56.16 | 74 | -17.84 | peak |
| 4874 | 46.18 | -3.51 | 43.18 | 54 | -10.82 | AVG |
| 7311 | 56.32 | -0.82 | 57.81 | 74 | -16.19 | peak |
| 7311 | 41.75 | -0.82 | 42.13 | 54 | -11.87 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4874 | 61.73 | -3.51 | 59.43 | 74 | -14.57 | peak |
| 4874 | 45.86 | -3.51 | 41.87 | 54 | -12.13 | AVG |
| 7311 | 55.14 | -0.82 | 58.34 | 74 | -15.66 | peak |
| 7311 | 41.52 | -0.82 | 41.22 | 54 | -12.78 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

HIGH CH11 (802.11g Mode)/2462

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4924 | 61.53 | -3.43 | 59.79 | 74 | -14.21 | peak |
| 4924 | 45.79 | -3.43 | 39.66 | 54 | -14.34 | AVG |
| 7386 | 56.14 | -0.75 | 57.49 | 74 | -16.51 | peak |
| 7386 | 41.32 | -0.75 | 41.23 | 54 | -12.77 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4924 | 60.98 | -3.43 | 58.17 | 74 | -15.83 | peak |
| 4924 | 45.41 | -3.43 | 40.35 | 54 | -13.65 | AVG |
| 7386 | 55.64 | -0.75 | 59.49 | 74 | -14.51 | peak |
| 7386 | 40.58 | -0.75 | 41.34 | 54 | -12.66 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Remark:
(1) Measuring frequencies from 1 GHz to the 25 GHz。
(2) “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes bandedge frequency.
(3) * denotes emission frequency which appearing within the Restricted Bands specified inprovision of 15.205, then the general radiated emission limits in 15.209 apply.
(4) Data of measurement within this frequency range shown “--- ” in the table above meansthe reading of emissions are attenuated more than 20dB below the permissible limits orthe field strength is too small to be measured.
(5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHzfor measuring above 1 GHz, below 30MHz was 10KHz.
(6) When the test results of Peak Detected below the limits of Average Detected, theAverage Detected is not need completed. For example: Top Channel at Fundamental73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54dBuV/m(AV Limit), the Average Detected not need to completed.

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

| Frequency (MHz) | Meter Reading (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 4824 | 62.71 | -3.64 | 60.12 | 74 | -13.88 | peak |
| 4824 | 46.75 | -3.64 | 40.31 | 54 | -13.69 | AVG |
| 7236 | 56.69 | -0.95 | 59.87 | 74 | -14.13 | peak |
| 7236 | 42.52 | -0.95 | 41.08 | 54 | -12.92 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency (MHz) | Meter Reading (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 4824 | 62.34 | -3.64 | 56.31 | 74 | -17.69 | peak |
| 4824 | 46.28 | -3.64 | 39.72 | 54 | -14.28 | AVG |
| 7236 | 56.45 | -0.95 | 56.94 | 74 | -17.06 | peak |
| 7236 | 42.19 | -0.95 | 41.56 | 54 | -12.44 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

| Frequency (MHz) | Meter Reading (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 4874.00 | 62.02 | -3.51 | 61.25 | 74.00 | -12.75 | peak |
| 4874.00 | 46.18 | -3.51 | 43.57 | 54.00 | -10.43 | AVG |
| 7311.00 | 56.24 | -0.82 | 60.81 | 74.00 | -13.19 | peak |
| 7311.00 | 41.85 | -0.82 | 42.10 | 54.00 | -11.90 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency (MHz) | Meter Reading (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 4874.00 | 61.83 | -3.51 | 59.19 | 74.00 | -14.81 | peak |
| 4874.00 | 45.76 | -3.51 | 39.87 | 54.00 | -14.13 | AVG |
| 7311.00 | 55.69 | -0.82 | 56.94 | 74.00 | -17.06 | peak |
| 7311.00 | 41.42 | -0.82 | 37.66 | 54.00 | -16.34 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4924 | 61.55 | -3.43 | 58.46 | 74 | -15.54 | peak |
| 4924 | 45.42 | -3.43 | 36.75 | 54 | -17.25 | AVG |
| 7386 | 55.47 | -0.75 | 56.85 | 74 | -17.15 | peak |
| 7386 | 41.08 | -0.75 | 39.58 | 54 | -14.42 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4924 | 61.21 | -3.43 | 60.66 | 74 | -13.34 | peak |
| 4924 | 45.09 | -3.43 | 42.46 | 54 | -11.54 | AVG |
| 7386 | 55.32 | -0.75 | 56.55 | 74 | -17.45 | peak |
| 7386 | 40.78 | -0.75 | 41.97 | 54 | -12.03 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4844 | 62.84 | -3.63 | 60.41 | 74 | -13.59 | peak |
| 4844 | 46.73 | -3.63 | 41.98 | 54 | -12.02 | AVG |
| 7266 | 57.18 | -0.94 | 58.54 | 74 | -15.46 | peak |
| 7266 | 42.86 | -0.94 | 40.35 | 54 | -13.65 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4844 | 62.46 | -3.63 | 59.71 | 74 | -14.29 | peak |
| 4844 | 46.27 | -3.63 | 40.39 | 54 | -13.61 | AVG |
| 7266 | 56.85 | -0.94 | 56.84 | 74 | -17.16 | peak |
| 7266 | 42.61 | -0.94 | 42.37 | 54 | -11.63 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4874 | 61.99 | -3.51 | 56.49 | 74 | -17.51 | peak |
| 4874 | 46.03 | -3.51 | 38.42 | 54 | -15.58 | AVG |
| 7311 | 56.57 | -0.82 | 52.94 | 74 | -21.06 | peak |
| 7311 | 42.25 | -0.82 | 37.84 | 54 | -16.16 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 4874 | 61.46 | -3.51 | 55.84 | 74 | -18.16 | peak |
| 4874 | 45.82 | -3.51 | 38.05 | 54 | -15.95 | AVG |
| 7311 | 56.31 | -0.82 | 58.64 | 74 | -15.36 | peak |
| 7311 | 41.87 | -0.82 | 40.52 | 54 | -13.48 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

| Frequency (MHz) | Meter Reading (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 4904 | 60.83 | -3.43 | 56.15 | 74 | -17.85 | peak |
| 4904 | 45.46 | -3.43 | 38.72 | 54 | -15.28 | AVG |
| 7356 | 55.51 | -0.75 | 57.81 | 74 | -16.19 | peak |
| 7356 | 41.04 | -0.75 | 41.64 | 54 | -12.36 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency (MHz) | Meter Reading (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 4904 | 60.47 | -3.43 | 59.64 | 74 | -14.36 | peak |
| 4904 | 45.03 | -3.43 | 40.67 | 54 | -13.33 | AVG |
| 7356 | 55.16 | -0.75 | 57.91 | 74 | -16.09 | peak |
| 7356 | 40.75 | -0.75 | 39.87 | 54 | -14.13 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Remark:
(1) Measuring frequencies from 1 GHz to the 25 GHz。
(2) “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes bandedge frequency.
(3) * denotes emission frequency which appearing within the Restricted Bands specified inprovision of 15.205, then the general radiated emission limits in 15.209 apply.
(4) Data of measurement within this frequency range shown “--- ” in the table above meansthe reading of emissions are attenuated more than 20dB below the permissible limits orthe field strength is too small to be measured.
(5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHzfor measuring above 1 GHz, below 30MHz was 10KHz.
(6) When the test results of Peak Detected below the limits of Average Detected, theAverage Detected is not need completed. For example: Top Channel at Fundamental73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54dBuV/m(AV Limit), the Average Detected not need to completed.

**Test Result of Radiated Spurious at Band edges**

Operation Mode:
802.11b Mode TX CH Low (2412MHz)

Horizontal

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 2310.00 | 55.31 | -5.81 | 49.5 | 74 | -24.5 | peak |
| 2310.00 | / | -5.81 | / | 54 | / | AVG |
| 2390.00 | 61.57 | -5.84 | 55.73 | 74 | -18.27 | peak |
| 2390.00 | 48.32 | -5.84 | 42.48 | 54 | -11.52 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 2310 | 53.72 | -5.81 | 47.91 | 74 | -26.09 | peak |
| 2310 | / | -5.81 | / | 54 | / | AVG |
| 2390 | 55.87 | -5.84 | 50.03 | 74 | -23.97 | peak |
| 2390 | / | -5.84 | / | 54 | / | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Operation Mode: TX CH High (2462MHz)

Horizontal

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 2483.50 | 54.18 | -5.65 | 48.53 | 74 | -25.47 | peak |
| 2483.50 | / | -5.65 | / | 54 | / | AVG |
| 2500.00 | 53.64 | -5.65 | 47.99 | 74 | -26.01 | peak |
| 2500.00 | / | -5.65 | / | 54 | / | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 2483.50 | 53.29 | -5.65 | 47.64 | 74 | -26.36 | peak |
| 2483.50 | / | -5.65 | / | 54 | / | AVG |
| 2500.00 | 53.16 | -5.65 | 47.51 | 74 | -26.49 | peak |
| 2500.00 | / | -5.65 | / | 54 | / | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |
| Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit. | | | | | | |

Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 2310 | 57.65 | -5.81 | 51.84 | 74 | -22.16 | peak |
| 2310 | / | -5.81 | / | 54 | / | AVG |
| 2390 | 56.71 | -5.84 | 50.87 | 74 | -23.13 | peak |
| 2390 | / | -5.84 | / | 54 | / | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 2310 | 53.28 | -5.81 | 47.47 | 74 | -26.53 | peak |
| 2310 | / | -5.81 | / | 54 | / | AVG |
| 2390 | 57.54 | -5.84 | 51.7 | 74 | -22.3 | peak |
| 2390 | / | -5.84 | / | 54 | / | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Operation Mode: TX CH High (2462MHz)

Horizontal

| Frequency (MHz) | Reading Result (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 2483.50 | 54.18 | -5.65 | 48.53 | 74 | -25.47 | peak |
| 2483.50 | / | -5.65 | / | 54 | / | AVG |
| 2500.00 | 53.29 | -5.65 | 47.64 | 74 | -26.36 | peak |
| 2500.00 | / | -5.65 | / | 54 | / | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency (MHz) | Reading Result (dBμV) | Factor (dB) | Emission Level (dBμV/m) | Limits (dBμV/m) | Margin (dB) | Detector Type |
|---|---|---|---|---|---|---|
| 2483.50 | 56.49 | -5.65 | 50.84 | 74 | -23.16 | peak |
| 2483.50 | / | -5.65 | / | 54 | / | AVG |
| 2500.00 | 55.32 | -5.65 | 49.67 | 74 | -24.33 | peak |
| 2500.00 | / | -5.65 | / | 54 | / | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |
| Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit. | | | | | | |

Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 2310 | 54.86 | -5.81 | 49.05 | 74 | -24.95 | peak |
| 2310 | / | -5.81 | / | 54 | / | AVG |
| 2390 | 63.75 | -5.84 | 57.91 | 74 | -16.09 | peak |
| 2390 | 42.71 | -5.84 | 36.87 | 54 | -17.13 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 2310 | 53.15 | -5.81 | 47.34 | 74 | -26.66 | peak |
| 2310 | / | -5.81 | / | 54 | / | AVG |
| 2390 | 64.73 | -5.84 | 58.89 | 74 | -15.11 | peak |
| 2390 | 45.91 | -5.84 | 40.07 | 54 | -13.93 | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Operation Mode: TX CH High (2462MHz)

Horizontal

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 2483.50 | 53.12 | -5.65 | 47.47 | 74 | -26.53 | peak |
| 2483.50 | / | -5.65 | / | 54 | / | AVG |
| 2500.00 | 52.28 | -5.65 | 46.63 | 74 | -27.37 | peak |
| 2500.00 | / | -5.65 | / | 54 | / | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 2483.50 | 56.87 | -5.65 | 51.22 | 74 | -22.78 | peak |
| 2483.50 | / | -5.65 | / | 54 | / | AVG |
| 2500.00 | 55.43 | -5.65 | 49.78 | 74 | -24.22 | peak |
| 2500.00 | / | -5.65 | / | 54 | / | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |
| Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit. | | | | | | |

Operation Mode: 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 2310 | 52.87 | -5.81 | 47.06 | 74 | -26.94 | peak |
| 2310 | / | -5.81 | / | 54 | / | AVG |
| 2390 | 55.39 | -5.84 | 49.55 | 74 | -24.45 | peak |
| 2390 | / | -5.84 | / | 54 | / | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 2310 | 56.81 | -5.81 | 51 | 74 | -23 | peak |
| 2310 | / | -5.81 | / | 54 | / | AVG |
| 2390 | 53.28 | -5.84 | 47.44 | 74 | -26.56 | peak |
| 2390 | / | -5.84 | / | 54 | / | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Operation Mode: TX CH High (2452MHz)

Horizontal

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 2483.50 | 56.18 | -5.65 | 50.53 | 74 | -23.47 | peak |
| 2483.50 | / | -5.65 | / | 54 | / | AVG |
| 2500.00 | 55.34 | -5.65 | 49.69 | 74 | -24.31 | peak |
| 2500.00 | / | -5.65 | / | 54 | / | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |

Vertical:

| Frequency | Reading Result | Factor | Emission Level | Limits | Margin | Detector Type |
|---|---|---|---|---|---|---|
| (MHz) | (dBμV) | (dB) | (dBμV/m) | (dBμV/m) | (dB) | |
| 2483.50 | 54.32 | -5.65 | 48.67 | 74 | -25.33 | peak |
| 2483.50 | / | -5.65 | / | 54 | / | AVG |
| 2500.00 | 53.84 | -5.65 | 48.19 | 74 | -25.81 | peak |
| 2500.00 | / | -5.65 | / | 54 | / | AVG |
| Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. | | | | | | |
| Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit. | | | | | | |

## 4.7. ANTENNA REQUIREMENT

**Standard Applicable**
For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed toensure that no antenna other than that furnished by the responsible party shall be used with the device.And according to FCC 47 CFR Section 15.249, if transmitting antennas of directional gain greater than6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antennaexceeds 6dBi.

**Refer to statement below for compliance.**
The manufacturer may design the unit so that the user can replace a broken antenna, but the use of astandard antenna jack or electrical connector is prohibited. Further, this requirement does not apply tointentional radiators that must be professionally installed.

**Antenna Connected Construction**
The antenna used in this product is a External Antenna, The directional gains of antenna used for transmitting is 2dBi.

WIFI ANTENNA

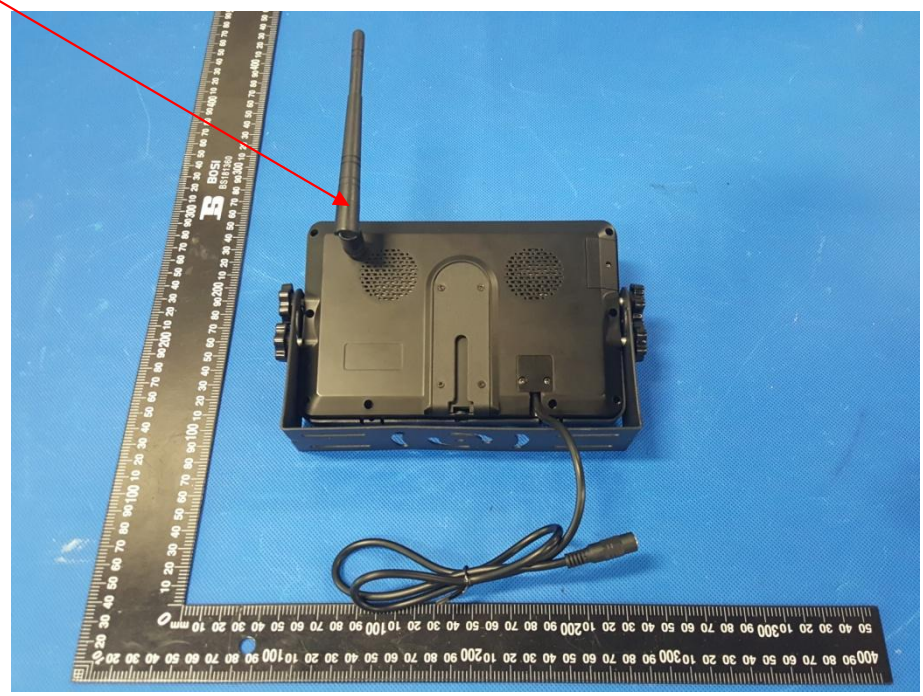

## 4.8. PHOTOGRAPH OF TEST
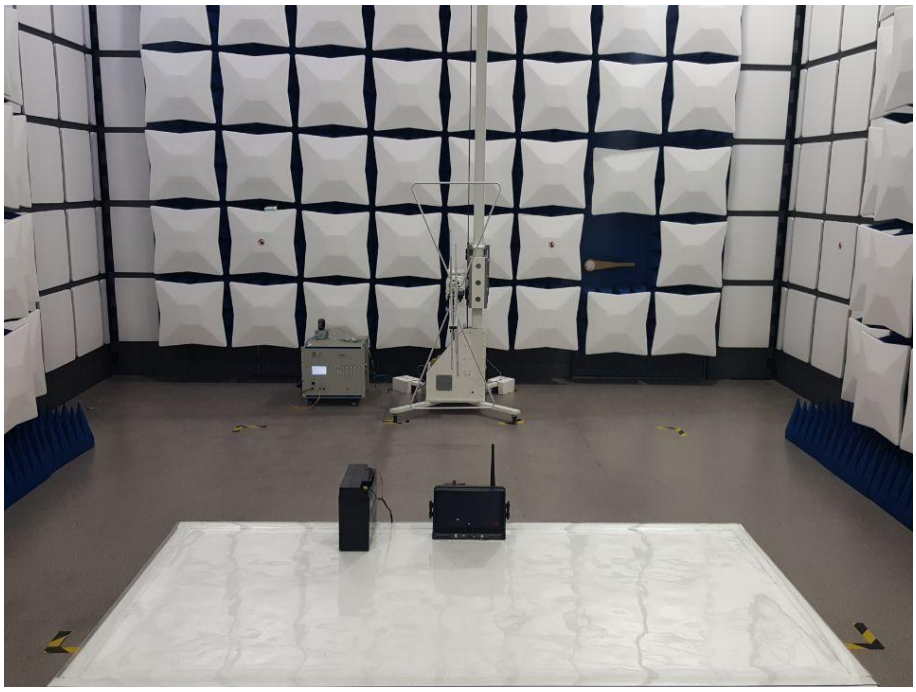
Radiated Emission