

DC POWER CEILING FAN REMOTE CONTROL MANUAL

LEARNING PROCESS

NOTE : The Hand Held Remote Control System is equipped with a learning frequency function which has code combinations to prevent potential interference from other remote units

Step: 1 Open the remote battery cover and install DC3V,CR2032 1pcs battery.

Step: 2 Within 30 seconds of turning the Receivers AC power ON.

Step: 3 Press and hold remote "LEARN" key for over 5 seconds, once the receiver has detected the frequency, the receiver will make sound, Bi Bi, twice. This will indicate the receiver has learned the frequency that was previously selected on the transmitter.

NOTE: After the AC power is on, do not press any other button on the transmitter before setting learning. Doing so will cause the procedure to fail. After completing the steps above, you should be able to operate the ceiling fan and light. If the fan is not responding to the transmitter, please turn the power off to the receiver. And repeat step 1 and 2.



NOTE: Remove the battery if not used for long periods of time to prevent damage to the hand held remote.

LIGHT FUNCTION SELECT SWITCH


If only turn on or off the light of ceiling fan, please slide the "OD" switch to "O" position. If turn on/off and dimmer the light of ceiling fan, please slide the "OD" to "D" position.

FUNCTIONS OF TRANSMITTER

1.  : To turn the fan on or off.
2.  : Press this button to increasing fan speed and LED indicator would be on the position of fan speed. (1~6 speed)
3.  : Press this button to decreasing fan speed and LED indicator would be on the position of fan speed.(1~6 speed)
4.  : To set the timer of fan to be in 1/3/6hrs.
1hr: Setting up that the ceiling fan will turn off after 1 hours automatically.
3hr: Setting up that the ceiling fan will turn off after 3 hours automatically.
6hr: Setting up that the ceiling fan will turn off after 6 hours automatically.
Press fan speed button to deactivate
5.  : Press the button for set fan speed change automatically. Press Fan Speed to deactivate.
6.  : Press this button to change the ceiling fan to be reverse or forward.
7.  : Press this button shortly to turn on/off or press and hold it to dimmer the light.
8. When pressing remote button, the LED indicator would be on. If you press remote button and LED indicator would not be on, you should change new DC3V,CR2032 1pcs battery.

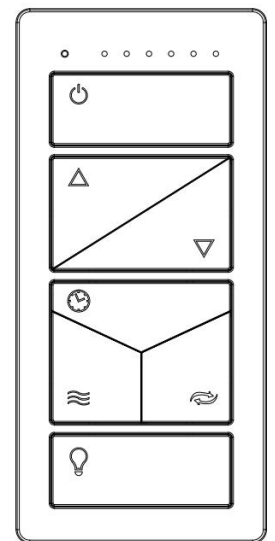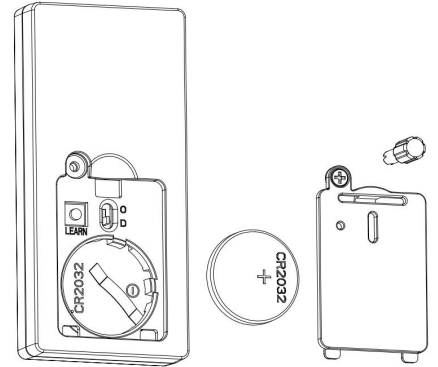

Loosing this screw
before replacing the
CE2032 battery

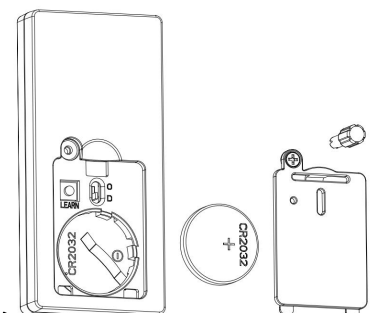

To assure continued FCC compliance:

FEDERAL COMMUNICATIONS COMMISSION INTERFERENCE STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

--Reorient or relocate the receiving antenna. --Increase the separation between the equipment and receiver.
--Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. --Consult the dealer or an experienced radio/TV technician for help.

To assure continued FCC compliance:

Model: TRD047S1M

FCC ID: 2AQZU-18068

FCC STATEMENT:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-Reorient or relocate the receiving antenna.
-Increase the separation between the equipment and receiver.
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance 5mm between the radiator & your body