

TEST REPORT

Product Name: MIIIW Music Cube True Wireless Noise-cancelling Earbuds
FCC ID: 2AR3N-MW23W11
Trademark: MIIIW
Model Number: MW23W11
Prepared For: Beijing Miiw Technology Co.,Ltd.
Address: Room 04C, 4/F, Tower A, No. A28, Xinx Road, Haidian District, Beijing
Manufacturer: Beijing Miiw Technology Co.,Ltd.
Address: Room 04C, 4/F, Tower A, No. A28, Xinx Road, Haidian District, Beijing
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: May. 12, 2023
Sample tested Date: May. 12, 2023 to May. 16, 2023
Issue Date: May. 16, 2023
Report No.: CTB230516012RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is Bluetooth radio test report.

Compiled by:

Reviewed by:

Approved by:

ChenZheng

Arron Liu

Chen ZhengArron LiuBin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	4
2. TEST SUMMARY	5
3. MEASUREMENT UNCERTAINTY	6
4. PRODUCT INFORMATION AND TEST SETUP	7
4.1 Product Information	7
4.2 Test Setup Configuration	7
4.3 Support Equipment	7
4.4 Channel List	8
4.5 Test Mode	8
4.6 Test Environment	8
5. TEST FACILITY AND TEST INSTRUMENT USED	9
5.1 Test Facility	9
5.2 Test Instrument Used	9
6. AC POWER LINE CONDUCTED EMISSION	11
6.1 Block Diagram Of Test Setup	11
6.2 Limit	11
6.3 Test procedure	11
6.4 Test Result	13
7. RADIATED SPURIOUS EMISSION	15
7.1 Block Diagram Of Test Setup	15
7.2 Limit	15
7.3 Test procedure	16
7.4 Test Result	17
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	26
8.1 Block Diagram Of Test Setup	26
8.2 Limit	26
8.3 Test procedure	26
8.4 Test Result	27
9. CONDUCTED PEAK OUTPUT POWER	34
9.1 Block Diagram Of Test Setup	34
9.2 Limit	34
9.3 Test procedure	34
9.4 Test Result	35
10. 20DB OCCUPIED BANDWIDTH	39
10.1 Block Diagram Of Test Setup	39
10.2 Limit	39
10.3 Test procedure	39
10.4 Test Result	39
11. CARRIER FREQUENCIES SEPARATION	43
11.1 Block Diagram Of Test Setup	43
11.2 Limit	43
11.3 Test procedure	43
11.4 Test Result	43
12. HOPPING CHANNEL NUMBER	47
12.1 Block Diagram Of Test Setup	47
12.2 Limit	47
12.3 Test procedure	47
12.4 Test Result	47
13. DWELL TIME	49

13.1	Block Diagram Of Test Setup	49
13.2	Limit	49
13.3	Test procedure	49
13.4	Test Result	50
14.	PSEUDORANDOM FREQUENCY	54
14.1	Limit	54
14.2	Test procedure	54
14.3	Test Result	55
15.	ANTENNA REQUIREMENT	56
16.	EUT TEST SETUP PHOTOGRAPHS	57

(Note: N/A means not applicable)

**1. VERSION**

Report No.	Issue Date	Description	Approved
CTB230516012RFX	May. 16, 2023	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
20dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Carrier Frequencies Separation	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Hopping Channel Number	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
Dwell Time	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
Pseudorandom Frequency Hopping Sequence	47 CFR Part 15 Subpart C Section 15.247(a)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1093	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	54.3kHz
Conducted output power Above 1G	0.9dB
Conducted output power below 1G	0.9dB
Power Spectral Density , Conduction	0.9dB
Conduction spurious emissions	2.0dB
Out of band emission	2.0dB
3m camber Radiated spurious emission(9KHz-30MHz)	4.8dB
3m camber Radiated spurious emission(30MHz-1GHz)	4.6dB
3m chamber Radiated spurious emission(1GHz-18GHz)	5.1dB
3m chamber Radiated spurious emission(18GHz-40GHz)	3.4dB
humidity uncertainty	5.5%
Temperature uncertainty	0.63°C
frequency	1×10 ⁻⁷
Conducted Emission (150KHz-30MHz)	3.2 dB
Radiated Emission(30MHz ~ 1000MHz)	4.8 dB
Radiated Emission(1GHz ~6GHz)	4.9 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	MW23W11
Model Description:	N/A
Bluetooth Version:	Bluetooth 5.2
Hardware Version:	V1.1
Software Version:	V1.0
Operation Frequency:	Bluetooth: 2402-2480MHz
Max. RF output power:	Bluetooth: 4.879dBm
Type of Modulation:	Bluetooth: GFSK, $\pi/4$ DQPSK, 8DPSK
Antenna installation:	Bluetooth: Ceramic antenna
Antenna Gain:	Bluetooth: 1.75dBi
Ratings:	Charging Case: INPUT: 5V=300mA OUTPUT: 5V=100mA DC 380mAh/ 3.7V/ 1.406Wh by battery Earphone: DC 5V by Charging Case DC 3.7V by battery

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment.

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	Adapter	JIYIN	JY-05100C	/	/

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	79	/

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Test mode	Low channel	Middle channel	High channel
Transmitting (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz
Receiving (GFSK, $\pi/4$ DQPSK, 8DPSK)	2402MHz	2441MHz	2480MHz

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	3.7V
Normal Temperature($^{\circ}$ C)	23
Low Temperature($^{\circ}$ C)	0
High Temperature($^{\circ}$ C)	40

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2023.07.19
2	Power Sensor	Agilent	U2021XA	MY56120032	2023.07.19
3	Power Sensor	Agilent	U2021XA	MY56120034	2023.07.19
4	Communication test set	R&S	CMW500	108058	2023.07.19
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2023.07.19
6	Signal Generator	Agilent	N5181A	MY50140365	2023.07.19
7	Vector signal generator	Agilent	N5182A	MY47420195	2023.07.19
8	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2023.07.19
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2023.07.19
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2023.07.19
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2023.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2023.07.19
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2023.07.19
18	Amplifier	HP	8447E	2945A02747	2023.07.19
19	Amplifier	Agilent	8449B	3008A01838	2023.07.19
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22

21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2023.07.22
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2023.07.23
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.10.30

Continuous disturbance					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2023.07.19
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2023.07.19
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
4	Coaxial cable	ZDECL	Z302S-NJ-SMAJ-12M	18091905	2023.07.19
5	ISN	Schwarzbeck	NTFM8158	183	2023.07.19
6	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
7	Communication test set	R&S	CMW500	108058	2023.07.19
8	EZ-EMC	Frad	EMC-con3A1.1	/	/


Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2023.07.22
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22
3	Amplifier	Agilent	8449B	3008A01838	2023.07.19
4	Amplifier	HP	8447E	2945A02747	2023.07.19
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2023.07.19
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2023.07.19
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2023.07.19
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2023.07.19
10	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
11	Communication test set	R&S	CMW500	108058	2023.07.19
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement.
- 6) All modes were tested at AC 120V and 240V, only the worst result of AC 120V 60Hz was reported.
- 7) If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.

6.4 Test Result

L: Worst case-GFSK(low channel)

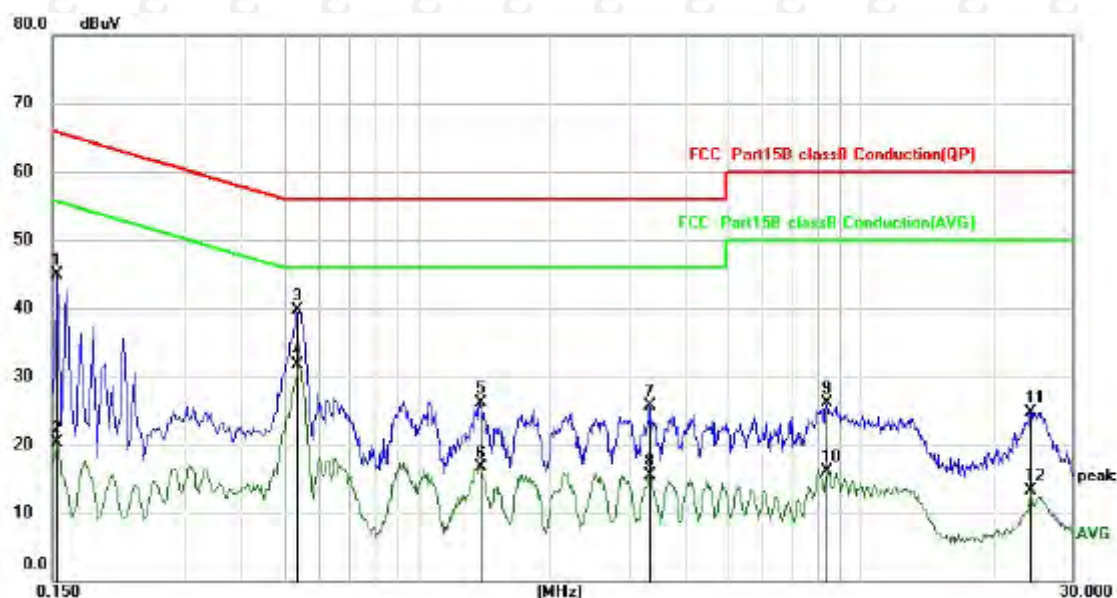


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1539	34.86	10.01	44.87	65.79	-20.92	QP
2		0.1539	10.33	10.01	20.34	55.79	-35.45	AVG
3		0.5340	29.82	9.97	39.79	56.00	-16.21	QP
4	*	0.5340	21.80	9.97	31.77	46.00	-14.23	AVG
5		1.3820	16.09	10.00	26.09	56.00	-29.91	QP
6		1.3820	6.61	10.00	16.61	46.00	-29.39	AVG
7		3.3340	15.64	10.09	25.73	56.00	-30.27	QP
8		3.3340	5.40	10.09	15.49	46.00	-30.51	AVG
9		8.3659	15.75	10.29	26.04	60.00	-33.96	QP
10		8.3659	5.88	10.29	16.17	50.00	-33.83	AVG
11		24.1020	14.16	10.60	24.76	60.00	-35.24	QP
12		24.1020	2.74	10.60	13.34	50.00	-36.66	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

N: Worst case-GFSK(low channel)

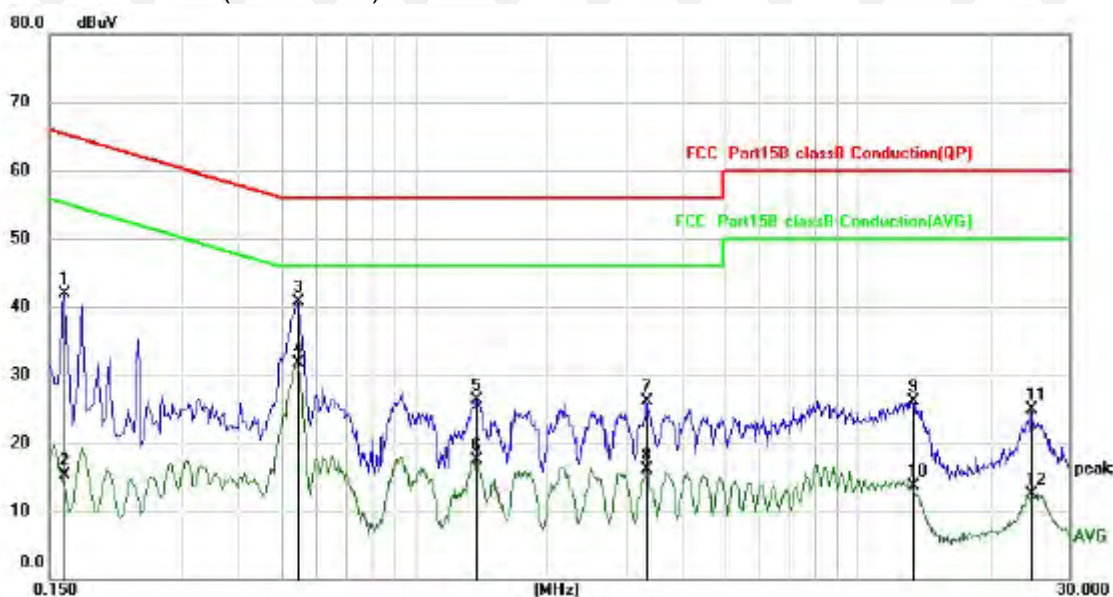

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1620	31.99	10.01	42.00	65.36	-23.36	QP
2		0.1620	5.34	10.01	15.35	55.36	-40.01	AVG
3		0.5460	30.78	9.97	40.75	56.00	-15.25	QP
4	*	0.5460	21.67	9.97	31.64	46.00	-14.36	AVG
5		1.3779	16.28	10.00	26.28	56.00	-29.72	QP
6		1.3779	7.50	10.00	17.50	46.00	-28.50	AVG
7		3.3380	15.97	10.09	26.06	56.00	-29.94	QP
8		3.3380	5.98	10.09	16.07	46.00	-29.93	AVG
9		13.3060	15.73	10.42	26.15	60.00	-33.85	QP
10		13.3060	3.37	10.42	13.79	50.00	-36.21	AVG
11		24.5620	14.31	10.61	24.92	60.00	-35.08	QP
12		24.5620	1.84	10.61	12.45	50.00	-37.55	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

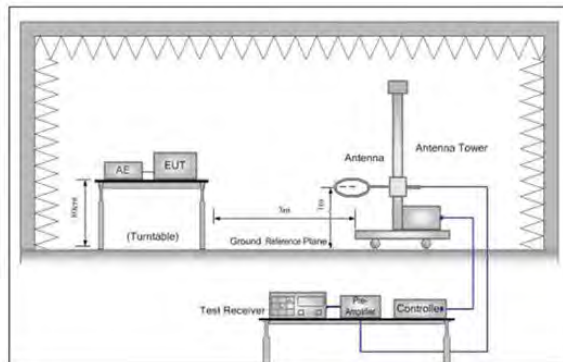


Figure 1. Below 30MHz

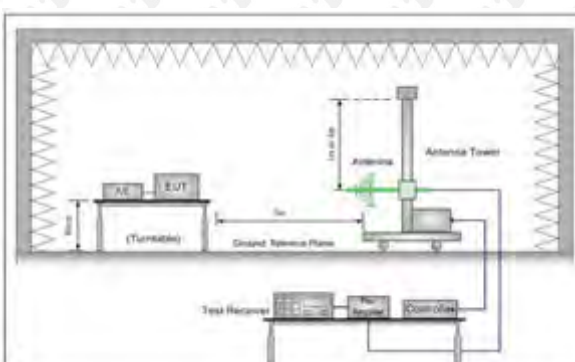


Figure 2. 30MHz to 1GHz

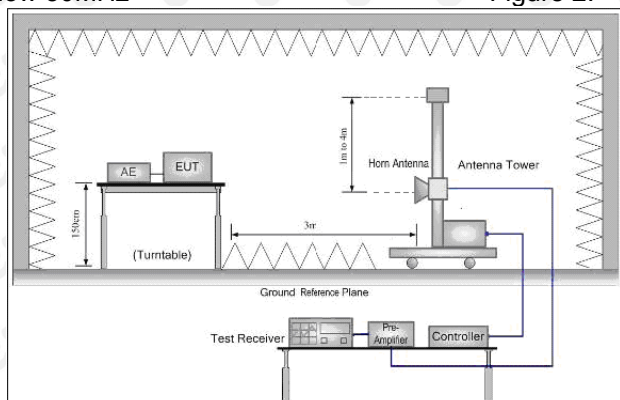


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- i.Repeat above procedures until all frequencies measured was complete.
- j. Full battery is used during test

Receiver set:


Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

7.4 Test Result

Below 1GHz Test Results:

Antenna polarity: H


Worst case-GFSK(low channel)

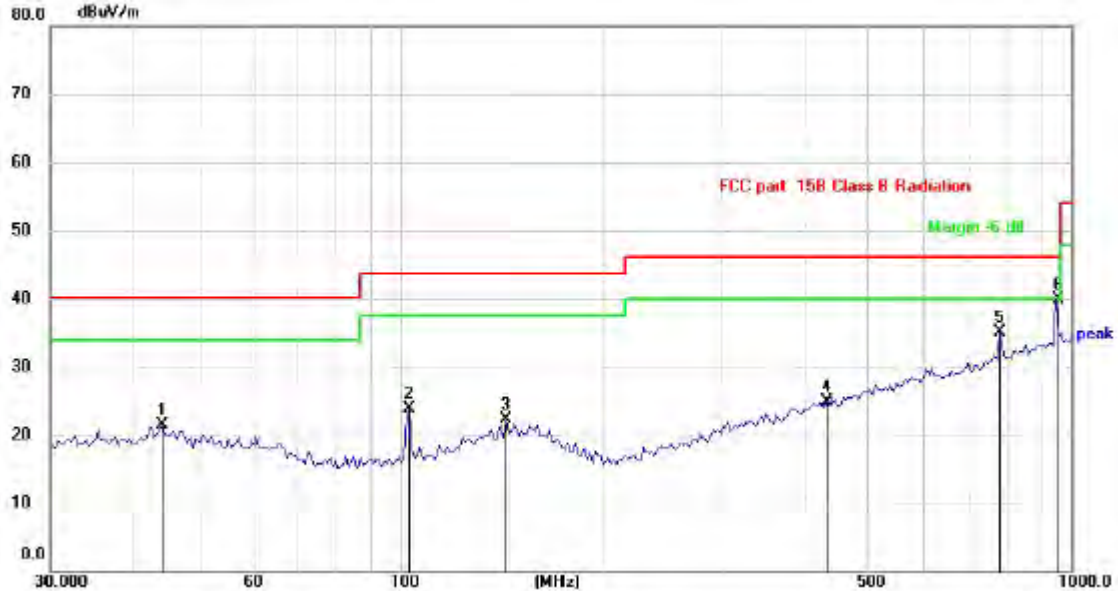

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV/m	dB/m	dB	
1		44.1202	28.01	-6.53	21.48	40.00	-18.52	QP
2		103.2609	33.19	-9.38	23.81	43.50	-19.69	QP
3		144.0819	27.88	-5.49	22.39	43.50	-21.11	QP
4		431.0316	26.81	-1.81	25.00	46.00	-21.00	QP
5		782.3453	29.65	5.44	35.09	46.00	-10.91	QP
6	*	948.7610	32.21	7.63	39.84	46.00	-6.16	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Antenna polarity: V
Worst case-GFSK(low channel)

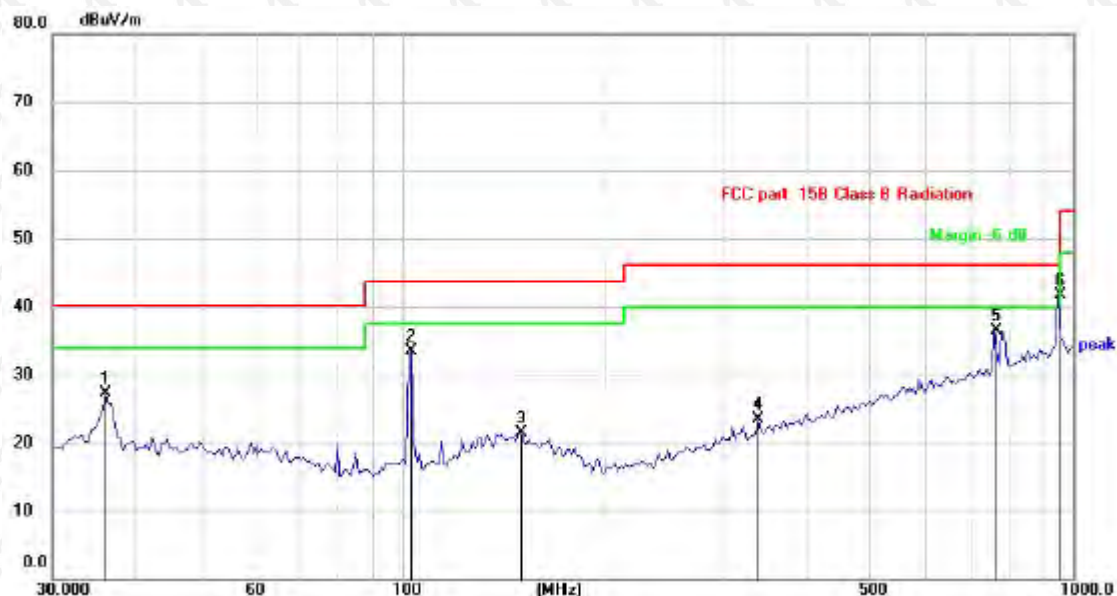

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		36.0638	33.89	-6.59	27.30	40.00	-12.70	QP
2		103.2609	42.89	-9.38	33.51	43.50	-9.99	QP
3		149.2239	26.97	-5.46	21.51	43.50	-21.99	QP
4		340.1847	27.86	-4.33	23.53	46.00	-22.47	QP
5		762.0385	31.39	5.05	36.44	46.00	-9.56	QP
6	*	948.7610	34.00	7.63	41.63	46.00	-4.37	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Measurement- Limit

Above 1 GHz Test Results:

CH Low (2402MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	56.86	-3.65	53.21	74.00	-20.79	peak
4804	48.67	-3.65	45.02	54.00	-8.98	AVG
7206	60.72	-0.95	59.77	74.00	-14.23	peak
7206	41.19	-0.95	40.24	54.00	-13.76	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4804	57.59	-3.65	53.94	74.00	-20.06	peak
4804	49.03	-3.65	45.38	54.00	-8.62	AVG
7206	60.10	-0.95	59.15	74.00	-14.85	peak
7206	41.32	-0.95	40.37	54.00	-13.63	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH Middle (2441MHz)

Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	58.06	-3.54	54.52	74.00	-19.48	peak
4882.00	49.20	-3.54	45.66	54.00	-8.34	AVG
7323.00	57.37	-0.81	56.56	74.00	-17.44	peak
7323.00	42.09	-0.81	41.28	54.00	-12.72	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4882.00	57.61	-3.54	54.07	74.00	-19.93	peak
4882.00	50.47	-3.54	46.93	54.00	-7.07	AVG
7323.00	59.03	-0.81	58.22	74.00	-15.78	peak
7323.00	42.79	-0.81	41.98	54.00	-12.02	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

CH High (2480MHz)
Horizontal:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	56.50	-3.43	53.07	74.00	-20.93	peak
4960	48.99	-3.44	45.55	54.00	-8.45	AVG
7440	60.94	-0.77	60.17	74.00	-13.83	peak
7440	41.48	-0.77	40.71	54.00	-13.29	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Reading Result	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4960	58.08	-3.43	54.65	74.00	-19.35	peak
4960	47.25	-3.44	43.81	54.00	-10.19	AVG
7440	60.06	-0.77	59.29	74.00	-14.71	peak
7440	39.85	-0.77	39.08	54.00	-14.92	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

Restricted bands around fundamental frequency (Radiated)

hopping

Operation Mode: TX CH Low (2402MHz)

Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	57.40	-5.81	51.59	74.00	-22.41	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.59	-5.84	49.75	74.00	-24.25	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	57.17	-5.81	51.36	74.00	-22.64	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	56.20	-5.84	50.36	74.00	-23.64	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	54.53	-5.81	48.72	74.00	-25.28	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	53.28	-6.06	47.22	74.00	-26.78	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	56.83	-5.81	51.02	74.00	-22.98	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.31	-6.06	48.25	74.00	-25.75	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

NO hopping

Operation Mode: TX CH Low (2402MHz)
Horizontal (Worst case-GFSK)

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.56	-5.81	50.75	74.00	-23.25	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.09	-5.84	49.25	74.00	-24.75	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2310.00	56.09	-5.81	50.28	74.00	-23.72	peak
2310.00	/	-5.81	/	54.00	/	AVG
2390.00	55.15	-5.84	49.31	74.00	-24.69	peak
2390.00	/	-5.84	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: TX CH High (2480MHz)
Horizontal (Worst case-GFSK)

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	56.33	-5.81	50.52	74.00	-23.48	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	55.58	-6.06	49.52	74.00	-24.48	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						


Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.50	55.81	-5.81	50.00	74.00	-24.00	peak
2483.50	/	-5.81	/	54.00	/	AVG
2500.00	54.78	-6.06	48.72	74.00	-25.28	peak
2500.00	/	-6.06	/	54.00	/	AVG
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits						
Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.						

When the peak value is smaller than the AVG limit, AVG is not reflected.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

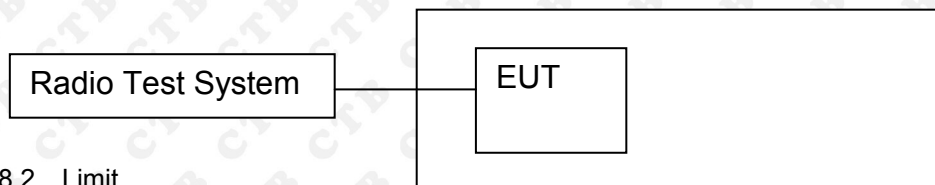

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

Above 30MHz:

RBW = 100KHz, VBW = 300KHz, Sweep = auto

Detector function = peak, Trace = max hold


8.4 Test Result




GFSK/HCH/
Hop








$\pi/4$ DQPSK/LCH/
No Hop

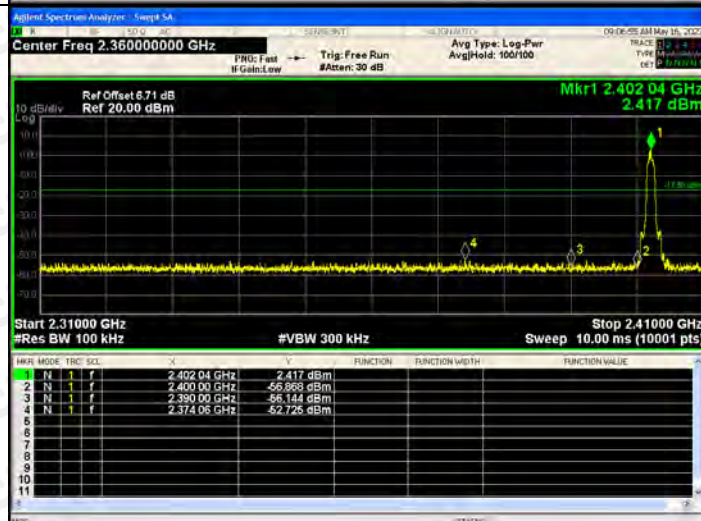

$\pi/4$ DQPSK/LCH/
Hop

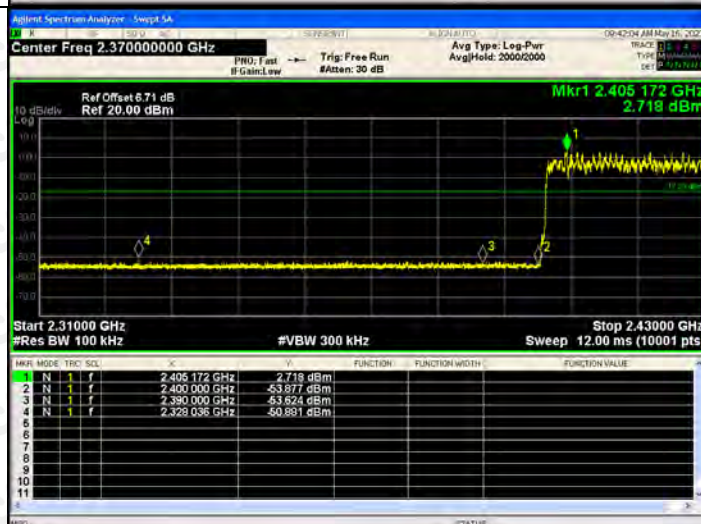


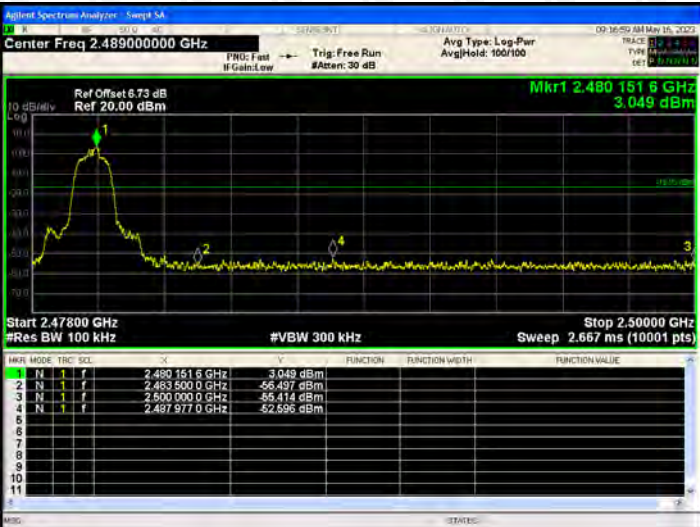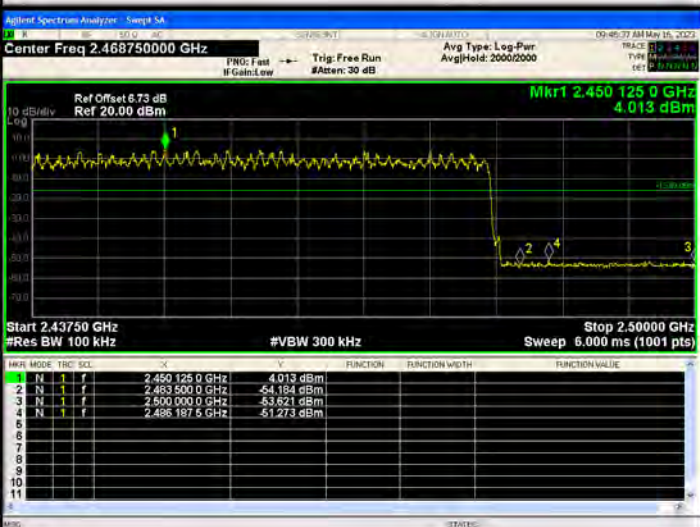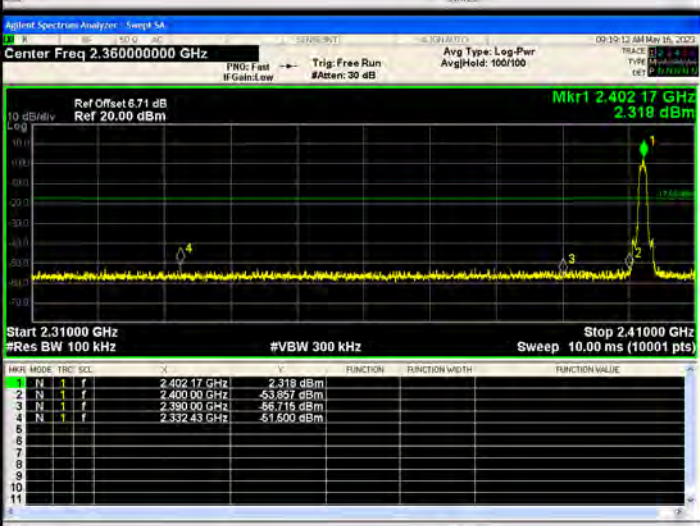$\pi/4$ DQPSK/HCH/ No Hop	 <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4801516 GHz</td><td>3.049 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4835000 GHz</td><td>-56.497 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.5000000 GHz</td><td>-55.114 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.4879770 GHz</td><td>-52.595 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4801516 GHz	3.049 dBm				2	N	1	f	2.4835000 GHz	-56.497 dBm				3	N	1	f	2.5000000 GHz	-55.114 dBm				4	N	1	f	2.4879770 GHz	-52.595 dBm			
MNR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.4801516 GHz	3.049 dBm																																									
2	N	1	f	2.4835000 GHz	-56.497 dBm																																									
3	N	1	f	2.5000000 GHz	-55.114 dBm																																									
4	N	1	f	2.4879770 GHz	-52.595 dBm																																									
$\pi/4$ DQPSK/HCH/ Hop	 <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.4501250 GHz</td><td>4.013 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.4835000 GHz</td><td>-54.184 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.5000000 GHz</td><td>-53.621 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.4981875 GHz</td><td>-51.273 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.4501250 GHz	4.013 dBm				2	N	1	f	2.4835000 GHz	-54.184 dBm				3	N	1	f	2.5000000 GHz	-53.621 dBm				4	N	1	f	2.4981875 GHz	-51.273 dBm			
MNR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.4501250 GHz	4.013 dBm																																									
2	N	1	f	2.4835000 GHz	-54.184 dBm																																									
3	N	1	f	2.5000000 GHz	-53.621 dBm																																									
4	N	1	f	2.4981875 GHz	-51.273 dBm																																									
8DPSK/LCH/No Hop	 <table><thead><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SQL</th><th>F</th><th>V</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr></thead><tbody><tr><td>1</td><td>N</td><td>1</td><td>f</td><td>2.40217 GHz</td><td>2.318 dBm</td><td></td><td></td><td></td></tr><tr><td>2</td><td>N</td><td>1</td><td>f</td><td>2.40000 GHz</td><td>-53.857 dBm</td><td></td><td></td><td></td></tr><tr><td>3</td><td>N</td><td>1</td><td>f</td><td>2.39000 GHz</td><td>-56.715 dBm</td><td></td><td></td><td></td></tr><tr><td>4</td><td>N</td><td>1</td><td>f</td><td>2.33243 GHz</td><td>-51.600 dBm</td><td></td><td></td><td></td></tr></tbody></table>	MNR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.40217 GHz	2.318 dBm				2	N	1	f	2.40000 GHz	-53.857 dBm				3	N	1	f	2.39000 GHz	-56.715 dBm				4	N	1	f	2.33243 GHz	-51.600 dBm			
MNR	MODE	TRC	SQL	F	V	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																						
1	N	1	f	2.40217 GHz	2.318 dBm																																									
2	N	1	f	2.40000 GHz	-53.857 dBm																																									
3	N	1	f	2.39000 GHz	-56.715 dBm																																									
4	N	1	f	2.33243 GHz	-51.600 dBm																																									

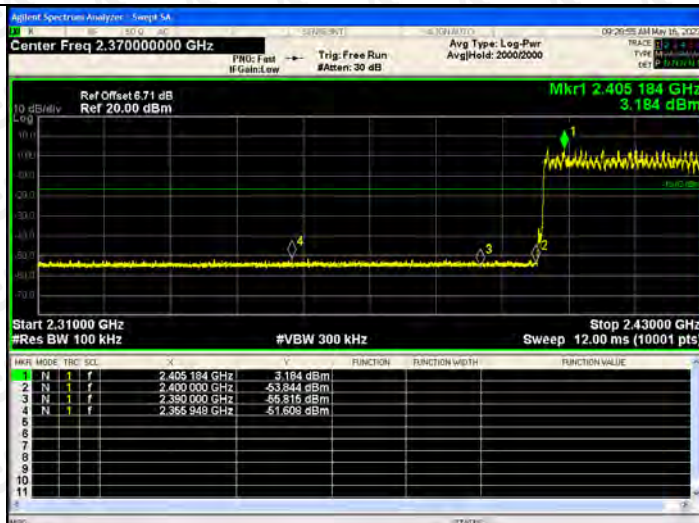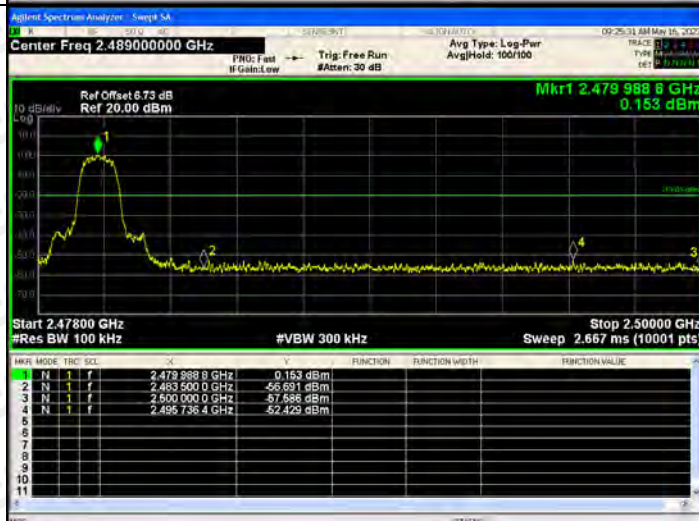
8DPSK
/LCH/Hop

8DPSK /HCH/No
Hop

8DPSK
/HCH/Hop

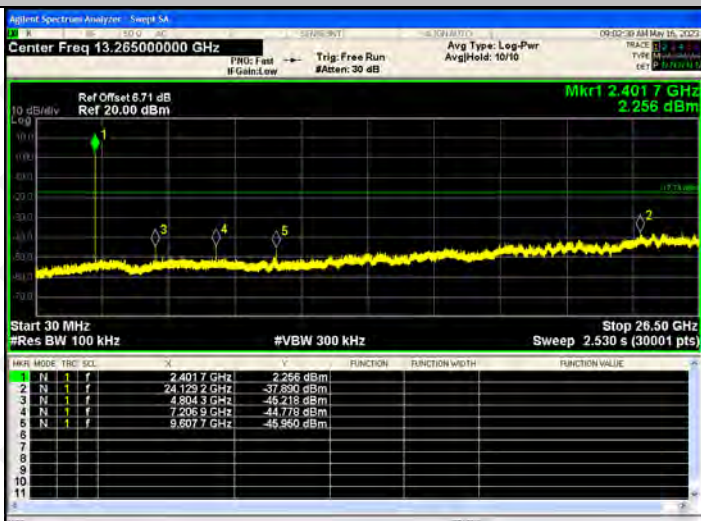
RF Conducted Spurious Emissions Graphs


GFSK/LCH



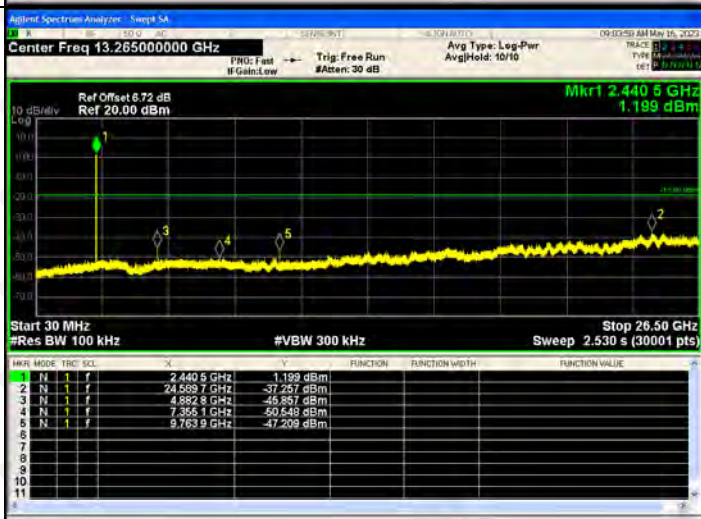


GFSK/MCH




GFSK/HCH

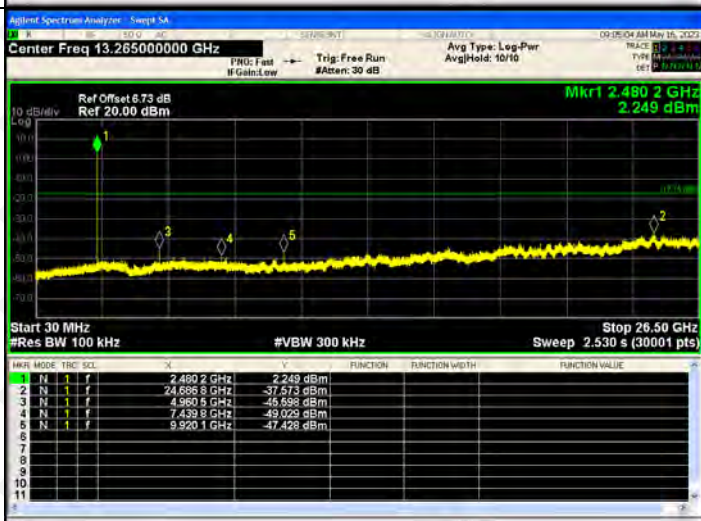


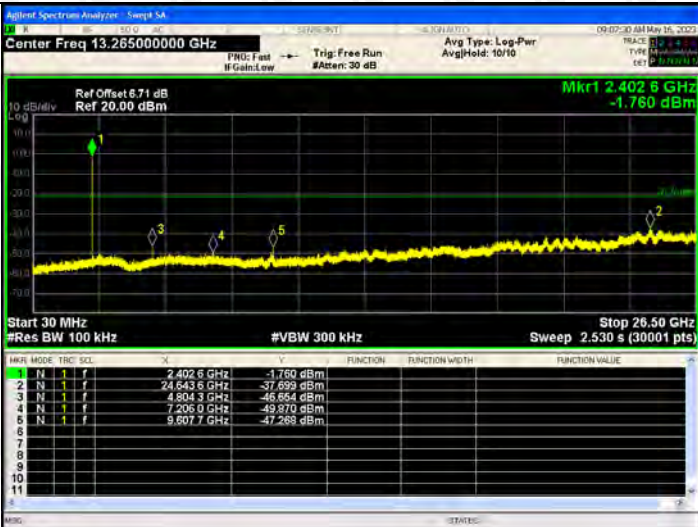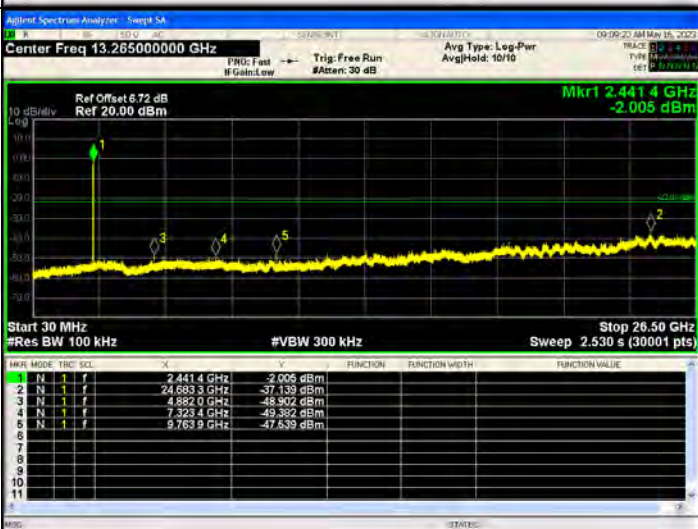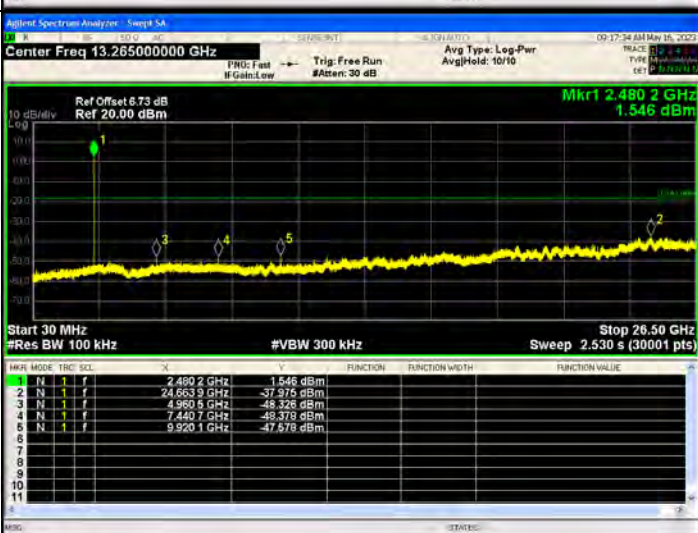$\pi/4$ DQPSK /LCH	 <table><tr><th>MARK</th><th>MODE</th><th>FREQ</th><th>POWER</th></tr><tr><td>1</td><td>N</td><td>2.4026 GHz</td><td>-1.760 dBm</td></tr><tr><td>2</td><td>N</td><td>24.6436 GHz</td><td>-37.699 dBm</td></tr><tr><td>3</td><td>N</td><td>4.8043 GHz</td><td>-46.864 dBm</td></tr><tr><td>4</td><td>N</td><td>7.2060 GHz</td><td>-49.870 dBm</td></tr><tr><td>5</td><td>N</td><td>9.6077 GHz</td><td>-47.288 dBm</td></tr></table>	MARK	MODE	FREQ	POWER	1	N	2.4026 GHz	-1.760 dBm	2	N	24.6436 GHz	-37.699 dBm	3	N	4.8043 GHz	-46.864 dBm	4	N	7.2060 GHz	-49.870 dBm	5	N	9.6077 GHz	-47.288 dBm
MARK	MODE	FREQ	POWER																						
1	N	2.4026 GHz	-1.760 dBm																						
2	N	24.6436 GHz	-37.699 dBm																						
3	N	4.8043 GHz	-46.864 dBm																						
4	N	7.2060 GHz	-49.870 dBm																						
5	N	9.6077 GHz	-47.288 dBm																						
$\pi/4$ DQPSK/MCH	 <table><tr><th>MARK</th><th>MODE</th><th>FREQ</th><th>POWER</th></tr><tr><td>1</td><td>N</td><td>2.4414 GHz</td><td>-2.005 dBm</td></tr><tr><td>2</td><td>N</td><td>24.6833 GHz</td><td>-37.139 dBm</td></tr><tr><td>3</td><td>N</td><td>4.8820 GHz</td><td>-48.902 dBm</td></tr><tr><td>4</td><td>N</td><td>7.3234 GHz</td><td>-49.302 dBm</td></tr><tr><td>5</td><td>N</td><td>9.7639 GHz</td><td>-47.539 dBm</td></tr></table>	MARK	MODE	FREQ	POWER	1	N	2.4414 GHz	-2.005 dBm	2	N	24.6833 GHz	-37.139 dBm	3	N	4.8820 GHz	-48.902 dBm	4	N	7.3234 GHz	-49.302 dBm	5	N	9.7639 GHz	-47.539 dBm
MARK	MODE	FREQ	POWER																						
1	N	2.4414 GHz	-2.005 dBm																						
2	N	24.6833 GHz	-37.139 dBm																						
3	N	4.8820 GHz	-48.902 dBm																						
4	N	7.3234 GHz	-49.302 dBm																						
5	N	9.7639 GHz	-47.539 dBm																						
$\pi/4$ DQPSK/HCH	 <table><tr><th>MARK</th><th>MODE</th><th>FREQ</th><th>POWER</th></tr><tr><td>1</td><td>N</td><td>2.4802 GHz</td><td>1.546 dBm</td></tr><tr><td>2</td><td>N</td><td>24.6639 GHz</td><td>-37.975 dBm</td></tr><tr><td>3</td><td>N</td><td>4.9605 GHz</td><td>-48.326 dBm</td></tr><tr><td>4</td><td>N</td><td>7.4407 GHz</td><td>-49.378 dBm</td></tr><tr><td>5</td><td>N</td><td>9.9201 GHz</td><td>-47.578 dBm</td></tr></table>	MARK	MODE	FREQ	POWER	1	N	2.4802 GHz	1.546 dBm	2	N	24.6639 GHz	-37.975 dBm	3	N	4.9605 GHz	-48.326 dBm	4	N	7.4407 GHz	-49.378 dBm	5	N	9.9201 GHz	-47.578 dBm
MARK	MODE	FREQ	POWER																						
1	N	2.4802 GHz	1.546 dBm																						
2	N	24.6639 GHz	-37.975 dBm																						
3	N	4.9605 GHz	-48.326 dBm																						
4	N	7.4407 GHz	-49.378 dBm																						
5	N	9.9201 GHz	-47.578 dBm																						


8DPSK /LCH

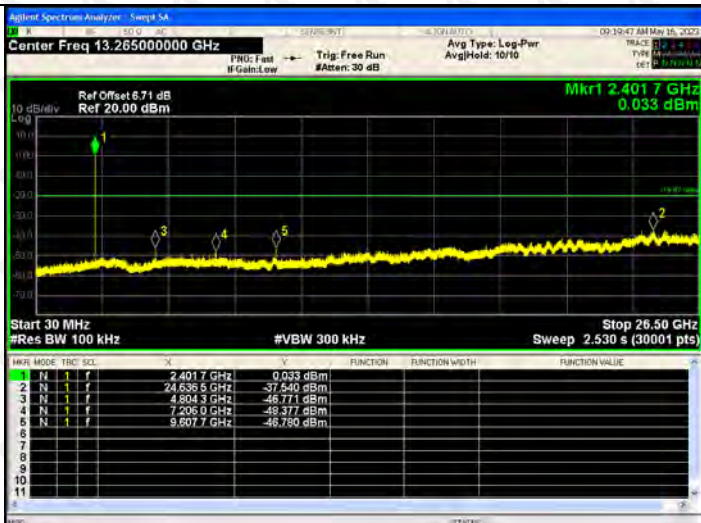

8DPSK /MCH

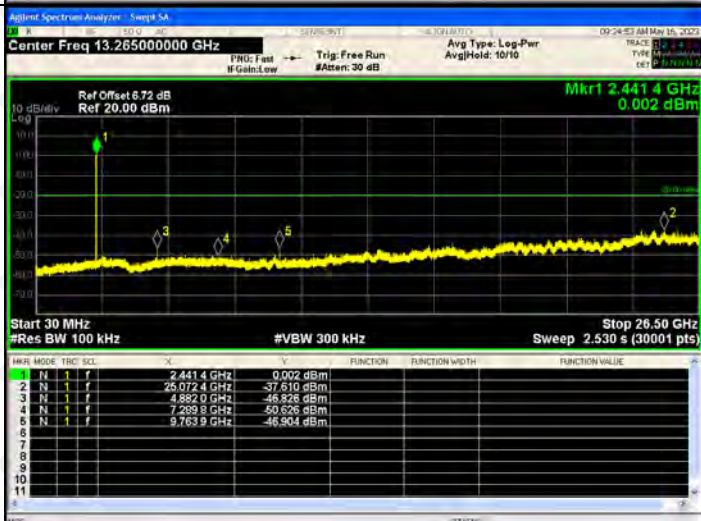


8DPSK /HCH

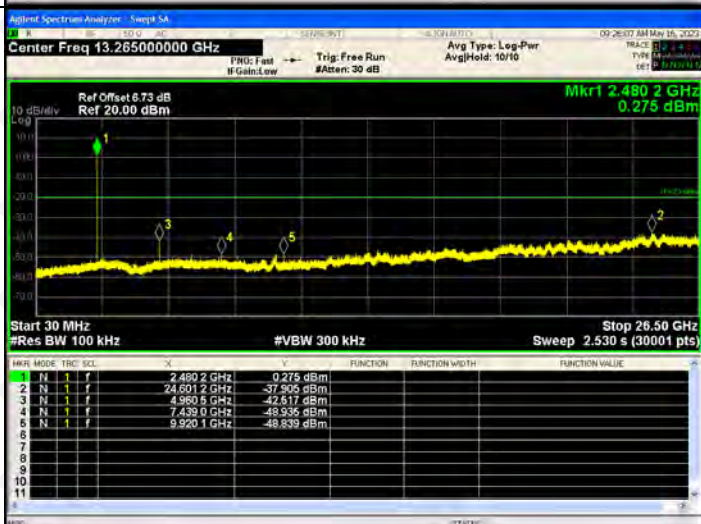

9. COUDUCTED PEAK OUTPUT POWER

9.1 Block Diagram Of Test Setup

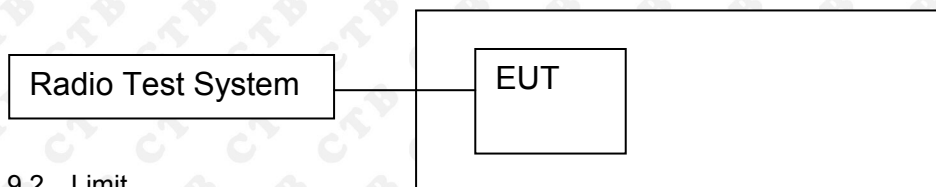

9.2 Limit

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.


9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 2MHz. VBW = 6MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.

9.4 Test Result

Mode	Channel.	Maximum Peak Output Power [dBm]	Limit [dBm]	Verdict
EDR mode (GFSK)	LCH	3.594	20.97	PASS
	MCH	3.241	20.97	PASS
	HCH	3.718	20.97	PASS
EDR mode ($\pi/4$ DQPSK)	LCH	4.194	20.97	PASS
	MCH	3.843	20.97	PASS
	HCH	4.337	20.97	PASS
EDR mode (8DPSK)	LCH	4.864	20.97	PASS
	MCH	4.382	20.97	PASS
	HCH	4.879	20.97	PASS

Test Graph:

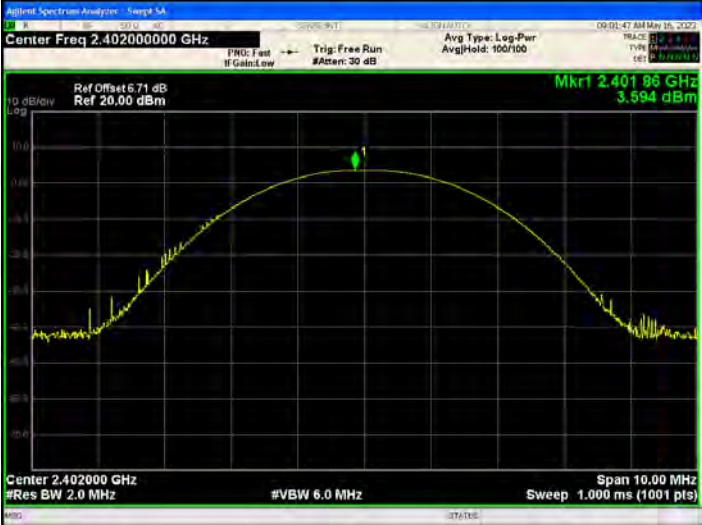
	Graphs
GFSK/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.40200000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Mkr1 2.40196 GHz 3.594 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
GFSK/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.441000000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.44097 GHz 3.241 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
GFSK/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.480000000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.47991 GHz 3.718 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

$\pi/4$DQPSK/LCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.402000000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Mkr1 2.40189 GHz 4.194 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
$\pi/4$DQPSK/MCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.441000000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.44120 GHz 3.843 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
$\pi/4$DQPSK/HCH	 Agilent Spectrum Analyzer - Sweep SA Center Freq 2.480000000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.47993 GHz 4.337 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

8DPSK/LCH	 Agilent Spectrum Analyzer - Sweep 54 Center Freq 2.40200000 GHz Ref Offset 6.71 dB Ref 20.00 dBm Mkr1 2.40197 GHz 4.884 dBm Center 2.402000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
8DPSK /MCH	 Agilent Spectrum Analyzer - Sweep 54 Center Freq 2.44100000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.44100 GHz 4.382 dBm Center 2.441000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)
8DPSK /HCH	 Agilent Spectrum Analyzer - Sweep 54 Center Freq 2.48000000 GHz Ref Offset 6.73 dB Ref 20.00 dBm Mkr1 2.47995 GHz 4.879 dBm Center 2.480000 GHz #Res BW 2.0 MHz #VBW 6.0 MHz Span 10.00 MHz Sweep 1.000 ms (1001 pts)

10. 20DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

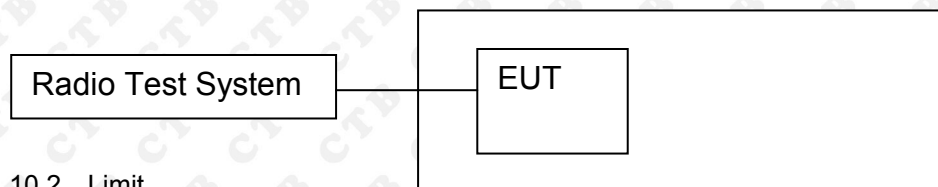

10.2 Limit

Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125mw.

10.3 Test procedure

1. Rem1. Set RBW = 30 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

Test Mode	Frequency	20dB Bandwidth (MHz)	Result
GFSK	Low channel	0.886	PASS
	Mid channel	0.865	PASS
	High channel	0.868	PASS
$\pi/4$ DQPSK	Low channel	1.328	PASS
	Mid channel	1.287	PASS
	High channel	1.31	PASS
8DPSK	Low channel	1.26	PASS
	Mid channel	1.252	PASS
	High channel	1.288	PASS

Note: All modes of operation were Pre-scan and the worst-case emissions are reported.

Test Graph:


GFSK Low channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.402000000 GHz Ref Offset 6.71 dB Ref 26.71 dBm Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 811.67 kHz Total Power 9.79 dBm Transmit Freq Error 18.876 kHz OBW Power 99.00 % x dB Bandwidth 886.4 kHz x dB -20.00 dB
GFSK Mid channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.441000000 GHz Ref Offset 6.72 dB Ref 26.72 dBm Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 801.13 kHz Total Power 9.38 dBm Transmit Freq Error 28.686 kHz OBW Power 99.00 % x dB Bandwidth 864.6 kHz x dB -20.00 dB
GFSK High channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq 2.480000000 GHz Ref Offset 6.73 dB Ref 26.73 dBm Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms Occupied Bandwidth 806.72 kHz Total Power 9.94 dBm Transmit Freq Error 15.904 kHz OBW Power 99.00 % x dB Bandwidth 868.0 kHz x dB -20.00 dB

$\pi/4$-DQPSK Low channel	
$\pi/4$-DQPSK Mid channel	
$\pi/4$-DQPSK High channel	

8DPSK Low channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.402000000 GHz Ref Offset: 6.71 dB Ref: 26.71 dBm Mkr3: 2.402652 GHz -19.000 dBm Center: 2.402 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms Occupied Bandwidth: 1.1632 MHz Total Power: 9.44 dBm Transmit Freq Error: 21.604 kHz OBW Power: 99.00 % x dB Bandwidth: 1.260 MHz x dB: -20.00 dB
8DPSK Mid channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.441000000 GHz Ref Offset: 6.72 dB Ref: 26.72 dBm Mkr3: 2.441649 GHz -21.468 dBm Center: 2.441 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms Occupied Bandwidth: 1.1655 MHz Total Power: 8.70 dBm Transmit Freq Error: 22.628 kHz OBW Power: 99.00 % x dB Bandwidth: 1.252 MHz x dB: -20.00 dB
8DPSK High channel	 Agilent Spectrum Analyzer - Occupied BW Center Freq: 2.480000000 GHz Ref Offset: 6.73 dB Ref: 26.73 dBm Mkr3: 2.480661 GHz -18.603 dBm Center: 2.48 GHz #Res BW: 30 kHz #VBW: 100 kHz Span: 3 MHz Sweep: 3.2 ms Occupied Bandwidth: 1.1694 MHz Total Power: 9.62 dBm Transmit Freq Error: 16.334 kHz OBW Power: 99.00 % x dB Bandwidth: 1.288 MHz x dB: -20.00 dB

11. CARRIER FREQUENCIES SEPARATION

11.1 Block Diagram Of Test Setup

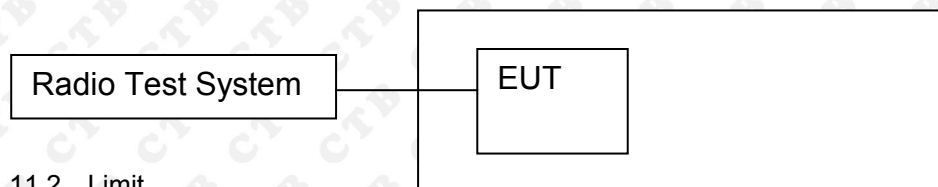

11.2 Limit

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 0.125W.

11.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz , Span = 2MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.

11.4 Test Result

Mode	Channel.	Carrier Frequency Separation [MHz]	Limit(2/3 of the 20dB bandwidth MHz)	Verdict
GFSK	LCH	0.994	0.591	PASS
GFSK	MCH	1.002	0.577	PASS
GFSK	HCH	1.002	0.579	PASS
$\pi/4$ DQPSK	LCH	1.002	0.885	PASS
$\pi/4$ DQPSK	MCH	1.000	0.858	PASS
$\pi/4$ DQPSK	HCH	1.000	0.873	PASS
8DPSK	LCH	1.000	0.840	PASS
8DPSK	MCH	1.000	0.835	PASS
8DPSK	HCH	0.994	0.859	PASS

Test Graph




$\pi/4$ DQPSK/LCH	 Agilent Spectrum Analyzer - Sweep SA Marker 1 Δ 1.002000000 MHz Ref Offset 8.71 dB Ref 20.00 dBm AMkr1 1.002 MHz 0.730 dB Center 2.402500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>F</th><th>F</th><th>F</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>f</td><td>(A)</td><td>1.002 MHz</td><td>(A)</td><td>0.730 dB</td><td></td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.402 036 GHz</td><td></td><td>-1.984 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	F	F	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(A)	1.002 MHz	(A)	0.730 dB				2	F	1	f		2.402 036 GHz		-1.984 dBm			
MNR	MODE	TRC	SCL	F	F	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																								
1	A2	1	f	(A)	1.002 MHz	(A)	0.730 dB																											
2	F	1	f		2.402 036 GHz		-1.984 dBm																											
$\pi/4$ DQPSK/MCH	 Agilent Spectrum Analyzer - Sweep SA Marker 1 Δ 1.000000000 MHz Ref Offset 8.72 dB Ref 20.00 dBm AMkr1 1.000 MHz 0.818 dB Center 2.441500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>F</th><th>F</th><th>F</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>f</td><td>(A)</td><td>1.000 MHz</td><td>(A)</td><td>0.818 dB</td><td></td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.441 038 GHz</td><td></td><td>-1.508 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	F	F	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(A)	1.000 MHz	(A)	0.818 dB				2	F	1	f		2.441 038 GHz		-1.508 dBm			
MNR	MODE	TRC	SCL	F	F	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																								
1	A2	1	f	(A)	1.000 MHz	(A)	0.818 dB																											
2	F	1	f		2.441 038 GHz		-1.508 dBm																											
$\pi/4$ DQPSK/HCH	 Agilent Spectrum Analyzer - Sweep SA Marker 1 Δ 1.000000000 MHz Ref Offset 8.73 dB Ref 20.00 dBm AMkr1 1.000 MHz -1.806 dB Center 2.479500 GHz #Res BW 20 kHz #VBW 62 kHz Span 2.000 MHz Sweep 4.800 ms (1001 pts) <table><tr><th>MNR</th><th>MODE</th><th>TRC</th><th>SCL</th><th>F</th><th>F</th><th>F</th><th>F</th><th>FUNCTION</th><th>FUNCTION WIDTH</th><th>FUNCTION VALUE</th></tr><tr><td>1</td><td>A2</td><td>1</td><td>f</td><td>(A)</td><td>1.000 MHz</td><td>(A)</td><td>-1.806 dB</td><td></td><td></td><td></td></tr><tr><td>2</td><td>F</td><td>1</td><td>f</td><td></td><td>2.478 850 GHz</td><td></td><td>-2.002 dBm</td><td></td><td></td><td></td></tr></table>	MNR	MODE	TRC	SCL	F	F	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	A2	1	f	(A)	1.000 MHz	(A)	-1.806 dB				2	F	1	f		2.478 850 GHz		-2.002 dBm			
MNR	MODE	TRC	SCL	F	F	F	F	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																								
1	A2	1	f	(A)	1.000 MHz	(A)	-1.806 dB																											
2	F	1	f		2.478 850 GHz		-2.002 dBm																											

Page 46 of 58

12. HOPPING CHANNEL NUMBER

12.1 Block Diagram Of Test Setup

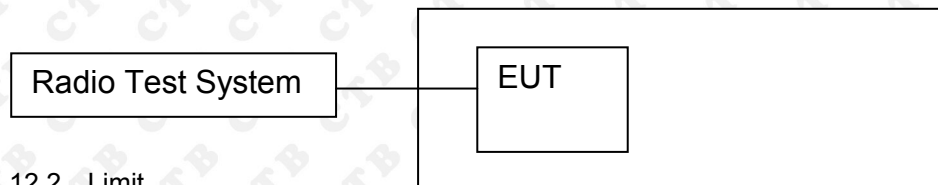

12.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100kHz. VBW = 300kHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.4835GHz. Sweep=auto;



12.4 Test Result

Mode	Channel.	Number of Hopping Channel	Limit	Verdict
GFSK	Hop	79	≥ 15	PASS
$\pi/4$ DQPSK	Hop	79	≥ 15	PASS
8DPSK	Hop	79	≥ 15	PASS


Test Graph

Graphs

GFSK/Hop

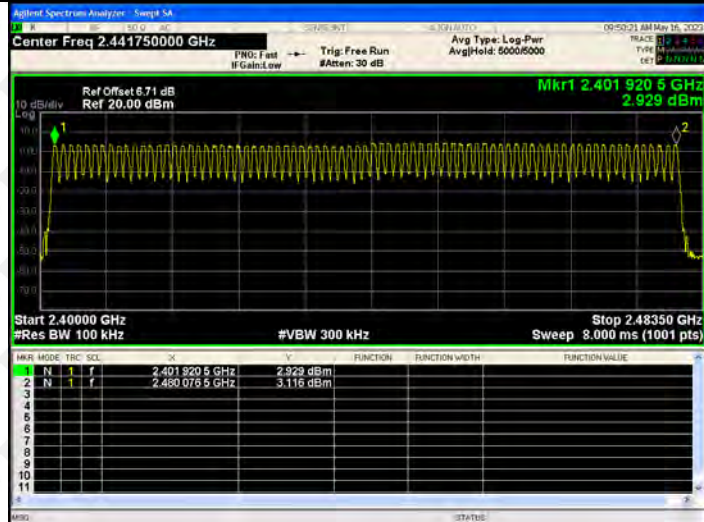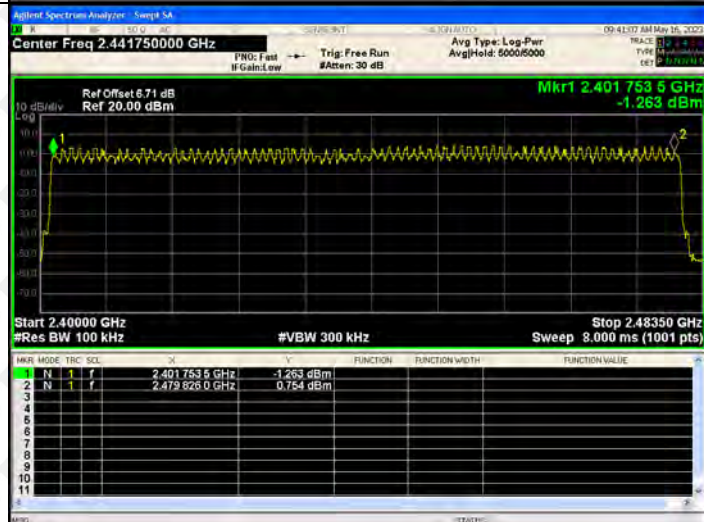

 $\pi/4$ DQPSK/Hop


8DPSK/Hop

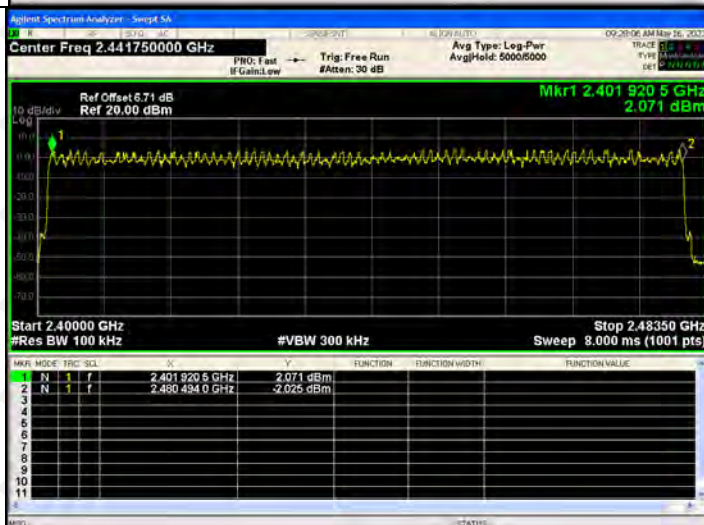

13. DWELL TIME

13.1 Block Diagram Of Test Setup

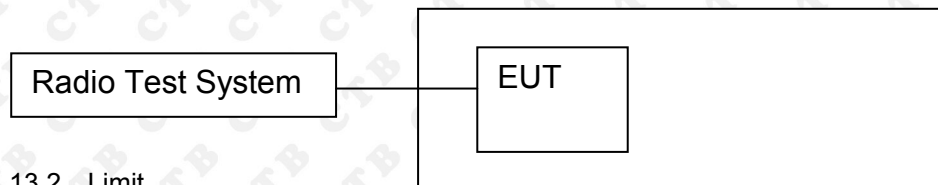

13.2 Limit

Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

13.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 3MHz. Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.4 Test Result

Worst case-GFSK:

Mode	Packet	Channel	Pulse Time (ms)	Total Dwell Time (ms)	Limit (ms)	Verdict
GFSK	DH1	LCH	0.388	124.16	400	PASS
	DH1	MCH	0.386	123.52	400	PASS
	DH1	HCH	0.386	123.52	400	PASS
	DH3	LCH	1.646	263.36	400	PASS
	DH3	MCH	1.646	263.36	400	PASS
	DH3	HCH	1.647	263.52	400	PASS
	DH5	LCH	2.898	309.12	400	PASS
	DH5	MCH	2.901	309.44	400	PASS
	DH5	HCH	2.901	309.44	400	PASS

Remark: DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


DH5: $1600/79/6 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

DH3: $1600/79/4 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

DH1: $1600/79/2 \times 0.4 \times 79 \times (\text{MkrDelta})/1000$

Remark: Mkr Delta is once pulse time.

Test Graph

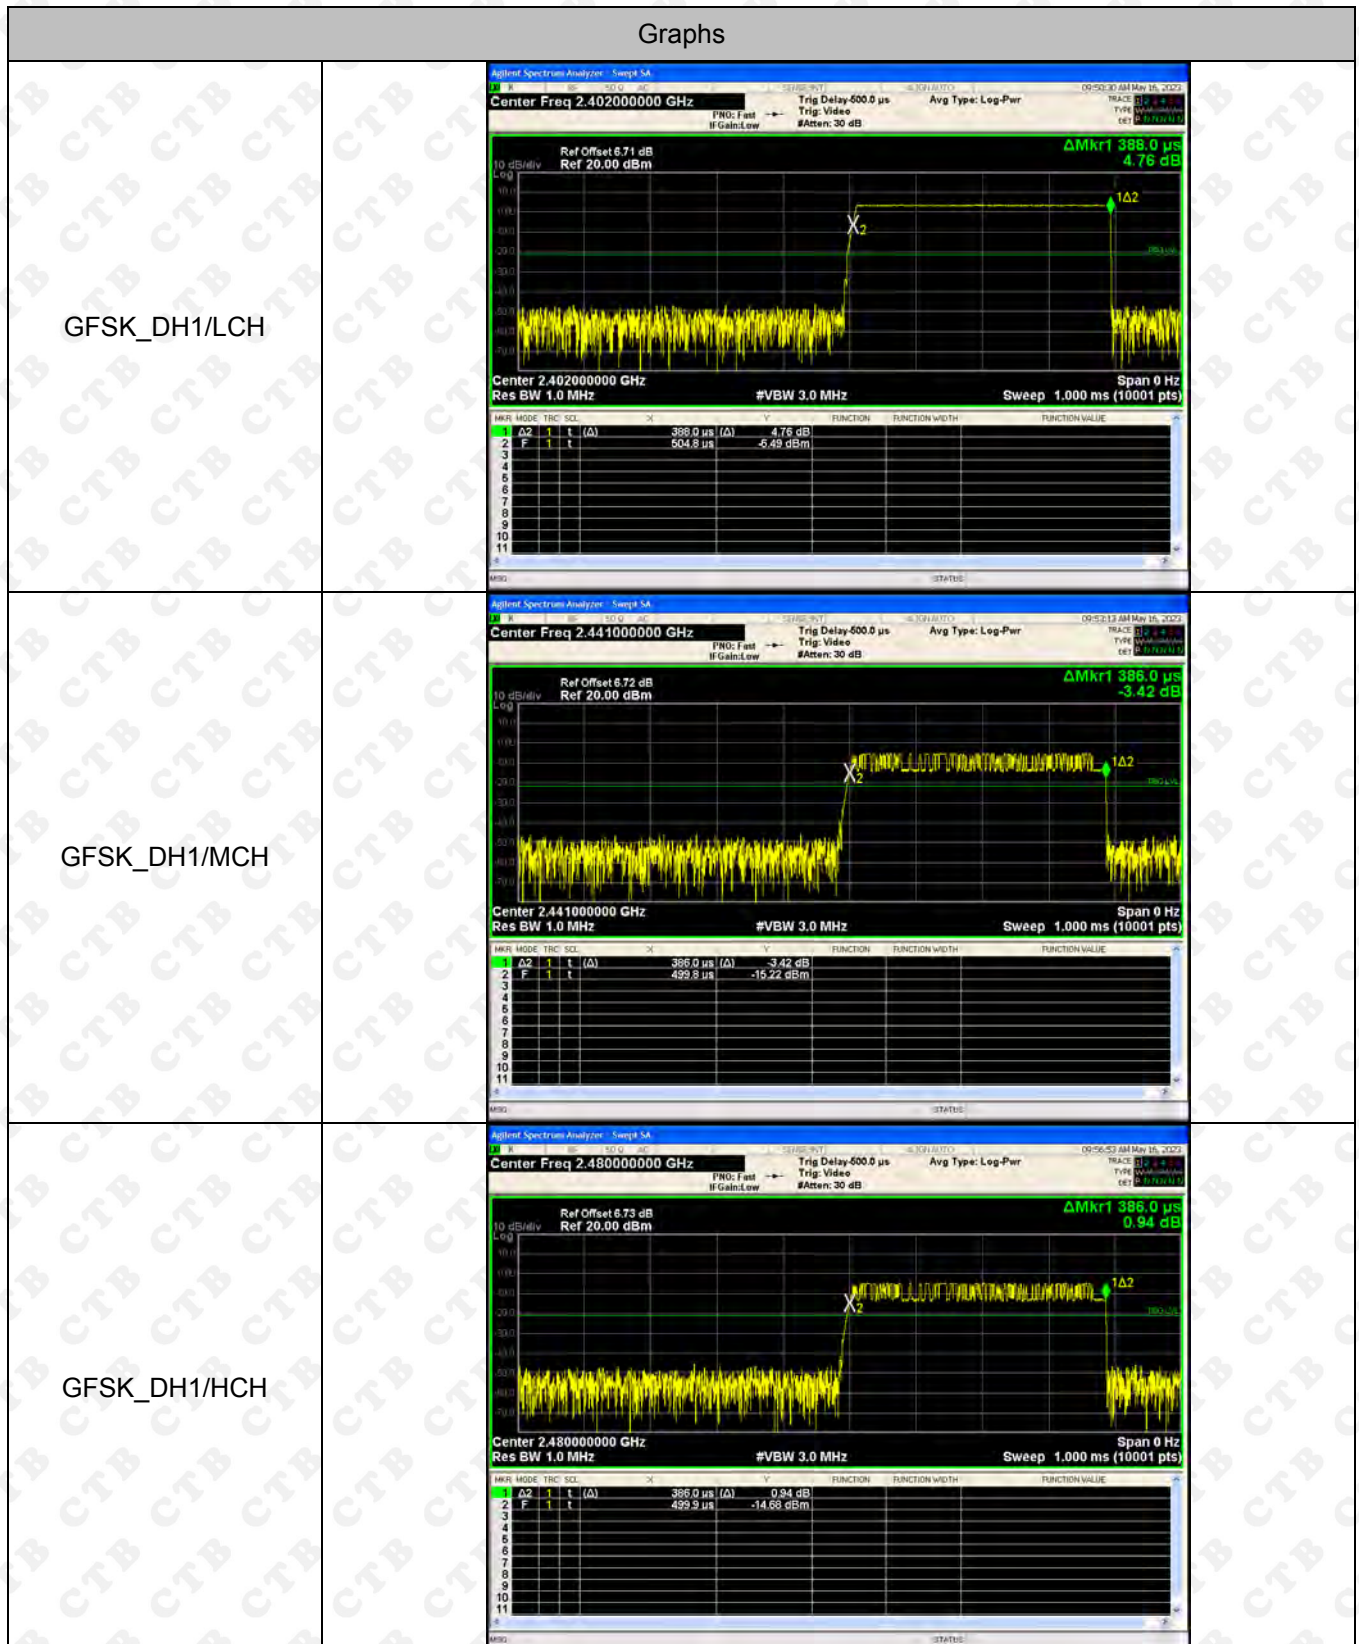

GFSK_DH3/LCH



GFSK_DH3/MCH



GFSK_DH3/HCH




GFSK_DH5/LCH



GFSK_DH5/MCH



GFSK_DH5/HCH

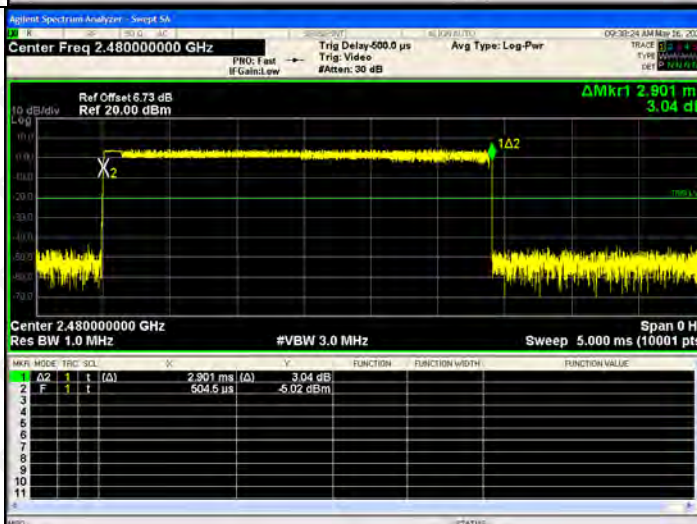

14. PSEUDORANDOM FREQUENCY

14.1 Limit


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.


14.2 Test procedure

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: $2^9 - 1 = 511$ bits
- Longest sequence of zeros: 8 (non-inverted signal)

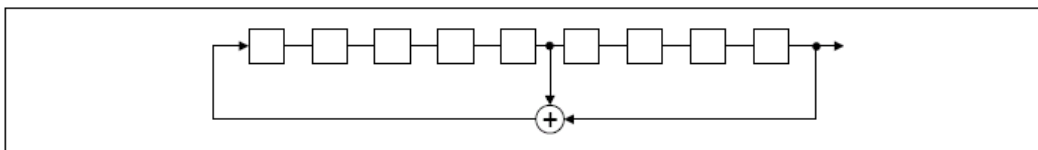

An example of Pseudorandom Frequency Hopping Sequence as follow:

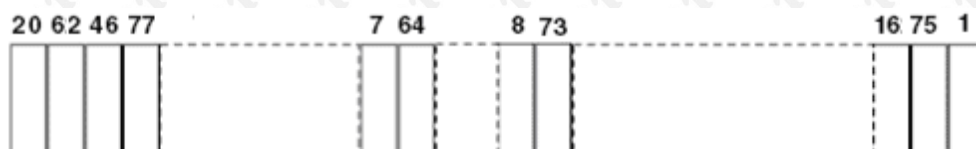

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.

14.3 Test Result

The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.

15. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Ceramic antenna. The best case gain of the antenna is 1.75dBi.

16. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G



Above 1G



Conducted emissions



***** END OF REPORT *****