

Kameleon Light Strip K1

User Manual



EN

QUICK START GUIDE


1. Power up the K1 light strip with the enclosed power adapter. Long press the power button for 10 seconds. A light strip status window shows after reset.

2. Make sure your iOS device (iOS 14.1 or later) is connected to a 2.4GHz Wi-Fi network. Shut down S2020 Wi-Fi network when necessary.

3. Download and launch the free Onvis Home app from the App Store. Check and update firmware with Onvis Home. The iOS Home App can be used to setup and control.

4. Tap "+" on the top right corner and scan the HomeKit QR code to setup the device.

Note: When QR code scanning is NOT applicable, select the target device (K1 or K2) by matching the MAC address, and manually input the SETUP code printed on the QR code. Example:

 → Set up code

 → QR code

If the app prompts "Couldn't add Onvis XXXXXXX", please reset and re-add the device. Please keep the QR code for future use.

EN

1

1

The use of a HomeKit-enabled accessory needs the below permissions:

a. Settings->Cloud->Cloud Drive->Turn On

b. Settings->Cloud->Keychain->Turn On

c. Settings->Privacy->HomeKit->Onvis Home->Turn On

5. Assign the device to a room, name it and use this name to control with Siri. This light strip can be integrated into your HomeKit scenes and automation.

6. Mount the light strip on a clean dry surface. Do NOT touch the K1 or LED beads.

7. For troubleshooting visit <http://www.onvistech.com/page/1717.html>

Home Hub


A customer who owns an Apple TV (4th generation or later) with iOS 10 or later, an iPad with iOS 10 or later, or a HomePod can control HomeKit-enabled accessories away from home and automatically through triggers such as time of day, location, sensor detection, or the action of an accessory. You may find the instruction for HomeKit hub setting here: <http://www.onvistech.com/page/1718.html>

Restore Factory Settings

Press and hold the power button for about 10 seconds. After the light strip blinks full rainbow twice, the device will be restored to factory settings.

EN

K1 Light Strip Overview

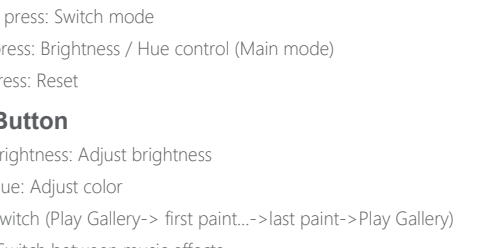

① Power button

② Microphone

③ Volume

④ - Button

Power Button

Single press: Turn On/Off

Double press: Switch mode

Triple press: Brightness / Hue control (Main mode)

Long Press: Reset

• + / - Button

Main brightness: Adjust brightness

Main Hue: Adjust color

Paint: Switch (Play Gallery) - first point...last point->Play Gallery

Music: Switch between music effects

Scene effects: Switch between preset effects

EN

3

3

Specification

Brand: Onvis

Model: K1

LED: 5050 RGB 60 pcs

Lighting Unit: 1 LEDS + 1 IC, totally 20 units

Beam Angle: 120°

Length of light strip: 2 meters

Life cycle: 20000 hours

Adapter Input: 100-240V AC, Max 12A, 50/60Hz

Adapter Output: 12V 1000mA

Power Protection: IP65

Working temperature: -20°C ~ 40°C

Wi-Fi

Wi-Fi: 802.11 b/g/n, 2.4GHz CHN1 (5GHz NOT supported)

EN

4

4

Legal

• Use of the Works with Apple badge means that an accessory has been designed to work specifically with the technology identified in the badge and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards.

• Apple, Apple Watch, HomeKit, HomePod, iPad, iPad Air, and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. iOS is a trademark of Apple Inc. The trademark "iPhone" is used with a license from Apple Inc. & K.

• Controlling this HomeKit-enabled accessory automatically and away from home requires a HomePod, Apple TV, or iPad set up as a home hub. It is recommended that you update to the latest software and operating system.

• To control this HomeKit-enabled accessory, the latest version of iOS or iPadOS is recommended.

Customer Service

📞 24-hour limited warranty

🔧 Lifetime technical support

EN

6

6

Warnings

• Indoor use only.

• Do NOT cut the light strip.

• DO NOT use outside the electrical ratings. Use the original power supply in package.

• Do NOT disassemble the light strip from the controller.

• Do NOT use hand the light strip. Do not touch an air IC or LED bead.

• Do NOT turn on the light strip for over 5 minutes when it is tightly rolled, to avoid over heating.

• Do NOT mount the controller on a greasy, or uneven surface.

Operation is Subject to the Following Two Conditions

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

EN

7

7

General Instructions

The product contains inside small parts that might cause choking to children. Keep the product away from children under three years old. If the product comes in a plastic bag package, dispose of the bag properly, and take extra to prevent children from playing with it as a source of suffocation to children. This product may become warm with normal use. Please make sure the product is adequately ventilated and securely positioned, and do not place it near other sources of heating, direct sunlight, radiator, or similar. Unless otherwise stated, this product is for indoor use only, and must be maintained out of damp/humid conditions and other weather-related influences such as rain, snow and mist.

This product is not designed for use in any kind of machine, medical equipment or industrial applications. The product contains no user-replaceable or exchangeable parts. Do not attempt to repair the product. Do not disassemble the device nor the AC adapter as this may result in electrocution or other dangers that may cause injury. If the device (plastic case, AC adapter, pins or terminals are damaged, stop using and dispose of this product properly. Contact for our after-sale service if your product malfunctions or is damaged.

EN

9

9

Conformity Declarations

Shenzhen Changpin Technology Co., Ltd. hereby declares that where applicable this product meets basic requirements and other relevant obligations as set forth in the following guidelines: 2014/53/EU Low Voltage Directive (recast 2006/95/EC) 2014/53/EU EMC Directive 2014/53/EU Radio Equipment Directive (RED) 2011/65/EU (EU 2010/63) RoHS 2 Directive

For a copy of the Conformity Declaration, visit: www.onvistech.com

This product is approved for use in European Union.

Importer: Shenzhen Changpin Technology Co., Ltd.
Address: No.1004, International Innovation Valley, Dapin 1st Road, Xili, Nanhai, Shenzhen, China
Manufacturers: Shenzhen Changpin Technology Co., Ltd.
Address: No.1004, International Innovation Valley, Dapin 1st Road, Xili, Nanhai, Shenzhen, China

Disposal

This symbol indicates that it is unlawful to dispose of this product together with other household waste. Please take it to a local recycling center for used equipment.

CE RoHS FC



EN

10

10



Quality certificate

Product: Onvis Kameleon Light Strip K1

Product model: K1

Date of manufacture:

Checked by:

Dear Customer:

Your satisfaction with our product and service is of most importance to us.

If you encounter any problem in this product, please contact us via this email:

support@onvistech.com

Search for 'Onvis Smart Home' on Facebook and Instagram, join us and share us with your experience.





FacebookInstagram

Office Copy Warranty Card Onvis

Customer Name

Customer Address

Telephone

Product Model: K1

Serial No.

Date of Purchase

Contact Us

Search for "Onvis Smart Home" on Facebook to join us

Email: support@onvistech.com

www.onvistech.com

Customer Copy Warranty Card Onvis

This instruction is provided by us to our customers for the K1 and K2 products. The guarantee is valid only on the condition that the guarantee card is properly filled out and returned to us. The guarantee is not valid if the product is not used in accordance with the instructions. The guarantee is not valid if the product is damaged by improper handling.

Customer Name

Customer Address

Customer Telephone

Serial No.

Date of Purchase

Contact Us

Search for "Onvis Smart Home" on Facebook to join us

Email: support@onvistech.com

www.onvistech.com