

Label and Label Location

Label Location:

USB output: 5VDC, 2A/9VDC, 2.2A/12VDC, 1.5A/5VDC, 4.5A Lightning input: 9VDC, 2A
Type-C output: 5VDC, 2A/9VDC, 2.2A/9VDC, 2A Type-C input: 5VDC, 3A/9VDC, 2A
Wireless charging output: 5W, 7.5W, 10W, 15W. Total output: 5VDC, 3A(15W Max.)
Battery capacity: 10000mAh (3.85V 38.5Wh) Battery Type: Lithium Polymer
Rated capacity: 6000mAh(5VDC, 2A) Energy conversion: $\geq 60\%$


Model NO.: Pa09 FCC ID: 2A45C-PA09
Manufacturer: Shenzhen Zhilianxintong Electronics Co., Ltd
Address: Room 201, NO.49 Xinhe Road, Shangmugu Community,
Pinghu Street, Longgang District, Shenzhen, China

CAUTION: Risk of Fire and Burns.

Do Not Open, Crush, Heat Above(45℃) or Incinerate. Follow Manufacturer's Instructions.

ATTENTION: Risque d'incendie et de brûlures.

Ne pas ouvrir, écraser, chauffer au-dessus de (45℃) ou incinérer. Suivre les instructions du fabricant.

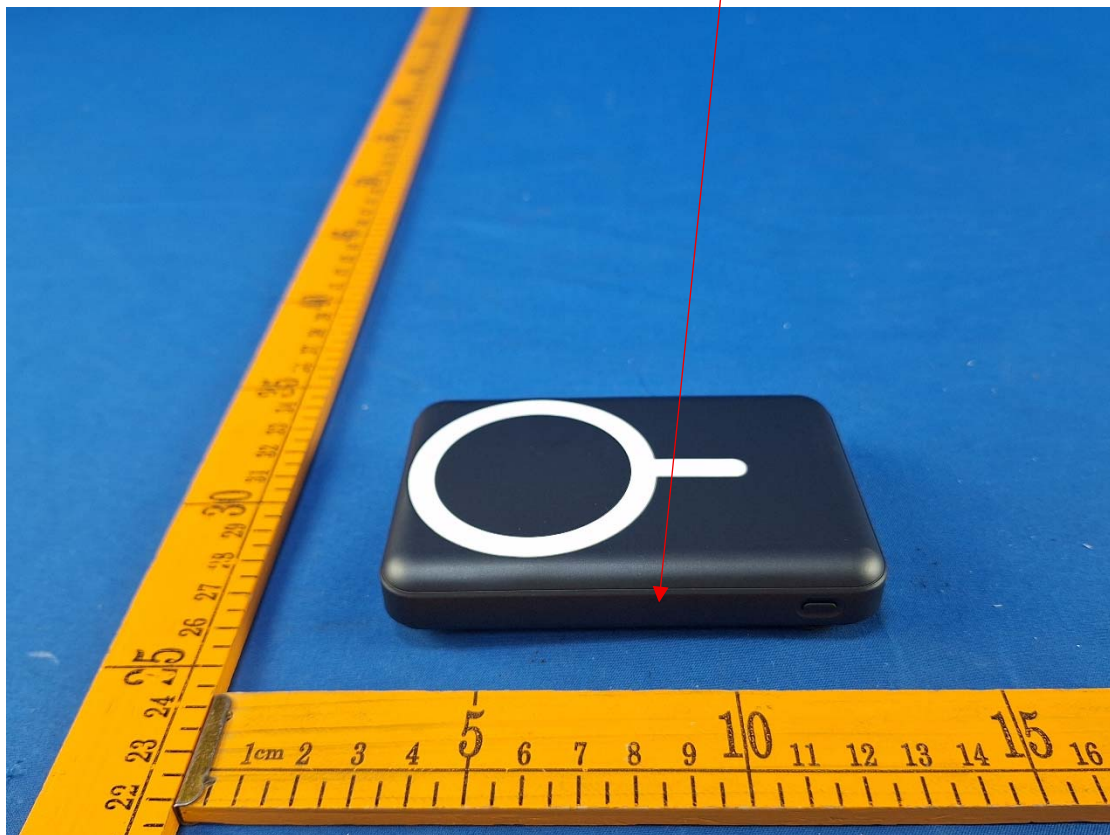

Label

USB output: 5VDC, 3A/9WDC, 2.2A/12VDC, 1.5A/5VDC, 4.5A	Lightning input: 9VDC, 2A	Model NO: iwa9	FCC ID: 2A45C-PA09
Type-C output: 5VDC, 2A/9WDC, 2.2A/9WDC, 2A	Type-C input: 5VDC, 3A/9WDC, 2A	Manufacturer: Shenzhen Zhilianvintong Electronics Co.,Ltd	
Wireless charging output: 5W, 7.5W, 10W, 15W	Total output: 5VDC, 3A(15W Max.)	Address: Room201,NO.49 Xinxhe Road, Shangmugu Community,	
Battery capacity: 10000mAh (3.85V 38.5Wh)	Battery Type: Lithium Polymer	Pinghu Street,Longgang District,Shenzhen, China	
Rated capacity:5000mAh/5VDC, 2A	Energy conversion:60%		

CAUTION: Risk of Fire and Burns. Do Not Open, Crush, Heat Above(45 °C) or Incinerate. Follow Manufacturer's Instructions. ATTENTION : Risque d'incendie et de brûlures. Ne pas ouvrir, écraser, chauffer au-dessus de (45 °C) ou incinérer. Suivre les instructions du fabricant.	CE RoHS UK FC      
--	--