



Annex for Bluetooth Low Energy
Test Report No.: CTL2509225031-WF01
TABLE OF CONTENTS

Annex for Bluetooth Low EnergyTest Report No.: CTL2509225031-WF01	1
1. Bandwidth	3
1.1 Test Result	3
1.1.1 OBW	3
1.1.2 6dB BW	3
1.2 Test Graph	4
1.2.1 OBW	4
1.2.2 6dB BW	7
2. Maximum Conducted Output Power	10
2.1 Test Result	10
2.1.1 Power	10
2.2 Test Graph	11
2.2.1 Power	11
3. Maximum Power Spectral Density	14
3.1 Test Result	14
3.1.1 PSD	14
3.2 Test Graph	15
3.2.1 PSD	15
4. Unwanted Emissions In Non-restricted Frequency Bands	18
4.1 Test Result	18
4.1.1 Ref	18

4.1.2 CSE	18
4.2 Test Graph	19
4.2.1 Ref	19
4.2.2 CSE	22

1. Bandwidth

1.1 Test Result

1.1.1 OBW


Mode	TX Type	Frequency (MHz)	ANT	99% Occupied Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	1.039	/	Pass
		2440	1	1.047	/	Pass
		2480	1	1.043	/	Pass
2M	SISO	2402	1	2.051	/	Pass
		2440	1	2.069	/	Pass
		2480	1	2.056	/	Pass


1.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.711	≥ 0.5	Pass
		2440	1	0.697	≥ 0.5	Pass
		2480	1	0.698	≥ 0.5	Pass
2M	SISO	2402	1	1.173	≥ 0.5	Pass
		2440	1	1.166	≥ 0.5	Pass
		2480	1	1.166	≥ 0.5	Pass


1.2 Test Graph

1.2.1 OBW

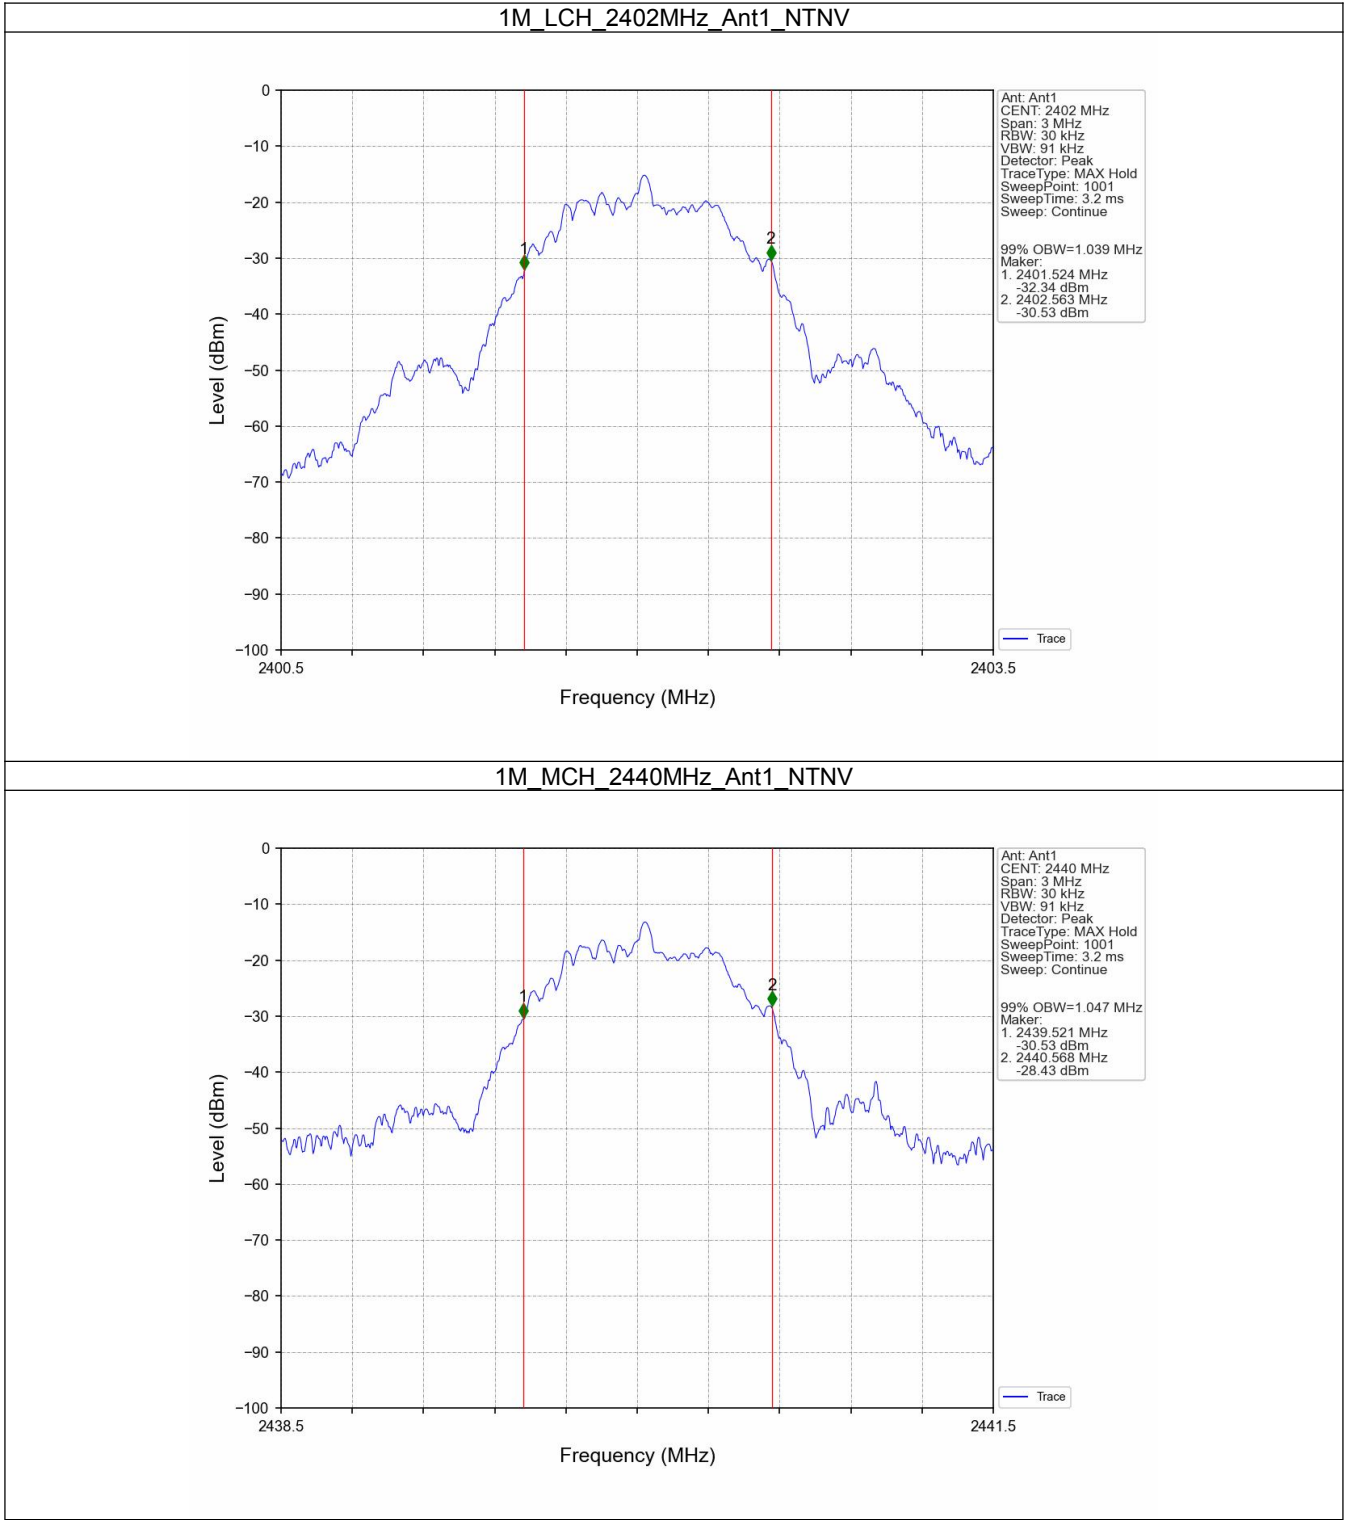


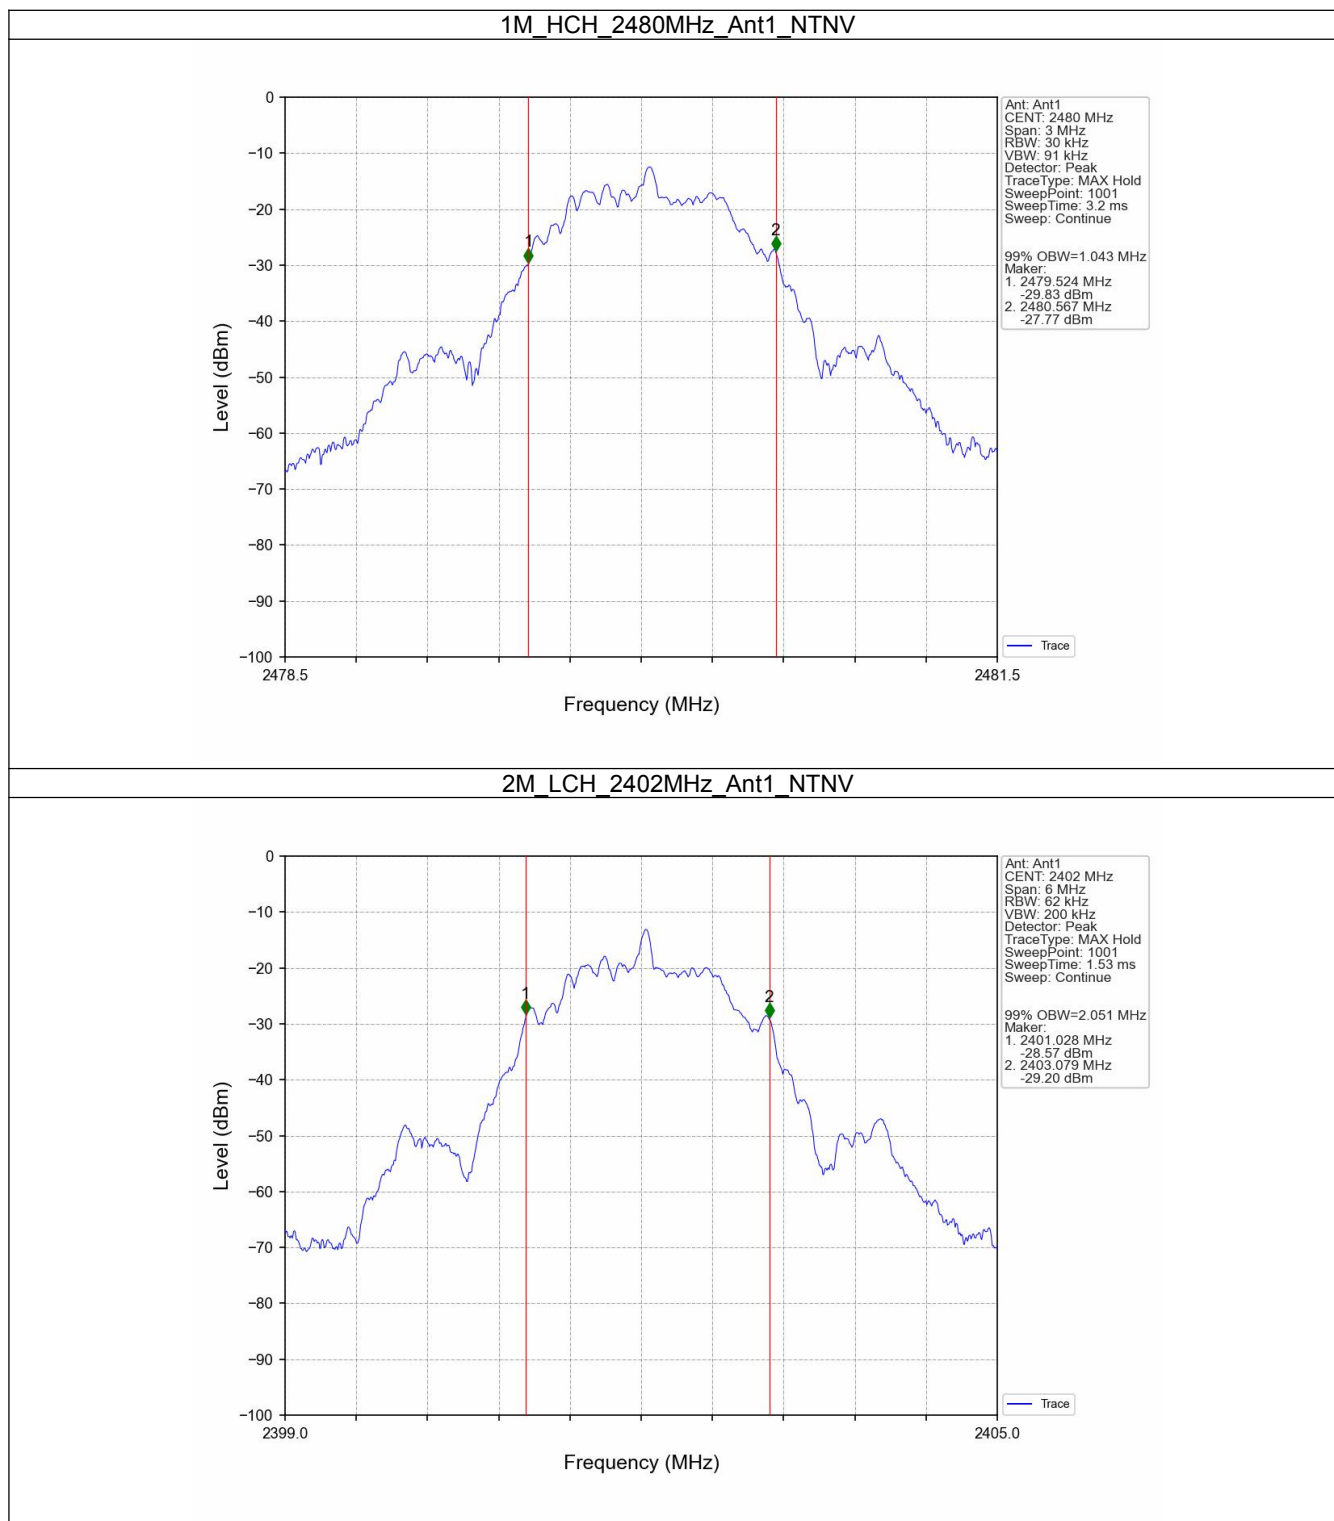


2M_MCH_2440MHz_Ant1_NTNV

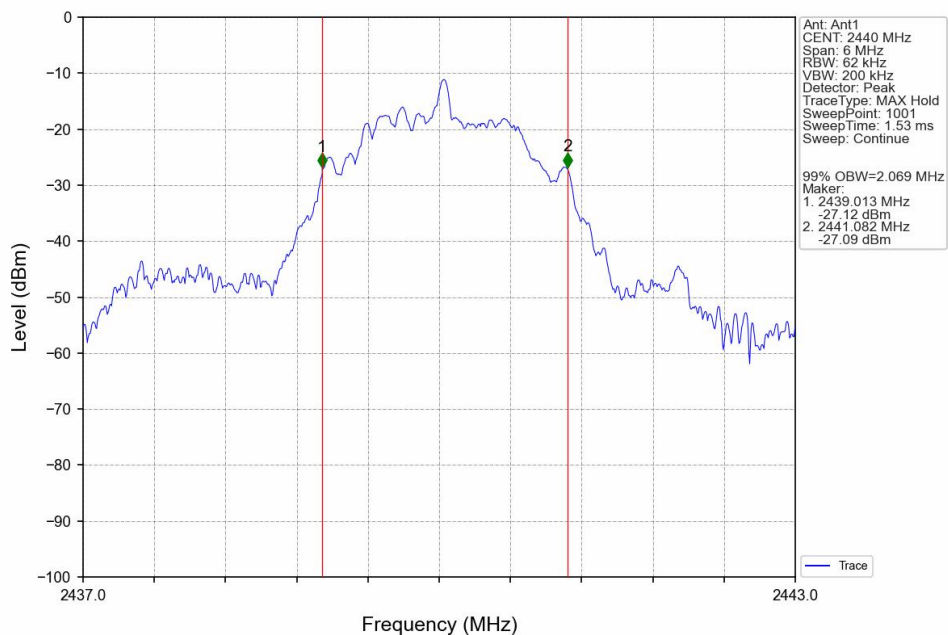


2M_HCH_2480MHz_Ant1_NTNV

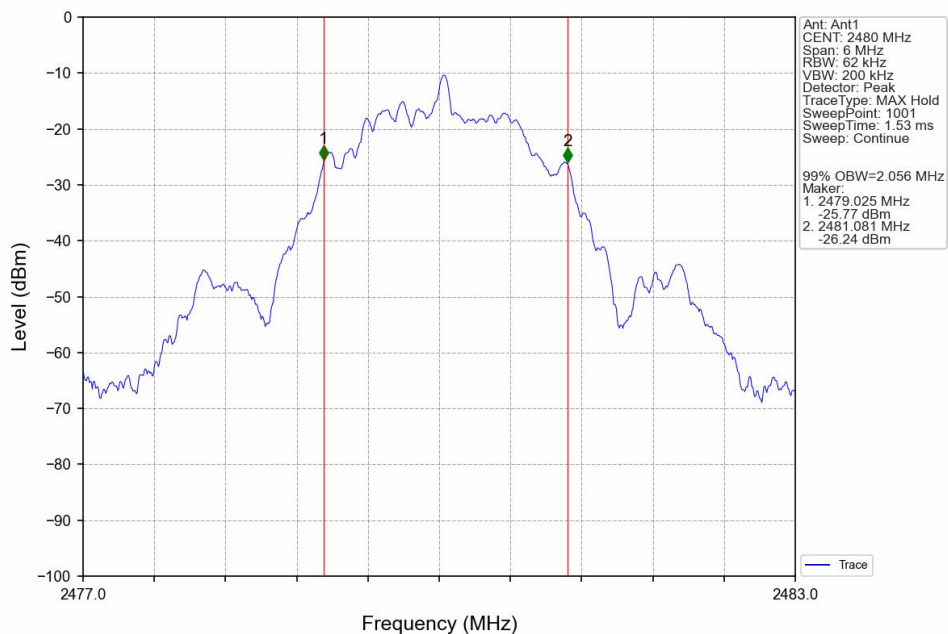


1.2.2 6dB BW

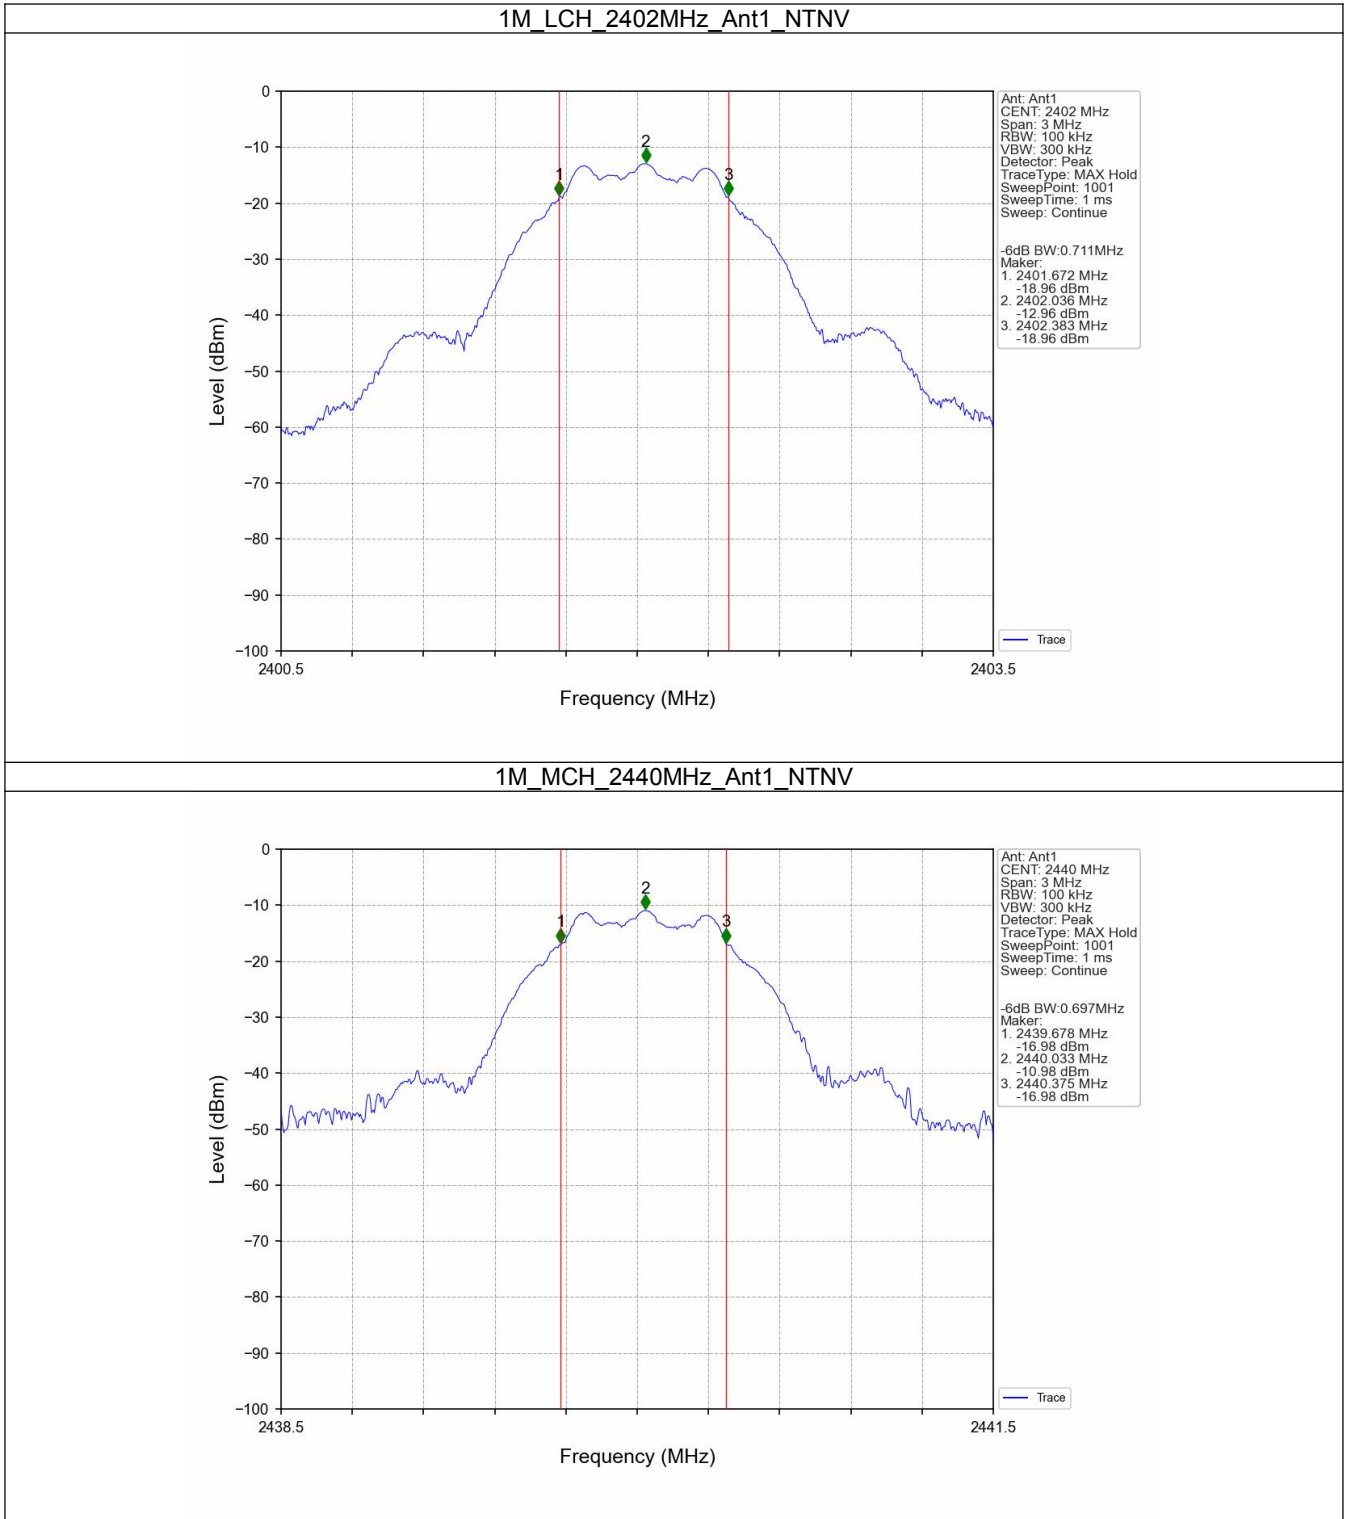


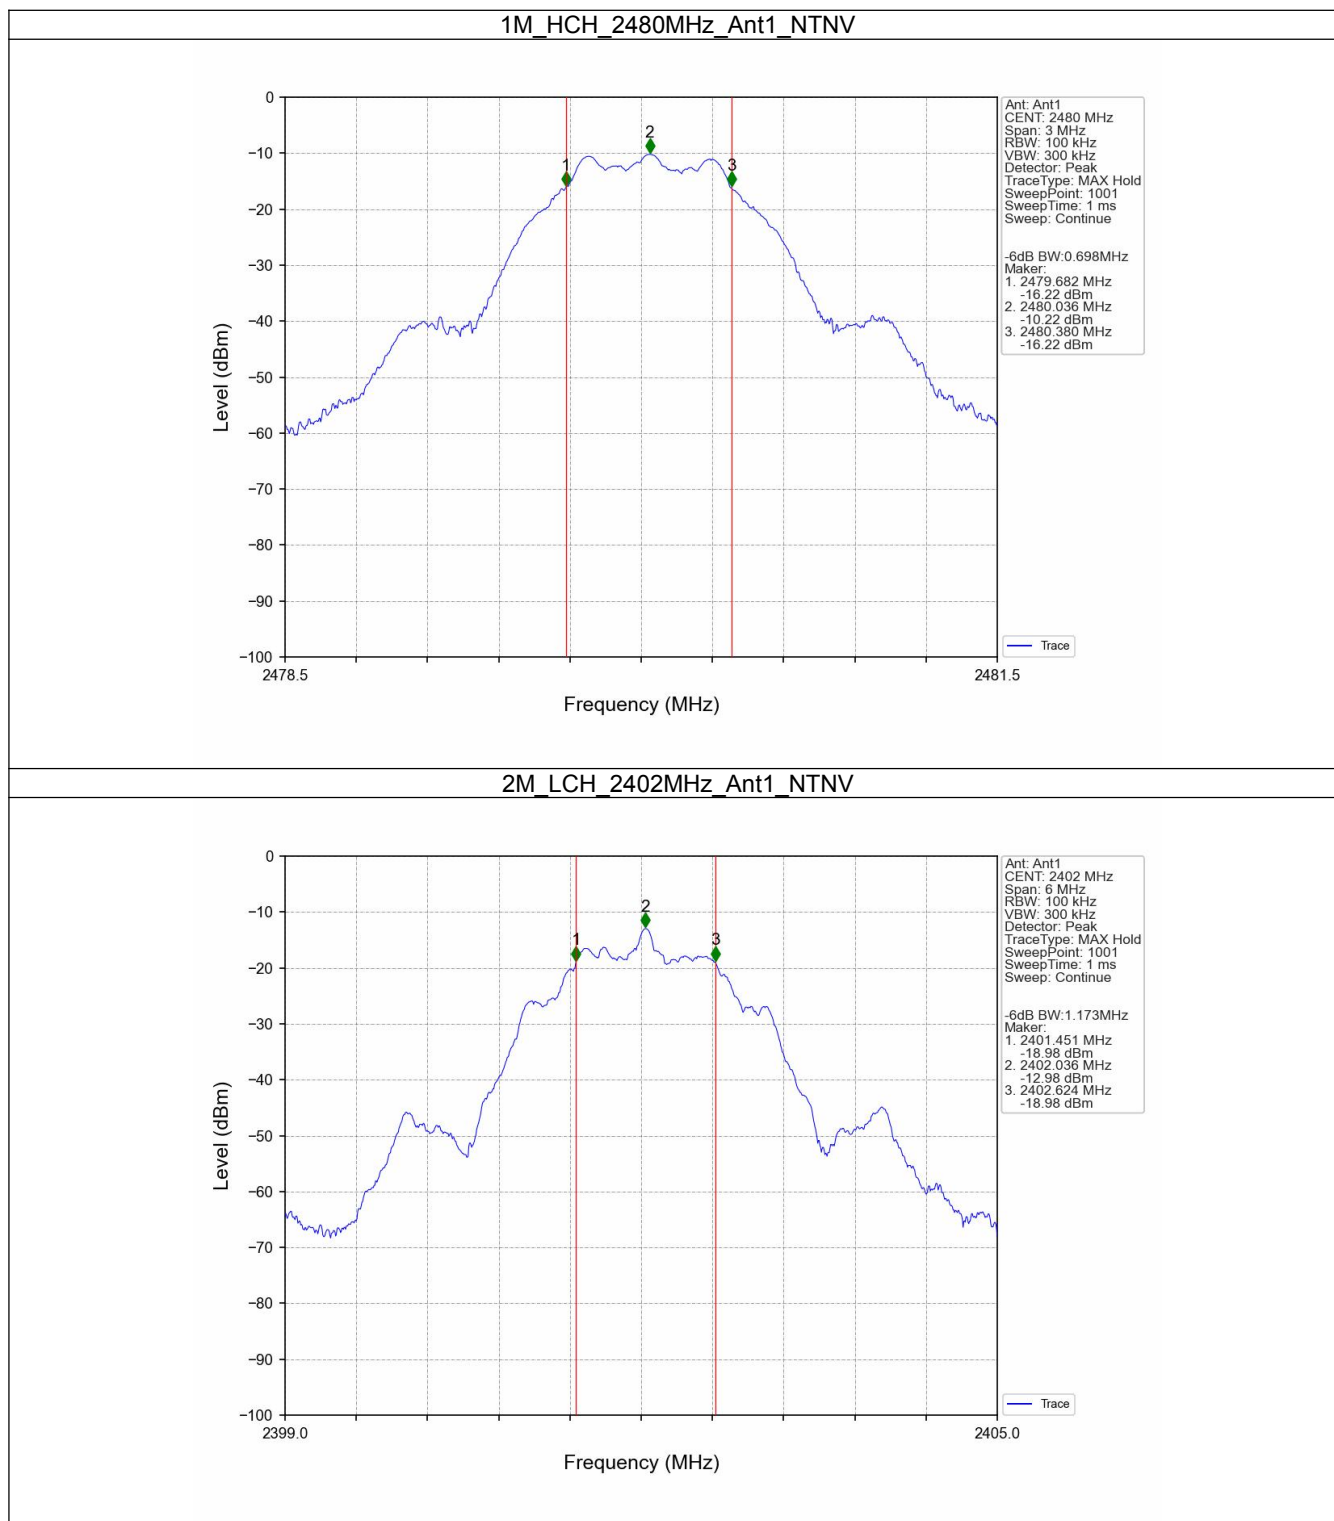

2M_MCH_2440MHz_Ant1_NTNV

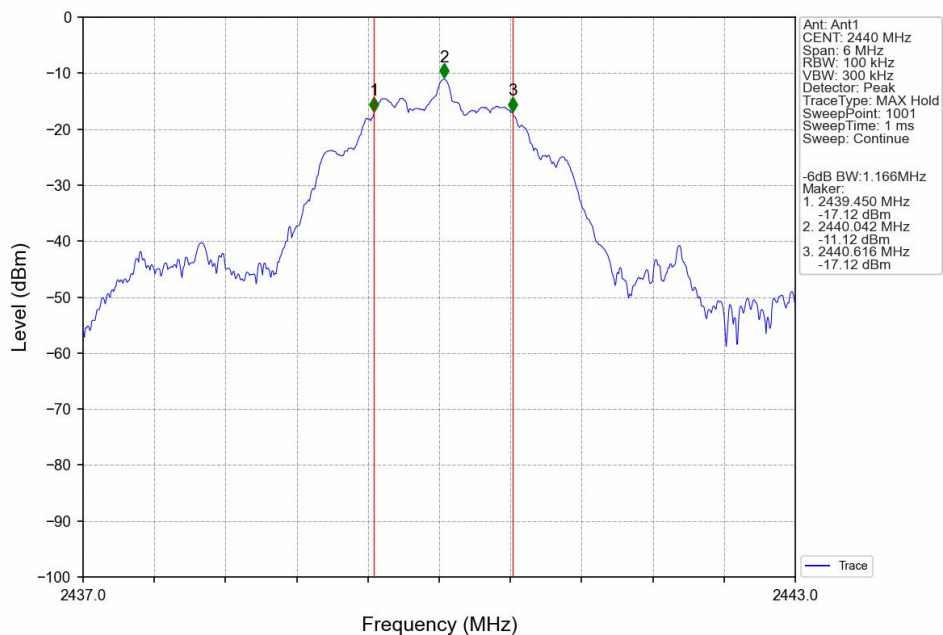

2M_HCH_2480MHz_Ant1_NTNV

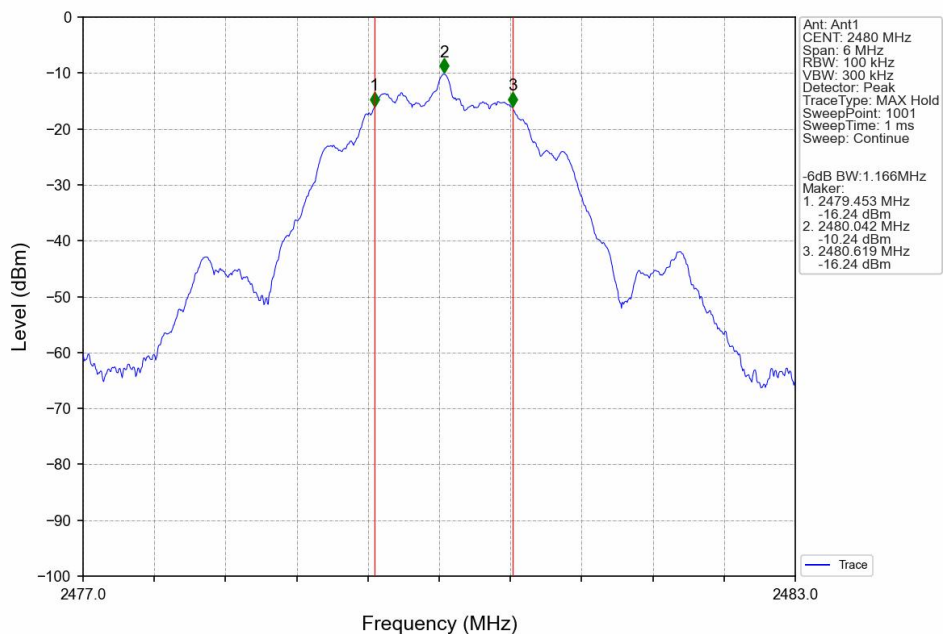

2. Maximum Conducted Output Power

2.1 Test Result


2.1.1 Power

Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-12.68	<=30	Pass
		2440	-10.41	<=30	Pass
		2480	-9.97	<=30	Pass
2M	SISO	2402	-12.79	<=30	Pass
		2440	-10.44	<=30	Pass
		2480	-10.04	<=30	Pass


Note1: Antenna Gain: Ant1: -2.03dBi;

2.2 Test Graph


2.2.1 Power

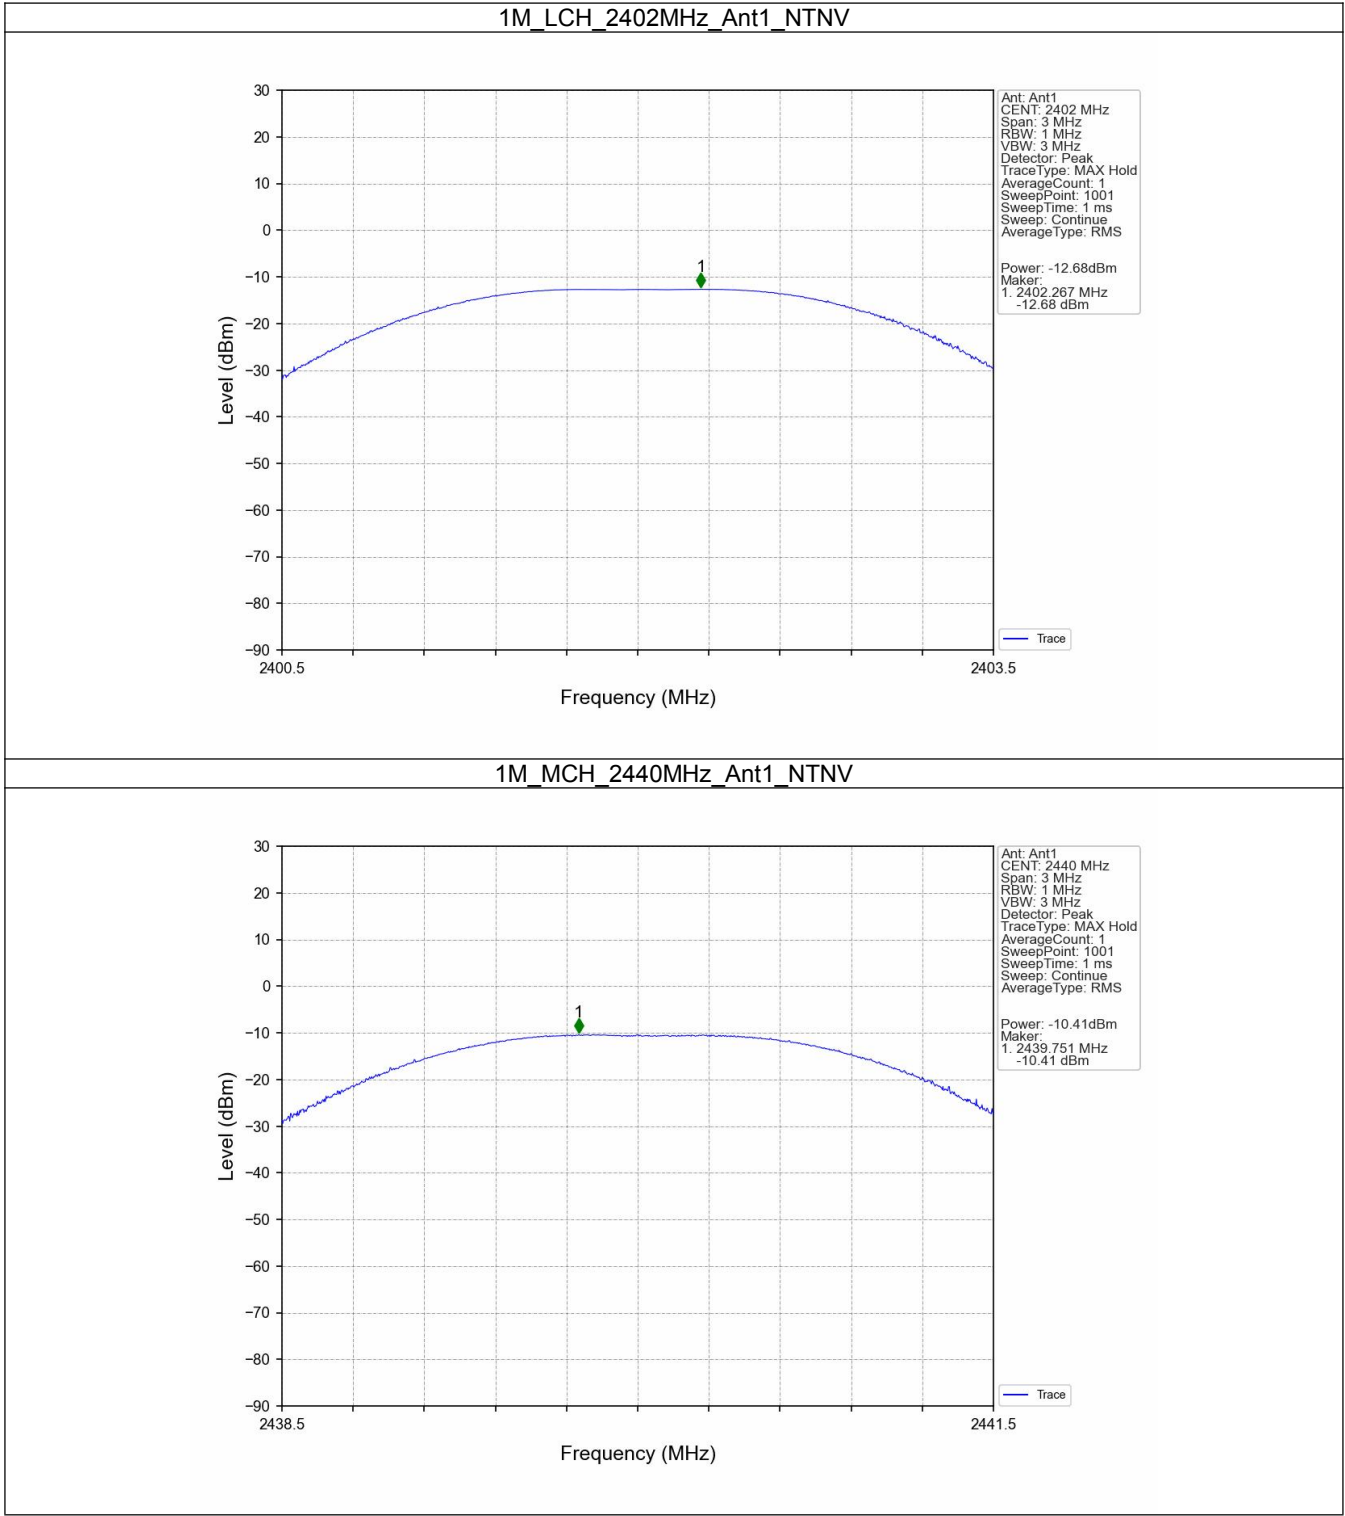


1M_HCH_2480MHz_Ant1_NTNV

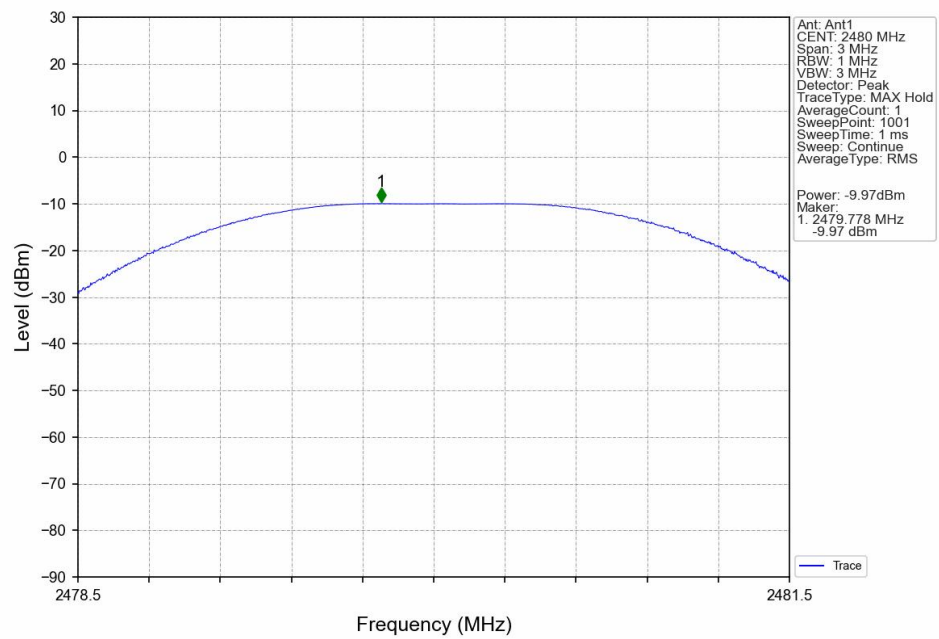


2M_LCH_2402MHz_Ant1_NTNV

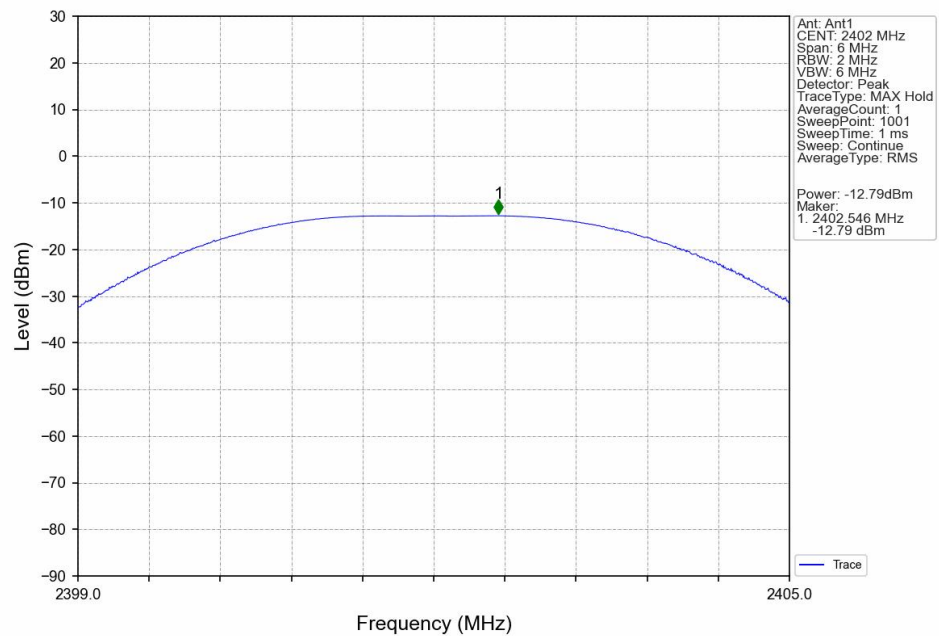

2M_MCH_2440MHz_Ant1_NTNV

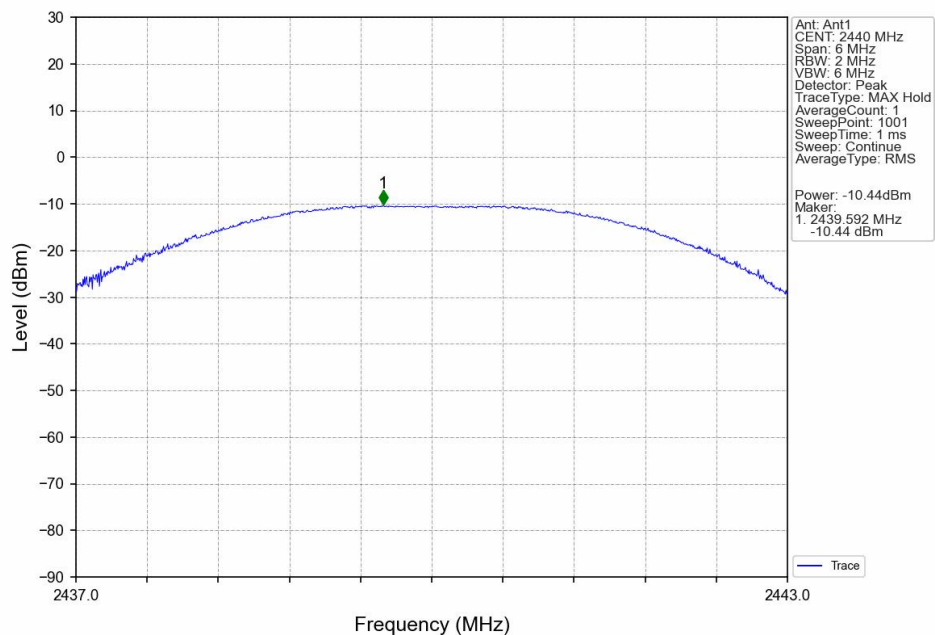

2M_HCH_2480MHz_Ant1_NTNV

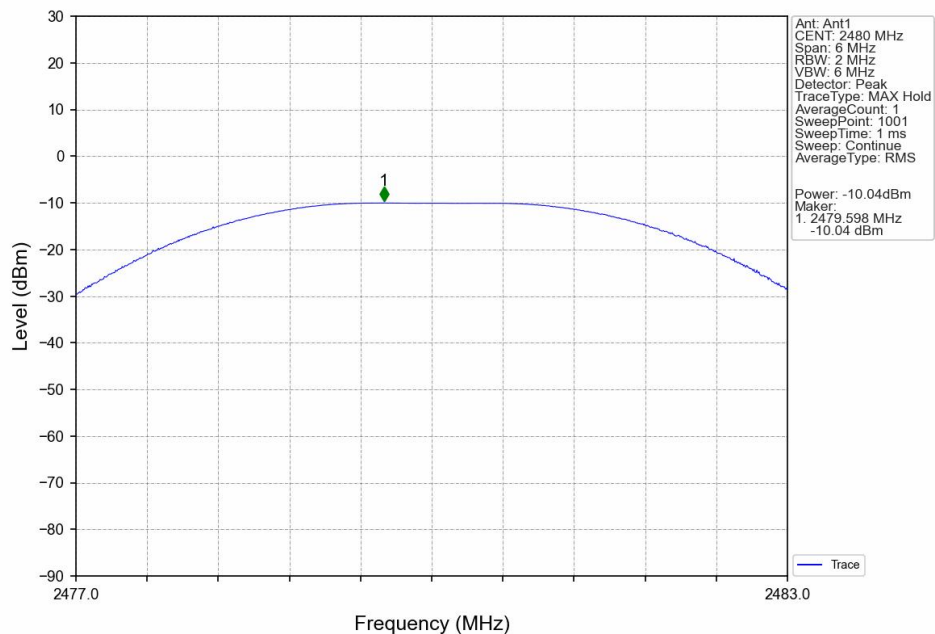

3. Maximum Power Spectral Density

3.1 Test Result


3.1.1 PSD

Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-12.96	<=8	Pass
		2440	-11.02	<=8	Pass
		2480	-10.26	<=8	Pass
2M	SISO	2402	-13.08	<=8	Pass
		2440	-11.16	<=8	Pass
		2480	-10.34	<=8	Pass


Note1: Antenna Gain: Ant1: -2.03dBi;

3.2 Test Graph


3.2.1 PSD

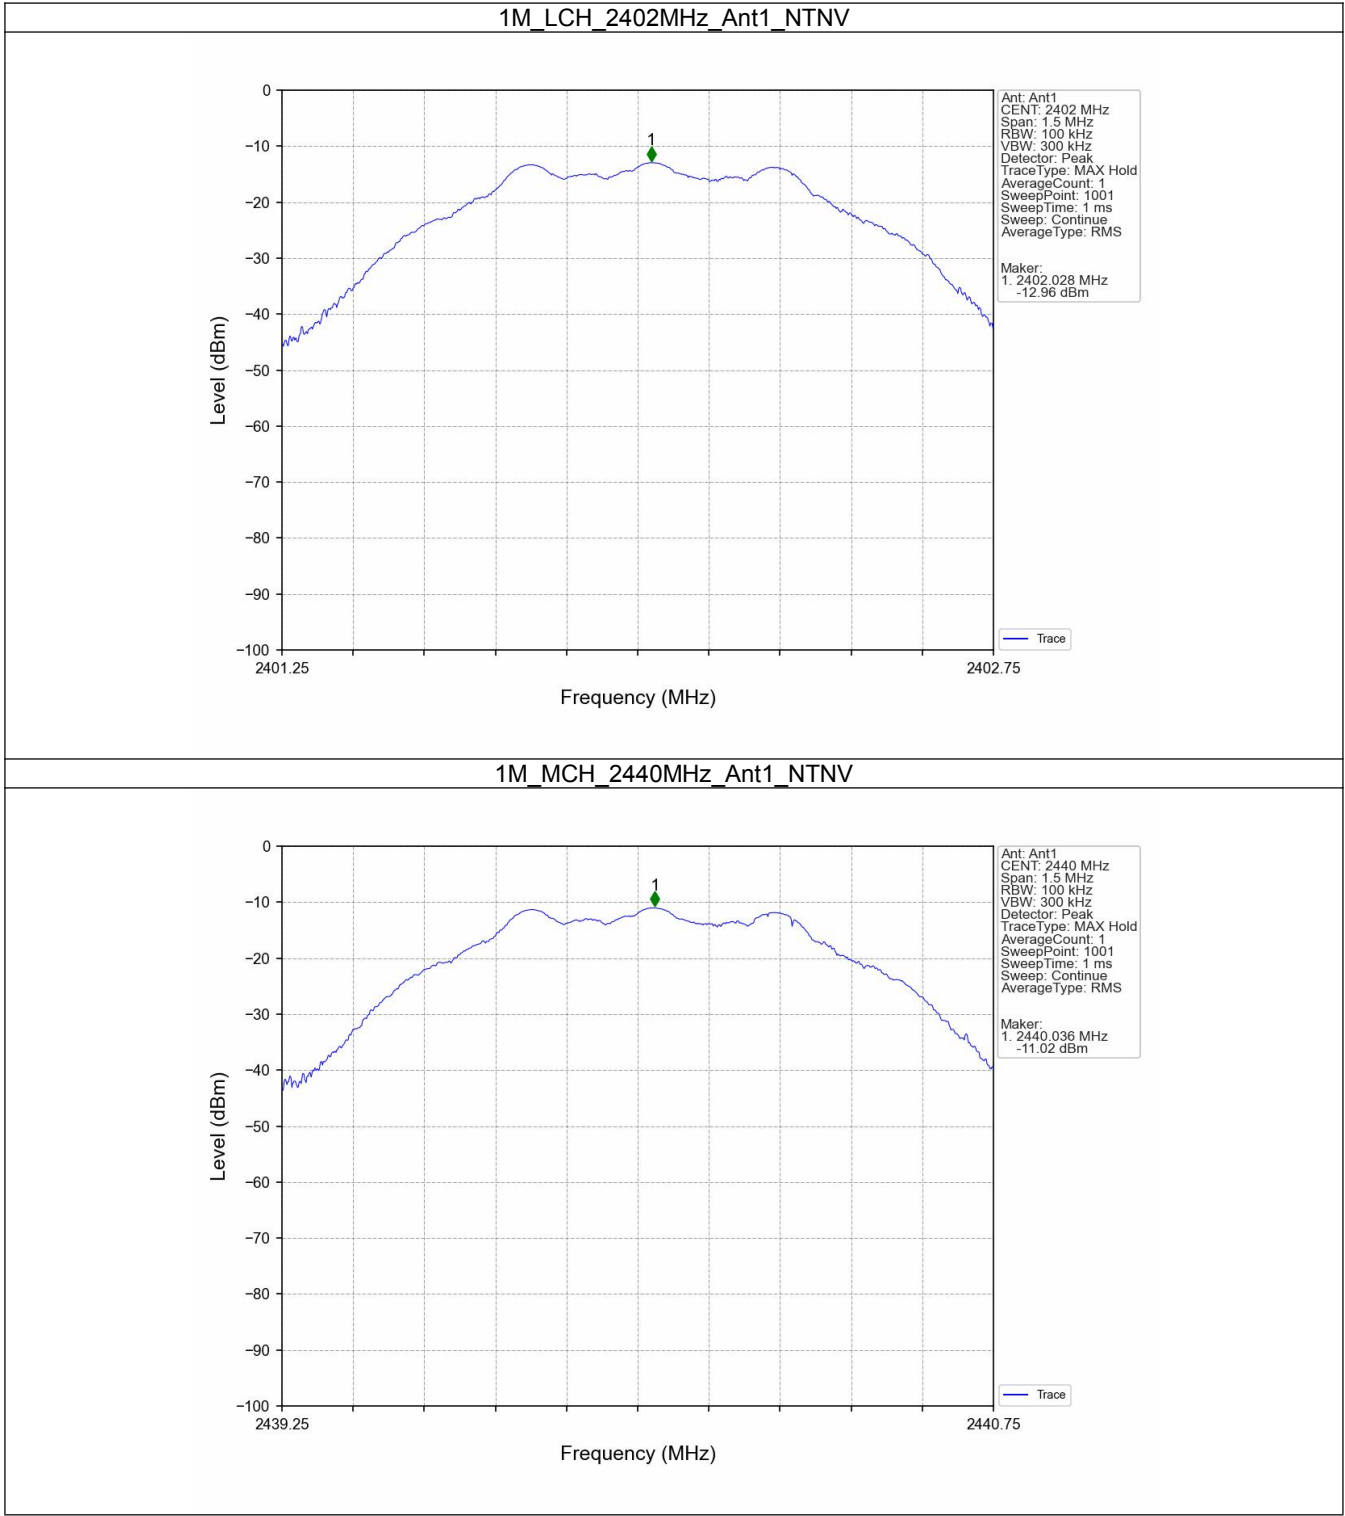


1M_HCH_2480MHz_Ant1_NTNV

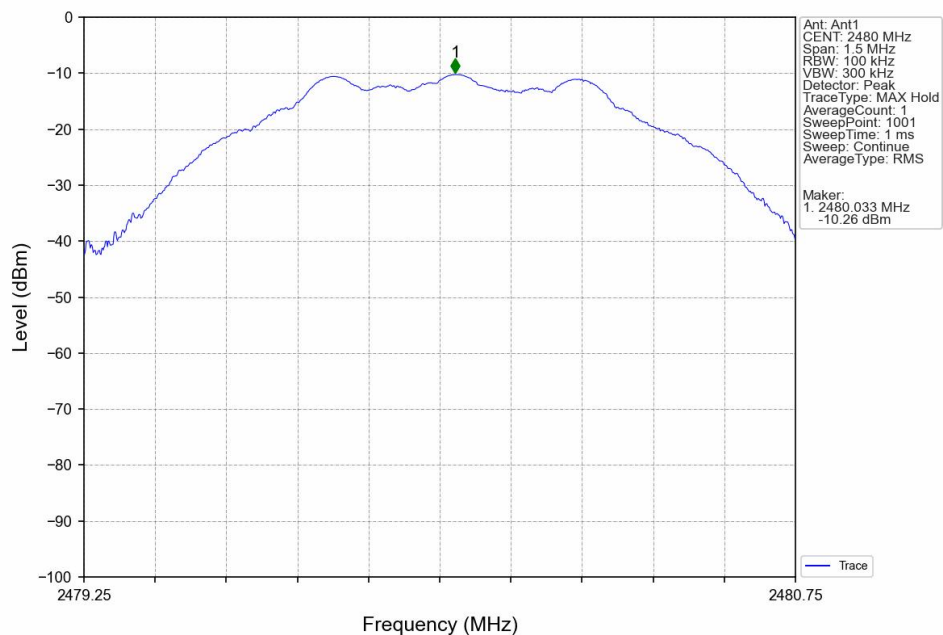


2M_LCH_2402MHz_Ant1_NTNV

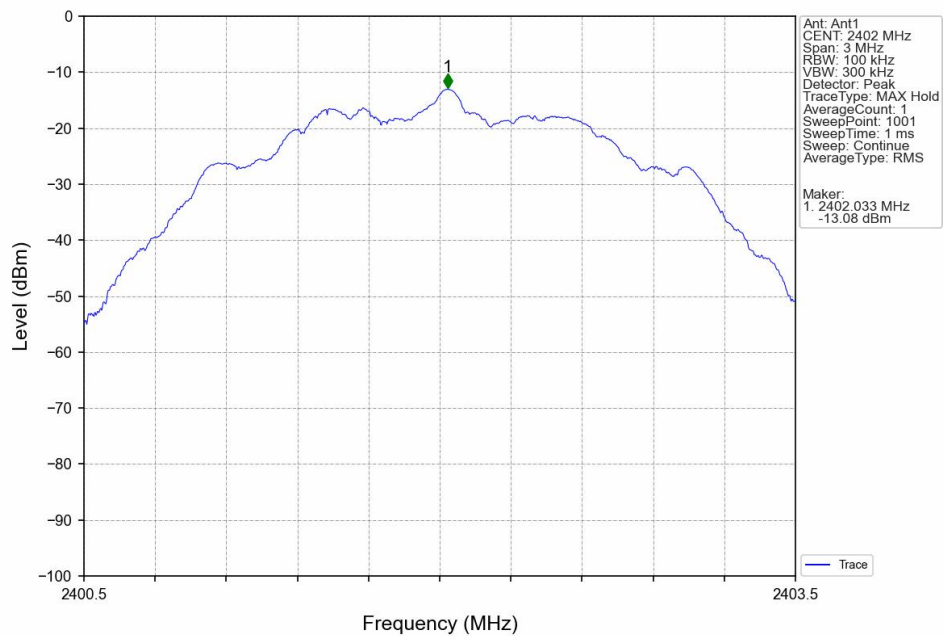

2M_MCH_2440MHz_Ant1_NTNV

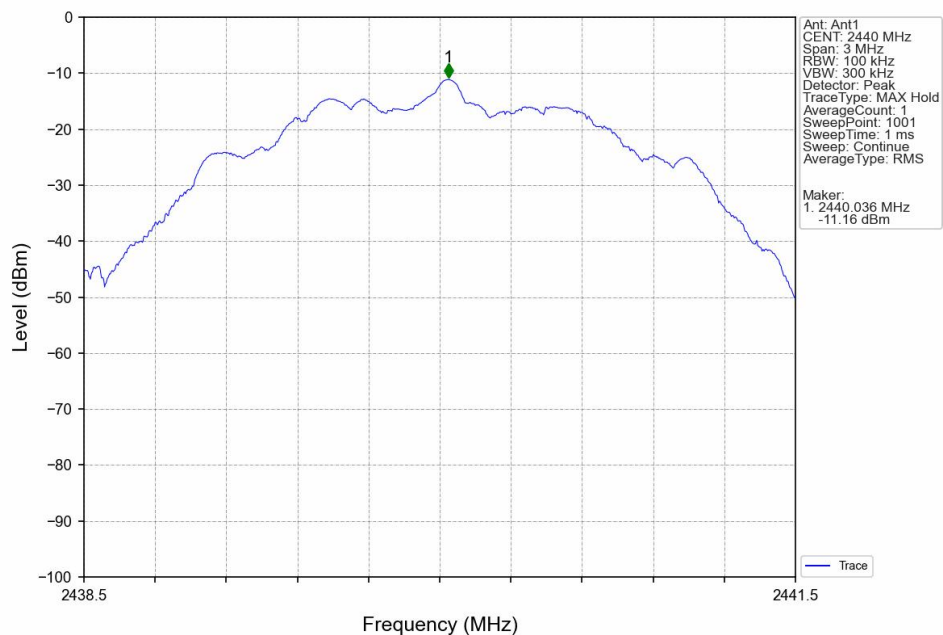

2M_HCH_2480MHz_Ant1_NTNV

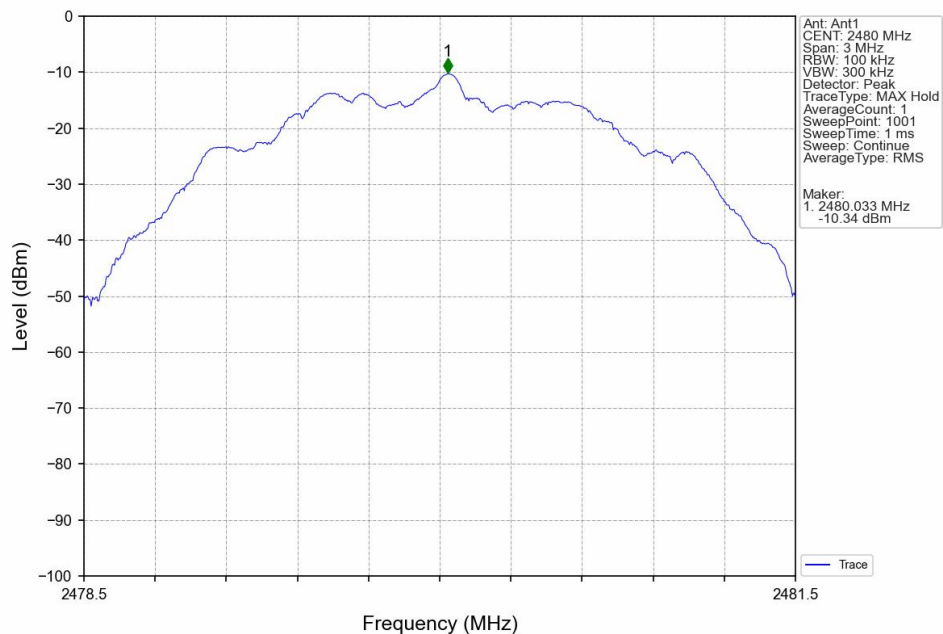

4. Unwanted Emissions In Non-restricted Frequency Bands

4.1 Test Result

4.1.1 Ref


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	-12.92
		2440	1	-10.94
		2480	1	-10.27
2M	SISO	2402	1	-13.10
		2440	1	-11.19
		2480	1	-10.36
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.				


4.1.2 CSE

Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	-10.27	-30.27	Pass
		2440	1	-10.27	-30.27	Pass
		2480	1	-10.27	-30.27	Pass
2M	SISO	2402	1	-10.36	-30.36	Pass
		2440	1	-10.36	-30.36	Pass
		2480	1	-10.36	-30.36	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020, the channel contains the maximum PSD level was used to establish the reference level.						


4.2 Test Graph

4.2.1 Ref

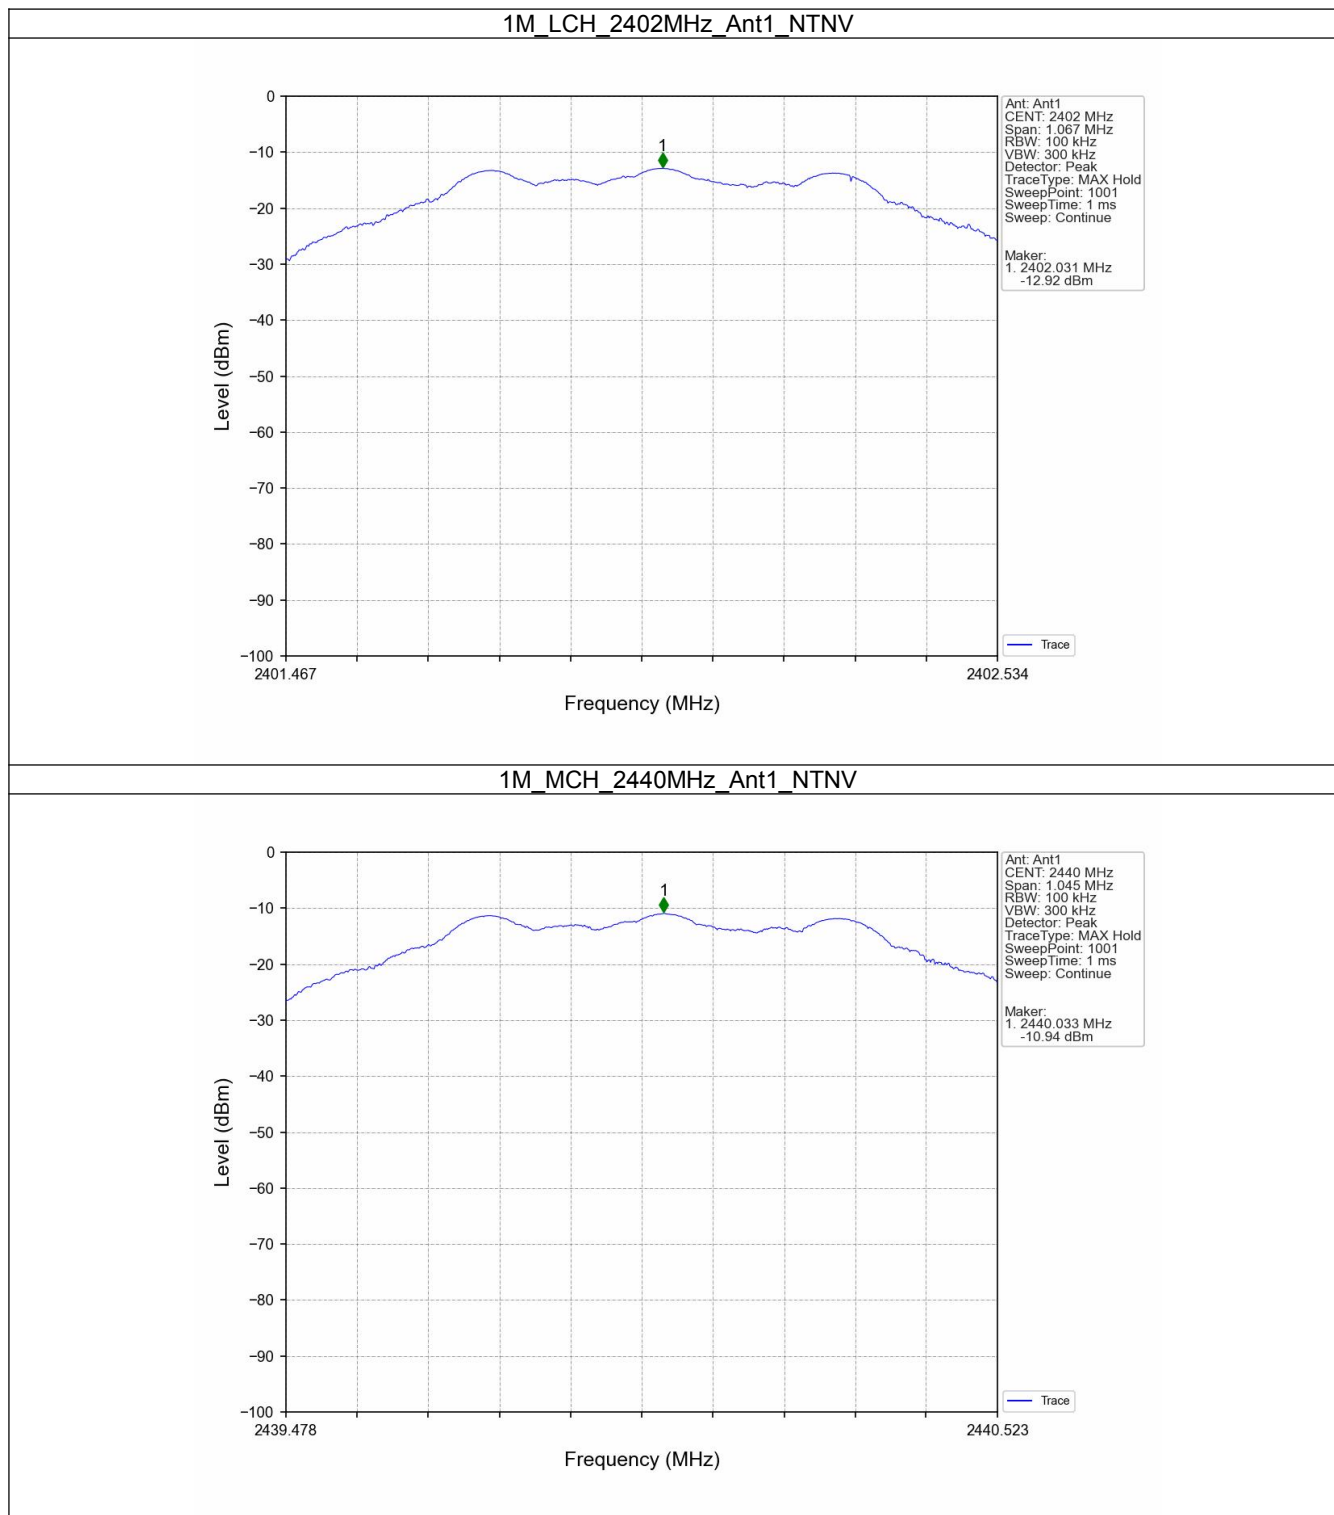


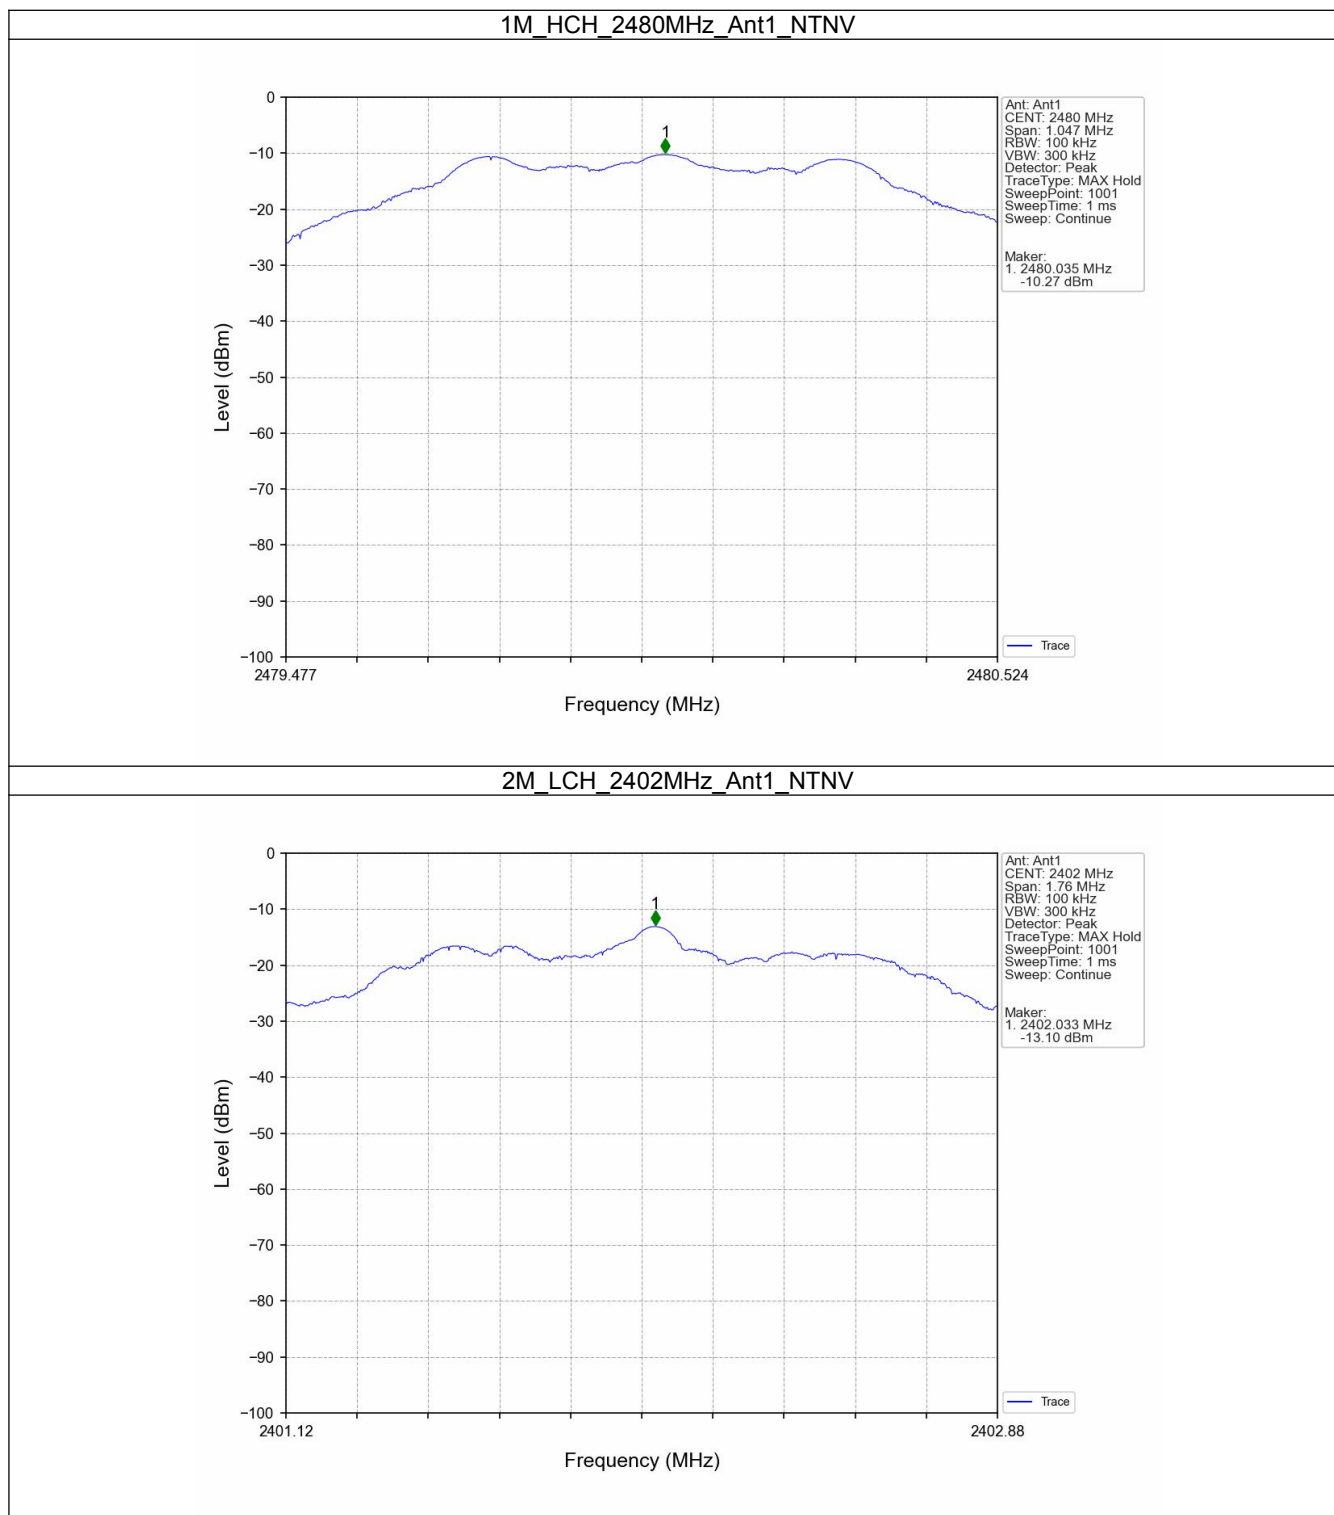


2M_MCH_2440MHz_Ant1_NTNV

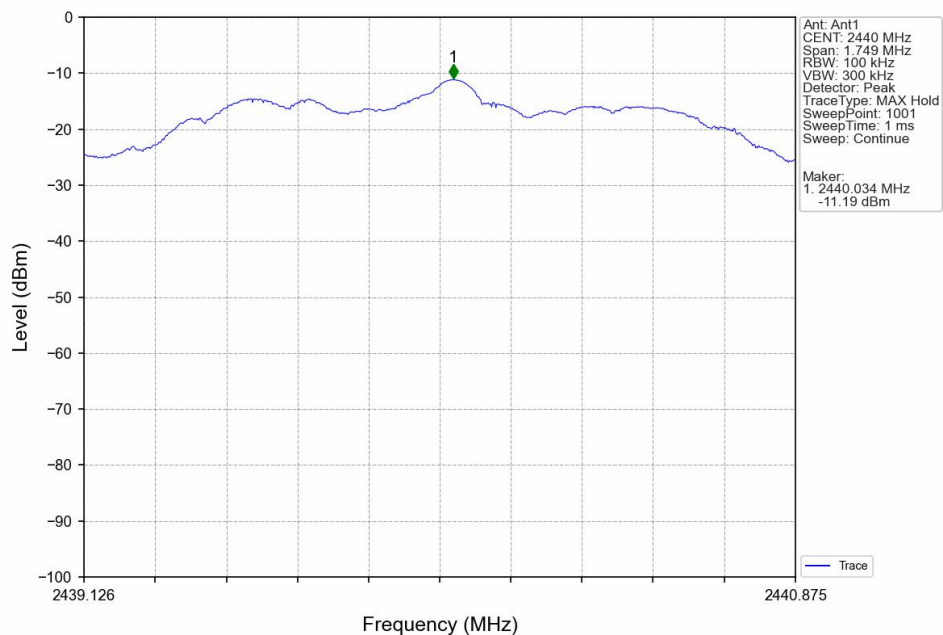



2M_HCH_2480MHz_Ant1_NTNV

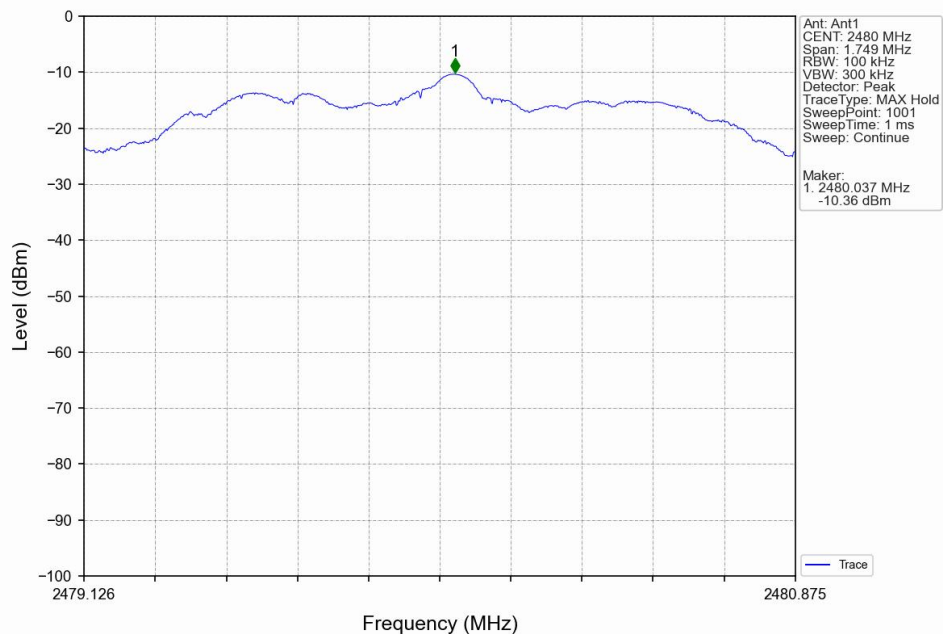


4.2.2 CSE

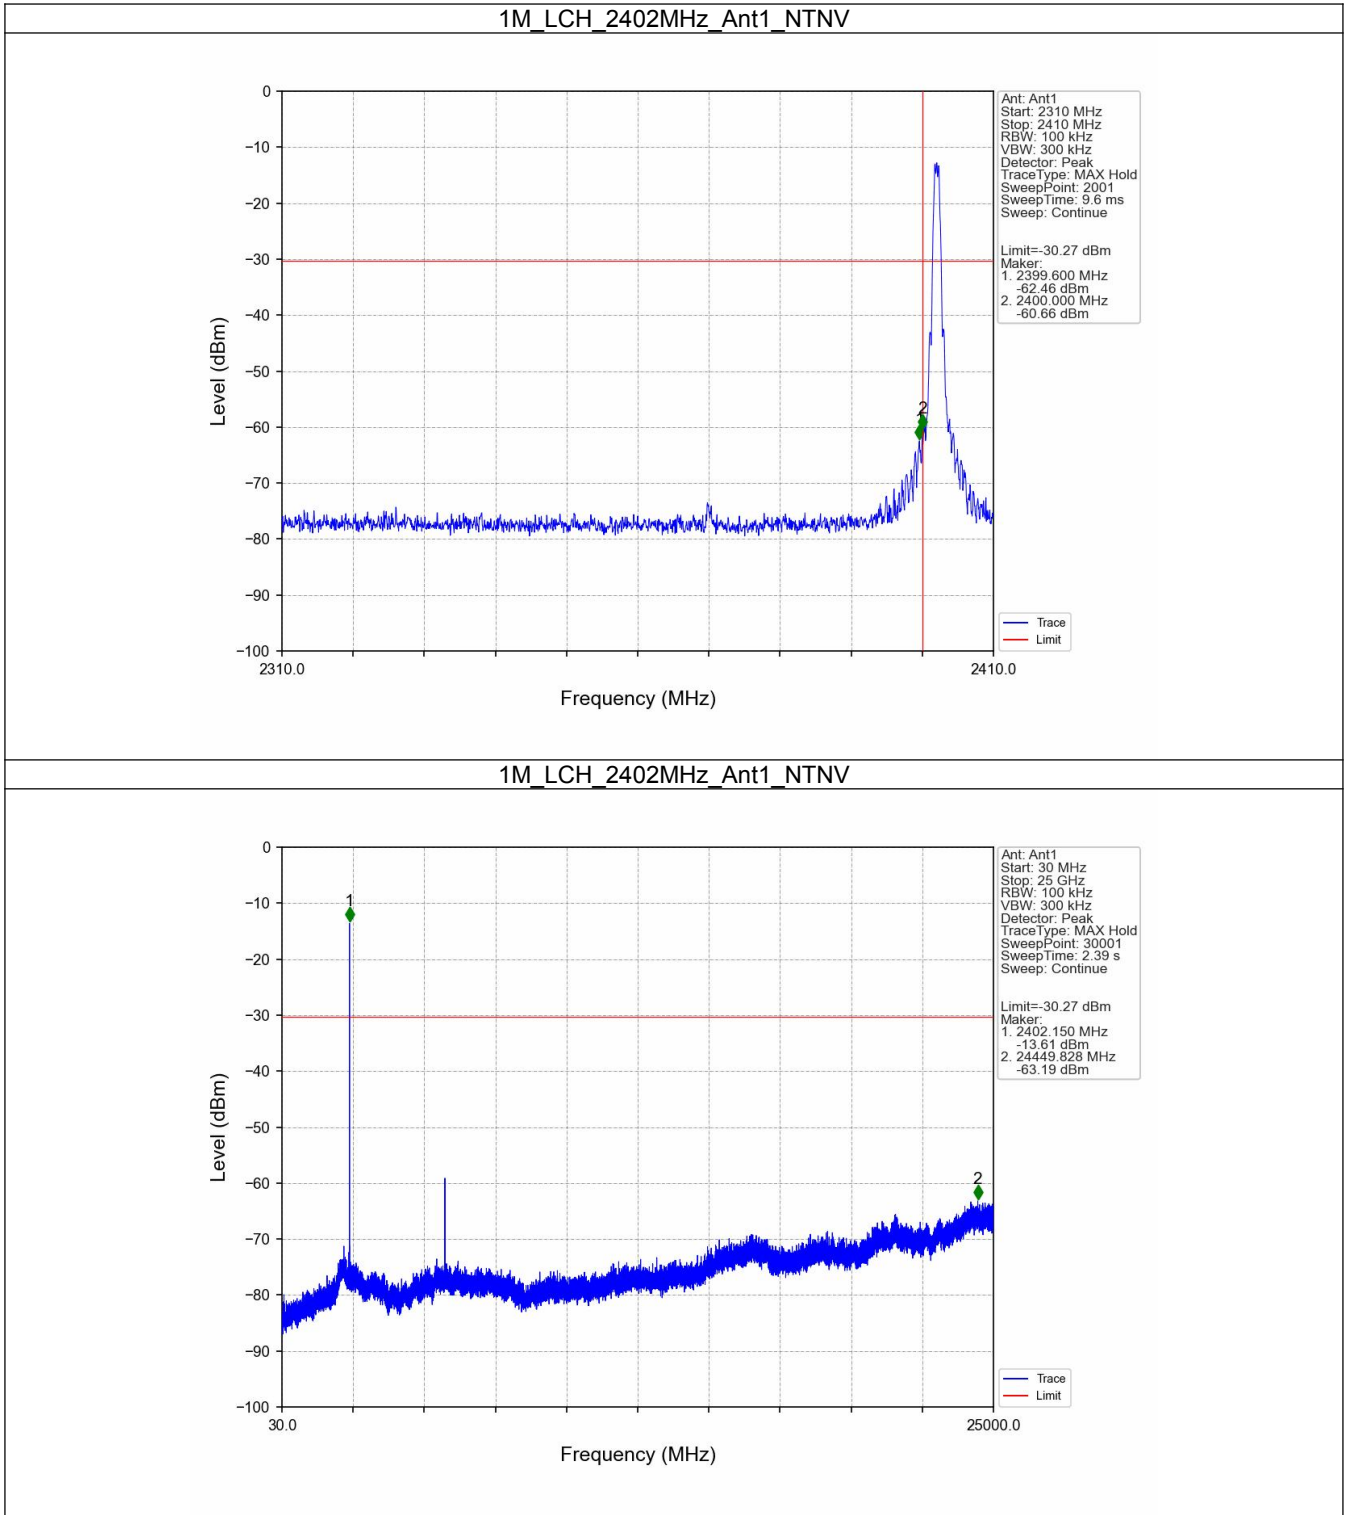

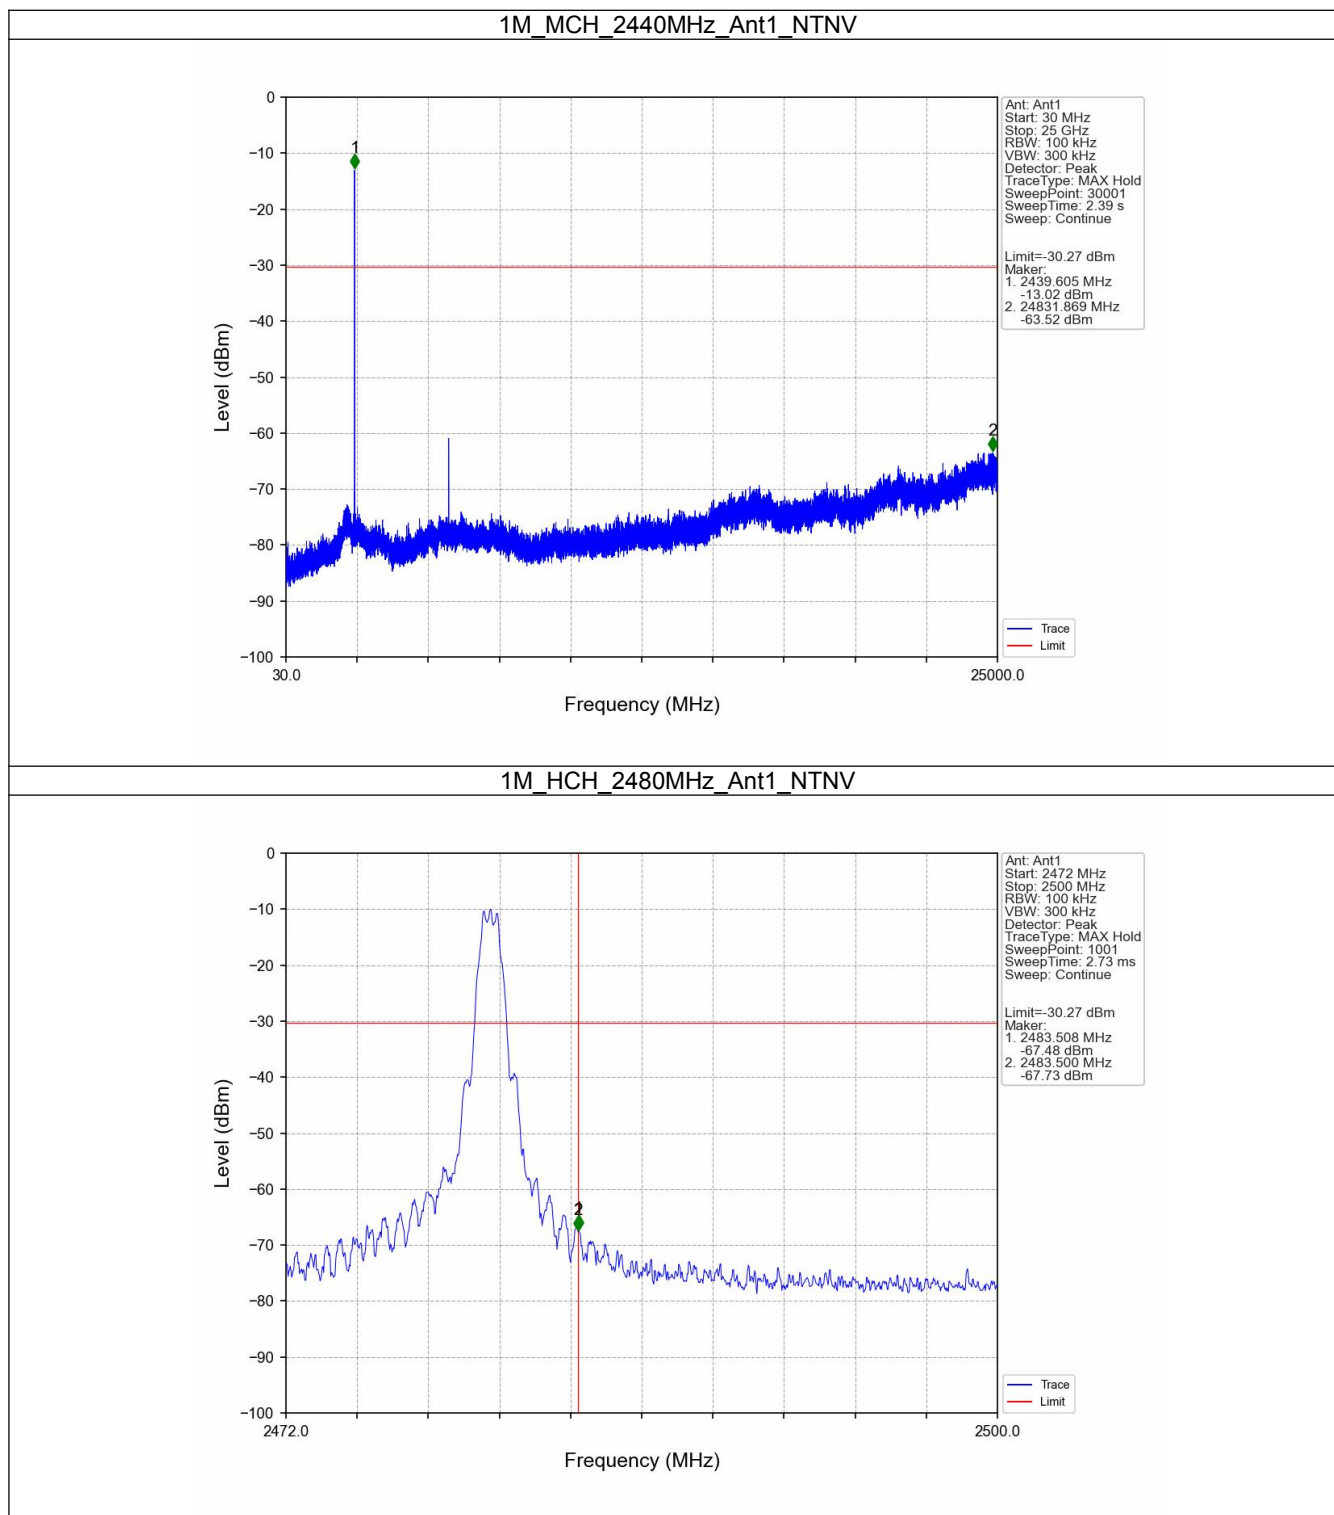


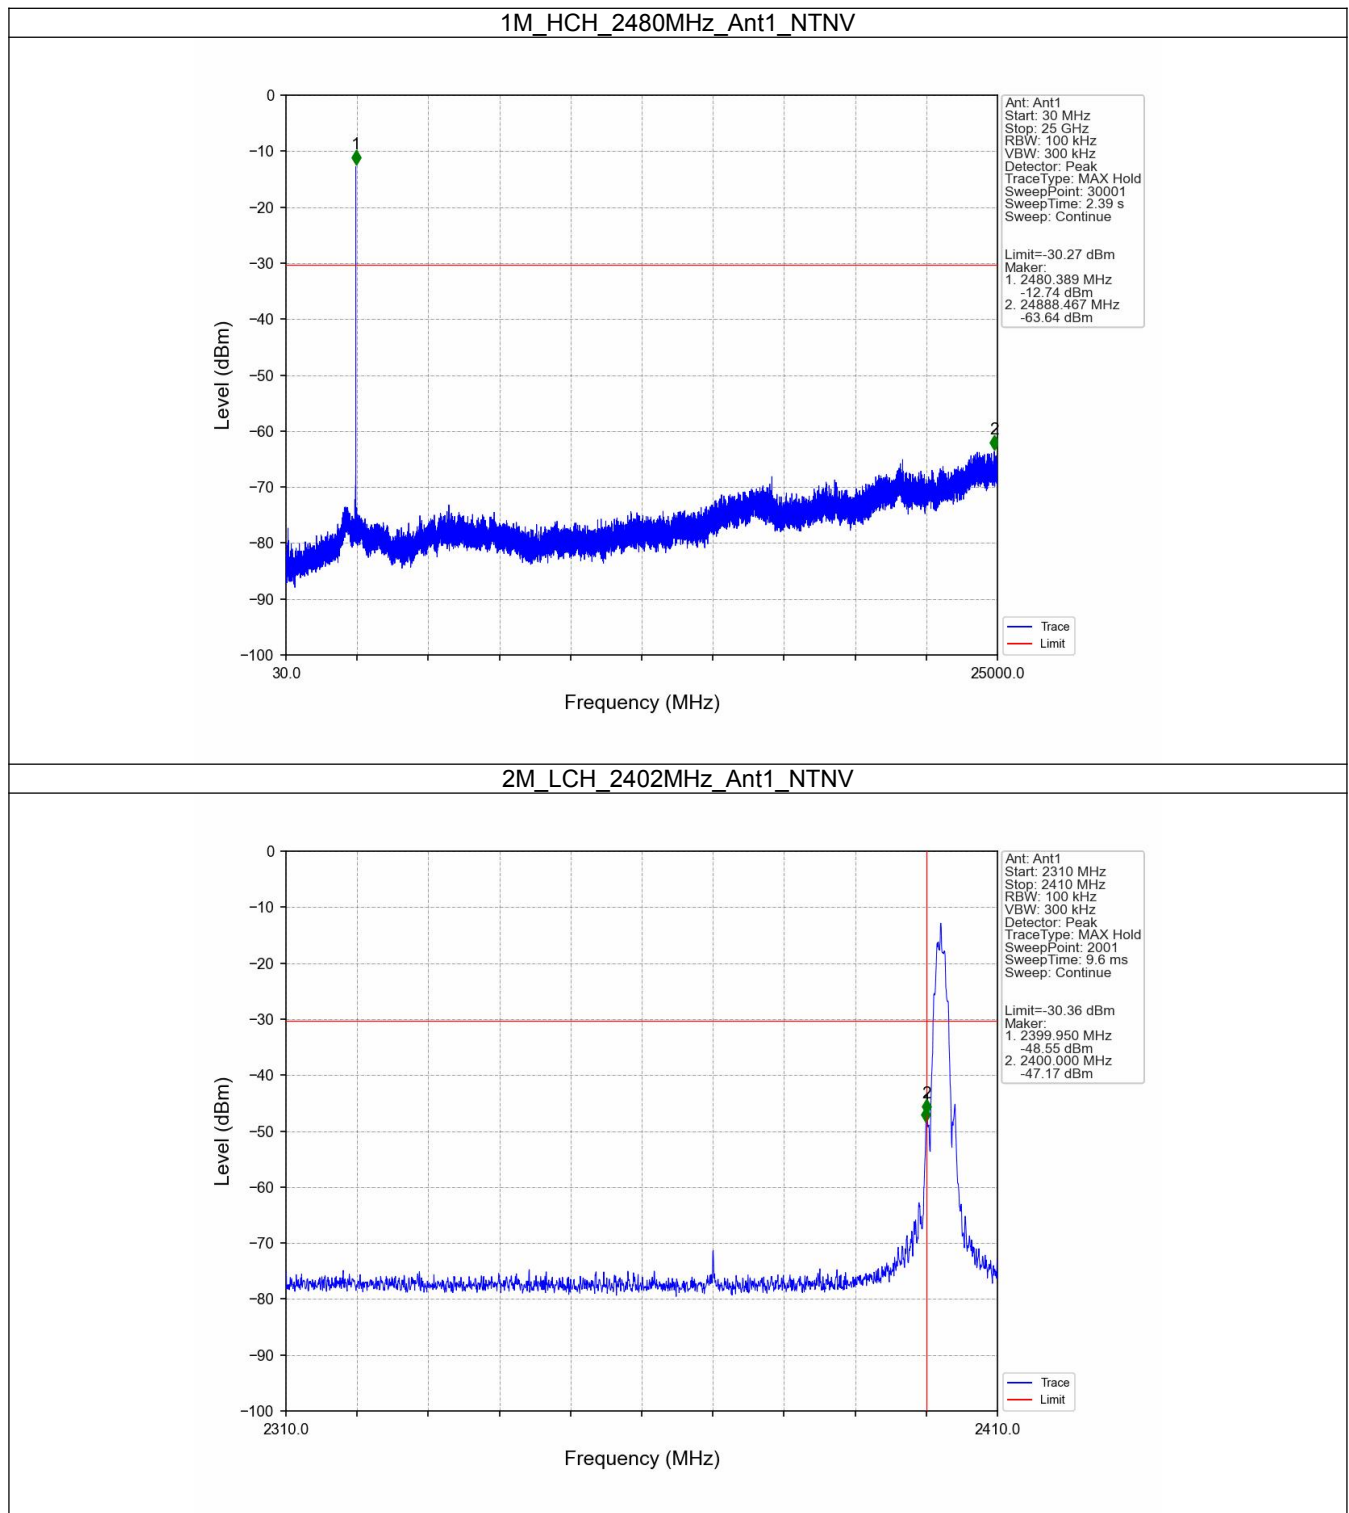


2M_LCH_2402MHz_Ant1_NTNV

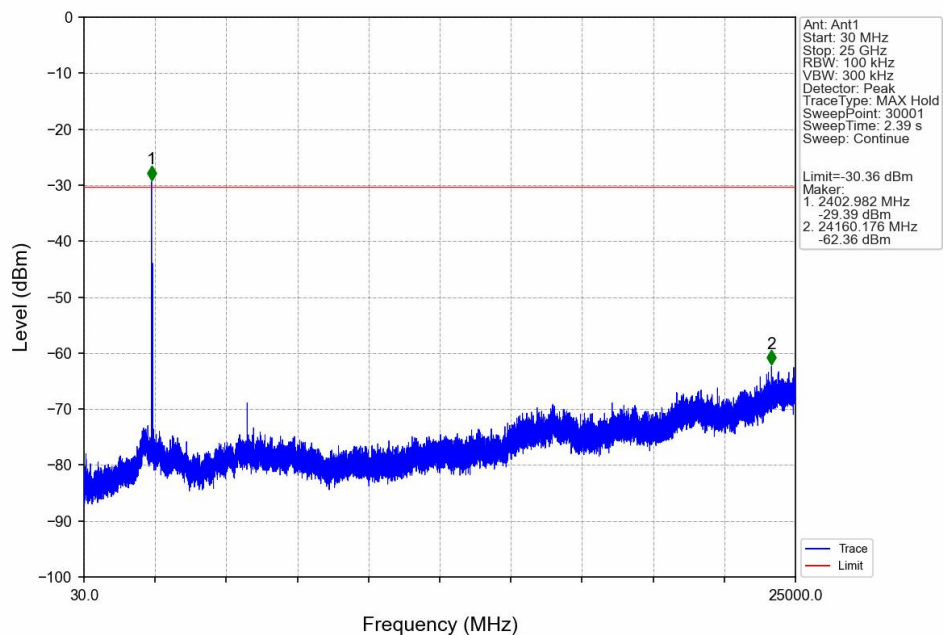

2M_MCH_2440MHz_Ant1_NTNV

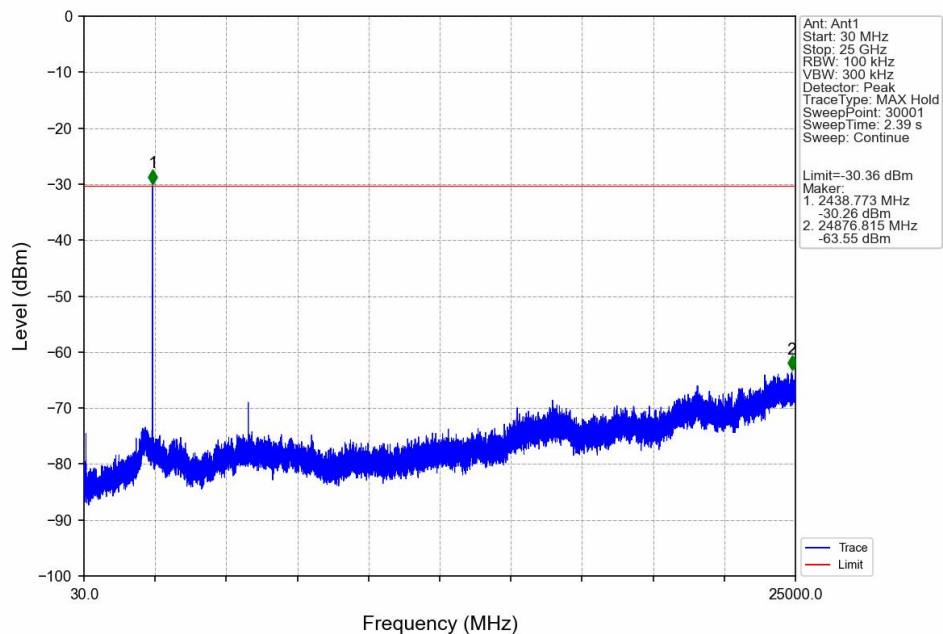

2M_HCH_2480MHz_Ant1_NTNV

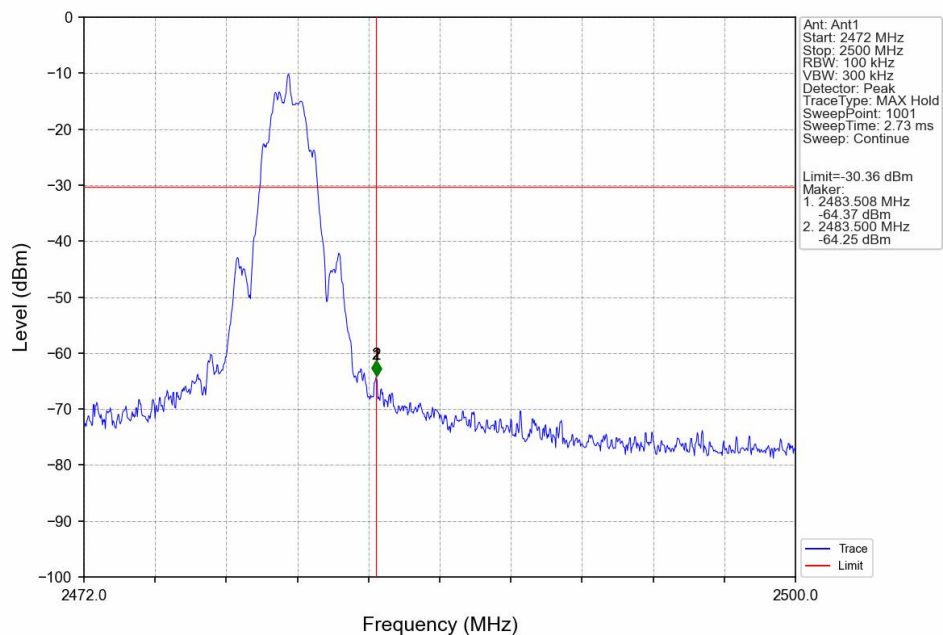

2M_HCH_2480MHz_Ant1_NTNV

