


Appendix D_BR EDR-Left earphone

Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	Ant1	0.95	0.95	21	Pass
NVNT	1-DH5	2441	Ant1	1.09	1.09	21	Pass
NVNT	1-DH5	2480	Ant1	0.93	0.93	21	Pass
NVNT	2-DH5	2402	Ant1	1.79	1.79	21	Pass
NVNT	2-DH5	2441	Ant1	1.91	1.91	21	Pass
NVNT	2-DH5	2480	Ant1	1.71	1.71	21	Pass
NVNT	3-DH5	2402	Ant1	2.19	2.19	21	Pass
NVNT	3-DH5	2441	Ant1	2.25	2.25	21	Pass
NVNT	3-DH5	2480	Ant1	2.05	2.05	21	Pass


Test Graphs


Power NVNT 1-DH5 2402MHz Ant1


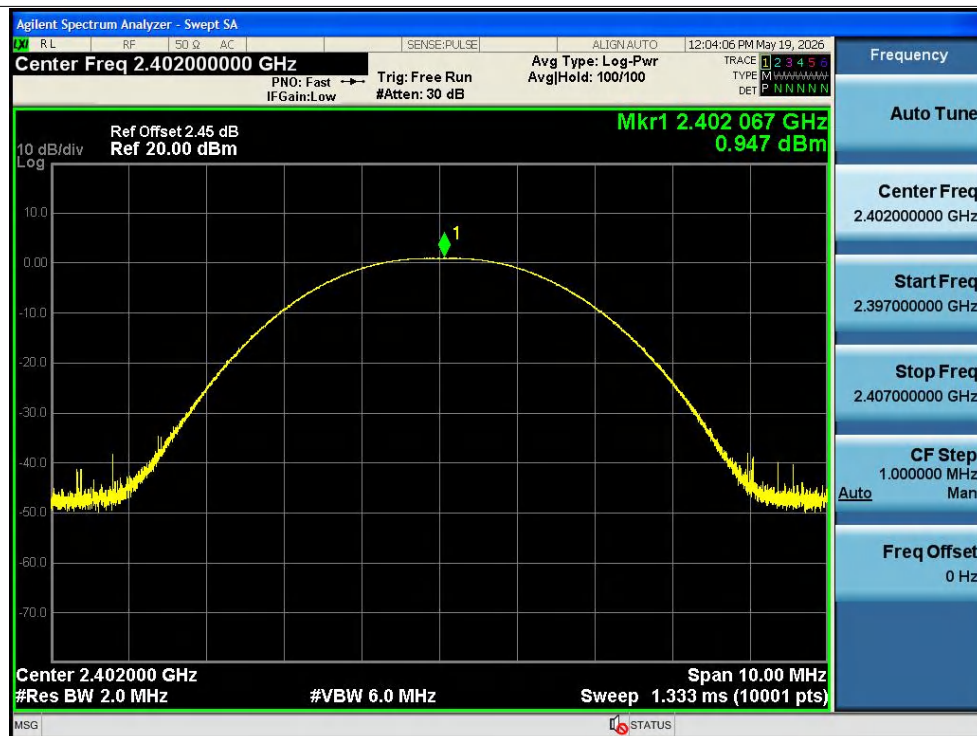



Power NVNT 1-DH5 2441MHz Ant1

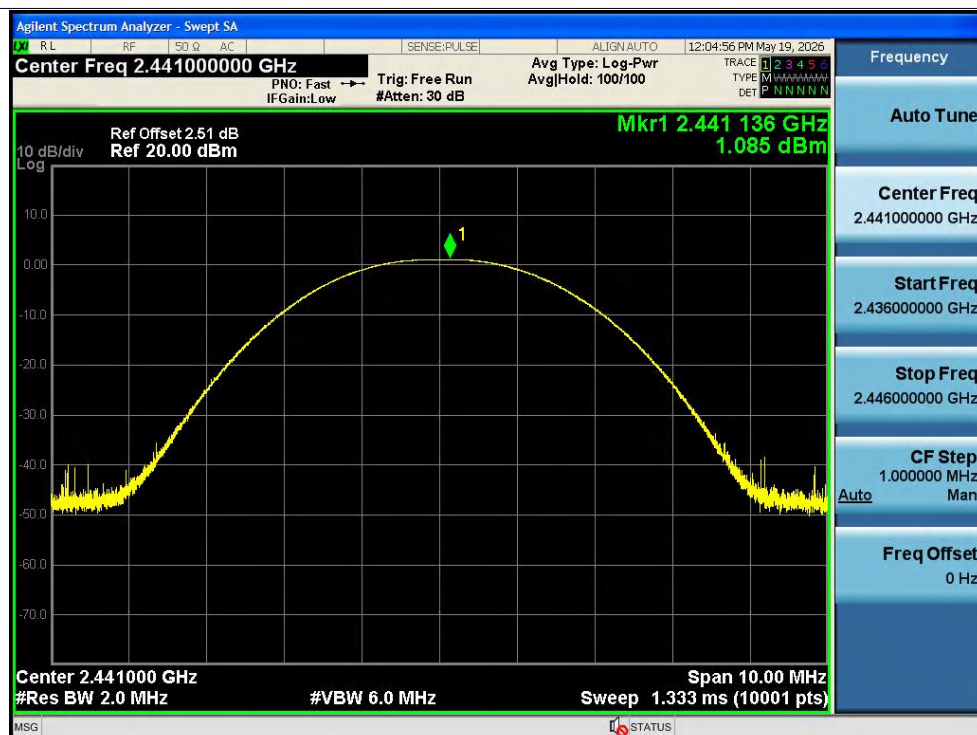

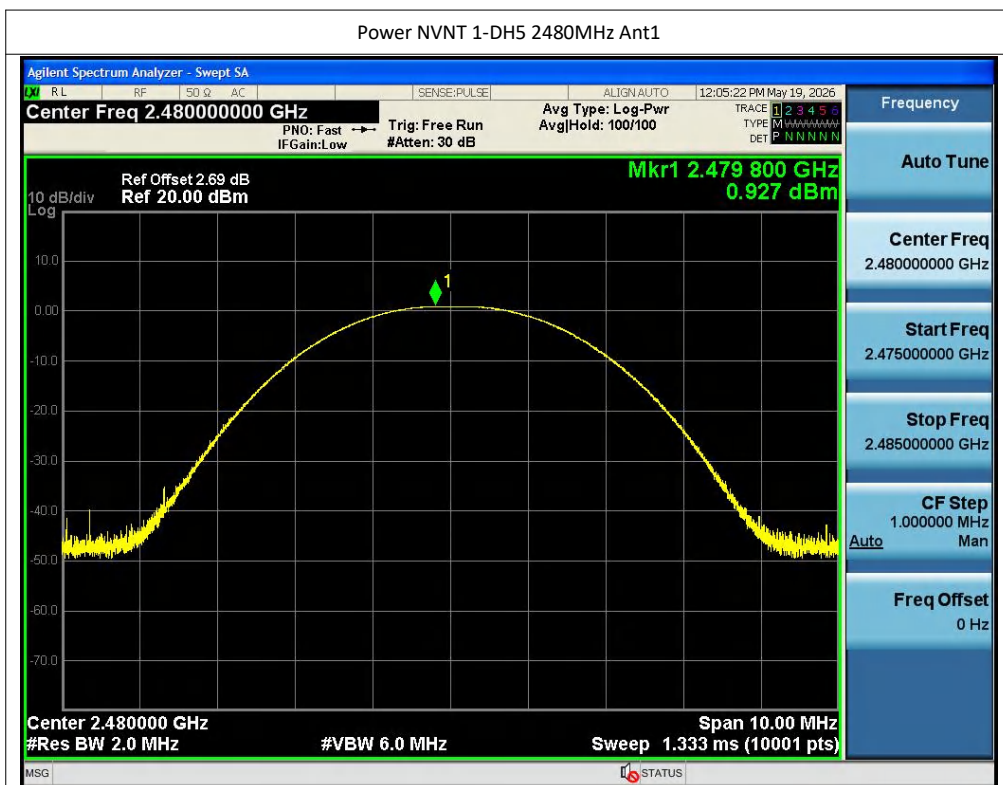

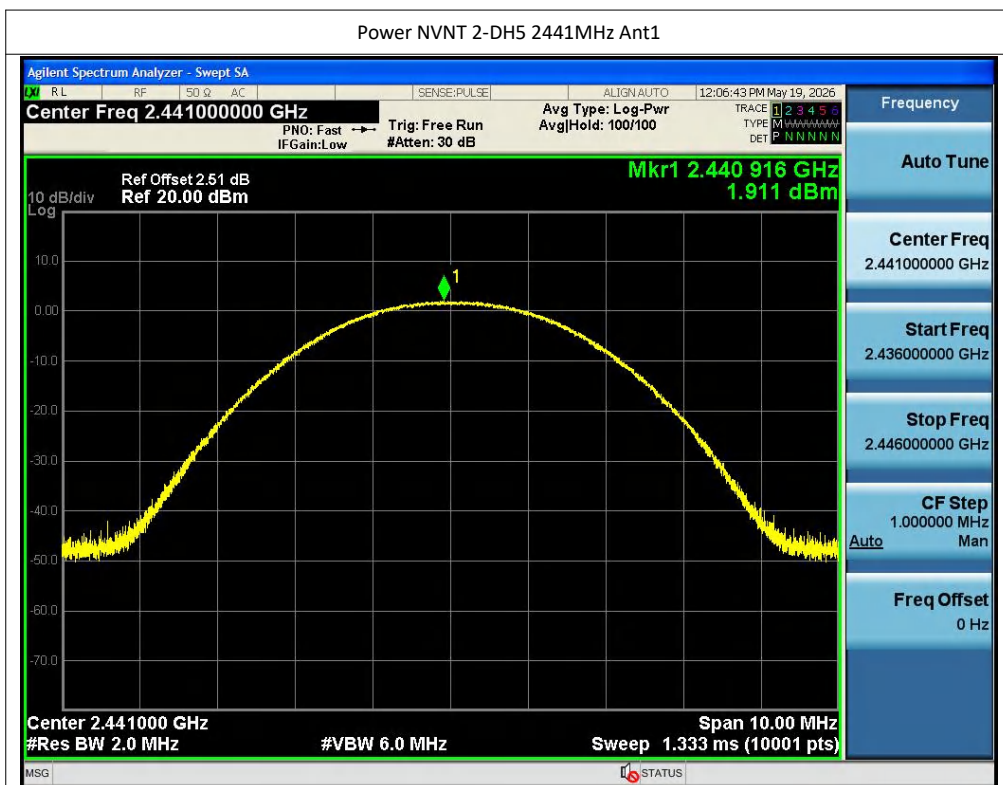

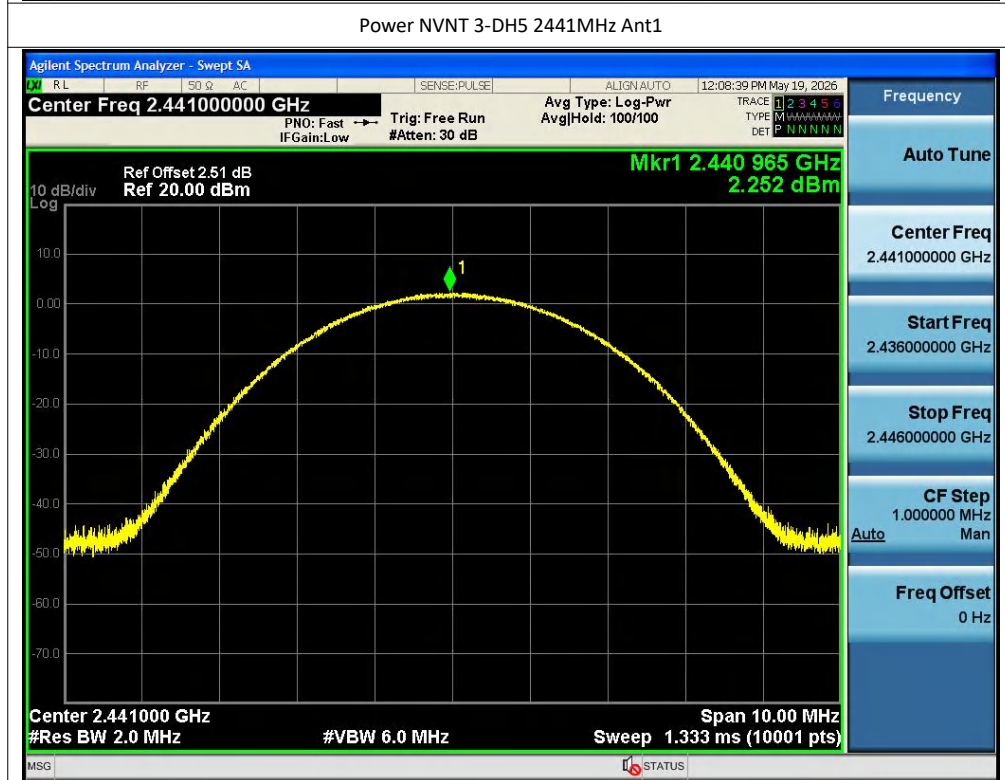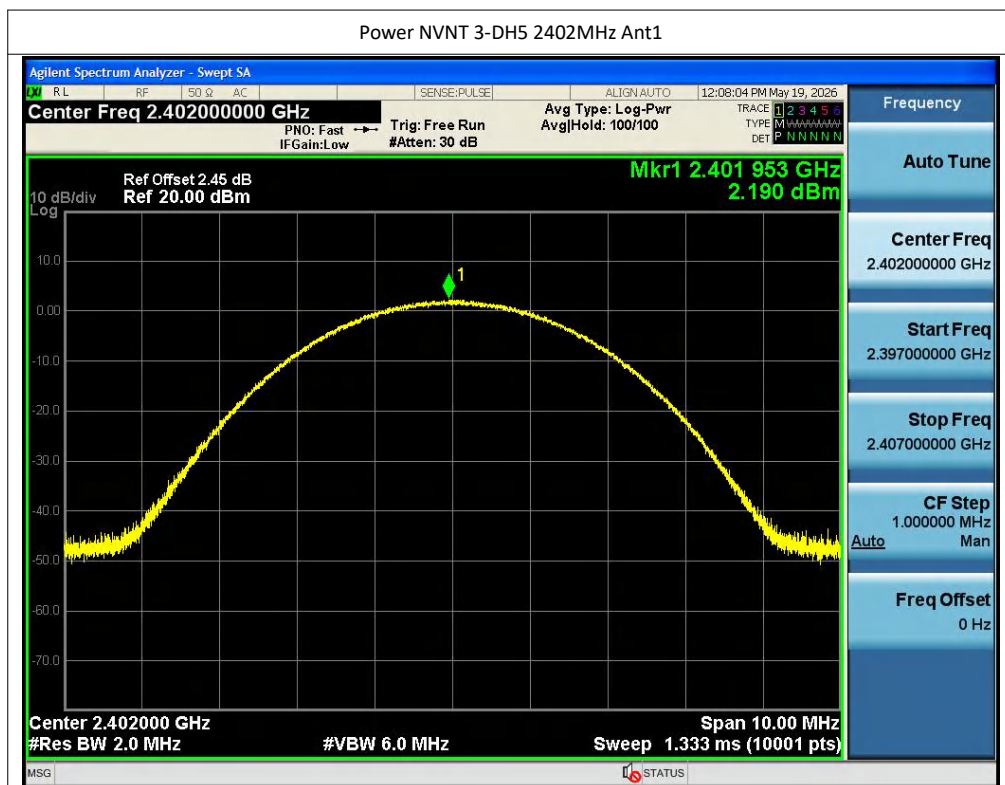

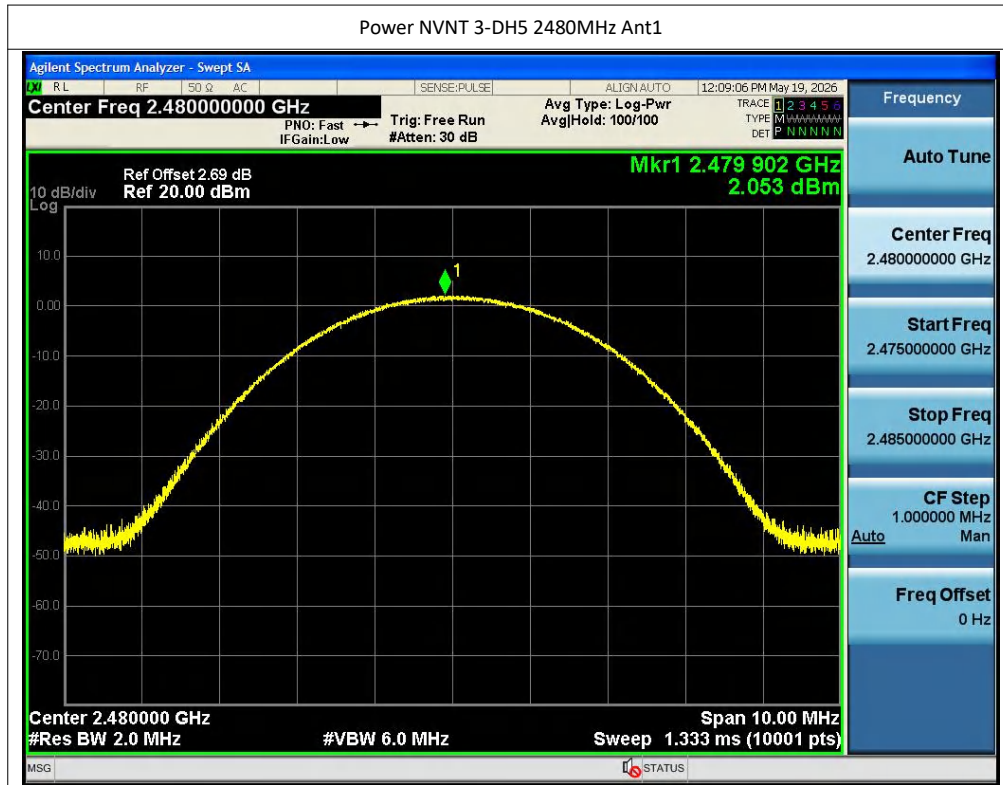

-20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	Ant1	1.009	Pass
NVNT	1-DH5	2441	Ant1	1.001	Pass
NVNT	1-DH5	2480	Ant1	1.016	Pass
NVNT	2-DH5	2402	Ant1	1.32	Pass
NVNT	2-DH5	2441	Ant1	1.32	Pass
NVNT	2-DH5	2480	Ant1	1.312	Pass
NVNT	3-DH5	2402	Ant1	1.302	Pass
NVNT	3-DH5	2441	Ant1	1.295	Pass
NVNT	3-DH5	2480	Ant1	1.3	Pass

Test Graphs

-20dB Bandwidth NVNT 1-DH5 2402MHz Ant1



-20dB Bandwidth NVNT 1-DH5 2441MHz Ant1




-20dB Bandwidth NVNT 1-DH5 2480MHz Ant1



-20dB Bandwidth NVNT 2-DH5 2402MHz Ant1



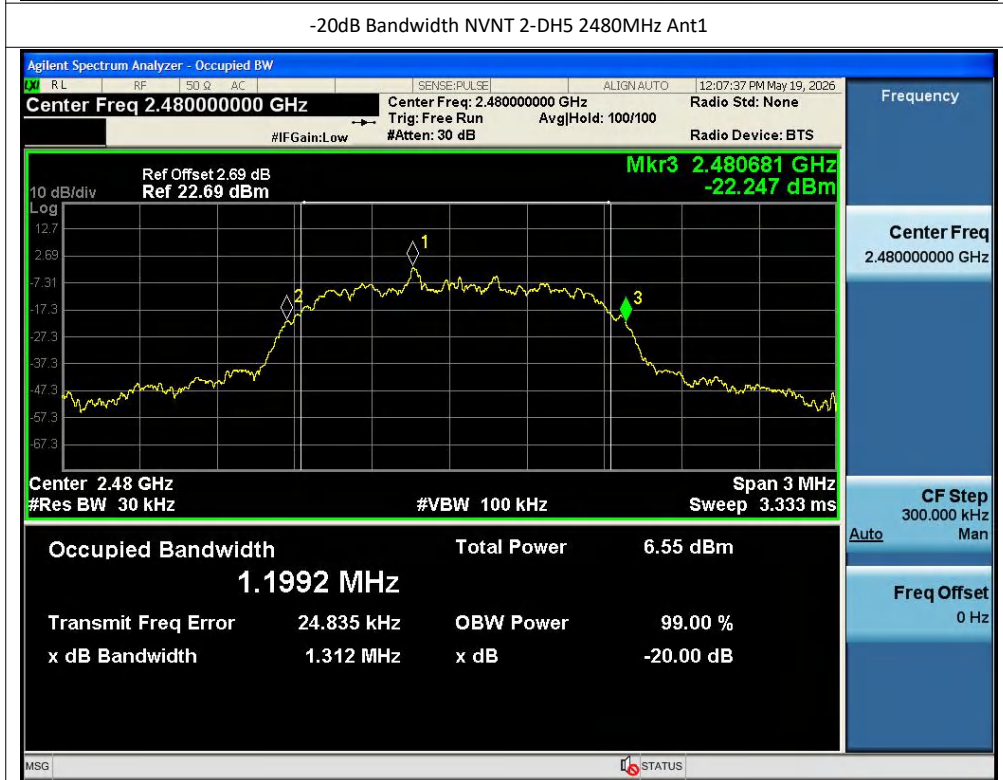


-20dB Bandwidth NVNT 3-DH5 2402MHz Ant1



-20dB Bandwidth NVNT 3-DH5 2441MHz Ant1



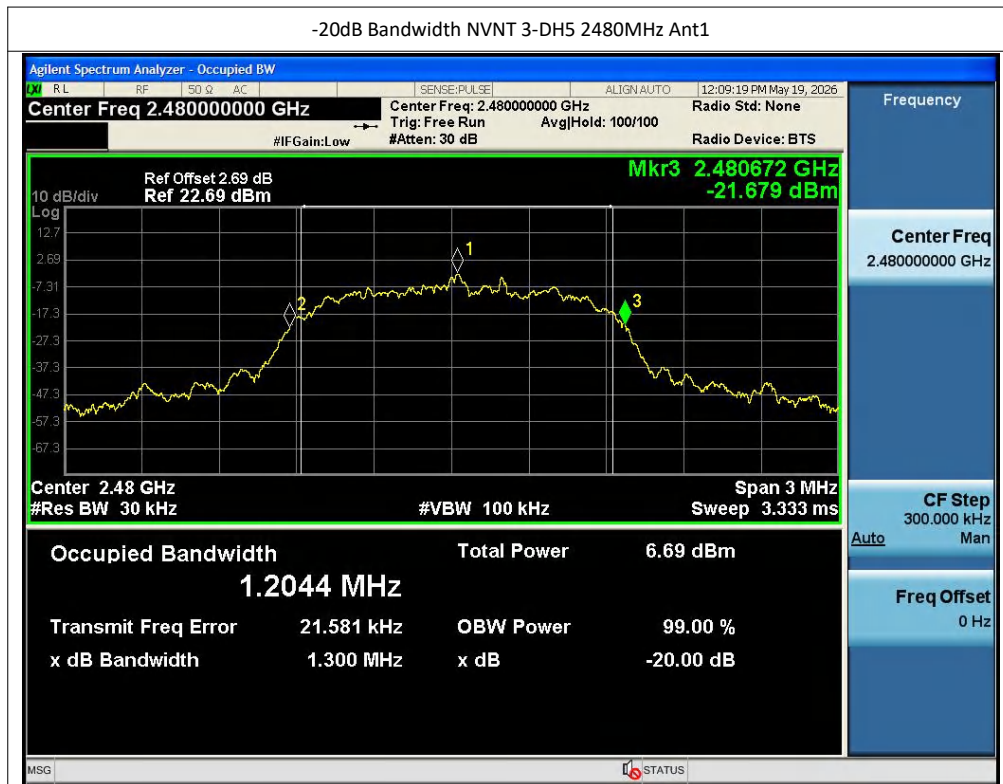

Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH5	2402	Ant1	0.89563
NVNT	1-DH5	2441	Ant1	0.89204
NVNT	1-DH5	2480	Ant1	0.9009
NVNT	2-DH5	2402	Ant1	1.1981
NVNT	2-DH5	2441	Ant1	1.1959
NVNT	2-DH5	2480	Ant1	1.1913
NVNT	3-DH5	2402	Ant1	1.198
NVNT	3-DH5	2441	Ant1	1.2051
NVNT	3-DH5	2480	Ant1	1.2108


Test Graphs



OBW NVNT 1-DH5 2402MHz Ant1





OBW NVNT 1-DH5 2441MHz Ant1



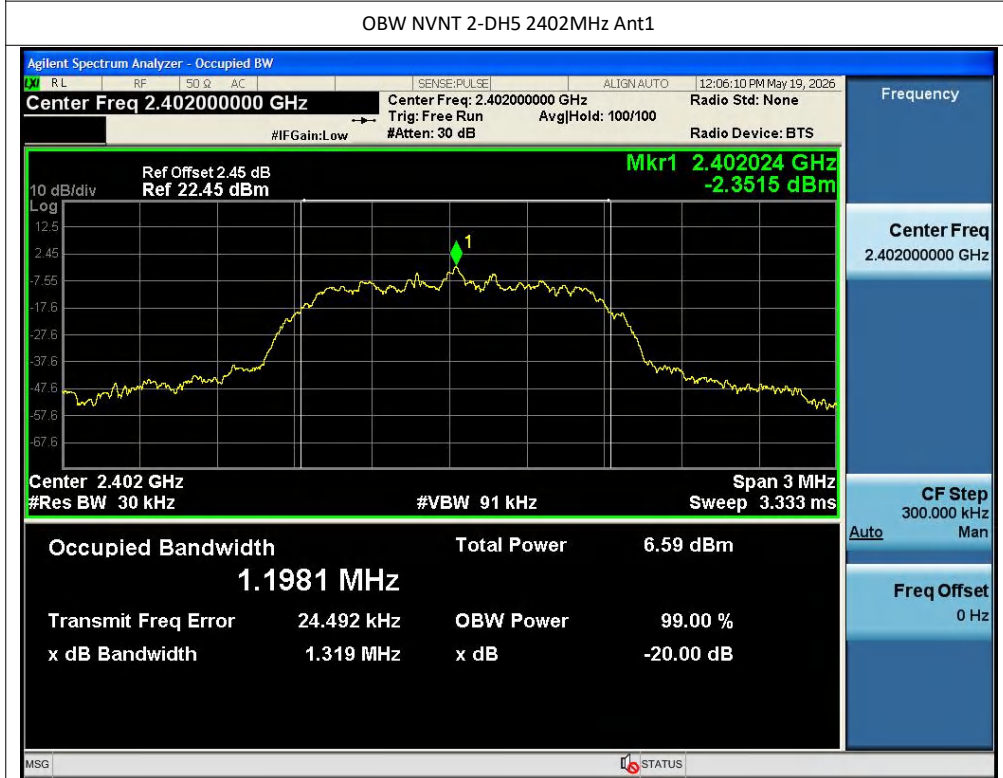

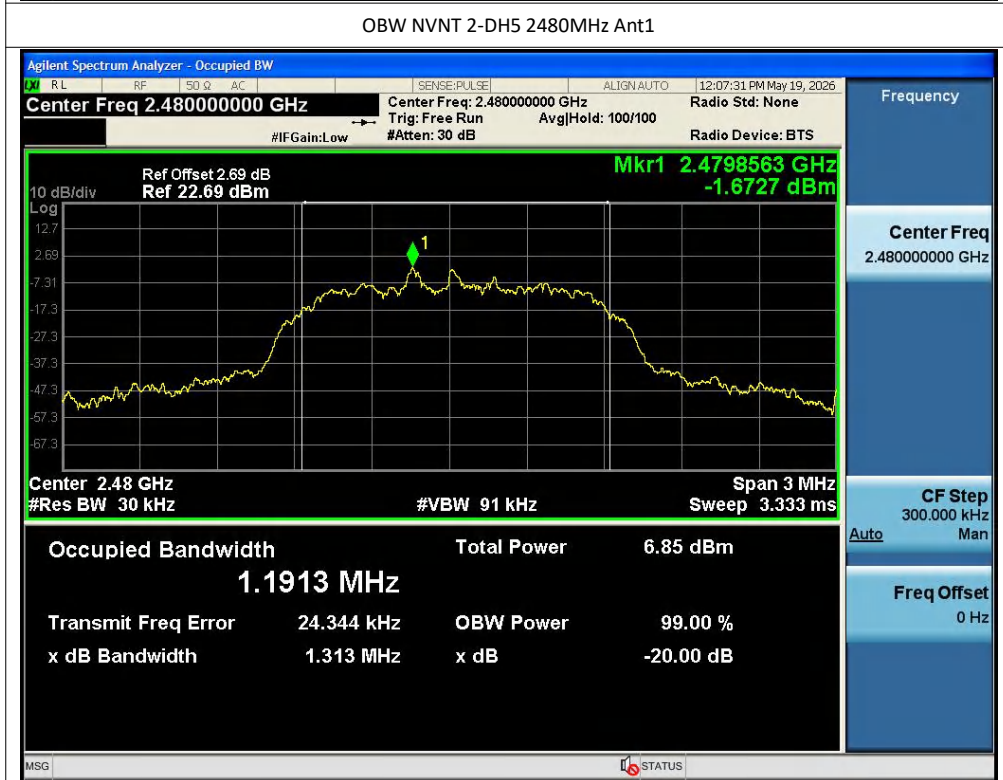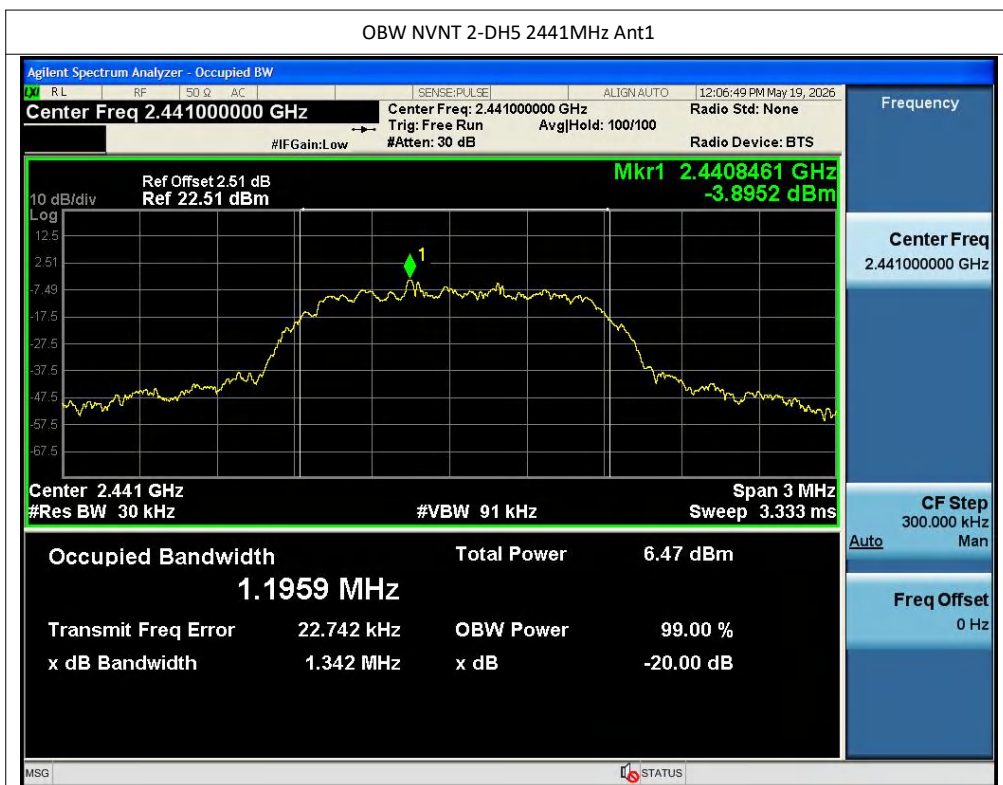

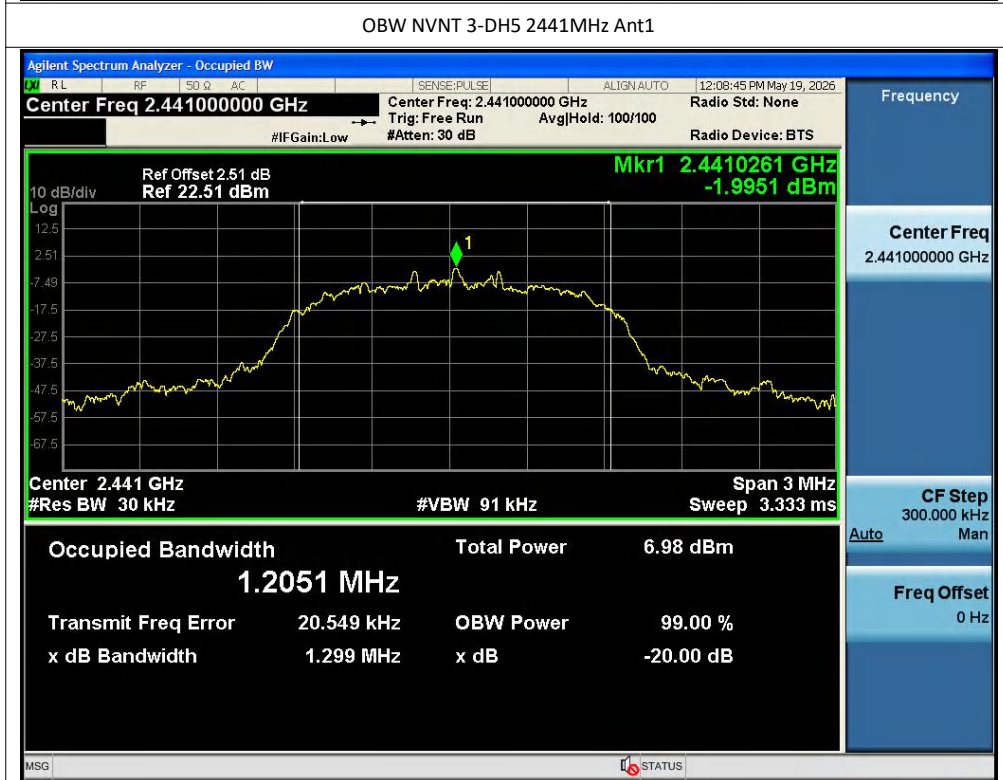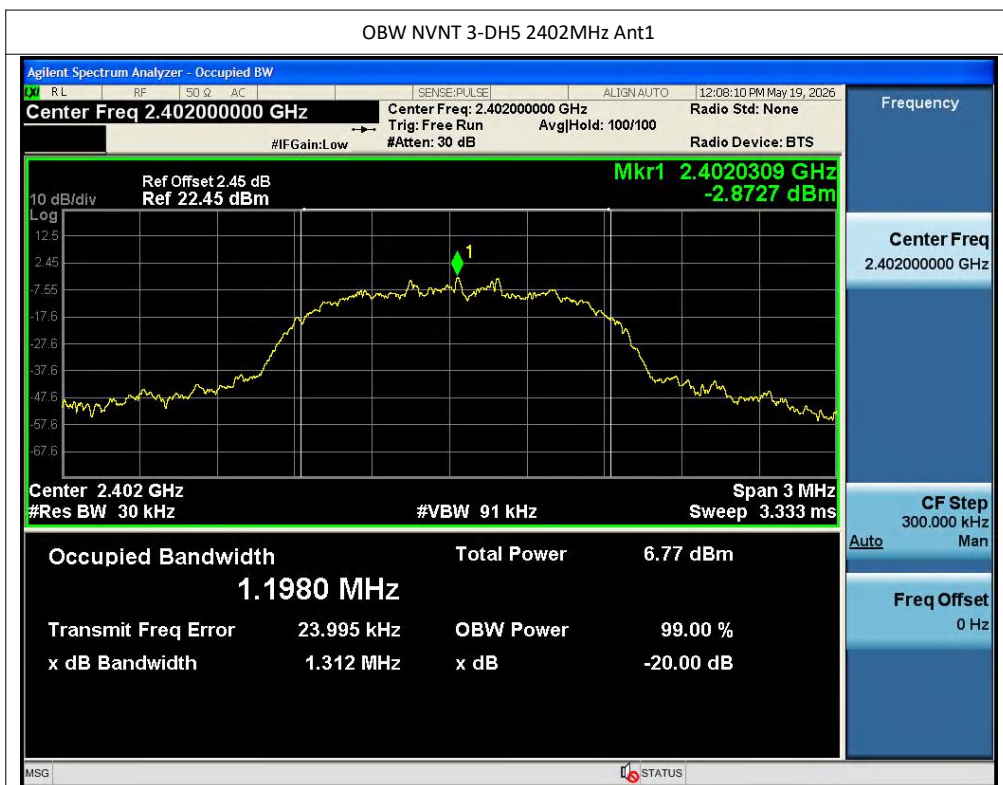



Carrier Frequencies Separation


Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	Ant1	2402.018	2403.018	1	0.673	Pass
NVNT	2-DH5	Ant1	2402.024	2403.026	1.002	0.88	Pass
NVNT	3-DH5	Ant1	2401.988	2403.168	1.18	0.868	Pass


Test Graphs

CFS NVNT 1-DH5 2402MHz Ant1



CFS NVNT 2-DH5 2402MHz Ant1

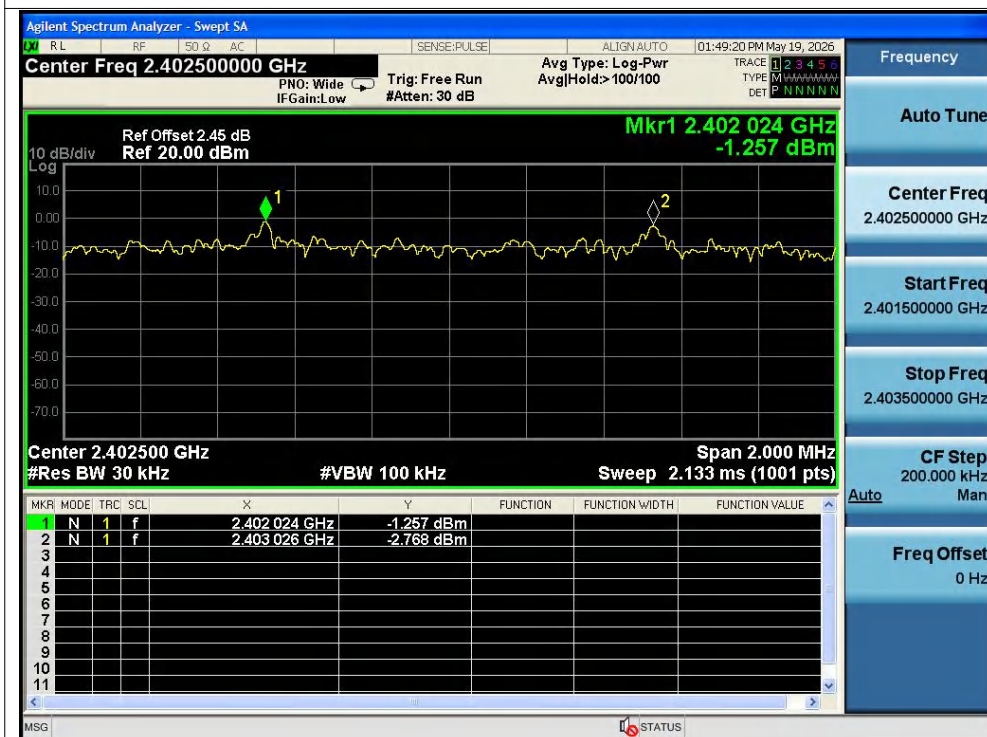

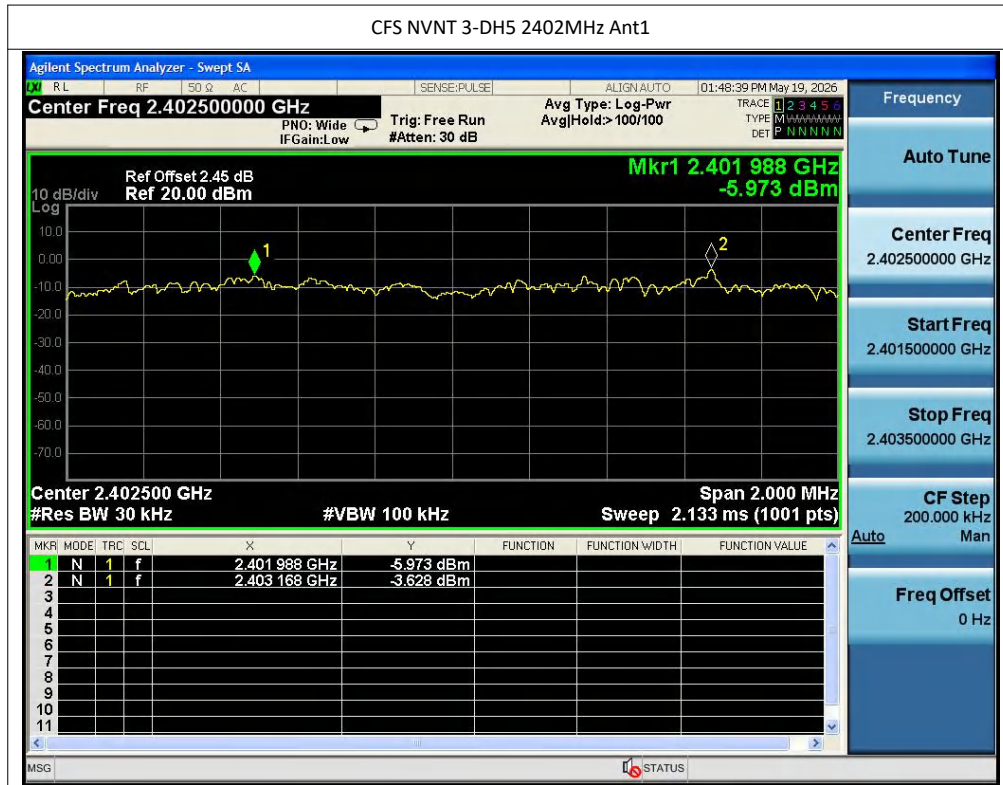


Number of Hopping Channel


Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH5	Ant1	79	15	Pass
NVNT	2-DH5	Ant1	79	15	Pass
NVNT	3-DH5	Ant1	79	15	Pass


Test Graphs

Hopping No. NVNT 1-DH5 2402MHz Ant1

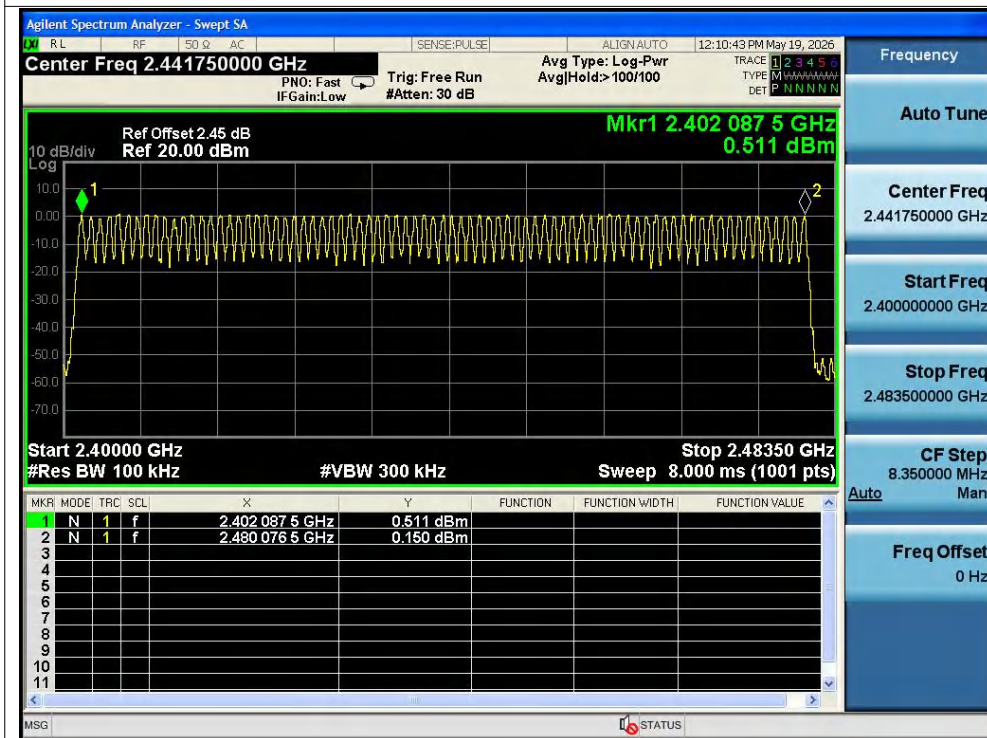

Hopping No. NVNT 2-DH5 2402MHz Ant1

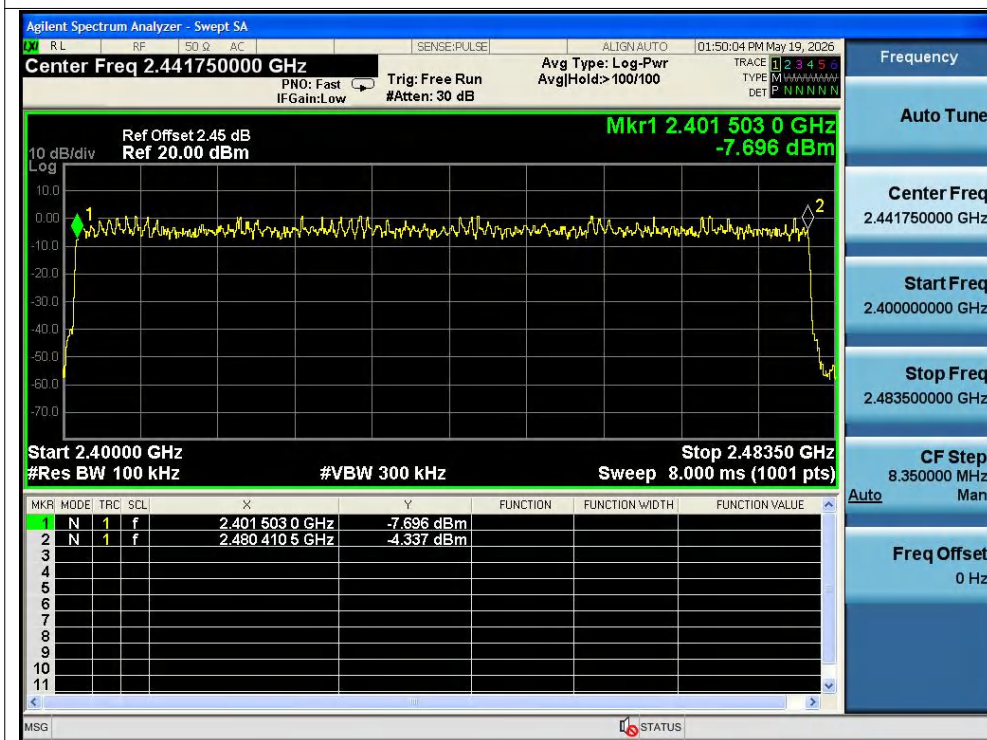

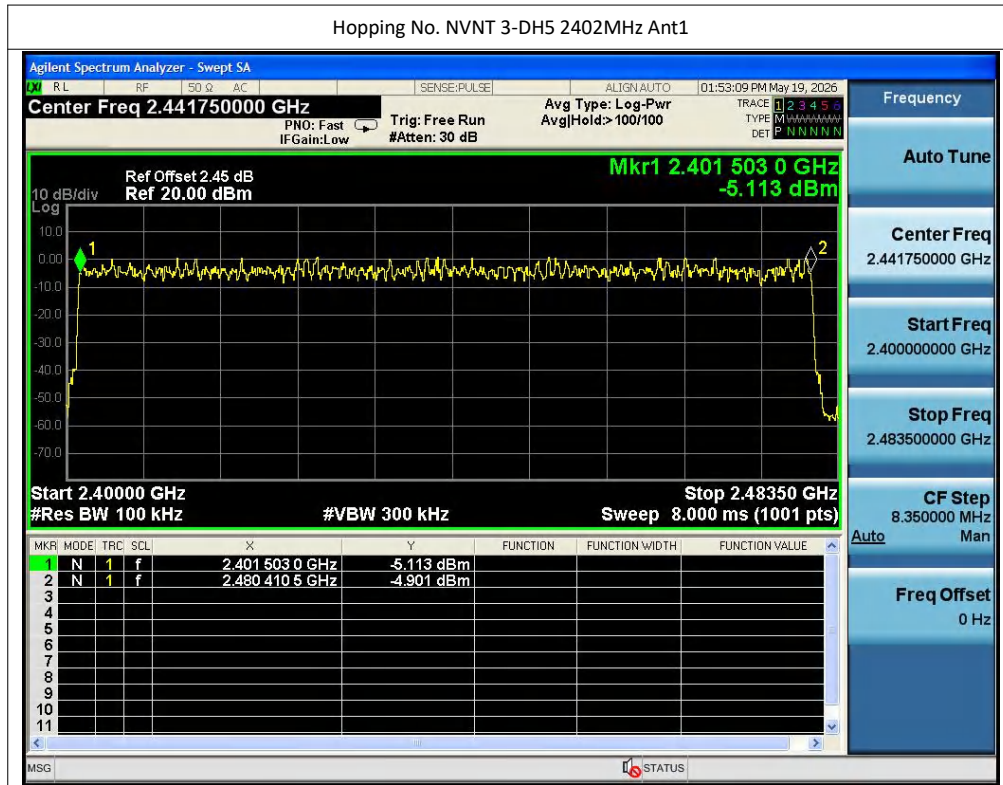


Dwell Time


Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH5	2402	Ant1	2.887	320.457	111	31600	400	Pass
NVNT	2-DH5	2402	Ant1	2.892	315.228	109	31600	400	Pass
NVNT	3-DH5	2402	Ant1	2.894	300.976	104	31600	400	Pass



Test Graphs



Dwell NVNT 1-DH5 2402MHz Ant1 One Burst

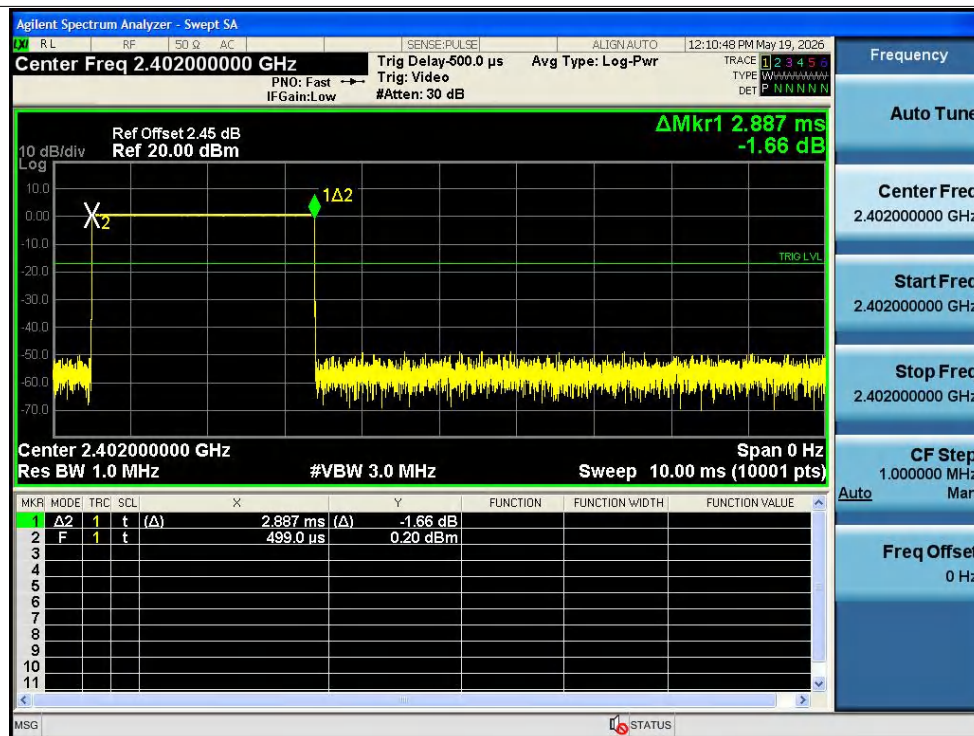

Dwell NVNT 1-DH5 2402MHz Ant1 Accumulated

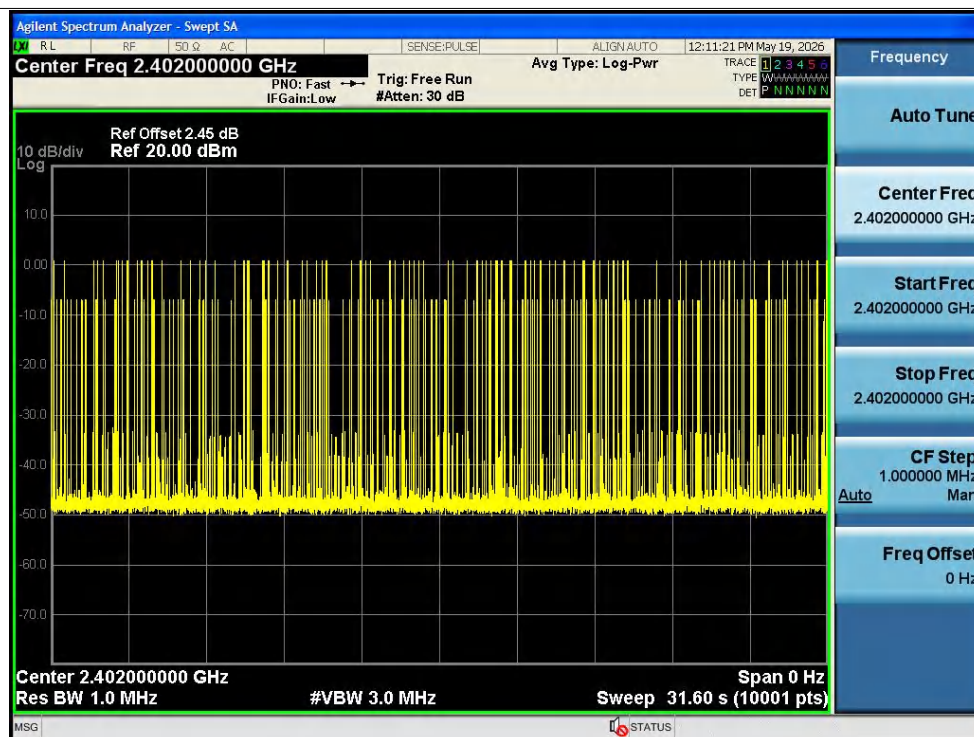

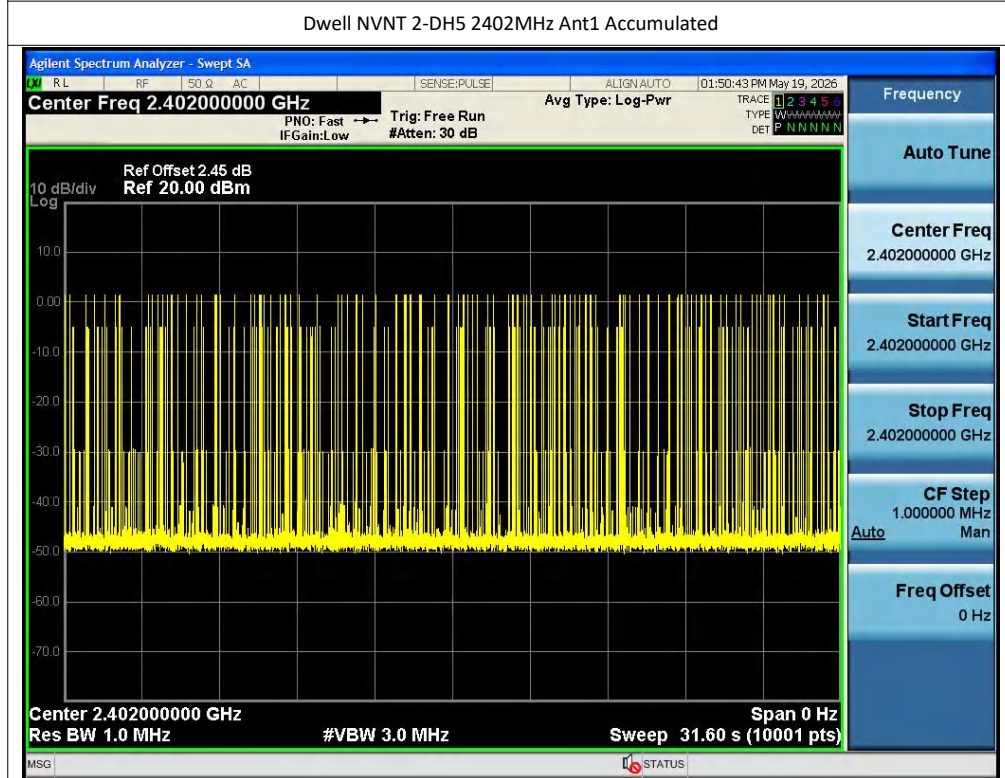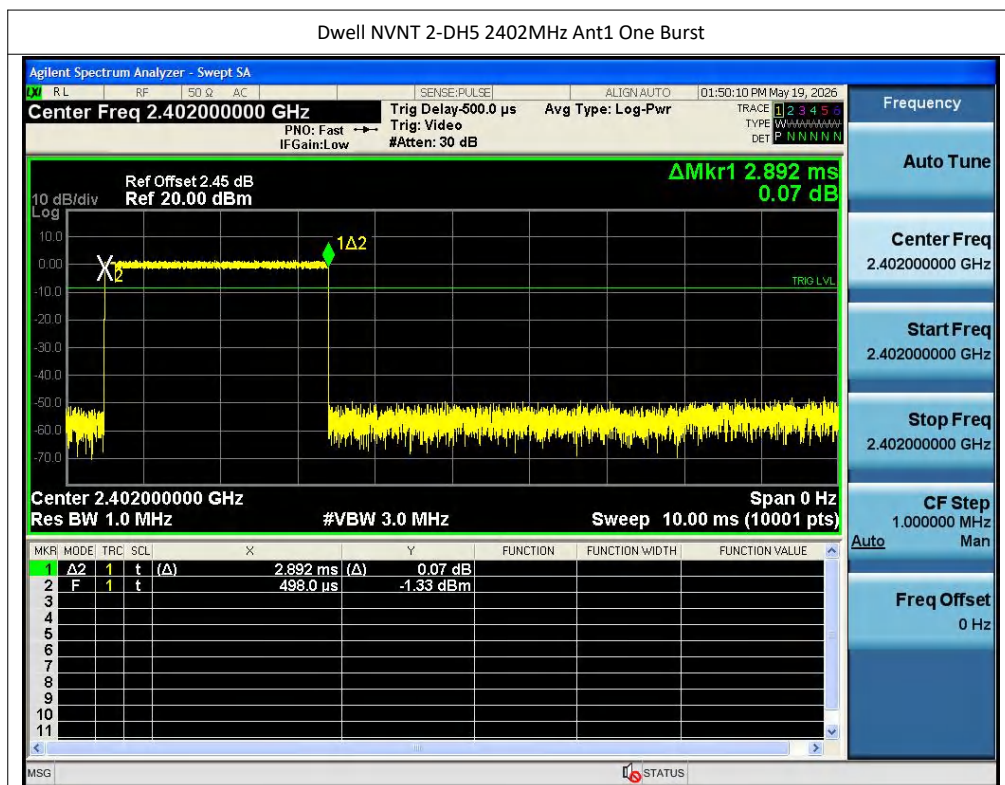

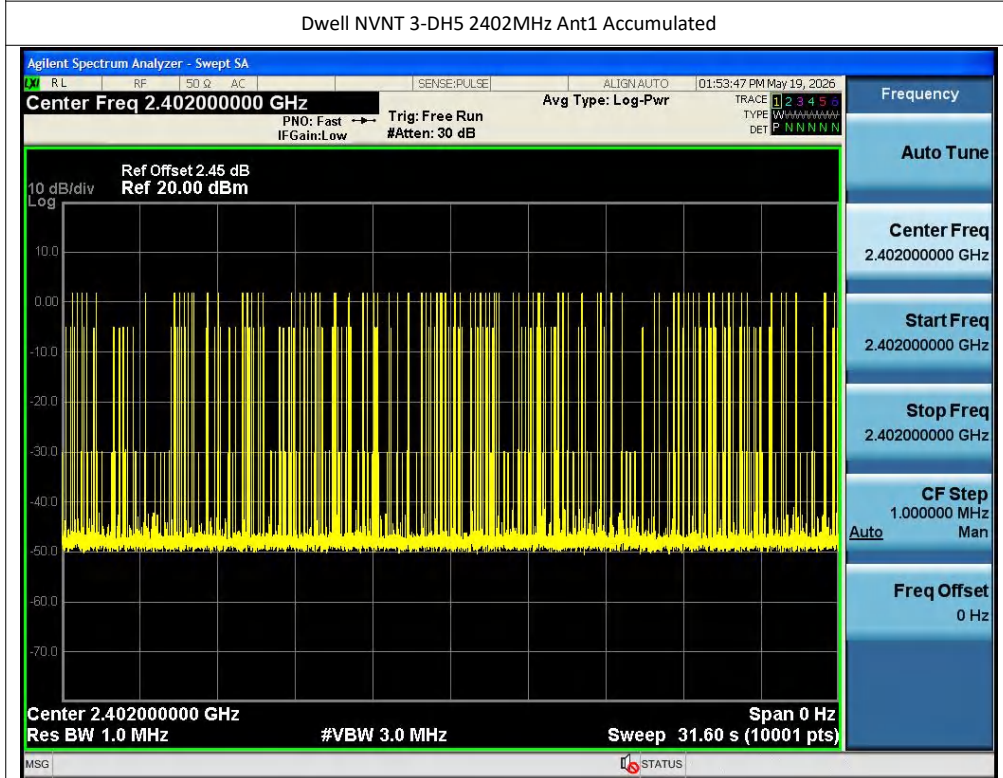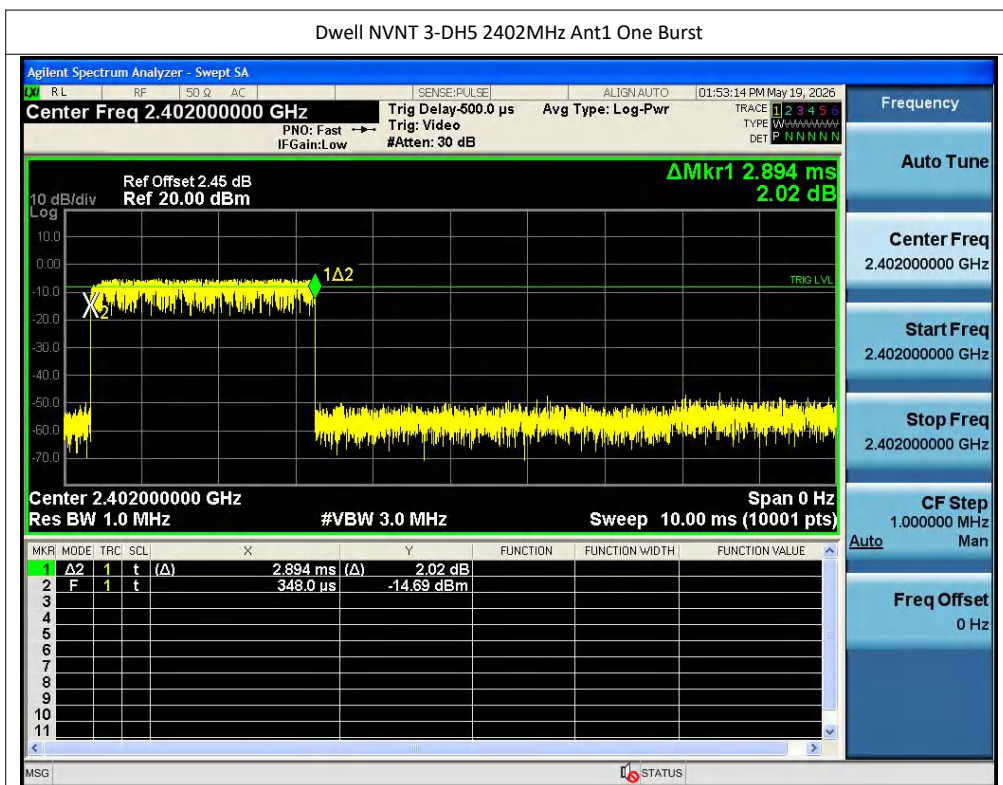


Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	No-Hopping	-50.65	-20	Pass
NVNT	1-DH5	2480	Ant1	No-Hopping	-56.96	-20	Pass
NVNT	2-DH5	2402	Ant1	No-Hopping	-49.44	-20	Pass
NVNT	2-DH5	2480	Ant1	No-Hopping	-55.68	-20	Pass
NVNT	3-DH5	2402	Ant1	No-Hopping	-54.41	-20	Pass
NVNT	3-DH5	2480	Ant1	No-Hopping	-56.72	-20	Pass



Test Graphs



Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Ref

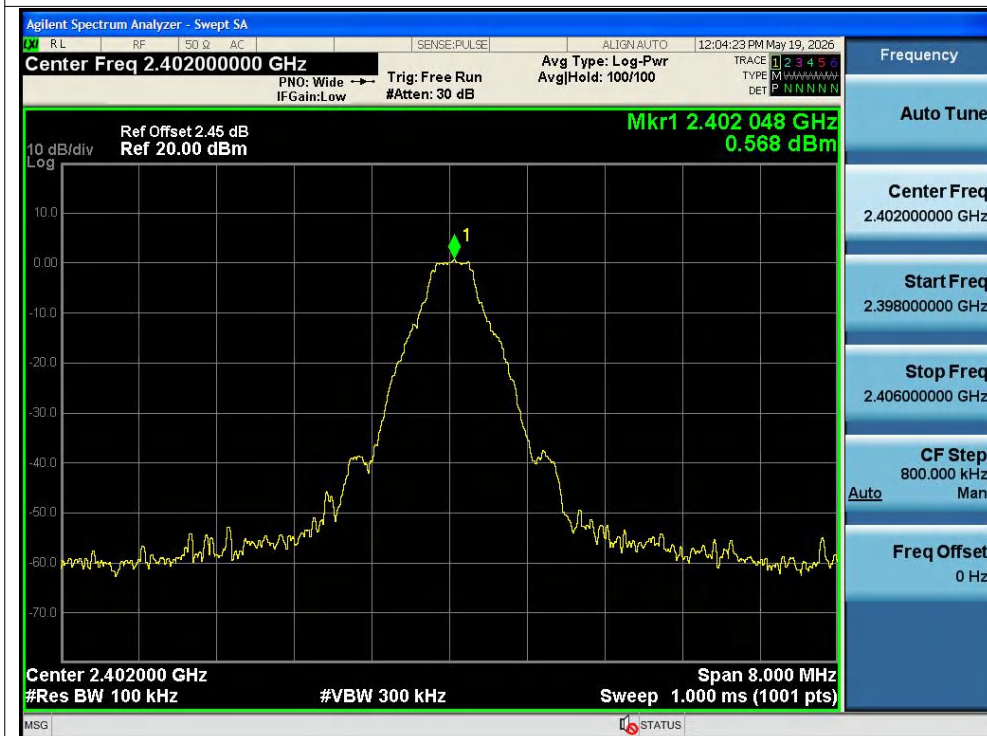



Band Edge NVNT 1-DH5 2402MHz Ant1 No-Hopping Emission

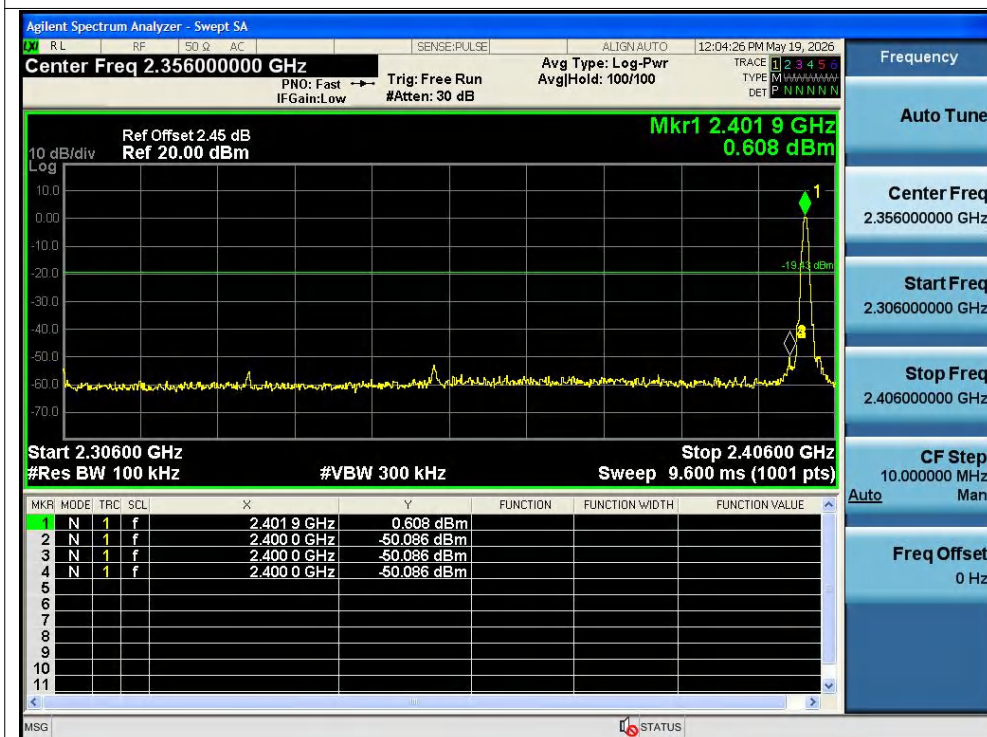


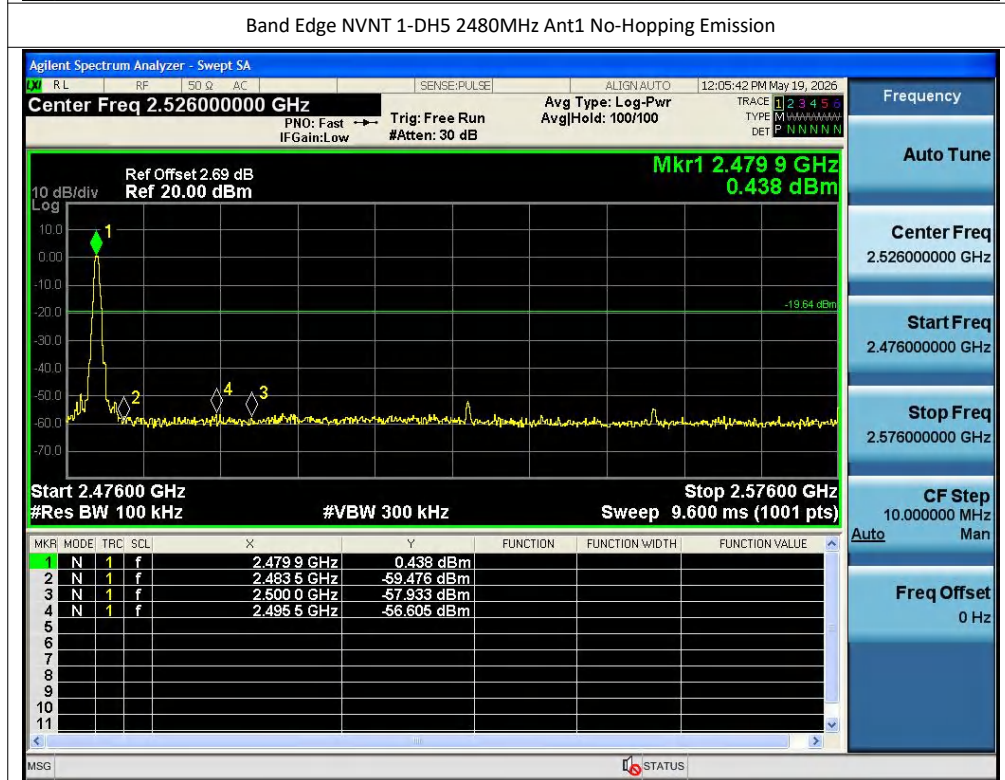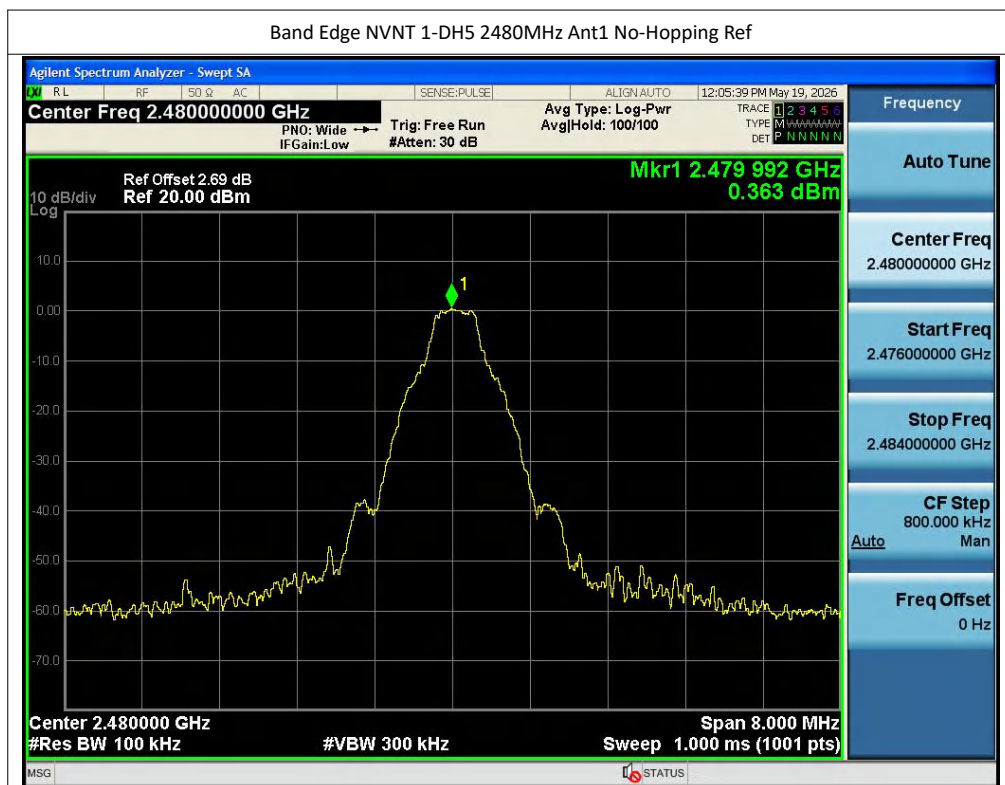

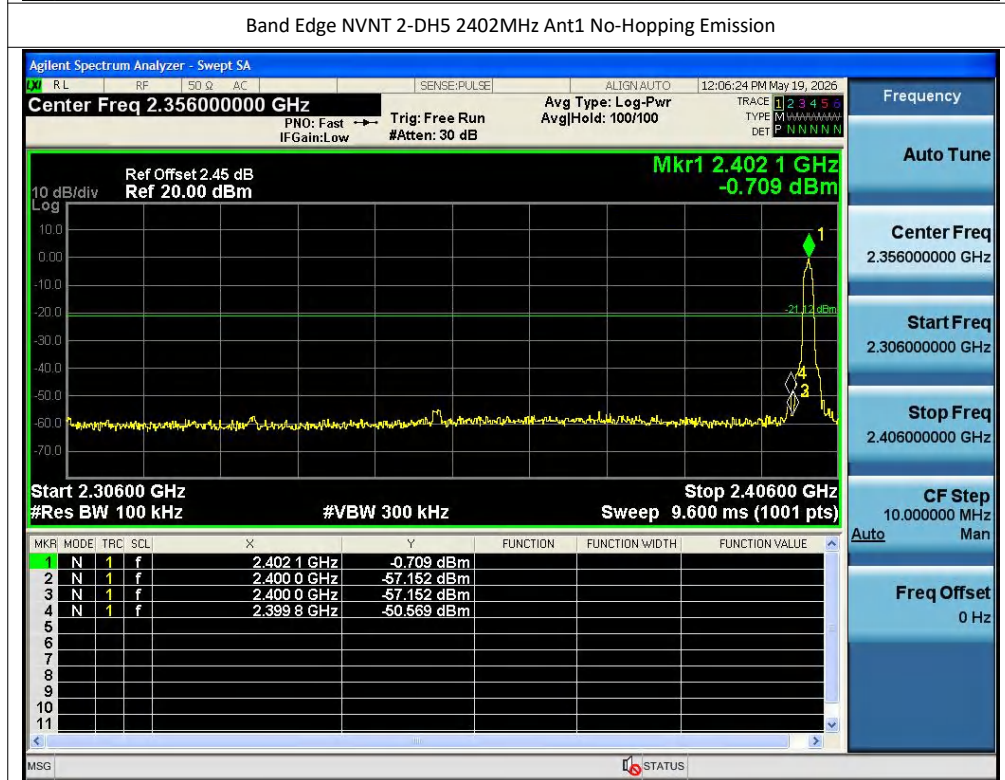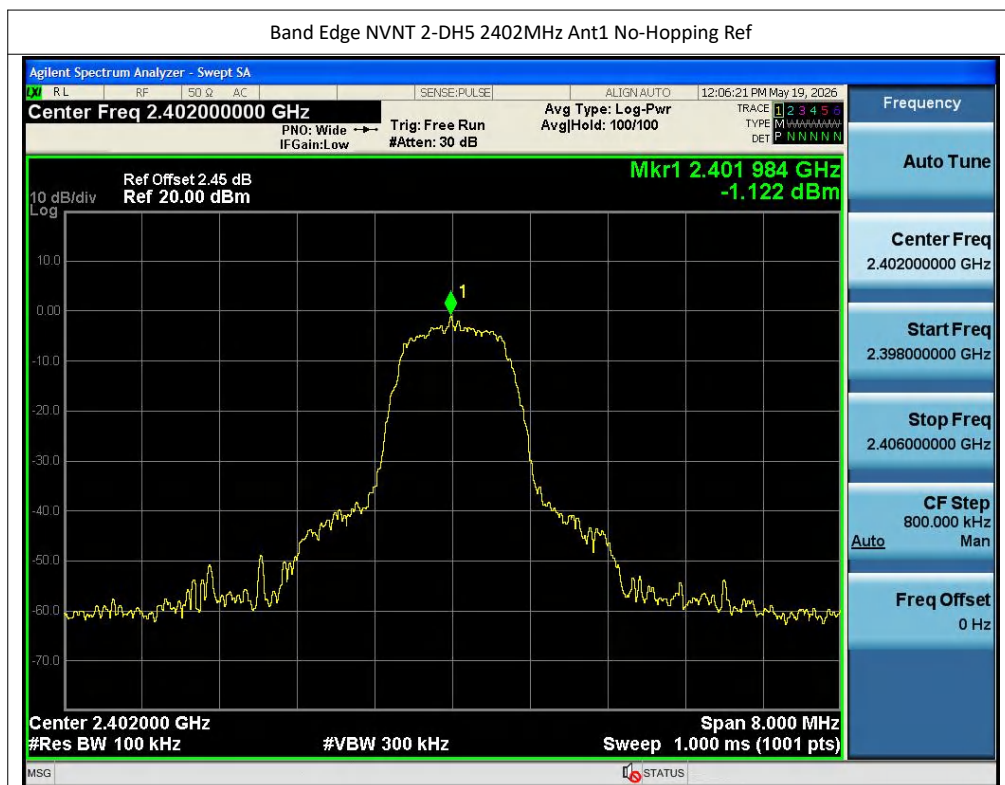

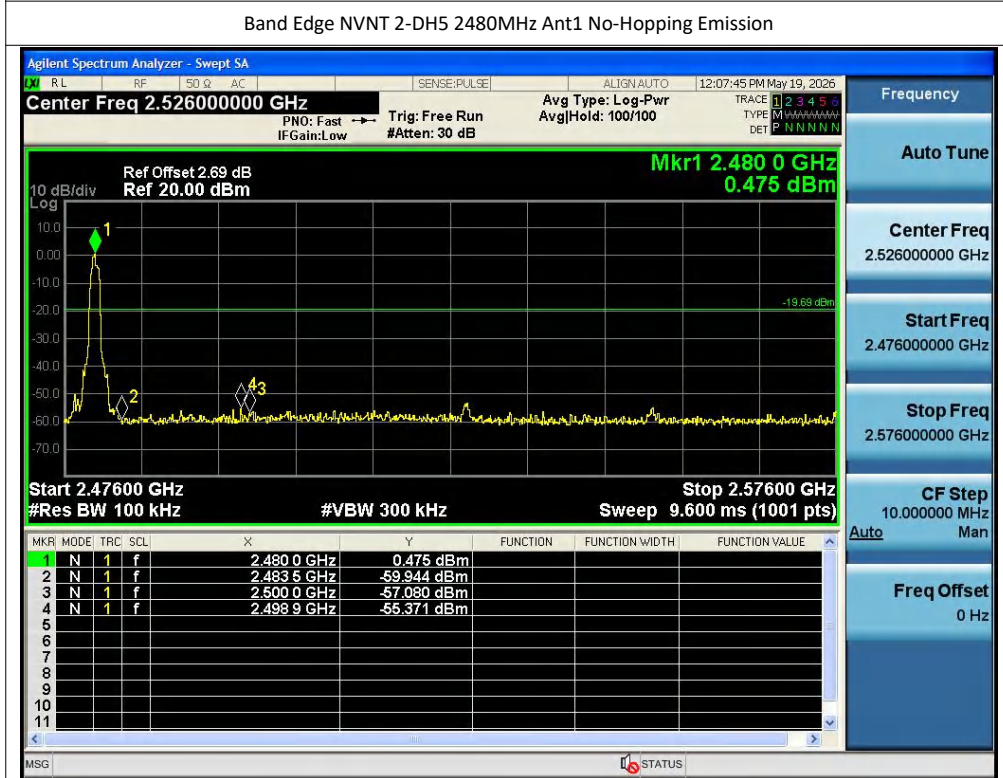

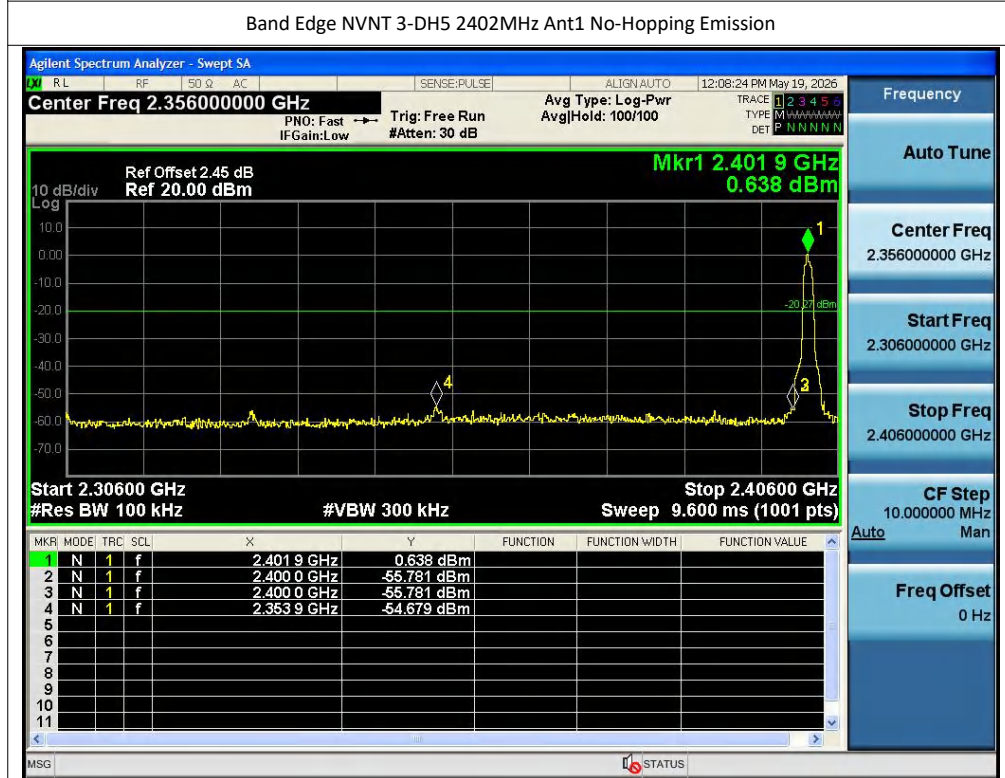

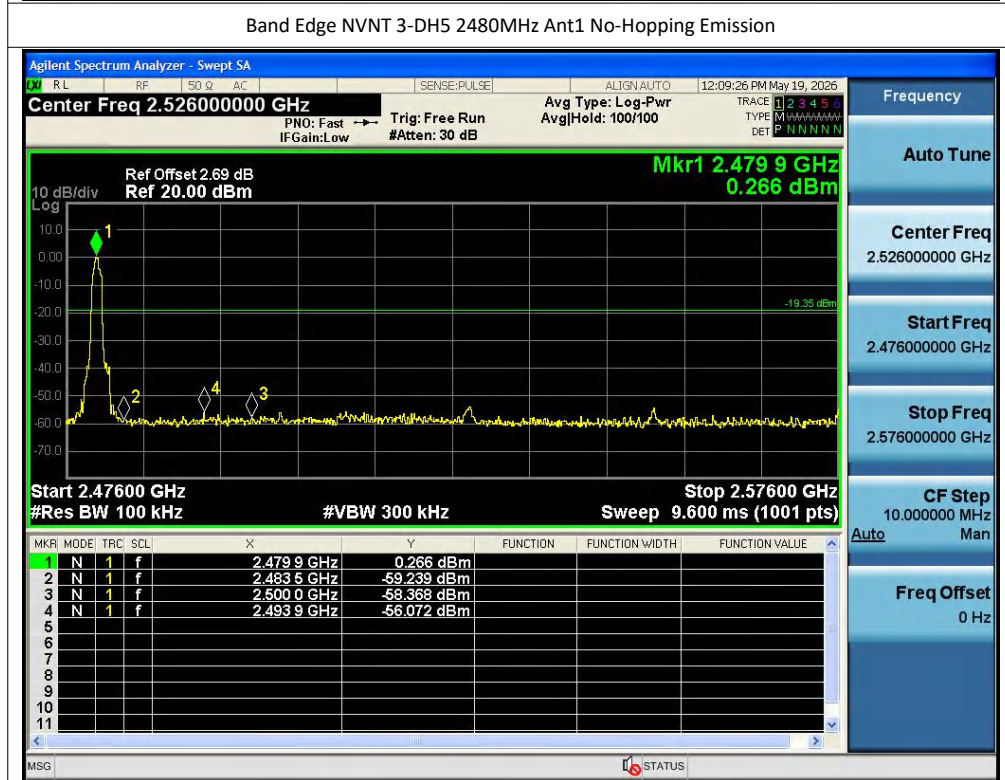

Band Edge(Hopping)

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Ant1	Hopping	-51.55	-20	Pass
NVNT	1-DH5	2480	Ant1	Hopping	-51.52	-20	Pass
NVNT	2-DH5	2402	Ant1	Hopping	-50.5	-20	Pass
NVNT	2-DH5	2480	Ant1	Hopping	-50.77	-20	Pass
NVNT	3-DH5	2402	Ant1	Hopping	-52.25	-20	Pass
NVNT	3-DH5	2480	Ant1	Hopping	-51.23	-20	Pass

Test Graphs

Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Ref



Band Edge(Hopping) NVNT 1-DH5 2402MHz Ant1 Hopping Emission

