


Left earphone:

Test Mode	Test Channel MHz	Conducted Output Power (dBm)	Limit (dBm)	Test Result
GFSK	2402	0.43	21	Pass
	2441	-0.22	21	Pass
	2480	-0.63	21	Pass
Pi/4 DQPSK	2402	-2.55	21	Pass
	2441	-3.26	21	Pass
	2480	-3.54	21	Pass
8DPSK	2402	-2.64	21	Pass
	2441	-3.31	21	Pass
	2480	-3.58	21	Pass

Right earphone:


Test Mode	Test Channel MHz	Conducted Output Power (dBm)	Limit (dBm)	Test Result
GFSK	2402	0.05	21	Pass
	2441	-0.6	21	Pass
	2480	-0.93	21	Pass
Pi/4 DQPSK	2402	-3.06	21	Pass
	2441	-3.46	21	Pass
	2480	-3.99	21	Pass
8DPSK	2402	-3.06	21	Pass
	2441	-3.47	21	Pass
	2480	-3.98	21	Pass

Left earphone:

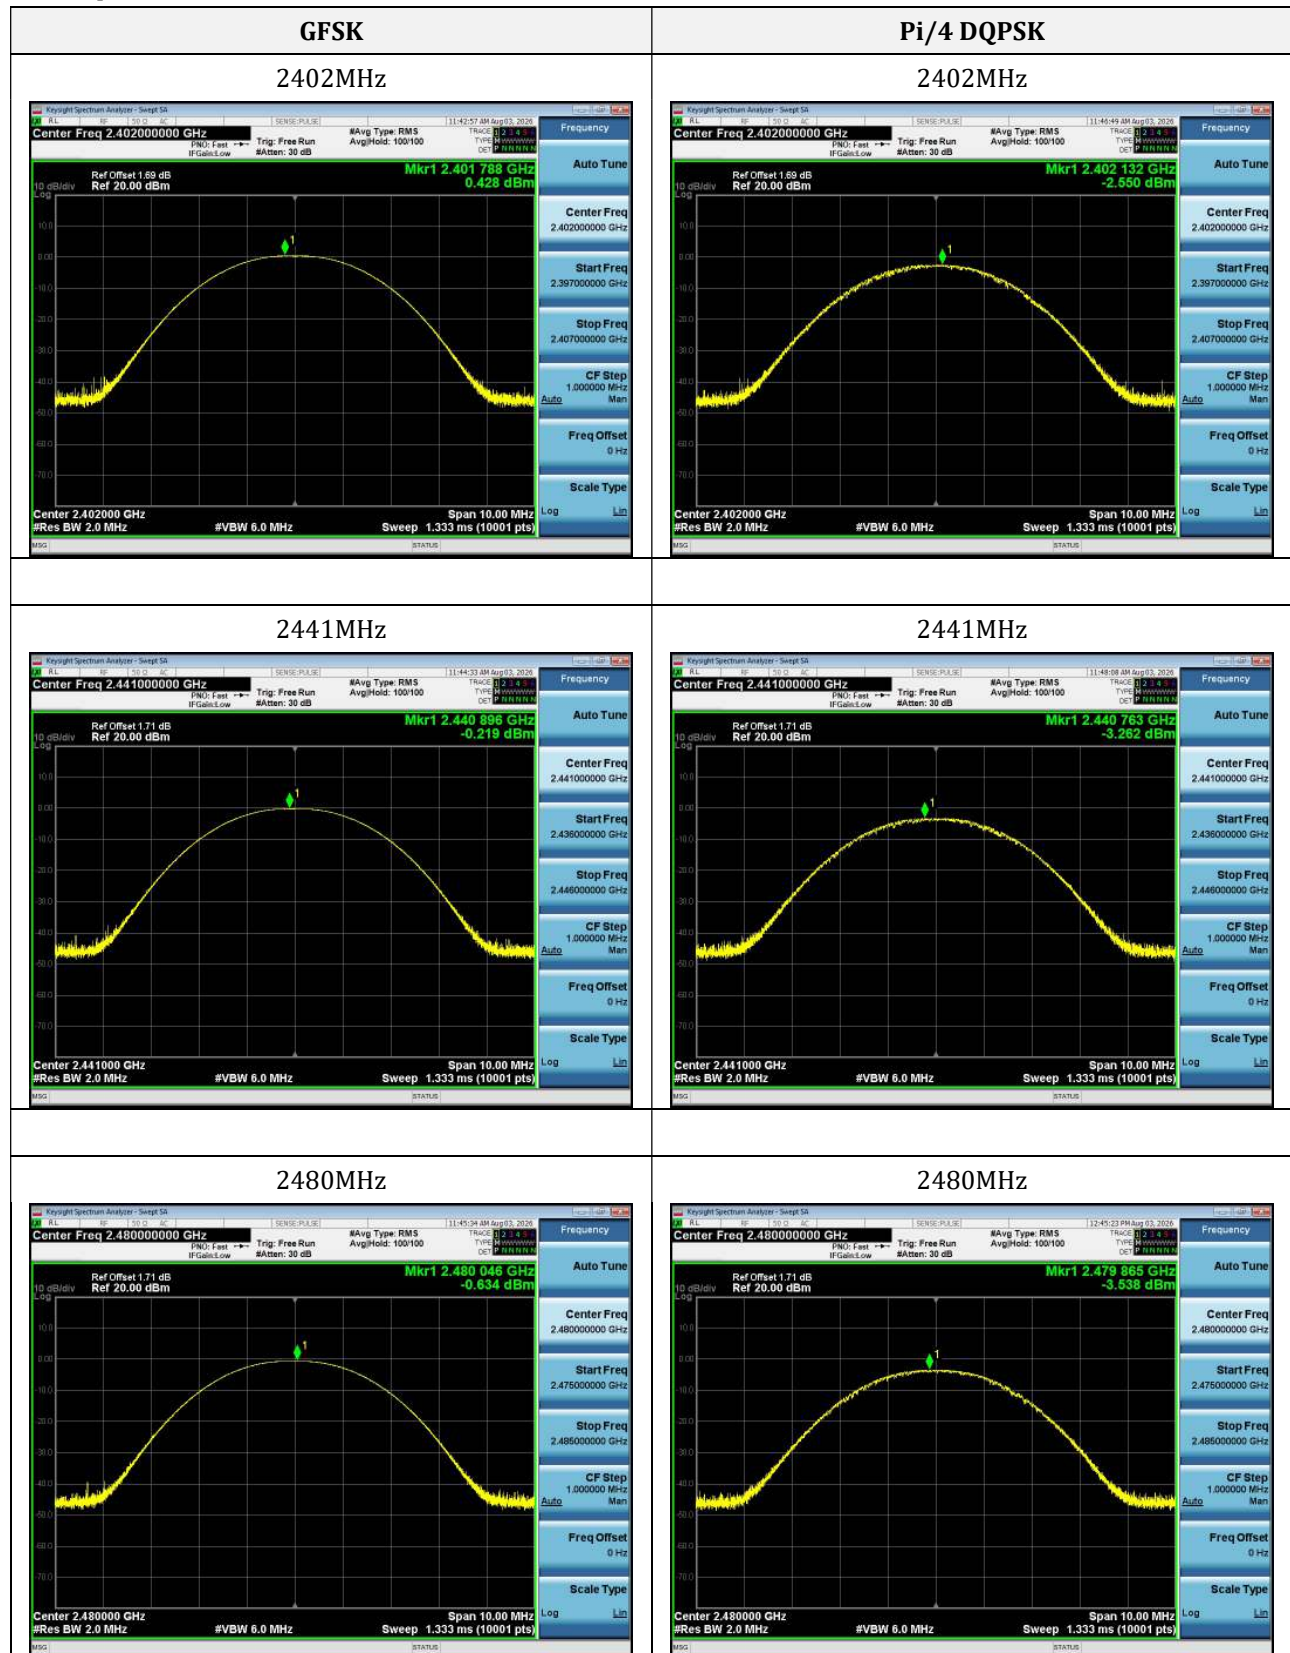


8DPSK


2402MHz

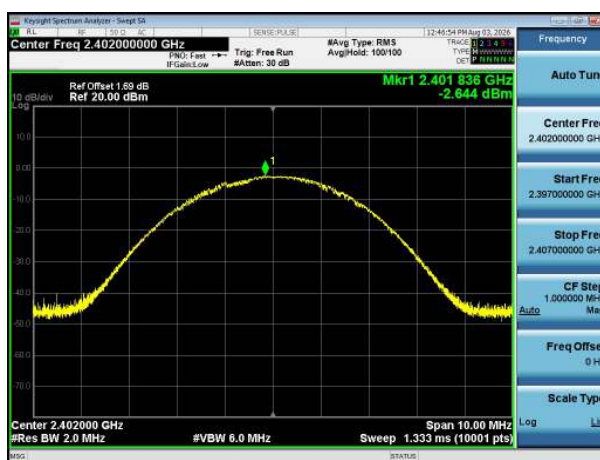


2441MHz

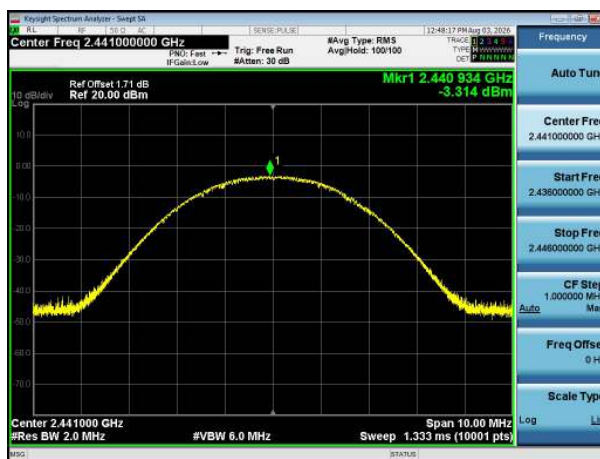

2480MHz

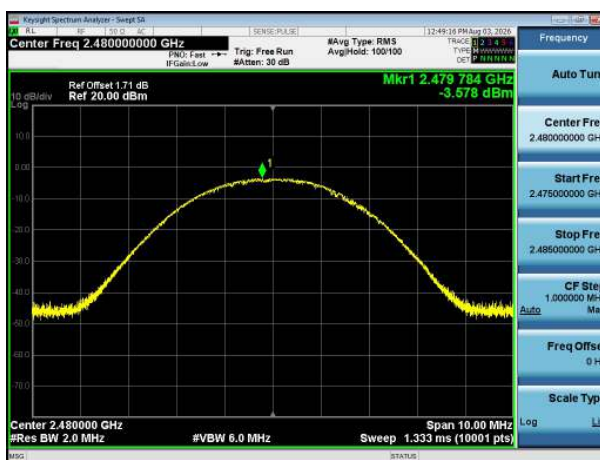


Right earphone:

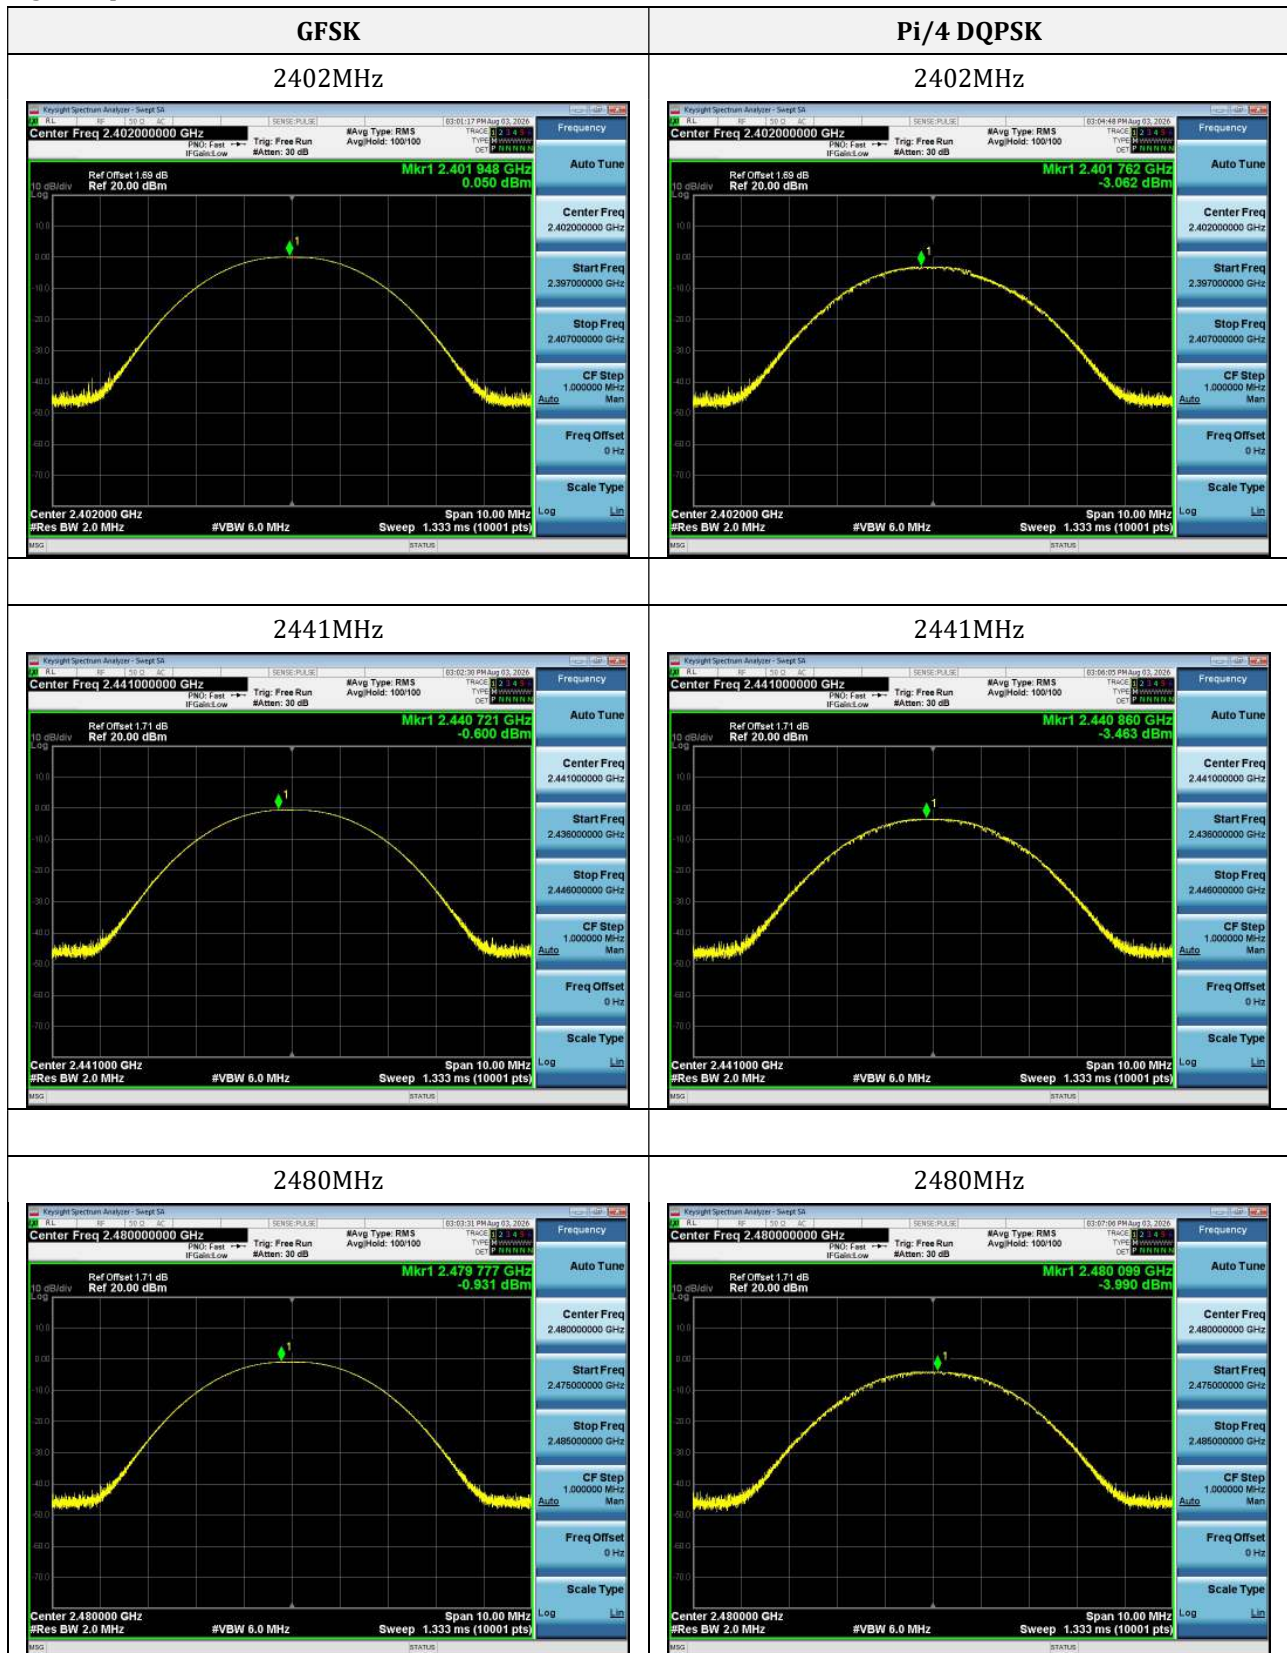


8DPSK


2402MHz

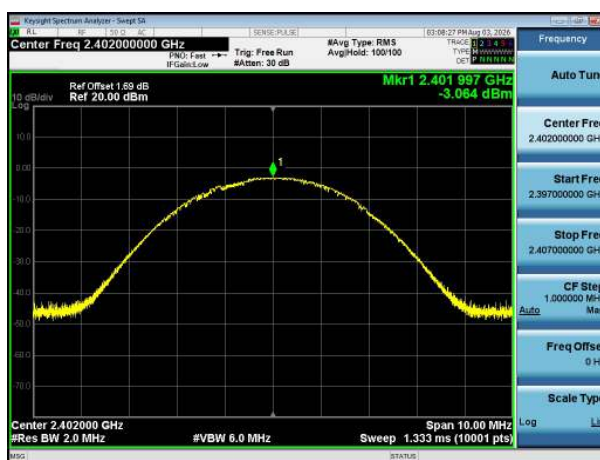

2441MHz

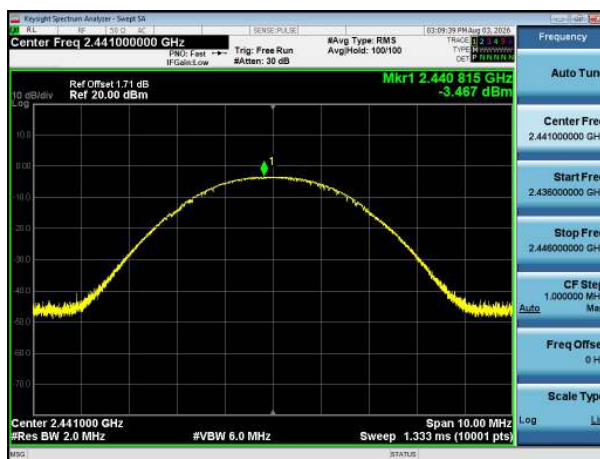

2480MHz

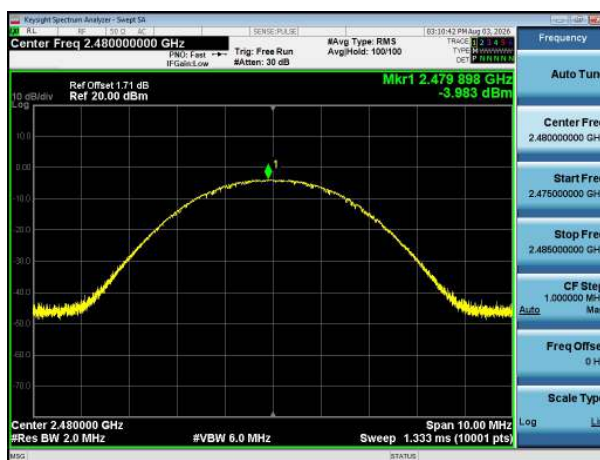

10. Occupied Bandwidth(-20dB)

10.1 Standard and Limit

According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

10.2 Test Procedure

According to the ANSI C63.10-2020, section 6.9, the emission bandwidth test method as follows.

- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
- 2) Set the spectrum analyzer to any one measured frequency within its operating range.
- 3) Set RBW = 30kHz, VBW = 100kHz, Sweep = Auto.
- 4) Set a reference level on the measuring instrument equal to the highest peak value.
- 5) Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level.
Record the frequency difference as the emission bandwidth.
- 6) Repeat the above procedures until all frequencies measured were complete.



Test Setup Block Diagram

10.3 Test Data and Results


Left earphone:

Test Mode	Test Channel (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (kHz)
GFSK	2402	1.047	912.53
	2441	1.04	918.08
	2480	0.995	911.46
Pi/4 DQPSK	2402	1.268	1149.3
	2441	1.223	1155.1
	2480	1.222	1155.8
8DPSK	2402	1.252	1144.8
	2441	1.262	1169
	2480	1.258	1151.2

Right earphone:

Test Mode	Test Channel (MHz)	20dB Bandwidth (MHz)	99% Bandwidth (kHz)
GFSK	2402	1.031	922.49
	2441	1.031	911.42
	2480	1.031	912.32
Pi/4 DQPSK	2402	1.274	1162.9
	2441	1.24	1158.1
	2480	1.273	1179.1
8DPSK	2402	1.271	1167
	2441	1.251	1157.2
	2480	1.255	1159.9

Left earphone:

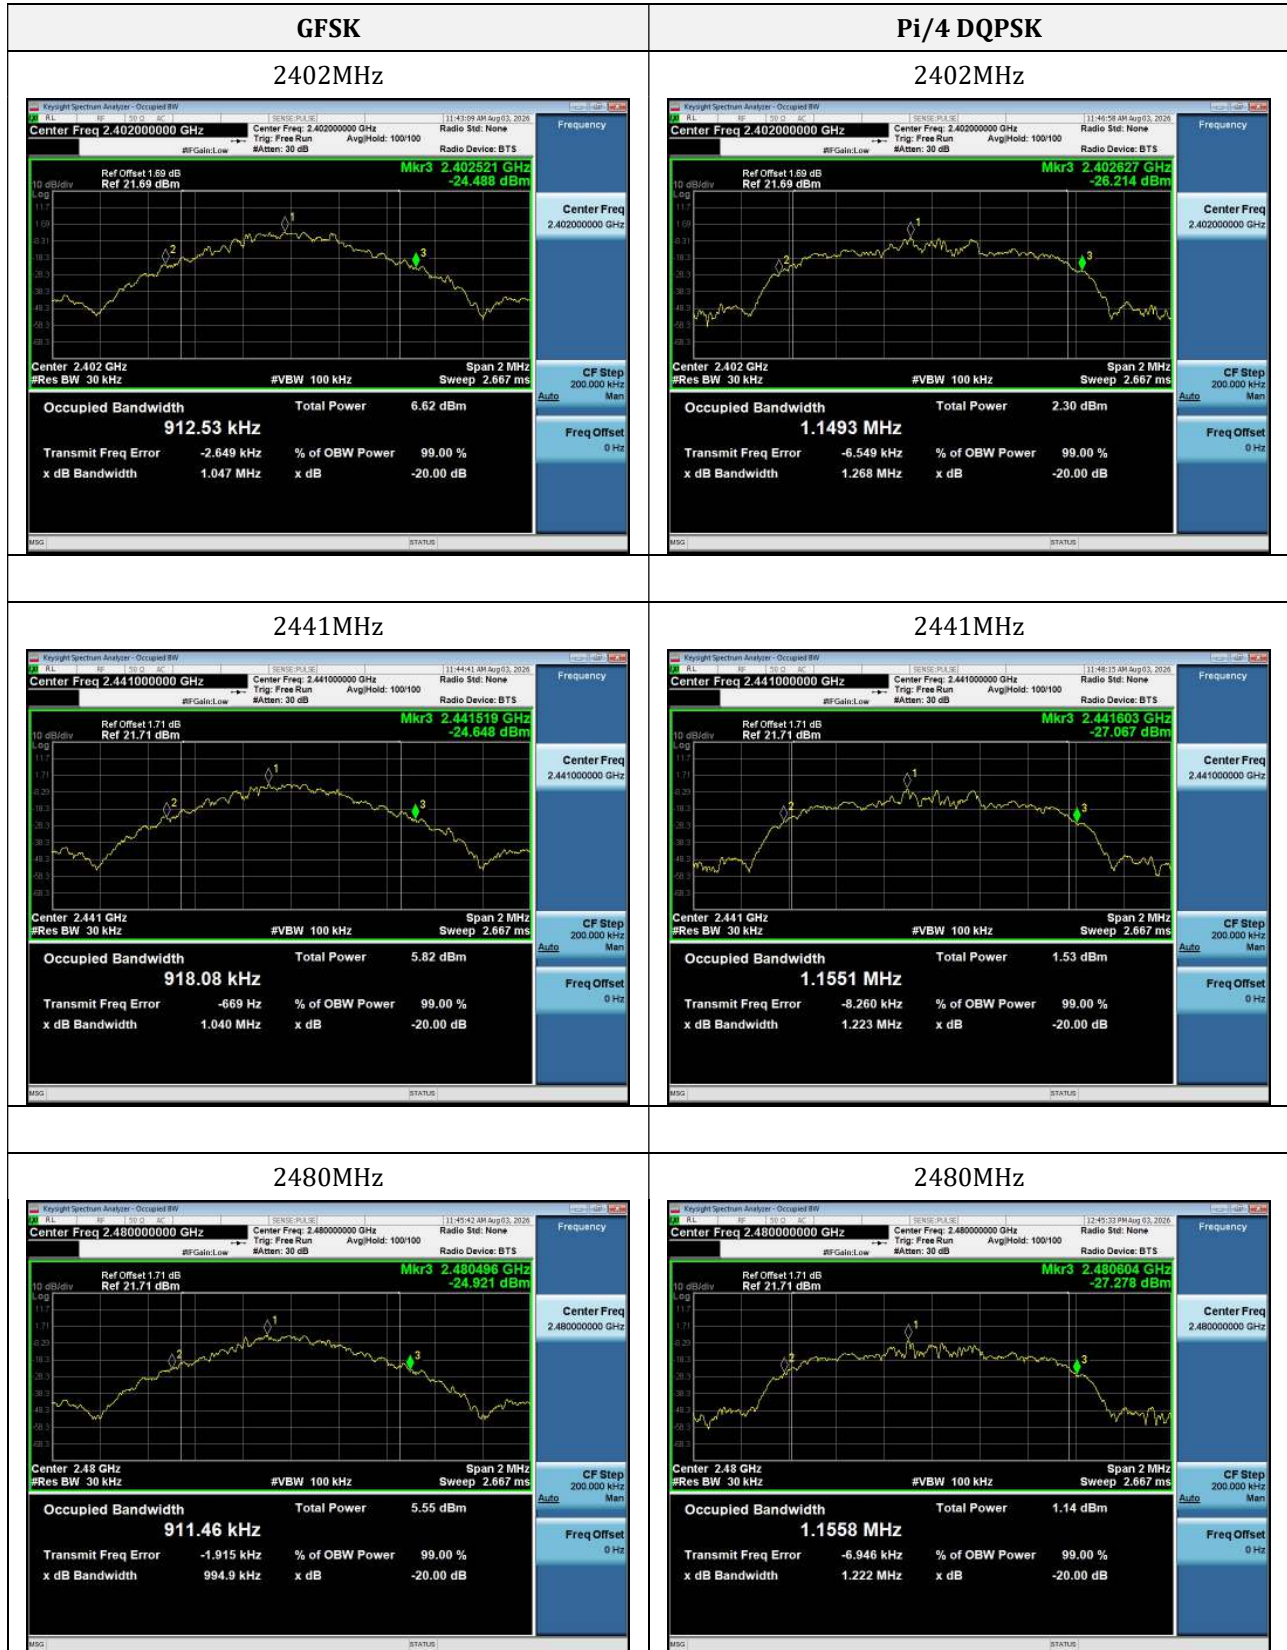

8DPSK

2402MHz




2441MHz



2480MHz



Right earphone:

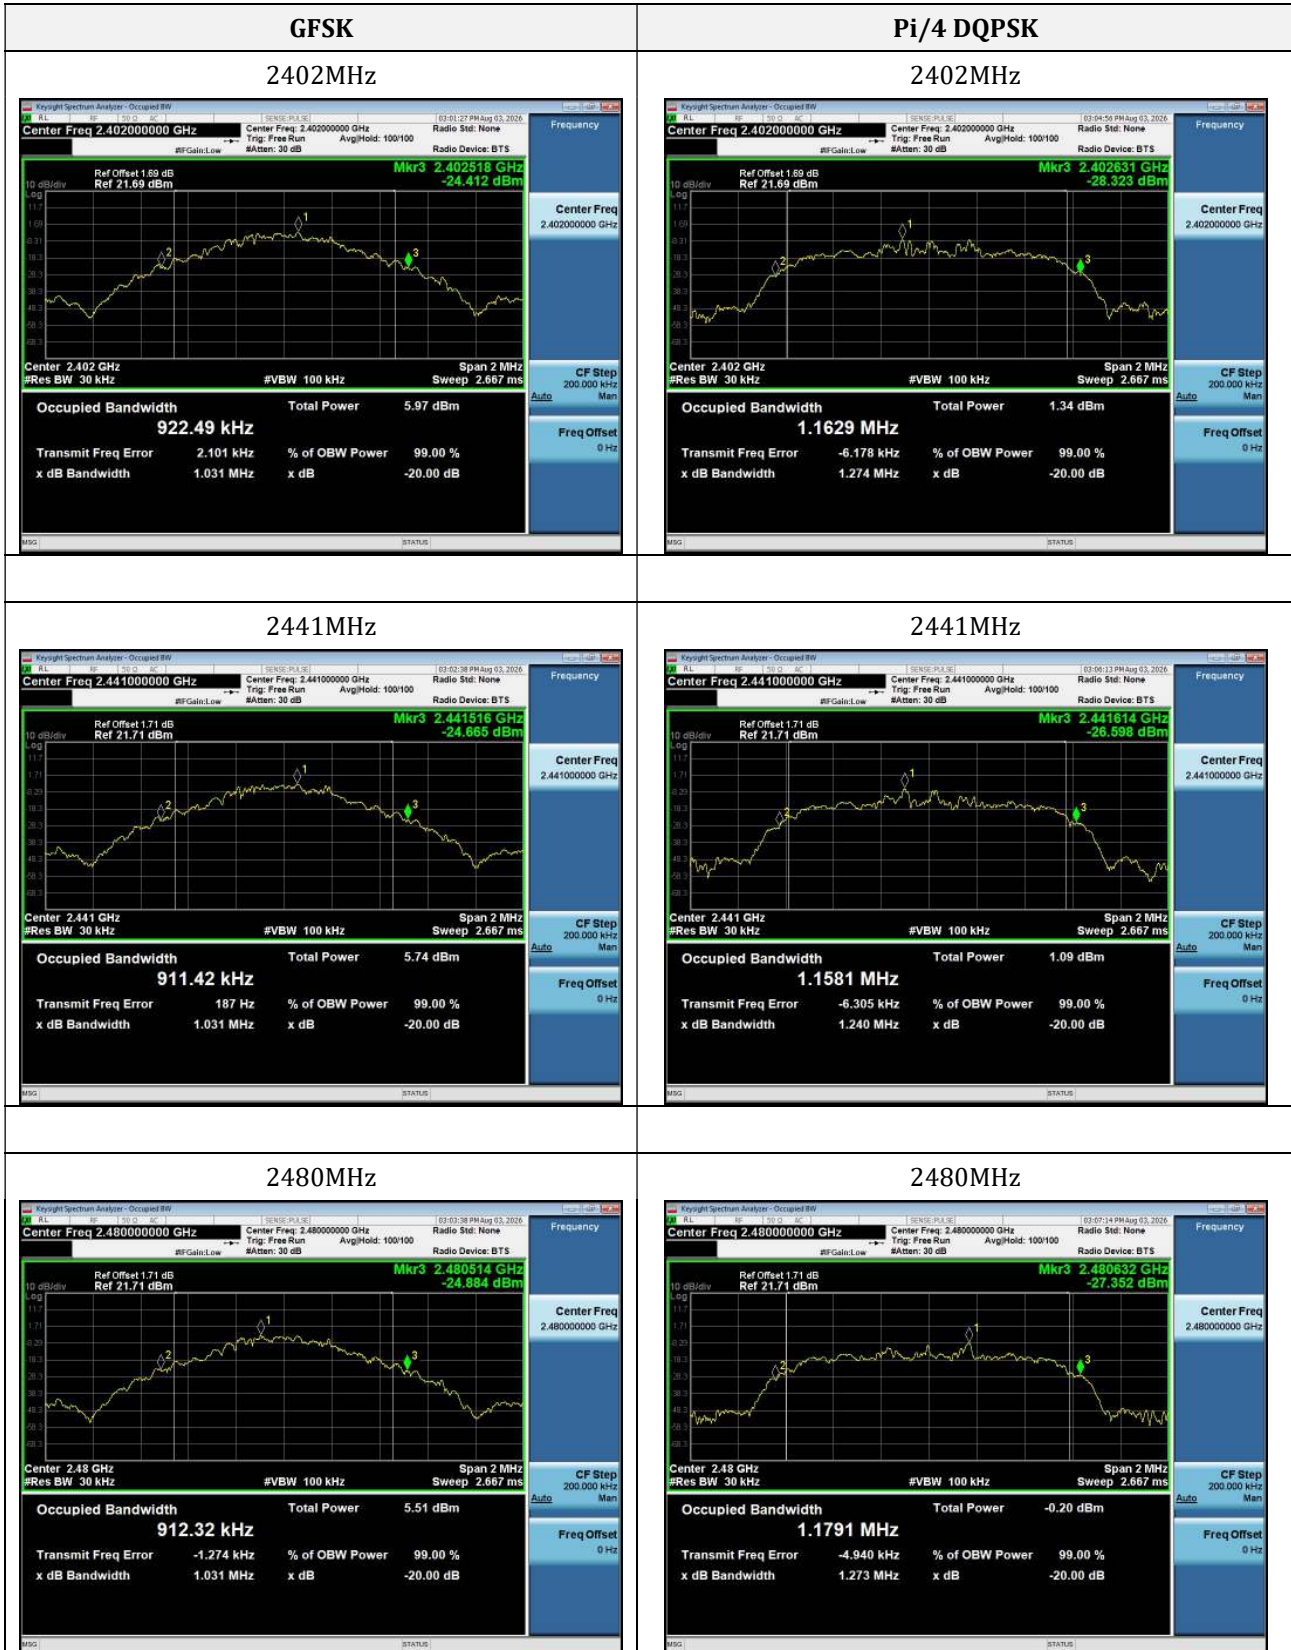

8DPSK

2402MHz



2441MHz



2480MHz



11. Carrier Frequencies Separation

11.1 Standard and Limit

According to FCC 15.247(a)(1), frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, and frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

11.2 Test Procedure

- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
- 2) Set the spectrum analyzer to any one measured frequency within its operating range.
- 3) Set RBW = 30kHz, VBW = 100kHz, Sweep = Auto, Detector = Peak, or Set RBW = 30kHz, VBW = 300kHz, Sweep = 5ms, Detector = Peak.
- 4) By using the Max Hold function, record the separation of two adjacent channels.
- 5) Measure the frequency difference of these two adjacent channels by spectrum analyzer mark function. and then plot the result on the screen of the spectrum analyzer.
- 6) Repeat above procedures until all frequencies measured were complete.



Test Setup Block Diagram

11.3 Test Data and Results

Left earphone:

Test Mode	Test Channel	Test Freq. 1 (MHz)	Test Freq. 2 (MHz)	CFS (MHz)	Limit (MHz)
GFSK	Lowest	2401.978	2402.99	1.012	0.633
	Middle	2440.99	2441.996	1.006	0.693
	Highest	2479.054	2479.816	0.762	0.69
Pi/4 DQPSK	Lowest	2402.028	2402.896	0.868	0.84
	Middle	2440.89	2442.166	1.276	0.842
	Highest	2478.902	2479.82	0.918	0.843
8DPSK	Lowest	2401.888	2403.156	1.268	0.859
	Middle	2440.896	2442.024	1.128	0.817
	Highest	2478.802	2480.126	1.324	0.833


Note: CFS(Channel Frequency Separation) = Test Freq. 2 - Test Freq. 1

Right earphone:

Test Mode	Test Channel	Test Freq. 1 (MHz)	Test Freq. 2 (MHz)	CFS (MHz)	Limit (MHz)
GFSK	Lowest	2401.988	2403.06	1.072	0.687
	Middle	2440.904	2442.058	1.154	0.683
	Highest	2478.99	2479.866	0.876	0.695
Pi/4 DQPSK	Lowest	2401.906	2402.902	0.996	0.835
	Middle	2440.9	2442.018	1.118	0.843
	Highest	2478.916	2480.042	1.126	0.84
8DPSK	Lowest	2402.044	2403.152	1.108	0.844
	Middle	2440.882	2442.024	1.142	0.829
	Highest	2479.05	2479.9	0.85	0.827


Note: CFS(Channel Frequency Separation) = Test Freq. 2 - Test Freq. 1

Left earphone:

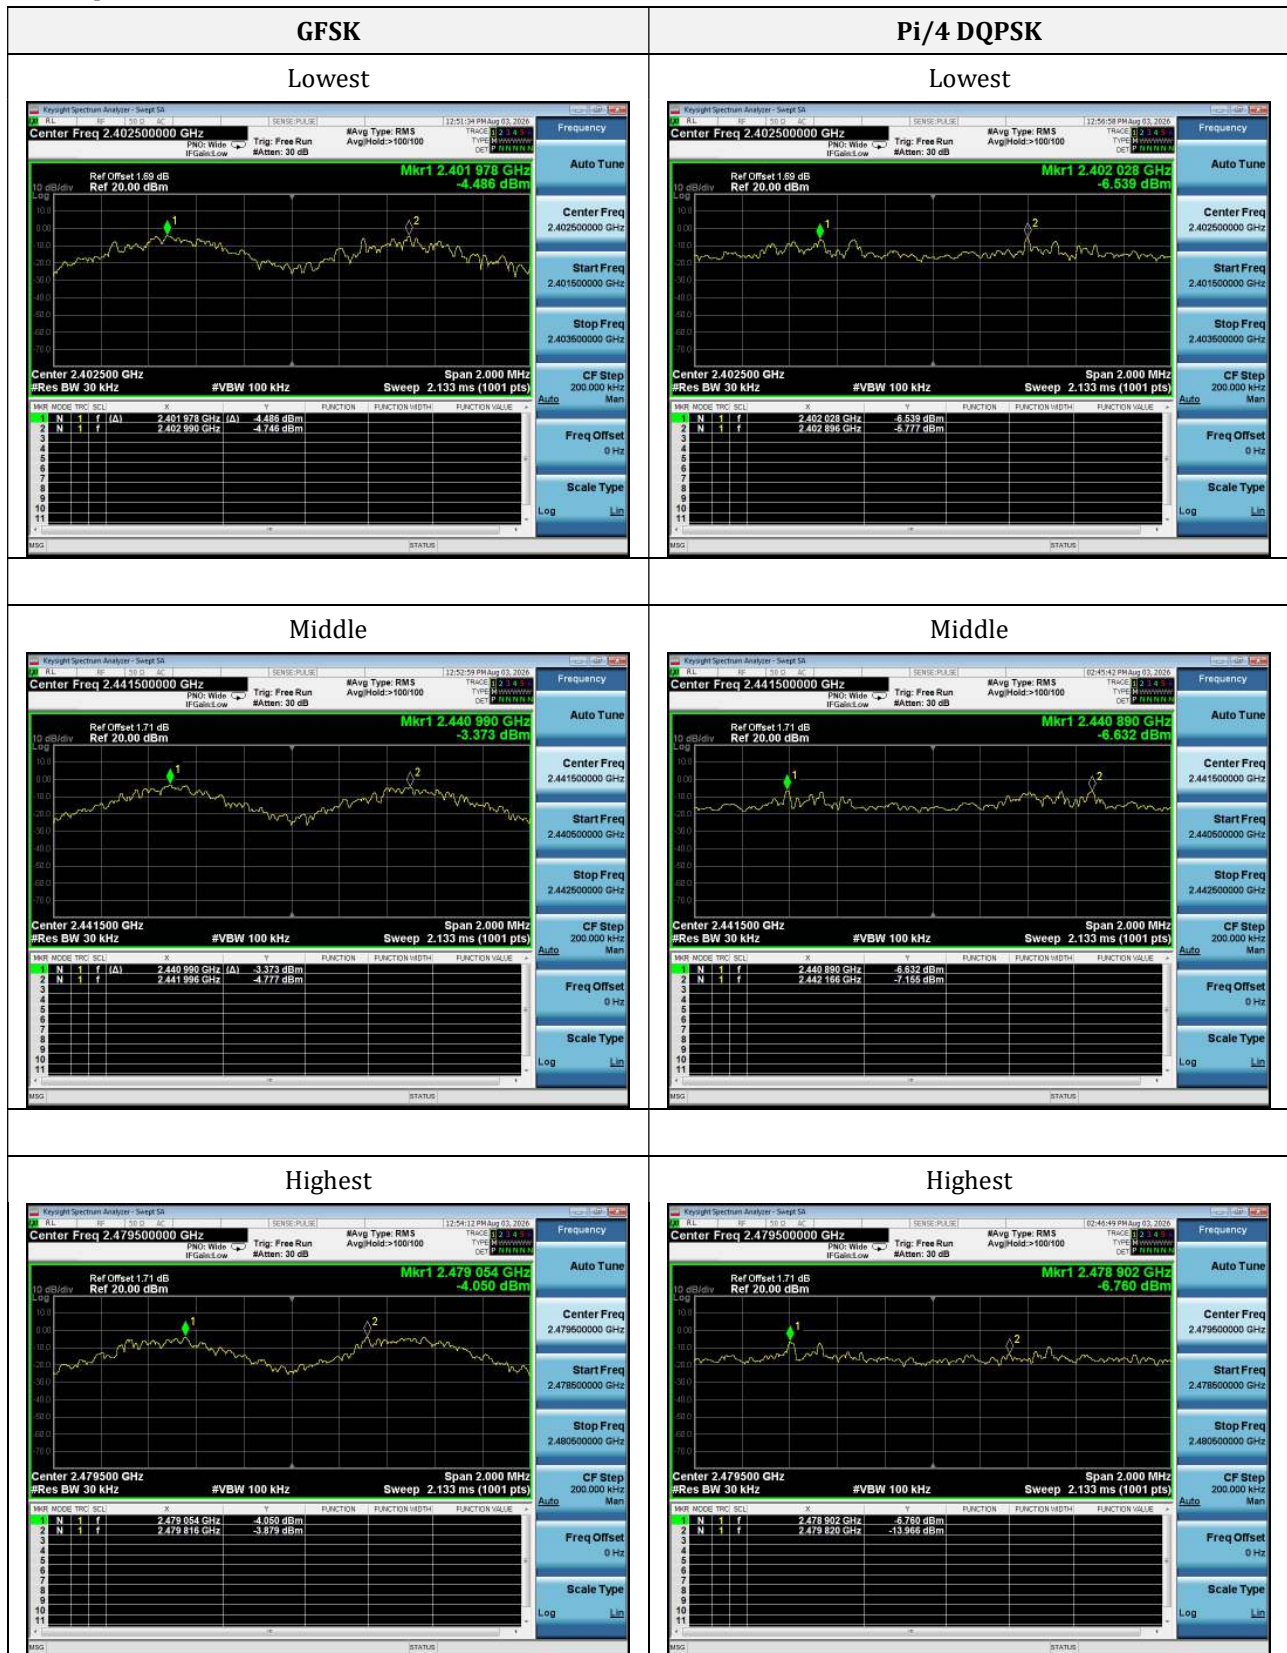

8DPSK


Lowest

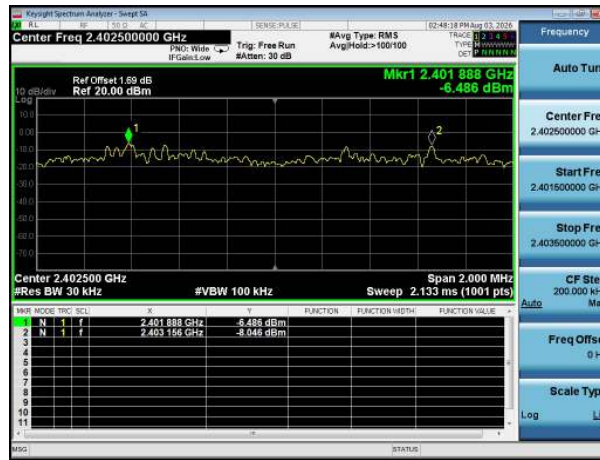

Middle



Highest

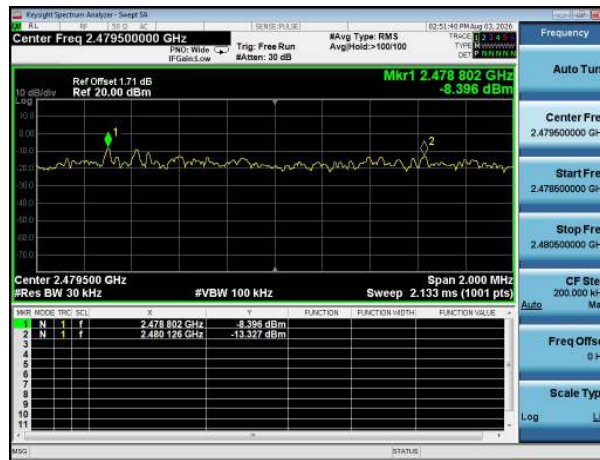


Right earphone:



8DPSK


Lowest

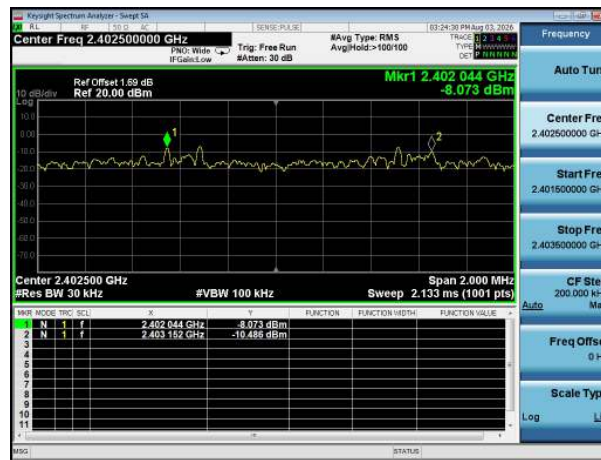

Middle



Highest

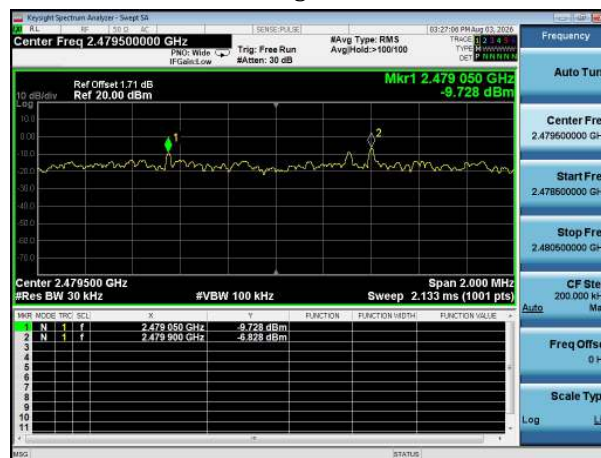

12. Number of Hopping Channel

12.1 Standard and Limit

According to FCC 15.247(a)(1), frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, and frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

12.2 Test Procedure

- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
- 2) Set the spectrum analyzer to any one measured frequency within its operating range.
- 3) Set RBW = 100kHz, VBW = 300kHz, Sweep = Auto, Detector = Peak.
- 4) Set the spectrum analyzer on Max hold mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- 5) Set the spectrum analyzer on View mode and then plot the result on the screen of the spectrum analyzer.
- 6) Repeat the above procedures until all frequencies measured were complete.



Test Setup Block Diagram

12.3 Test Data and Results

Left earphone:

Test Mode	Number of Hopping Channel	Limit	Test Result
GFSK	79	15	Pass
Pi/4 DQPSK	79	15	Pass
8DPSK	79	15	Pass


Right earphone:

Test Mode	Number of Hopping Channel	Limit	Test Result
GFSK	79	15	Pass
Pi/4 DQPSK	79	15	Pass
8DPSK	79	15	Pass


Left earphone:

Number of Hopping Channel


GFSK

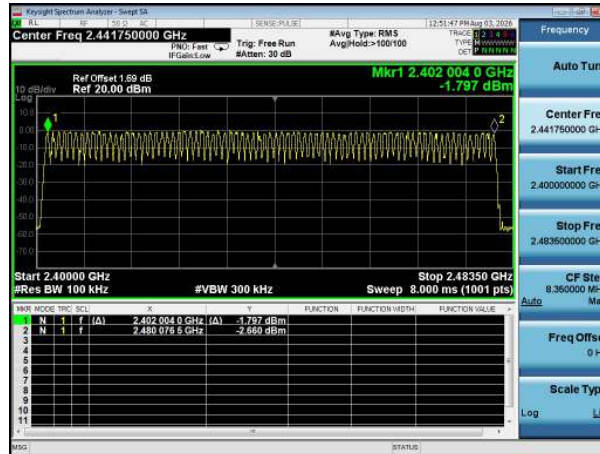

Pi/4 DQPSK

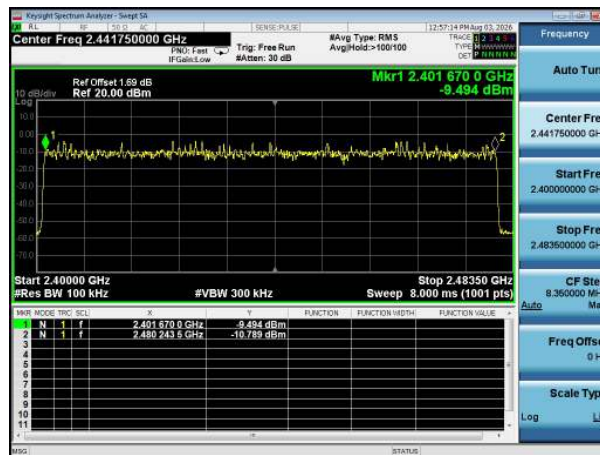


8DPSK

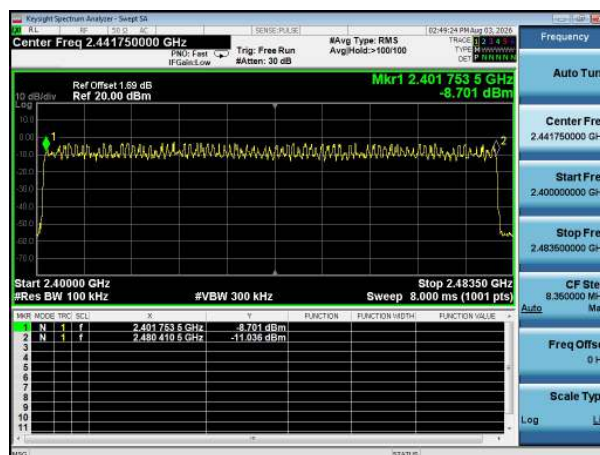


Right earphone:

Number of Hopping Channel


GFSK

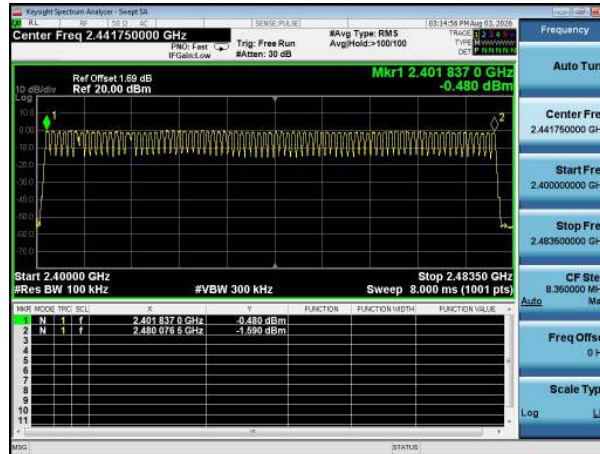

Pi/4 DQPSK

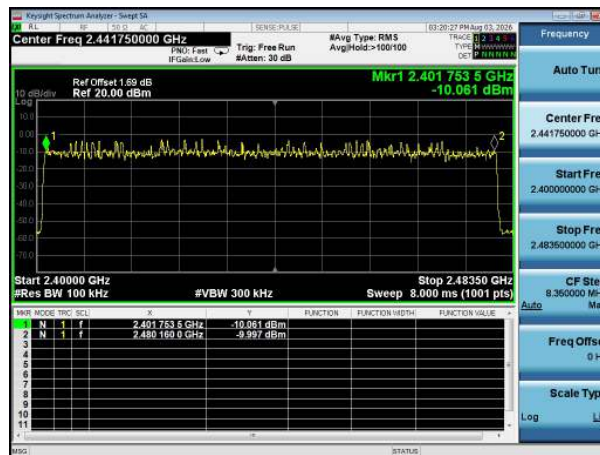

8DPSK

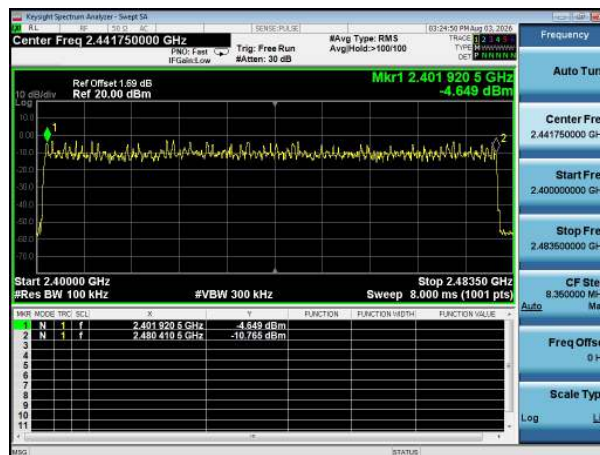

13. Band-edge Emission(Conducted)

13.1 Standard and Limit

According to §15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

13.2 Test Procedure

Test is conducting under the description of ANSI C63.10-2020 section 6.10.

- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
- 2) Set the spectrum analyzer to any one measured frequency within its operating range.
- 3) Set RBW = 100kHz, VBW = 300kHz, Sweep = Auto, Detector = Peak.
- 4) Measure the highest amplitude appearing on spectral display and set it as a reference level.
- 5) Set a convenient frequency span including 100 kHz bandwidth from band edge.
- 6) Measure the emission and marking the edge frequency.
- 7) Repeat above procedures until all frequencies measured were complete.



Test Setup Block Diagram

13.3 Test Data and Results




Left earphone:

Test Mode	Band-edge	Test Channel (MHz)	Max. Value (dBc)	Limit (dBc)	Test Result
No-Hopping					
GFSK	Lowest	2402	-53.68	-20	Pass
	Highest	2480	-53.82	-20	Pass
Pi/4 DQPSK	Lowest	2402	-52	-20	Pass
	Highest	2480	-51.13	-20	Pass
8DPSK	Lowest	2402	-51.32	-20	Pass
	Highest	2480	-50.11	-20	Pass
Hopping					
GFSK	Lowest	2402	-53.65	-20	Pass
	Highest	2480	-53.14	-20	Pass
Pi/4 DQPSK	Lowest	2402	-49.76	-20	Pass
	Highest	2480	-49.71	-20	Pass
8DPSK	Lowest	2402	-50.03	-20	Pass
	Highest	2480	-50.21	-20	Pass

Right earphone:


Test Mode	Band-edge	Test Channel (MHz)	Max. Value (dBc)	Limit (dBc)	Test Result
No-Hopping					
GFSK	Lowest	2402	-54.81	-20	Pass
	Highest	2480	-53.98	-20	Pass
Pi/4 DQPSK	Lowest	2402	-51.8	-20	Pass
	Highest	2480	-51.38	-20	Pass
8DPSK	Lowest	2402	-52.01	-20	Pass
	Highest	2480	-50.33	-20	Pass
Hopping					
GFSK	Lowest	2402	-53.65	-20	Pass
	Highest	2480	-52.35	-20	Pass
Pi/4 DQPSK	Lowest	2402	-50.76	-20	Pass
	Highest	2480	-48.97	-20	Pass
8DPSK	Lowest	2402	-48.5	-20	Pass
	Highest	2480	-50.37	-20	Pass

Left earphone:

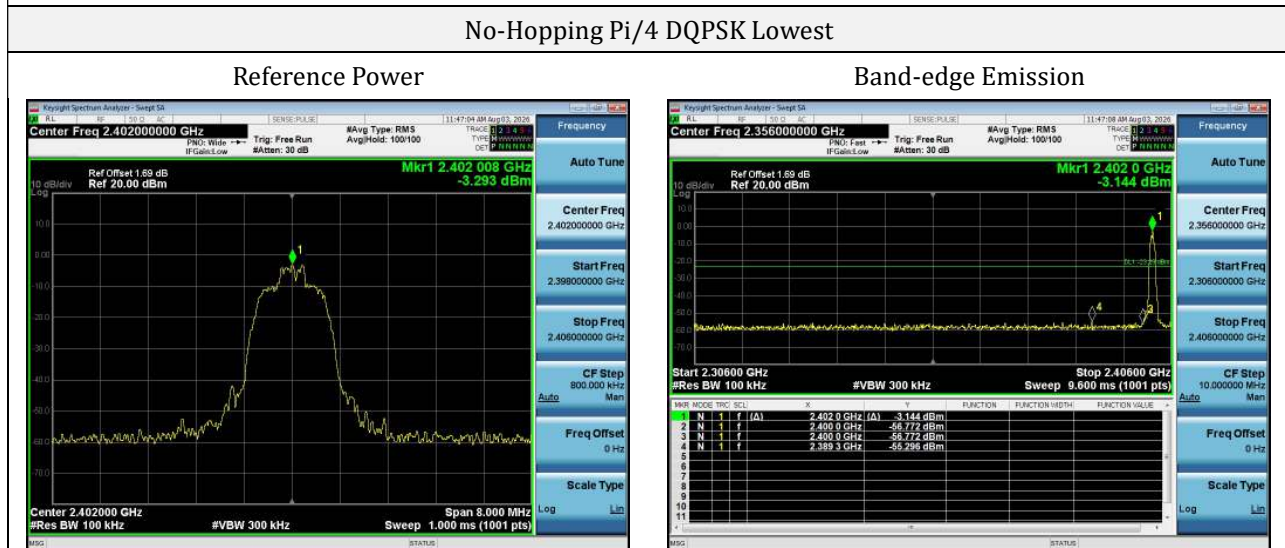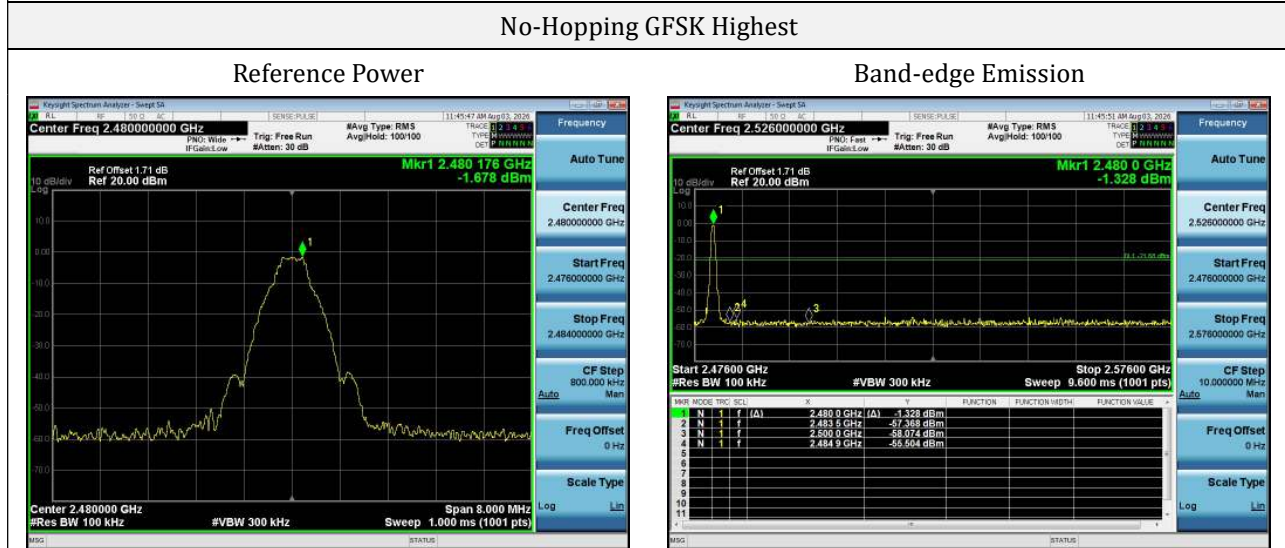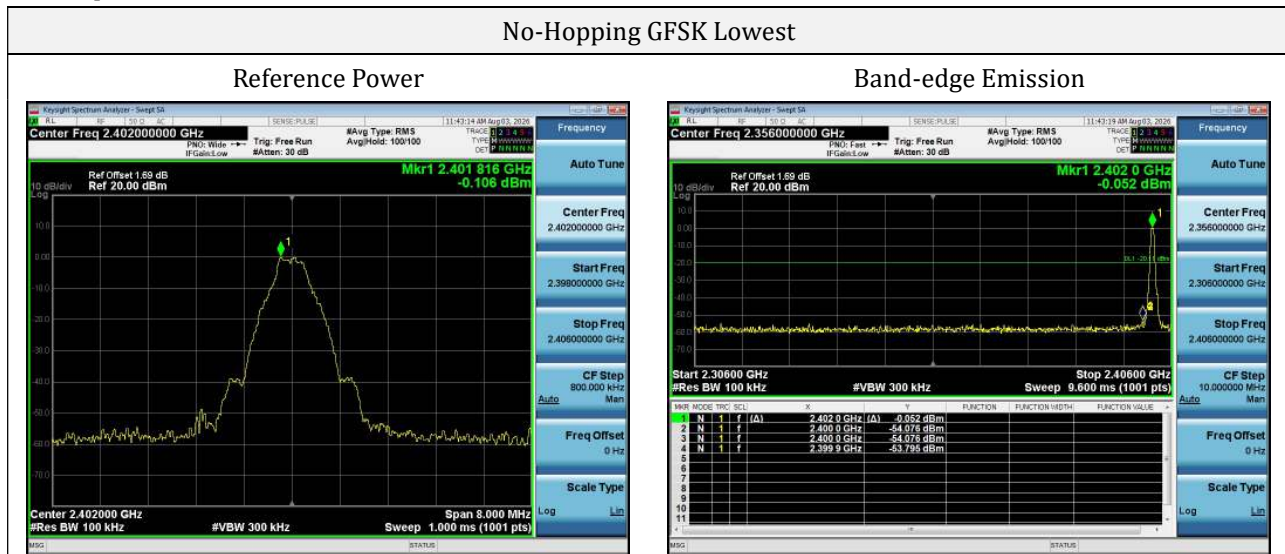


No-Hopping Pi/4 DQPSK Highest

Reference Power

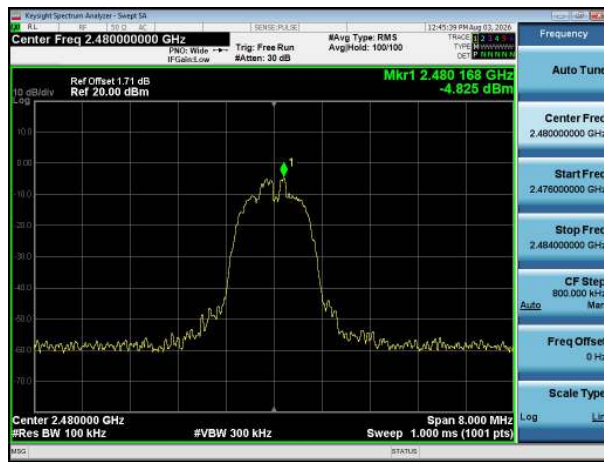


Band-edge Emission

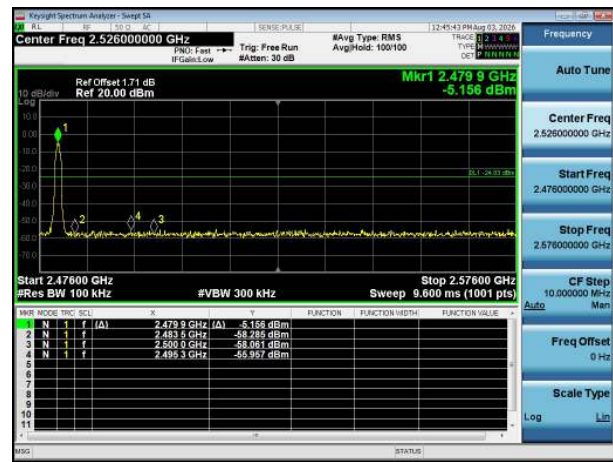


No-Hopping 8DPSK Lowest

Reference Power

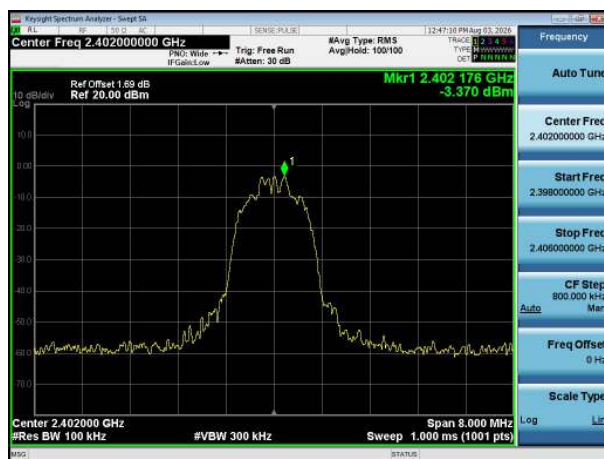


Band-edge Emission

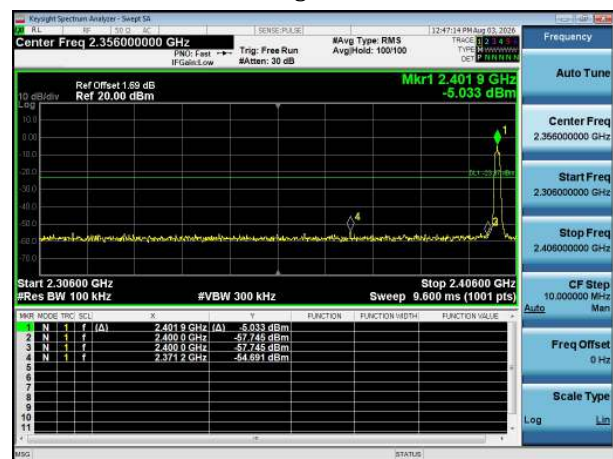


No-Hopping 8DPSK Highest

Reference Power

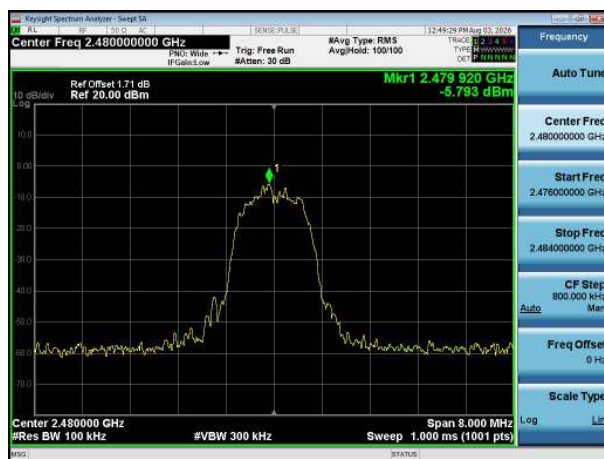

Band-edge Emission

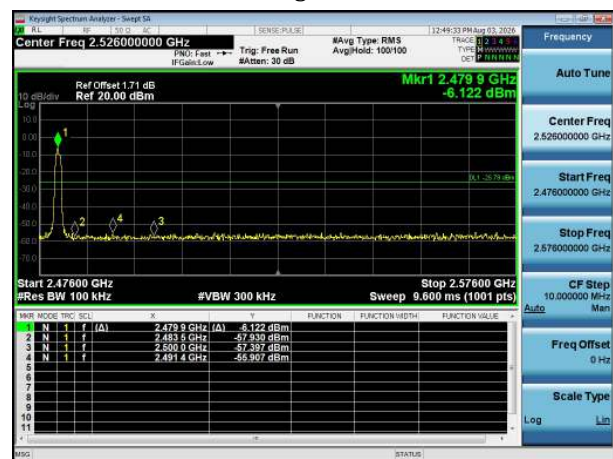


Hopping GFSK Lowest

Reference Power



Band-edge Emission

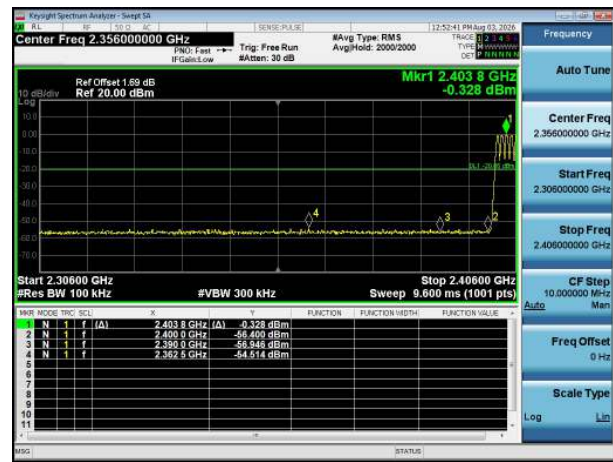


Hopping GFSK Highest

Reference Power




Band-edge Emission

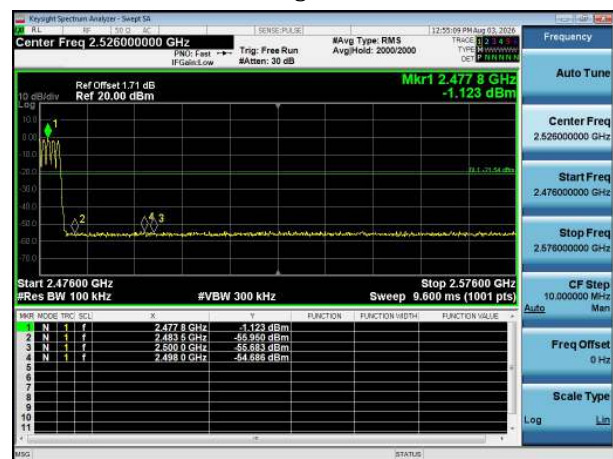


Hopping Pi/4 DQPSK Lowest

Reference Power

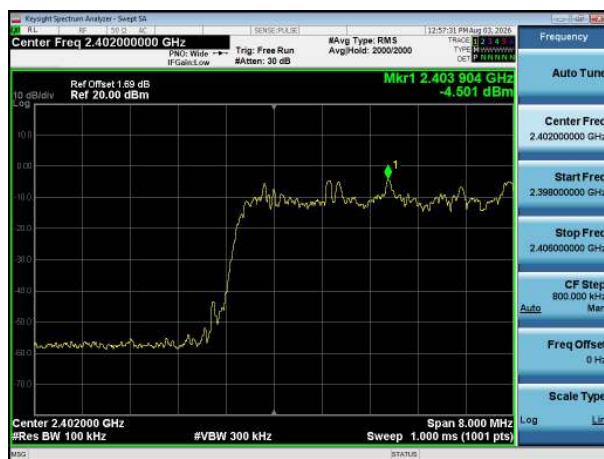

Band-edge Emission

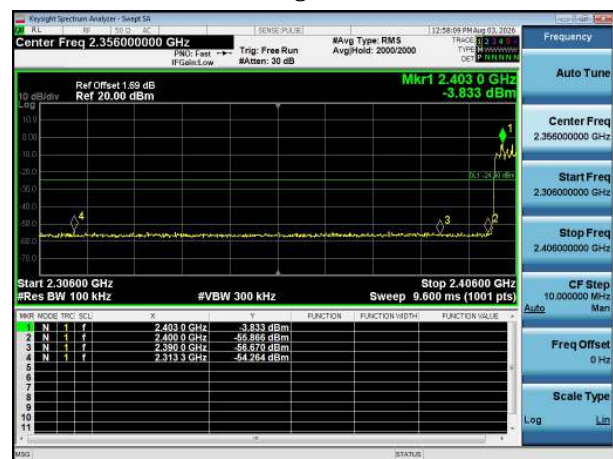


Hopping Pi/4 DQPSK Highest

Reference Power




Band-edge Emission

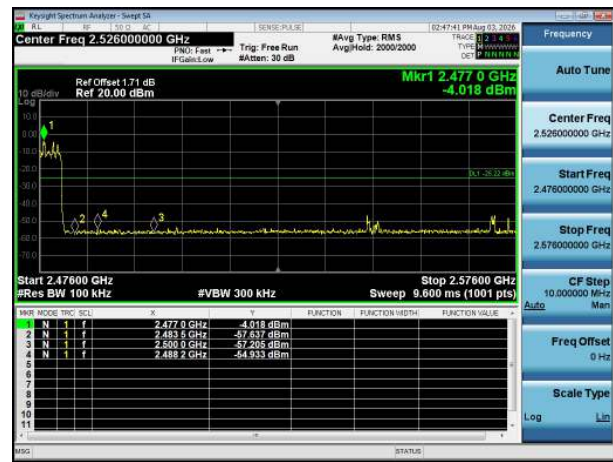


Hopping 8DPSK Lowest

Reference Power

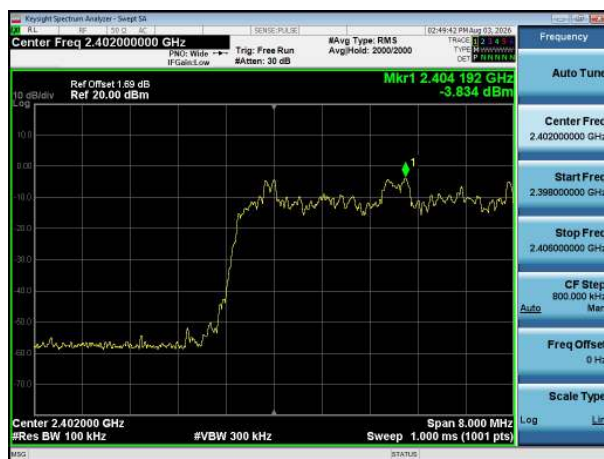


Band-edge Emission

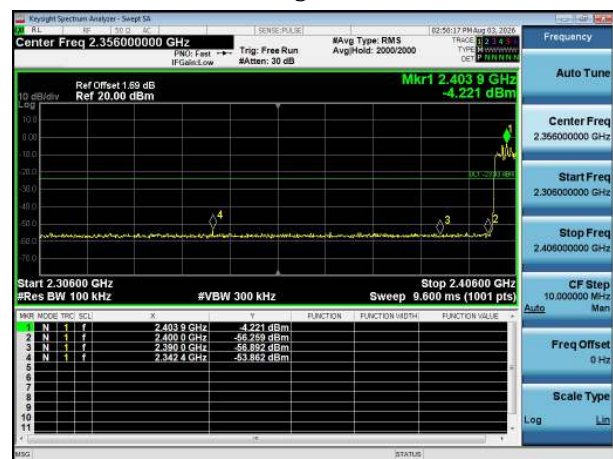


Hopping 8DPSK Highest

Reference Power

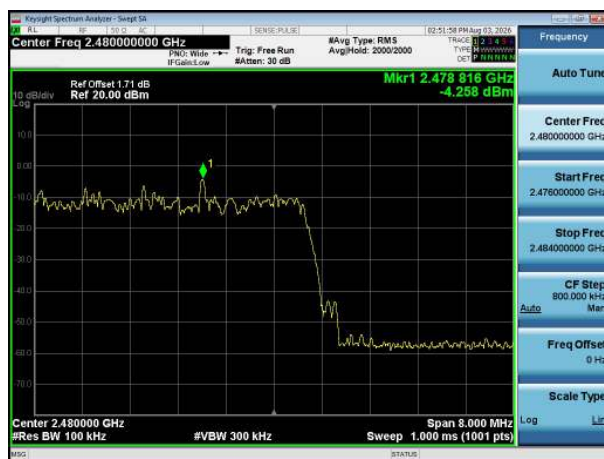


Band-edge Emission

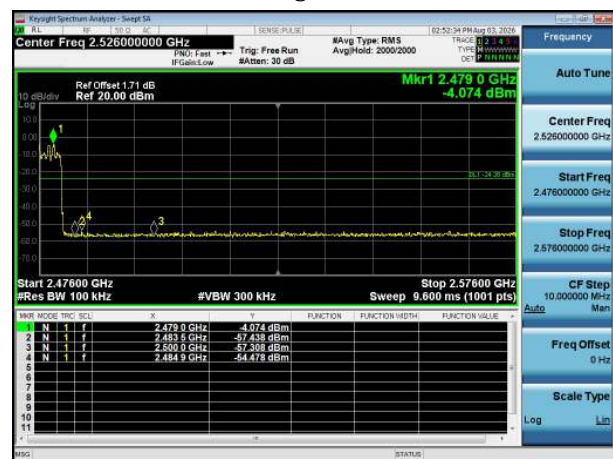


Right earphone:

No-Hopping GFSK Lowest

Reference Power

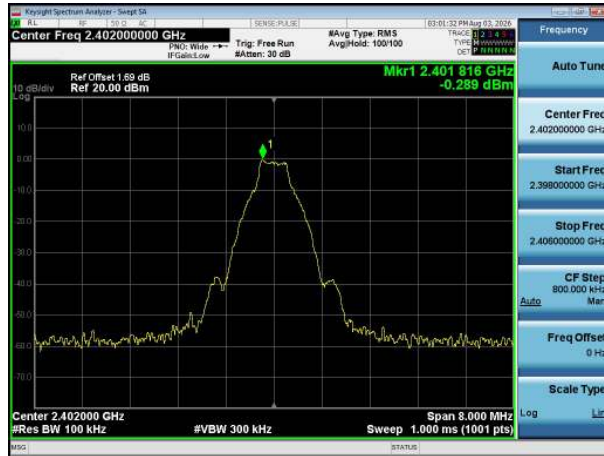


Band-edge Emission

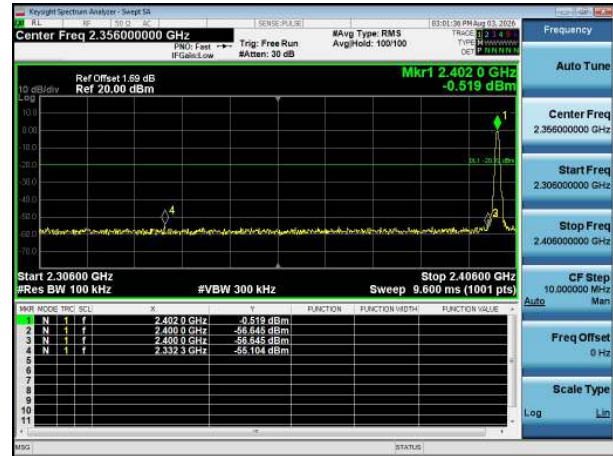


No-Hopping GFSK Highest

Reference Power

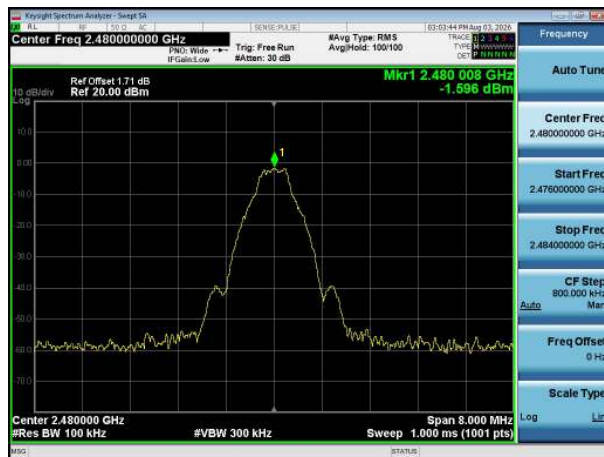


Band-edge Emission

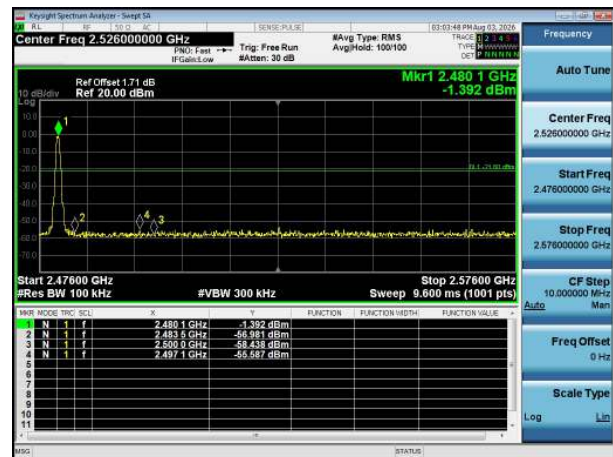


No-Hopping Pi/4 DQPSK Lowest

Reference Power

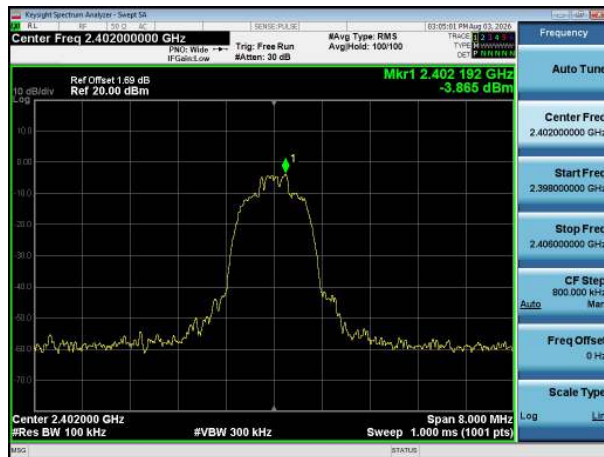


Band-edge Emission

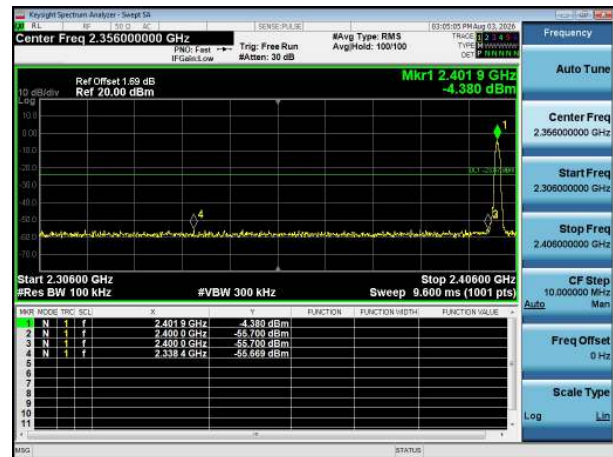


No-Hopping Pi/4 DQPSK Highest

Reference Power

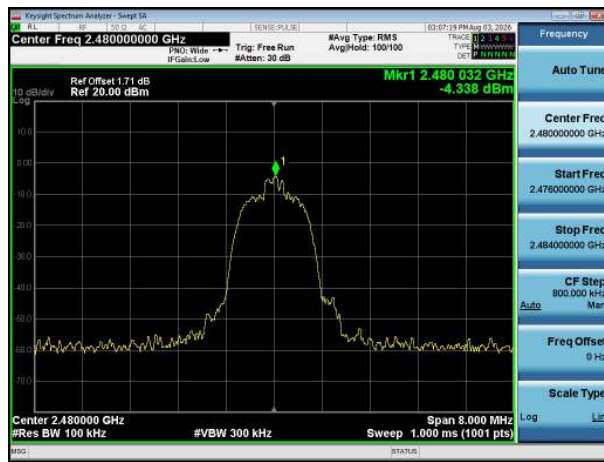


Band-edge Emission

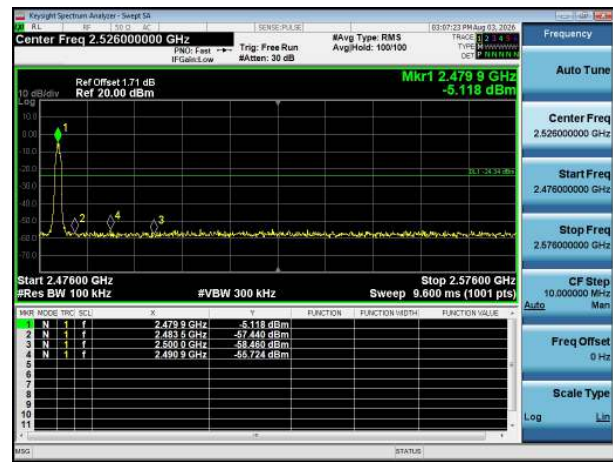


No-Hopping 8DPSK Lowest

Reference Power

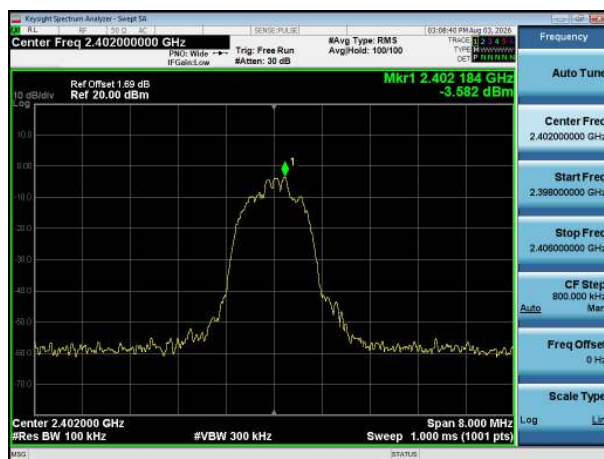


Band-edge Emission

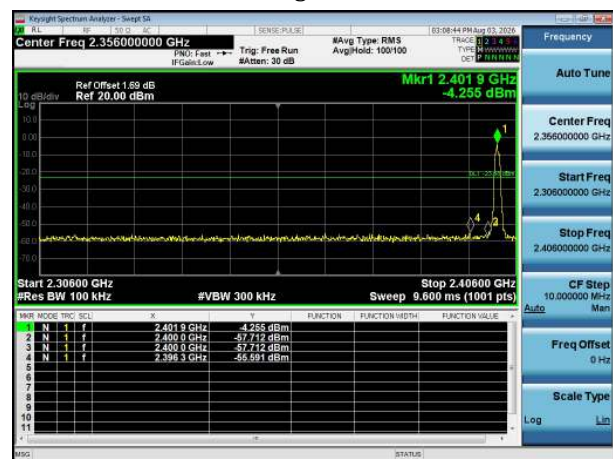


No-Hopping 8DPSK Highest

Reference Power

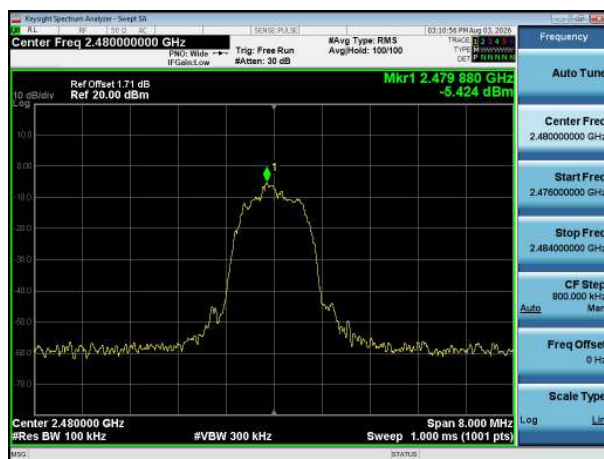

Band-edge Emission

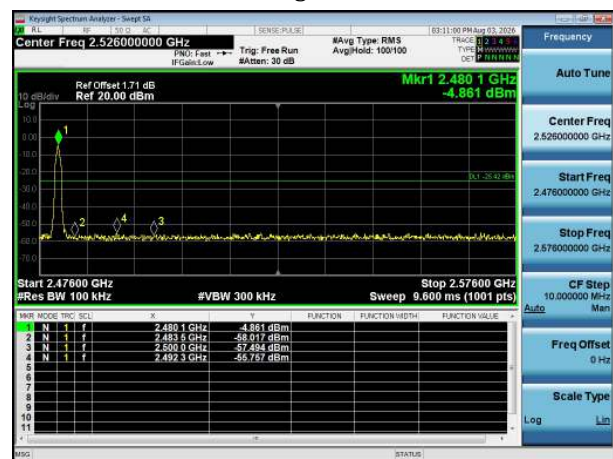


Hopping GFSK Lowest

Reference Power




Band-edge Emission

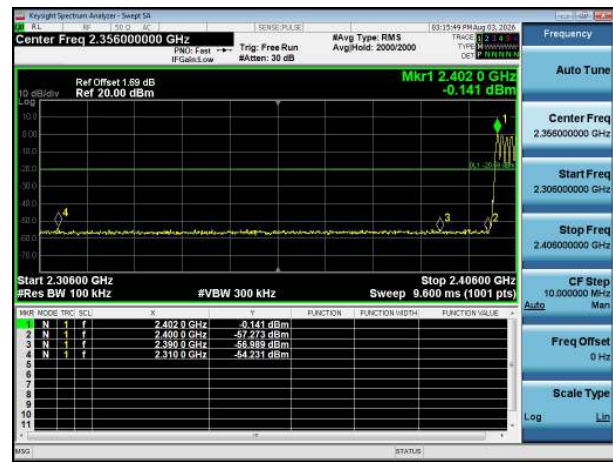


Hopping GFSK Highest

Reference Power

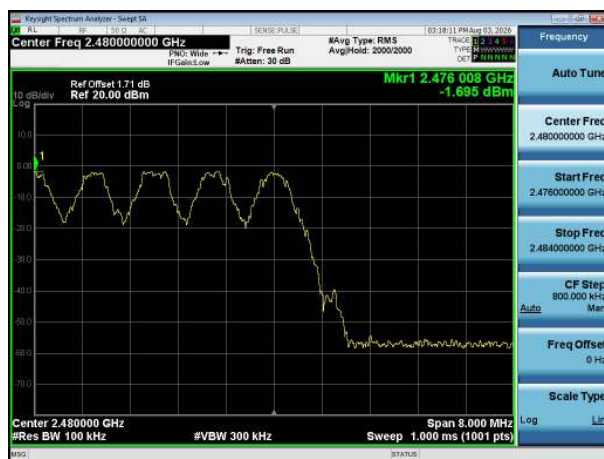


Band-edge Emission

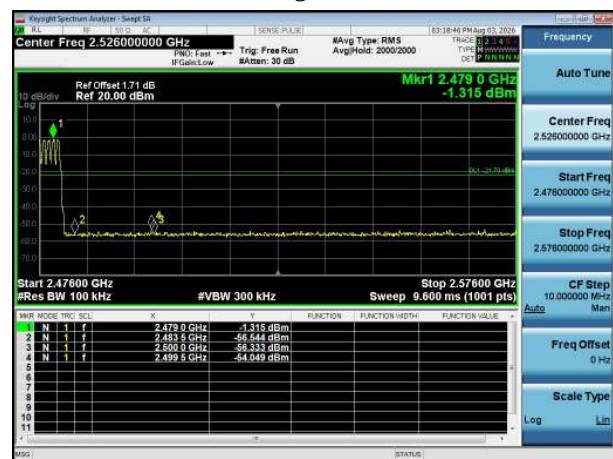


Hopping Pi/4 DQPSK Lowest

Reference Power

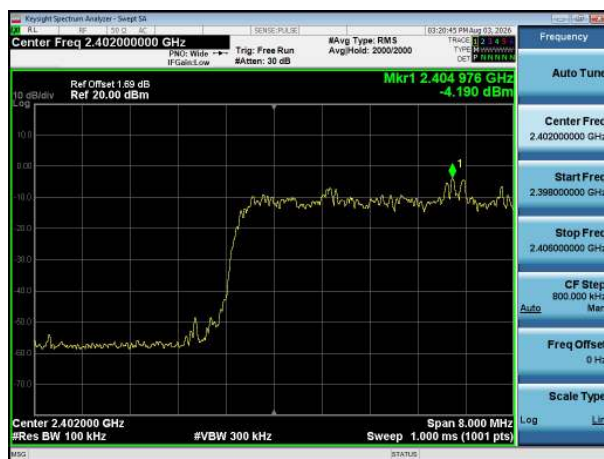

Band-edge Emission

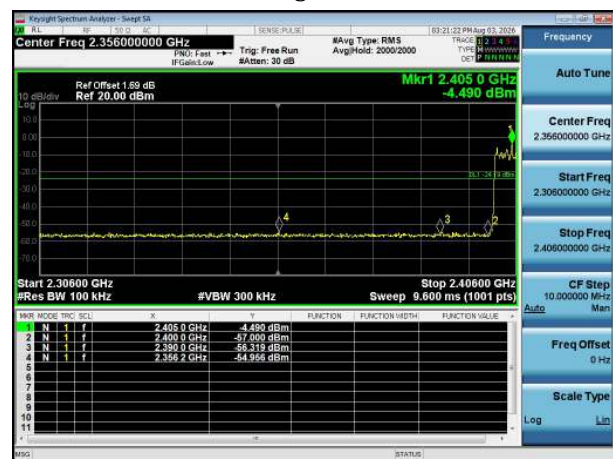


Hopping Pi/4 DQPSK Highest

Reference Power




Band-edge Emission

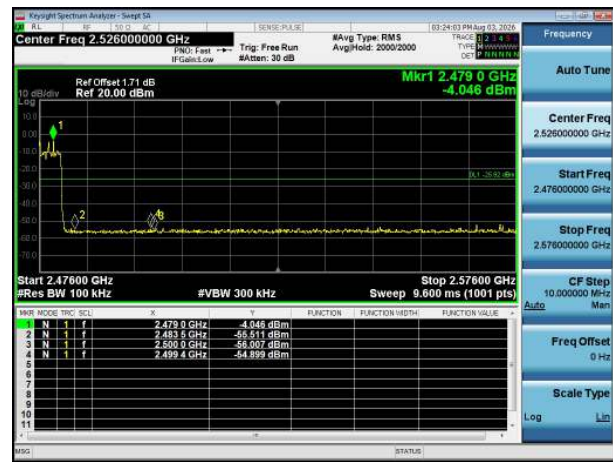


Hopping 8DPSK Lowest

Reference Power

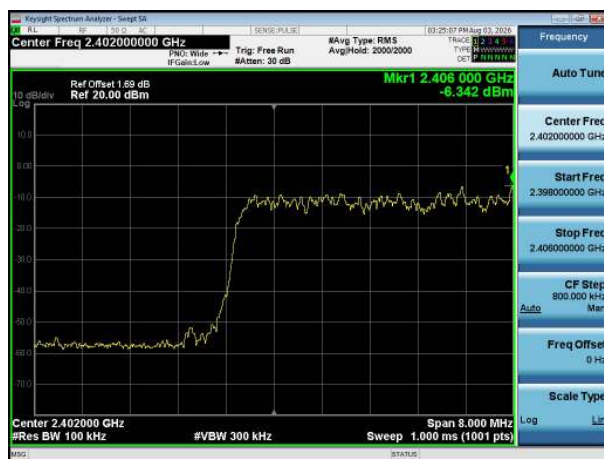


Band-edge Emission

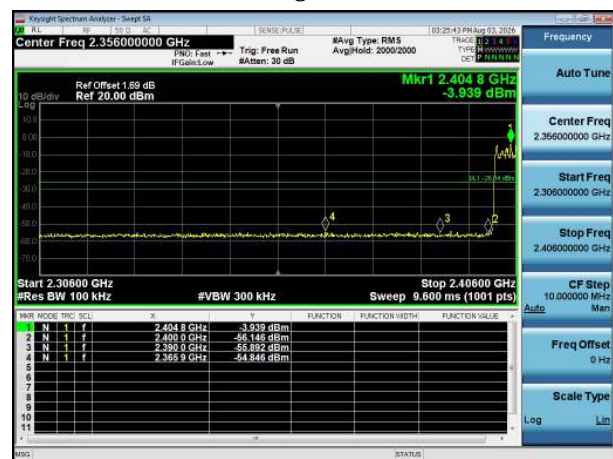


Hopping 8DPSK Highest

Reference Power

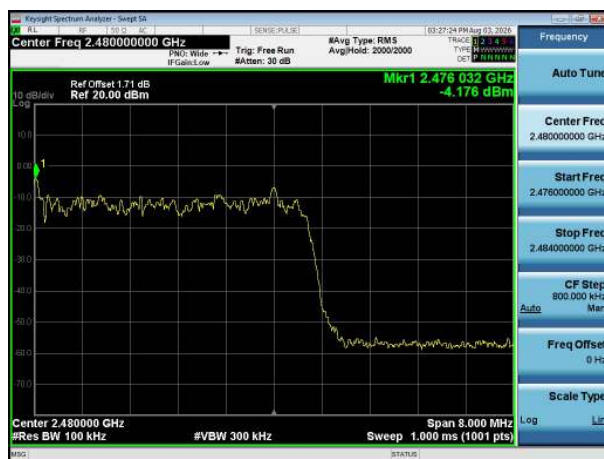

Band-edge Emission

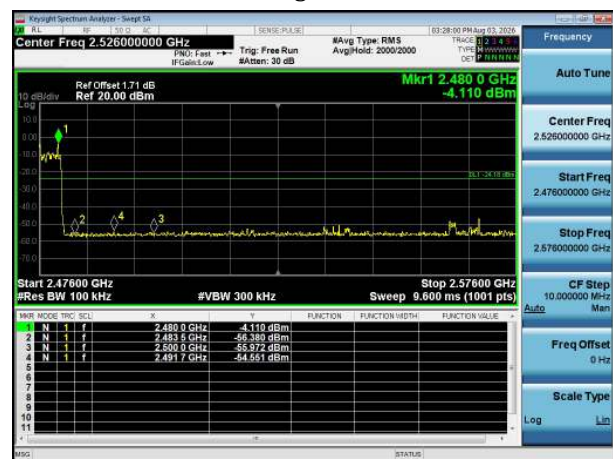

14. Conducted RF Spurious Emissions

14.1 Standard and Limit

According to §15.247(d), In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in § 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

14.2 Test Procedure

Test is conducting under the description of ANSI C63.10-2020 section 6.7.

- 1) Remove the antenna from the EUT and connect to the spectrum analyzer via a low loss RF cable.
- 2) Set the spectrum analyzer to any one measured frequency within its operating range.
- 3) Set RBW = 100kHz, VBW = 300kHz, Sweep = Auto, Detector = Peak.
- 4) Measure the highest amplitude appearing on spectral display and set it as a reference level.
- 5) Measure the spurious emissions with frequency range from 9kHz to 26.5GHz.
- 6) Repeat above procedures until all measured frequencies were complete.



Test Setup Block Diagram

14.3 Test Data and Results

Note: The measurement frequency range is from 9kHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions measurement data.


Left earphone:

GFSK Lowest

Reference Power



Spurious Emissions

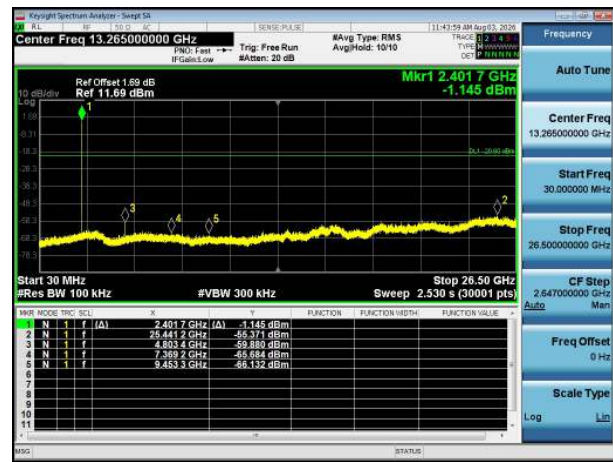


GFSK Middle

Reference Power



Spurious Emissions

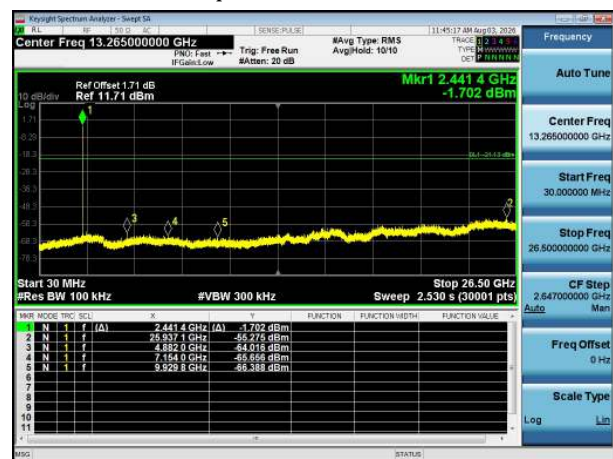


GFSK Highest

Reference Power



Spurious Emissions

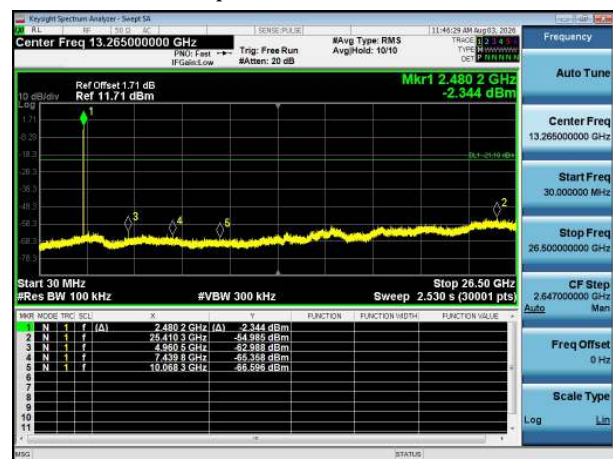


Pi/4 DQPSK Lowest

Reference Power



Spurious Emissions

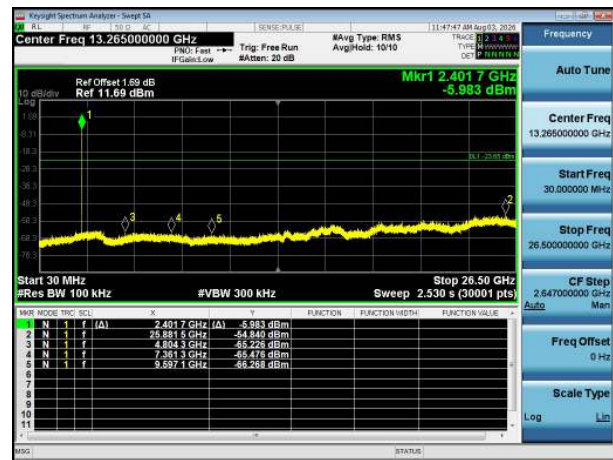


Pi/4 DQPSK Middle

Reference Power



Spurious Emissions

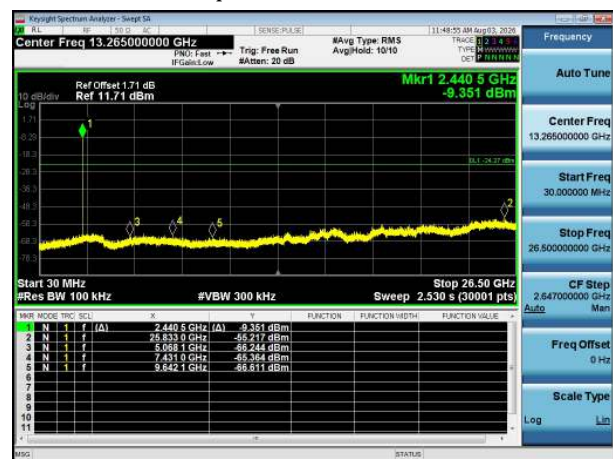


Pi/4 DQPSK Highest

Reference Power



Spurious Emissions

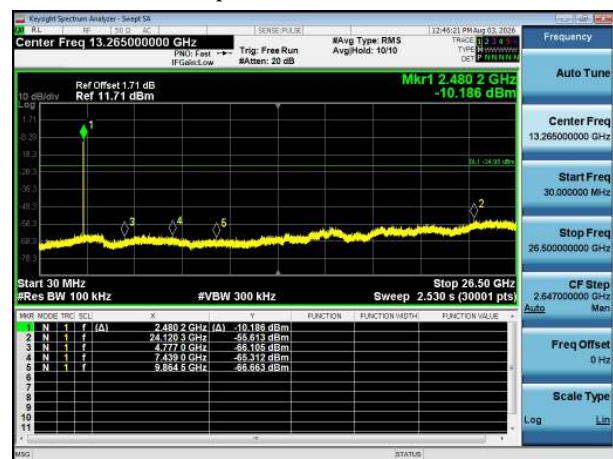


8DPSK Lowest

Reference Power



Spurious Emissions

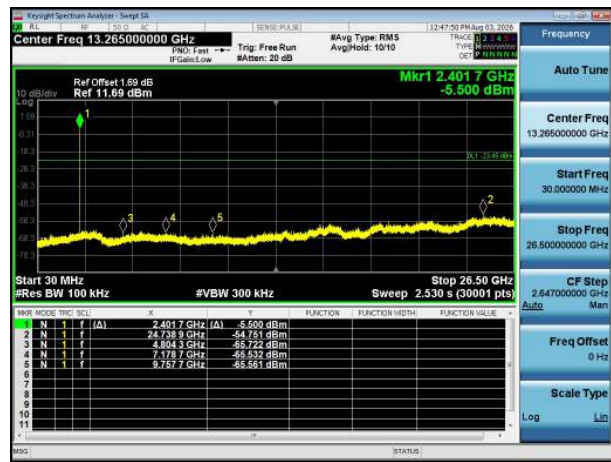


8DPSK Middle

Reference Power



Spurious Emissions

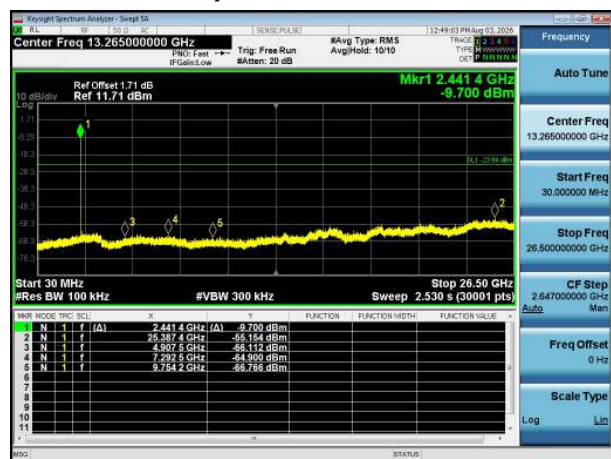


8DPSK Highest

Reference Power



Spurious Emissions

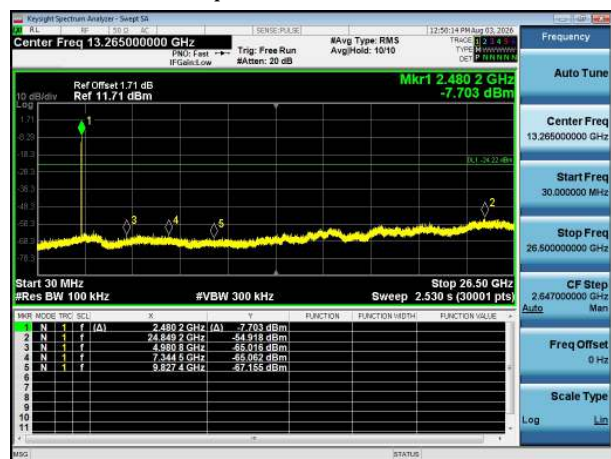


Right earphone:

GFSK Lowest

Reference Power



Spurious Emissions

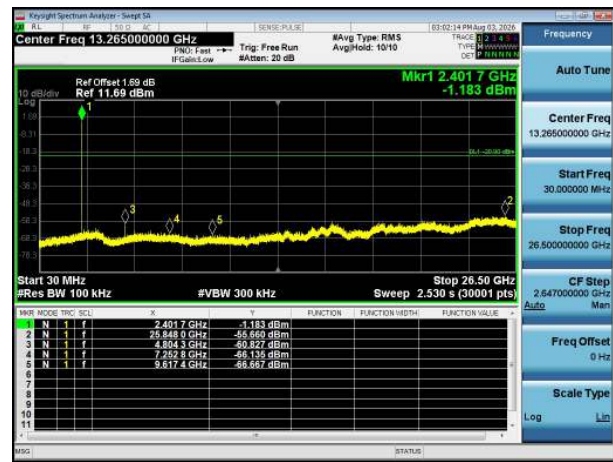


GFSK Middle

Reference Power



Spurious Emissions

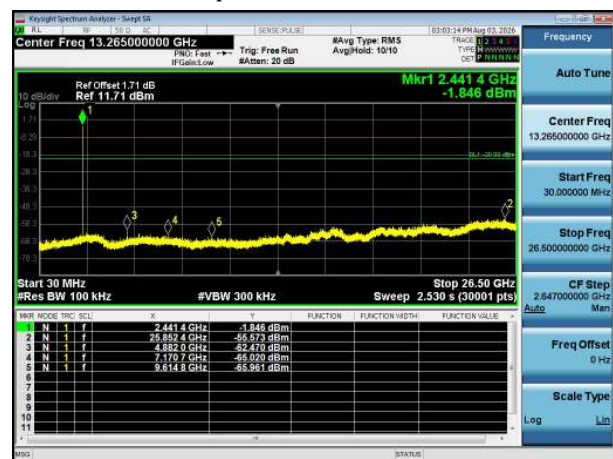


GFSK Highest

Reference Power



Spurious Emissions

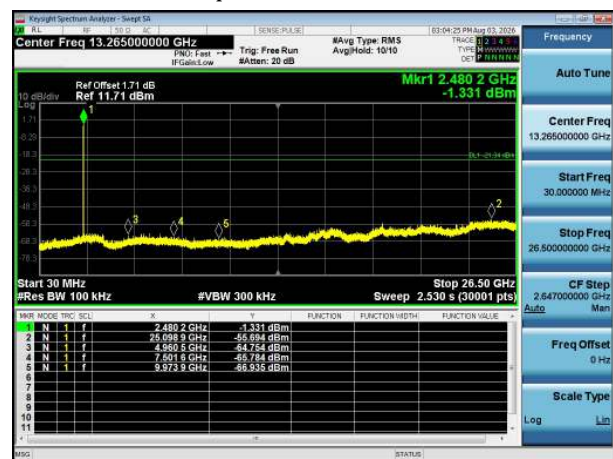


Pi/4 DQPSK Lowest

Reference Power



Spurious Emissions

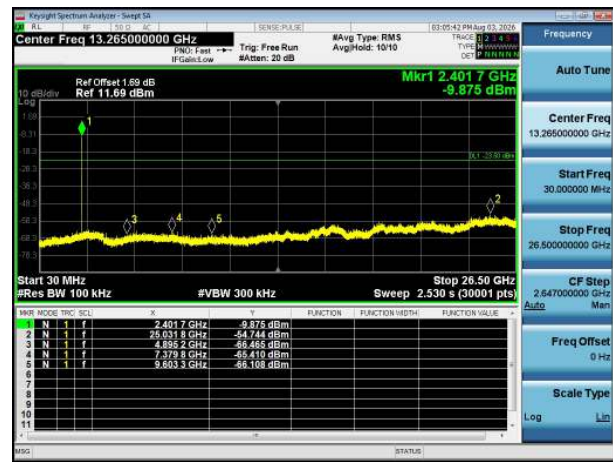


Pi/4 DQPSK Middle

Reference Power



Spurious Emissions

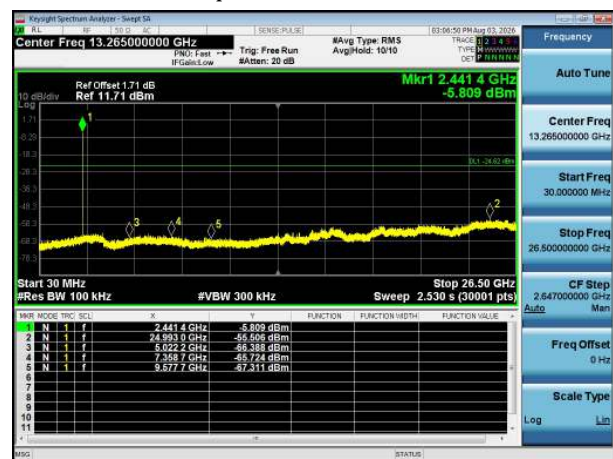


Pi/4 DQPSK Highest

Reference Power



Spurious Emissions

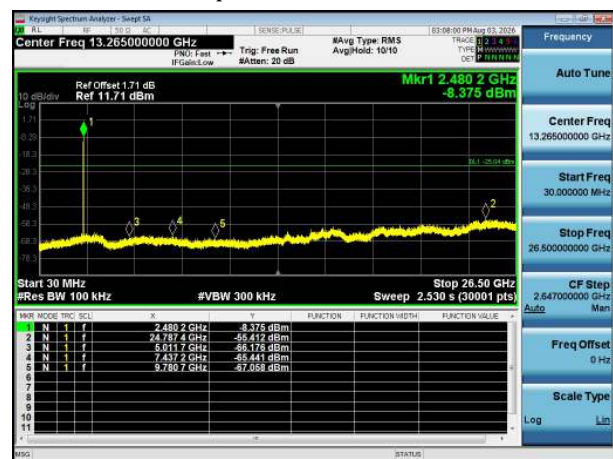


8DPSK Lowest

Reference Power




Spurious Emissions

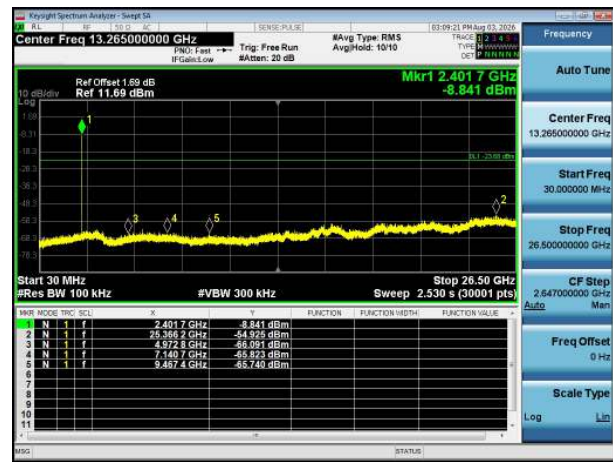


8DPSK Middle

Reference Power

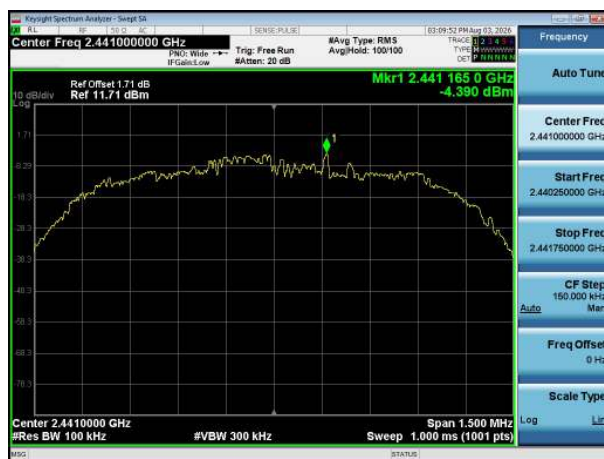

Spurious Emissions

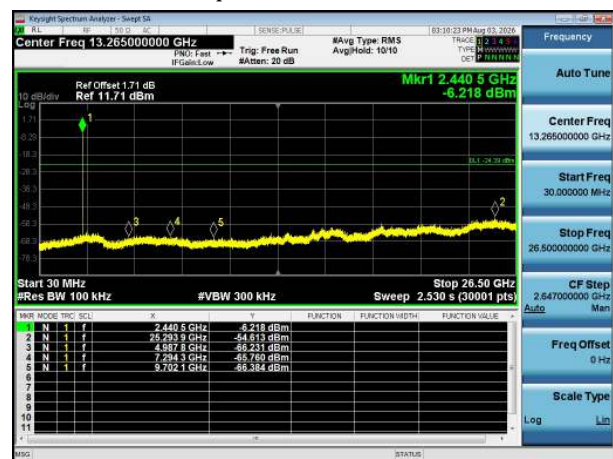


8DPSK Highest

Reference Power



Spurious Emissions

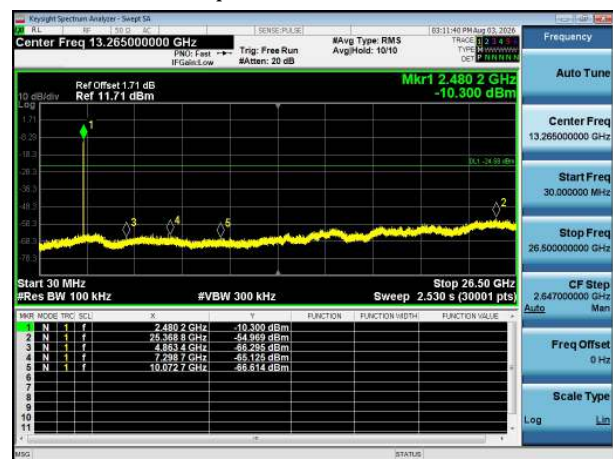

***** END OF REPORT *****