



RF Test Data

For

Project No.:	DLE-251010057R
Client:	Zhuhai Quin Technology Co., Ltd.
Manufacturer:	Zhuhai Quin Technology Co., Ltd.
Product Description:	Portable Label Maker
Model Number:	DM170
Test Engineer:	Alisa Song
Test Date:	2025-09-30

Test Summary

Item	Result
Duty Cycle	Pass
Bandwidth	Pass
Maximum Conducted Output Power	Pass
Carrier Frequency Separation	Pass
Number of Hopping Frequencies	Pass
Time of Occupancy (Dwell Time)	Pass
Unwanted Emissions In Non-restricted Frequency Bands	Pass
Frequency Error	Pass



1. Duty Cycle

1.1 Test Result


1.1.1 Ant1

Ant1								
Mode	TX Type	Frequency (MHz)	Packet Type	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
GFSK	SISO	2402	DH5	2.886	3.749	76.98	1.14	0.04
		2441	DH5	2.888	3.751	76.99	1.14	0.03
		2480	DH5	2.888	3.751	76.99	1.14	0.03
Pi/4DQPSK	SISO	2402	2DH5	2.893	3.750	77.15	1.13	0.04
		2441	2DH5	2.894	3.751	77.15	1.13	0.04
		2480	2DH5	2.887	3.751	76.97	1.14	0.03
8DPSK	SISO	2402	3DH5	2.895	3.750	77.20	1.12	0.03
		2441	3DH5	2.895	3.750	77.20	1.12	0.03
		2480	3DH5	2.894	3.749	77.19	1.12	0.01




1.2 Test Graph

1.2.1 Ant1

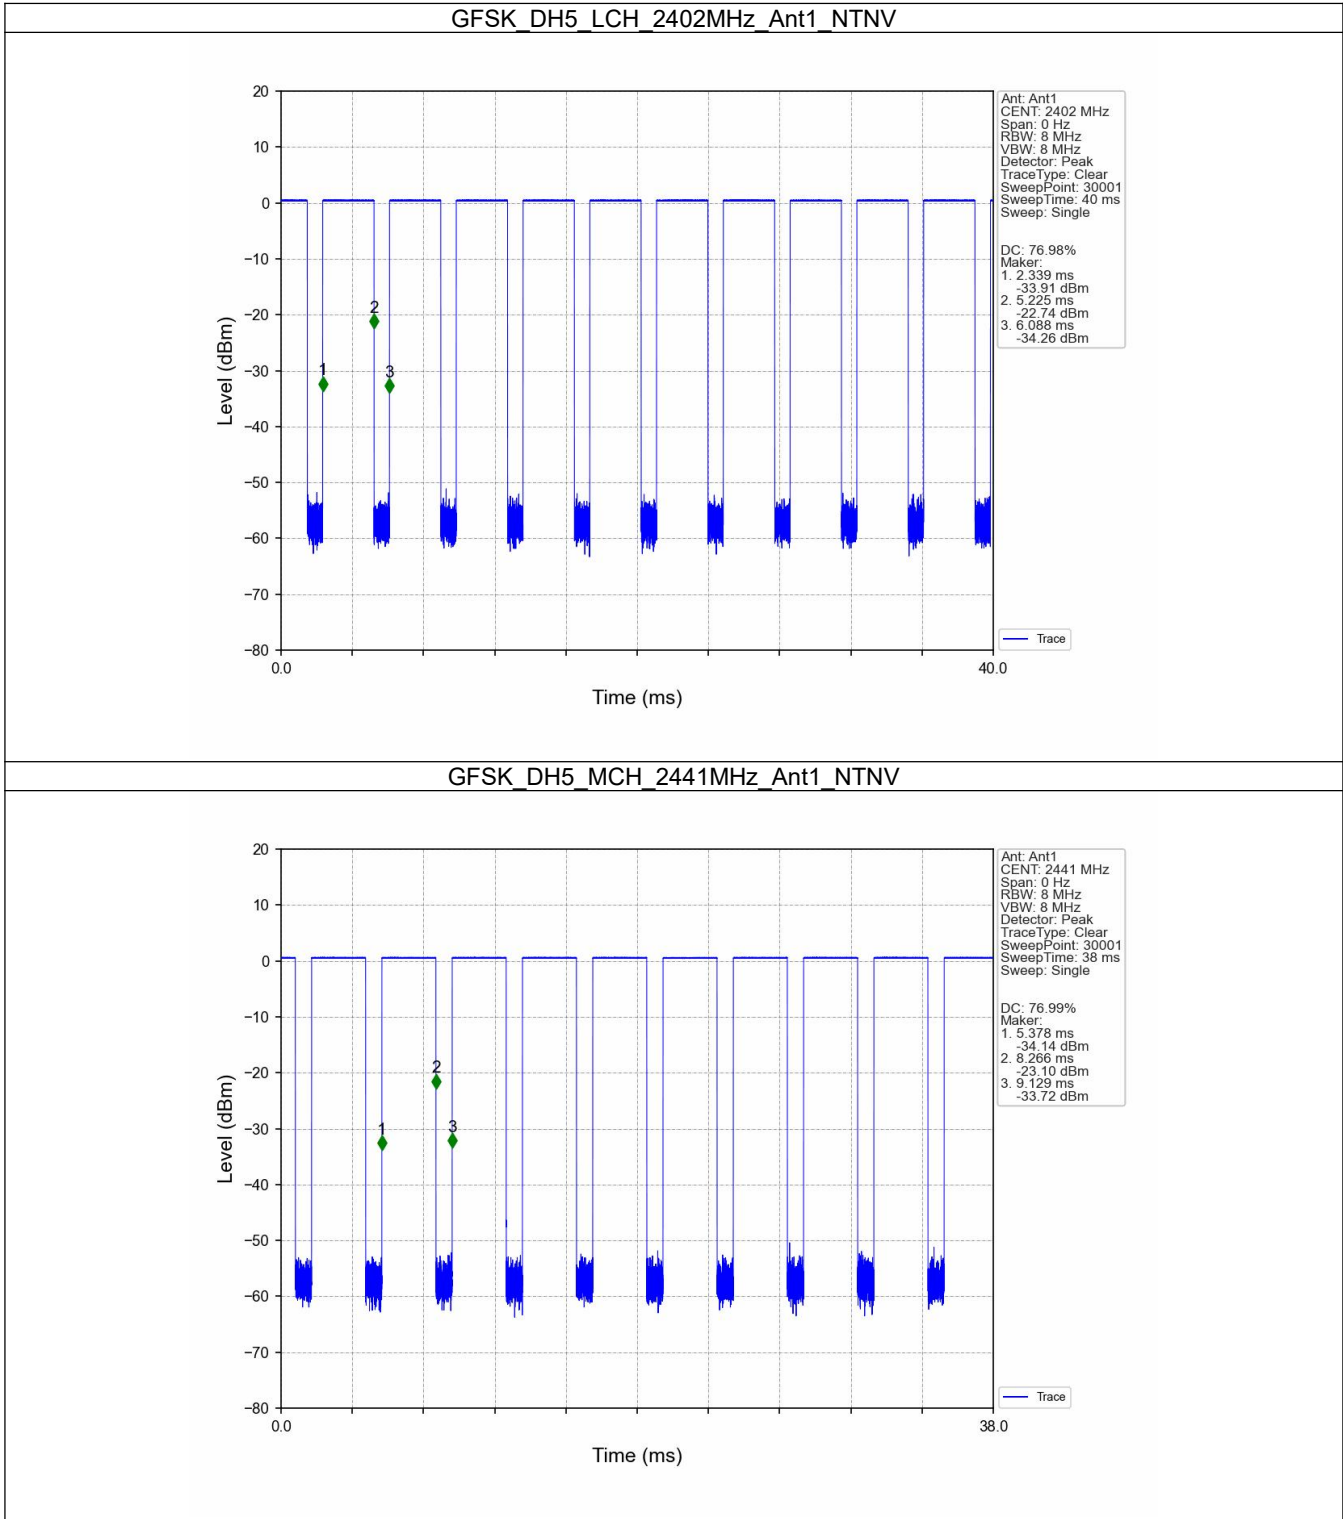




GFSK_DH5_HCH_2480MHz_Ant1_NTNV

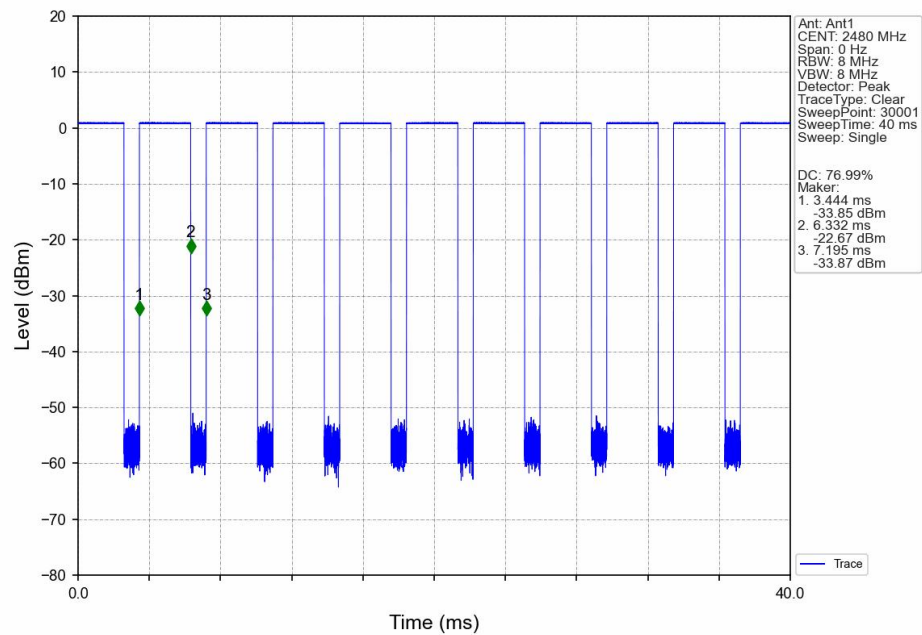


PI/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

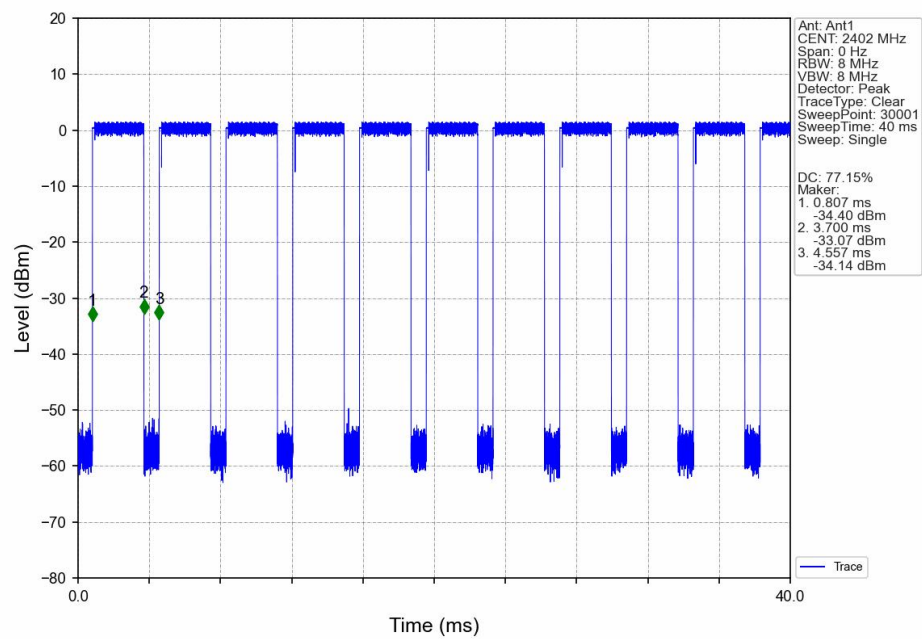




Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

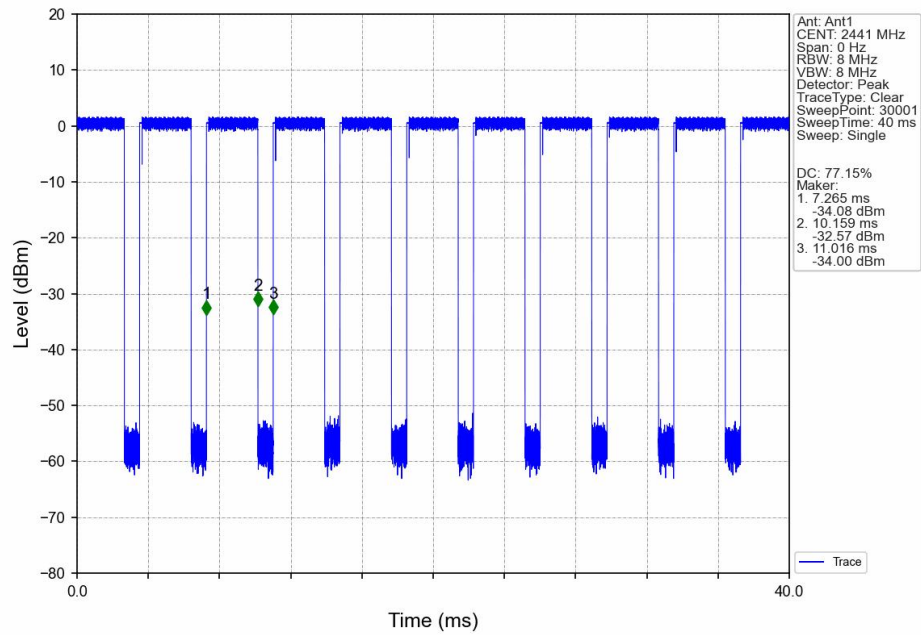


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

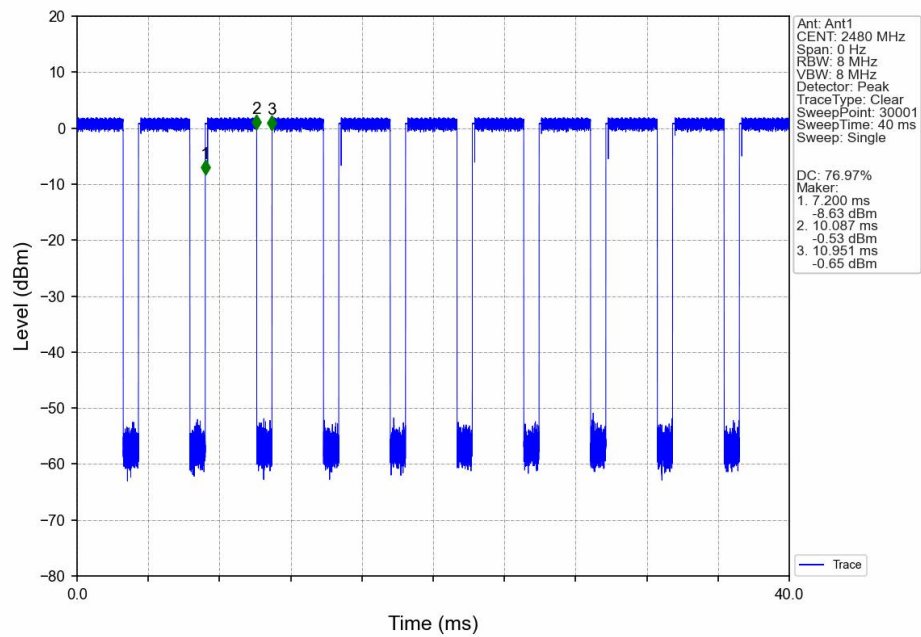




8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

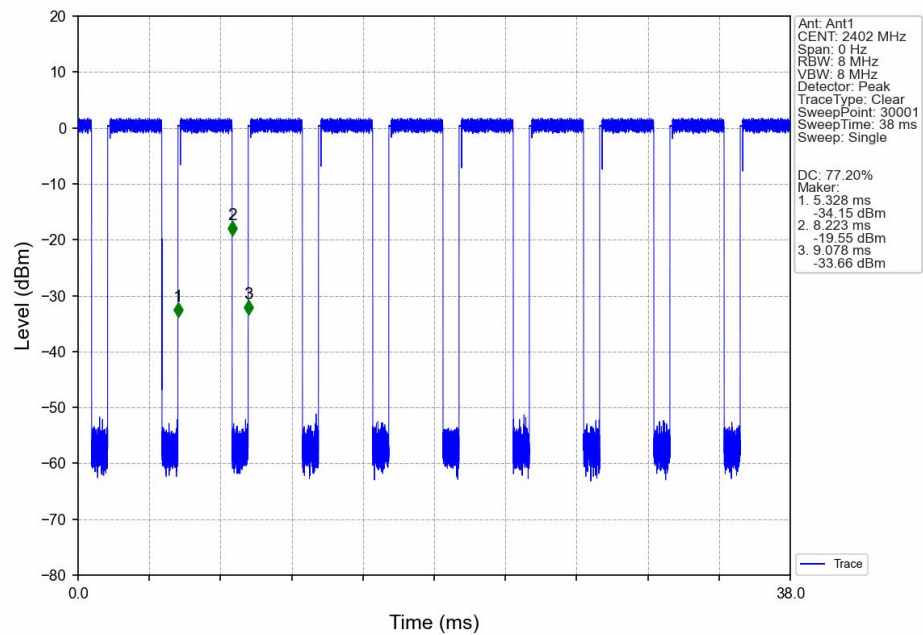


8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

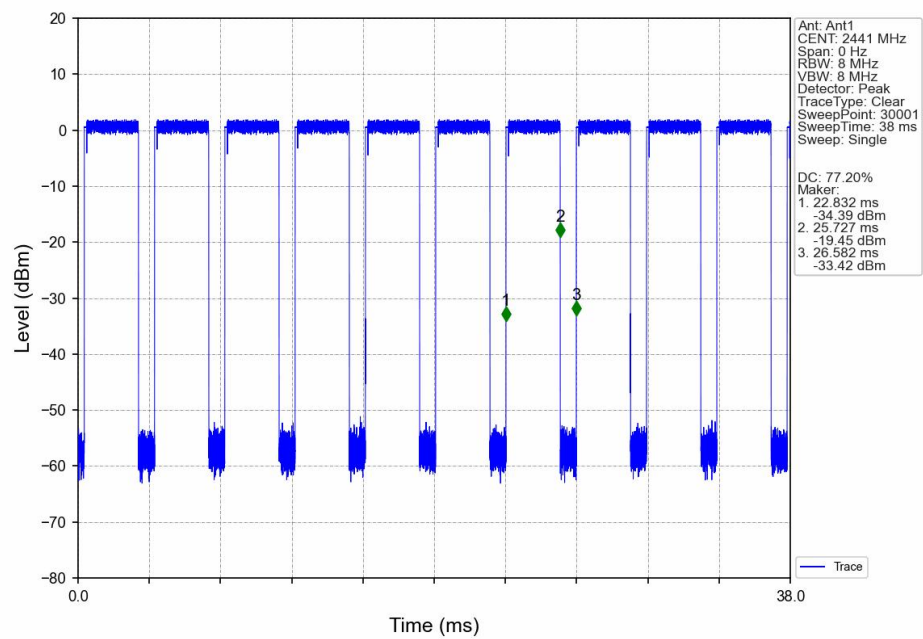



8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

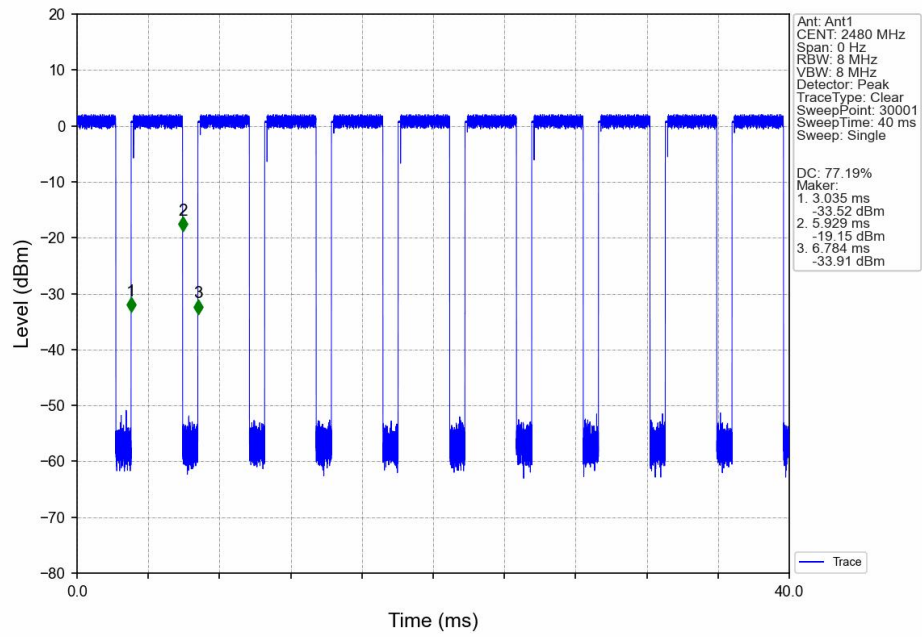



2. Bandwidth

2.1 Test Result

2.1.1 OBW

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	99% Occupied Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.885	/	Pass
		2441	DH5	1	0.892	/	Pass
		2480	DH5	1	0.900	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.179	/	Pass
		2441	2DH5	1	1.186	/	Pass
		2480	2DH5	1	1.186	/	Pass
8DPSK	SISO	2402	3DH5	1	1.183	/	Pass
		2441	3DH5	1	1.185	/	Pass
		2480	3DH5	1	1.186	/	Pass


2.1.2 20dB BW

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	1.021	/	Pass
		2441	DH5	1	1.023	/	Pass
		2480	DH5	1	1.033	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.292	/	Pass
		2441	2DH5	1	1.328	/	Pass
		2480	2DH5	1	1.324	/	Pass
8DPSK	SISO	2402	3DH5	1	1.306	/	Pass
		2441	3DH5	1	1.304	/	Pass
		2480	3DH5	1	1.303	/	Pass




2.2 Test Graph

2.2.1 OBW

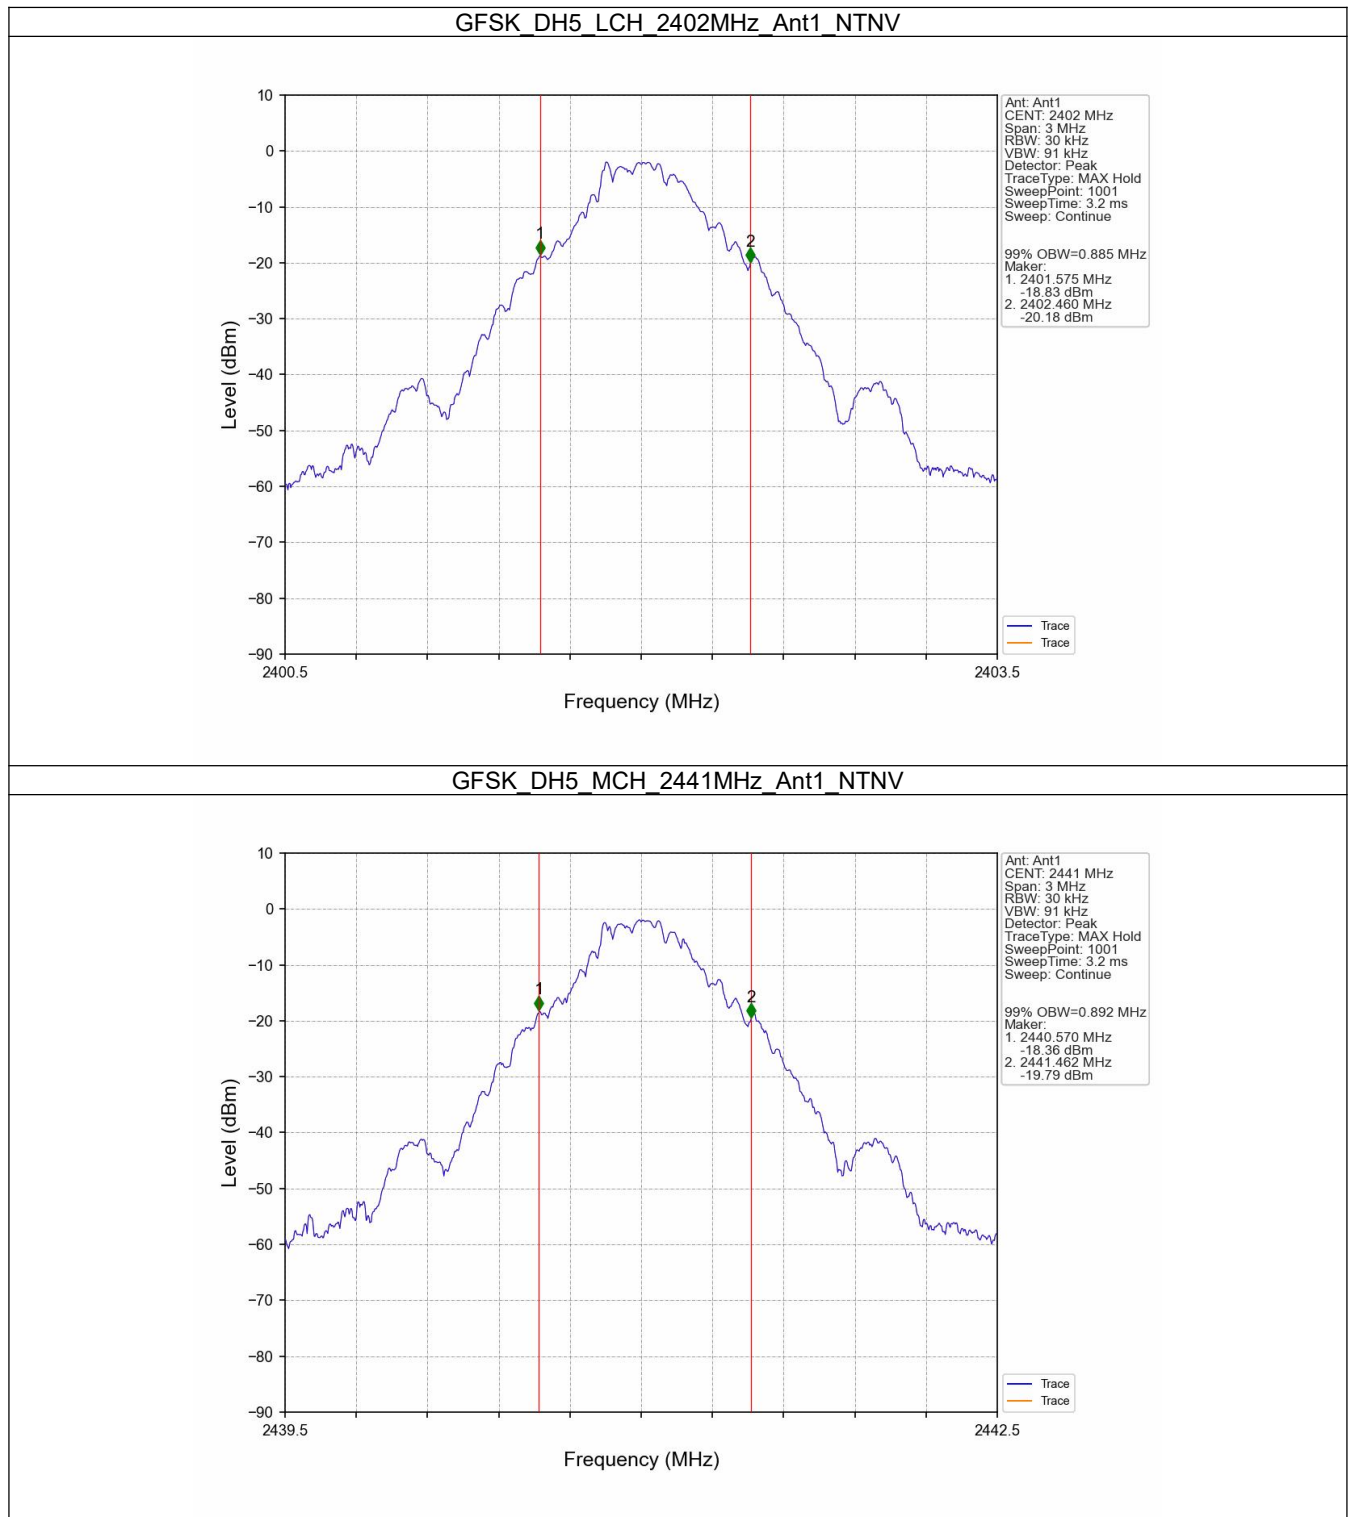




GFSK_DH5_HCH_2480MHz_Ant1_NTNV

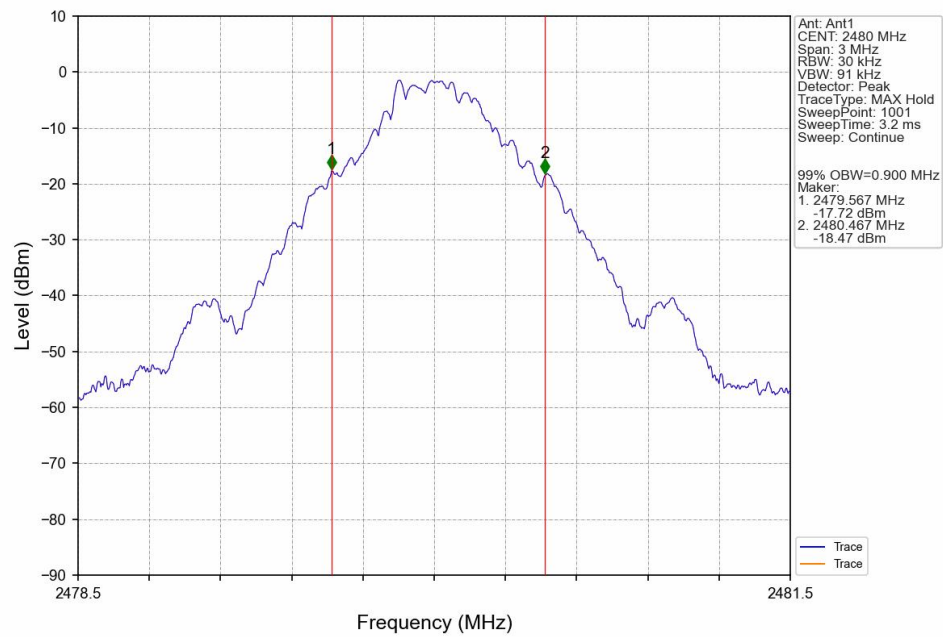


PI/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

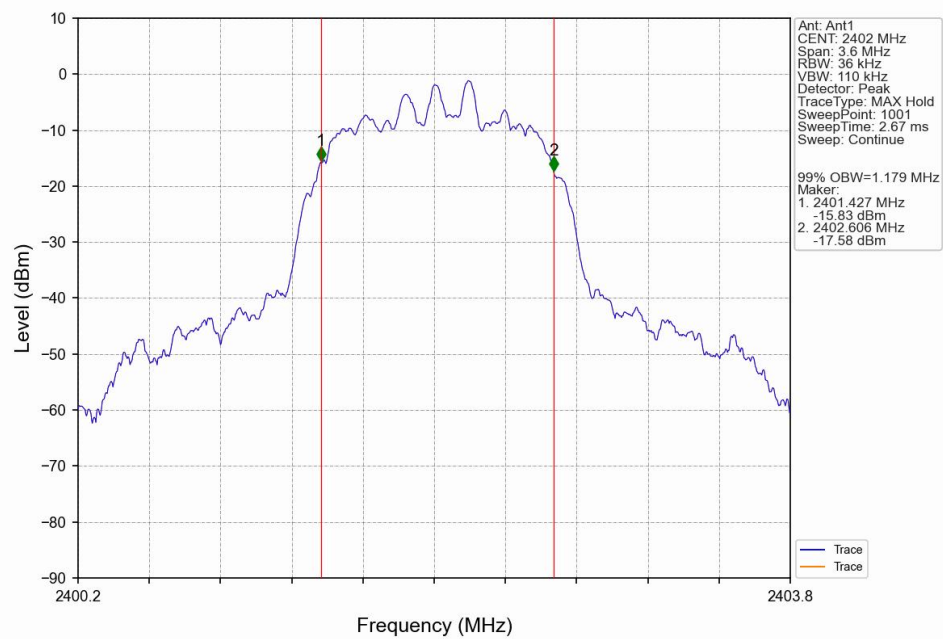




Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

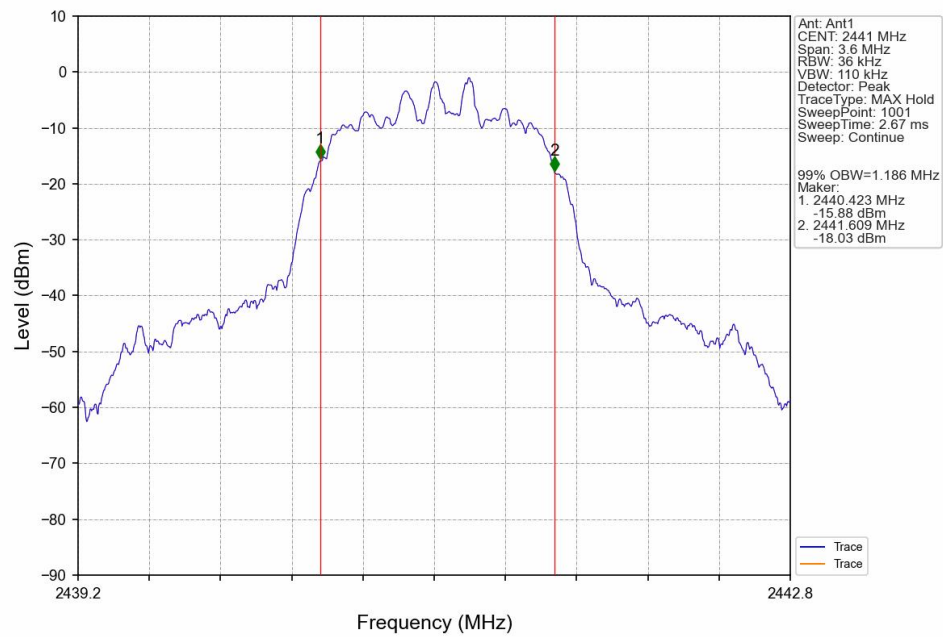


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

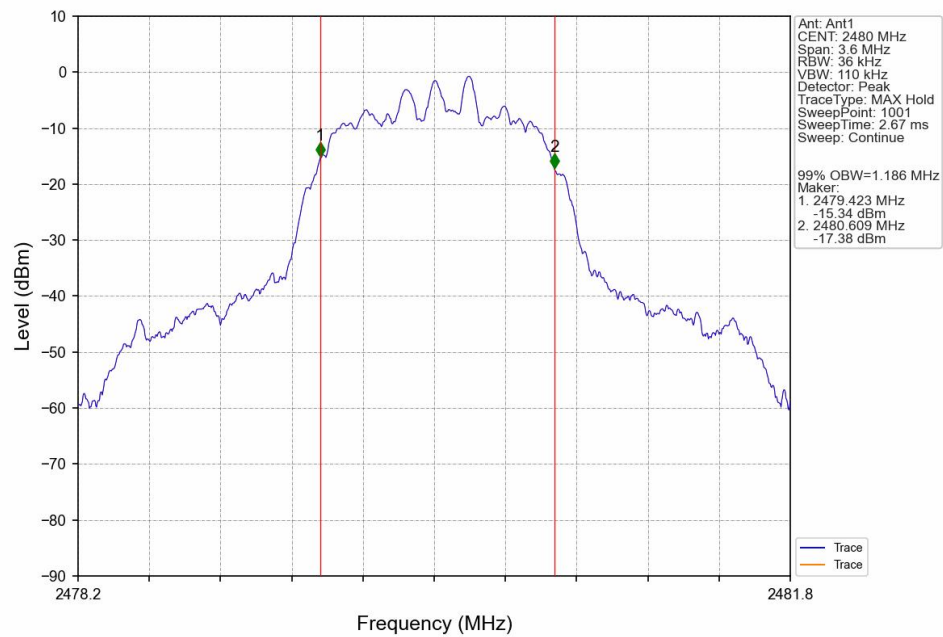




8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

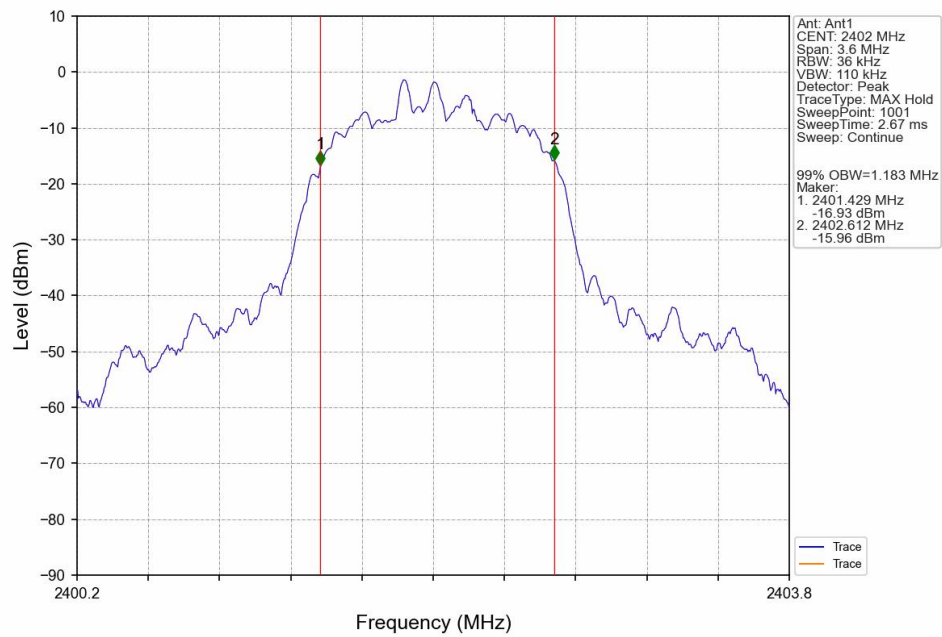


8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

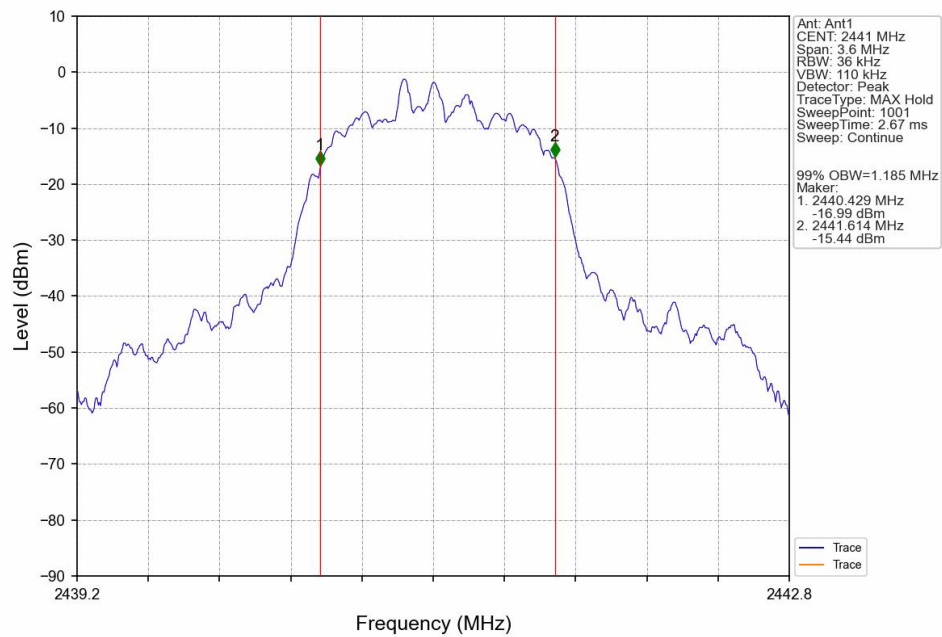




8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

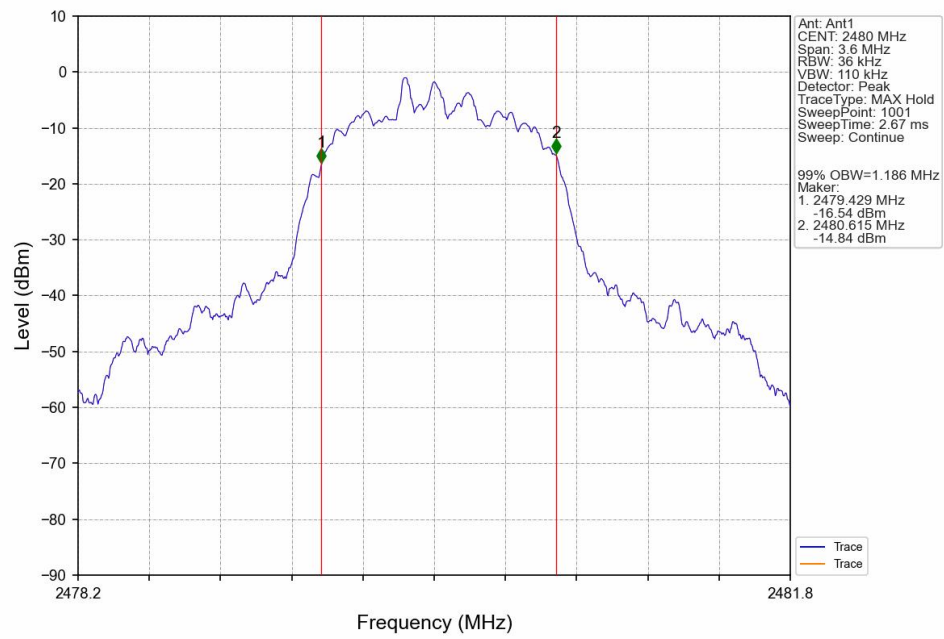




2.2.2 20dB BW

GFSK_DH5_LCH_2402MHz_Ant1_NTNV

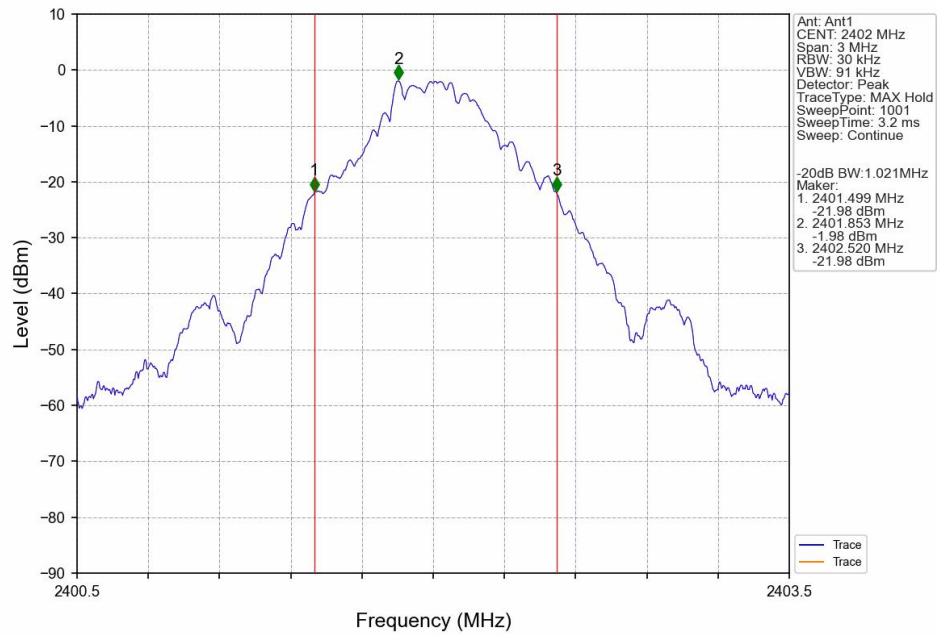


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

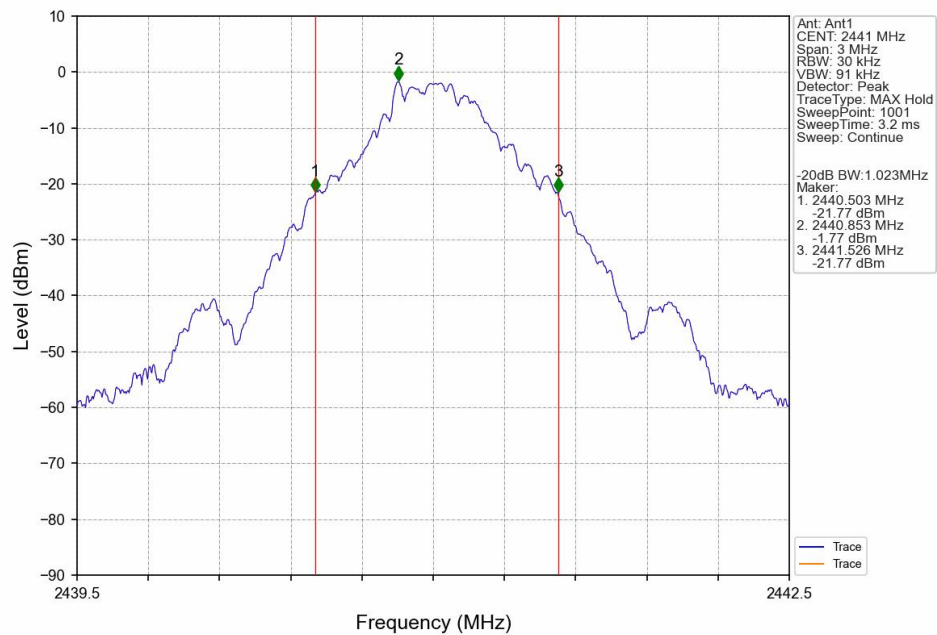




GFSK_DH5_HCH_2480MHz_Ant1_NTNV

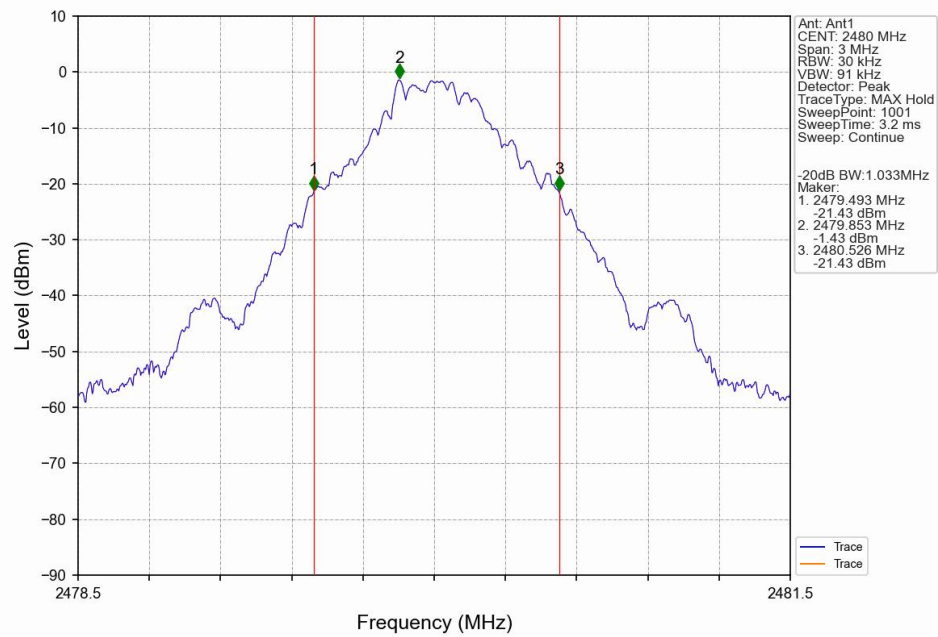


PI/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

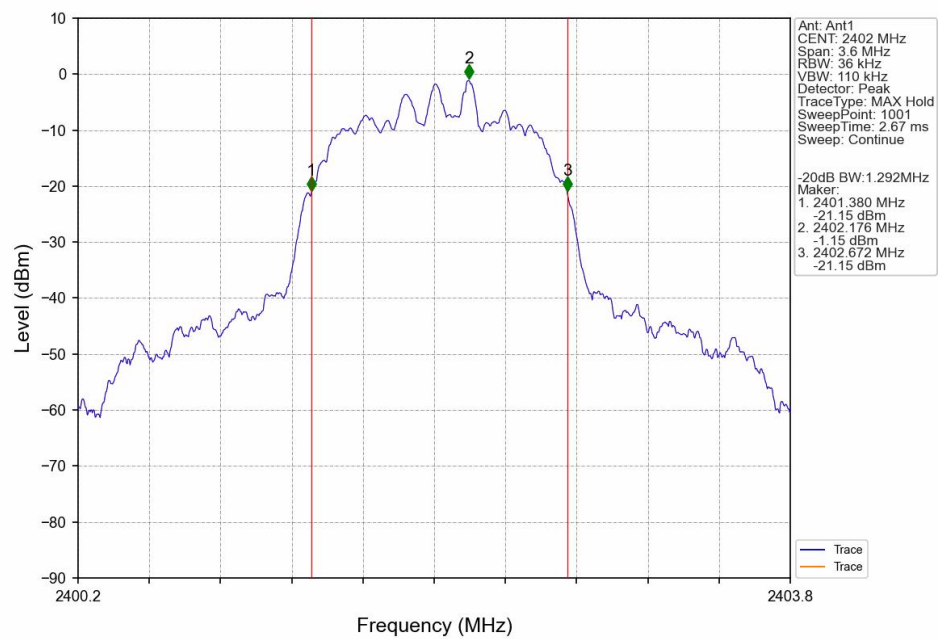




Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

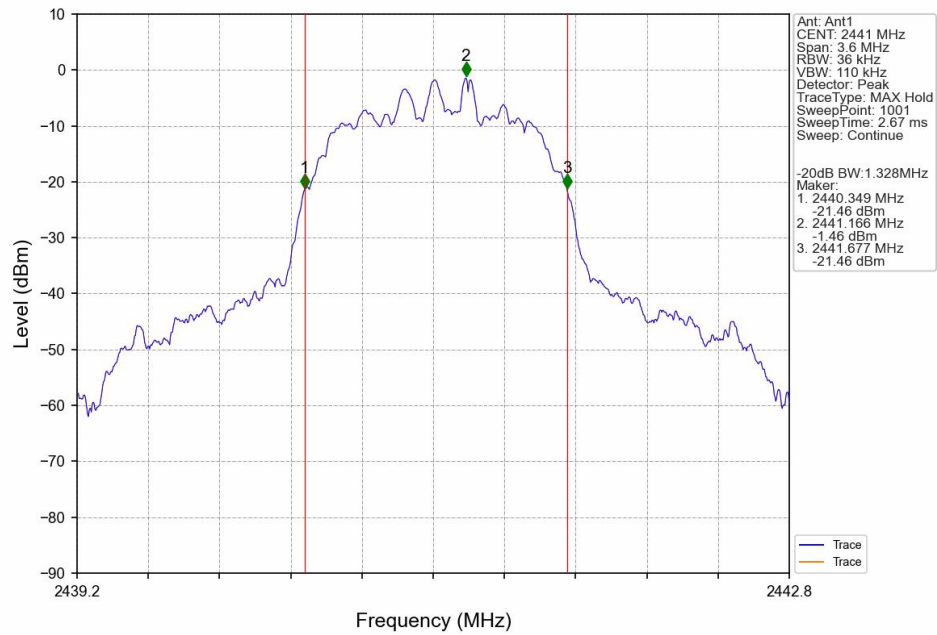


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

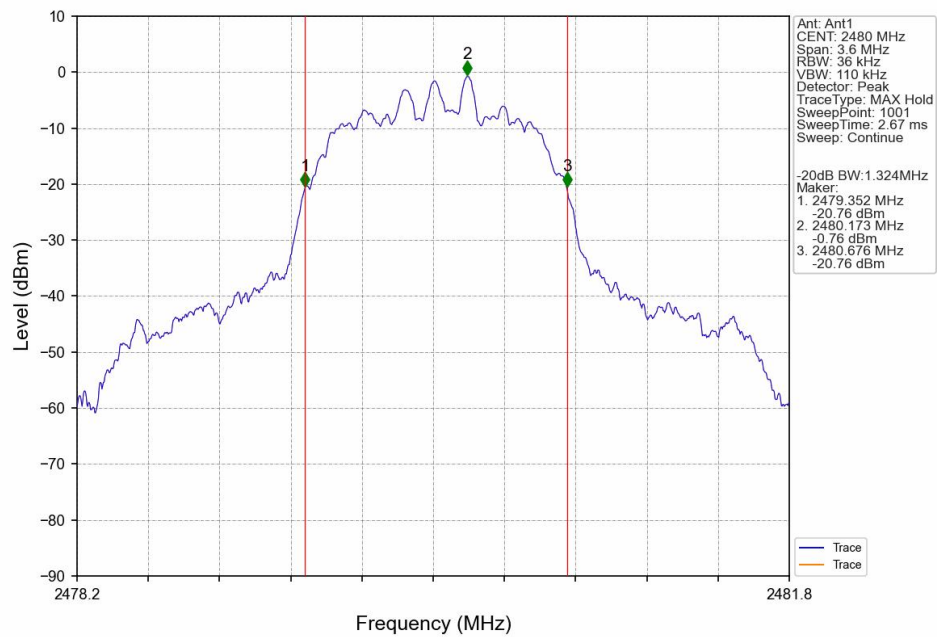




8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

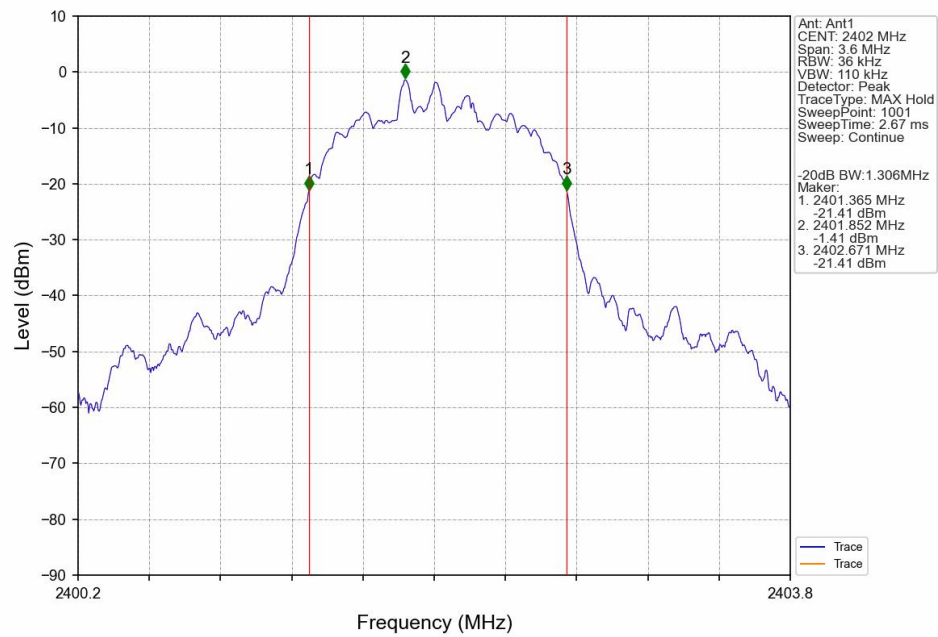


8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

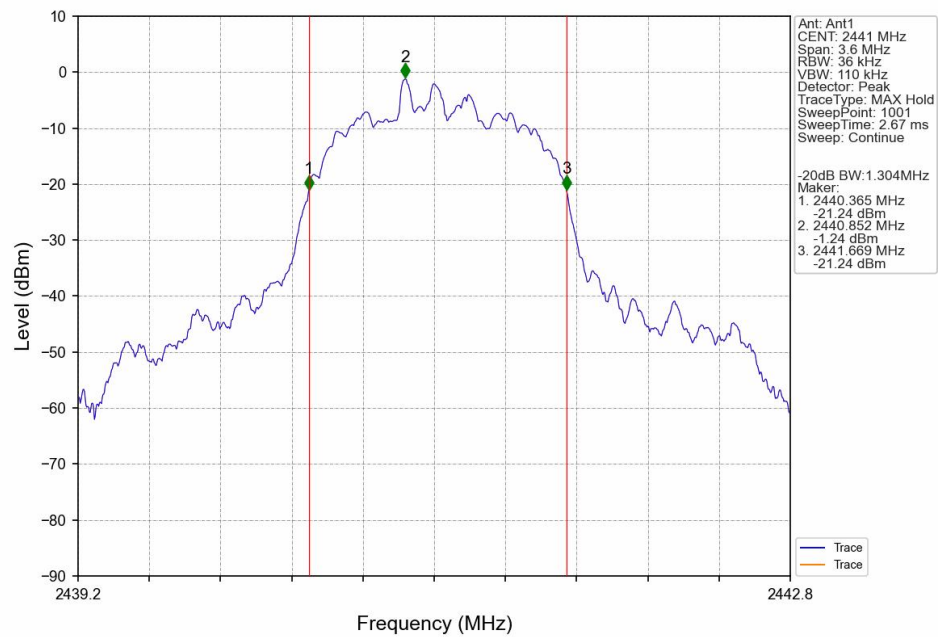



8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

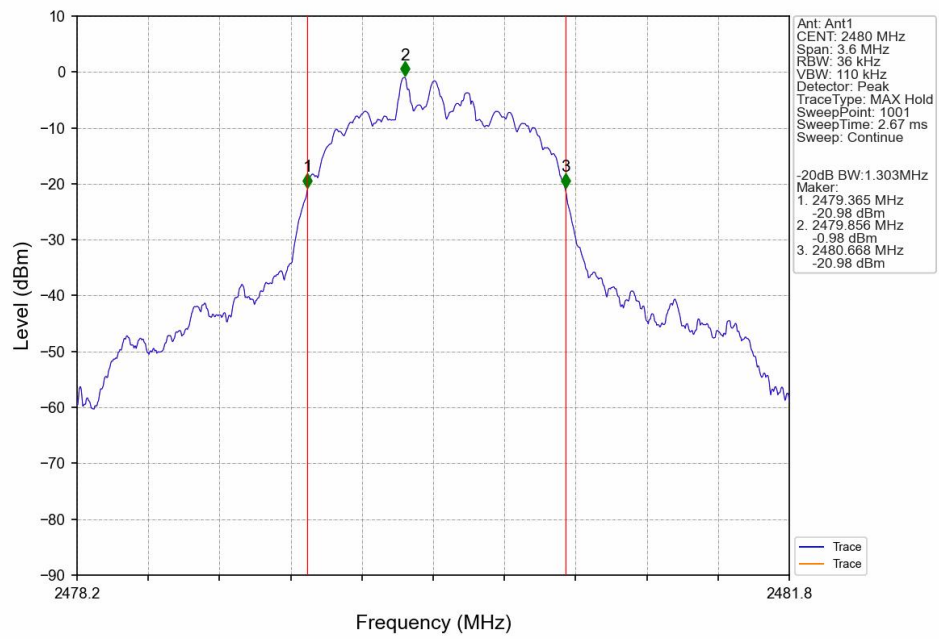



3. Maximum Conducted Output Power

3.1 Test Result

3.1.1 Power


Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	0.50	≤ 20.97	Pass
		2441	DH5	0.62	≤ 20.97	Pass
		2480	DH5	0.91	≤ 20.97	Pass
Pi/4DQPSK	SISO	2402	2DH5	1.30	≤ 20.97	Pass
		2441	2DH5	1.43	≤ 20.97	Pass
		2480	2DH5	1.71	≤ 20.97	Pass
8DPSK	SISO	2402	3DH5	1.62	≤ 20.97	Pass
		2441	3DH5	1.74	≤ 20.97	Pass
		2480	3DH5	1.88	≤ 20.97	Pass

Note1: Antenna Gain: Ant1: -0.58dBi;




3.2 Test Graph

3.2.1 Power

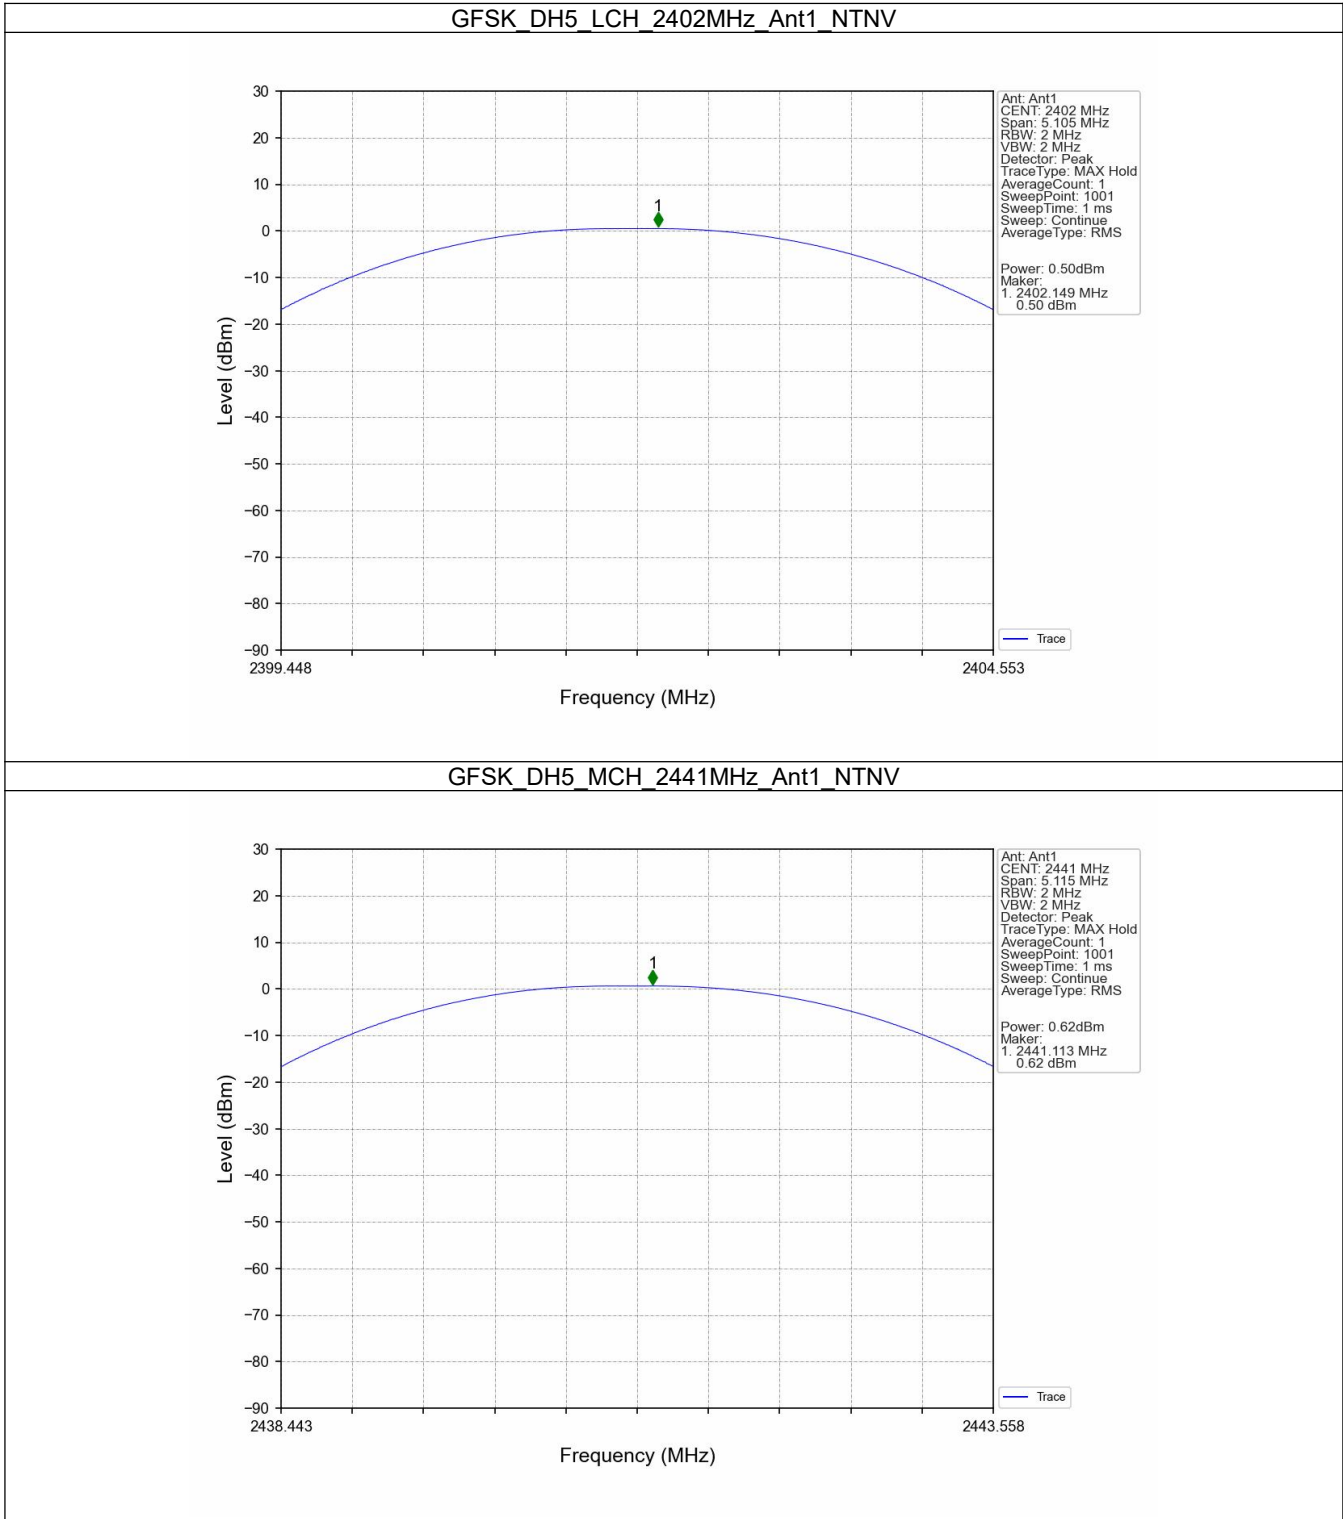




GFSK_DH5_HCH_2480MHz_Ant1_NTNV

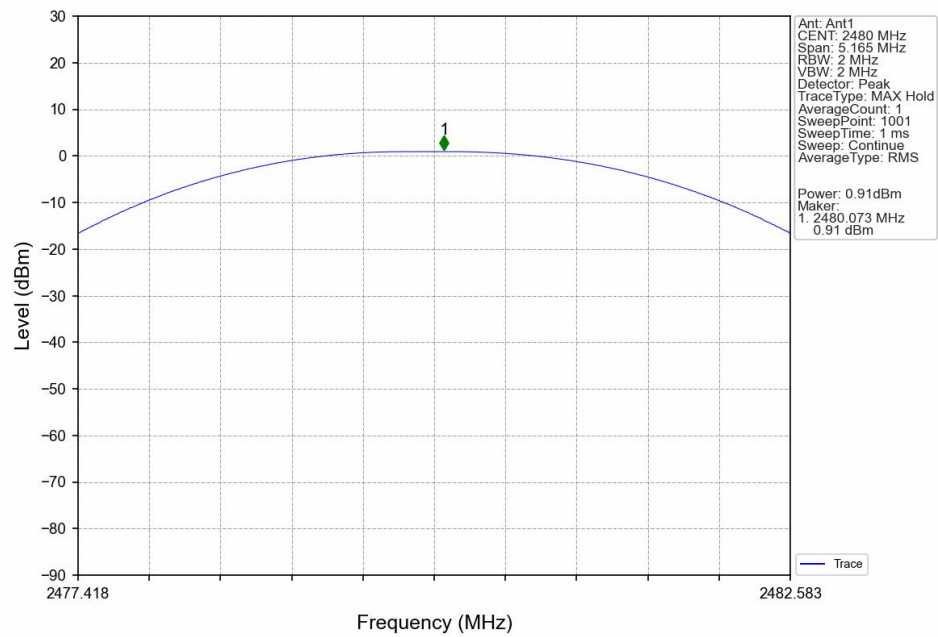


PI/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

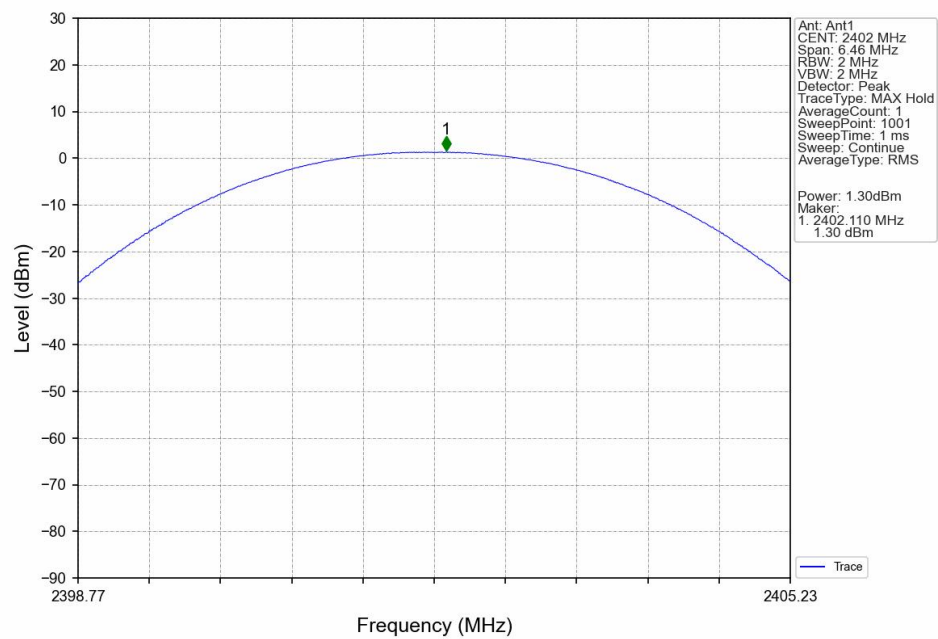




Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

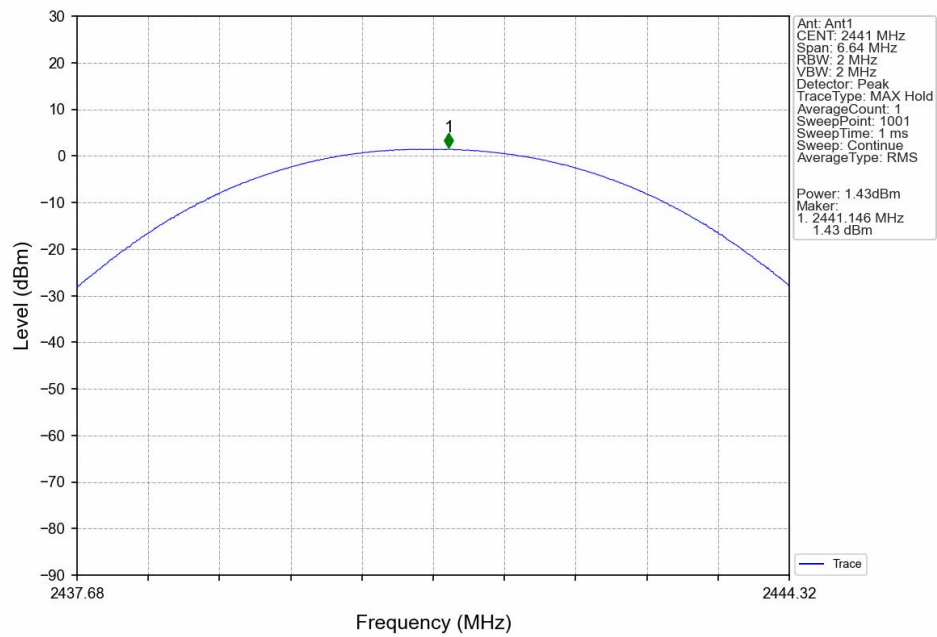


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

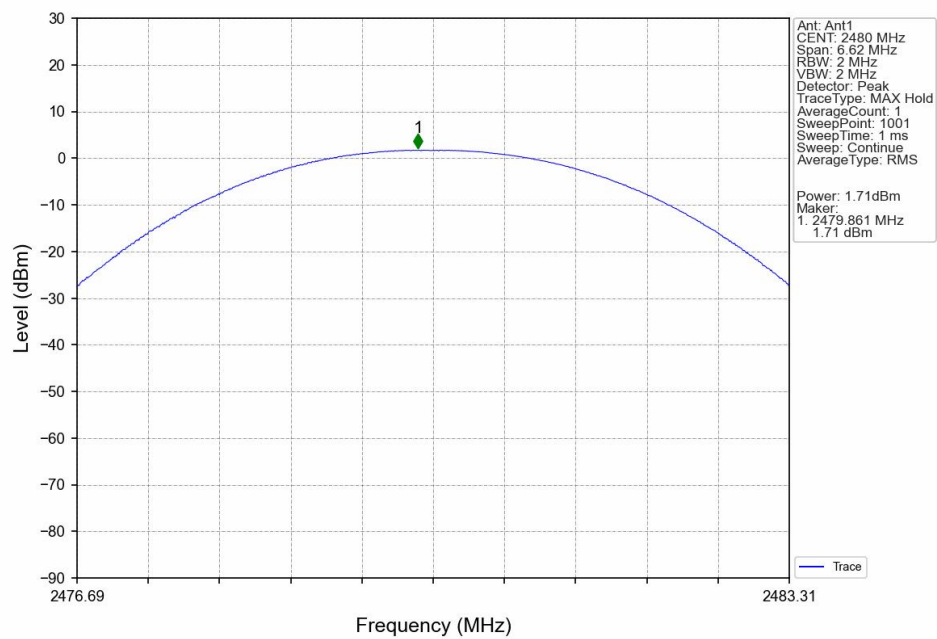




8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

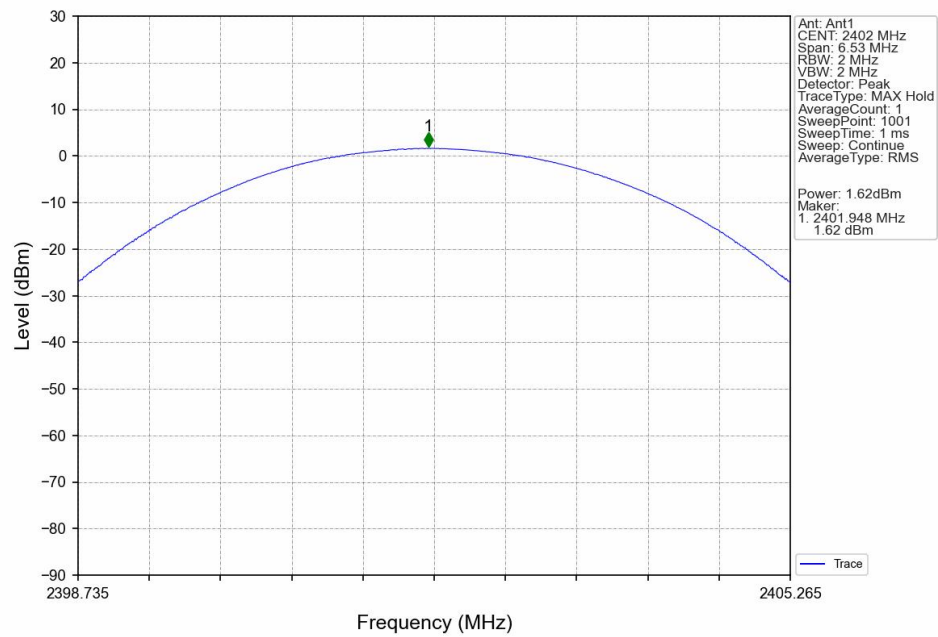


8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

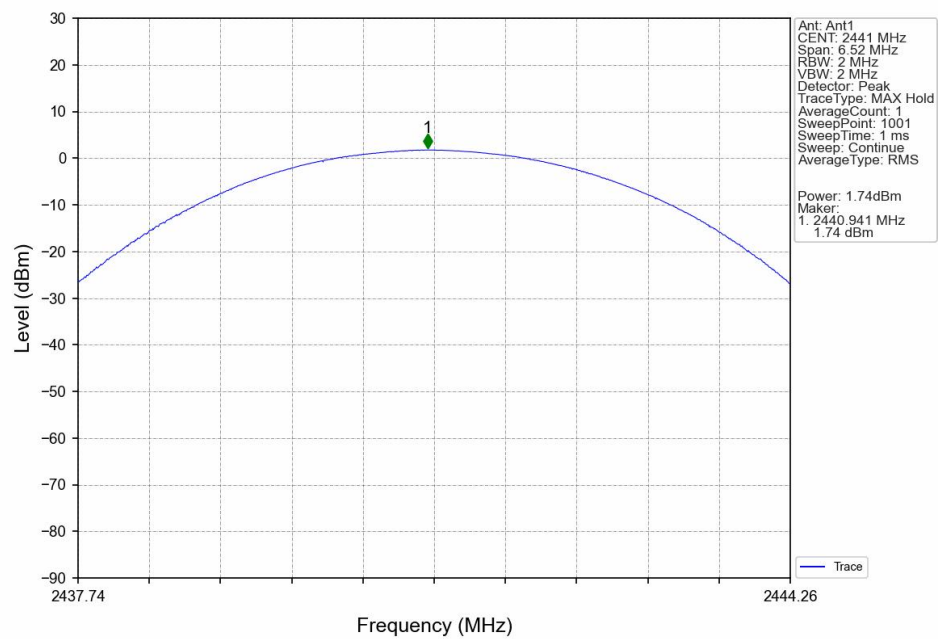



8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

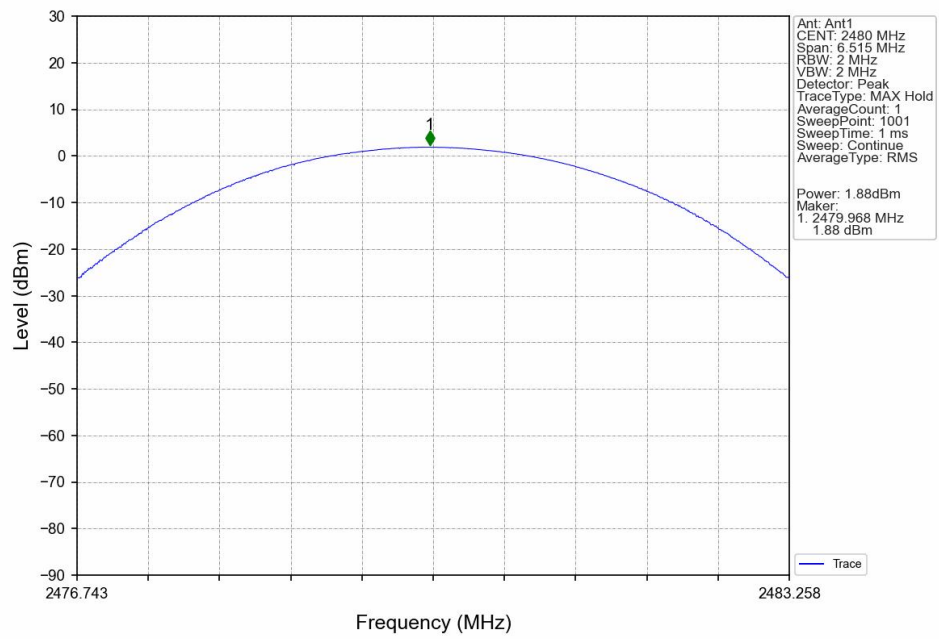



4. Carrier Frequency Separation

4.1 Test Result


4.1.1 Ant1

Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	1.000	1.033	≥ 0.689	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	1.001	1.328	≥ 0.885	Pass
8DPSK	SISO	HOPP	3DH5	1.001	1.306	≥ 0.871	Pass




4.2 Test Graph

4.2.1 Ant1

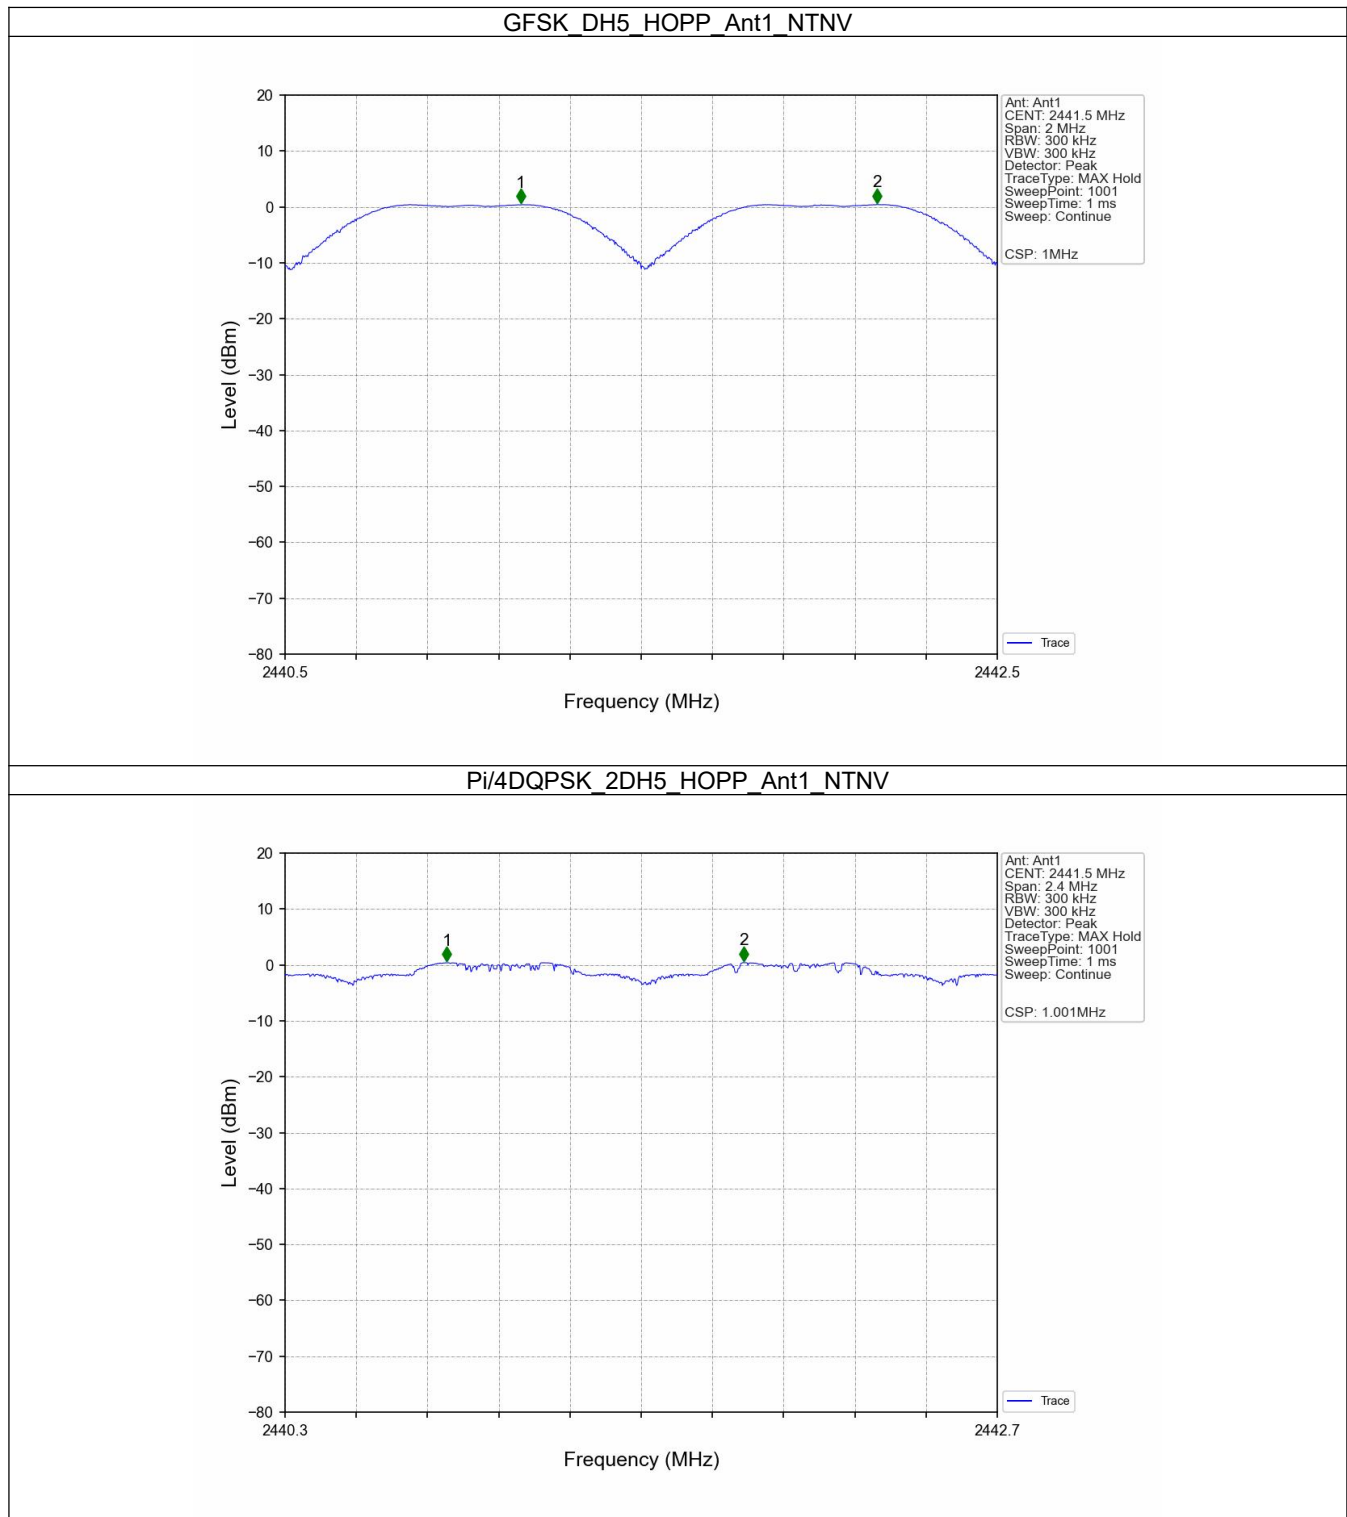



8DPSK_3DH5_HOPP_Ant1_NTNV

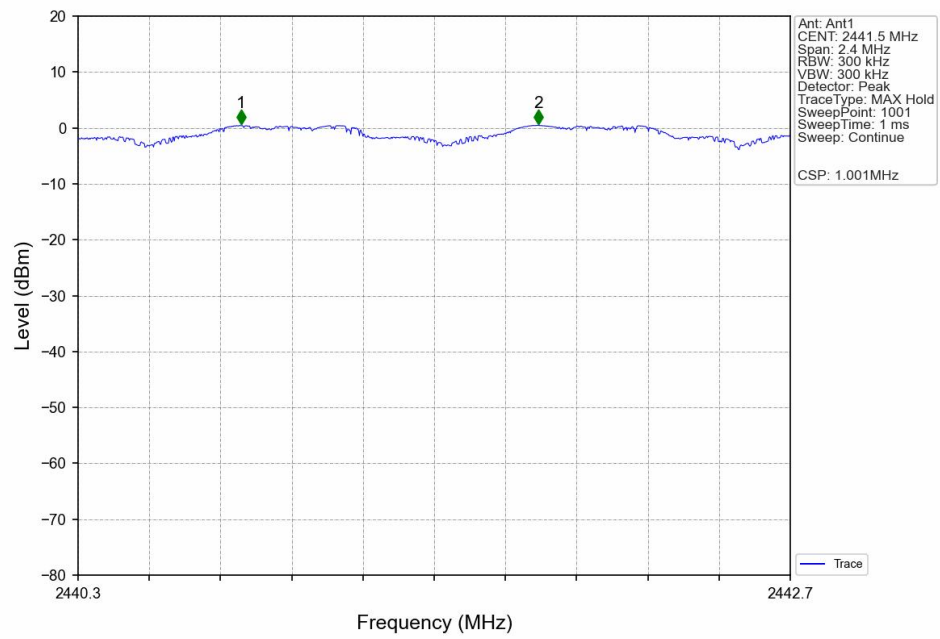



5. Number of Hopping Frequencies

5.1 Test Result


5.1.1 HoppNum

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	≥ 15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	≥ 15	Pass
8DPSK	SISO	HOPP	3DH5	79	≥ 15	Pass




5.2 Test Graph

5.2.1 HoppNum

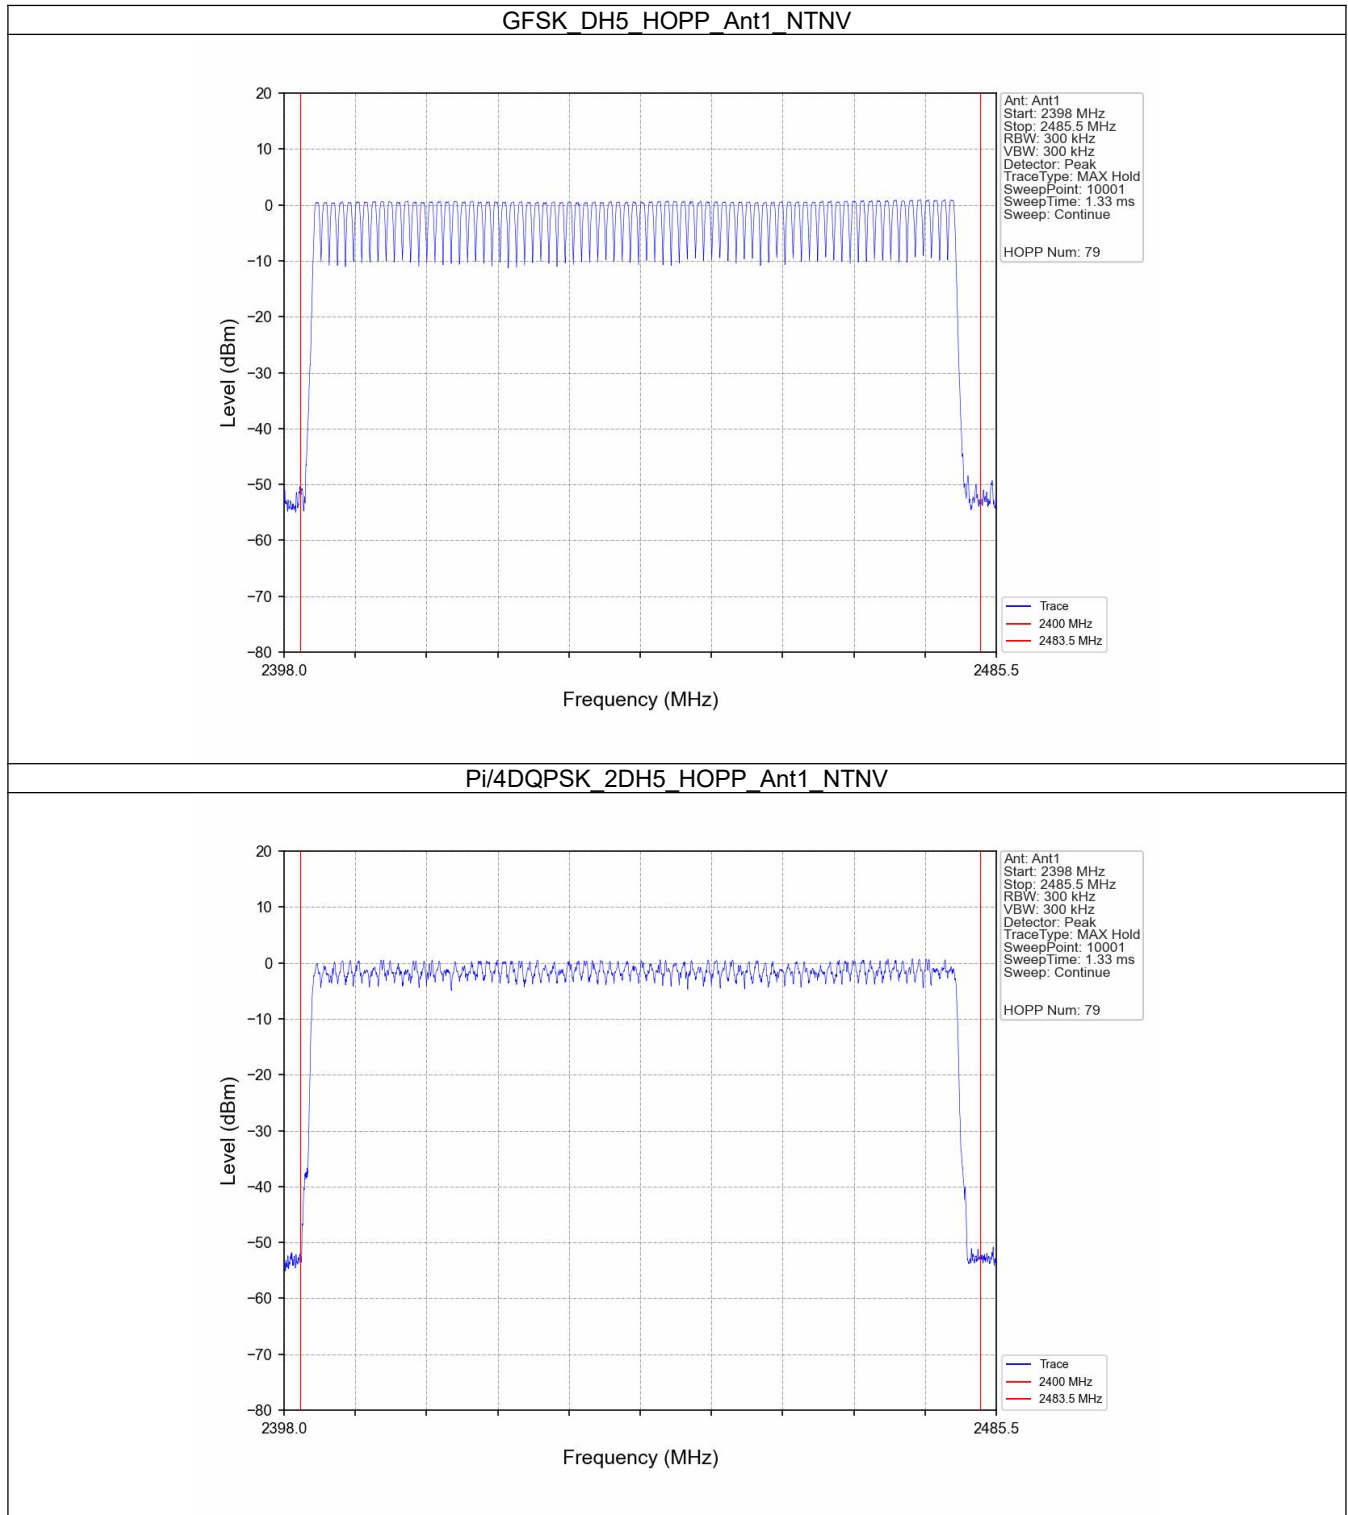



8DPSK_3DH5_HOPP_Ant1_NTNV

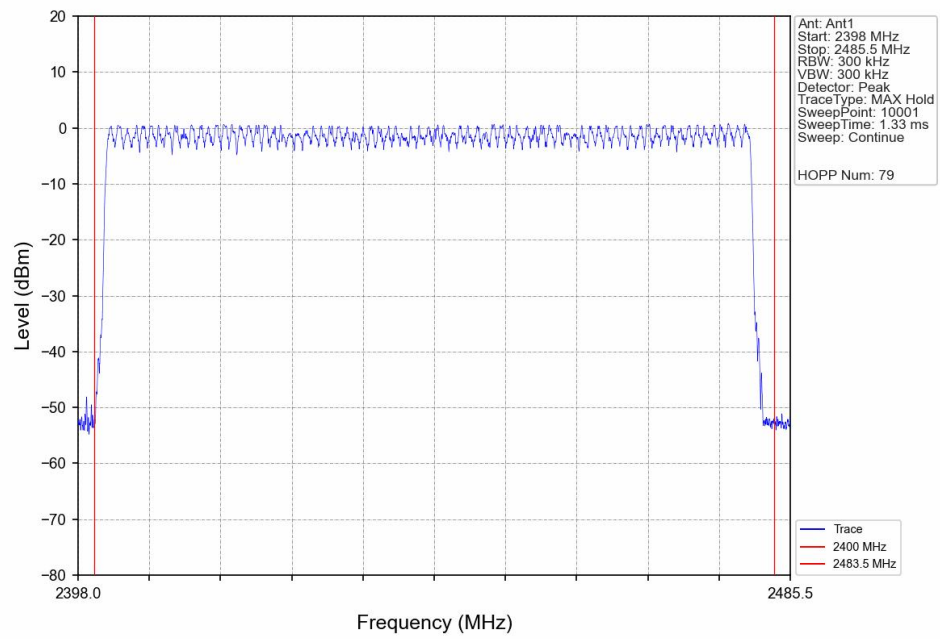



6. Time of Occupancy (Dwell Time)

6.1 Test Result


6.1.1 Ant1

Ant1									
Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.386	31.600	318	122.748	<=400	Pass
			DH3	1.636	31.600	169	276.484	<=400	Pass
			DH5	2.884	31.600	123	354.732	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH1	0.390	31.600	318	124.020	<=400	Pass
			2DH3	1.640	31.600	160	262.400	<=400	Pass
			2DH5	2.892	31.600	104	300.768	<=400	Pass
8DPSK	SISO	HOPP	3DH1	0.392	31.600	319	125.048	<=400	Pass
			3DH3	1.640	31.600	163	267.320	<=400	Pass
			3DH5	2.892	31.600	106	306.552	<=400	Pass




6.2 Test Graph

6.2.1 Ant1

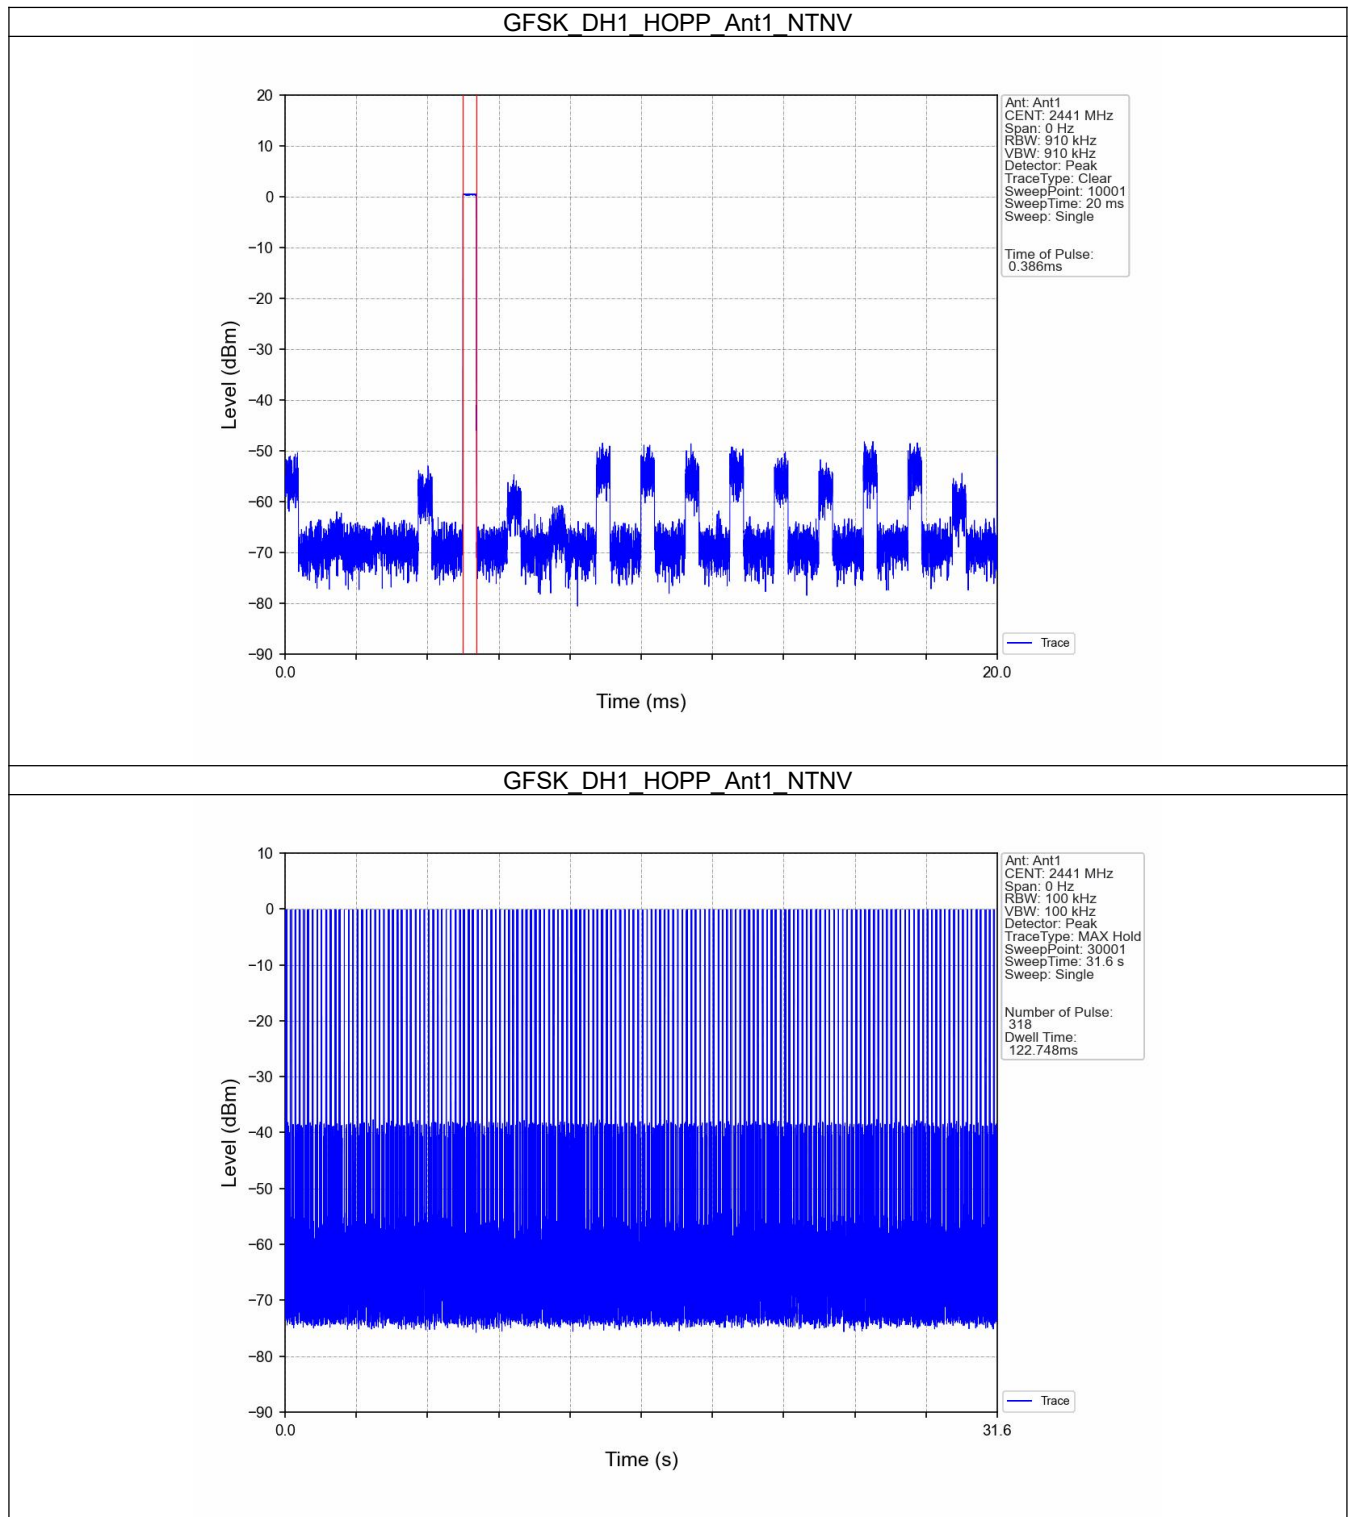




GFSK_DH3_HOPP_Ant1_NTNV

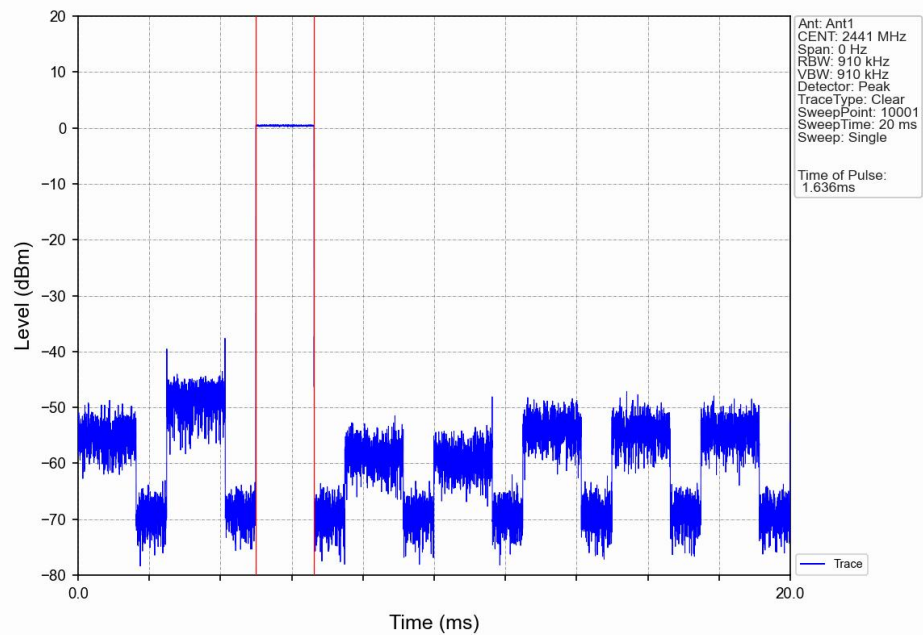


GFSK_DH3_HOPP_Ant1_NTNV

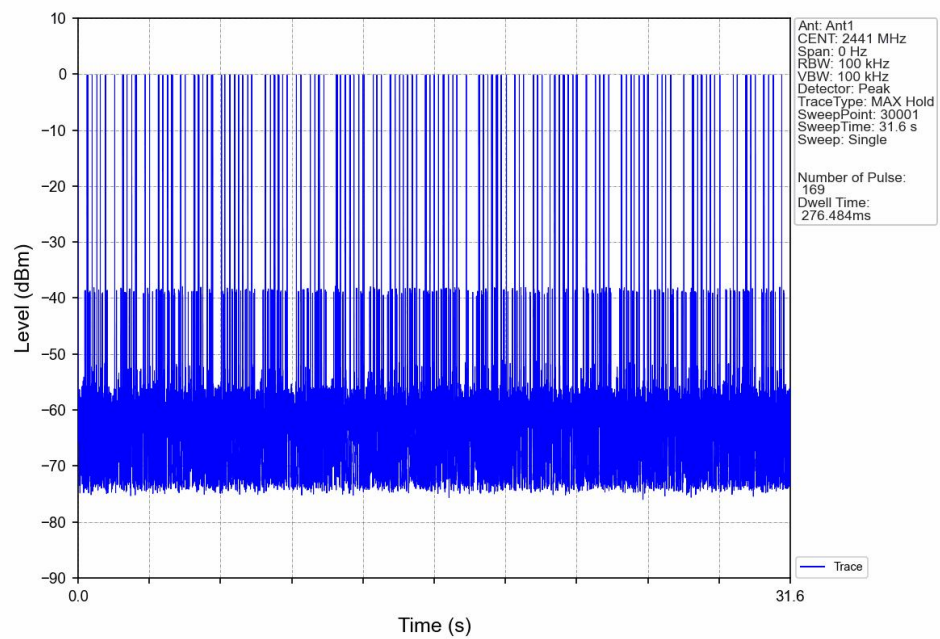




GFSK_DH5_HOPP_Ant1_NTNV

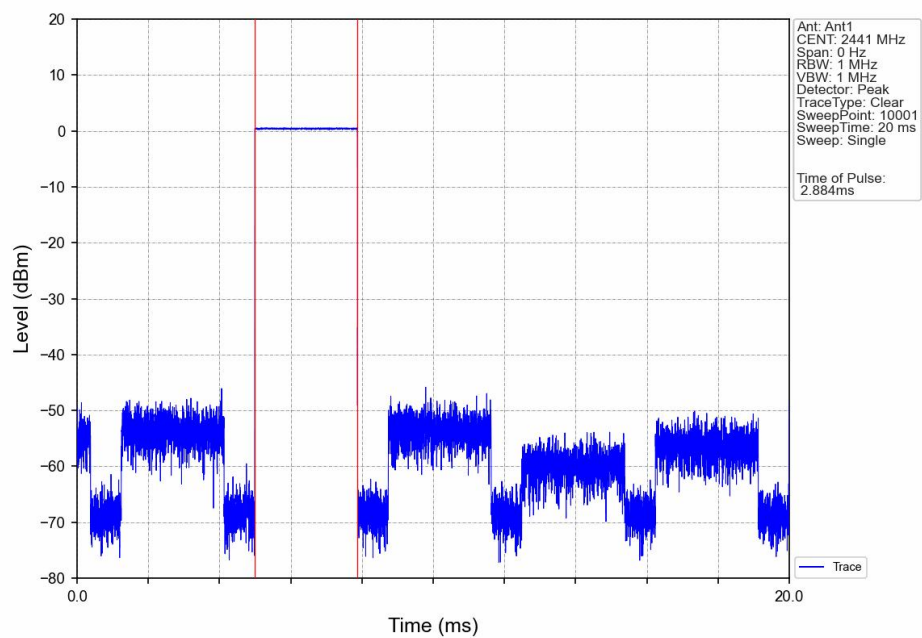


GFSK_DH5_HOPP_Ant1_NTNV

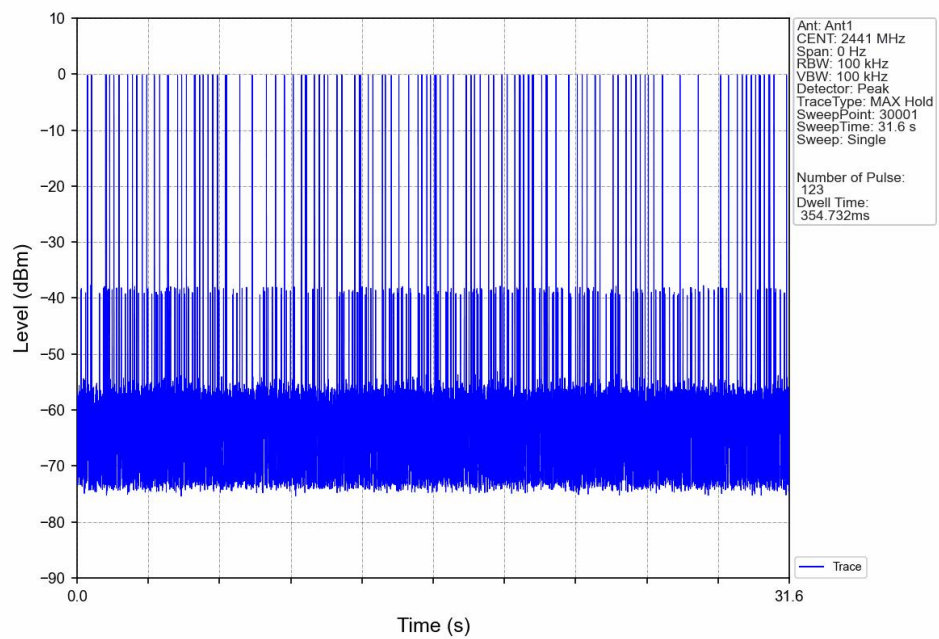




Pi/4DQPSK_2DH1_HOPP_Ant1_NTNV

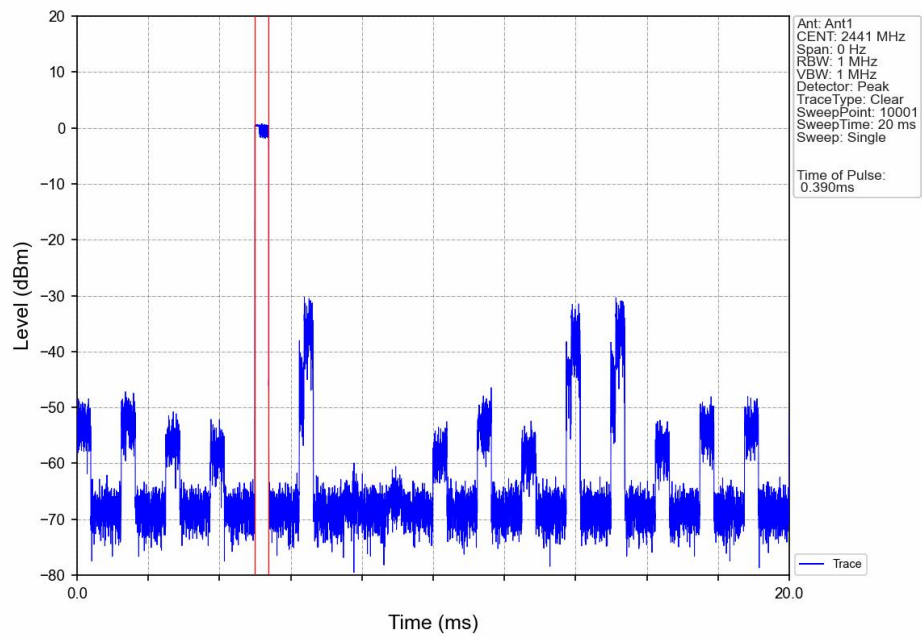


Pi/4DQPSK_2DH1_HOPP_Ant1_NTNV

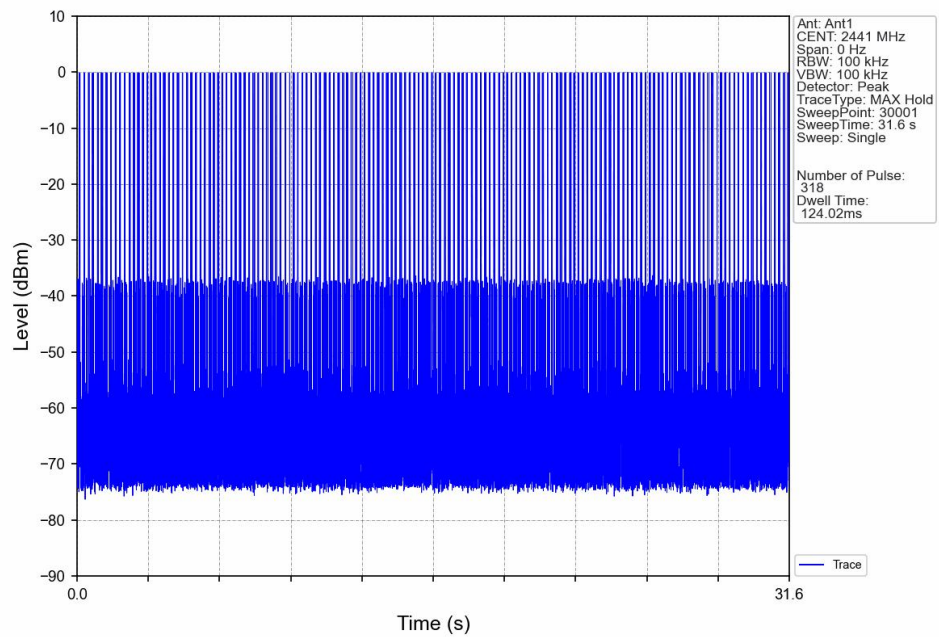




Pi/4DQPSK_2DH3_HOPP_Ant1_NTNV

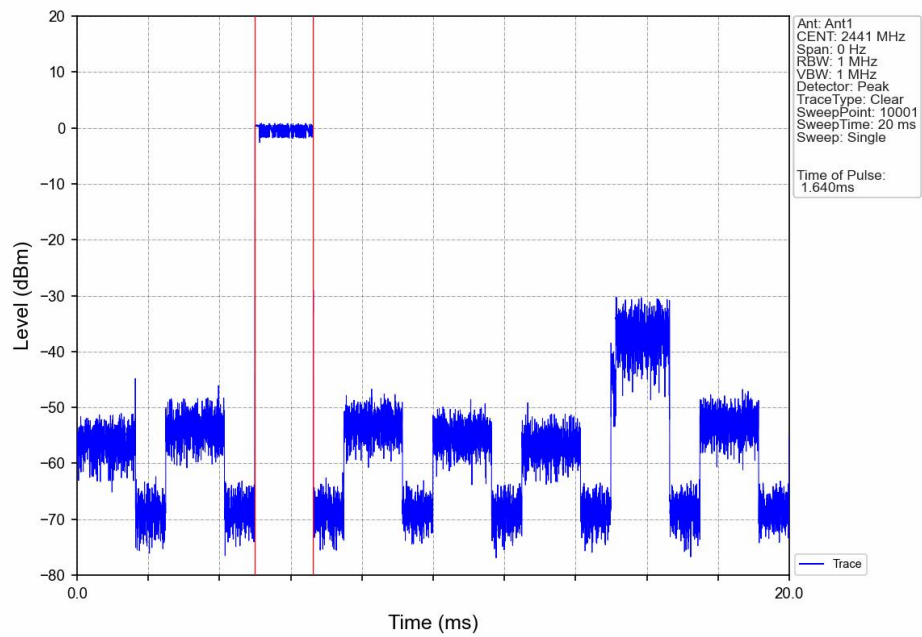


Pi/4DQPSK_2DH3_HOPP_Ant1_NTNV

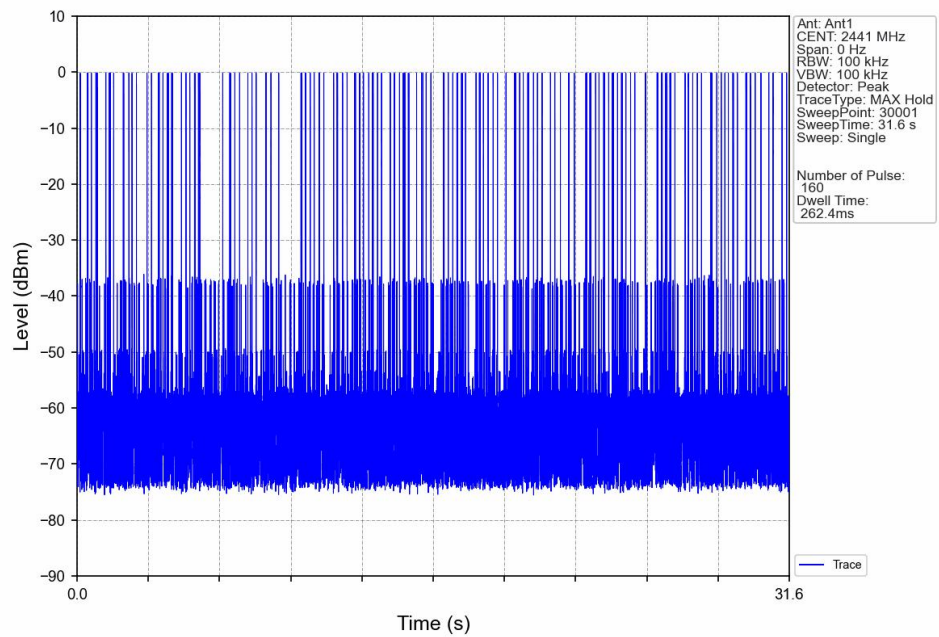



Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

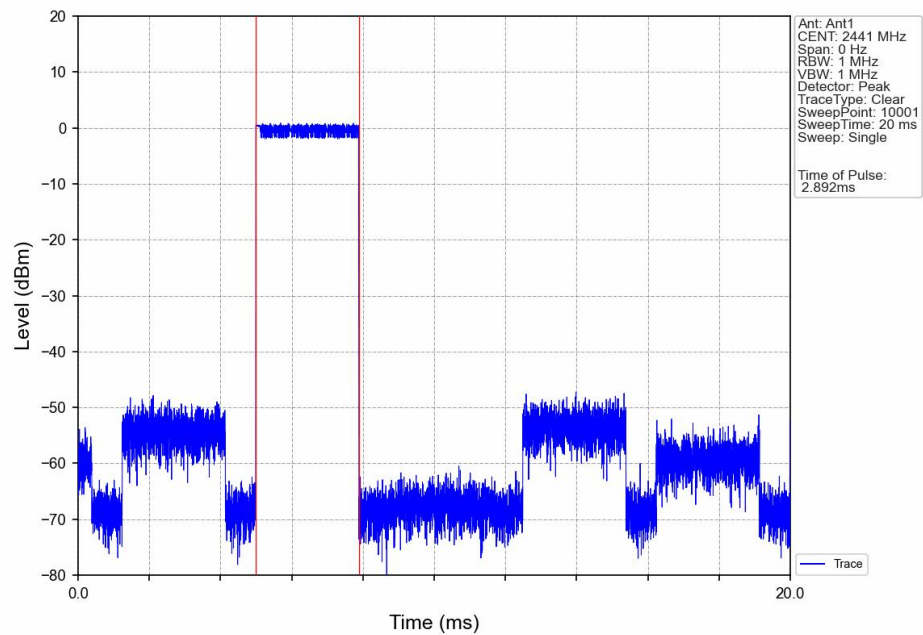

Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

