



CFR 47 FCC PART 15 SUBPART C

CERTIFICATION TEST REPORT

For

WLAN Model

MODEL NUMBER: WM101

FCC ID: 2A46G-WM101

REPORT NUMBER: 4790254511-3

ISSUE DATE: April 24, 2022

Prepared for

**Guangzhou Xaircraft Technology CO.,LTD
Block C, 115 Gaopu Rd, Tianhe Dist, Guangzhou, Guang-dong,China**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com



Revision History

Rev.	Issue Date	Revisions	Revised By
V0	04/24/2022	Initial Issue	



Summary of Test Results			
Clause	Test Items	FCC Rules	Test Results
1	6dB Bandwidth	FCC Part 15.247 (a) (2)	Pass
2	Conducted Output Power	FCC Part 15.247 (b) (3)	Pass
3	Power Spectral Density	FCC Part 15.247 (e)	Pass
4	Conducted Bandedge and Spurious Emission	FCC Part 15.247 (d)	Pass
5	Radiated Bandedge and Spurious Emission	FCC Part 15.247 (d) FCC Part 15.209 FCC Part 15.205	Pass
6	Conducted Emission Test for AC Power Port	FCC Part 15.207	Pass
7	Antenna Requirement	FCC Part 15.203	Pass
Note: 1. This test report is only published to and used by the applicant, and it is not for evidence purpose in China. 2. The measurement result for the sample received is <Pass> according to < CFR 47 FCC PART 15 SUBPART C > when <Accuracy Method> decision rule is applied.			



TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. TEST METHODOLOGY	7
3. FACILITIES AND ACCREDITATION	7
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. MEASUREMENT UNCERTAINTY	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT	9
5.2. CHANNEL LIST	9
5.3. MAXIMUM OUTPUT POWER.....	10
5.4. TEST CHANNEL CONFIGURATION.....	10
5.5. THE WORSE CASE POWER SETTING PARAMETER.....	10
5.6. THE WORSE CASE CONFIGURATIONS	11
5.7. DESCRIPTION OF AVAILABLE ANTENNAS	12
5.8. DESCRIPTION OF TEST SETUP.....	13
6. MEASURING INSTRUMENT AND SOFTWARE USED	14
7. ANTENNA PORT TEST RESULTS.....	16
7.1. ON TIME AND DUTY CYCLE.....	16
7.2. 6 dB DTS BANDWIDTH AND 99 % OCCUPIED BANDWIDTH	17
7.3. CONDUCTED OUTPUT POWER	19
7.4. POWER SPECTRAL DENSITY	20
7.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS.....	22
8. RADIATED TEST RESULTS.....	24
8.1. RESTRICTED BANDEDGE	30
8.1.1. 802.11b SISO MODE.....	30
8.1.2. 802.11g SISO MODE.....	34
8.1.3. 802.11n HT20 MIMO MODE.....	40
8.1.4. 802.11n HT40 MIMO MODE.....	47
8.2. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz)	55
8.2.1. 802.11b SISO MODE.....	55
8.3. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz)	61
8.3.1. 802.11b SISO MODE.....	61
8.3.2. 802.11g SISO MODE.....	67
8.3.3. 802.11n HT20 MIMO MODE.....	73
8.3.4. 802.11n HT40 MIMO MODE.....	79



8.4.	SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)	85
8.4.1.	802.11n HT20 MODE	85
8.5.	SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)	87
8.5.1.	802.11n HT20 MODE	87
8.6.	SPURIOUS EMISSIONS BELOW 30 MHz	89
8.6.1.	802.11n HT20 MODE	89
9.	AC POWER LINE CONDUCTED EMISSIONS	92
9.1.1.	802.11n HT20 MODE	93
10.	ANTENNA REQUIREMENTS	95
11.	Appendix	96
11.1.	Appendix A: DTS Bandwidth	96
11.1.1.	Test Result	96
11.1.2.	Test Graphs	97
11.2.	Appendix B: Occupied Channel Bandwidth	105
11.2.1.	Test Result	105
11.2.2.	Test Graphs	106
11.3.	Appendix C: Maximum conducted output power	114
11.3.1.	Test Result	114
11.4.	Appendix D: Maximum power spectral density	115
11.4.1.	Test Result	115
11.4.2.	Test Graphs	116
11.5.	Appendix E: Band edge measurements	124
11.5.1.	Test Result	124
11.5.2.	Test Graphs	125
11.6.	Appendix F: Conducted Spurious Emission	131
11.6.1.	Test Result	131
11.6.2.	Test Graphs	133
11.7.	Appendix G: Duty Cycle	157
11.7.1.	Test Result	157
11.7.2.	Test Graphs	158



1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Guangzhou Xaircraft Technology CO.,LTD
Address: Block C, 115 Gaopu Rd, Tianhe Dist, Guangzhou, Guangdong, China

Manufacturer Information

Company Name: Guangzhou Xaircraft Technology CO.,LTD
Address: Block C, 115 Gaopu Rd, Tianhe Dist, Guangzhou, Guangdong, China

EUT Information

EUT Name: WLAN Model
Model: WM101
Sample Received Date: Feb 16, 2022
Sample Status: Normal
Sample ID: 4675027
Date of Tested: Feb 16, 2022 ~ Apr 24, 2022

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C	PASS

Tested By:

Kebo Zhang
Project Engineer

Checked By:

Shawn Wen
Laboratory Leader

Approved By:

Stephen Guo
Laboratory Manager



2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r02, KDB 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15 and ANSI C63.10-2013.

3. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. VCCI (Registration No.: G-20019, R-20004, C-20012 and T-20011) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20019 and R-20004 Shielding Room B, the VCCI registration No. is C-20012 and T-20011
---------------------------	--

Note 1: All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, Song Shan Lake Hi tech Development Zone, Dongguan, 523808, China

Note 2: The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3: For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.



4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognize national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	



5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	WLAN Model
Model Name	WM101
Radio Technology	IEEE802.11b/g/n HT20/n HT40
Operation frequency	IEEE 802.11b: 2412MHz—2462MHz IEEE 802.11g: 2412MHz—2462MHz IEEE 802.11n HT20: 2412MHz—2462MHz IEEE 802.11n HT40: 2422MHz—2452MHz
Modulation	IEEE 802.11b: DSSS(CCK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) IEEE 802.11n HT40: OFDM (64QAM, 16QAM, QPSK,BPSK)
Rated Input	DC 5 V

5.2. CHANNEL LIST

Channel List for 802.11b/g/n (20 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	4	2427	7	2442	10	2457
2	2417	5	2432	8	2447	11	2462
3	2422	6	2437	9	2452	/	/

Channel List for 802.11n (40 MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	5	2432	7	2442	9	2452
4	2427	6	2437	8	2447	/	/

5.3. MAXIMUM OUTPUT POWER

IEEE Std. 802.11	Frequency (MHz)	Channel Number	Maximum Conducted AVG Output Power (dBm)
b	2412 ~ 2462	1-11[11]	17.39
g	2412 ~ 2462	1-11[11]	17.13
n HT20	2412 ~ 2462	1-11[11]	19.51
n HT40	2422 ~ 2452	3-9[7]	18.87

5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
WiFi TX(802.11b)	CH 1, CH 6, CH 11/ Low, Middle, High	2412MHz, 2437MHz, 2462MHz
WiFi TX(802.11g)	CH 1, CH 6, CH 11/ Low, Middle, High	2412MHz, 2437MHz, 2462MHz
WiFi TX(802.11n HT20)	CH 1, CH 6, CH 11/ Low, Middle, High	2412MHz, 2437MHz, 2462MHz
WiFi TX(802.11n HT40)	CH 3, CH 6, CH 9/ Low, Middle, High	2422MHz, 2437MHz, 2452MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band							
Test Software		AR9342_ART					
Modulation Mode	Transmit Antenna Number	Test Channel					
		NCB: 20MHz			NCB: 40MHz		
		CH 1	CH 6	CH 11	CH 3	CH 6	CH 9
802.11b	1	10	10	11.5	/		
	2	10	10.5	11.5			
802.11g	1	9	9	10			
	2	9	10	11			
802.11n HT20	1	9	9	10			
	2	9	9	10			
802.11n HT40	1	/			7.5	8.5	9
	2	/			7.5	8.5	9

5.6. THE WORSE CASE CONFIGURATIONS

The EUT was tested in the following configuration(s):

Controlled in test mode using a software application on the EUT supplied by customer. The application was used to enable a continuous transmission and to select the mode, test channels, bandwidth, data rates as required.

Test channels referring to section 5.4.

Maximum power setting referring to section 5.5.

Worst-case data rates as provided by the client were:

802.11b mode: 1 Mbps

802.11g mode: 6 Mbps

802.11n HT20 mode: MCS0

802.11n HT40 mode: MCS0

802.11b/g only support SISO mode.

802.11 n HT20/HT40 support SISO and MIMO mode.

802.11a SISO mode, Antenna 0 and Antenna 1 has the same power setting, so only Antenna 0 worst case test data were recorded in the report.

SISO mode and MIMO mode have the same power setting, so only the worst case power mode(MIMO) will be record in the report.

The EUT has 2 separate antennas which correspond to 2 separate antenna ports. Core 0 and Core 1 correspond to antenna 0 and antenna 1 respectively.

The measured additional path loss was included in any path loss calculations for all RF cable used during tested.

Conducted output power, power spectral density tests separately on each port with all supported SISO & MIMO port combinations.

The EUT support Cyclic Shift Diversity(CDD), Space Time Coding(STBC), Spatial Division Multiplexing(SDM) modes. They use the same conducted power per chain in any given mode, CDD mode have the maximum power setting, so we only chose the worst case mode CDD for final testing.

5.7. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Model	Antenna Type	MAX Antenna Gain (dBi)
1	2412-2472	030268FWFA	FPC	2
2	2412-2472	030291FWFA	FPC	1.5

Antenna	Frequency (MHz)	Model	Antenna Type	MAX Antenna Gain (dBi)
1	2412-2472	030266FWFA	FPC	2
2	2412-2472	030289FWFA	FPC	1.8

Note: The product has two groups of antennas, they have the same antenna type, so only the maximum gain antennas test data will recorded in this report.

The EUT support Cyclic Shift Diversity(CDD) mode.

MIMO output power port and MIMO PSD port summing was performed in accordance with KDB 662911 D01. For the CDD results the Directional Gain was calculated in accordance with the following method.

For output power measurements:

Directional gain= $G_{ANT} + \text{Array Gain} = 2 \text{ dBi}$

G_{ANT} : equal to the gain of the antenna having the highest gain

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$

For power spectral density (PSD) measurements:

Directional gain= $G_{ANT} + \text{Array Gain} = 5 \text{ dBi}$

Array Gain = $10 \log(N_{ANT}/N_{SS}) \text{ dB}$.

N_{ANT} : number of transmit antennas

N_{SS} : number of spatial streams, The worst case directional gain will occur when $N_{SS} = 1$

Test Mode	Transmit and Receive Mode	Description
IEEE 802.11b	☒2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11g	☒2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11n HT20	☒2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.
IEEE 802.11n HT40	☒2TX, 2RX	ANT 1 and ANT 2 can be used as transmitting/receiving antenna.

Note: The value of the antenna gain was declared by customer.

5.8. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	Lenovo	E42-80	R303U5AG
2	AC/DC adapter	/	/	Input: AC 100-240 V, 50/60 Hz, 0.5A Output: DC 12.0 V, 2A

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/
2	Network Cable	/	/	1.5	/


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
1	/	/	/	

TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

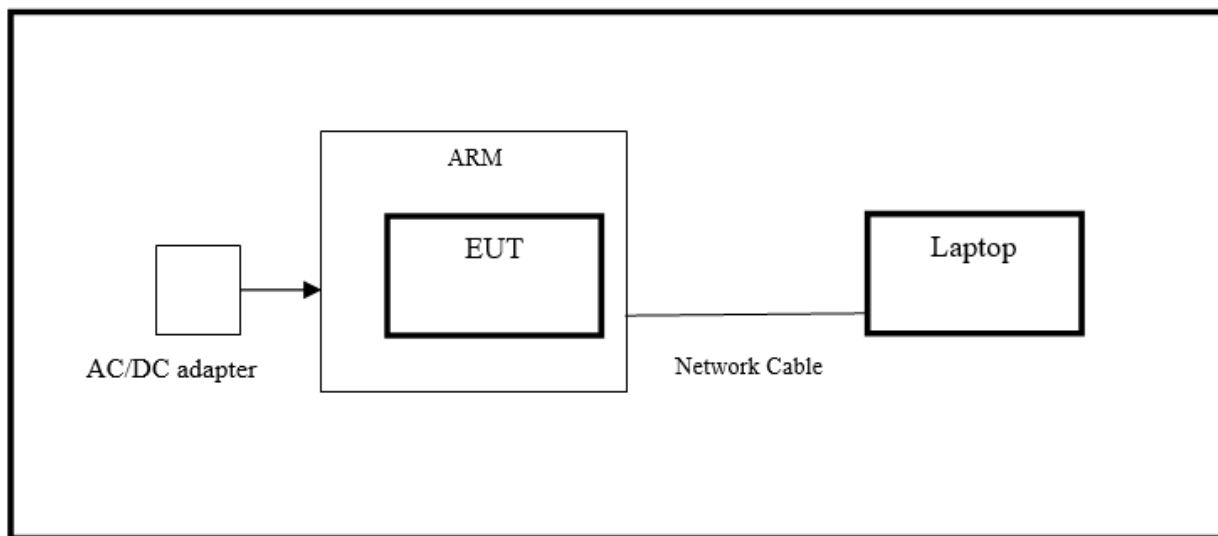



6. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.30, 2021	Oct.29, 2022
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Oct.30, 2021	Oct.29, 2022
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.30, 2021	Oct.29, 2022
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier	HP	8447D	2944A09099	Oct.30, 2021	Oct.29, 2022
EMI Measurement Receiver	R&S	ESR26	101377	Oct.30, 2021	Oct.29, 2022
Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.30, 2021	Oct.29, 2022
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.31, 2021	Oct.30, 2022
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.31, 2021	Oct.30, 2022
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13,2022
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.31, 2021	Oct.30, 2022
Preamplifier	Mini-Circuits	ZX60-83LN-S+	SUP01201941	Oct.31, 2021	Oct.30, 2022
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Oct.31, 2021	Oct.30, 2022
Highpass Filter	Wainwright	WHKX10-5850-6500-1800-40SS	4	Oct.31, 2021	Oct.30, 2022
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Oct.31, 2021	Oct.30, 2022



Software			
Description	Manufacturer	Name	Version
Test Software for Radiated Emissions	Farad	EZ-EMC	Ver. UL-3A1

Other instruments					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Spectrum Analyzer	R&S	FSV40	101117	Oct.31, 2021	Oct.30, 2022
Dual Channel Power Meter	Keysight	N1912A	MY55416024	Oct.30, 2021	Oct.29, 2022
Power Sensor	Keysight	USB Wideband Power Sensor	MY5100022	Oct.30, 2021	Oct.29, 2022



7. ANTENNA PORT TEST RESULTS

7.1. ON TIME AND DUTY CYCLE


LIMITS

None; for reporting purposes only

PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

TEST SETUP



TEST ENVIRONMENT

Temperature	21.2°C	Relative Humidity	49.9 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

RESULTS

Please refer to appendix G.

7.2. 6 dB DTS BANDWIDTH AND 99 % OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2) ISED RSS-247 5.2 (a)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5

TEST PROCEDURE


Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP





TEST ENVIRONMENT

Temperature	21.2°C	Relative Humidity	49.9 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

RESULTS

Please refer to appendix A & B.



7.3. CONDUCTED OUTPUT POWER

LIMITS


CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3)	AVG Output Power	1 watt or 30 dBm	2400-2483.5

TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the average output power, after any corrections for external attenuators and cables.

TEST SETUP



TEST ENVIRONMENT

Temperature	21.2°C	Relative Humidity	49.9 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

RESULTS

Please refer to appendix C.

7.4. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e)	Power Spectral Density	8 dBm/3 kHz	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.10.


Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	PEAK
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP



TEST ENVIRONMENT

Temperature	21.2°C	Relative Humidity	49.9 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V



RESULTS

Please refer to appendix D.



7.5. CONDUCTED BANDEGE AND SPURIOUS EMISSIONS

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d)	Conducted Bandedge and Spurious Emissions	at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyser and use the following settings for reference level measurement:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	Auto couple.


Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

TEST SETUP

**TEST ENVIRONMENT**

Temperature	21.2°C	Relative Humidity	49.9 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

RESULTS

Please refer to appendix E & F.



8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30



FCC Restricted bands of operation refer to FCC §15.205 (a):


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST SETUP AND PROCEDURE

Below 30 MHz

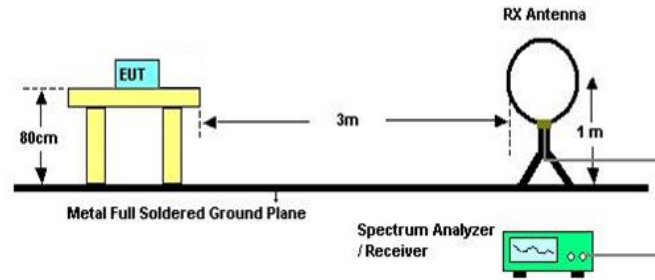


The setting of the spectrum analyser

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω. For example, the measurement frequency X KHz resulted in a level of Y dBuV/m, which is equivalent to $Y - 51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

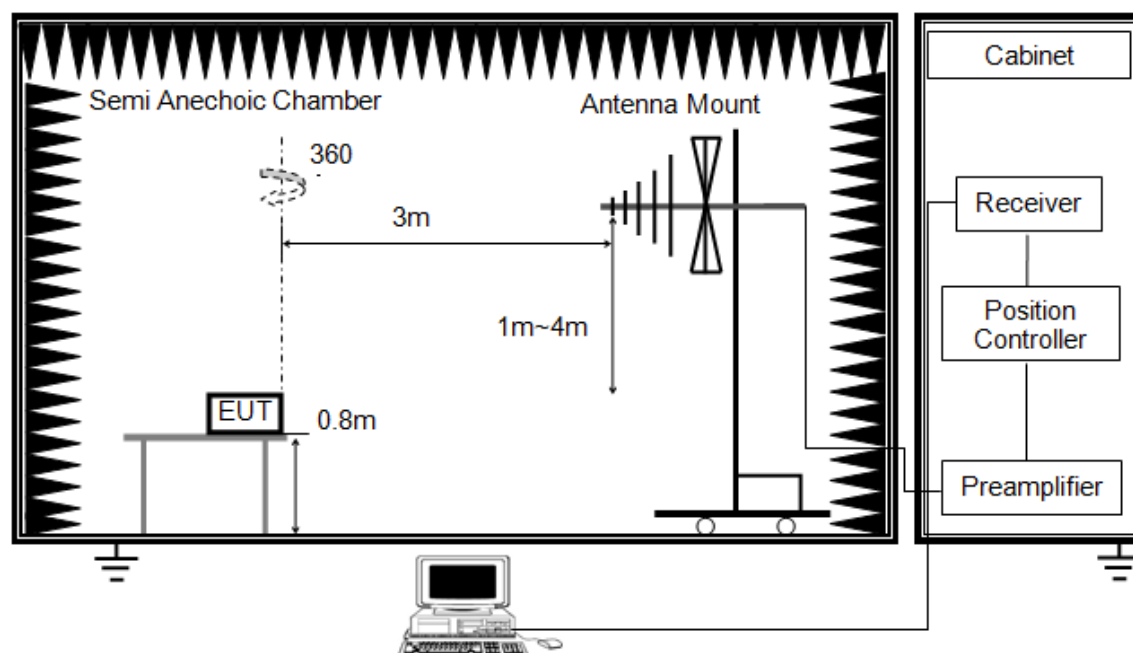


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.

Above 1 GHz

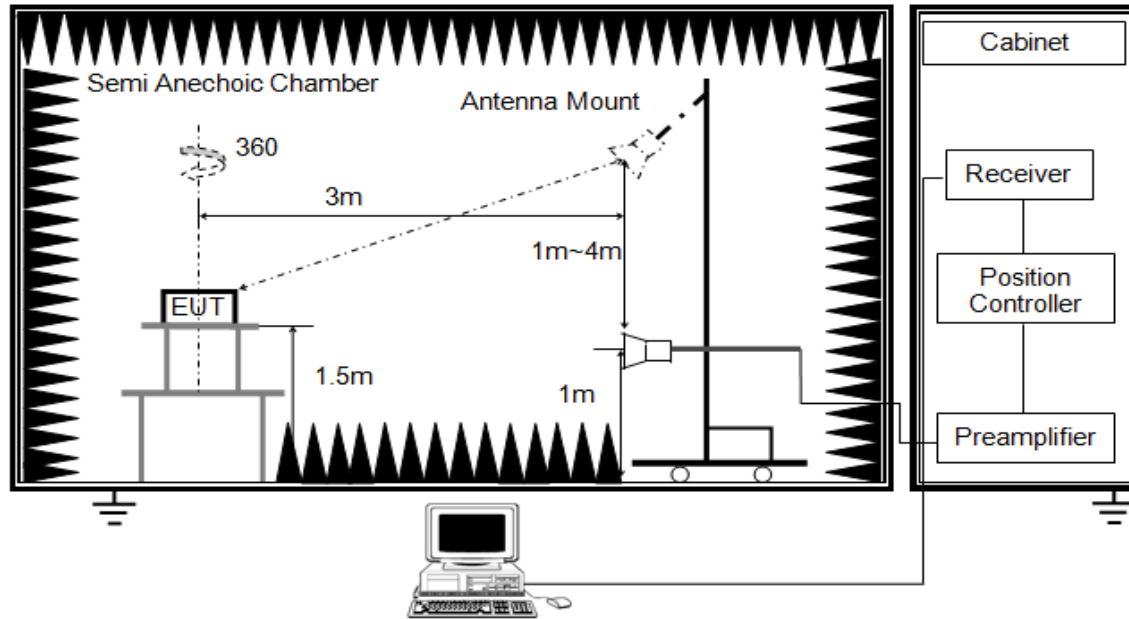


The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.1.ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

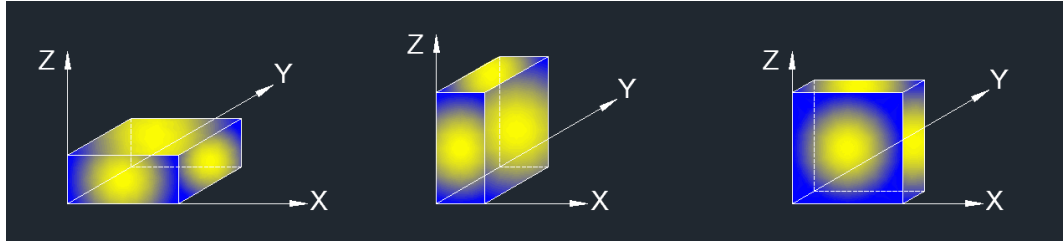

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

TEST ENVIRONMENT

Temperature	20.1 °C	Relative Humidity	57.3 %
Atmosphere Pressure	101 kPa	Test Voltage	DC 5 V

RESULTS




8.1. RESTRICTED BANDEDGE

8.1.1. 802.11b SISO MODE

ANTENNA 0 TEST RESULTS (WORST CASE)

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

PEAK

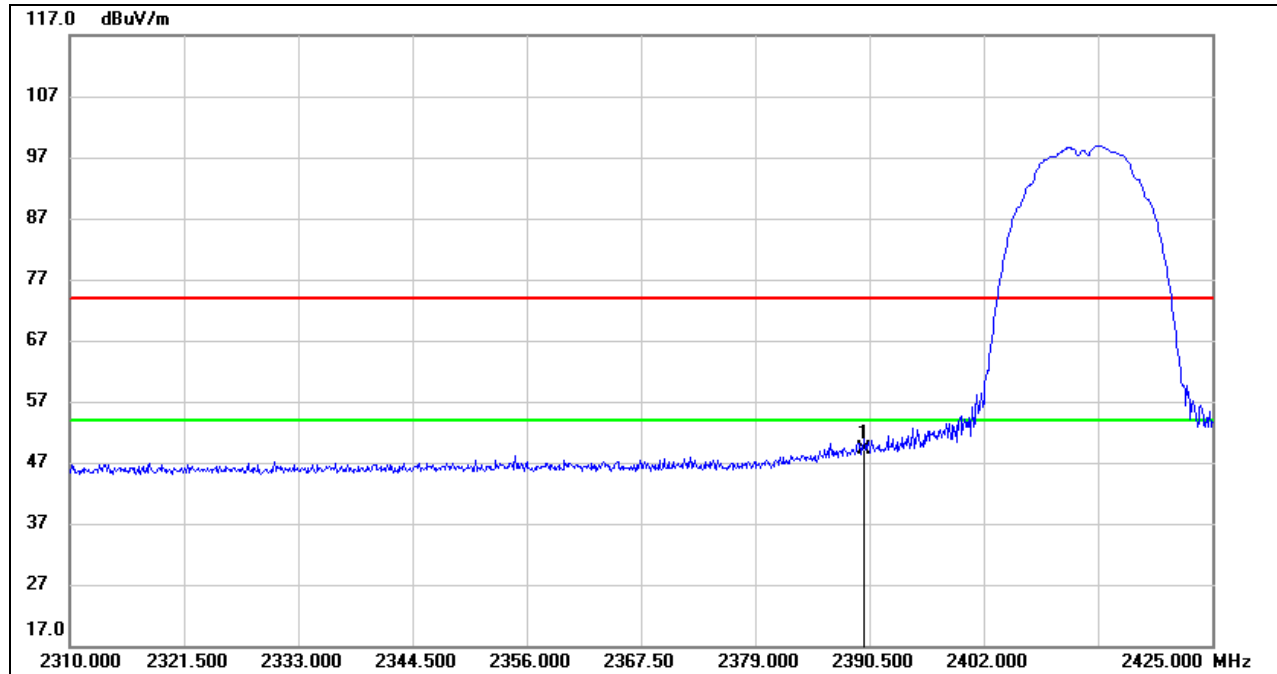


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	16.48	32.66	49.14	74.00	-24.86	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

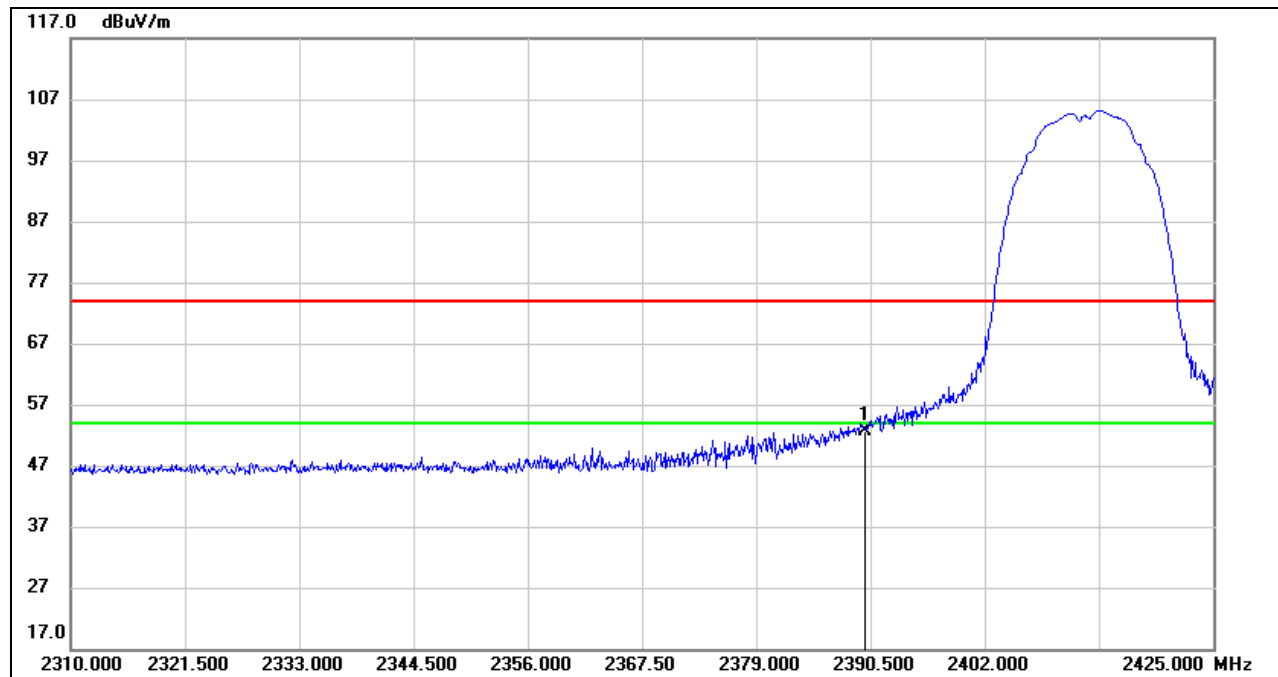
**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)****PEAK**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	20.09	32.66	52.75	74.00	-21.25	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

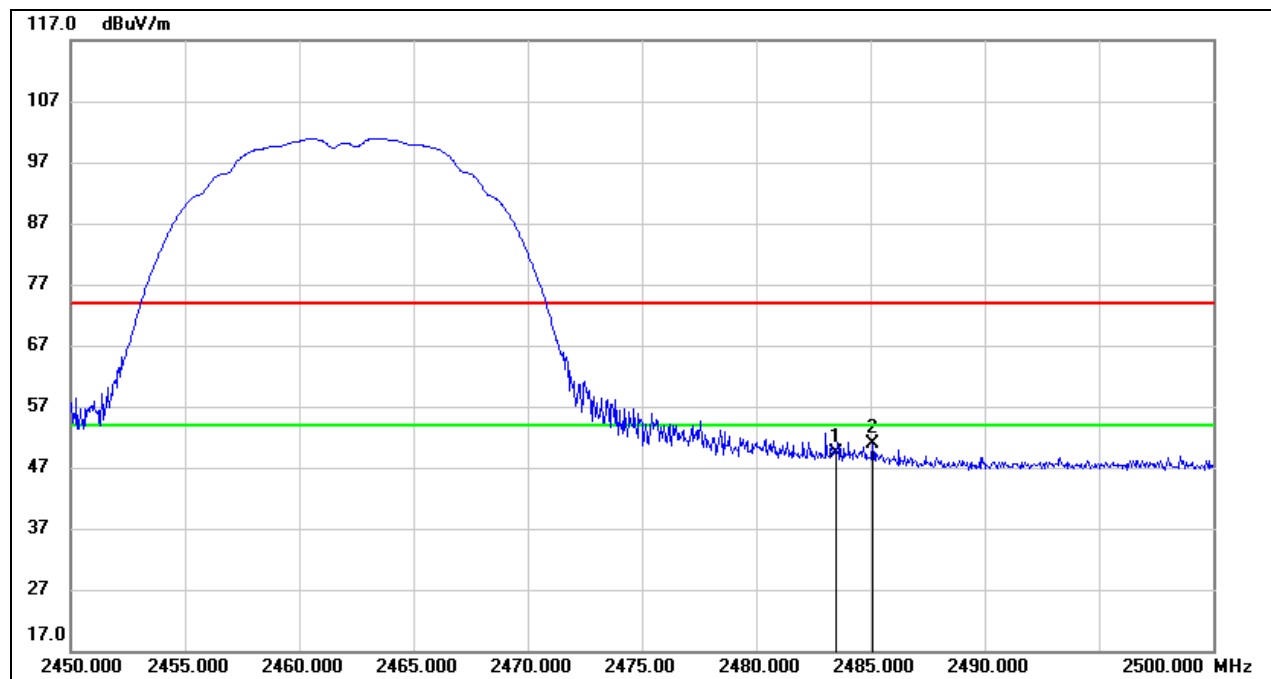**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)****PEAK**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	16.27	33.10	49.37	74.00	-24.63	peak
2	2485.100	17.79	33.10	50.89	74.00	-23.11	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

PEAK

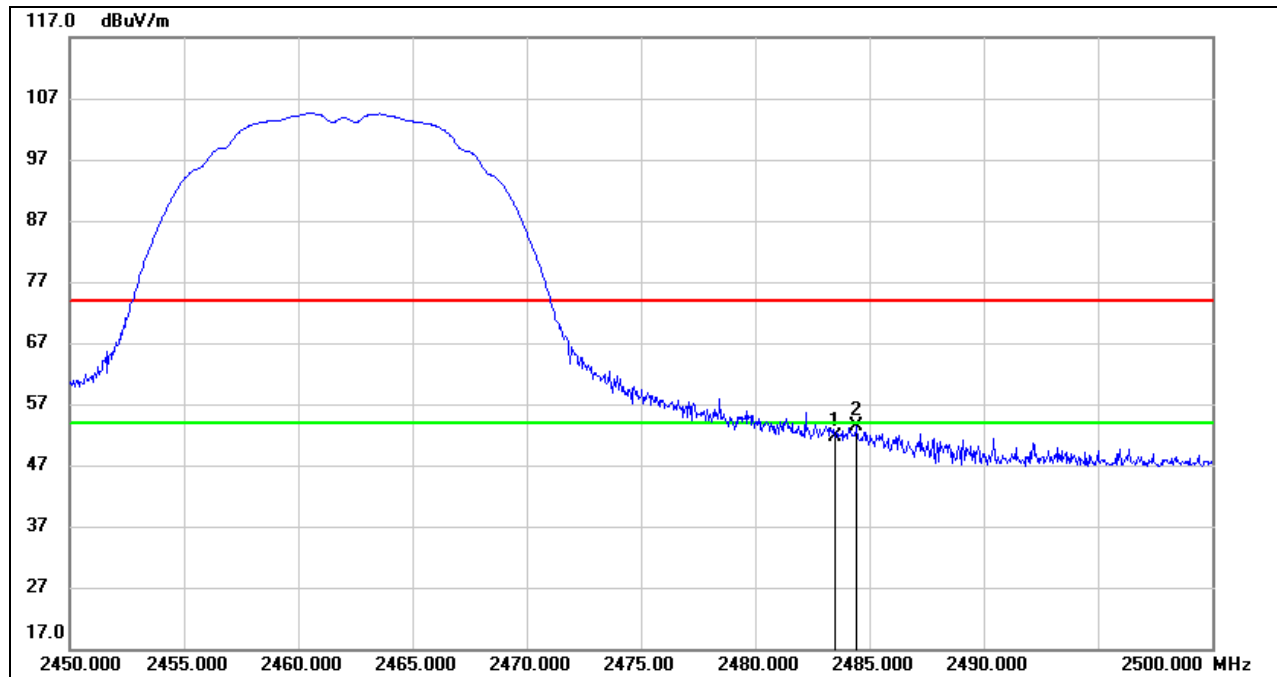

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	18.42	33.10	51.52	74.00	-22.48	peak
2	2484.450	20.17	33.10	53.27	74.00	-20.73	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: Horizontal and Vertical have been tested, only the worst data was recorded in the report.

Note: Both antennas have been tested, only the worst data was recorded in the report.

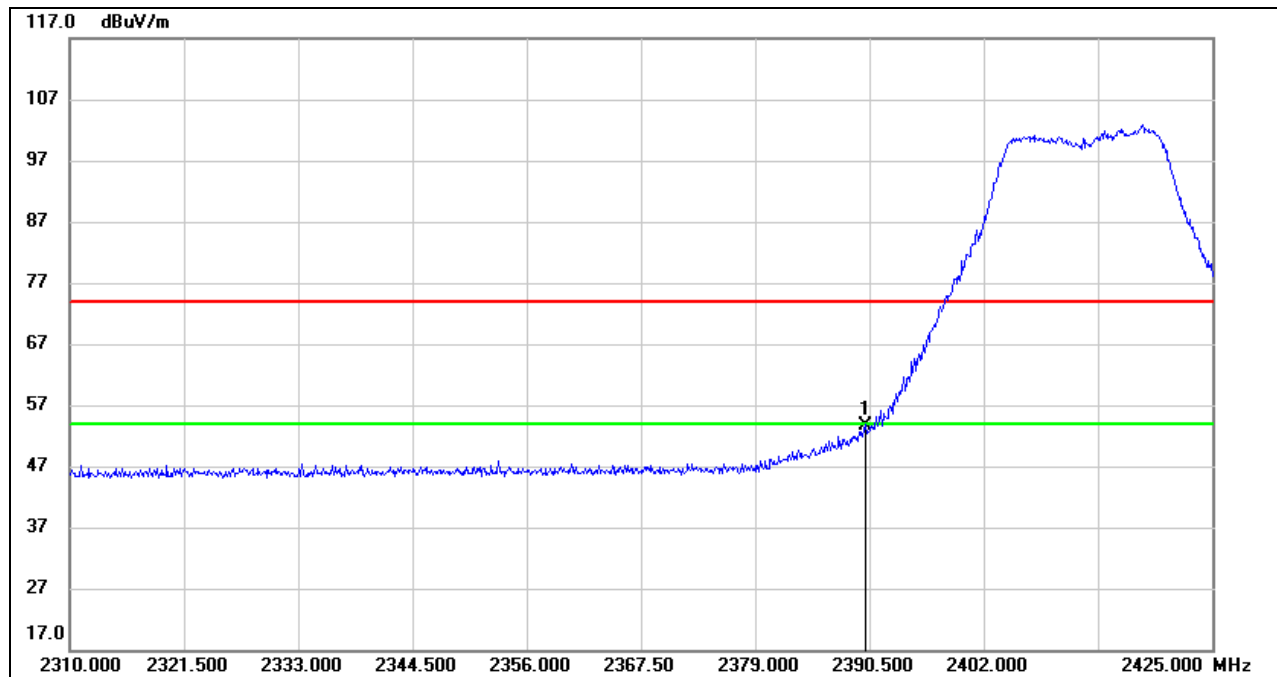**8.1.2. 802.11g SISO MODE****ANTENNA 0 TEST RESULTS (WORST CASE)****RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)****PEAK**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	21.02	32.66	53.68	74.00	-20.32	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

PEAK

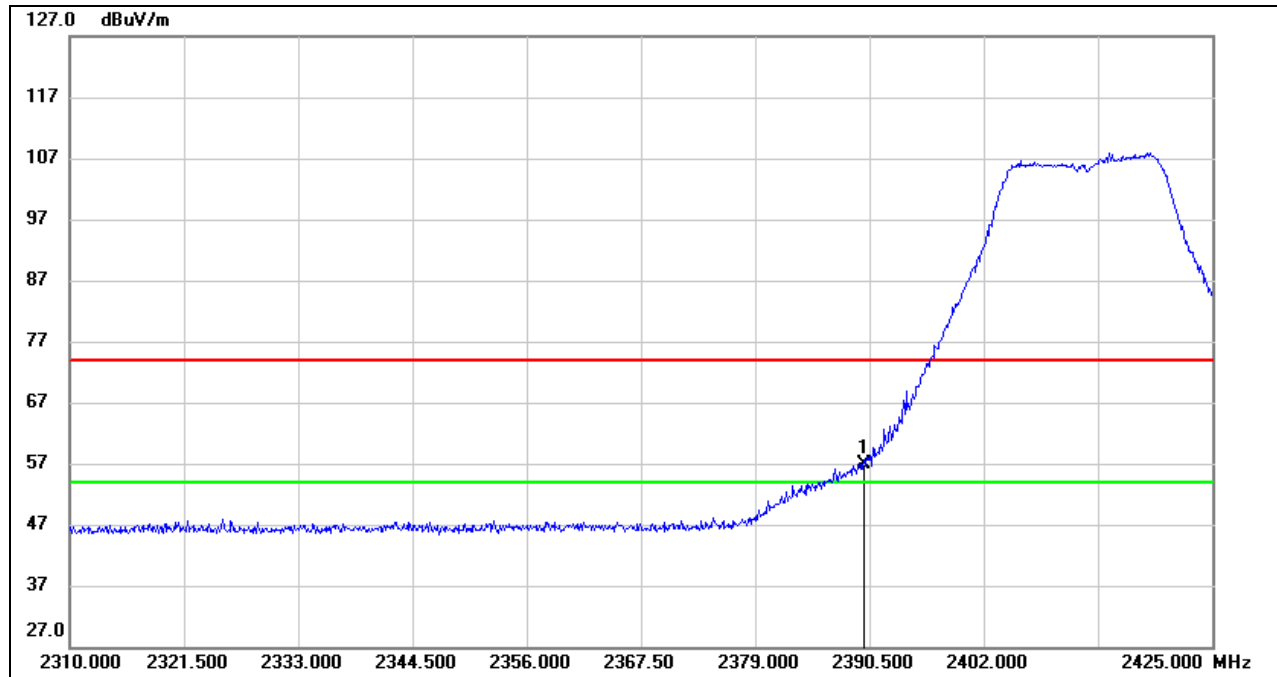


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	24.34	32.66	57.00	74.00	-17.00	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.


3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

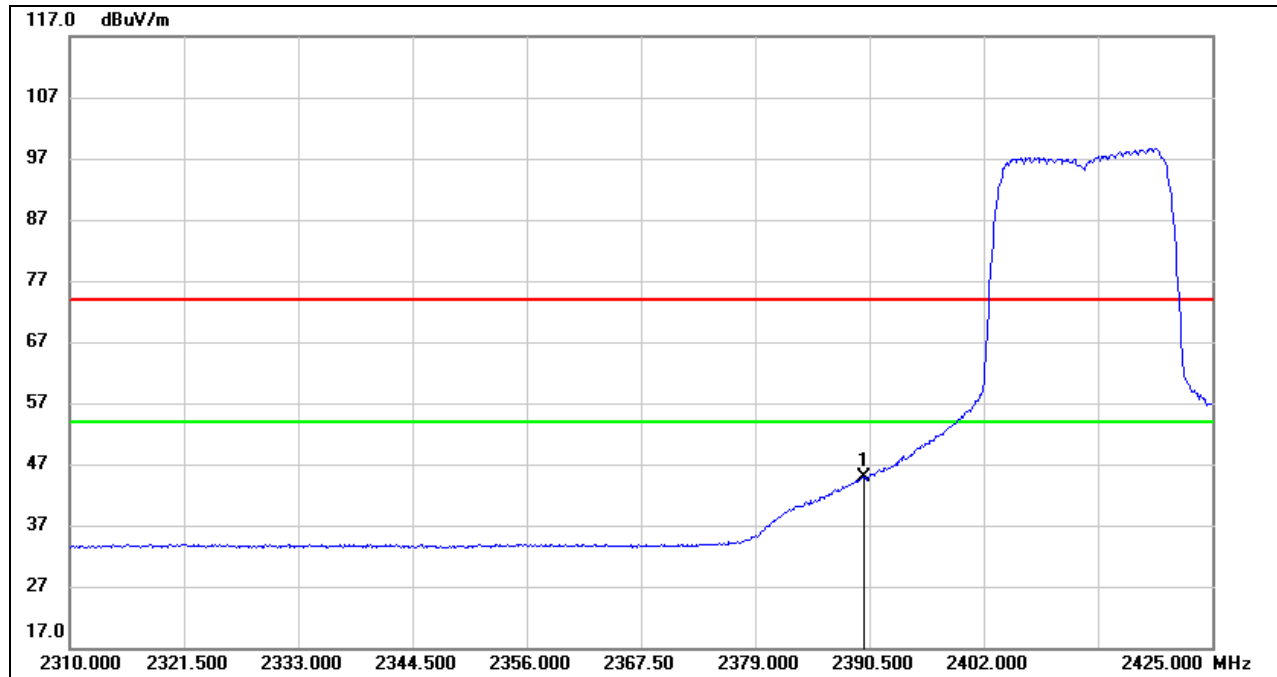

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	12.10	32.66	44.76	54.00	-9.24	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
3. For the transmitting duration, please refer to clause 7.1.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

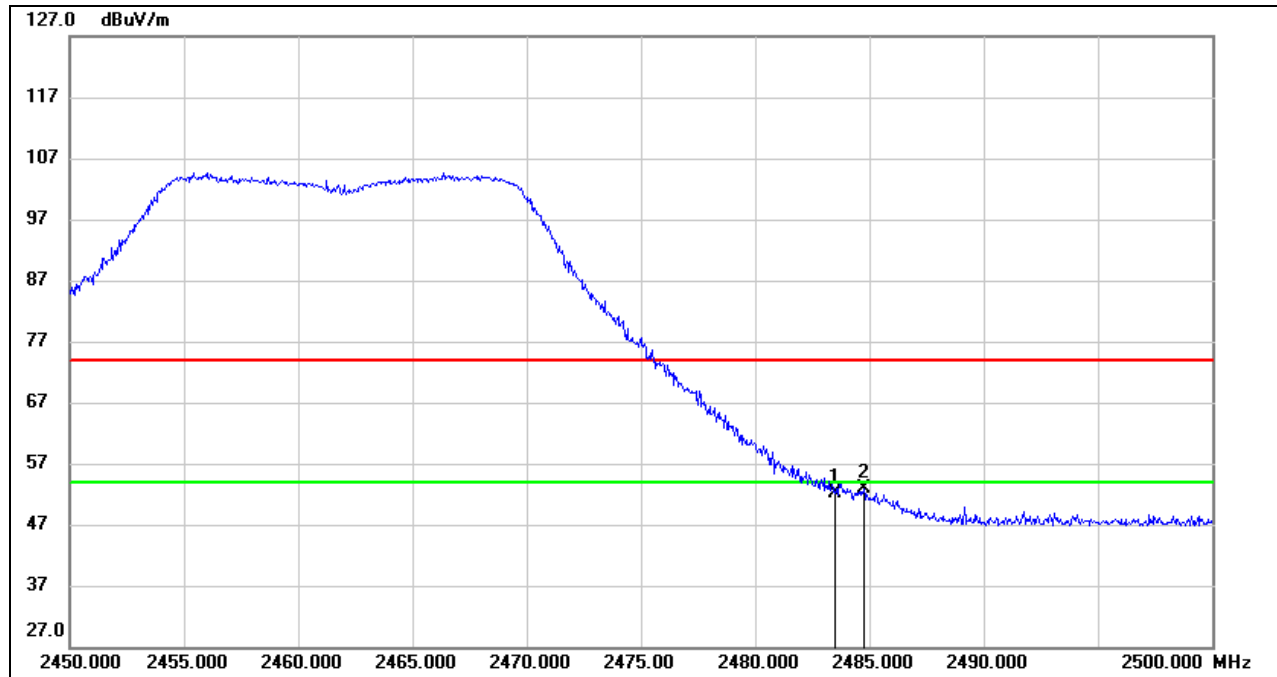**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)****PEAK**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	19.11	33.10	52.21	74.00	-21.79	peak
2	2484.750	19.68	33.10	52.78	74.00	-21.22	peak


Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

PEAK

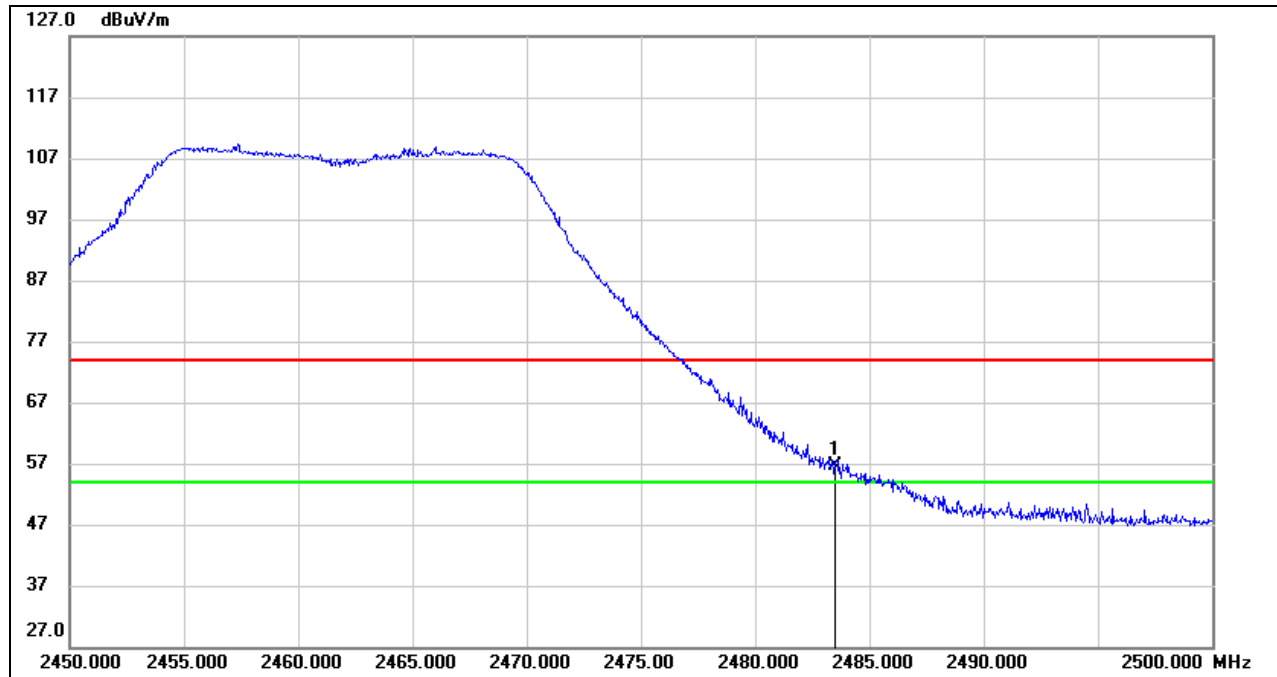


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	23.56	33.10	56.66	74.00	-17.34	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

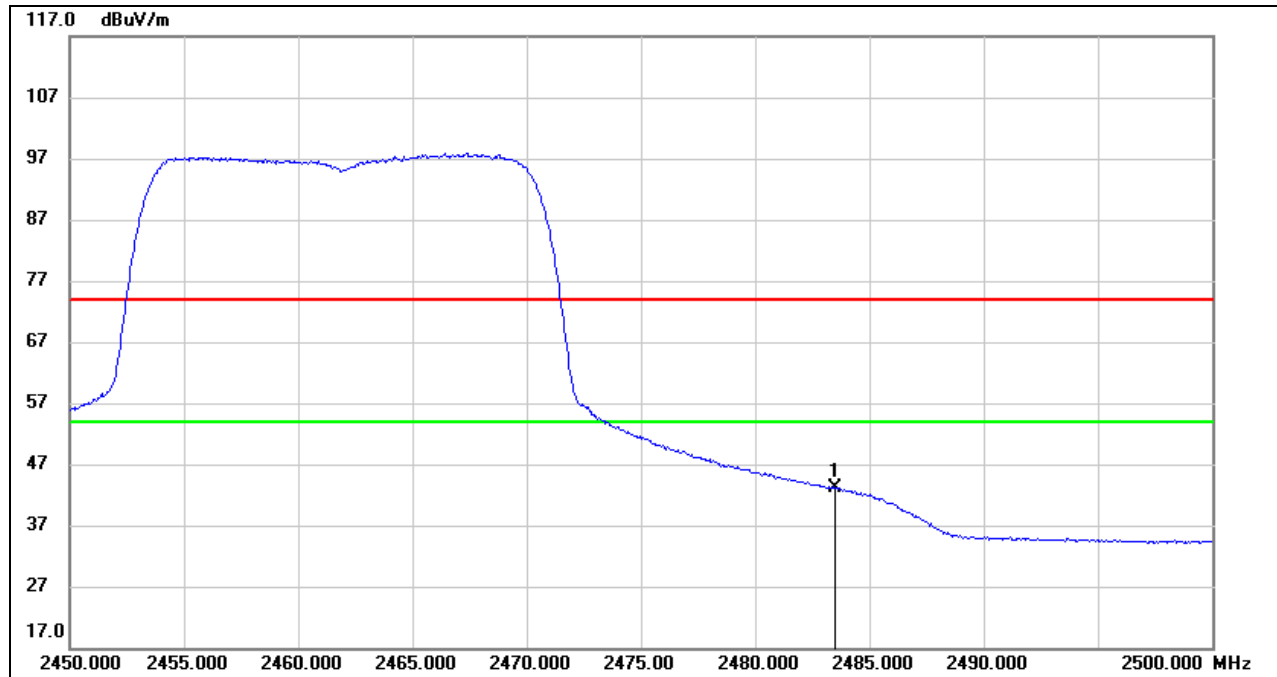


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	10.02	33.10	43.12	54.00	-10.88	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
3. For the transmitting duration, please refer to clause 7.1.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: Horizontal and Vertical have been tested, only the worst data was recorded in the report.

Note: Both antennas have been tested, only the worst data was recorded in the report.

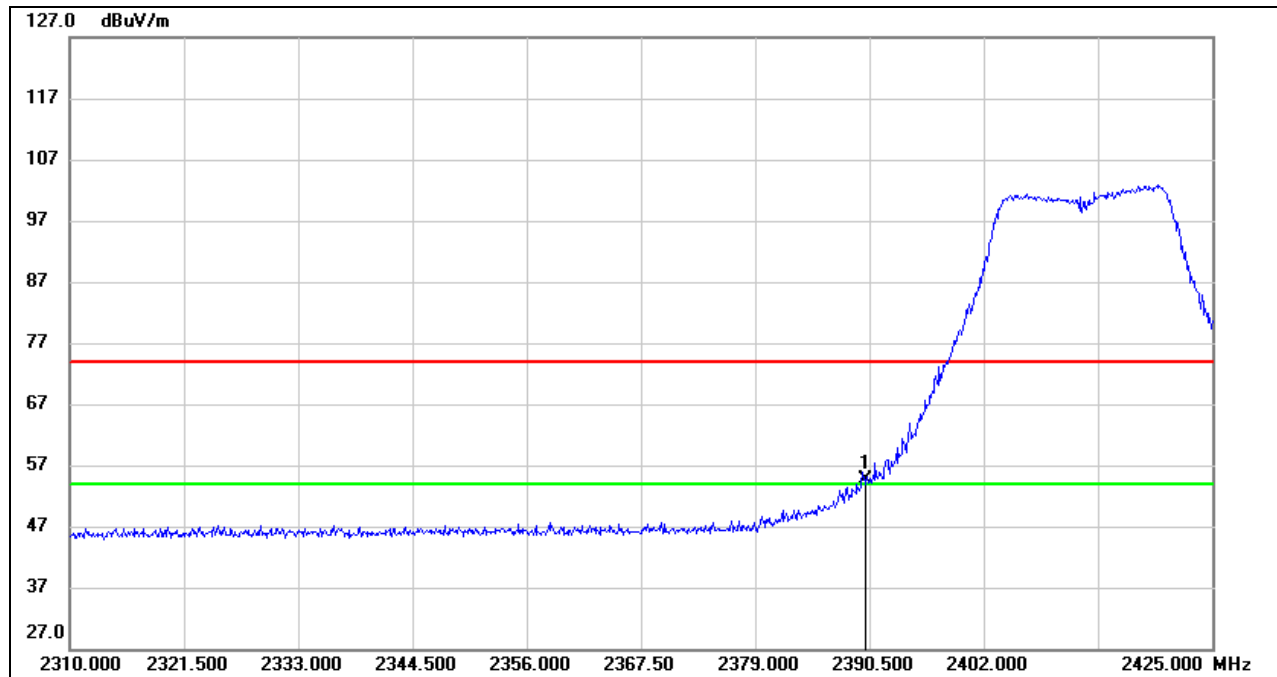**8.1.3. 802.11n HT20 MIMO MODE****RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)****PEAK**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	22.04	32.66	54.70	74.00	-19.30	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.


3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

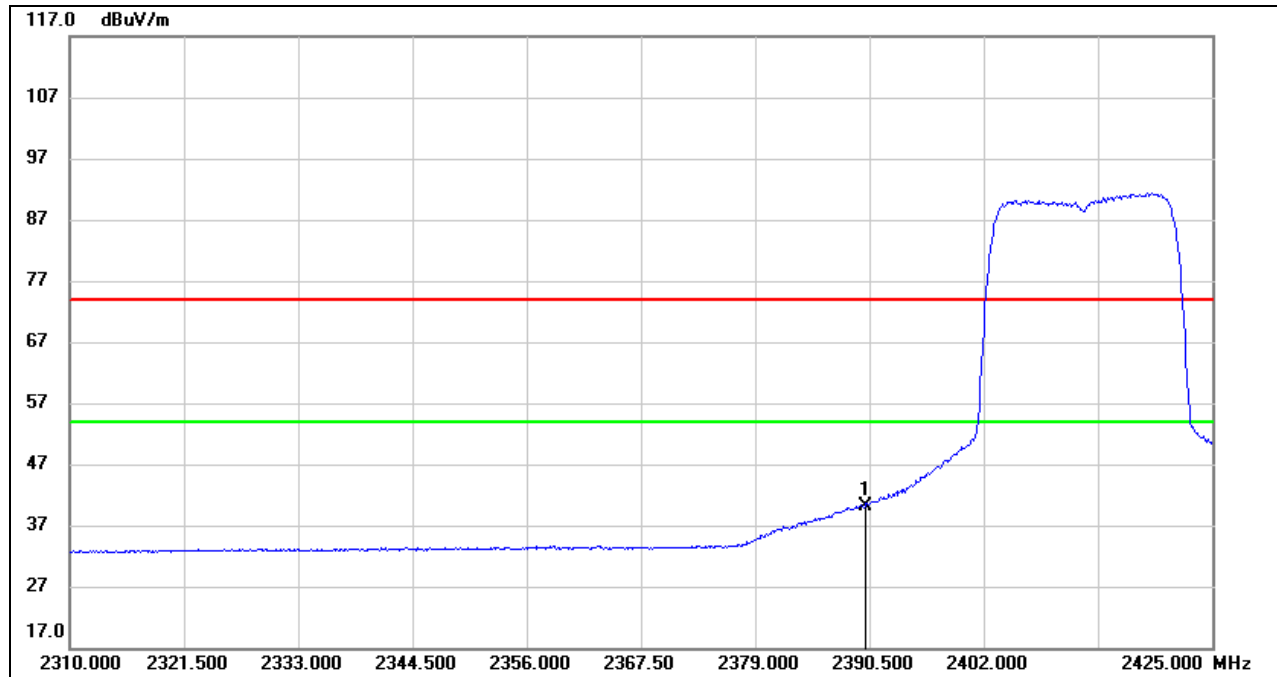

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	7.54	32.66	40.20	54.00	-13.80	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
3. For the transmitting duration, please refer to clause 7.1.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

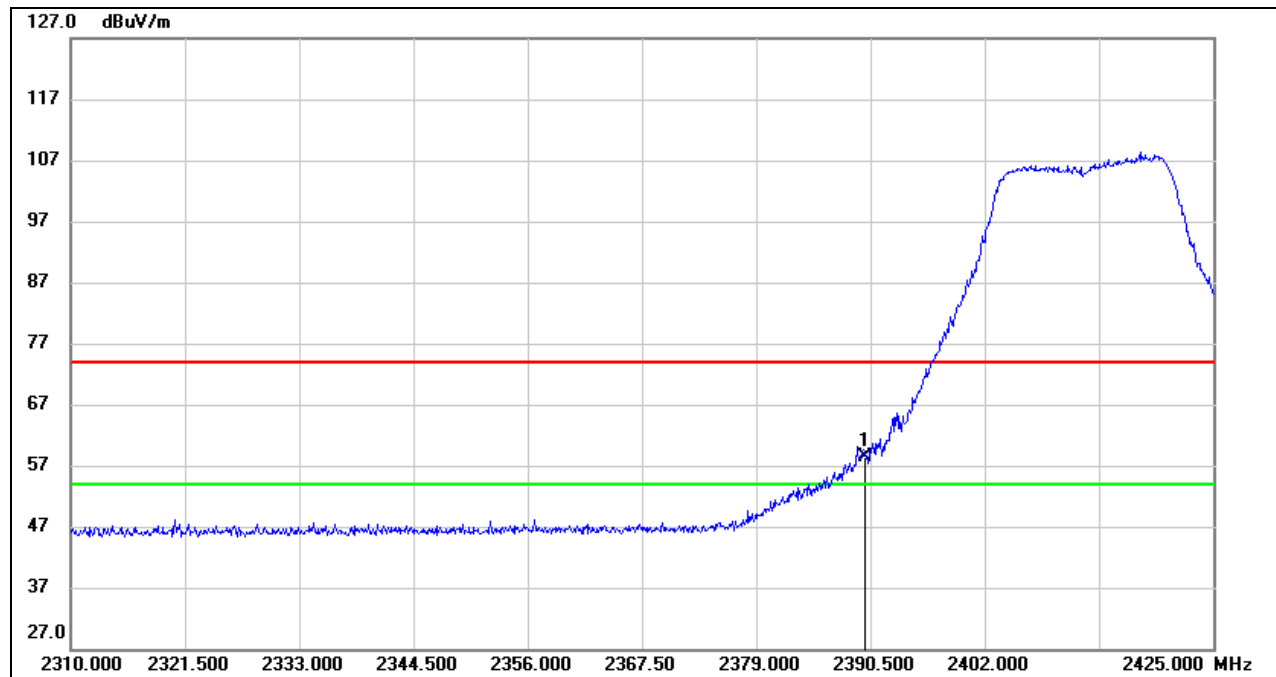**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)****PEAK**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	25.83	32.66	58.49	74.00	-15.51	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.


3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

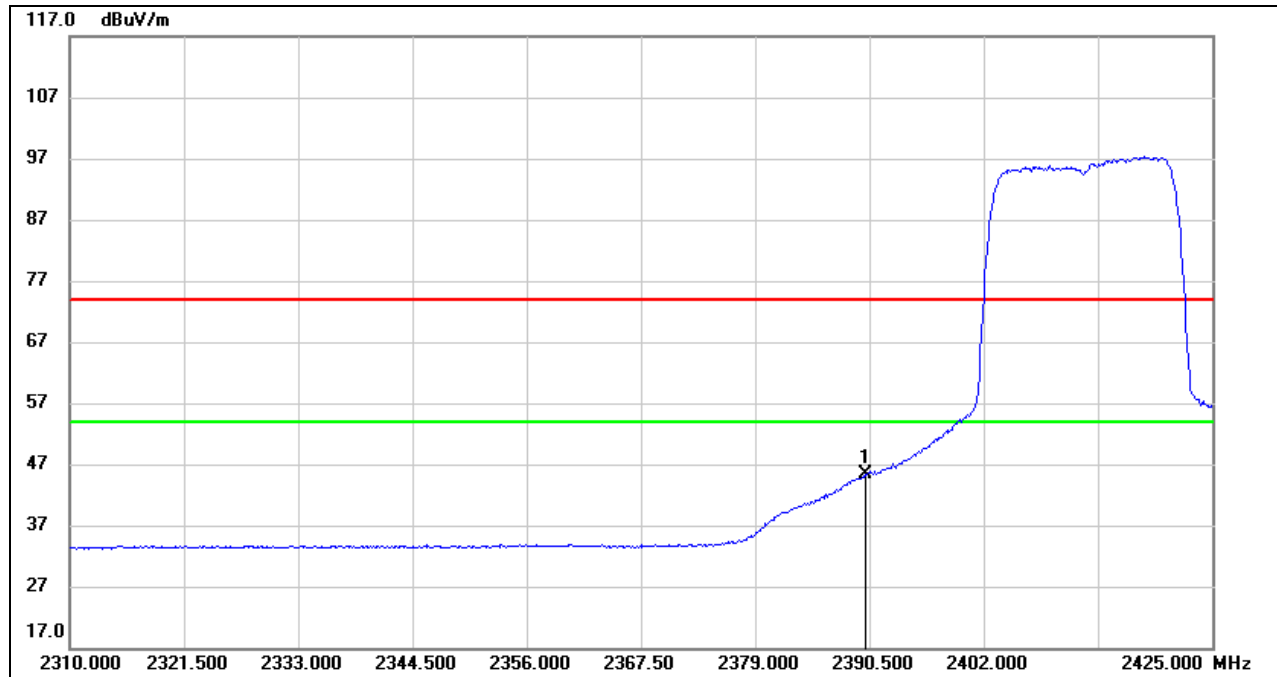

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	12.61	32.66	45.27	54.00	-8.73	AVG

- Note: 1. Measurement = Reading Level + Correct Factor.
2. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
3. For the transmitting duration, please refer to clause 7.1.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

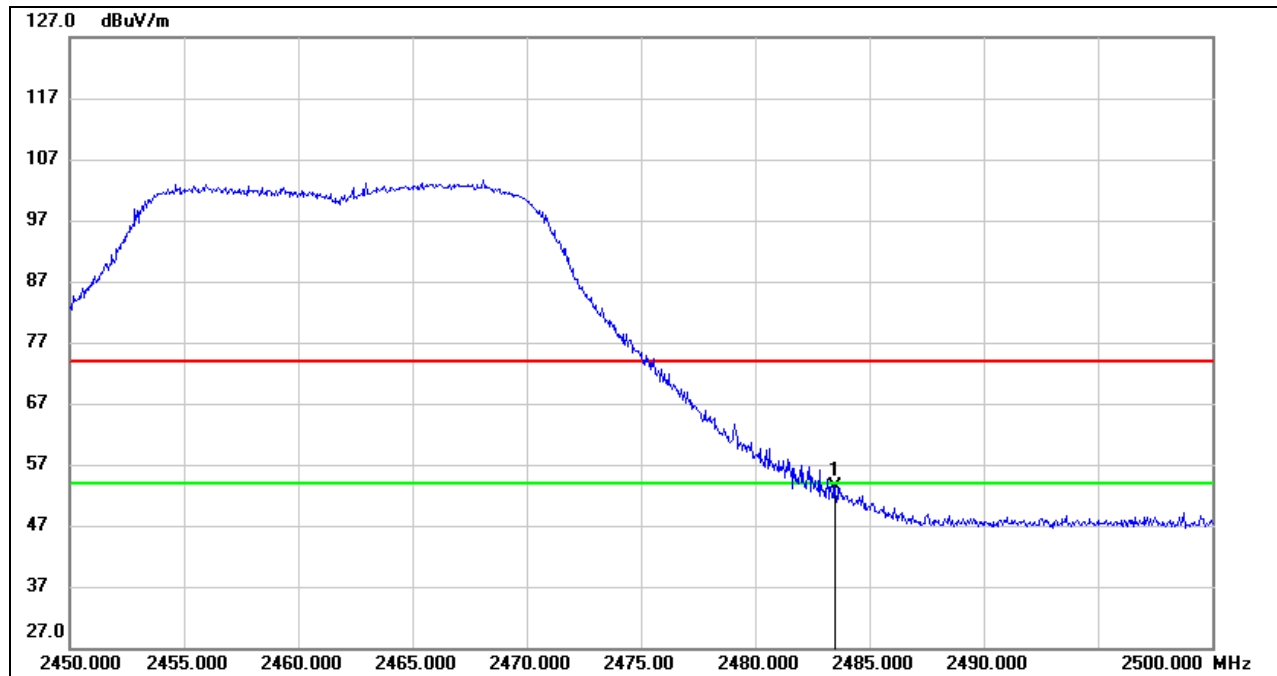
**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)****PEAK**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	20.39	33.10	53.49	74.00	-20.51	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

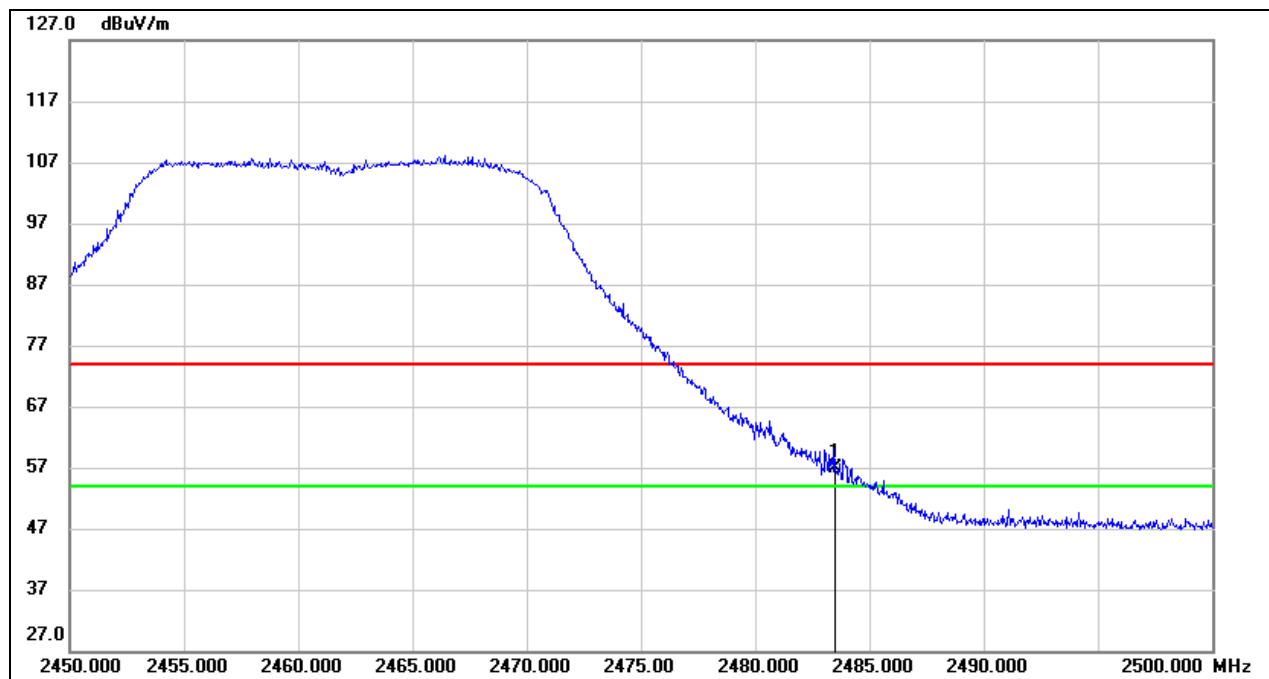**RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)****PEAK**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	23.77	33.10	56.87	74.00	-17.13	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

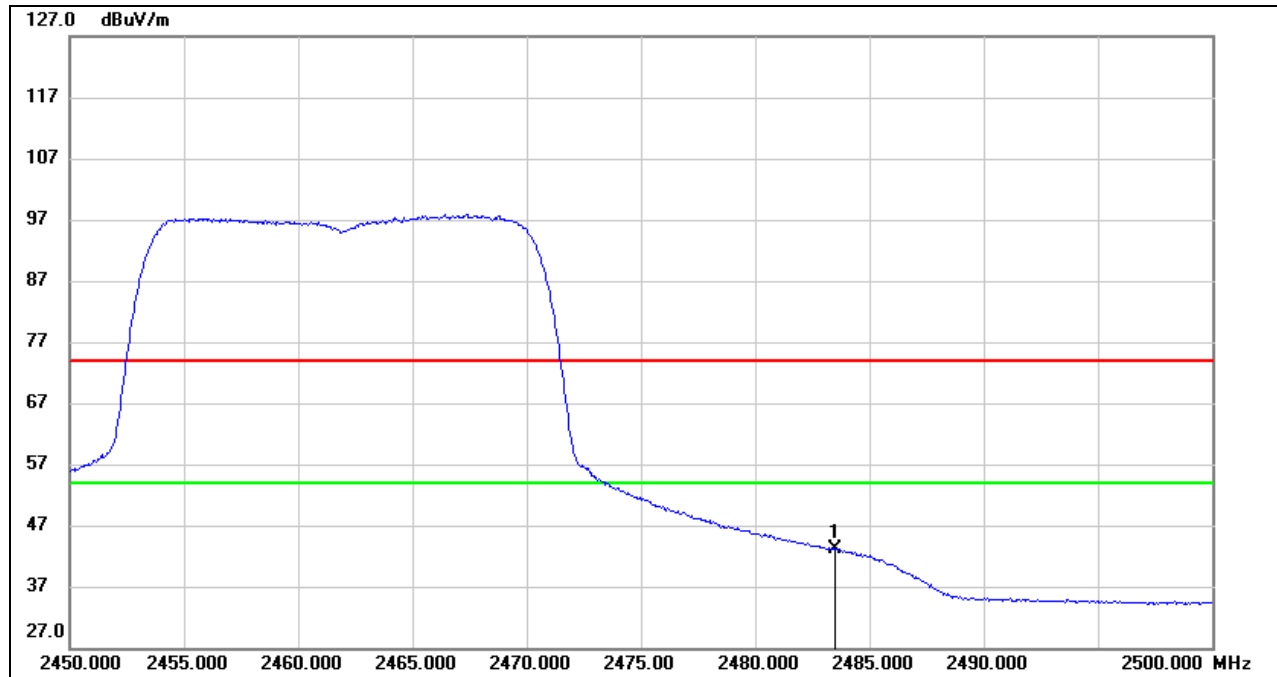

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	10.02	33.10	43.12	54.00	-10.88	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
3. For the transmitting duration, please refer to clause 7.1.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.


Note: Horizontal and Vertical have been tested, only the worst data was recorded in the report.

Note: All modes have been tested, only the worst data was recorded in the report.

8.1.4. 802.11n HT40 MIMO MODE

RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

PEAK

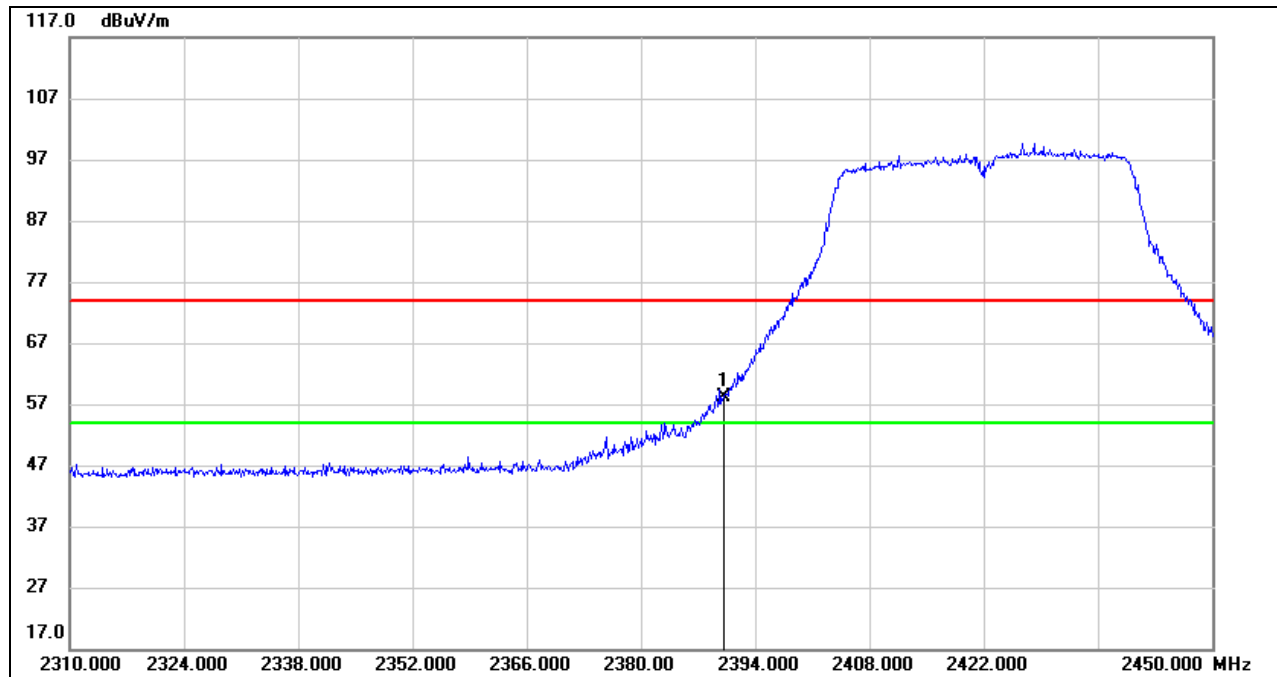


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	25.55	32.66	58.21	74.00	-15.79	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.


3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

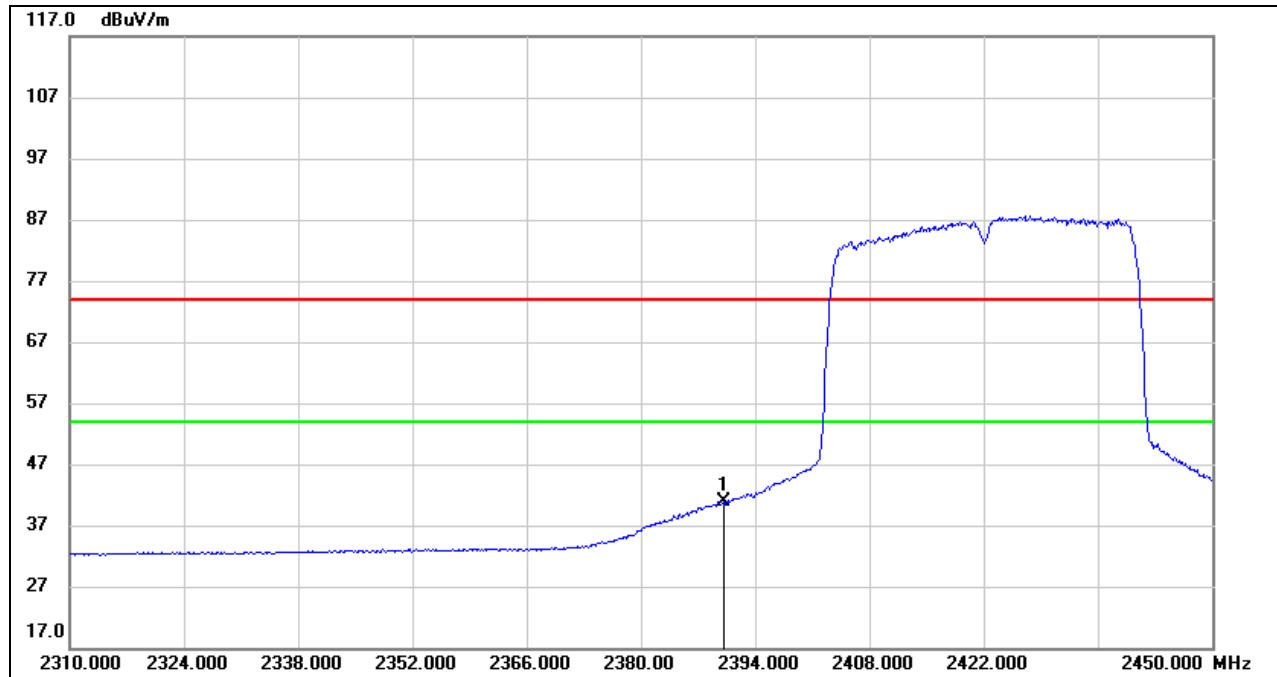

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	8.33	32.66	40.99	54.00	-13.01	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
3. For the transmitting duration, please refer to clause 7.1.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

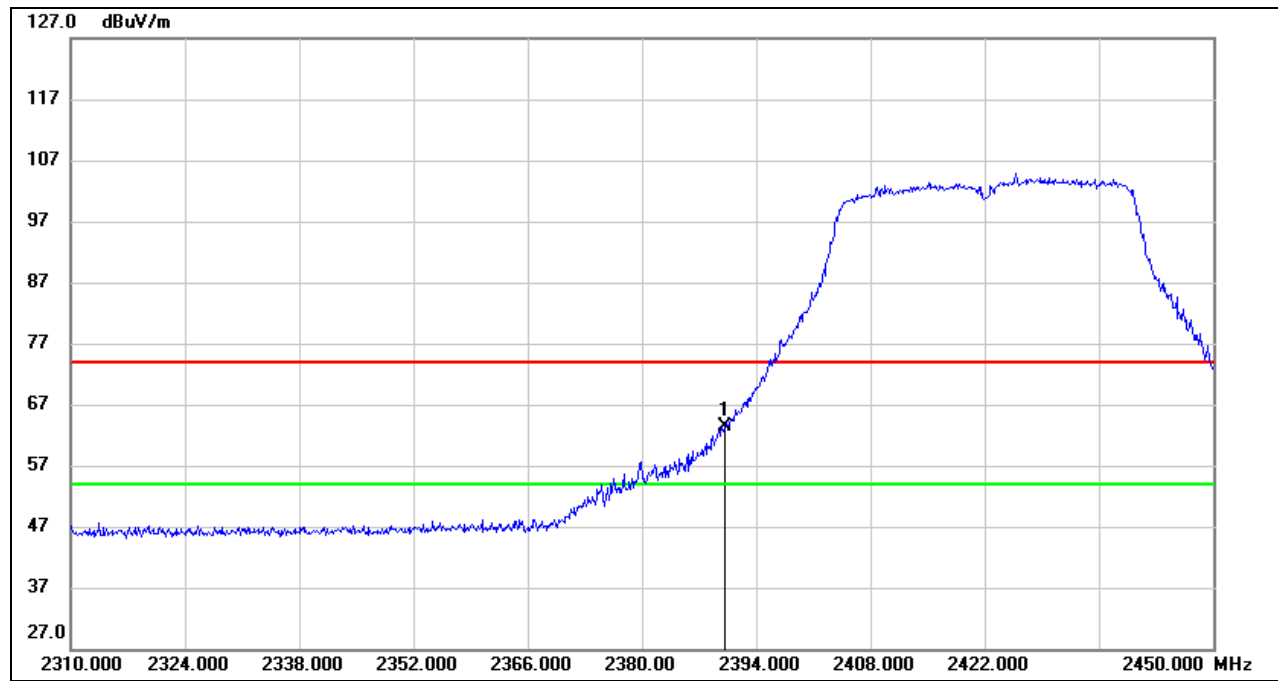**RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)****PEAK**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	30.83	32.66	63.49	74.00	-10.51	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.


3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

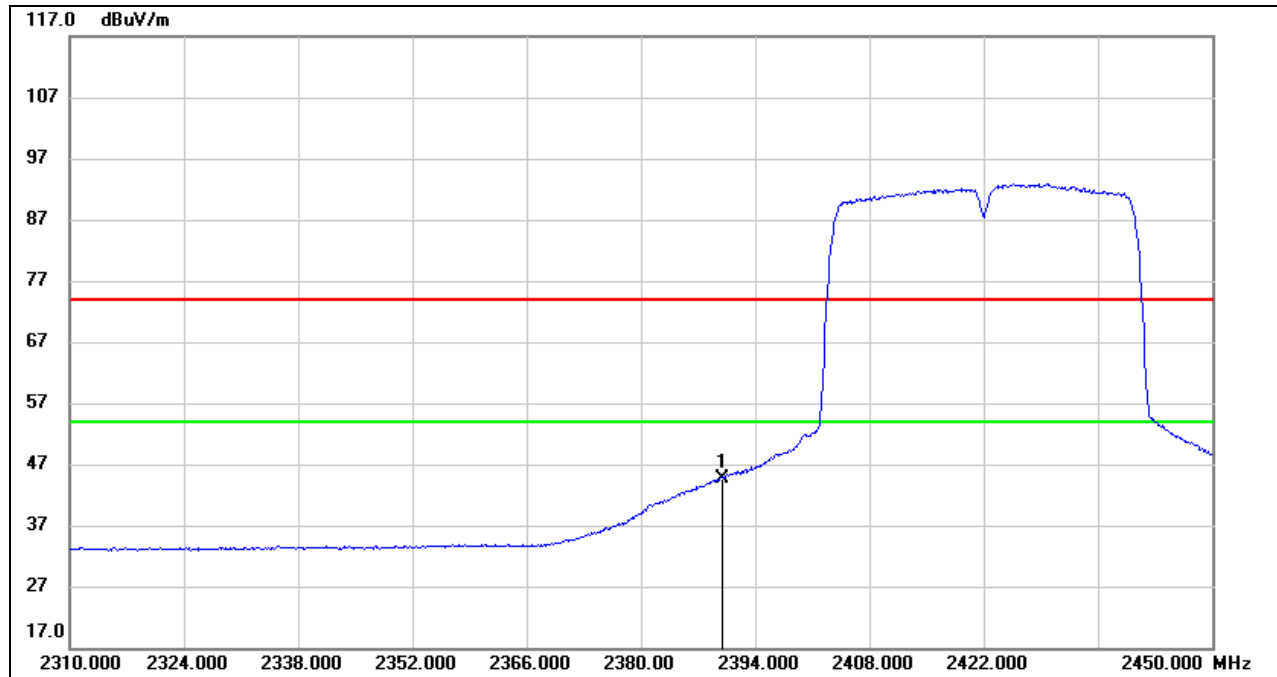

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	12.00	32.66	44.66	54.00	-9.34	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
3. For the transmitting duration, please refer to clause 7.1.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

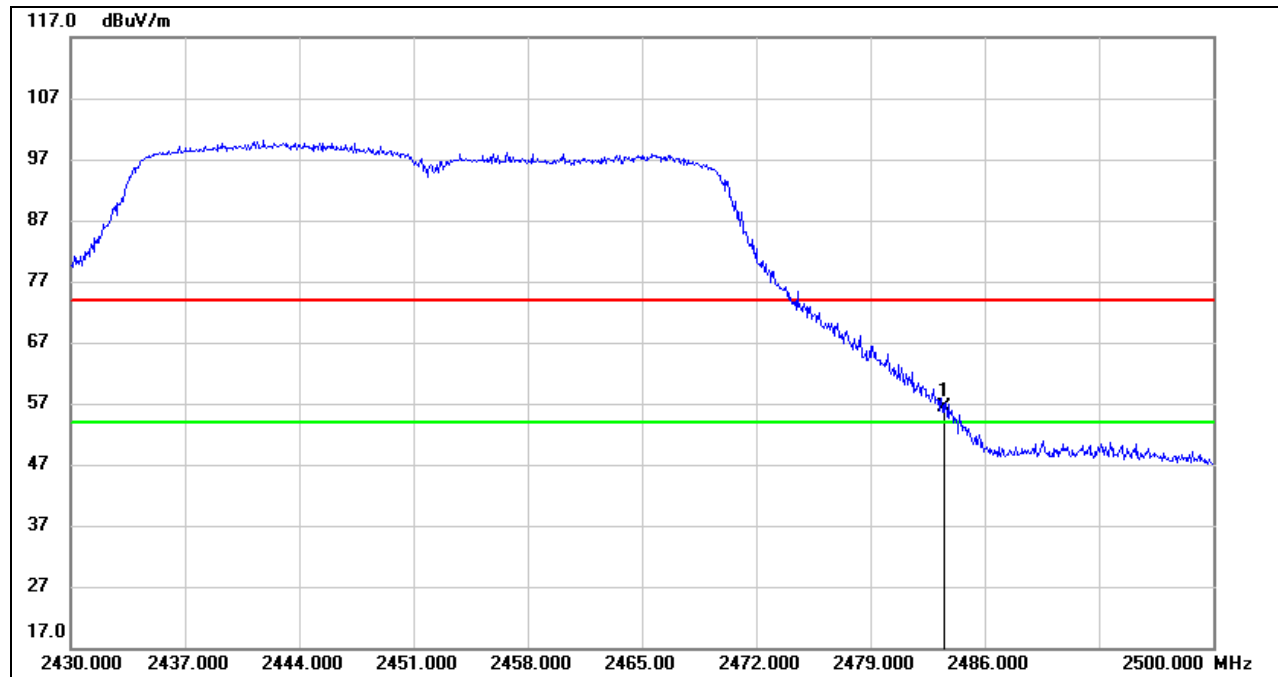**RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)****PEAK**


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	23.40	33.10	56.50	74.00	-17.50	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

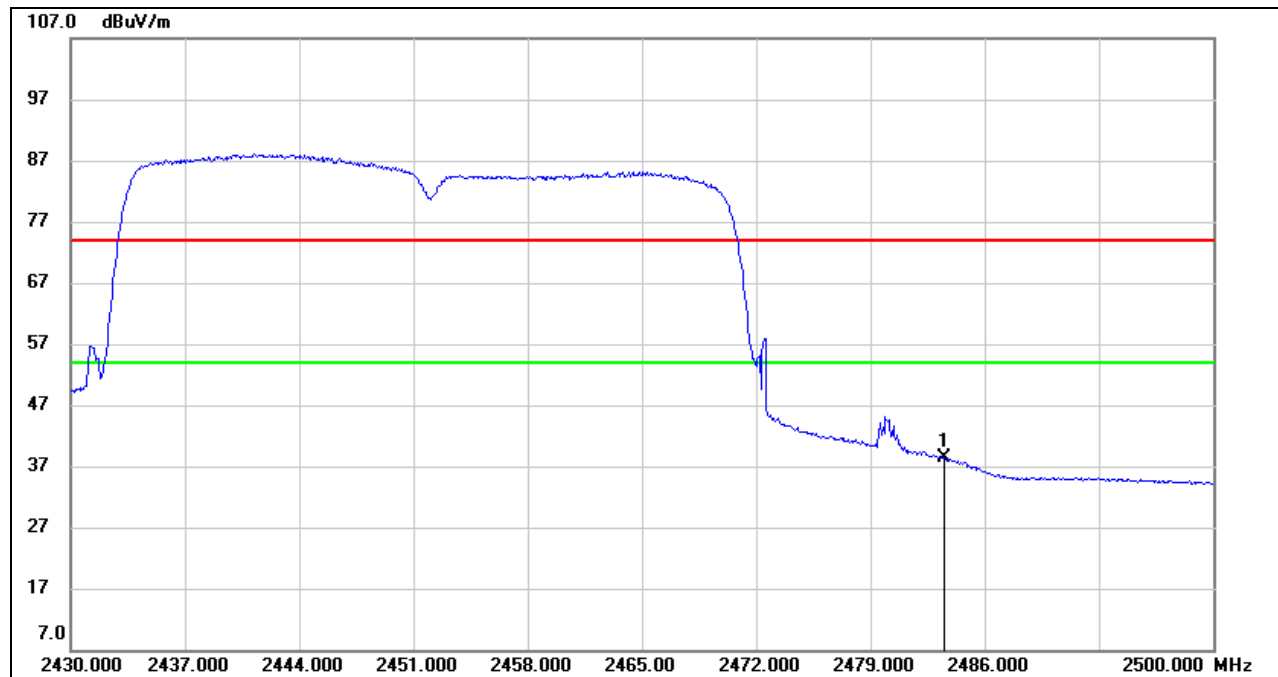


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	5.23	33.10	38.33	54.00	-15.67	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
3. For the transmitting duration, please refer to clause 7.1.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

PEAK

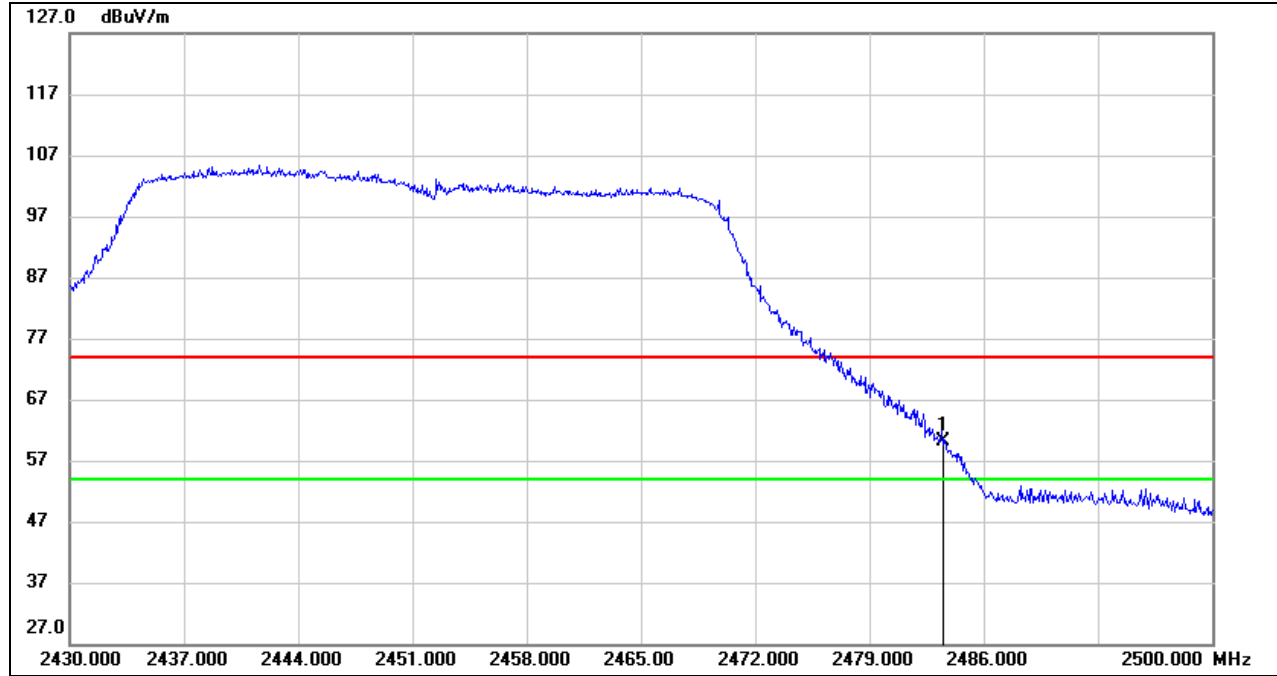


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	27.07	33.10	60.17	74.00	-13.83	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. Peak: Peak detector.

3. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

AVG

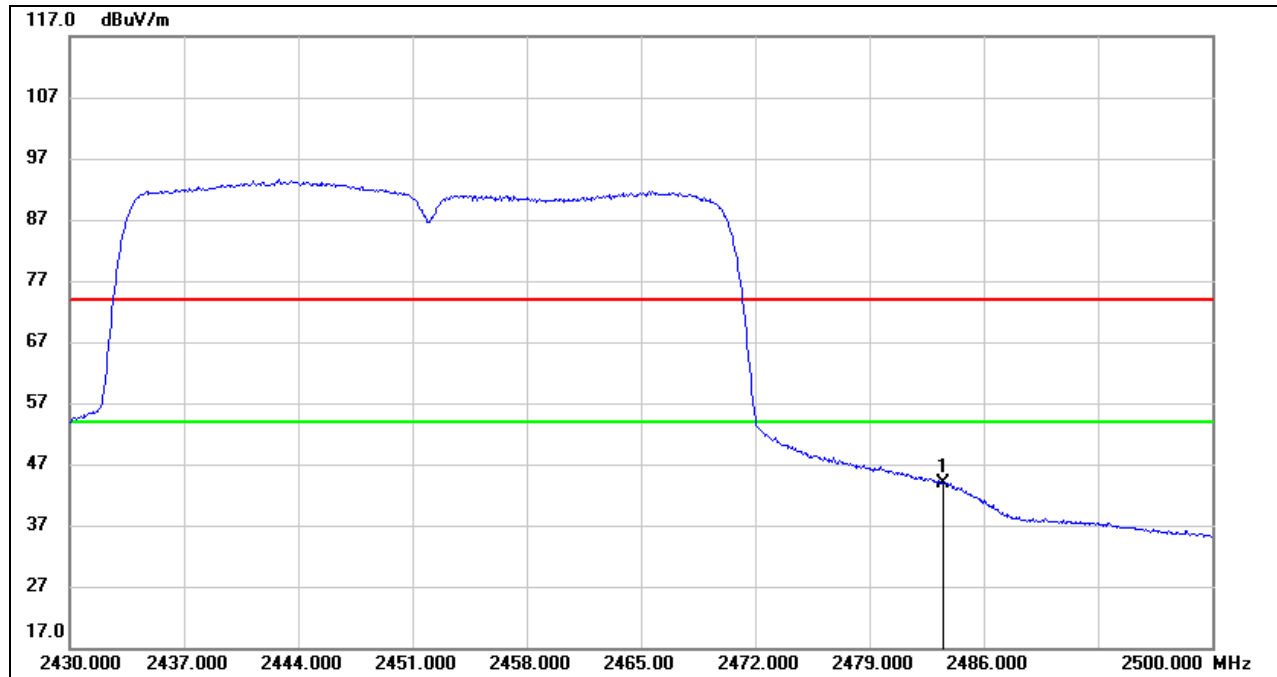

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	10.78	33.10	43.88	54.00	-10.12	AVG

Note: 1. Measurement = Reading Level + Correct Factor.
2. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
3. For the transmitting duration, please refer to clause 7.1.
4. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Note: Horizontal and Vertical have been tested, only the worst data was recorded in the report.


Note: All modes have been tested, only the worst data was recorded in the report.

8.2. SPURIOUS EMISSIONS (1 GHz ~ 3 GHz)

8.2.1. 802.11b SISO MODE

ANTENNA 0 TEST RESULTS (WORST CASE)

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

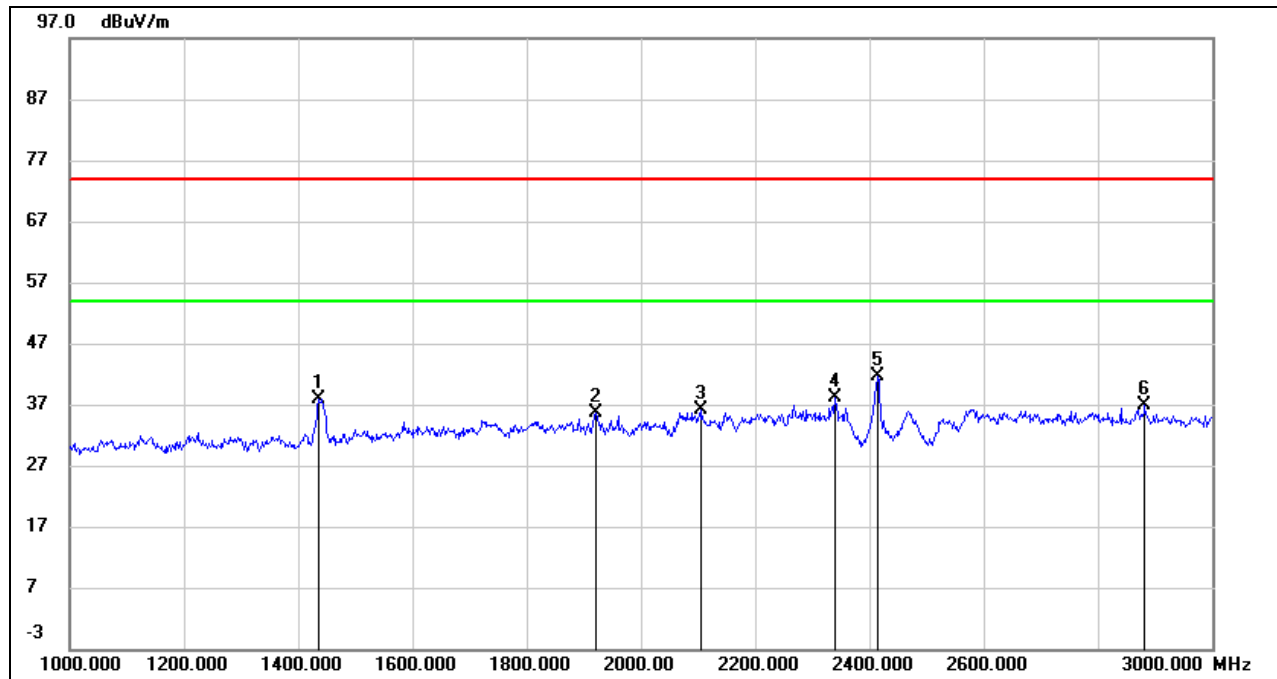

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1436.000	50.82	-12.83	37.99	74.00	-36.01	peak
2	1922.000	46.42	-10.81	35.61	74.00	-38.39	peak
3	2104.000	46.51	-10.31	36.20	74.00	-37.80	peak
4	2340.000	47.19	-9.18	38.01	74.00	-35.99	peak
5	2414.000	50.54	-8.91	41.63	74.00	-32.37	peak
6	2882.000	44.35	-7.44	36.91	74.00	-37.09	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

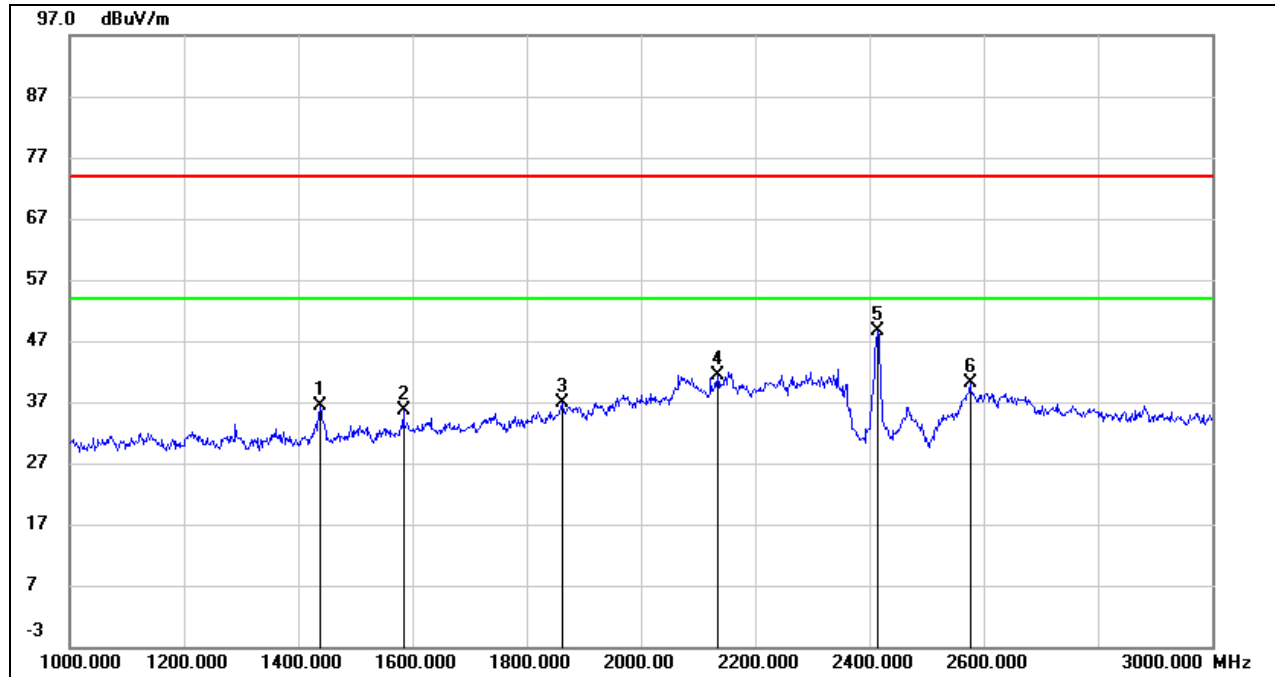

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1438.000	49.08	-12.81	36.27	74.00	-37.73	peak
2	1584.000	47.67	-11.94	35.73	74.00	-38.27	peak
3	1862.000	47.55	-10.70	36.85	74.00	-37.15	peak
4	2134.000	51.58	-10.12	41.46	74.00	-32.54	peak
5	2414.000	57.46	-8.91	48.55	74.00	-25.45	peak
6	2576.000	48.81	-8.61	40.20	74.00	-33.80	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

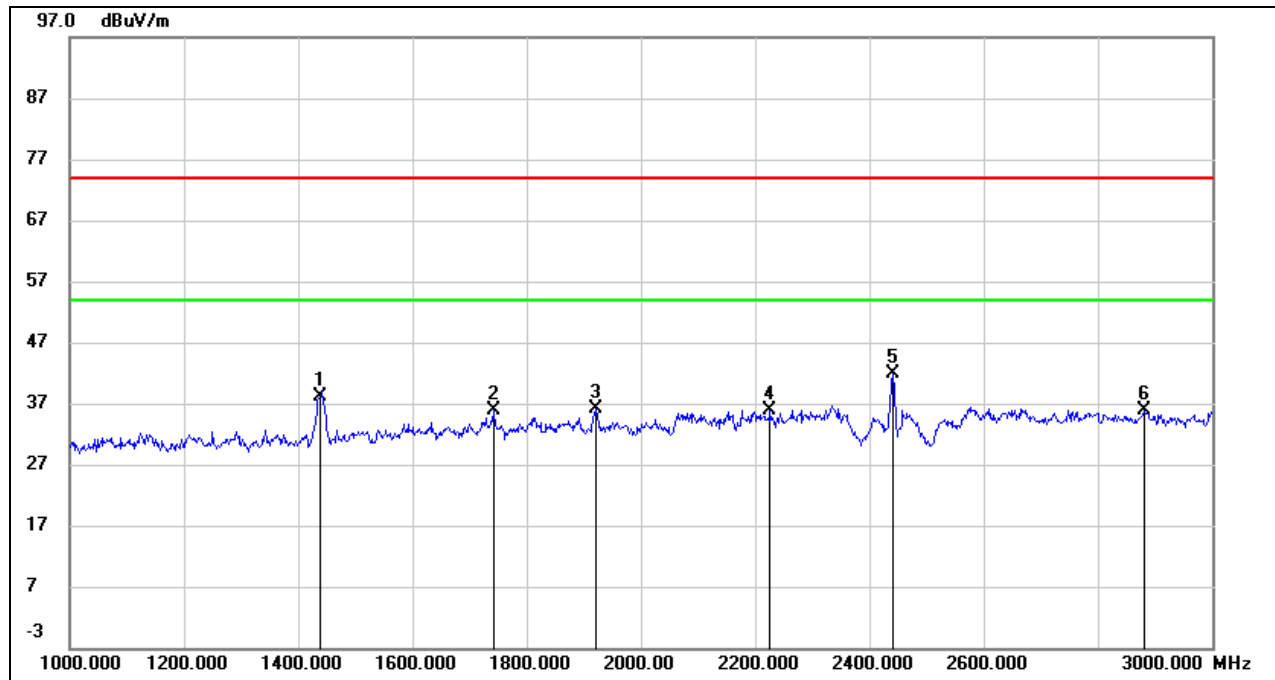

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1438.000	50.97	-12.81	38.16	74.00	-35.84	peak
2	1742.000	46.81	-10.95	35.86	74.00	-38.14	peak
3	1922.000	46.96	-10.81	36.15	74.00	-37.85	peak
4	2226.000	45.57	-9.61	35.96	74.00	-38.04	peak
5	2440.000	50.83	-8.86	41.97	74.00	-32.03	peak
6	2880.000	43.38	-7.45	35.93	74.00	-38.07	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

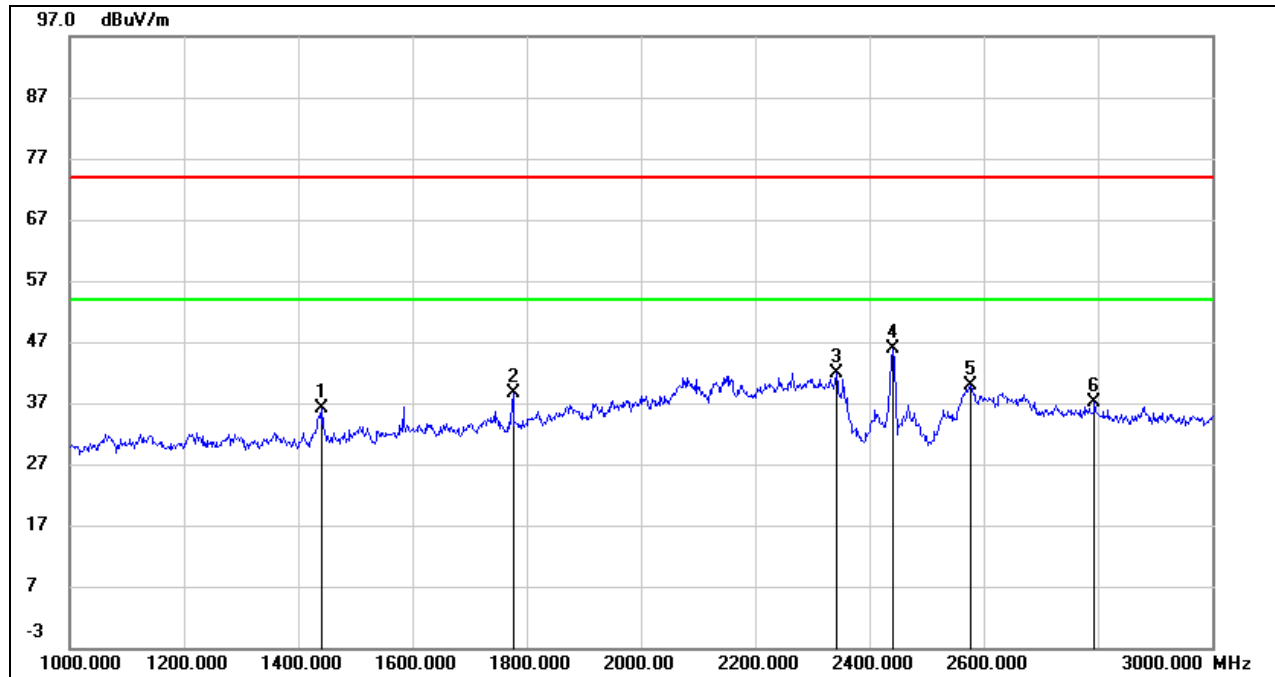

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1442.000	48.94	-12.79	36.15	74.00	-37.85	peak
2	1776.000	49.34	-10.73	38.61	74.00	-35.39	peak
3	2342.000	51.10	-9.17	41.93	74.00	-32.07	peak
4	2442.000	54.77	-8.85	45.92	74.00	-28.08	peak
5	2578.000	48.43	-8.61	39.82	74.00	-34.18	peak
6	2794.000	44.81	-7.69	37.12	74.00	-36.88	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

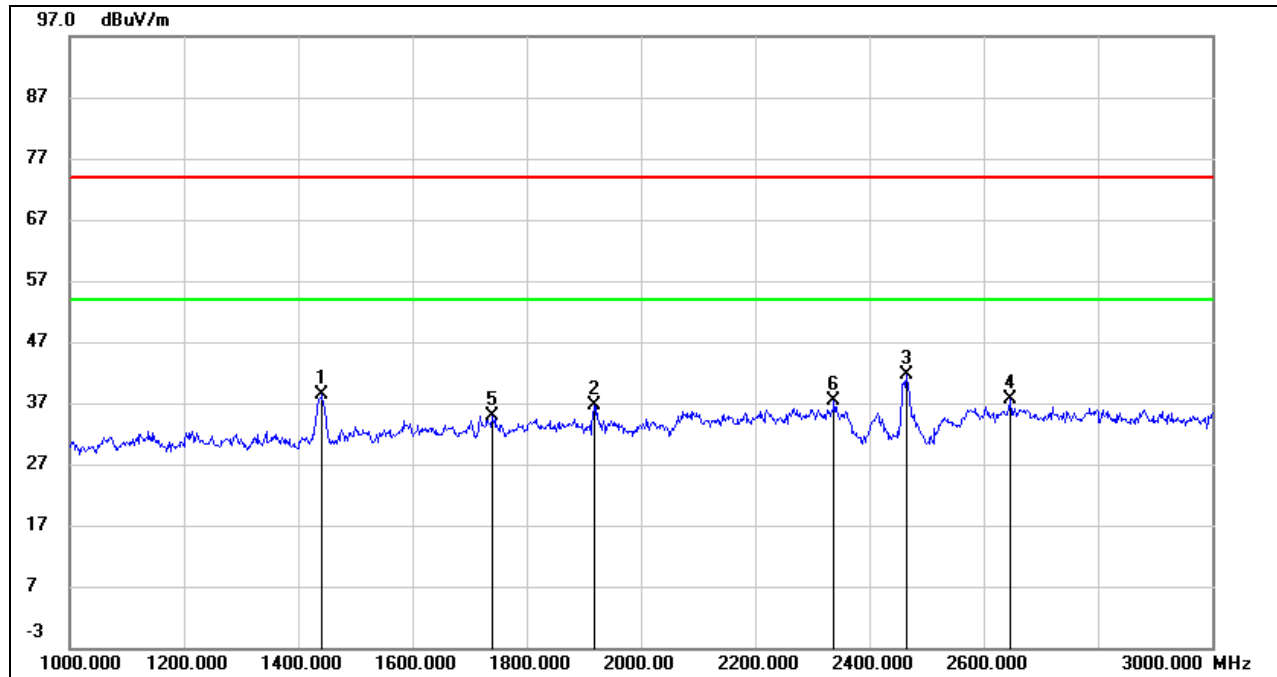

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1442.000	51.09	-12.79	38.30	74.00	-35.70	peak
2	1918.000	47.37	-10.81	36.56	74.00	-37.44	peak
3	2464.000	50.47	-8.80	41.67	74.00	-32.33	peak
4	2646.000	46.06	-8.37	37.69	74.00	-36.31	peak
5	1740.000	45.87	-10.96	34.91	74.00	-39.09	peak
6	2338.000	46.49	-9.18	37.31	74.00	-36.69	peak

Note: 1. Measurement = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

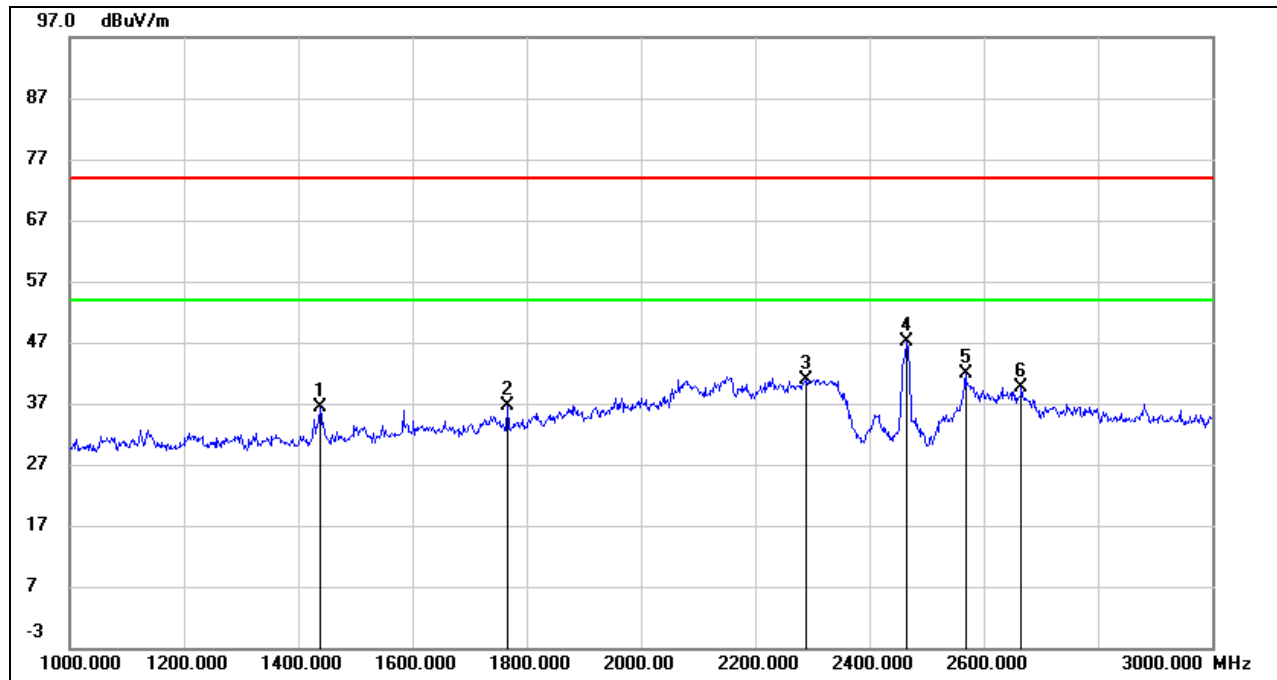

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1438.000	49.14	-12.81	36.33	74.00	-37.67	peak
2	1766.000	47.44	-10.79	36.65	74.00	-37.35	peak
3	2288.000	50.37	-9.38	40.99	74.00	-33.01	peak
4	2466.000	56.00	-8.80	47.20	74.00	-26.80	peak
5	2568.000	50.56	-8.62	41.94	74.00	-32.06	peak
6	2666.000	47.79	-8.27	39.52	74.00	-34.48	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: Both the two antennas had been tested, but only the worst data was recorded in the report.


Note: All modes and channels have been tested, only the worst data was recorded in the report.

8.3. SPURIOUS EMISSIONS (3 GHz ~ 18 GHz)

8.3.1. 802.11b SISO MODE

ANTENNA 0 TEST RESULTS (WORST CASE)

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

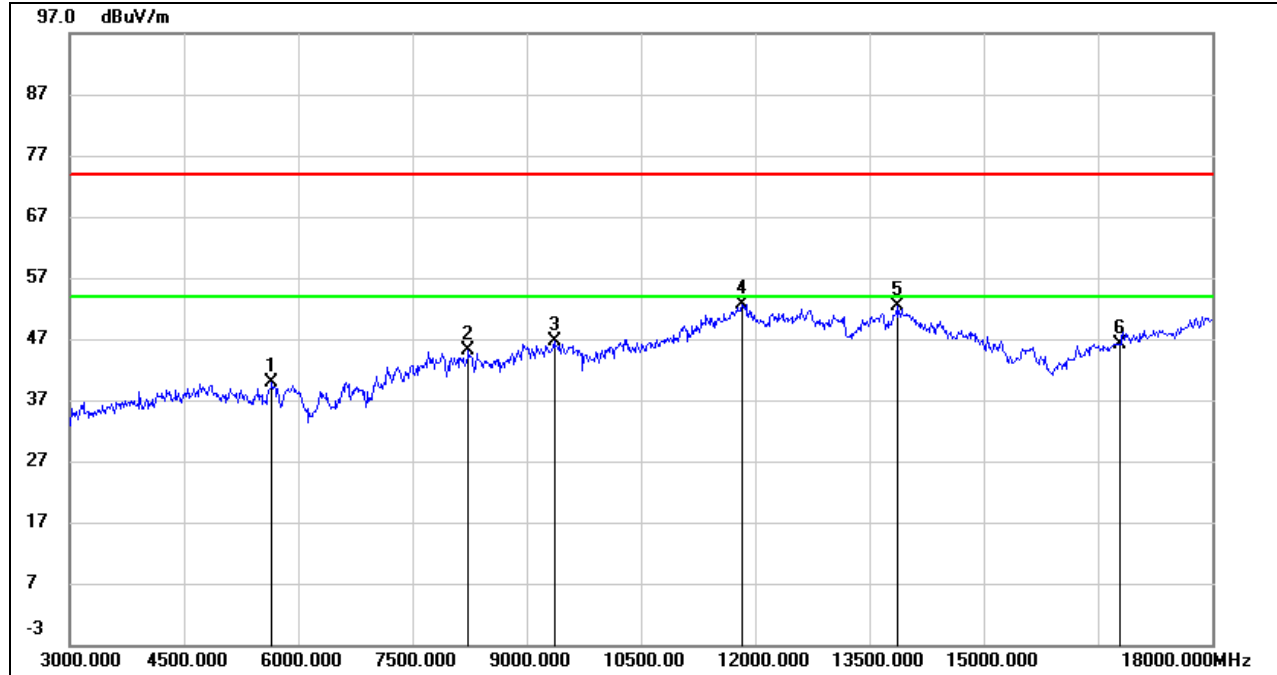

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5655.000	39.08	0.69	39.77	74.00	-34.23	peak
2	8235.000	38.06	7.13	45.19	74.00	-28.81	peak
3	9360.000	37.17	9.43	46.60	74.00	-27.40	peak
4	11835.000	35.47	17.20	52.67	74.00	-21.33	peak
5	13860.000	31.83	20.55	52.38	74.00	-21.62	peak
6	16785.000	28.01	18.24	46.25	74.00	-27.75	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.


4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.

5. For the transmitting duration, please refer to clause 7.1.

6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

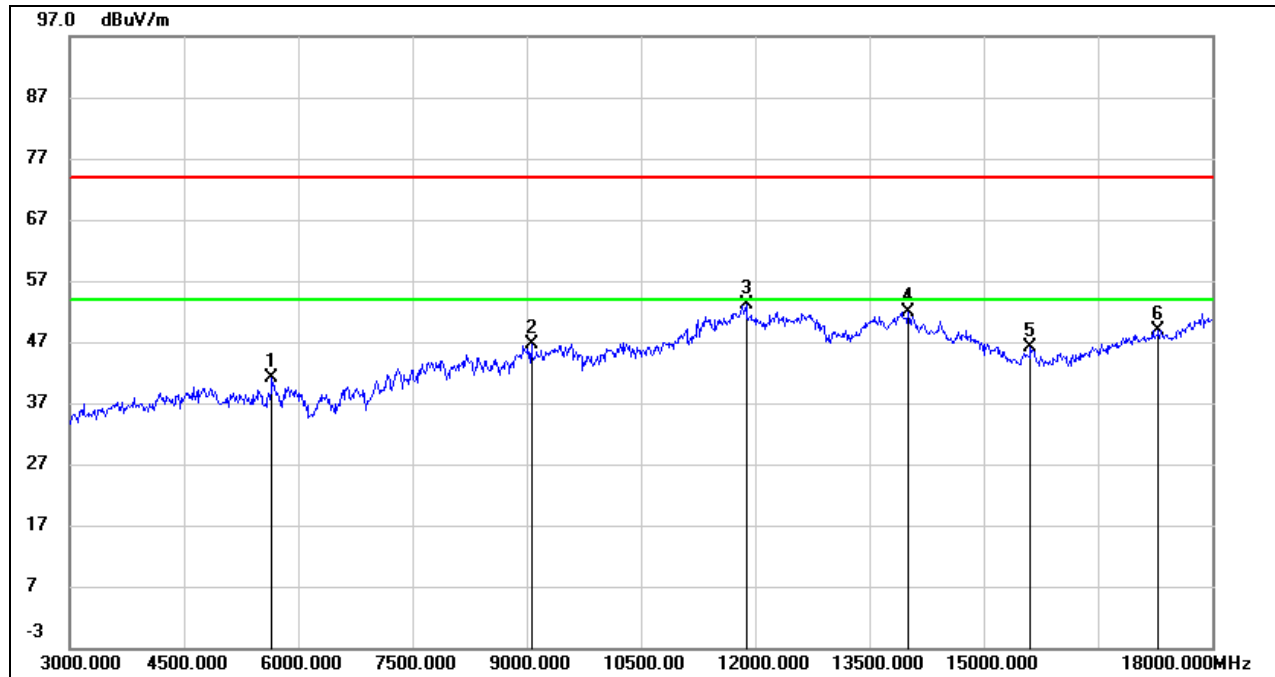

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5655.000	40.33	0.69	41.02	74.00	-32.98	peak
2	9060.000	37.38	9.20	46.58	74.00	-27.42	peak
3	11880.000	35.99	17.17	53.16	74.00	-20.84	peak
4	14010.000	31.30	20.60	51.90	74.00	-22.10	peak
5	15615.000	30.69	15.41	46.10	74.00	-27.90	peak
6	17295.000	28.65	20.18	48.83	74.00	-25.17	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)

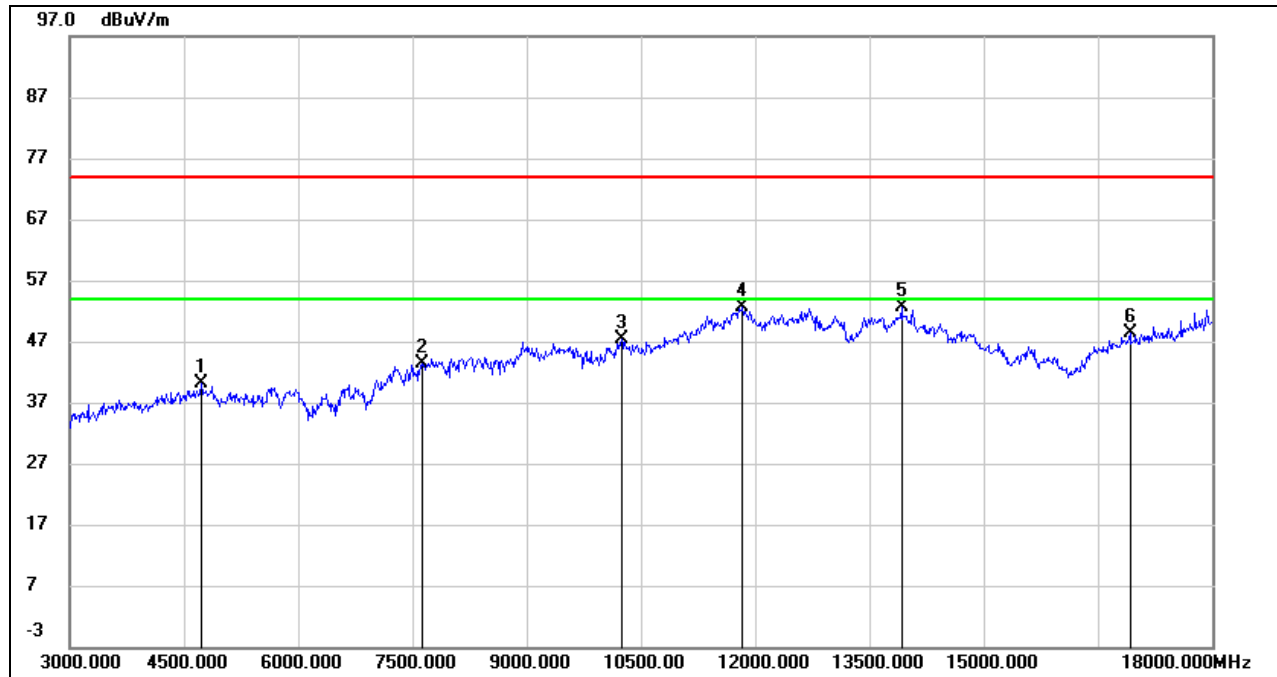

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4725.000	41.57	-1.46	40.11	74.00	-33.89	peak
2	7620.000	37.95	5.50	43.45	74.00	-30.55	peak
3	10245.000	36.26	11.03	47.29	74.00	-26.71	peak
4	11835.000	35.42	17.20	52.62	74.00	-21.38	peak
5	13920.000	31.99	20.58	52.57	74.00	-21.43	peak
6	16920.000	29.78	18.69	48.47	74.00	-25.53	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

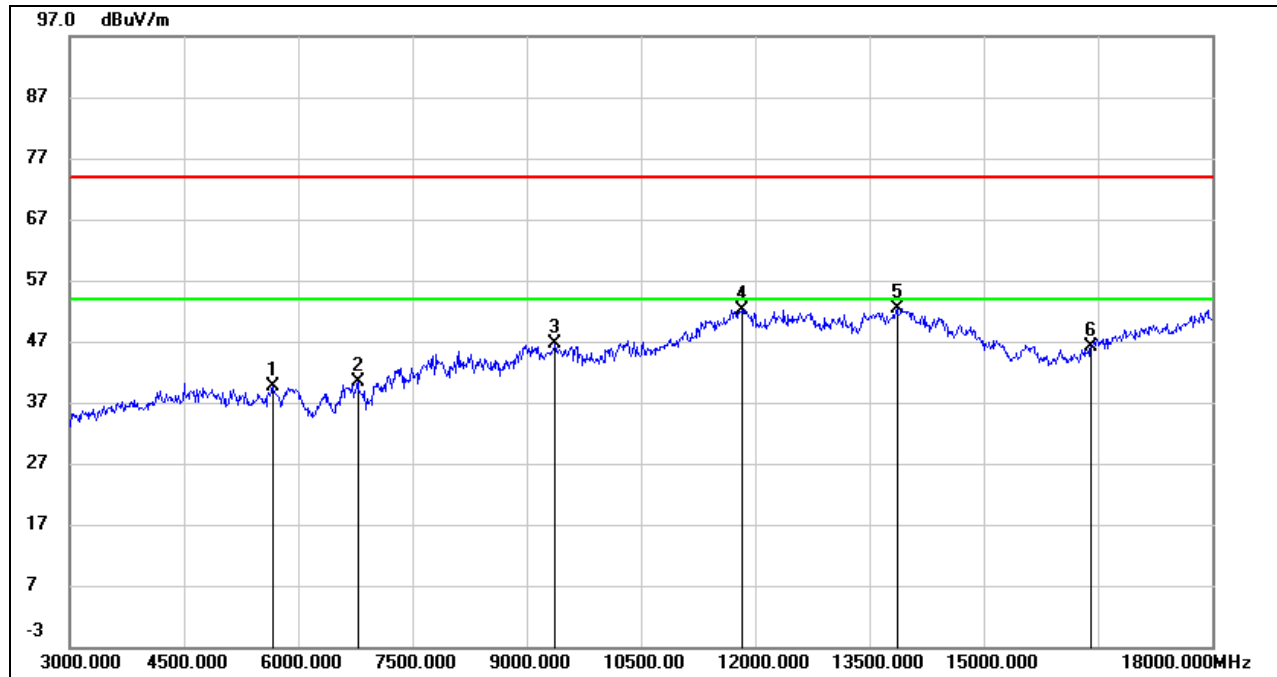

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5670.000	38.87	0.68	39.55	74.00	-34.45	peak
2	6780.000	36.57	3.75	40.32	74.00	-33.68	peak
3	9375.000	37.14	9.53	46.67	74.00	-27.33	peak
4	11820.000	34.98	17.21	52.19	74.00	-21.81	peak
5	13860.000	31.92	20.55	52.47	74.00	-21.53	peak
6	16410.000	29.25	16.97	46.22	74.00	-27.78	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

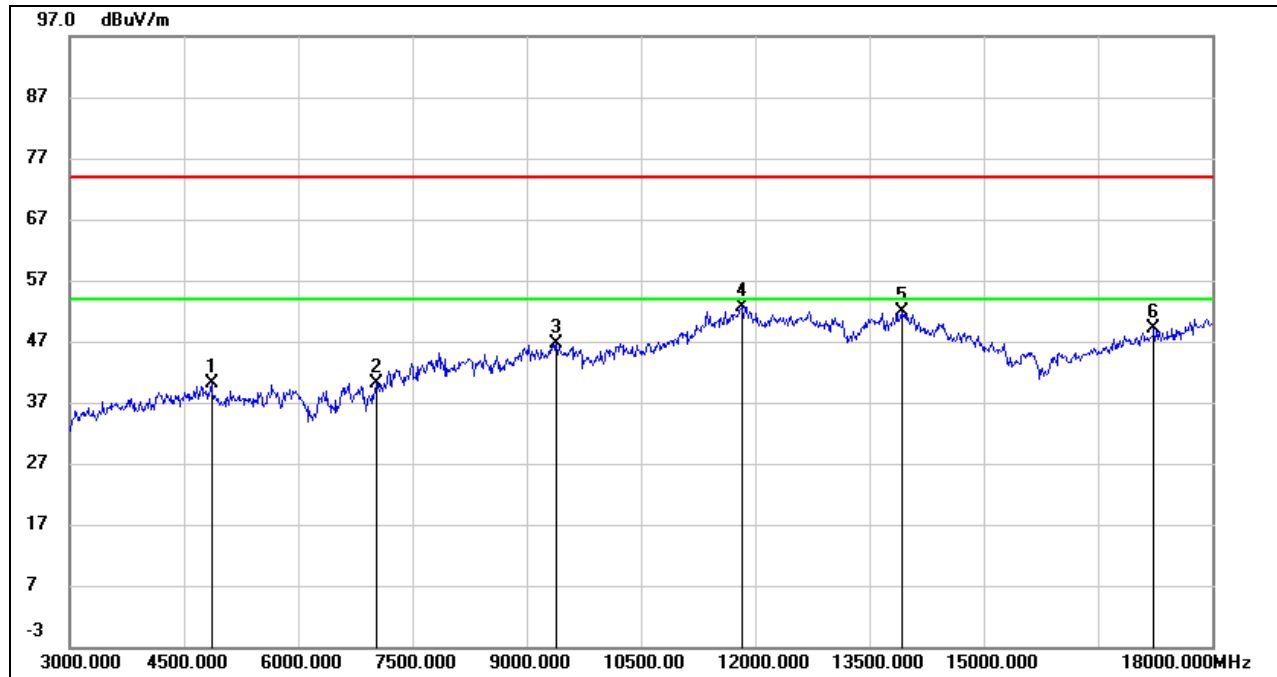

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	41.32	-1.14	40.18	74.00	-33.82	peak
2	7035.000	35.62	4.46	40.08	74.00	-33.92	peak
3	9390.000	36.99	9.61	46.60	74.00	-27.40	peak
4	11820.000	35.44	17.21	52.65	74.00	-21.35	peak
5	13920.000	31.21	20.58	51.79	74.00	-22.21	peak
6	17235.000	28.88	20.17	49.05	74.00	-24.95	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

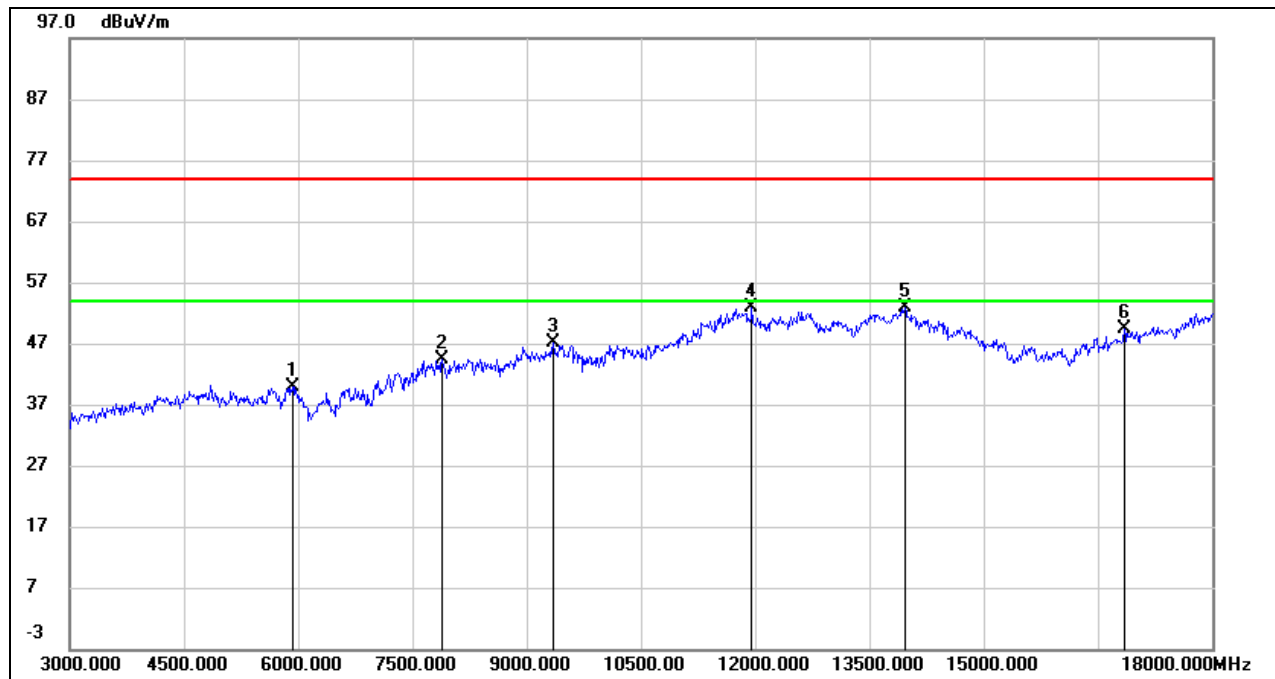

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5925.000	38.70	1.11	39.81	74.00	-34.19	peak
2	7890.000	38.73	5.75	44.48	74.00	-29.52	peak
3	9345.000	37.87	9.34	47.21	74.00	-26.79	peak
4	11955.000	35.78	17.12	52.90	74.00	-21.10	peak
5	13965.000	32.15	20.61	52.76	74.00	-21.24	peak
6	16845.000	31.06	18.42	49.48	74.00	-24.52	peak


Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: Both the two antennas had been tested, but only the worst data was recorded in the report.

8.3.2. 802.11g SISO MODE


ANTENNA 0 TEST RESULTS (WORST CASE)

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

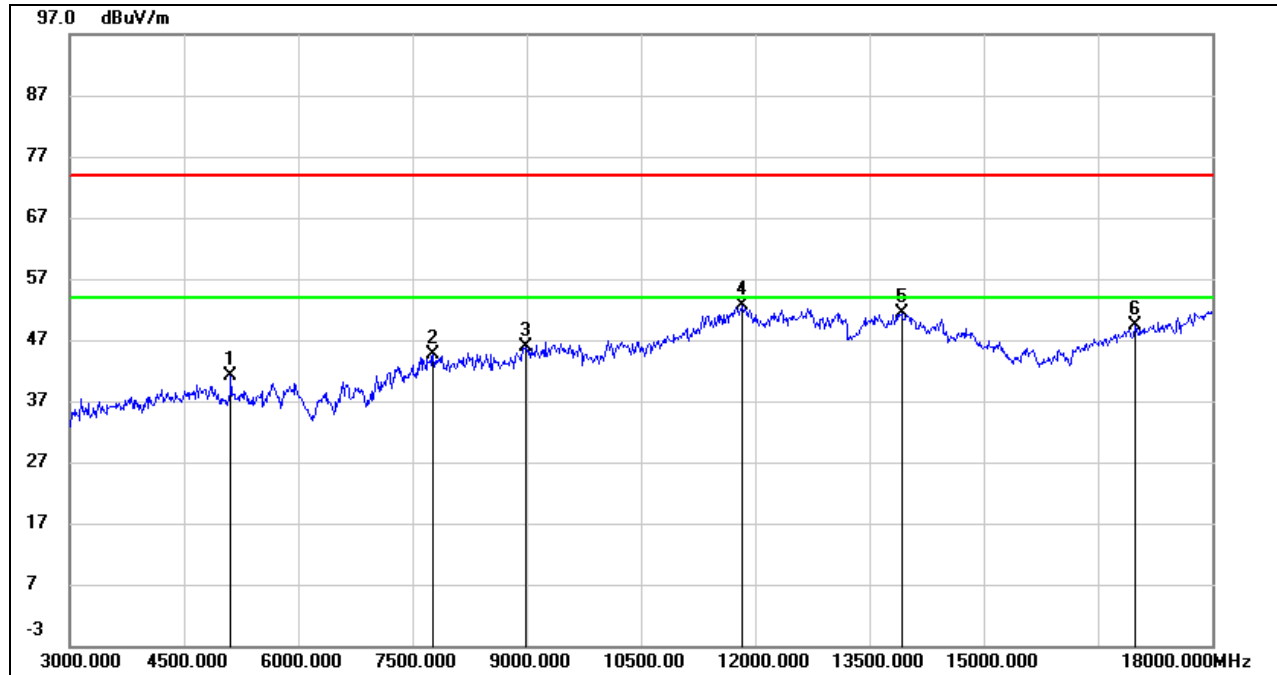

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5115.000	41.57	-0.36	41.21	74.00	-32.79	peak
2	7770.000	38.56	5.98	44.54	74.00	-29.46	peak
3	8985.000	36.56	9.34	45.90	74.00	-28.10	peak
4	11835.000	35.35	17.20	52.55	74.00	-21.45	peak
5	13920.000	30.72	20.58	51.30	74.00	-22.70	peak
6	16980.000	30.45	18.89	49.34	74.00	-24.66	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

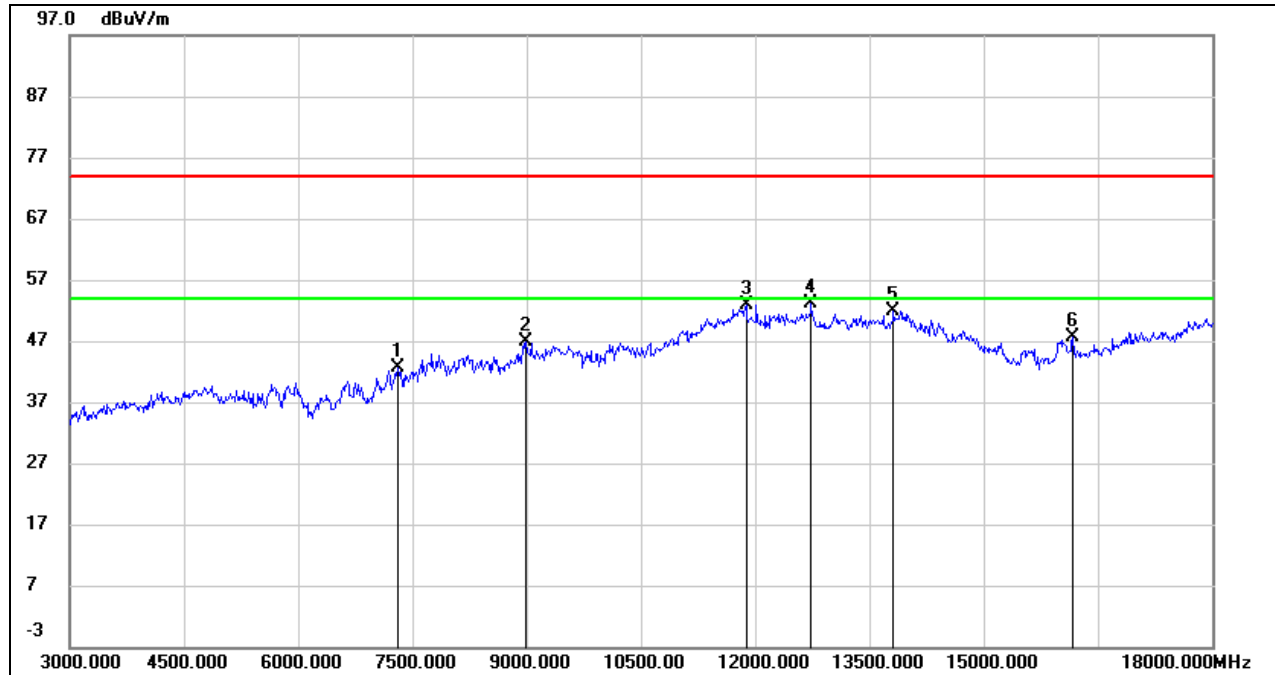**HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7305.000	37.04	5.48	42.52	74.00	-31.48	peak
2	8985.000	37.57	9.34	46.91	74.00	-27.09	peak
3	11880.000	35.82	17.17	52.99	74.00	-21.01	peak
4	12735.000	35.94	17.13	53.07	74.00	-20.93	peak
5	13815.000	31.46	20.50	51.96	74.00	-22.04	peak
6	16170.000	31.76	15.94	47.70	74.00	-26.30	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

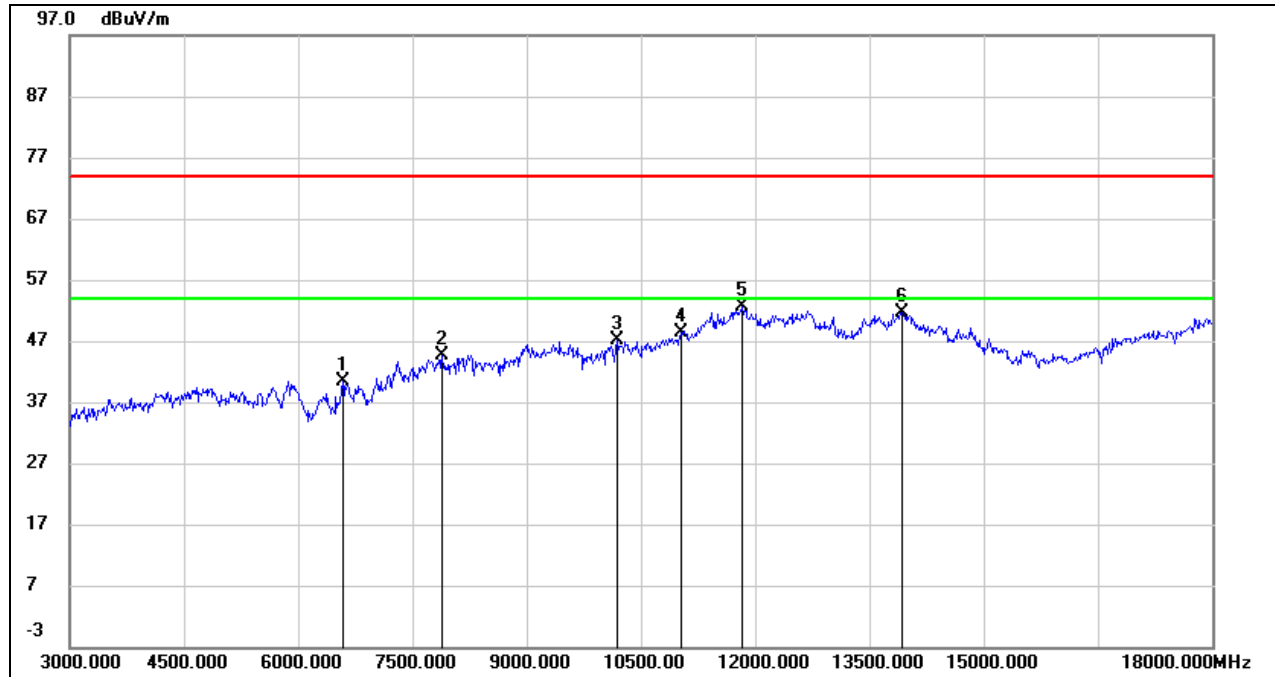**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	6585.000	36.83	3.59	40.42	74.00	-33.58	peak
2	7890.000	38.81	5.75	44.56	74.00	-29.44	peak
3	10185.000	36.16	10.90	47.06	74.00	-26.94	peak
4	11025.000	35.14	13.29	48.43	74.00	-25.57	peak
5	11835.000	35.38	17.20	52.58	74.00	-21.42	peak
6	13920.000	31.08	20.58	51.66	74.00	-22.34	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

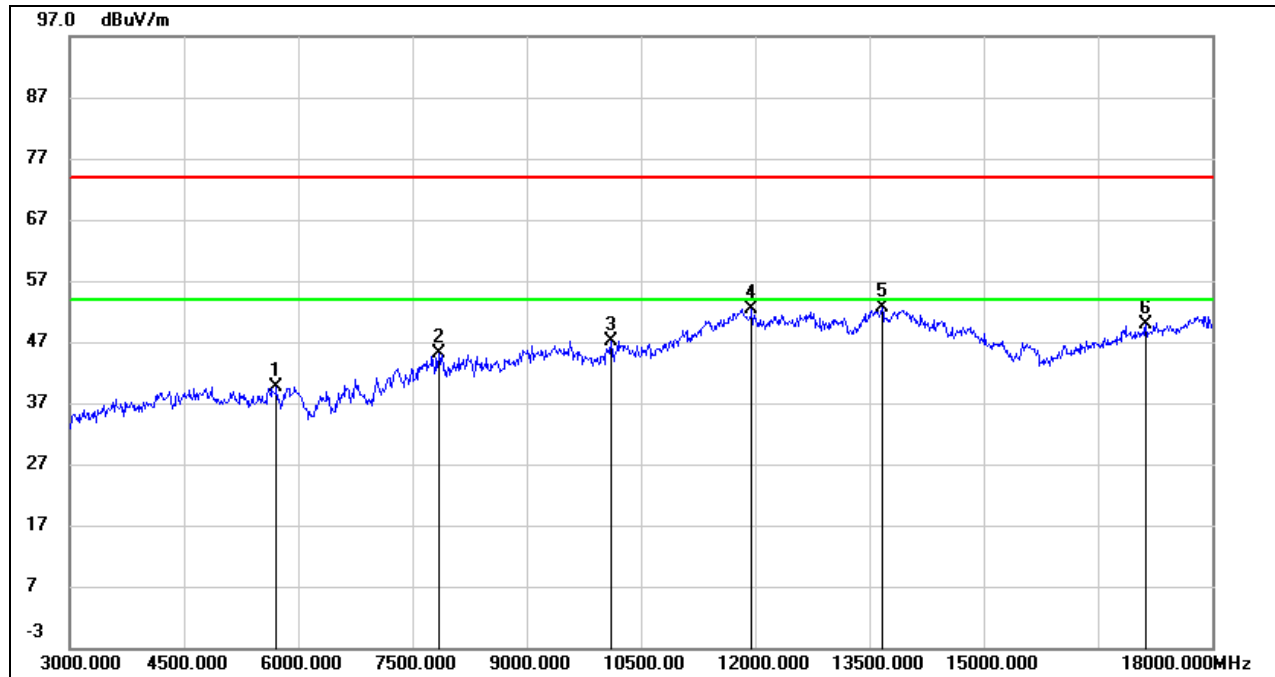

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5715.000	39.03	0.68	39.71	74.00	-34.29	peak
2	7845.000	39.21	5.92	45.13	74.00	-28.87	peak
3	10110.000	36.32	10.77	47.09	74.00	-26.91	peak
4	11955.000	35.35	17.12	52.47	74.00	-21.53	peak
5	13665.000	32.60	19.97	52.57	74.00	-21.43	peak
6	17130.000	30.09	19.73	49.82	74.00	-24.18	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

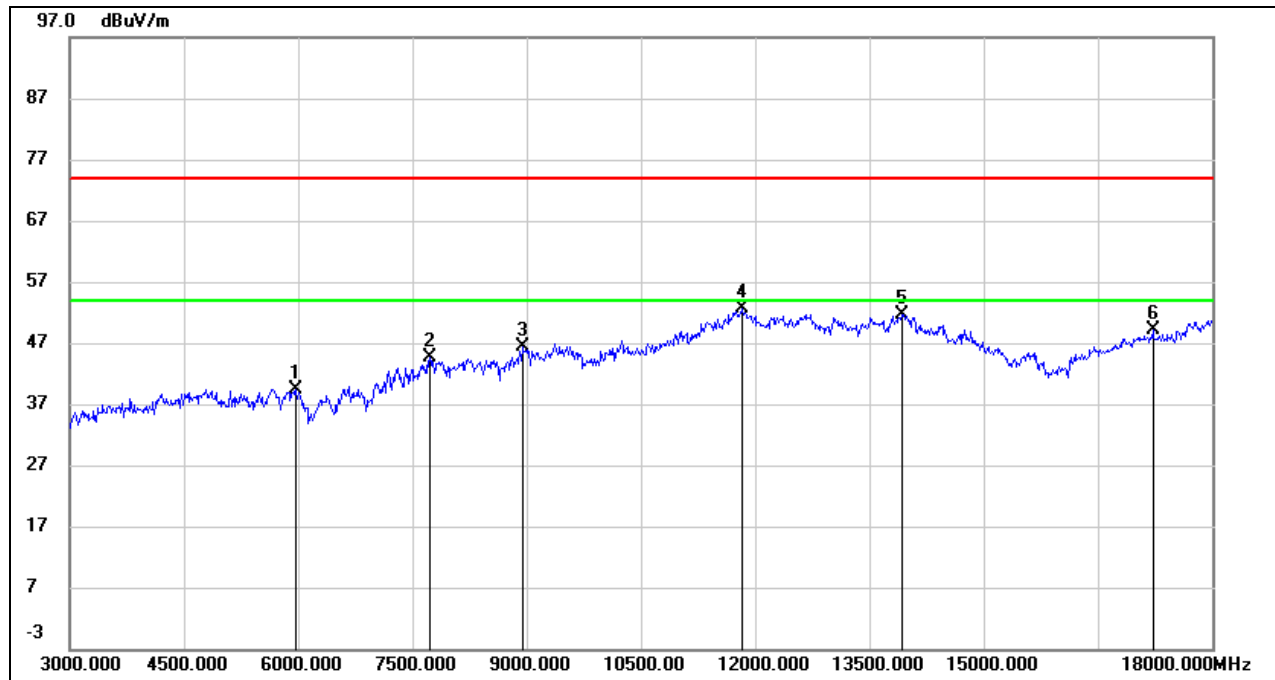

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5970.000	38.00	1.27	39.27	74.00	-34.73	peak
2	7725.000	38.78	5.84	44.62	74.00	-29.38	peak
3	8940.000	37.69	8.80	46.49	74.00	-27.51	peak
4	11835.000	35.34	17.20	52.54	74.00	-21.46	peak
5	13935.000	31.14	20.59	51.73	74.00	-22.27	peak
6	17220.000	29.01	20.16	49.17	74.00	-24.83	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

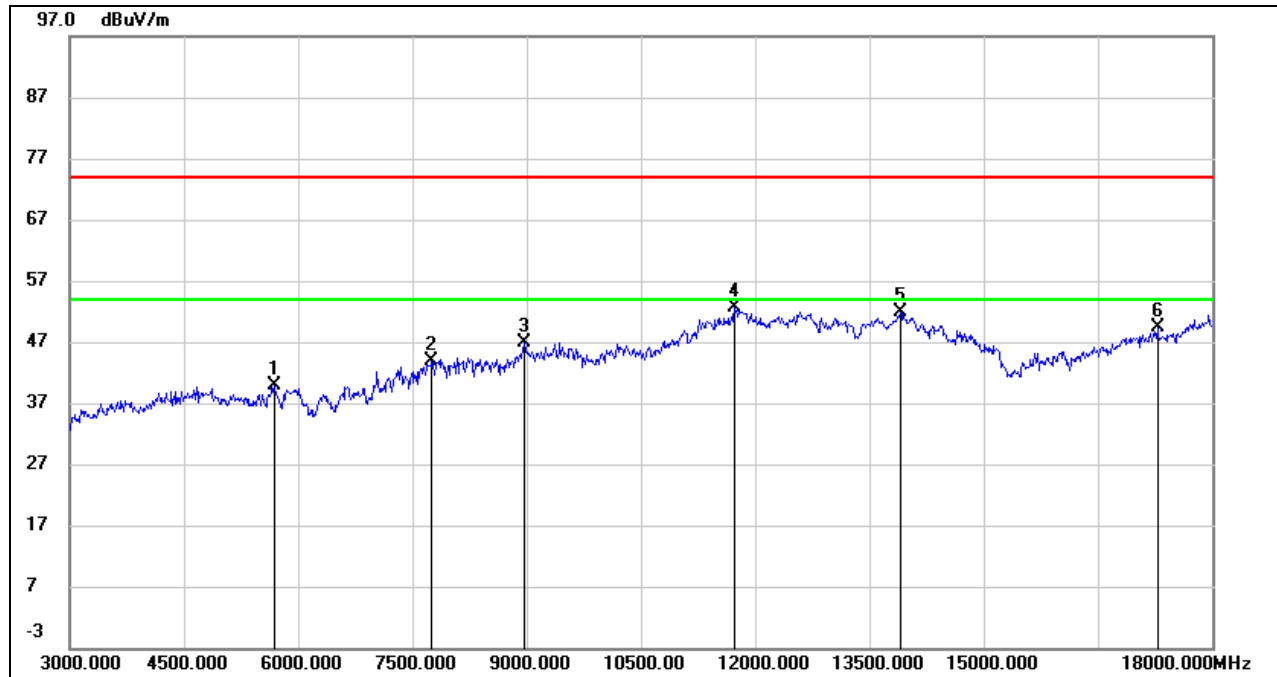

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5685.000	39.08	0.68	39.76	74.00	-34.24	peak
2	7755.000	38.05	5.93	43.98	74.00	-30.02	peak
3	8970.000	37.61	9.17	46.78	74.00	-27.22	peak
4	11730.000	35.93	16.77	52.70	74.00	-21.30	peak
5	13905.000	31.24	20.57	51.81	74.00	-22.19	peak
6	17280.000	29.15	20.17	49.32	74.00	-24.68	peak


- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

Note: Both the two antennas had been tested, but only the worst data was recorded in the report.



8.3.3. 802.11n HT20 MIMO MODE


HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

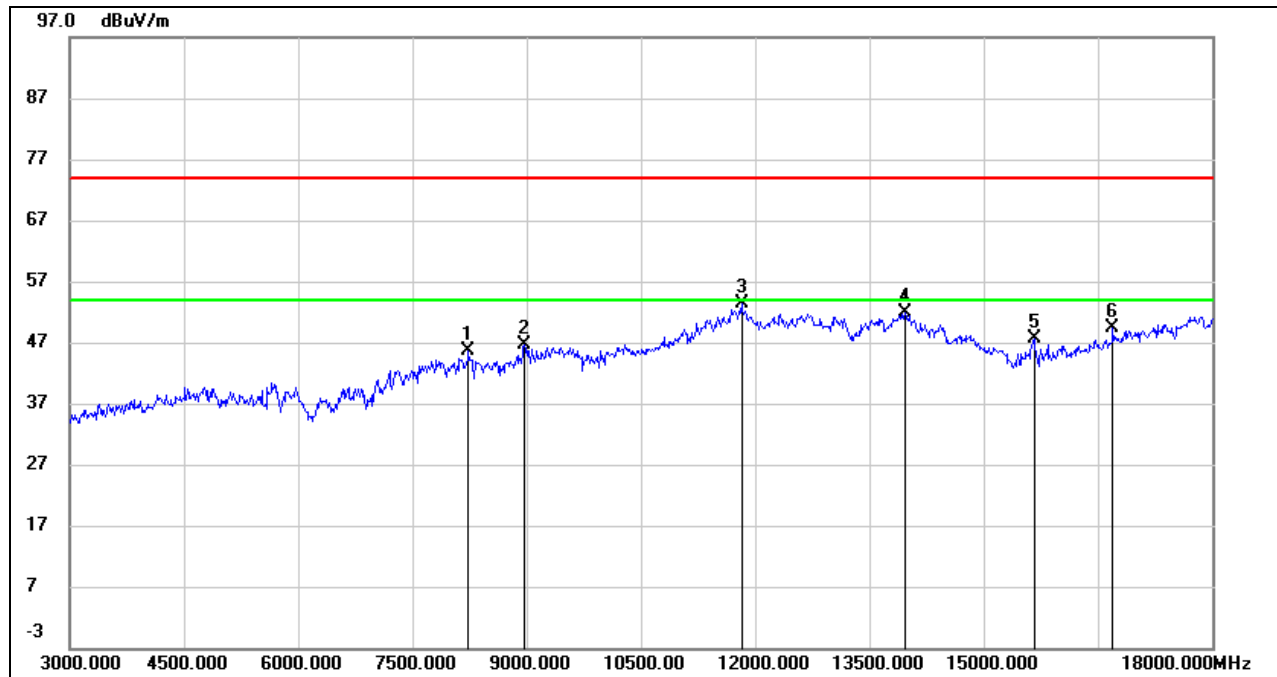

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8235.000	38.61	7.13	45.74	74.00	-28.26	peak
2	8970.000	37.51	9.17	46.68	74.00	-27.32	peak
3	11820.000	36.06	17.21	53.27	74.00	-20.73	peak
4	13965.000	31.23	20.61	51.84	74.00	-22.16	peak
5	15660.000	32.22	15.37	47.59	74.00	-26.41	peak
6	16695.000	31.37	18.06	49.43	74.00	-24.57	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

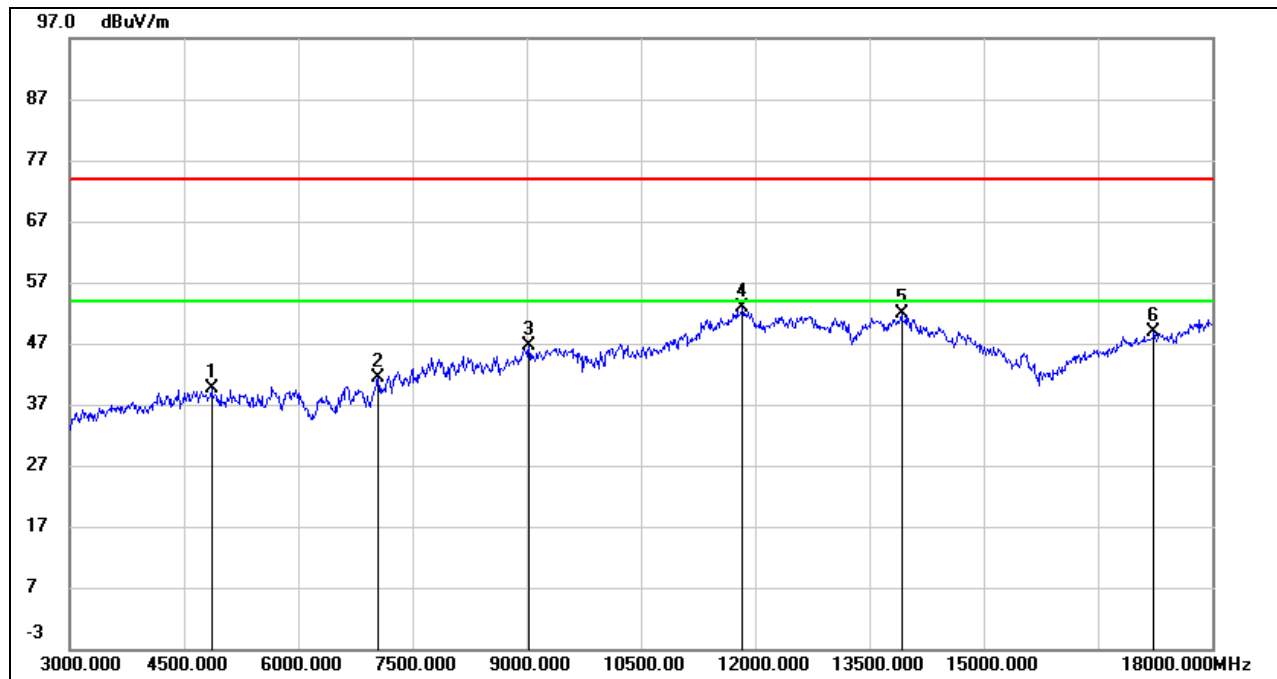

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	40.72	-1.14	39.58	74.00	-34.42	peak
2	7050.000	36.95	4.52	41.47	74.00	-32.53	peak
3	9030.000	37.23	9.37	46.60	74.00	-27.40	peak
4	11835.000	35.57	17.20	52.77	74.00	-21.23	peak
5	13920.000	31.24	20.58	51.82	74.00	-22.18	peak
6	17235.000	28.59	20.17	48.76	74.00	-25.24	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.

5. For the transmitting duration, please refer to clause 7.1.

6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

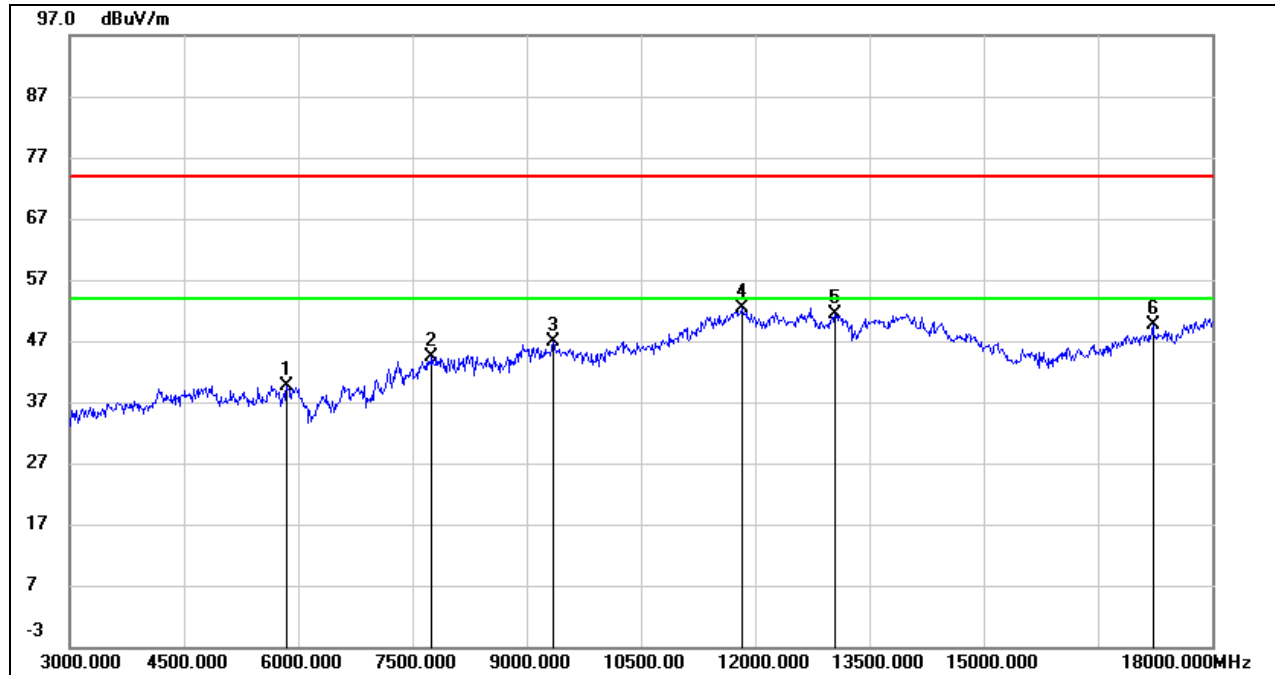**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5850.000	38.81	0.83	39.64	74.00	-34.36	peak
2	7755.000	38.46	5.93	44.39	74.00	-29.61	peak
3	9345.000	37.58	9.34	46.92	74.00	-27.08	peak
4	11835.000	35.28	17.20	52.48	74.00	-21.52	peak
5	13050.000	33.97	17.34	51.31	74.00	-22.69	peak
6	17220.000	29.48	20.16	49.64	74.00	-24.36	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

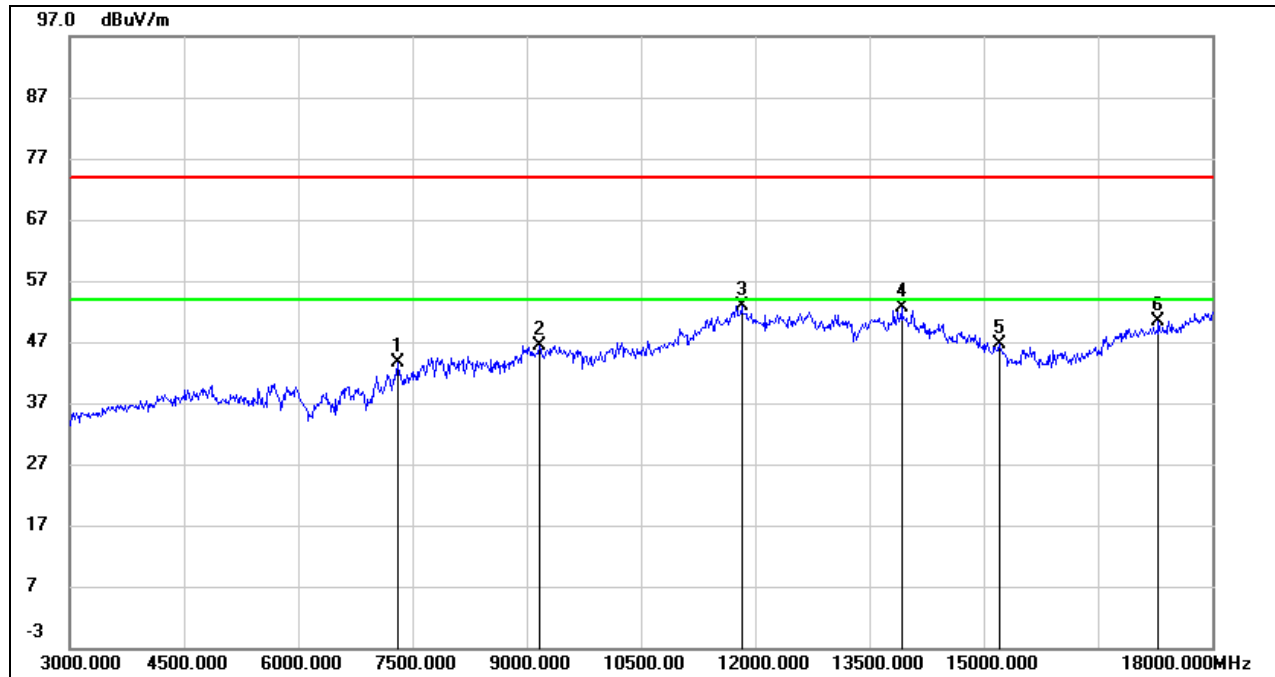

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7305.000	38.23	5.48	43.71	74.00	-30.29	peak
2	9165.000	37.76	8.62	46.38	74.00	-27.62	peak
3	11820.000	35.70	17.21	52.91	74.00	-21.09	peak
4	13920.000	31.96	20.58	52.54	74.00	-21.46	peak
5	15210.000	30.98	15.53	46.51	74.00	-27.49	peak
6	17295.000	30.14	20.18	50.32	74.00	-23.68	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.


HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

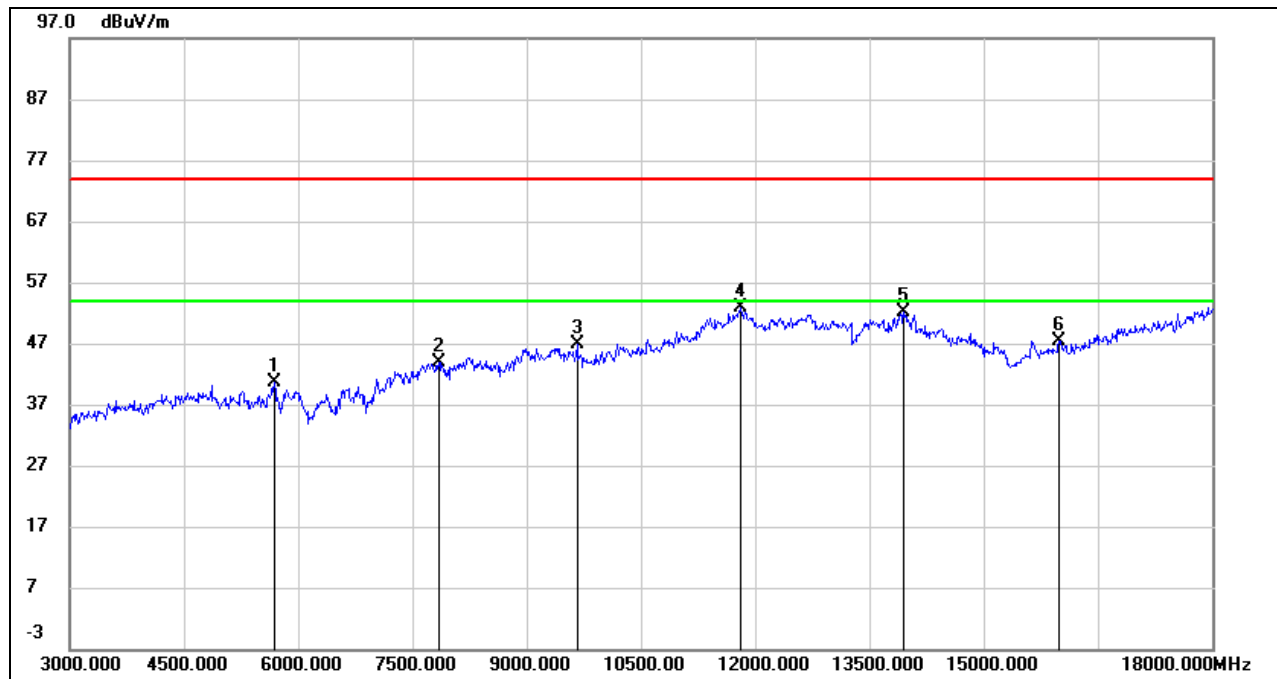

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5685.000	39.89	0.68	40.57	74.00	-33.43	peak
2	7845.000	37.95	5.92	43.87	74.00	-30.13	peak
3	9660.000	36.73	10.08	46.81	74.00	-27.19	peak
4	11805.000	35.58	17.21	52.79	74.00	-21.21	peak
5	13950.000	31.45	20.61	52.06	74.00	-21.94	peak
6	15990.000	32.03	15.37	47.40	74.00	-26.60	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

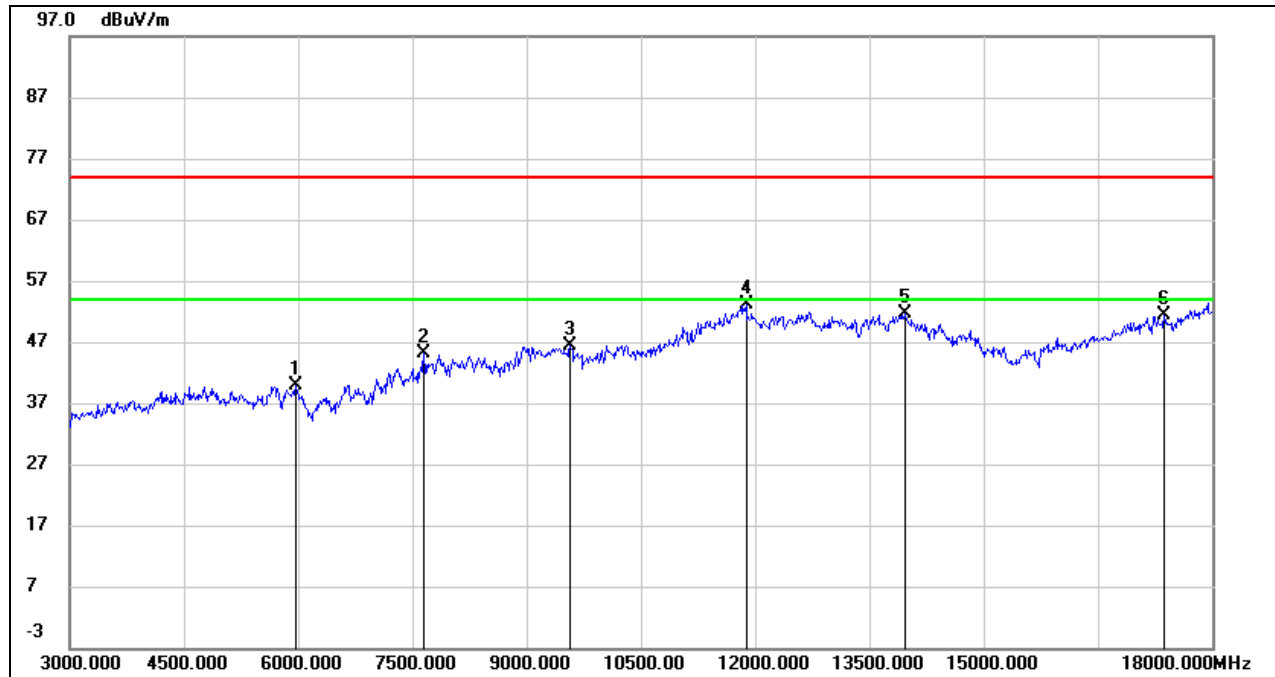


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5970.000	38.49	1.27	39.76	74.00	-34.24	peak
2	7650.000	39.54	5.60	45.14	74.00	-28.86	peak
3	9570.000	36.24	10.07	46.31	74.00	-27.69	peak
4	11880.000	35.85	17.17	53.02	74.00	-20.98	peak
5	13965.000	31.09	20.61	51.70	74.00	-22.30	peak
6	17370.000	31.09	20.20	51.29	74.00	-22.71	peak

- Note: 1. Peak Result = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/Ton$, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.1.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.

8.3.4. 802.11n HT40 MIMO MODE

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, HORIZONTAL)

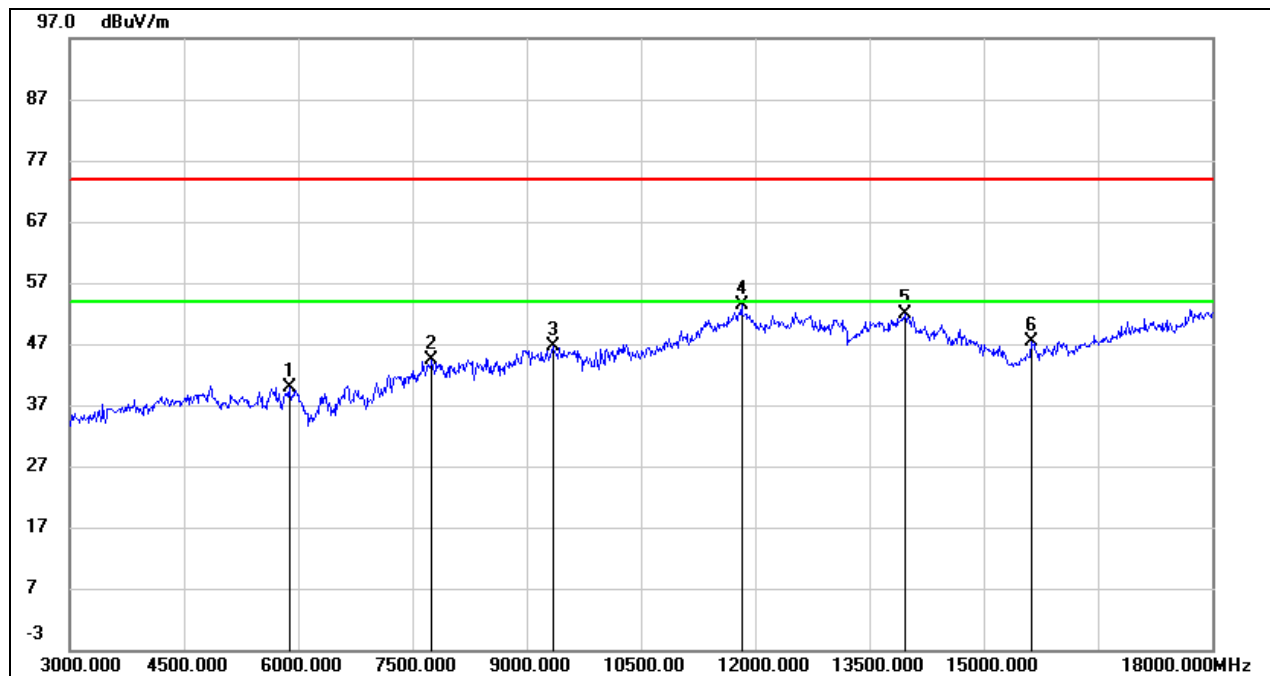

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5880.000	38.82	0.95	39.77	74.00	-34.23	peak
2	7755.000	38.48	5.93	44.41	74.00	-29.59	peak
3	9345.000	37.17	9.34	46.51	74.00	-27.49	peak
4	11820.000	36.05	17.21	53.26	74.00	-20.74	peak
5	13965.000	31.22	20.61	51.83	74.00	-22.17	peak
6	15630.000	32.10	15.40	47.50	74.00	-26.50	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (LOW CHANNEL, VERTICAL)

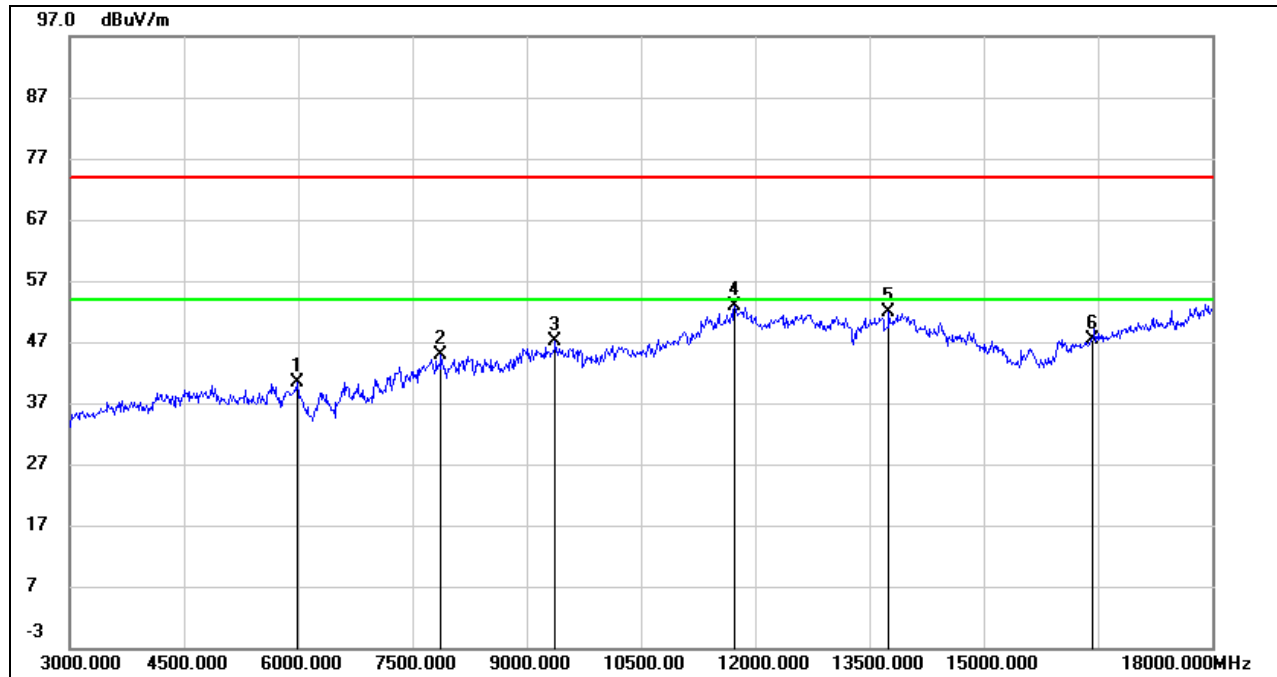

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5985.000	39.11	1.32	40.43	74.00	-33.57	peak
2	7875.000	39.05	5.80	44.85	74.00	-29.15	peak
3	9375.000	37.60	9.53	47.13	74.00	-26.87	peak
4	11730.000	36.09	16.77	52.86	74.00	-21.14	peak
5	13755.000	31.62	20.33	51.95	74.00	-22.05	peak
6	16425.000	30.47	17.03	47.50	74.00	-26.50	peak


Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

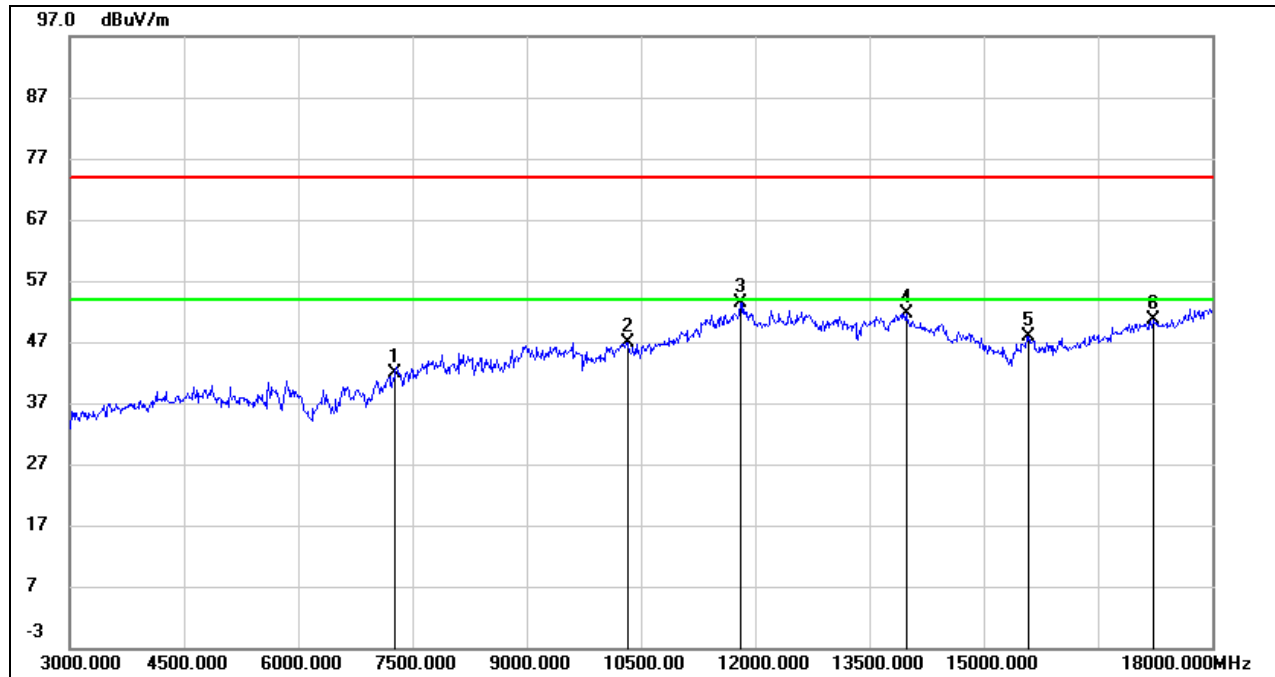**HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, HORIZONTAL)**

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	7275.000	36.52	5.36	41.88	74.00	-32.12	peak
2	10320.000	35.74	11.24	46.98	74.00	-27.02	peak
3	11805.000	36.15	17.21	53.36	74.00	-20.64	peak
4	13980.000	30.97	20.63	51.60	74.00	-22.40	peak
5	15585.000	32.47	15.40	47.87	74.00	-26.13	peak
6	17220.000	30.49	20.16	50.65	74.00	-23.35	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (MID CHANNEL, VERTICAL)

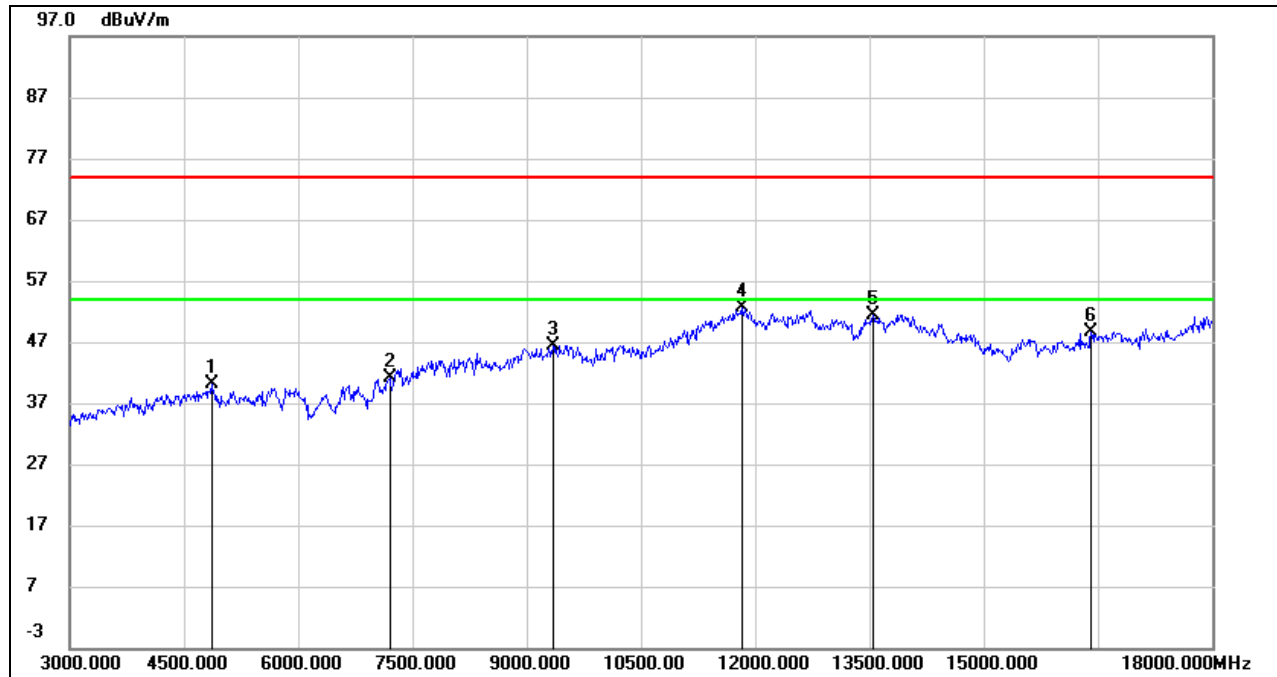

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4860.000	41.22	-1.14	40.08	74.00	-33.92	peak
2	7200.000	36.02	5.10	41.12	74.00	-32.88	peak
3	9345.000	37.07	9.34	46.41	74.00	-27.59	peak
4	11820.000	35.50	17.21	52.71	74.00	-21.29	peak
5	13545.000	31.83	19.64	51.47	74.00	-22.53	peak
6	16410.000	31.58	16.97	48.55	74.00	-25.45	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, HORIZONTAL)

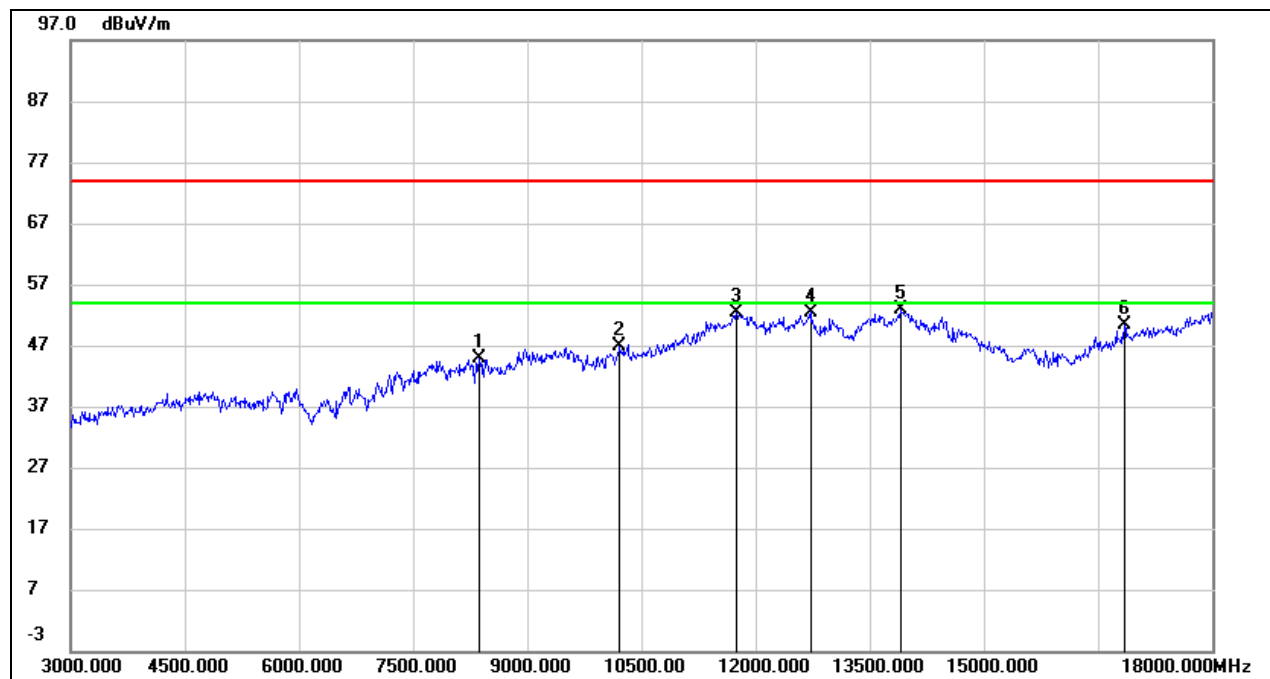

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	8370.000	38.09	6.73	44.82	74.00	-29.18	peak
2	10215.000	35.86	10.95	46.81	74.00	-27.19	peak
3	11745.000	35.54	16.88	52.42	74.00	-21.58	peak
4	12720.000	35.41	17.09	52.50	74.00	-21.50	peak
5	13905.000	32.19	20.57	52.76	74.00	-21.24	peak
6	16845.000	31.86	18.42	50.28	74.00	-23.72	peak

Note: 1. Peak Result = Reading Level + Correct Factor.


2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

HARMONICS AND SPURIOUS EMISSIONS (HIGH CHANNEL, VERTICAL)

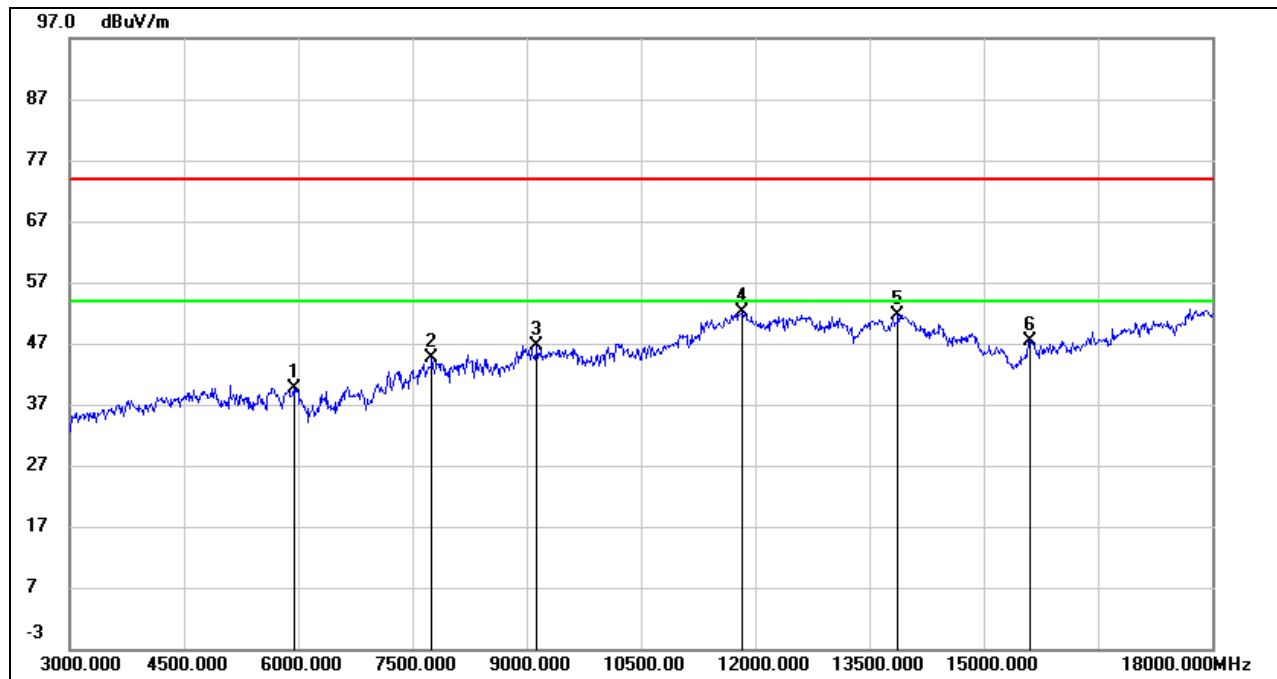

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	5940.000	38.55	1.15	39.70	74.00	-34.30	peak
2	7755.000	38.74	5.93	44.67	74.00	-29.33	peak
3	9135.000	37.74	8.79	46.53	74.00	-27.47	peak
4	11835.000	34.99	17.20	52.19	74.00	-21.81	peak
5	13875.000	31.07	20.55	51.62	74.00	-22.38	peak
6	15615.000	32.07	15.41	47.48	74.00	-26.52	peak

Note: 1. Peak Result = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.


4. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.

5. Proper operation of the transmitter prior to adding the filter to the measurement chain.

8.4. SPURIOUS EMISSIONS (18 GHz ~ 26 GHz)

8.4.1. 802.11n HT20 MODE

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

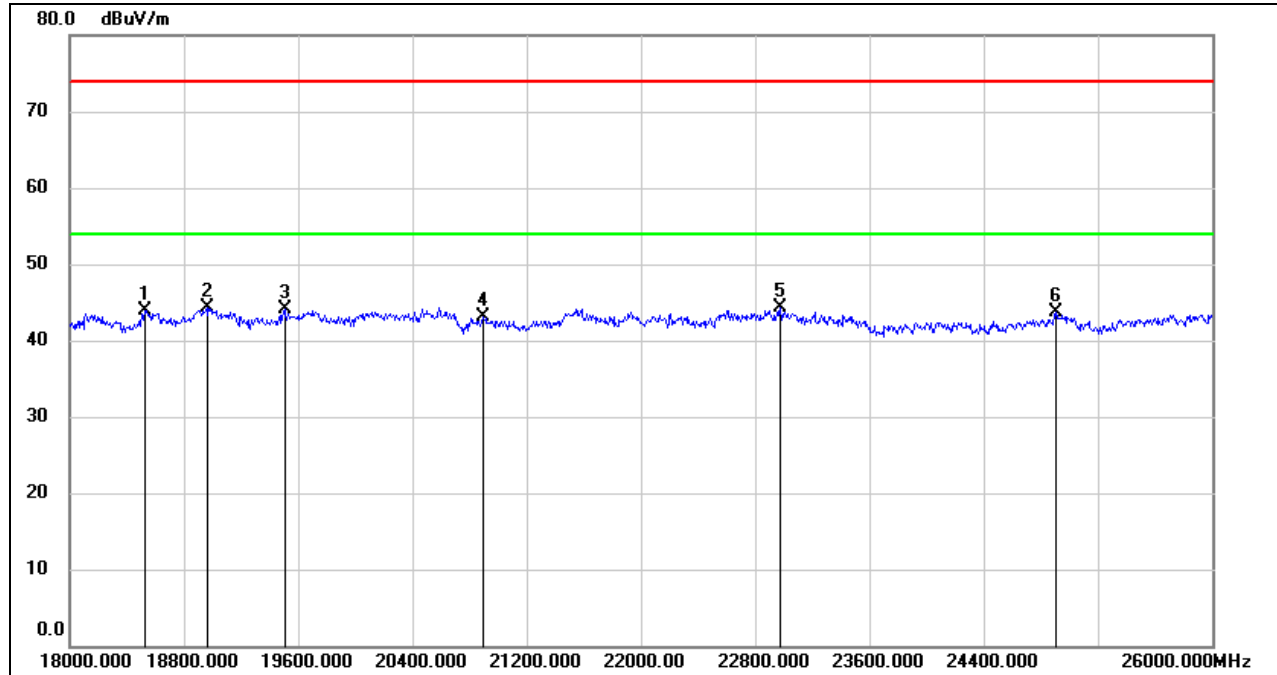


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18528.000	49.11	-5.26	43.85	74.00	-30.15	peak
2	18960.000	49.51	-5.25	44.26	74.00	-29.74	peak
3	19504.000	49.63	-5.54	44.09	74.00	-29.91	peak
4	20896.000	48.02	-4.98	43.04	74.00	-30.96	peak
5	22976.000	47.76	-3.46	44.30	74.00	-29.70	peak
6	24904.000	45.80	-2.19	43.61	74.00	-30.39	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Peak: Peak detector.

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

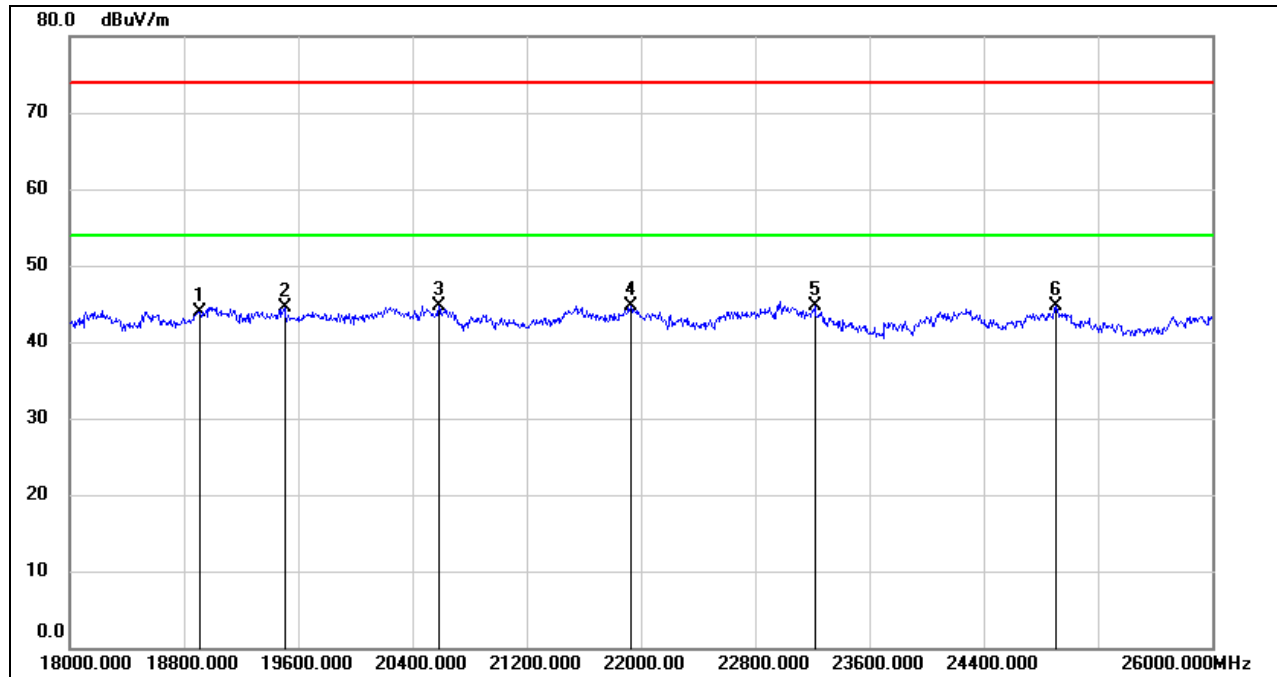

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18912.000	49.24	-5.30	43.94	74.00	-30.06	peak
2	19504.000	50.13	-5.54	44.59	74.00	-29.41	peak
3	20584.000	50.00	-5.27	44.73	74.00	-29.27	peak
4	21928.000	49.05	-4.43	44.62	74.00	-29.38	peak
5	23216.000	48.01	-3.38	44.63	74.00	-29.37	peak
6	24904.000	46.80	-2.19	44.61	74.00	-29.39	peak

Note: 1. Measurement = Reading Level + Correct Factor.

2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.


3. Peak: Peak detector.

Note: All the modes, channels and antennas had been tested, but only the worst data was recorded in the report.

8.5. SPURIOUS EMISSIONS (30 MHz ~ 1 GHz)

8.5.1. 802.11n HT20 MODE

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, HORIZONTAL)

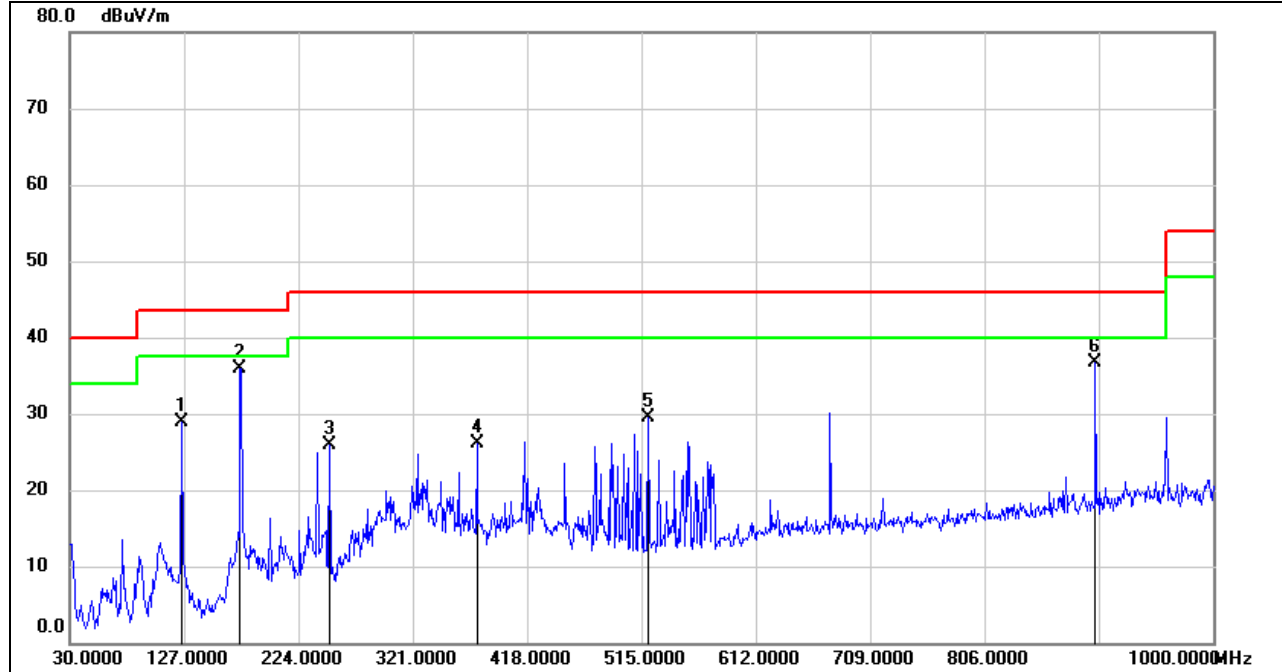


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	125.0600	48.57	-19.60	28.97	43.50	-14.53	QP
2	174.5300	53.09	-17.12	35.97	43.50	-7.53	QP
3	250.1900	44.87	-18.91	25.96	46.00	-20.04	QP
4	375.3200	39.86	-13.79	26.07	46.00	-19.93	QP
5	520.8200	40.60	-11.07	29.53	46.00	-16.47	QP
6	900.0900	41.90	-5.21	36.69	46.00	-9.31	QP

Note: 1. Result Level = Read Level + Correct Factor.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.

SPURIOUS EMISSIONS (LOW CHANNEL, WORST-CASE CONFIGURATION, VERTICAL)

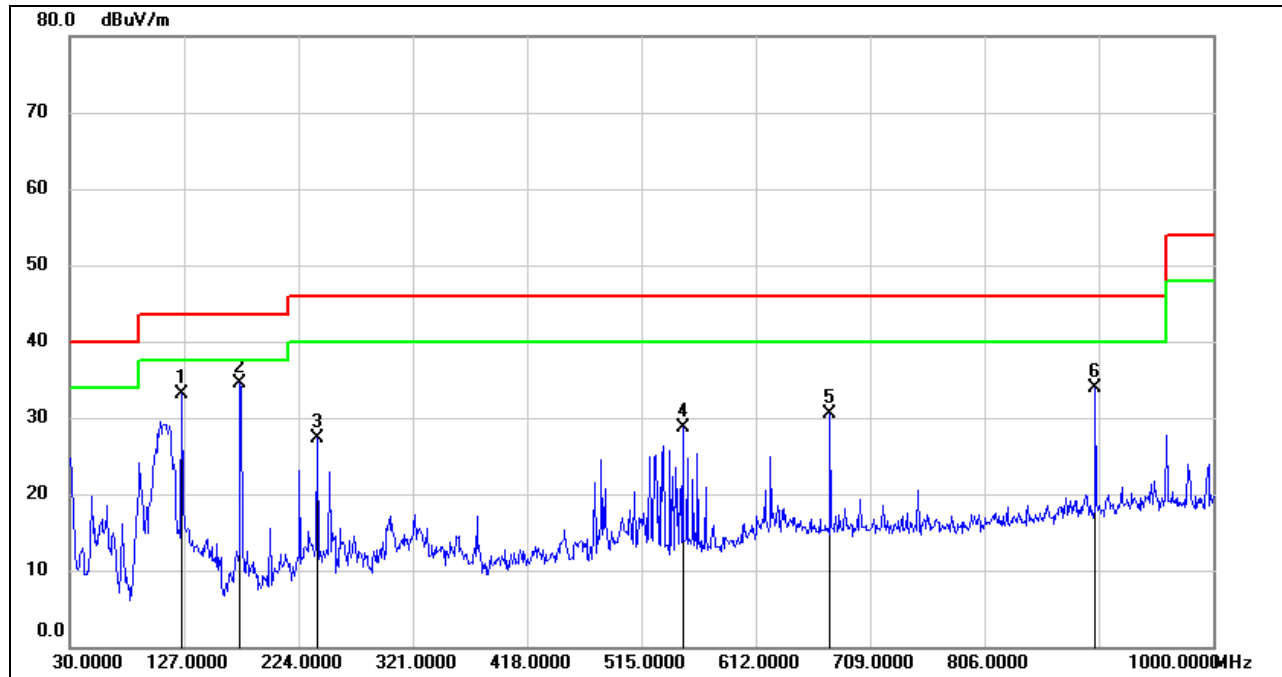

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	125.0600	52.66	-19.60	33.06	43.50	-10.44	QP
2	174.5300	51.66	-17.12	34.54	43.50	-8.96	QP
3	239.5200	46.44	-19.16	27.28	46.00	-18.72	QP
4	549.9200	39.11	-10.49	28.62	46.00	-17.38	QP
5	675.0500	39.06	-8.62	30.44	46.00	-15.56	QP
6	900.0900	39.12	-5.21	33.91	46.00	-12.09	QP

Note: 1. Result Level = Read Level + Correct Factor.

2. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.

3. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto


Note: All the modes, channels and antennas had been tested, but only the worst data was recorded in the report.

8.6. SPURIOUS EMISSIONS BELOW 30 MHz

8.6.1. 802.11n HT20 MODE

SPURIOUS EMISSIONS (LOW CHANNEL, LOOP ANTENNA FACE ON TO THE EUT, WORST-CASE CONFIGURATION)

9 kHz~ 150 kHz

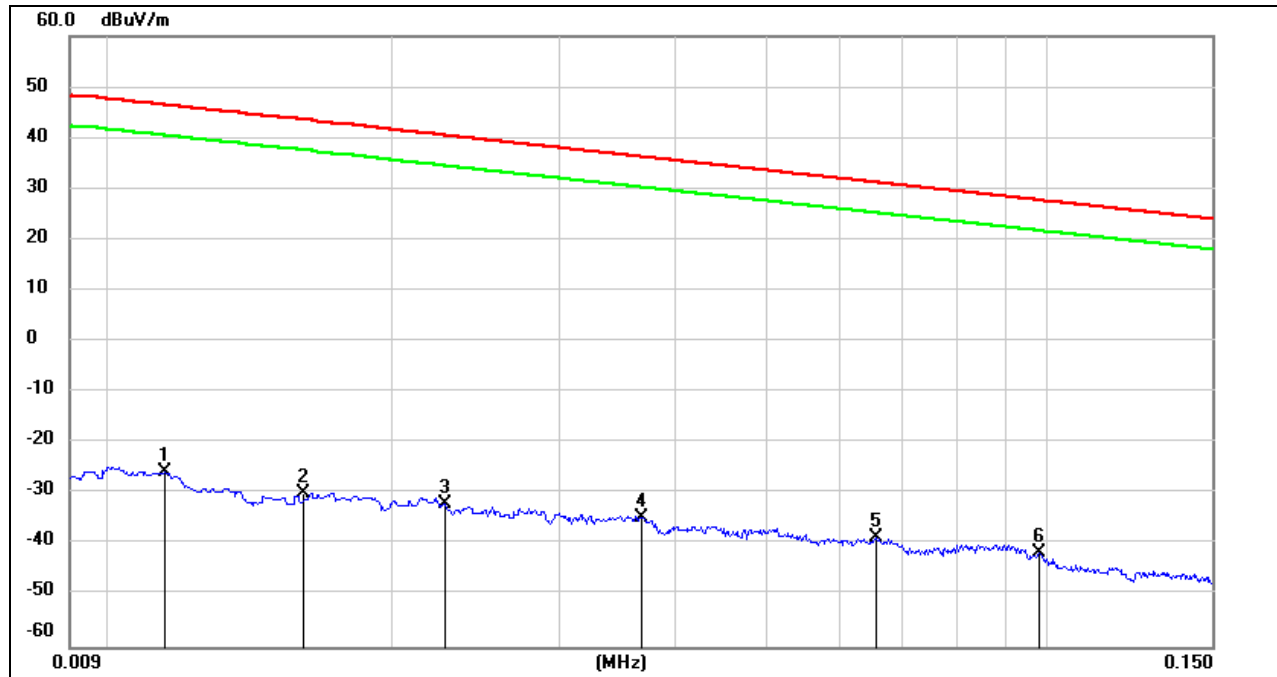


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.0114	75.88	-101.40	-25.52	46.46	-71.98	peak
2	0.0160	71.47	-101.37	-29.90	43.52	-73.42	peak
3	0.0227	69.30	-101.36	-32.06	40.48	-72.54	peak
4	0.0367	66.75	-101.42	-34.67	36.31	-70.98	peak
5	0.0656	62.86	-101.55	-38.69	31.26	-69.95	peak
6	0.0981	60.27	-101.78	-41.51	27.77	-69.28	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

150 kHz ~ 490 kHz

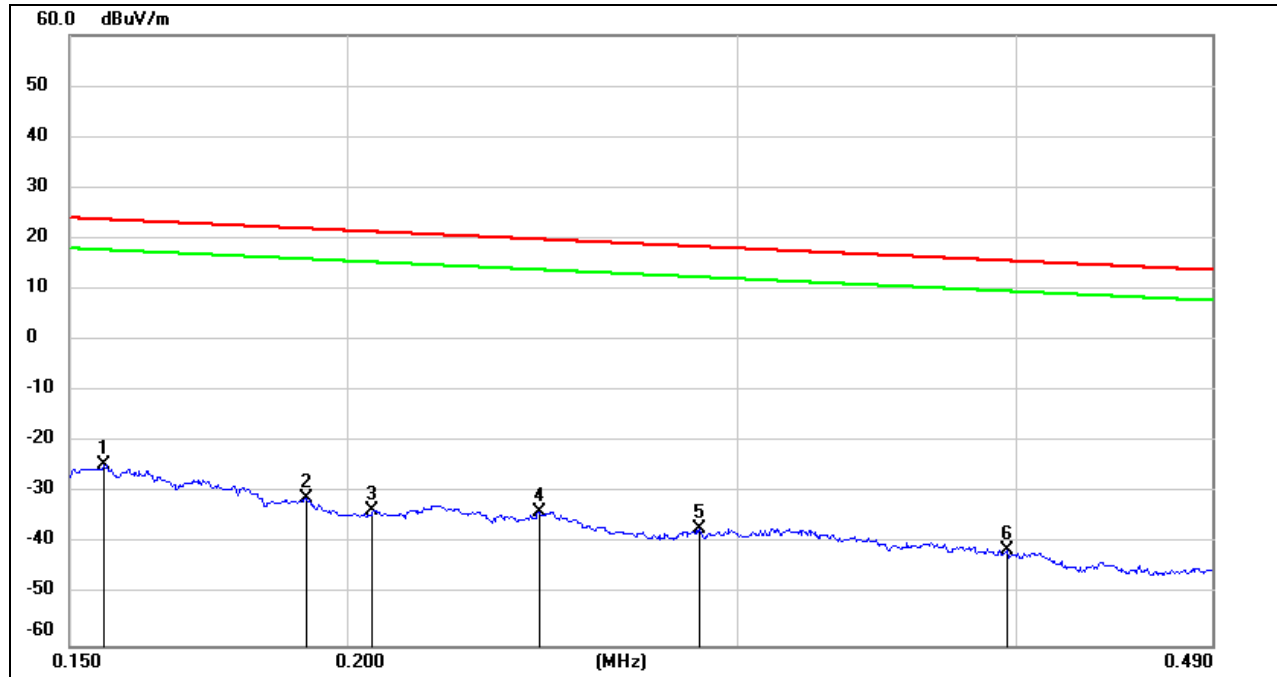


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.1554	77.27	-101.65	-24.38	23.77	-48.15	peak
2	0.1917	70.54	-101.70	-31.16	21.95	-53.11	peak
3	0.2053	68.29	-101.73	-33.44	21.35	-54.79	peak
4	0.2442	68.03	-101.79	-33.76	19.85	-53.61	peak
5	0.2878	64.72	-101.85	-37.13	18.42	-55.55	peak
6	0.3966	60.68	-101.96	-41.28	15.63	-56.91	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

490 kHz ~ 30 MHz

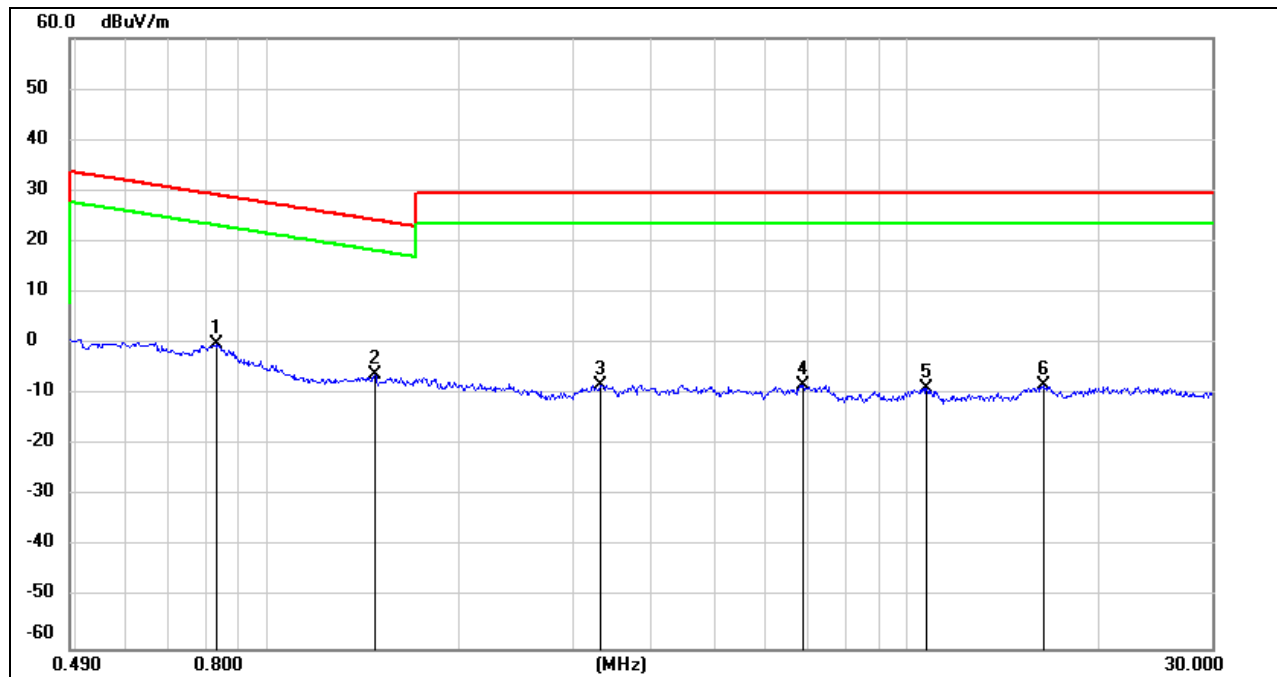

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.8296	61.94	-62.17	-0.23	29.23	-29.46	peak
2	1.4700	55.89	-62.05	-6.16	24.26	-30.42	peak
3	3.3229	53.39	-61.50	-8.11	29.54	-37.65	peak
4	6.8936	53.09	-61.22	-8.13	29.54	-37.67	peak
5	10.7299	51.98	-60.83	-8.85	29.54	-38.39	peak
6	16.3959	52.67	-60.96	-8.29	29.54	-37.83	peak

Note: 1. Measurement = Reading Level + Correct Factor (dBuA/m= dBuV/m- 20Log10[120π] = dBuV/m- 51.5).

2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.

3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Note: All the modes, channels and antennas had been tested, but only the worst data was recorded in the report.

9. AC POWER LINE CONDUCTED EMISSIONS


LIMITS

Please refer to CFR 47 FCC §15.207 (a).

FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST SETUP AND PROCEDURE

Refer to ANSI C63.10-2013 clause 6.2.

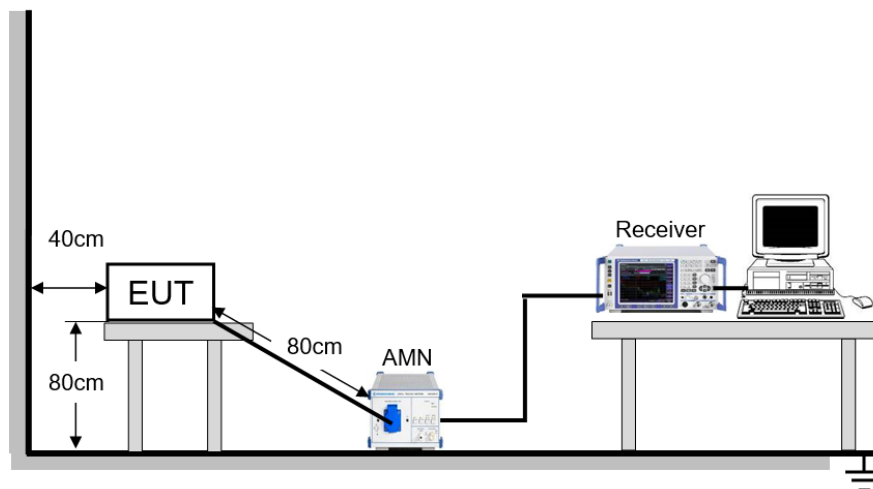

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.


TEST ENVIRONMENT

Temperature	20.5 °C	Relative Humidity	51.7 %
Atmosphere Pressure	101 kPa	Test Voltage	AC 120 V/60 Hz

RESULTS

9.1.1. 802.11n HT20 MODE

LINE L RESULTS (LOW CHANNEL, WORST-CASE CONFIGURATION)

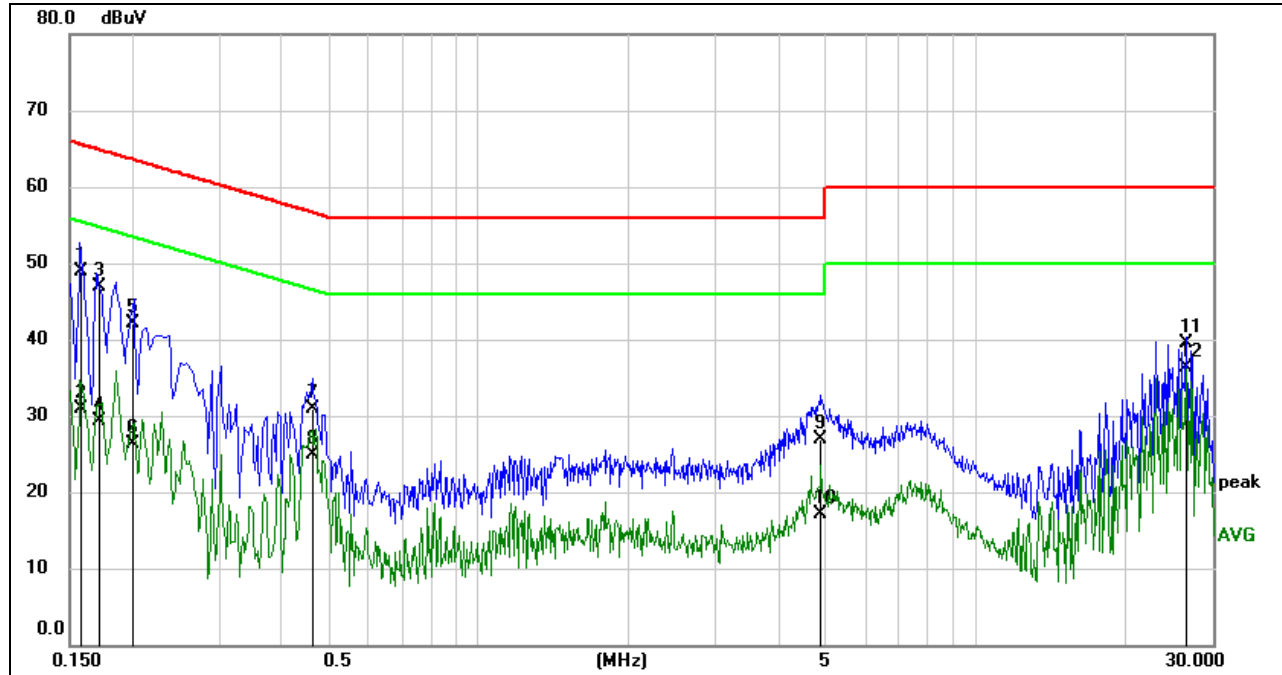

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1582	39.29	9.59	48.88	65.56	-16.68	QP
2	0.1582	21.28	9.59	30.87	55.56	-24.69	AVG
3	0.1727	37.28	9.59	46.87	64.83	-17.96	QP
4	0.1727	19.66	9.59	29.25	54.83	-25.58	AVG
5	0.1998	32.56	9.59	42.15	63.62	-21.47	QP
6	0.1998	16.72	9.59	26.31	53.62	-27.31	AVG
7	0.4614	21.66	9.34	31.00	56.67	-25.67	QP
8	0.4614	15.51	9.34	24.85	46.67	-21.82	AVG
9	4.8765	17.31	9.61	26.92	56.00	-29.08	QP
10	4.8765	7.45	9.61	17.06	46.00	-28.94	AVG
11	26.6091	29.87	9.70	39.57	60.00	-20.43	QP
12	26.6091	26.59	9.70	36.29	50.00	-13.71	AVG


Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).

4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

LINE N RESULTS (LOW CHANNEL, WORST-CASE CONFIGURATION)

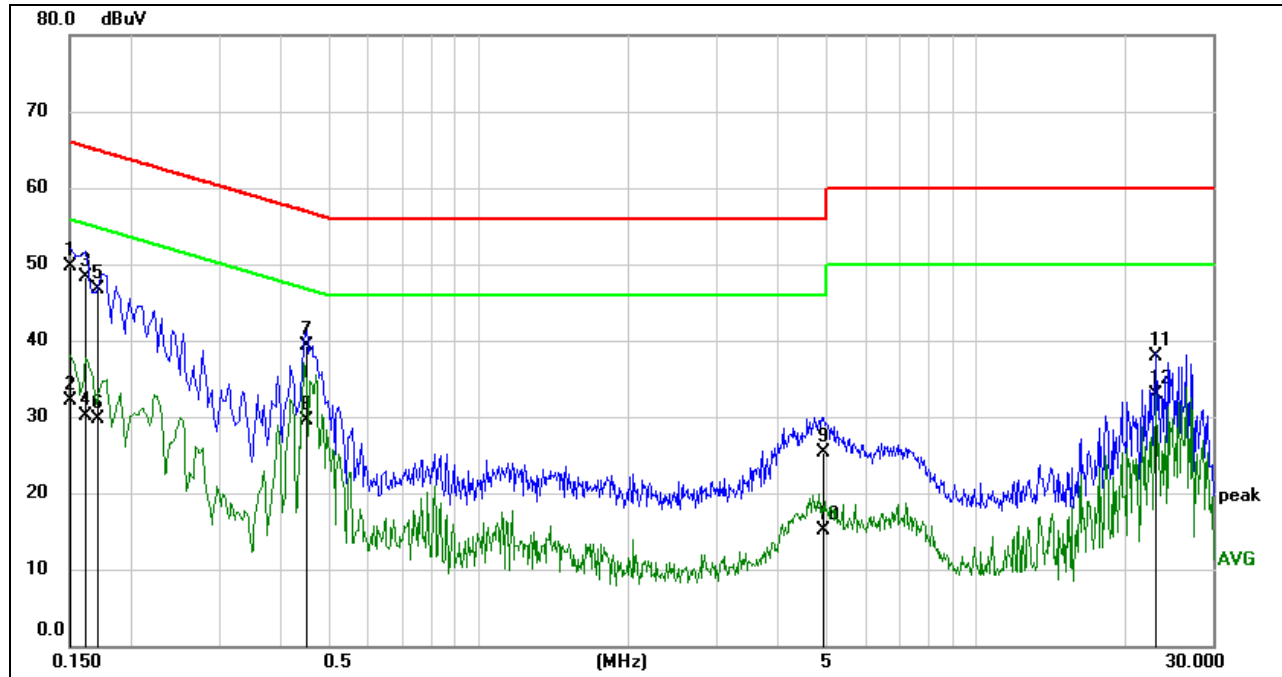

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1503	40.11	9.59	49.70	65.98	-16.28	QP
2	0.1503	22.49	9.59	32.08	55.98	-23.90	AVG
3	0.1619	38.68	9.59	48.27	65.37	-17.10	QP
4	0.1619	20.58	9.59	30.17	55.37	-25.20	AVG
5	0.1706	37.14	9.59	46.73	64.93	-18.20	QP
6	0.1706	20.12	9.59	29.71	54.93	-25.22	AVG
7	0.4498	29.99	9.35	39.34	56.88	-17.54	QP
8	0.4498	20.14	9.35	29.49	46.88	-17.39	AVG
9	4.9531	15.75	9.62	25.37	56.00	-30.63	QP
10	4.9531	5.41	9.62	15.03	46.00	-30.97	AVG
11	23.1285	28.08	9.73	37.81	60.00	-22.19	QP
12	23.1285	23.16	9.73	32.89	50.00	-17.11	AVG

Note: 1. Result = Reading +Correct Factor.

2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.

3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).

4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes and channels had been tested, but only the worst data was recorded in the report.

10. ANTENNA REQUIREMENTS

APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

RESULTS

Complies




11. Appendix

11.1. Appendix A: DTS Bandwidth


11.1.1. Test Result

Test Mode	Antenna	Channel	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	10.08	2406.96	2417.04	0.5	PASS
	Ant2	2412	10.08	2406.96	2417.04	0.5	PASS
	Ant1	2437	10.08	2431.96	2442.04	0.5	PASS
	Ant2	2437	10.08	2431.96	2442.04	0.5	PASS
	Ant1	2462	11.08	2456.96	2468.04	0.5	PASS
	Ant2	2462	11.04	2456.96	2468.00	0.5	PASS
11G	Ant1	2412	16.36	2403.84	2420.20	0.5	PASS
	Ant2	2412	16.32	2403.84	2420.16	0.5	PASS
	Ant1	2437	16.32	2428.84	2445.16	0.5	PASS
	Ant2	2437	16.36	2428.80	2445.16	0.5	PASS
	Ant1	2462	16.32	2453.84	2470.16	0.5	PASS
	Ant2	2462	16.32	2453.84	2470.16	0.5	PASS
11N20MIMO	Ant1	2412	17.56	2403.24	2420.80	0.5	PASS
	Ant2	2412	17.60	2403.20	2420.80	0.5	PASS
	Ant1	2437	16.92	2428.88	2445.80	0.5	PASS
	Ant2	2437	17.56	2428.24	2445.80	0.5	PASS
	Ant1	2462	17.32	2453.48	2470.80	0.5	PASS
	Ant2	2462	17.56	2453.24	2470.80	0.5	PASS
11N40MIMO	Ant1	2422	35.76	2404.48	2440.24	0.5	PASS
	Ant2	2422	36.32	2403.84	2440.16	0.5	PASS
	Ant1	2437	35.52	2419.08	2454.60	0.5	PASS
	Ant2	2437	35.76	2418.84	2454.60	0.5	PASS
	Ant1	2452	35.92	2434.24	2470.16	0.5	PASS
	Ant2	2452	35.76	2433.84	2469.60	0.5	PASS

11.1.2. Test Graphs

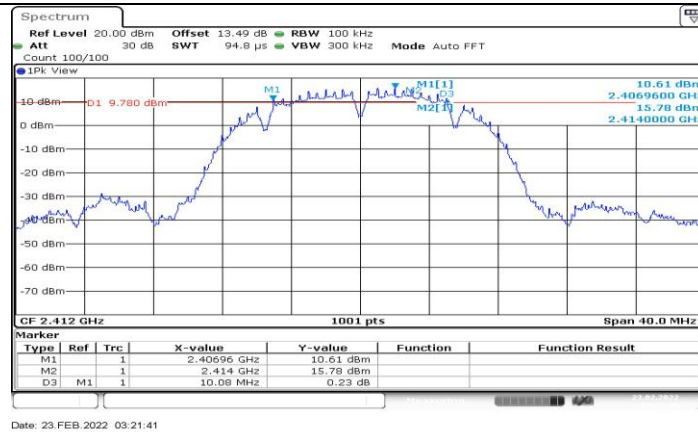


11B_Ant1_2412

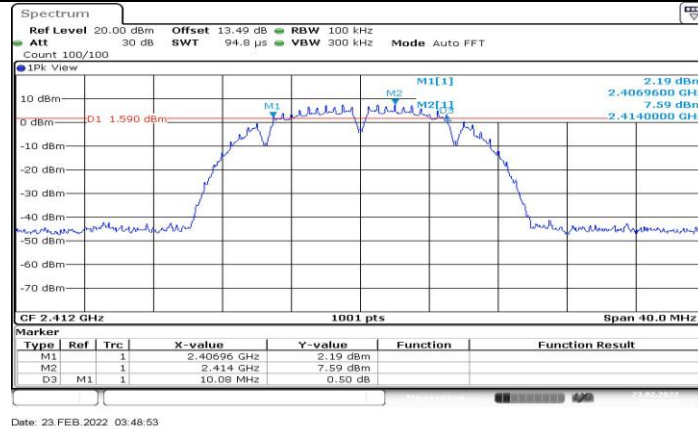


11B_Ant2_2412




11B_Ant1_2437

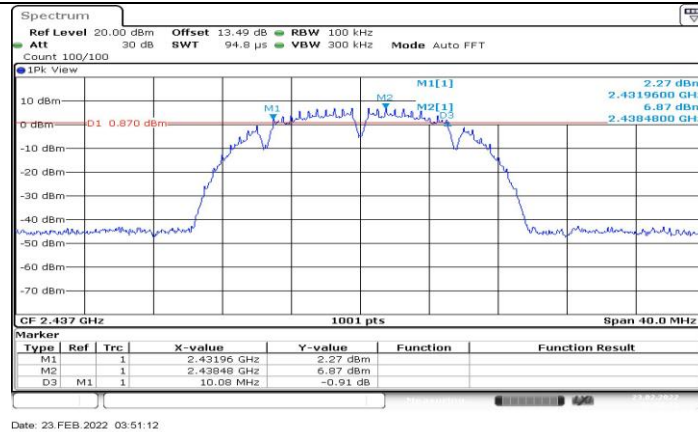


11B_Ant2_2437

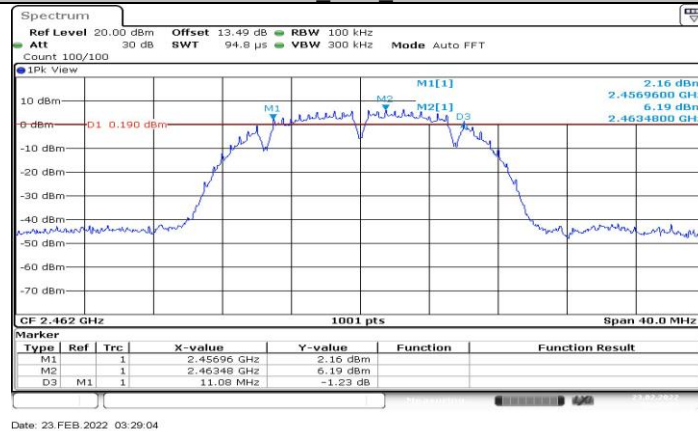


11B_Ant1_2462

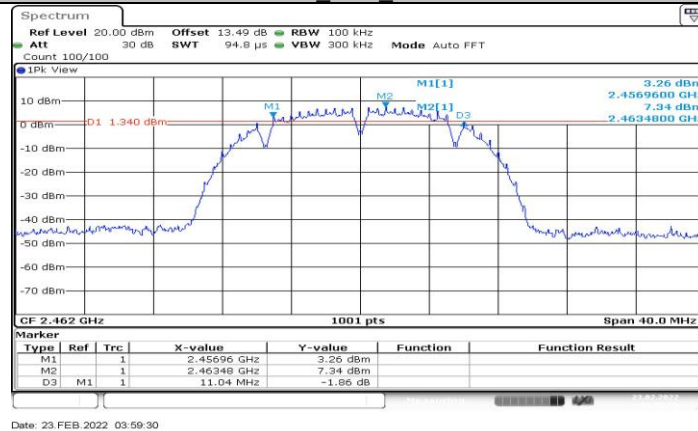


11B_Ant2_2462

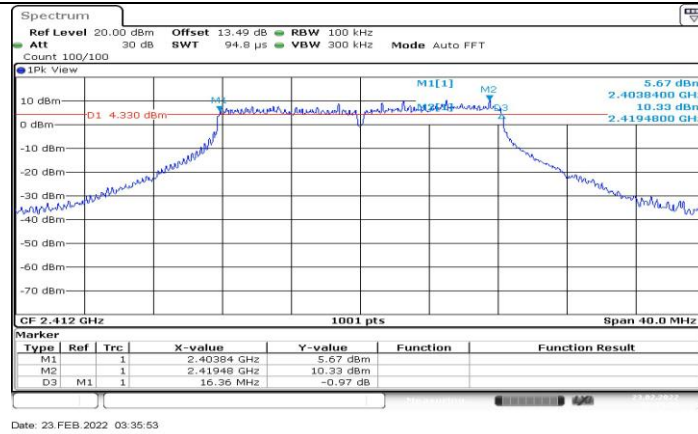


11G Ant1 2412

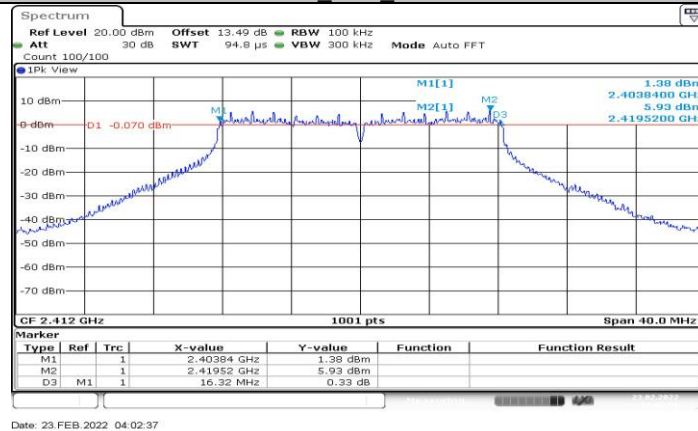


11G Ant2 2412

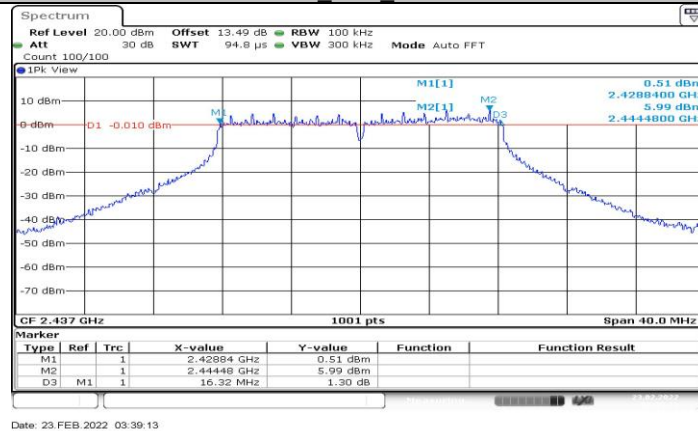


11G Ant1 2437

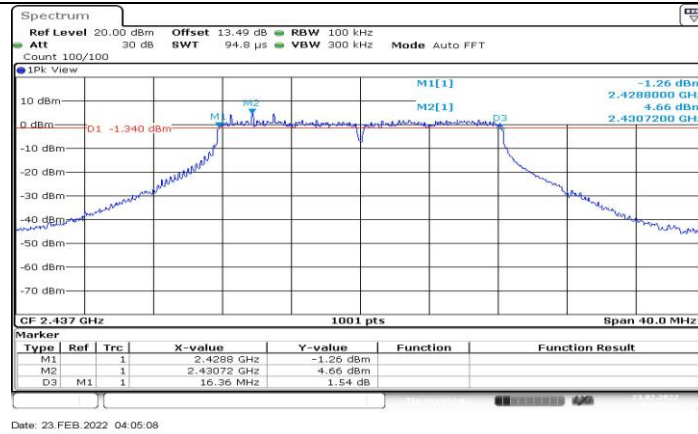


11G_Ant2_2437

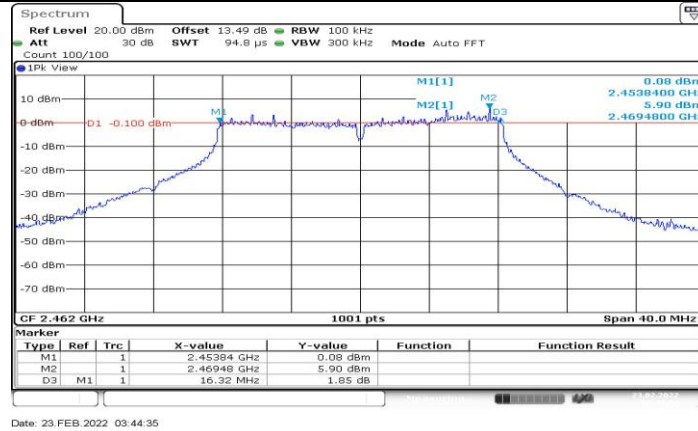


11G_Ant1_2462

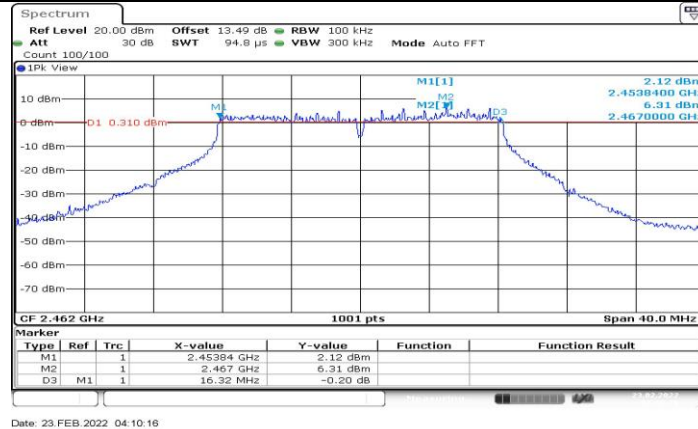


11G_Ant2_2462

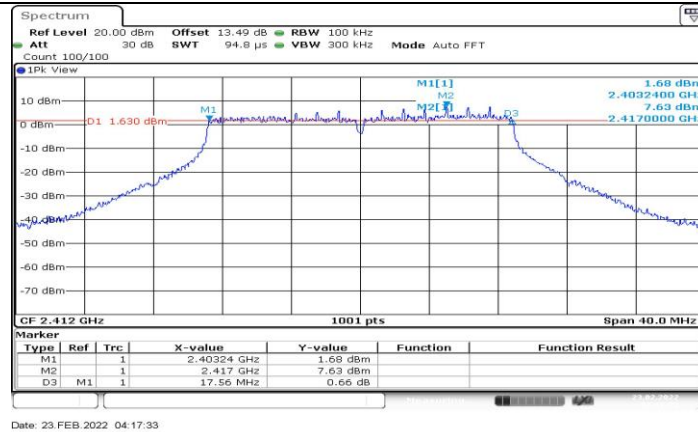


11N20MIMO Ant1 2412

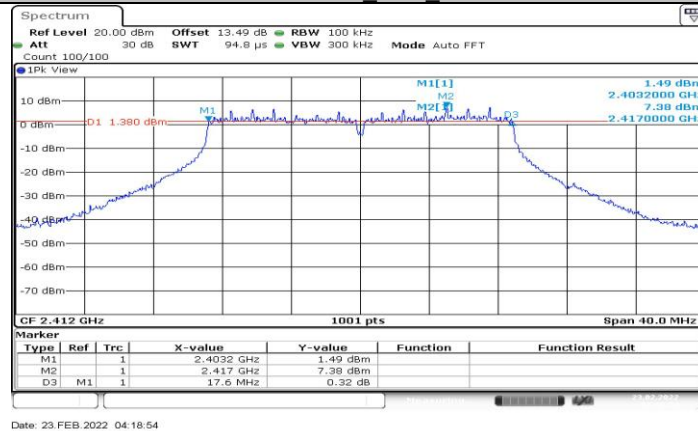


11N20MIMO Ant2 2412

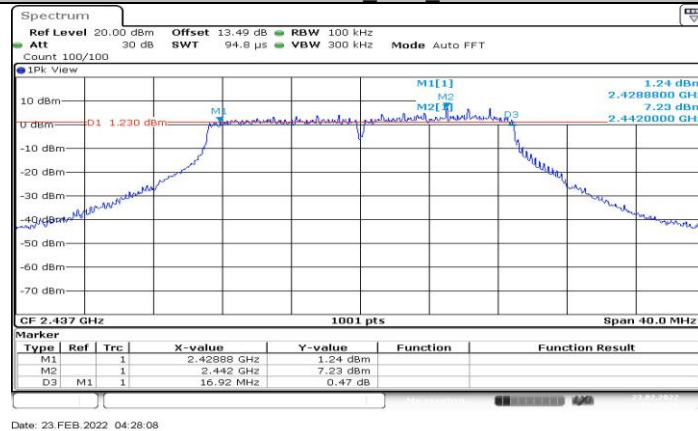


11N20MIMO Ant1 2437

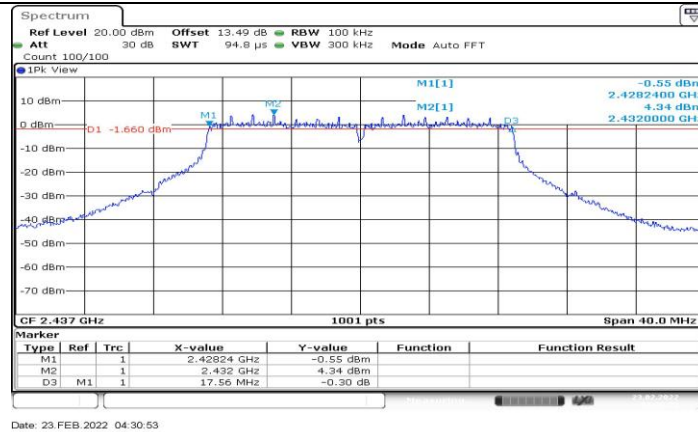


11N20MIMO Ant2 2437

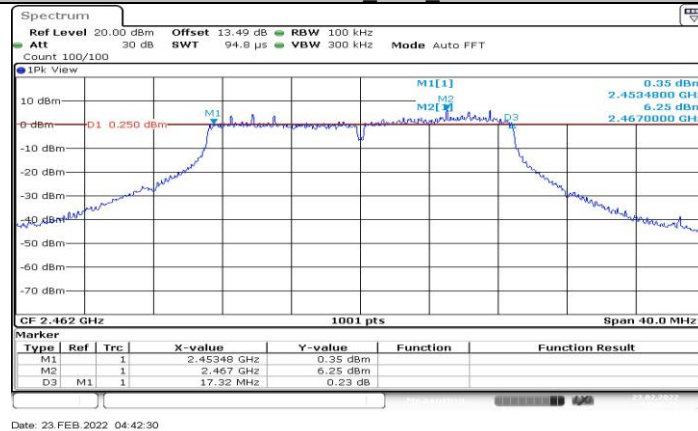


11N20MIMO Ant1 2462

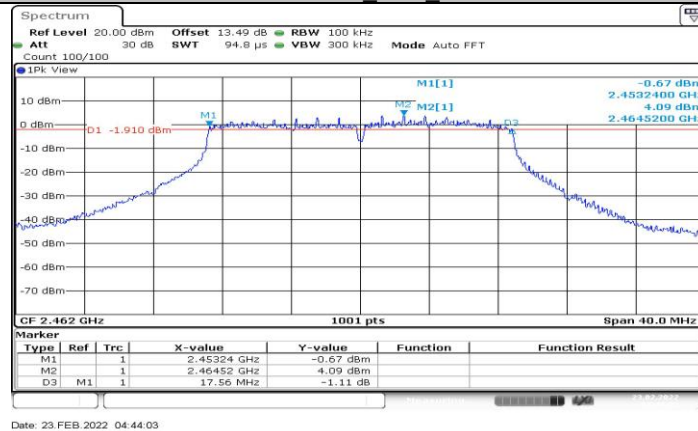


11N20MIMO Ant2 2462

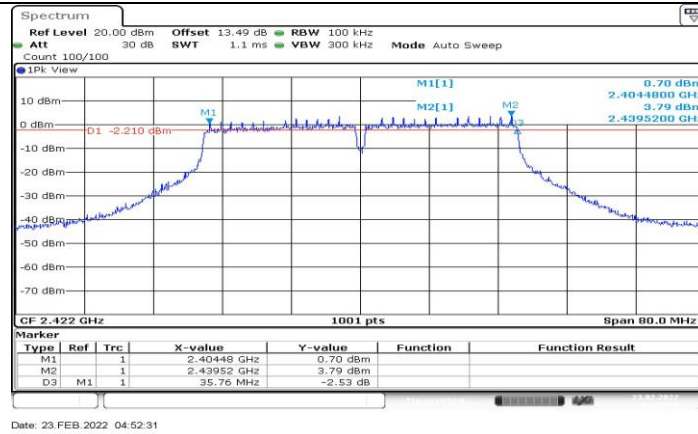


11N40MIMO Ant1 2422

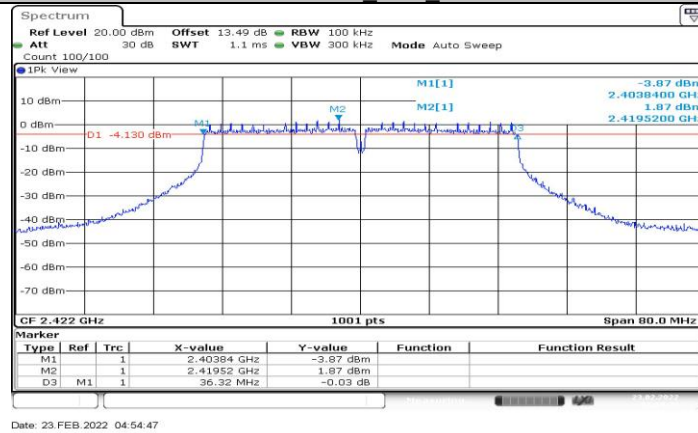


11N40MIMO Ant2 2422

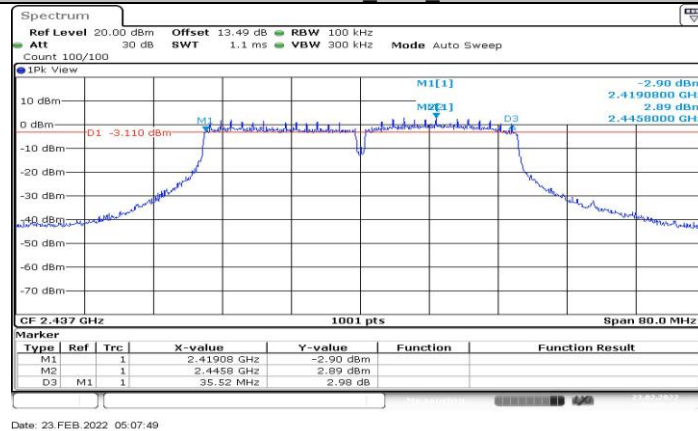


11N40MIMO Ant1 2437

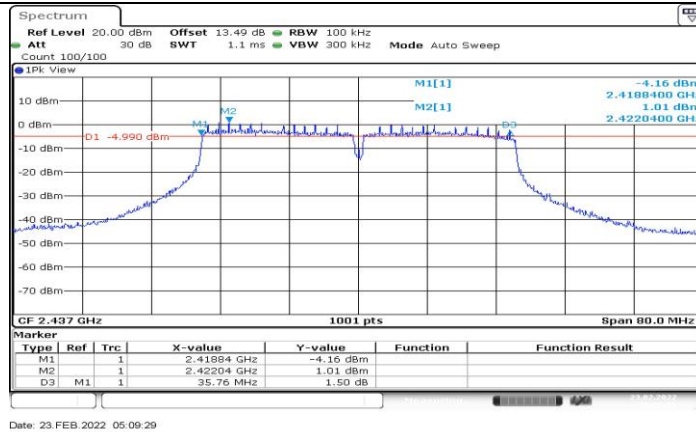

11N40MIMO Ant2 2437

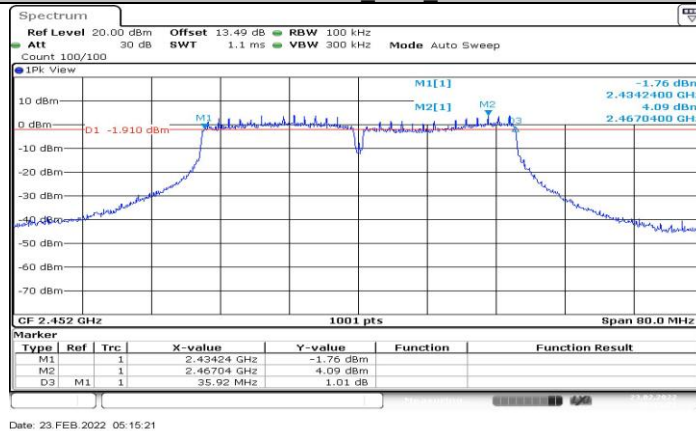

11N40MIMO Ant1 2452

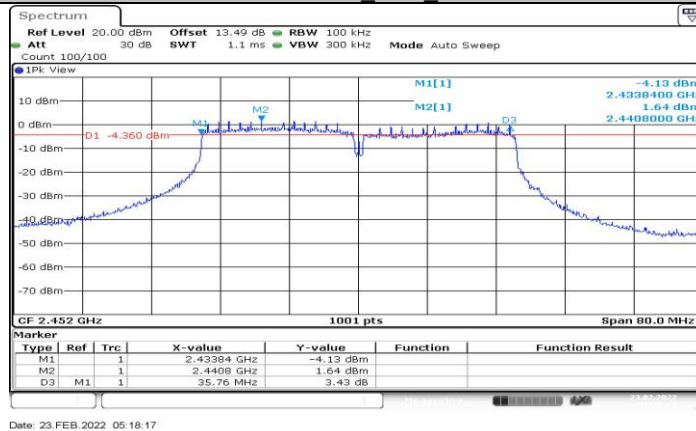



11N40MIMO Ant2 2452

**11.2. Appendix B: Occupied Channel Bandwidth****11.2.1. Test Result**

Test Mode	Antenna	Channel	OCB [MHz]	FL[MHz]	FH[MHz]	Verdict
11B	Ant1	2412	14.066	2405.087	2419.153	PASS
	Ant2	2412	14.066	2405.007	2419.073	PASS
	Ant1	2437	13.986	2430.127	2444.113	PASS
	Ant2	2437	13.986	2430.007	2443.993	PASS
	Ant1	2462	14.226	2455.007	2469.233	PASS
	Ant2	2462	14.066	2455.007	2469.073	PASS
11G	Ant1	2412	18.422	2402.889	2421.311	PASS
	Ant2	2412	18.462	2402.729	2421.191	PASS
	Ant1	2437	18.182	2428.049	2446.231	PASS
	Ant2	2437	18.262	2427.769	2446.031	PASS
	Ant1	2462	18.462	2452.769	2471.231	PASS
	Ant2	2462	18.222	2452.729	2470.951	PASS
11N20MIMO	Ant1	2412	19.221	2402.529	2421.750	PASS
	Ant2	2412	18.901	2402.569	2421.471	PASS
	Ant1	2437	18.981	2427.649	2446.630	PASS
	Ant2	2437	18.741	2427.569	2446.311	PASS
	Ant1	2462	18.901	2452.609	2471.510	PASS
	Ant2	2462	18.581	2452.609	2471.191	PASS
11N40MIMO	Ant1	2422	38.681	2403.139	2441.820	PASS
	Ant2	2422	37.962	2403.059	2441.021	PASS
	Ant1	2437	37.722	2418.139	2455.861	PASS
	Ant2	2437	37.642	2417.979	2455.621	PASS
	Ant1	2452	38.042	2433.059	2471.101	PASS
	Ant2	2452	37.722	2432.899	2470.621	PASS

11.2.2. Test Graphs

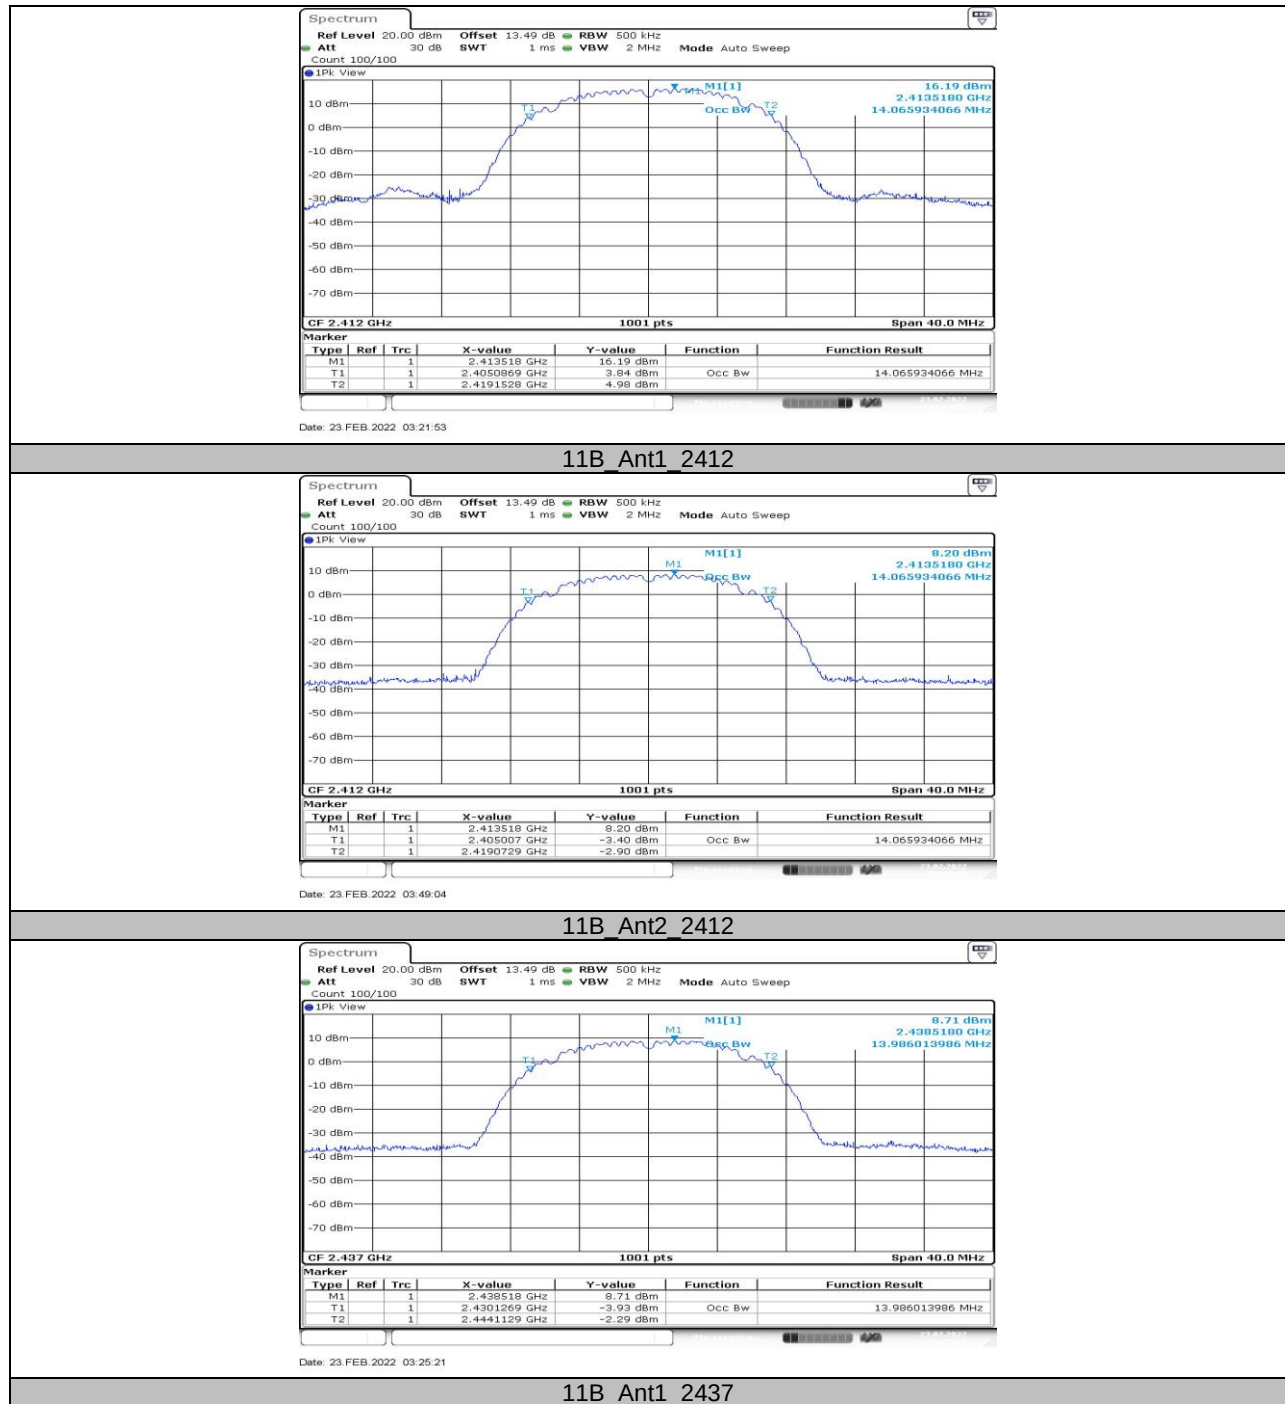

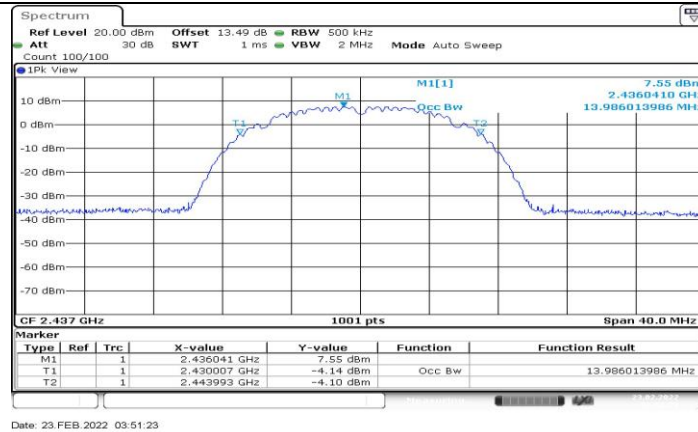

11B_Ant2_2437




11B_Ant1_2462



11B_Ant2_2462




11G_Ant1_2412

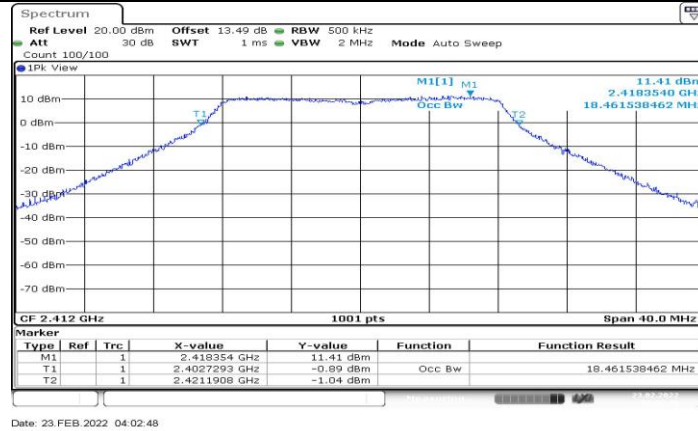


11G_Ant2_2412



11G_Ant1_2437

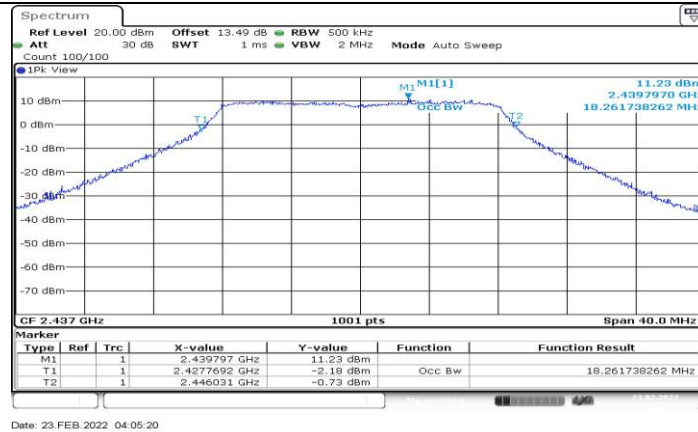

11G_Ant2_2437

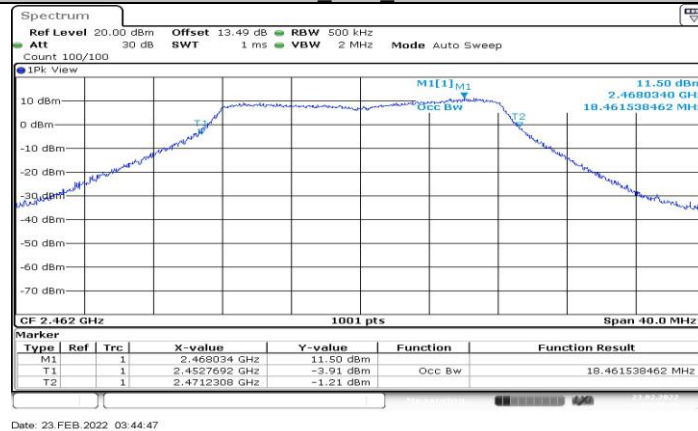

11G_Ant1_2462



11G_Ant2_2462