11AX20MIMO_Ant1_5745

11AX20MIMO_Ant2_5745

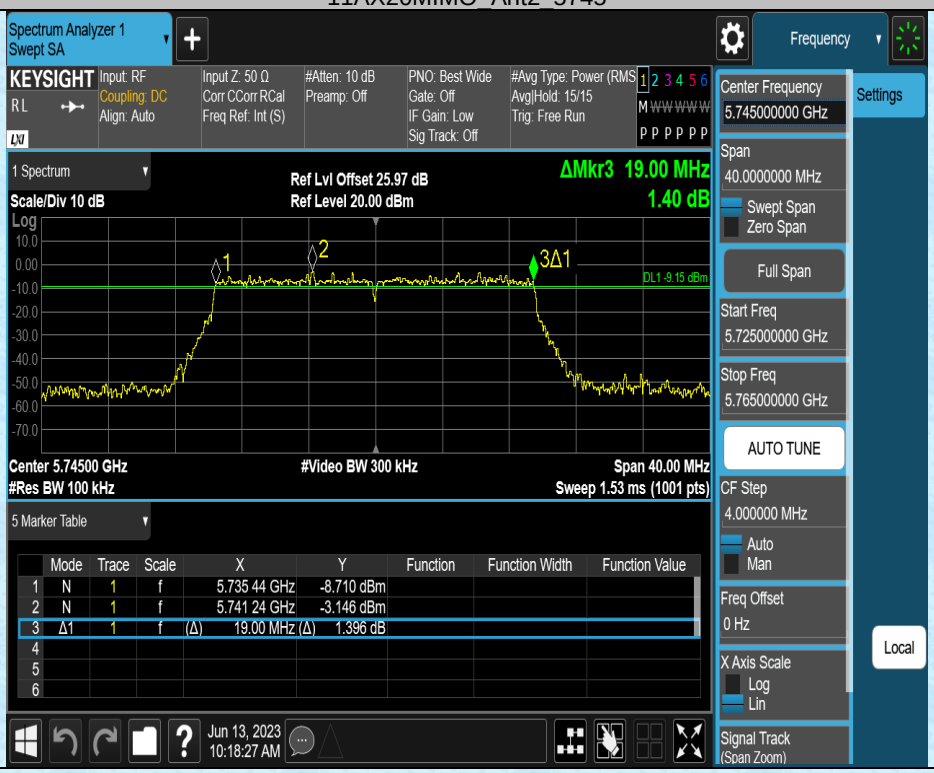

11AX20MIMO_Ant1_5785

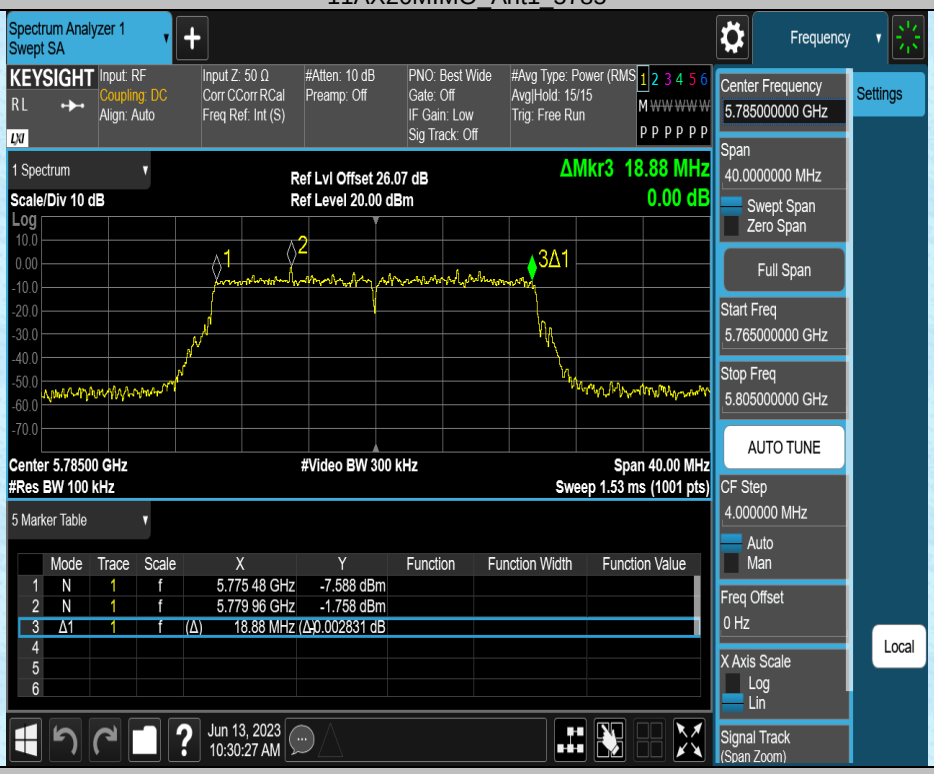

11AX20MIMO_Ant2_5785

11AX20MIMO_Ant1_5825

11AX20MIMO_Ant2_5825

11AX40MIMO_Ant1_5755

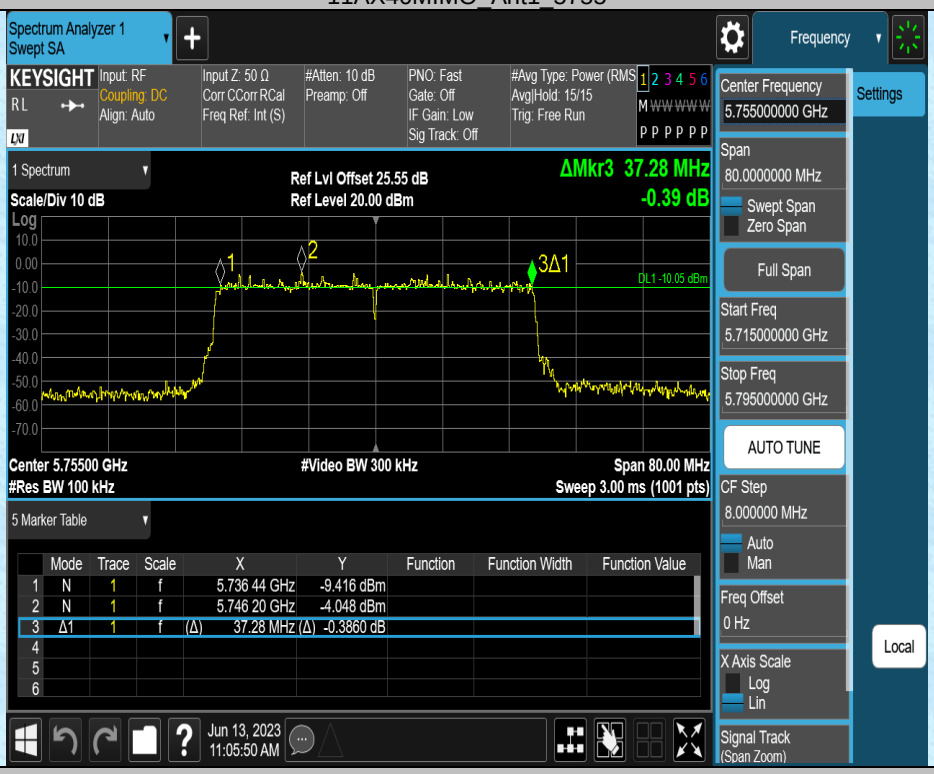

11AX40MIMO_Ant2_5755

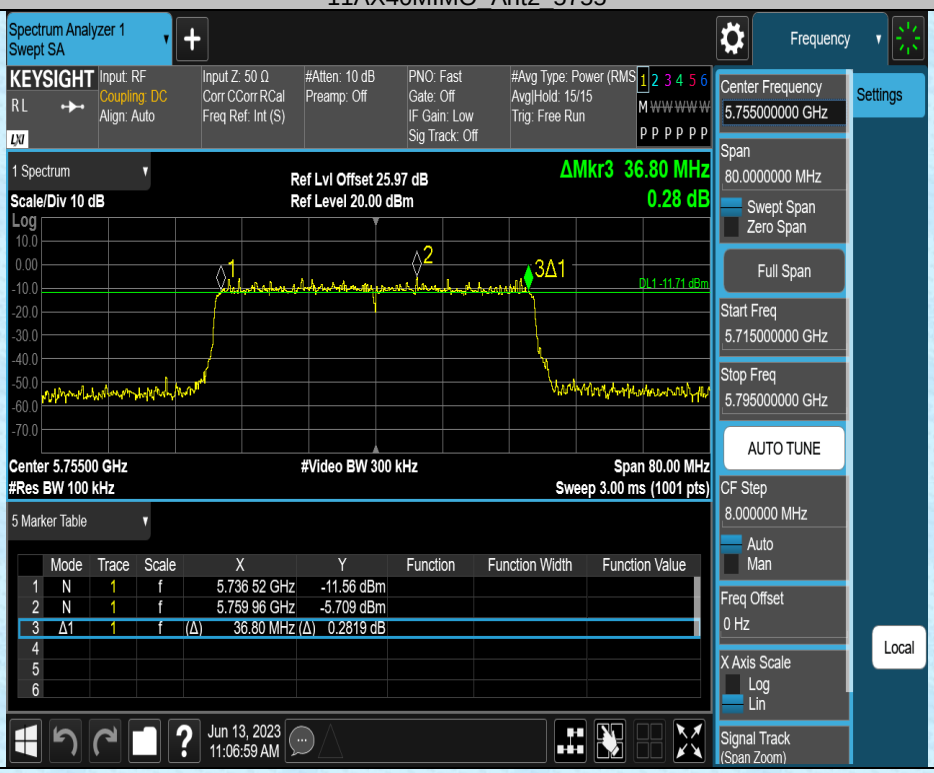

11AX40MIMO_Ant1_5795

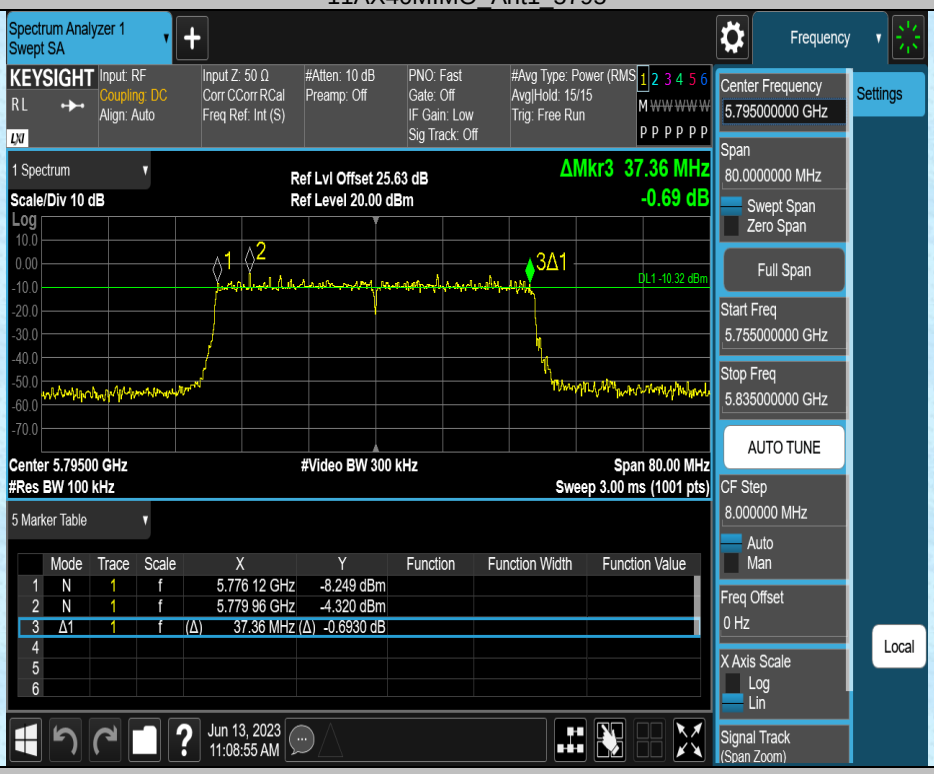

11AX40MIMO_Ant2_5795

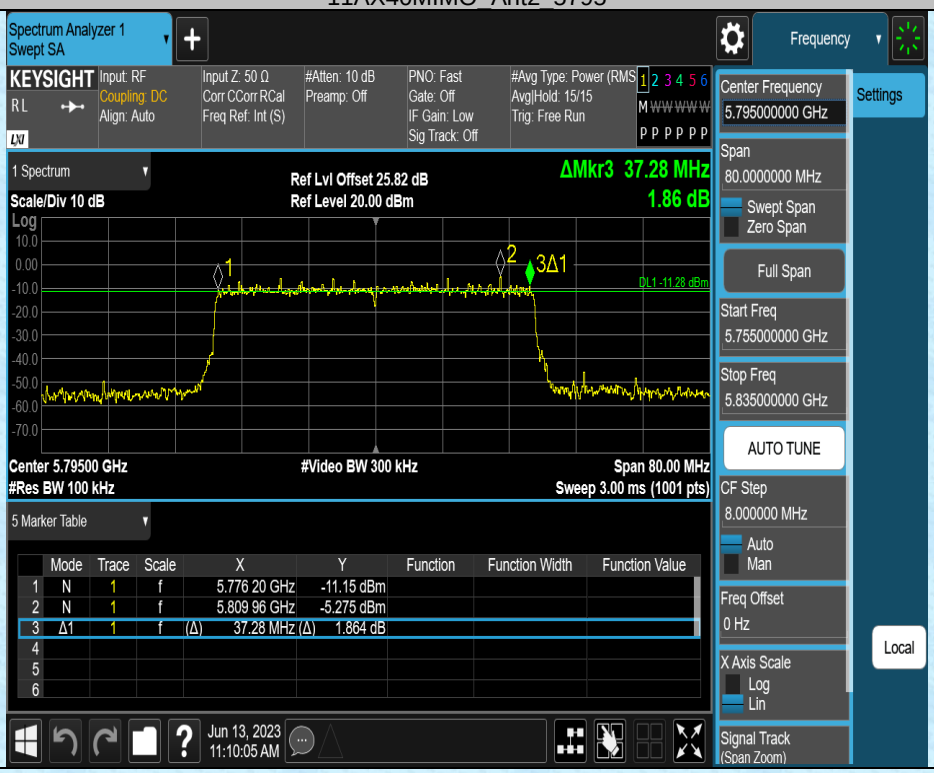

11AX80MIMO_Ant1_5775

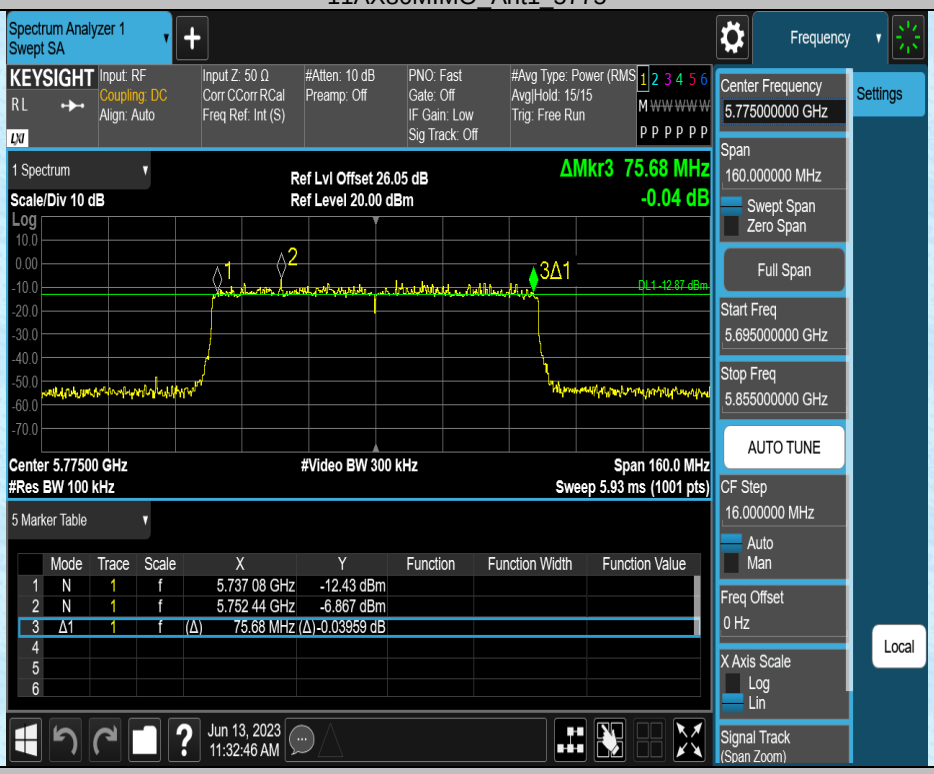

11AX80MIMO_Ant2_5775

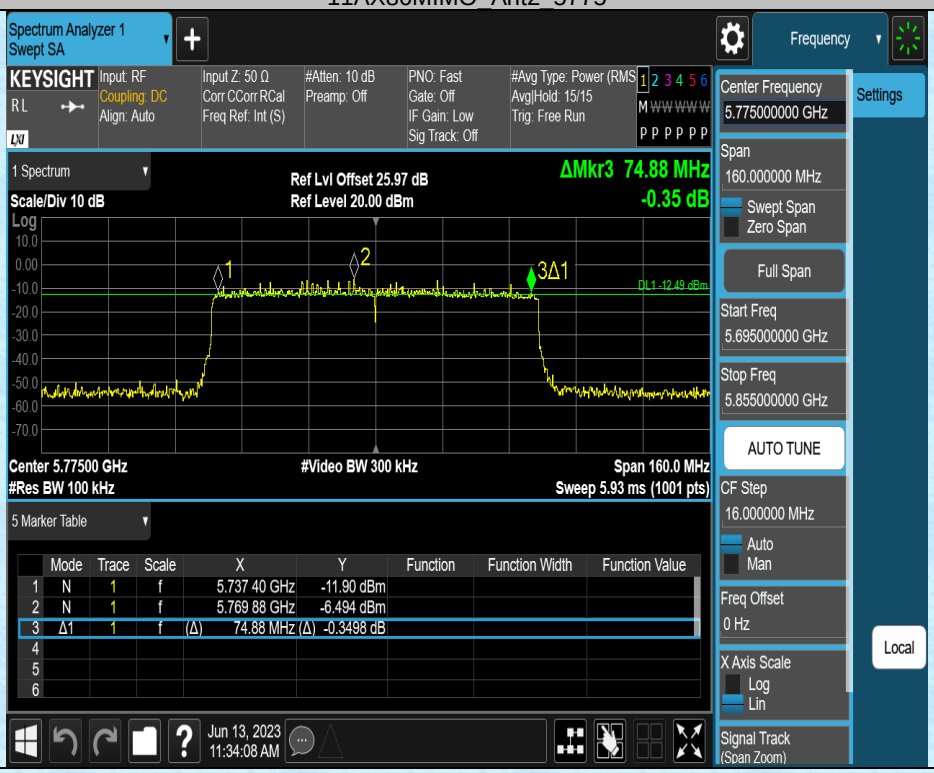

7.4 Maximum Conducted Output Power

Test Requirement	FCC Part15 E Section 15.407
Test Method :	ANSI C63.10:2013 & KDB 789033 D02 v02r01 FCC KDB 662911 D01 Multiple Transmitter Output v02r01
Limit:	

Frequency band (MHz)	Limit
5150-5250	≤1W(30dBm) for master device
	≤250Mw(23.98dBm) for client device
5250-5350	≤250Mw(23.98dBm) or 11dBm+10logB*
5470-5725	≤250Mw(23.98dBm) or 11dBm+10logB*
5725-5850	1 Watt (30dBm)

Remark: *Where B is the 26dB emission bandwidth in MHz.
The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

Test setup:

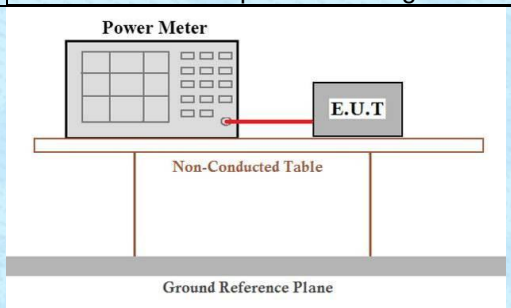

Duty Cycle set up:	RBW=VBW=8MHz
Test procedure:	**Measurement using an RF average power meter** (i) Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied a) The EUT is configured to transmit continuously or to transmit with a constant duty cycle. b) At all times when the EUT is transmitting, it must be transmitting at its maximum power control level. c) The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five. (ii) If the transmitter does not transmit continuously, measure the duty cycle, x, of the transmitter output signal as described in section B). (iii) Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter. (iv) Adjust the measurement in dBm by adding 10 log(1/x) where x is the duty cycle (e.g., 10log(1/0.25) if the duty cycle is 25 percent).
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data:

No beamforming

Test Mode	Antenna	Freq(MHz)	Result [dBm]	Limit [dBm]	Verdict
11A-CDD	Ant1	5180	6.39	≤23.99	PASS
	Ant2	5180	5.74	≤23.99	PASS
	total	5180	9.09	≤23.99	PASS
	Ant1	5200	6.71	≤23.99	PASS
	Ant2	5200	5.56	≤23.99	PASS
	total	5200	9.18	≤23.99	PASS
	Ant1	5240	6.74	≤23.99	PASS
	Ant2	5240	5.39	≤23.99	PASS
	total	5240	9.13	≤23.99	PASS
	Ant1	5260	10.61	≤17.97	PASS
	Ant2	5260	10.15	≤17.97	PASS
	total	5260	13.40	≤17.97	PASS
	Ant1	5280	11.18	≤17.97	PASS
	Ant2	5280	9.97	≤17.97	PASS
	total	5280	13.63	≤17.97	PASS
	Ant1	5320	10.96	≤17.97	PASS
	Ant2	5320	10.95	≤17.97	PASS
	total	5320	13.97	≤17.97	PASS
	Ant1	5500	11.43	≤17.97	PASS
	Ant2	5500	10.45	≤17.97	PASS
	total	5500	13.98	≤17.97	PASS
	Ant1	5580	11.07	≤17.97	PASS
	Ant2	5580	10.38	≤17.97	PASS
	total	5580	13.75	≤17.97	PASS
	Ant1	5700	10.90	≤17.97	PASS
	Ant2	5700	10.43	≤17.97	PASS
	total	5700	13.68	≤17.97	PASS
	Ant1	5745	10.84	≤23.99	PASS
	Ant2	5745	11.10	≤23.99	PASS
	total	5745	13.98	≤23.99	PASS
	Ant1	5785	10.89	≤23.99	PASS
	Ant2	5785	10.68	≤23.99	PASS
	total	5785	13.80	≤23.99	PASS
	Ant1	5825	10.95	≤23.99	PASS
	Ant2	5825	10.69	≤23.99	PASS
	total	5825	13.83	≤23.99	PASS
11N20MIMO	Ant1	5180	6.71	≤23.99	PASS
	Ant2	5180	6.08	≤23.99	PASS
	total	5180	9.42	≤23.99	PASS
	Ant1	5200	6.67	≤23.99	PASS
	Ant2	5200	5.93	≤23.99	PASS
	total	5200	9.33	≤23.99	PASS
	Ant1	5240	6.83	≤23.99	PASS
	Ant2	5240	5.72	≤23.99	PASS
	total	5240	9.32	≤23.99	PASS
	Ant1	5260	10.70	≤17.97	PASS
	Ant2	5260	9.91	≤17.97	PASS
	total	5260	13.33	≤17.97	PASS
	Ant1	5280	10.58	≤17.97	PASS
	Ant2	5280	10.25	≤17.97	PASS
	total	5280	13.43	≤17.97	PASS
	Ant1	5320	10.52	≤17.97	PASS
	Ant2	5320	11.09	≤17.97	PASS
	total	5320	13.82	≤17.97	PASS
	Ant1	5500	11.11	≤17.97	PASS
	Ant2	5500	10.08	≤17.97	PASS
	total	5500	13.64	≤17.97	PASS
	Ant1	5580	11.11	≤17.97	PASS

	Ant2	5580	10.21	≤17.97	PASS
	total	5580	13.69	≤17.97	PASS
	Ant1	5700	10.66	≤17.97	PASS
	Ant2	5700	10.58	≤17.97	PASS
	total	5700	13.63	≤17.97	PASS
	Ant1	5745	11.00	≤23.99	PASS
	Ant2	5745	11.12	≤23.99	PASS
	total	5745	14.07	≤23.99	PASS
	Ant1	5785	11.36	≤23.99	PASS
	Ant2	5785	10.97	≤23.99	PASS
	total	5785	**14.18**	≤23.99	PASS
	Ant1	5825	10.75	≤23.99	PASS
	Ant2	5825	10.76	≤23.99	PASS
	total	5825	13.77	≤23.99	PASS
11N40MIMO	Ant1	5190	6.20	≤23.99	PASS
	Ant2	5190	8.51	≤23.99	PASS
	total	5190	10.52	≤23.99	PASS
	Ant1	5230	7.63	≤23.99	PASS
	Ant2	5230	7.35	≤23.99	PASS
	total	5230	10.50	≤23.99	PASS
	Ant1	5270	10.78	≤17.97	PASS
	Ant2	5270	10.67	≤17.97	PASS
	total	5270	13.74	≤17.97	PASS
	Ant1	5310	10.74	≤17.97	PASS
	Ant2	5310	11.18	≤17.97	PASS
	total	5310	13.98	≤17.97	PASS
	Ant1	5510	11.45	≤17.97	PASS
	Ant2	5510	10.57	≤17.97	PASS
	total	5510	14.04	≤17.97	PASS
	Ant1	5550	9.74	≤17.97	PASS
	Ant2	5550	11.48	≤17.97	PASS
	total	5550	13.71	≤17.97	PASS
	Ant1	5670	10.47	≤17.97	PASS
	Ant2	5670	10.18	≤17.97	PASS
	total	5670	13.34	≤17.97	PASS
	Ant1	5755	11.34	≤23.99	PASS
	Ant2	5755	10.20	≤23.99	PASS
	total	5755	13.82	≤23.99	PASS
	Ant1	5795	12.29	≤23.99	PASS
	Ant2	5795	7.20	≤23.99	PASS
	total	5795	13.46	≤23.99	PASS
11AC20MIMO	Ant1	5180	6.82	≤23.99	PASS
	Ant2	5180	5.91	≤23.99	PASS
	total	5180	9.40	≤23.99	PASS
	Ant1	5200	6.86	≤23.99	PASS
	Ant2	5200	5.90	≤23.99	PASS
	total	5200	9.42	≤23.99	PASS
	Ant1	5240	6.64	≤23.99	PASS
	Ant2	5240	5.47	≤23.99	PASS
	total	5240	9.10	≤23.99	PASS
	Ant1	5260	10.63	≤17.97	PASS
	Ant2	5260	10.14	≤17.97	PASS
	total	5260	13.40	≤17.97	PASS
	Ant1	5280	10.69	≤17.97	PASS
	Ant2	5280	10.12	≤17.97	PASS
	total	5280	13.42	≤17.97	PASS
	Ant1	5320	10.70	≤17.97	PASS
	Ant2	5320	10.90	≤17.97	PASS
	total	5320	13.81	≤17.97	PASS
	Ant1	5500	11.19	≤17.97	PASS
	Ant2	5500	9.88	≤17.97	PASS
	total	5500	13.59	≤17.97	PASS
	Ant1	5580	10.72	≤17.97	PASS

	Ant2	5580	10.09	≤17.97	PASS
	total	5580	13.43	≤17.97	PASS
	Ant1	5700	10.40	≤17.97	PASS
	Ant2	5700	10.65	≤17.97	PASS
	total	5700	13.54	≤17.97	PASS
	Ant1	5745	10.70	≤23.99	PASS
	Ant2	5745	11.03	≤23.99	PASS
	total	5745	13.88	≤23.99	PASS
	Ant1	5785	10.80	≤23.99	PASS
	Ant2	5785	10.59	≤23.99	PASS
	total	5785	13.71	≤23.99	PASS
	Ant1	5825	10.55	≤23.99	PASS
	Ant2	5825	10.61	≤23.99	PASS
	total	5825	13.59	≤23.99	PASS
11AC40MIMO	Ant1	5190	7.60	≤23.99	PASS
	Ant2	5190	7.22	≤23.99	PASS
	total	5190	10.42	≤23.99	PASS
	Ant1	5230	7.45	≤23.99	PASS
	Ant2	5230	6.95	≤23.99	PASS
	total	5230	10.22	≤23.99	PASS
	Ant1	5270	9.48	≤17.97	PASS
	Ant2	5270	9.26	≤17.97	PASS
	total	5270	12.38	≤17.97	PASS
	Ant1	5310	10.17	≤17.97	PASS
	Ant2	5310	10.57	≤17.97	PASS
	total	5310	13.38	≤17.97	PASS
	Ant1	5510	11.25	≤17.97	PASS
	Ant2	5510	10.33	≤17.97	PASS
	total	5510	13.82	≤17.97	PASS
	Ant1	5550	11.31	≤17.97	PASS
	Ant2	5550	10.35	≤17.97	PASS
	total	5550	13.87	≤17.97	PASS
	Ant1	5670	10.38	≤17.97	PASS
	Ant2	5670	10.15	≤17.97	PASS
	total	5670	13.28	≤17.97	PASS
	Ant1	5755	11.30	≤23.99	PASS
	Ant2	5755	10.19	≤23.99	PASS
	total	5755	13.79	≤23.99	PASS
	Ant1	5795	11.38	≤23.99	PASS
	Ant2	5795	9.99	≤23.99	PASS
	total	5795	13.75	≤23.99	PASS
11AC80MIMO	Ant1	5210	7.76	≤23.99	PASS
	Ant2	5210	7.45	≤23.99	PASS
	total	5210	10.62	≤23.99	PASS
	Ant1	5290	10.44	≤17.97	PASS
	Ant2	5290	10.65	≤17.97	PASS
	total	5290	13.56	≤17.97	PASS
	Ant1	5530	9.95	≤17.97	PASS
	Ant2	5530	10.24	≤17.97	PASS
	total	5530	13.11	≤17.97	PASS
	Ant1	5610	10.02	≤17.97	PASS
	Ant2	5610	11.09	≤17.97	PASS
	total	5610	13.60	≤17.97	PASS
	Ant1	5775	10.35	≤23.99	PASS
	Ant2	5775	11.40	≤23.99	PASS
	total	5775	13.92	≤23.99	PASS
11AX20MIMO	Ant1	5180	6.71	≤23.99	PASS
	Ant2	5180	6.15	≤23.99	PASS
	total	5180	9.45	≤23.99	PASS
	Ant1	5200	6.85	≤23.99	PASS
	Ant2	5200	6.08	≤23.99	PASS
	total	5200	9.49	≤23.99	PASS
	Ant1	5240	6.59	≤23.99	PASS

	Ant2	5240	5.62	≤23.99	PASS
	total	5240	9.14	≤23.99	PASS
	Ant1	5260	10.65	≤17.97	PASS
	Ant2	5260	10.20	≤17.97	PASS
	total	5260	13.44	≤17.97	PASS
	Ant1	5280	10.82	≤17.97	PASS
	Ant2	5280	10.28	≤17.97	PASS
	total	5280	13.57	≤17.97	PASS
	Ant1	5320	10.77	≤17.97	PASS
	Ant2	5320	10.91	≤17.97	PASS
	total	5320	13.85	≤17.97	PASS
	Ant1	5500	11.11	≤17.97	PASS
	Ant2	5500	9.93	≤17.97	PASS
	total	5500	13.57	≤17.97	PASS
	Ant1	5580	11.03	≤17.97	PASS
	Ant2	5580	10.35	≤17.97	PASS
	total	5580	13.71	≤17.97	PASS
	Ant1	5700	10.80	≤17.97	PASS
	Ant2	5700	10.88	≤17.97	PASS
	total	5700	13.85	≤17.97	PASS
	Ant1	5745	10.97	≤23.99	PASS
	Ant2	5745	11.30	≤23.99	PASS
	total	5745	14.15	≤23.99	PASS
	Ant1	5785	11.13	≤23.99	PASS
	Ant2	5785	10.86	≤23.99	PASS
	total	5785	14.01	≤23.99	PASS
	Ant1	5825	10.57	≤23.99	PASS
	Ant2	5825	10.91	≤23.99	PASS
	total	5825	13.75	≤23.99	PASS
11AX40MIMO	Ant1	5190	7.65	≤23.99	PASS
	Ant2	5190	7.42	≤23.99	PASS
	total	5190	10.55	≤23.99	PASS
	Ant1	5230	7.57	≤23.99	PASS
	Ant2	5230	7.20	≤23.99	PASS
	total	5230	10.40	≤23.99	PASS
	Ant1	5270	10.28	≤17.97	PASS
	Ant2	5270	10.07	≤17.97	PASS
	total	5270	13.19	≤17.97	PASS
	Ant1	5310	10.29	≤17.97	PASS
	Ant2	5310	10.74	≤17.97	PASS
	total	5310	13.53	≤17.97	PASS
	Ant1	5510	11.26	≤17.97	PASS
	Ant2	5510	10.35	≤17.97	PASS
	total	5510	13.84	≤17.97	PASS
	Ant1	5550	11.46	≤17.97	PASS
	Ant2	5550	10.57	≤17.97	PASS
	total	5550	14.05	≤17.97	PASS
	Ant1	5670	10.45	≤17.97	PASS
	Ant2	5670	10.32	≤17.97	PASS
	total	5670	13.40	≤17.97	PASS
	Ant1	5755	11.53	≤23.99	PASS
	Ant2	5755	10.41	≤23.99	PASS
	total	5755	14.02	≤23.99	PASS
	Ant1	5795	11.52	≤23.99	PASS
	Ant2	5795	10.27	≤23.99	PASS
	total	5795	13.95	≤23.99	PASS
11AX80MIMO	Ant1	5210	7.91	≤23.99	PASS
	Ant2	5210	7.94	≤23.99	PASS
	total	5210	10.94	≤23.99	PASS
	Ant1	5290	10.12	≤17.97	PASS
	Ant2	5290	10.61	≤17.97	PASS
	total	5290	13.38	≤17.97	PASS
	Ant1	5530	10.44	≤17.97	PASS

	Ant2	5530	10.99	≤17.97	PASS
	total	5530	13.73	≤17.97	PASS
	Ant1	5610	10.61	≤17.97	PASS
	Ant2	5610	10.94	≤17.97	PASS
	total	5610	13.79	≤17.97	PASS
	Ant1	5775	10.89	≤23.99	PASS
	Ant2	5775	11.49	≤23.99	PASS
	total	5775	14.21	≤23.99	PASS
11AX160MIMO	Ant1	5250_UNII-1	5.34	≤23.99	PASS
	Ant2	5250_UNII-1	5.70	≤23.99	PASS
	total	5250_UNII-1	8.53	≤23.99	PASS
	Ant1	5250_UNII-2A	4.64	≤17.97	PASS
	Ant2	5250_UNII-2A	5.35	≤17.97	PASS
	total	5250_UNII-2A	8.02	≤17.97	PASS
	Ant1	5570	9.64	≤17.97	PASS
	Ant2	5570	10.90	≤17.97	PASS
	total	5570	13.33	≤17.97	PASS

Note: The duty cycle factor has included in power value.

Frequency Band	ANT 1 Antenna Gain (dBi)	ANT 2 Antenna Gain (dBi)	Correlated chains directional gain (dBi)	Power Limit (dBm)
U-NII-1	9.0	9.0	12.01	23.99
U-NII-2A	9.0	9.0	12.01	17.97
U-NII-2C	9.0	9.0	12.01	17.97
U-NII-3	9.0	9.0	12.01	23.99

Unequal antenna gains, with equal transmit powers. For antenna gains given by G_1, G_2, …, G_N dBi
If transmit signals are correlated, then Directional gain = 10 log[$(10^{G1/20} + 10^{G2/20} + \ldots + 10^{GN/20})^2 / N_{ANT}$] dBi
[Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]

Directional gain = 10log[$(10^{9/20} + 10^{9/20})^2/N_{ANT}$] dBi=12.01

Beamforming

Test Mode	Antenna	Freq(MHz)	Result [dBm]	Limit [dBm]	Verdict
11A-CDD	Ant1	5180	3.91	≤21.49	PASS
	Ant2	5180	3.28	≤21.49	PASS
	total	5180	6.62	≤21.49	PASS
	Ant1	5200	3.93	≤21.49	PASS
	Ant2	5200	3.53	≤21.49	PASS
	total	5200	6.74	≤21.49	PASS
	Ant1	5240	3.75	≤21.49	PASS
	Ant2	5240	3.37	≤21.49	PASS
	total	5240	6.58	≤21.49	PASS
	Ant1	5260	8.00	≤15.47	PASS
	Ant2	5260	7.58	≤15.47	PASS
	total	5260	10.81	≤15.47	PASS
	Ant1	5280	8.02	≤15.47	PASS
	Ant2	5280	7.69	≤15.47	PASS
	total	5280	10.87	≤15.47	PASS
	Ant1	5320	8.03	≤15.47	PASS
	Ant2	5320	7.76	≤15.47	PASS
	total	5320	10.91	≤15.47	PASS
	Ant1	5500	7.56	≤15.47	PASS
	Ant2	5500	7.86	≤15.47	PASS
	total	5500	10.73	≤15.47	PASS
	Ant1	5580	7.99	≤15.47	PASS
	Ant2	5580	7.81	≤15.47	PASS
	total	5580	10.91	≤15.47	PASS
	Ant1	5700	8.16	≤15.47	PASS
	Ant2	5700	8.08	≤15.47	PASS
	total	5700	11.13	≤15.47	PASS
	Ant1	5745	7.72	≤21.49	PASS
	Ant2	5745	7.47	≤21.49	PASS
	total	5745	10.61	≤21.49	PASS
	Ant1	5785	7.49	≤21.49	PASS
	Ant2	5785	7.72	≤21.49	PASS
	total	5785	10.62	≤21.49	PASS
	Ant1	5825	8.08	≤21.49	PASS
	Ant2	5825	7.38	≤21.49	PASS
	total	5825	10.76	≤21.49	PASS
11N20MIMO	Ant1	5180	3.60	≤21.49	PASS
	Ant2	5180	3.40	≤21.49	PASS
	total	5180	6.51	≤21.49	PASS

	Ant1	5200	4.02	≤21.49	PASS
	Ant2	5200	3.77	≤21.49	PASS
	total	5200	6.91	≤21.49	PASS
	Ant1	5240	3.97	≤21.49	PASS
	Ant2	5240	3.62	≤21.49	PASS
	total	5240	6.81	≤21.49	PASS
	Ant1	5260	7.96	≤15.47	PASS
	Ant2	5260	7.71	≤15.47	PASS
	total	5260	10.85	≤15.47	PASS
	Ant1	5280	8.00	≤15.47	PASS
	Ant2	5280	7.89	≤15.47	PASS
	total	5280	10.96	≤15.47	PASS
	Ant1	5320	7.55	≤15.47	PASS
	Ant2	5320	7.27	≤15.47	PASS
	total	5320	10.42	≤15.47	PASS
	Ant1	5500	7.55	≤15.47	PASS
	Ant2	5500	7.74	≤15.47	PASS
	total	5500	10.66	≤15.47	PASS
	Ant1	5580	8.10	≤15.47	PASS
	Ant2	5580	7.96	≤15.47	PASS
	total	5580	11.04	≤15.47	PASS
	Ant1	5700	7.96	≤15.47	PASS
	Ant2	5700	7.60	≤15.47	PASS
	total	5700	10.80	≤15.47	PASS
	Ant1	5745	7.94	≤21.49	PASS
	Ant2	5745	7.60	≤21.49	PASS
	total	5745	10.79	≤21.49	PASS
	Ant1	5785	8.11	≤21.49	PASS
	Ant2	5785	7.73	≤21.49	PASS
	total	5785	10.94	≤21.49	PASS
	Ant1	5825	7.69	≤21.49	PASS
	Ant2	5825	7.64	≤21.49	PASS
	total	5825	10.68	≤21.49	PASS
11N40MIMO	Ant1	5190	5.08	≤21.49	PASS
	Ant2	5190	4.89	≤21.49	PASS
	total	5190	7.99	≤21.49	PASS
	Ant1	5230	4.92	≤21.49	PASS
	Ant2	5230	4.79	≤21.49	PASS
	total	5230	7.86	≤21.49	PASS
	Ant1	5270	7.91	≤15.47	PASS
	Ant2	5270	7.72	≤15.47	PASS
	total	5270	10.83	≤15.47	PASS

	Ant1	5310	7.97	≤15.47	PASS
	Ant2	5310	7.54	≤15.47	PASS
	total	5310	10.77	≤15.47	PASS
	Ant1	5510	8.10	≤15.47	PASS
	Ant2	5510	7.63	≤15.47	PASS
	total	5510	10.88	≤15.47	PASS
	Ant1	5550	7.94	≤15.47	PASS
	Ant2	5550	7.69	≤15.47	PASS
	total	5550	10.82	≤15.47	PASS
	Ant1	5670	7.92	≤15.47	PASS
	Ant2	5670	7.29	≤15.47	PASS
	total	5670	10.63	≤15.47	PASS
	Ant1	5755	8.44	≤21.49	PASS
	Ant2	5755	8.06	≤21.49	PASS
	total	5755	11.26	≤21.49	PASS
	Ant1	5795	8.20	≤21.49	PASS
	Ant2	5795	7.77	≤21.49	PASS
	total	5795	10.63	≤21.49	PASS
11AC20MIMO	Ant1	5180	4.19	≤21.49	PASS
	Ant2	5180	3.40	≤21.49	PASS
	total	5180	6.82	≤21.49	PASS
	Ant1	5200	4.03	≤21.49	PASS
	Ant2	5200	3.78	≤21.49	PASS
	total	5200	6.91	≤21.49	PASS
	Ant1	5240	3.95	≤21.49	PASS
	Ant2	5240	3.70	≤21.49	PASS
	total	5240	6.84	≤21.49	PASS
	Ant1	5260	8.04	≤15.47	PASS
	Ant2	5260	7.81	≤15.47	PASS
	total	5260	10.94	≤15.47	PASS
	Ant1	5280	7.96	≤15.47	PASS
	Ant2	5280	7.76	≤15.47	PASS
	total	5280	10.87	≤15.47	PASS
	Ant1	5320	7.80	≤15.47	PASS
	Ant2	5320	7.53	≤15.47	PASS
	total	5320	10.68	≤15.47	PASS
	Ant1	5500	7.99	≤15.47	PASS
	Ant2	5500	7.54	≤15.47	PASS
	total	5500	10.78	≤15.47	PASS
	Ant1	5580	7.86	≤15.47	PASS
	Ant2	5580	7.82	≤15.47	PASS
	total	5580	10.85	≤15.47	PASS

	Ant1	5700	8.22	≤15.47	PASS
	Ant2	5700	7.99	≤15.47	PASS
	total	5700	11.12	≤15.47	PASS
	Ant1	5745	7.82	≤21.49	PASS
	Ant2	5745	7.56	≤21.49	PASS
	total	5745	10.70	≤21.49	PASS
	Ant1	5785	7.96	≤21.49	PASS
	Ant2	5785	7.63	≤21.49	PASS
	total	5785	10.81	≤21.49	PASS
	Ant1	5825	7.86	≤21.49	PASS
	Ant2	5825	7.78	≤21.49	PASS
	total	5825	10.83	≤21.49	PASS
11AC40MIMO	Ant1	5190	5.00	≤21.49	PASS
	Ant2	5190	4.72	≤21.49	PASS
	total	5190	7.87	≤21.49	PASS
	Ant1	5230	4.92	≤21.49	PASS
	Ant2	5230	4.60	≤21.49	PASS
	total	5230	7.77	≤21.49	PASS
	Ant1	5270	8.20	≤15.47	PASS
	Ant2	5270	7.89	≤15.47	PASS
	total	5270	11.06	≤15.47	PASS
	Ant1	5310	7.91	≤15.47	PASS
	Ant2	5310	7.51	≤15.47	PASS
	total	5310	10.73	≤15.47	PASS
	Ant1	5510	7.50	≤15.47	PASS
	Ant2	5510	7.80	≤15.47	PASS
	total	5510	10.67	≤15.47	PASS
	Ant1	5550	8.10	≤15.47	PASS
	Ant2	5550	7.84	≤15.47	PASS
	total	5550	10.98	≤15.47	PASS
	Ant1	5670	8.03	≤15.47	PASS
	Ant2	5670	7.72	≤15.47	PASS
	total	5670	10.89	≤15.47	PASS
	Ant1	5755	7.82	≤21.49	PASS
	Ant2	5755	7.50	≤21.49	PASS
	total	5755	10.67	≤21.49	PASS
	Ant1	5795	7.73	≤21.49	PASS
	Ant2	5795	7.42	≤21.49	PASS
	total	5795	10.59	≤21.49	PASS
11AC80MIMO	Ant1	5210	4.91	≤21.49	PASS
	Ant2	5210	4.56	≤21.49	PASS
	total	5210	7.75	≤21.49	PASS

	Ant1	5290	8.35	≤15.47	PASS
	Ant2	5290	8.07	≤15.47	PASS
	total	5290	11.22	≤15.47	PASS
	Ant1	5530	8.60	≤15.47	PASS
	Ant2	5530	7.99	≤15.47	PASS
	total	5530	11.32	≤15.47	PASS
	Ant1	5610	8.01	≤15.47	PASS
	Ant2	5610	7.64	≤15.47	PASS
	total	5610	10.84	≤15.47	PASS
	Ant1	5775	8.18	≤21.49	PASS
	Ant2	5775	7.76	≤21.49	PASS
	total	5775	10.98	≤21.49	PASS
11AX20MIMO	Ant1	5180	4.35	≤21.49	PASS
	Ant2	5180	3.57	≤21.49	PASS
	total	5180	6.99	≤21.49	PASS
	Ant1	5200	3.93	≤21.49	PASS
	Ant2	5200	3.72	≤21.49	PASS
	total	5200	6.84	≤21.49	PASS
	Ant1	5240	4.07	≤21.49	PASS
	Ant2	5240	3.75	≤21.49	PASS
	total	5240	6.93	≤21.49	PASS
	Ant1	5260	8.02	≤15.47	PASS
	Ant2	5260	7.71	≤15.47	PASS
	total	5260	10.88	≤15.47	PASS
	Ant1	5280	8.15	≤15.47	PASS
	Ant2	5280	7.78	≤15.47	PASS
	total	5280	10.98	≤15.47	PASS
	Ant1	5320	8.00	≤15.47	PASS
	Ant2	5320	7.65	≤15.47	PASS
	total	5320	10.84	≤15.47	PASS
	Ant1	5500	7.86	≤15.47	PASS
	Ant2	5500	8.16	≤15.47	PASS
	total	5500	11.03	≤15.47	PASS
	Ant1	5580	8.01	≤15.47	PASS
	Ant2	5580	7.71	≤15.47	PASS
	total	5580	10.87	≤15.47	PASS
	Ant1	5700	7.86	≤15.47	PASS
	Ant2	5700	7.62	≤15.47	PASS
	total	5700	10.75	≤15.47	PASS
	Ant1	5745	7.74	≤21.49	PASS
	Ant2	5745	7.50	≤21.49	PASS
	total	5745	10.63	≤21.49	PASS

	Ant1	5785	7.74	≤21.49	PASS
	Ant2	5785	7.69	≤21.49	PASS
	total	5785	10.72	≤21.49	PASS
	Ant1	5825	7.80	≤21.49	PASS
	Ant2	5825	7.47	≤21.49	PASS
	total	5825	10.65	≤21.49	PASS
11AX40MIMO	Ant1	5190	4.86	≤21.49	PASS
	Ant2	5190	4.60	≤21.49	PASS
	total	5190	7.74	≤21.49	PASS
	Ant1	5230	5.20	≤21.49	PASS
	Ant2	5230	4.86	≤21.49	PASS
	total	5230	8.04	≤21.49	PASS
	Ant1	5270	8.13	≤15.47	PASS
	Ant2	5270	7.83	≤15.47	PASS
	total	5270	10.99	≤15.47	PASS
	Ant1	5310	8.83	≤15.47	PASS
	Ant2	5310	8.41	≤15.47	PASS
	total	5310	11.63	≤15.47	PASS
	Ant1	5510	8.71	≤15.47	PASS
	Ant2	5510	8.35	≤15.47	PASS
	total	5510	11.54	≤15.47	PASS
	Ant1	5550	8.05	≤15.47	PASS
	Ant2	5550	7.67	≤15.47	PASS
	total	5550	10.87	≤15.47	PASS
	Ant1	5670	8.36	≤15.47	PASS
	Ant2	5670	7.30	≤15.47	PASS
	total	5670	10.87	≤15.47	PASS
	Ant1	5755	8.28	≤21.49	PASS
	Ant2	5755	8.07	≤21.49	PASS
	total	5755	11.19	≤21.49	PASS
	Ant1	5795	7.94	≤21.49	PASS
	Ant2	5795	7.49	≤21.49	PASS
	total	5795	10.65	≤21.49	PASS
11AX80MIMO	Ant1	5210	4.78	≤21.49	PASS
	Ant2	5210	5.24	≤21.49	PASS
	total	5210	8.03	≤21.49	PASS
	Ant1	5290	5.05	≤15.47	PASS
	Ant2	5290	4.66	≤15.47	PASS
	total	5290	7.87	≤15.47	PASS
	Ant1	5530	7.93	≤15.47	PASS
	Ant2	5530	7.80	≤15.47	PASS
	total	5530	10.87	≤15.47	PASS

	Ant1	5610	7.95	≤15.47	PASS
	Ant2	5610	7.81	≤15.47	PASS
	total	5610	10.89	≤15.47	PASS
	Ant1	5775	7.96	≤21.49	PASS
	Ant2	5775	7.64	≤21.49	PASS
	total	5775	10.81	≤21.49	PASS
11AX160MIMO	Ant1	5250_UNII-1	3.94	≤21.49	PASS
	Ant2	5250_UNII-1	3.32	≤21.49	PASS
	total	5250_UNII-1	6.65	≤21.49	PASS
	Ant1	5250_UNII-2A	3.30	≤21.49	PASS
	Ant2	5250_UNII-2A	3.02	≤21.49	PASS
	total	5250_UNII-2A	6.17	≤21.49	PASS
	Ant1	5570	7.44	≤15.47	PASS
	Ant2	5570	8.70	≤15.47	PASS
	total	5570	11.13	≤15.47	PASS

Frequency Band	ANT 1 Antenna Gain (dBi)	ANT 2 Antenna Gain (dBi)	Beamforming gain(dB)	Correlated chains directional gain (dBi)	Power Limit (dBm)
U-NII-1	9.0	9.0	2.5	14.51	≤21.49
U-NII-2A	9.0	9.0	2.5	14.51	≤15.47
U-NII-2C	9.0	9.0	2.5	14.51	≤15.47
U-NII-3	9.0	9.0	2.5	14.51	≤21.49

Unequal antenna gains, with equal transmit powers. For antenna gains given by G_1, G_2, …, G_N dBi
If transmit signals are correlated, then Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20} + \ldots + 10^{GN/20})^2 / N_{ANT}]$ dBi
[Note the "20"s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]
Directional gain = $10\log[(10^{9/20} + 10^{9/20})^2/N_{ANT}]$ dBi=12.01

Correlated chains directional gain= Directional gain+ Beamforming gain=12.01+2.5=14.51 dBi

7.5 Power Spectral Density

Test Requirement:	FCC Part15 E Section 15.407
Test Method :	ANSI C63.10:2013 & KDB 789033 D02 v02r01 FCC KDB 662911 D01 Multiple Transmitter Output v02r01
Limit:	

Frequency band (MHz)	Limit
5150-5250	≤17dBm in 1MHz for master device
	≤11dBm in 1MHz
5250-5350	≤11dBm in 1MHz
5470-5725	≤11dBm in 1MHz
5725-5850	≤30 dBm in 500 kHz
Remark: The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.	

Test setup:

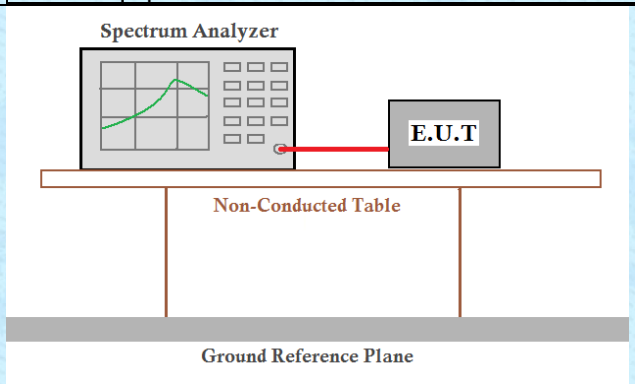

Test procedure:

1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E)2) for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, “Compute power…”.
2) Use the peak search function on the instrument to find the peak of the spectrum.
3) Make the following adjustments to the peak value of the spectrum, if applicable:
   a) If Method SA-2 or SA-2 Alternative was used, add 10 log(1/x), where x is the duty cycle, to the peak of the spectrum.
   b) If Method SA-3 Alternative was used and the linear mode was used in step E)2)g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.
4) The result is the PSD.

Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.2 for details
Test results:	Pass

Measurement Data:

Test Mode	Antenna	Freq(MHz)	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A-CDD	Ant1	5180	-6.39	≤10.99	PASS
	Ant2	5180	-5.34	≤10.99	PASS
	total	5180	-2.82	≤10.99	PASS
	Ant1	5200	-6.06	≤10.99	PASS
	Ant2	5200	-5.19	≤10.99	PASS
	total	5200	-2.59	≤10.99	PASS
	Ant1	5240	-5.67	≤10.99	PASS
	Ant2	5240	-5.52	≤10.99	PASS
	total	5240	-2.58	≤10.99	PASS
	Ant1	5260	1.07	≤4.99	PASS
	Ant2	5260	0.86	≤4.99	PASS
	total	5260	3.98	≤4.99	PASS
	Ant1	5280	1.33	≤4.99	PASS
	Ant2	5280	0.87	≤4.99	PASS
	total	5280	4.12	≤4.99	PASS
	Ant1	5320	1.62	≤4.99	PASS
	Ant2	5320	1.24	≤4.99	PASS
	total	5320	4.44	≤4.99	PASS
	Ant1	5500	1.33	≤4.99	PASS
	Ant2	5500	0.79	≤4.99	PASS
	total	5500	4.08	≤4.99	PASS
	Ant1	5580	1.46	≤4.99	PASS
	Ant2	5580	0.92	≤4.99	PASS
	total	5580	4.21	≤4.99	PASS
	Ant1	5700	1.27	≤4.99	PASS
	Ant2	5700	0.84	≤4.99	PASS
	total	5700	4.07	≤4.99	PASS
	Ant1	5745	-0.96	≤23.99	PASS
	Ant2	5745	-0.55	≤23.99	PASS
	total	5745	2.26	≤23.99	PASS
	Ant1	5785	-0.05	≤23.99	PASS
	Ant2	5785	-2.01	≤23.99	PASS
	total	5785	2.09	≤23.99	PASS
	Ant1	5825	-0.5	≤23.99	PASS
	Ant2	5825	-0.72	≤23.99	PASS
	total	5825	2.40	≤23.99	PASS
11N20MIMO	Ant1	5180	-6.67	≤10.99	PASS
	Ant2	5180	-5.08	≤10.99	PASS
	total	5180	-2.79	≤10.99	PASS
	Ant1	5200	-6.24	≤10.99	PASS
	Ant2	5200	-5.23	≤10.99	PASS
	total	5200	-2.70	≤10.99	PASS
	Ant1	5240	-5.55	≤10.99	PASS
	Ant2	5240	-6.04	≤10.99	PASS
	total	5240	-2.78	≤10.99	PASS
	Ant1	5260	1.01	≤4.99	PASS
	Ant2	5260	0.6	≤4.99	PASS
	total	5260	3.82	≤4.99	PASS
	Ant1	5280	0.77	≤4.99	PASS
	Ant2	5280	0.16	≤4.99	PASS
	total	5280	3.49	≤4.99	PASS
	Ant1	5320	0.64	≤4.99	PASS
	Ant2	5320	1.36	≤4.99	PASS
	total	5320	4.03	≤4.99	PASS
	Ant1	5500	1.17	≤4.99	PASS
	Ant2	5500	0.18	≤4.99	PASS
	total	5500	3.71	≤4.99	PASS
	Ant1	5580	1.6	≤4.99	PASS
	Ant2	5580	0.95	≤4.99	PASS

	total	5580	4.30	≤4.99	PASS
	Ant1	5700	0.57	≤4.99	PASS
	Ant2	5700	1.47	≤4.99	PASS
	total	5700	4.05	≤4.99	PASS
	Ant1	5745	-0.66	≤23.99	PASS
	Ant2	5745	-0.86	≤23.99	PASS
	total	5745	2.25	≤23.99	PASS
	Ant1	5785	-0.23	≤23.99	PASS
	Ant2	5785	-1.26	≤23.99	PASS
	total	5785	2.30	≤23.99	PASS
	Ant1	5825	-1.1	≤23.99	PASS
	Ant2	5825	-1.14	≤23.99	PASS
	total	5825	1.89	≤23.99	PASS
11N40MIMO	Ant1	5190	-9.32	≤10.99	PASS
	Ant2	5190	-9.66	≤10.99	PASS
	total	5190	-6.48	≤10.99	PASS
	Ant1	5230	-9.35	≤10.99	PASS
	Ant2	5230	-9.57	≤10.99	PASS
	total	5230	-6.45	≤10.99	PASS
	Ant1	5270	-2.34	≤4.99	PASS
	Ant2	5270	-1.57	≤4.99	PASS
	total	5270	1.07	≤4.99	PASS
	Ant1	5310	-2.3	≤4.99	PASS
	Ant2	5310	-1.3	≤4.99	PASS
	total	5310	1.24	≤4.99	PASS
	Ant1	5510	-1.68	≤4.99	PASS
	Ant2	5510	-2.33	≤4.99	PASS
	total	5510	1.02	≤4.99	PASS
	Ant1	5550	-3.51	≤4.99	PASS
	Ant2	5550	-0.17	≤4.99	PASS
	total	5550	1.48	≤4.99	PASS
	Ant1	5670	-2.36	≤4.99	PASS
	Ant2	5670	-2.82	≤4.99	PASS
	total	5670	0.43	≤4.99	PASS
	Ant1	5755	-3.59	≤23.99	PASS
	Ant2	5755	-4.68	≤23.99	PASS
	total	5755	-1.09	≤23.99	PASS
	Ant1	5795	-3.01	≤23.99	PASS
	Ant2	5795	-7.44	≤23.99	PASS
	total	5795	-1.67	≤23.99	PASS
11AC20MIMO	Ant1	5180	-5.54	≤10.99	PASS
	Ant2	5180	-4.73	≤10.99	PASS
	total	5180	-2.11	≤10.99	PASS
	Ant1	5200	-5.21	≤10.99	PASS
	Ant2	5200	-5.36	≤10.99	PASS
	total	5200	-2.27	≤10.99	PASS
	Ant1	5240	-5.47	≤10.99	PASS
	Ant2	5240	-6.14	≤10.99	PASS
	total	5240	-2.78	≤10.99	PASS
	Ant1	5260	0.19	≤4.99	PASS
	Ant2	5260	-0.01	≤4.99	PASS
	total	5260	3.10	≤4.99	PASS
	Ant1	5280	0.38	≤4.99	PASS
	Ant2	5280	-0.39	≤4.99	PASS
	total	5280	3.02	≤4.99	PASS
	Ant1	5320	0.37	≤4.99	PASS
	Ant2	5320	0.64	≤4.99	PASS
	total	5320	3.52	≤4.99	PASS
	Ant1	5500	1.29	≤4.99	PASS
	Ant2	5500	-0.28	≤4.99	PASS
	total	5500	3.59	≤4.99	PASS
	Ant1	5580	0.31	≤4.99	PASS
	Ant2	5580	-0.1	≤4.99	PASS

	total	5580	3.12	≤4.99	PASS
	Ant1	5700	0.18	≤4.99	PASS
	Ant2	5700	0.45	≤4.99	PASS
	total	5700	3.33	≤4.99	PASS
	Ant1	5745	-1.97	≤23.99	PASS
	Ant2	5745	-1.75	≤23.99	PASS
	total	5745	1.15	≤23.99	PASS
	Ant1	5785	-1.44	≤23.99	PASS
	Ant2	5785	-0.92	≤23.99	PASS
	total	5785	1.84	≤23.99	PASS
	Ant1	5825	-1.41	≤23.99	PASS
	Ant2	5825	-2.12	≤23.99	PASS
	total	5825	1.26	≤23.99	PASS
11AC40MIMO	Ant1	5190	-8.9	≤10.99	PASS
	Ant2	5190	-9.24	≤10.99	PASS
	total	5190	-6.06	≤10.99	PASS
	Ant1	5230	-9.5	≤10.99	PASS
	Ant2	5230	-8.79	≤10.99	PASS
	total	5230	-6.12	≤10.99	PASS
	Ant1	5270	-3.83	≤4.99	PASS
	Ant2	5270	-4	≤4.99	PASS
	total	5270	-0.90	≤4.99	PASS
	Ant1	5310	-3.2	≤4.99	PASS
	Ant2	5310	-2.91	≤4.99	PASS
	total	5310	-0.04	≤4.99	PASS
	Ant1	5510	-1.92	≤4.99	PASS
	Ant2	5510	-2.76	≤4.99	PASS
	total	5510	0.69	≤4.99	PASS
	Ant1	5550	-1.56	≤4.99	PASS
	Ant2	5550	-2.77	≤4.99	PASS
	total	5550	0.89	≤4.99	PASS
	Ant1	5670	-3.29	≤4.99	PASS
	Ant2	5670	-2.81	≤4.99	PASS
	total	5670	-0.03	≤4.99	PASS
	Ant1	5755	-3.83	≤23.99	PASS
	Ant2	5755	-5.22	≤23.99	PASS
	total	5755	-1.46	≤23.99	PASS
	Ant1	5795	-3.55	≤23.99	PASS
	Ant2	5795	-6.13	≤23.99	PASS
	total	5795	-1.64	≤23.99	PASS
11AC80MIMO	Ant1	5210	-11.83	≤10.99	PASS
	Ant2	5210	-10.85	≤10.99	PASS
	total	5210	-8.30	≤10.99	PASS
	Ant1	5290	-5.87	≤4.99	PASS
	Ant2	5290	-5.86	≤4.99	PASS
	total	5290	-2.85	≤4.99	PASS
	Ant1	5530	-6.18	≤4.99	PASS
	Ant2	5530	-5.67	≤4.99	PASS
	total	5530	-2.91	≤4.99	PASS
	Ant1	5610	-6.21	≤4.99	PASS
	Ant2	5610	-4.92	≤4.99	PASS
	total	5610	-2.51	≤4.99	PASS
	Ant1	5775	-8.42	≤23.99	PASS
	Ant2	5775	-6.85	≤23.99	PASS
	total	5775	-4.55	≤23.99	PASS
11AX20MIMO	Ant1	5180	-4.7	≤10.99	PASS
	Ant2	5180	-5.51	≤10.99	PASS
	total	5180	-2.08	≤10.99	PASS
	Ant1	5200	-4.75	≤10.99	PASS
	Ant2	5200	-5.87	≤10.99	PASS
	total	5200	-2.26	≤10.99	PASS
	Ant1	5240	-5.29	≤10.99	PASS
	Ant2	5240	-6.67	≤10.99	PASS

	total	5240	-2.92	≤10.99	PASS
	Ant1	5260	0.04	≤4.99	PASS
	Ant2	5260	0.35	≤4.99	PASS
	total	5260	3.21	≤4.99	PASS
	Ant1	5280	-0.05	≤4.99	PASS
	Ant2	5280	0.08	≤4.99	PASS
	total	5280	3.03	≤4.99	PASS
	Ant1	5320	0	≤4.99	PASS
	Ant2	5320	0.84	≤4.99	PASS
	total	5320	3.45	≤4.99	PASS
	Ant1	5500	0.24	≤4.99	PASS
	Ant2	5500	-0.61	≤4.99	PASS
	total	5500	2.85	≤4.99	PASS
	Ant1	5580	0.28	≤4.99	PASS
	Ant2	5580	-0.03	≤4.99	PASS
	total	5580	3.14	≤4.99	PASS
	Ant1	5700	0.53	≤4.99	PASS
	Ant2	5700	0.32	≤4.99	PASS
	total	5700	3.44	≤4.99	PASS
	Ant1	5745	-1.83	≤23.99	PASS
	Ant2	5745	-1.77	≤23.99	PASS
	total	5745	1.21	≤23.99	PASS
	Ant1	5785	-1.31	≤23.99	PASS
	Ant2	5785	-2.22	≤23.99	PASS
	total	5785	1.27	≤23.99	PASS
	Ant1	5825	-2.46	≤23.99	PASS
	Ant2	5825	-1.93	≤23.99	PASS
	total	5825	0.82	≤23.99	PASS
11AX40MIMO	Ant1	5190	-9.65	≤10.99	PASS
	Ant2	5190	-6.96	≤10.99	PASS
	total	5190	-5.09	≤10.99	PASS
	Ant1	5230	-9.14	≤10.99	PASS
	Ant2	5230	-8.14	≤10.99	PASS
	total	5230	-5.60	≤10.99	PASS
	Ant1	5270	-3.7	≤4.99	PASS
	Ant2	5270	-3.47	≤4.99	PASS
	total	5270	-0.57	≤4.99	PASS
	Ant1	5310	-2.67	≤4.99	PASS
	Ant2	5310	-2.88	≤4.99	PASS
	total	5310	0.24	≤4.99	PASS
	Ant1	5510	-2.38	≤4.99	PASS
	Ant2	5510	-2.7	≤4.99	PASS
	total	5510	0.47	≤4.99	PASS
	Ant1	5550	-1.93	≤4.99	PASS
	Ant2	5550	-3	≤4.99	PASS
	total	5550	0.58	≤4.99	PASS
	Ant1	5670	-3.18	≤4.99	PASS
	Ant2	5670	-3.3	≤4.99	PASS
	total	5670	-0.23	≤4.99	PASS
	Ant1	5755	-4.62	≤23.99	PASS
	Ant2	5755	-5.52	≤23.99	PASS
	total	5755	-2.04	≤23.99	PASS
	Ant1	5795	-4.08	≤23.99	PASS
	Ant2	5795	-6.1	≤23.99	PASS
	total	5795	-1.96	≤23.99	PASS
11AX80MIMO	Ant1	5210	-11.77	≤10.99	PASS
	Ant2	5210	-11.35	≤10.99	PASS
	total	5210	-8.54	≤10.99	PASS
	Ant1	5290	-5.86	≤4.99	PASS
	Ant2	5290	-5.65	≤4.99	PASS
	total	5290	-2.74	≤4.99	PASS
	Ant1	5530	-5.84	≤4.99	PASS
	Ant2	5530	-5.39	≤4.99	PASS

	total	5530	-2.60	≤4.99	PASS
	Ant1	5610	-5.62	≤4.99	PASS
	Ant2	5610	-5.69	≤4.99	PASS
	total	5610	-2.64	≤4.99	PASS
	Ant1	5775	-8.01	≤23.99	PASS
	Ant2	5775	-7.85	≤23.99	PASS
	total	5775	-4.92	≤23.99	PASS
11AX160MIMO	Ant1	5250_UNII-1	-11.29	≤4.99	PASS
	Ant2	5250_UNII-1	-11.12	≤4.99	PASS
	total	5250_UNII-1	-8.19	≤4.99	PASS
	Ant1	5250_UNII-2A	-11.72	≤4.99	PASS
	Ant2	5250_UNII-2A	-10.77	≤4.99	PASS
	total	5250_UNII-2A	-8.21	≤4.99	PASS
	Ant1	5570	-9.21	≤4.99	PASS
	Ant2	5570	-8.49	≤4.99	PASS
	total	5570	-5.82	≤4.99	PASS

Note：

1. The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.
2. For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 300kHz and VBW at 1500kHz if the spectrum analyzer does not have 500 kHz RBW. Then, add 10 log (500 kHz/300 kHz) to the measured result, i.e. 2.22 dB.
3. During the test of U-NII 3 PSD, the measurement result with RBW=300kHz has been added 2.22 dB by compensating offset, offset=cable loss+duty factor+10log(500kHz/300kHz).
4. Beamforming conducted power less than no beamforming conducted power, so only no beamforming conducted power spectral density was recored.

Frequency Band	ANT 1 Antenna Gain (dBi)	ANT 2 Antenna Gain (dBi)	Correlated chains directional gain (dBi)	Power Spectral Density Limit (dBm)
U-NII-1	9.0	9.0	12.01	10.99
U-NII-2A	9.0	9.0	12.01	4.99
U-NII-2C	9.0	9.0	12.01	4.99
U-NII-3	9.0	9.0	12.01	23.99

Unequal antenna gains, with equal transmit powers. For antenna gains given by G_1, G_2, …, G_N dBi
If transmit signals are correlated, then Directional gain = 10 log[$(10^{G1/20} + 10^{G2/20} + \ldots + 10^{GN/20})^2 / N_{ANT}$] dBi
[Note the “20”s in the denominator of each exponent and the square of the sum of terms; the object is to combine the signal levels coherently.]
Directional gain = 10log[$(10^{9/20} + 10^{9/20})^2/N_{ANT}$] dBi=12.01 dBi

11A-CDD_Ant1_5180

11A-CDD_Ant2_5180

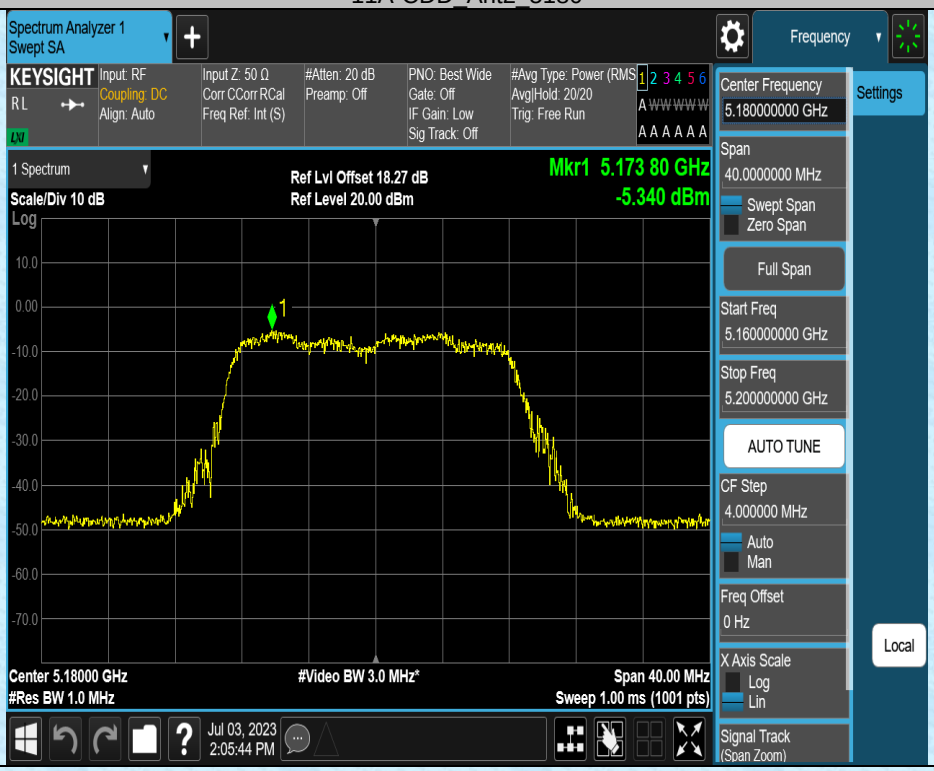

11A-CDD_Ant1_5200

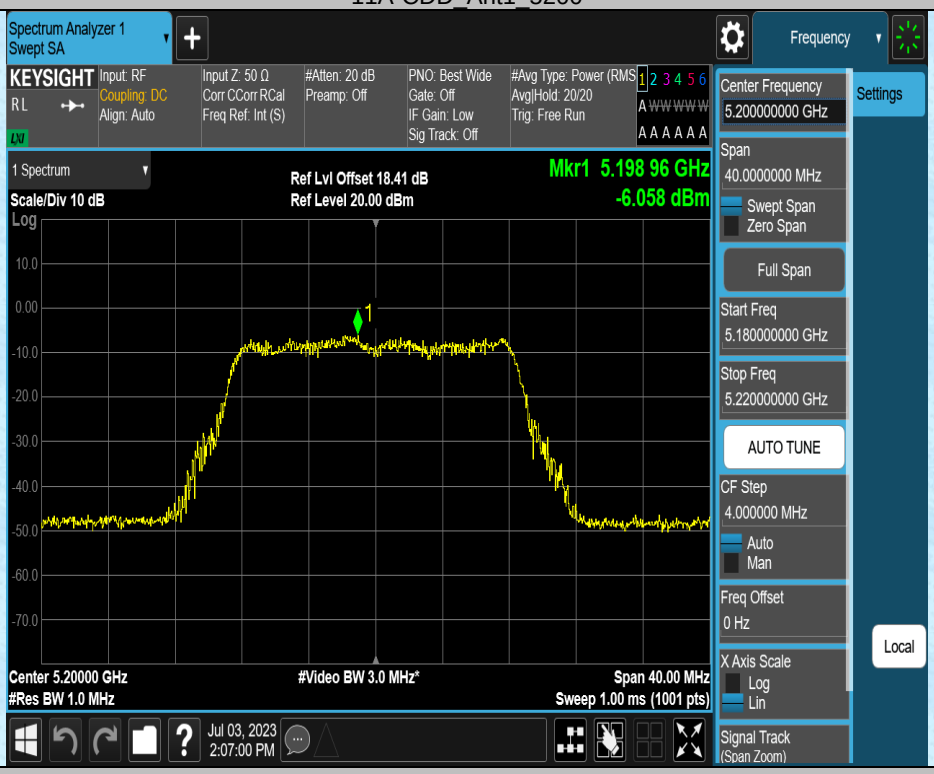

11A-CDD_Ant2_5200

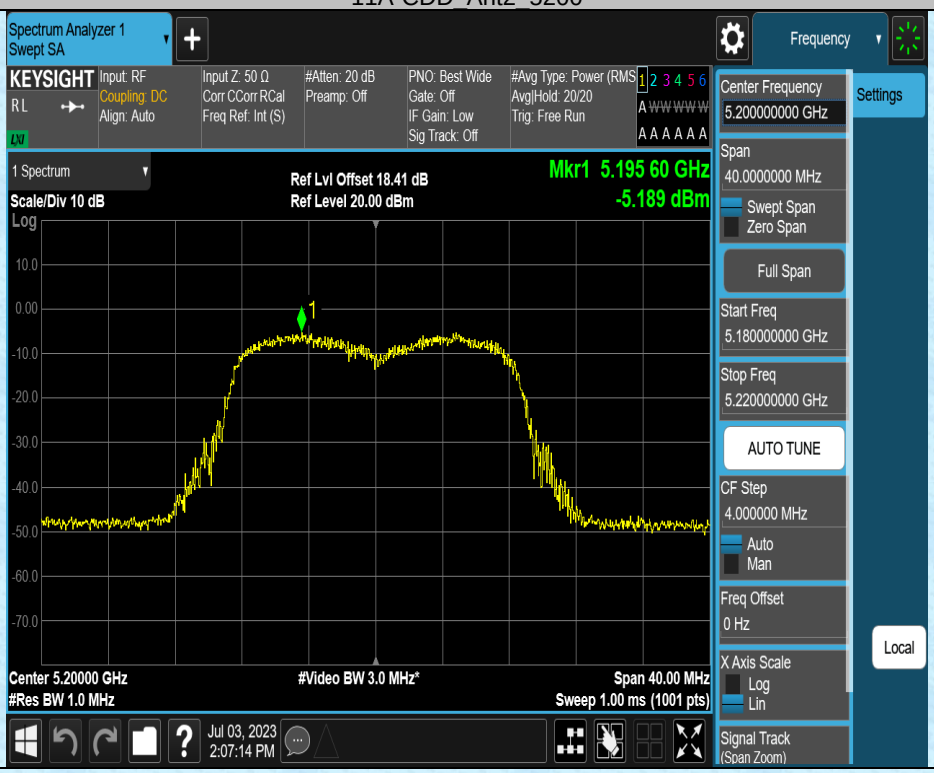

11A-CDD_Ant1_5240

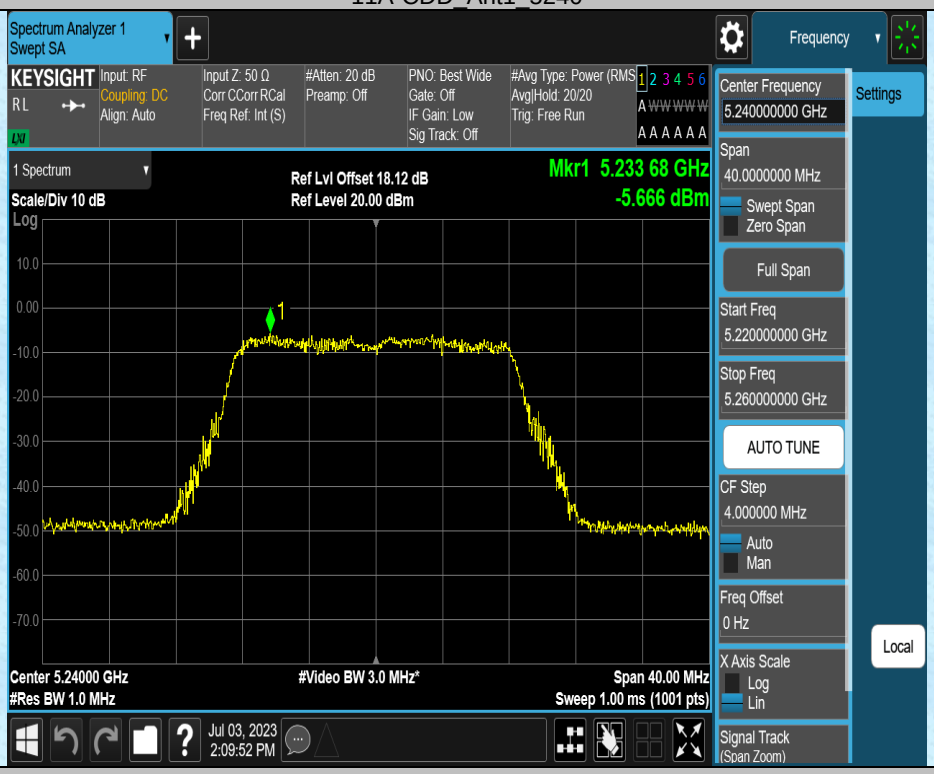

11A-CDD_Ant2_5240

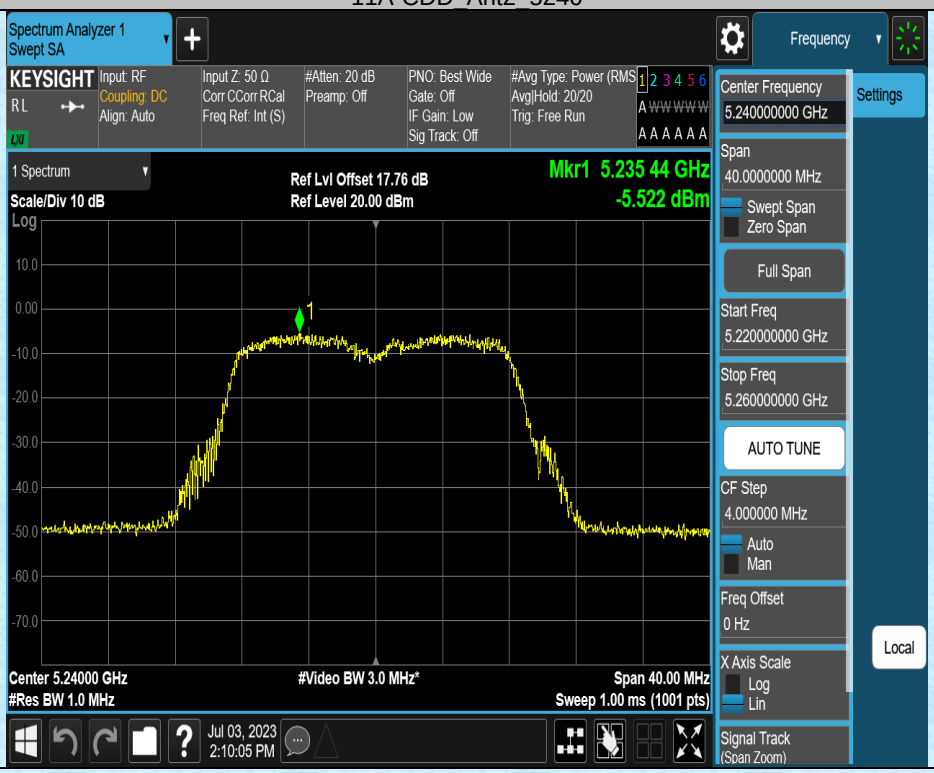

11A-CDD_Ant1_5260

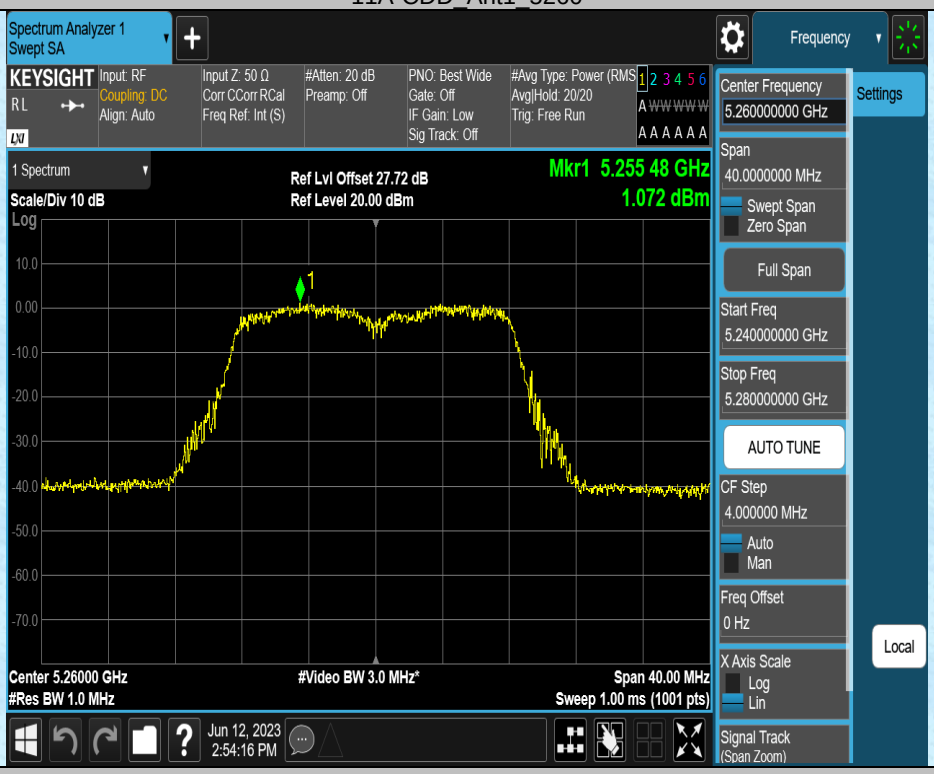

11A-CDD_Ant2_5260

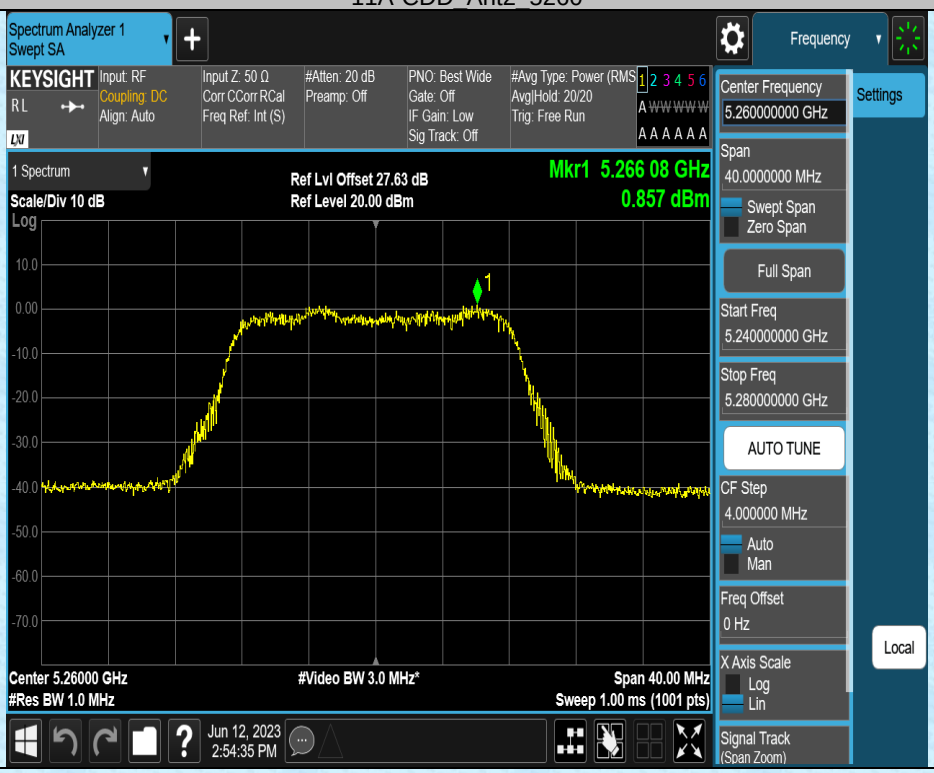

11A-CDD_Ant1_5280

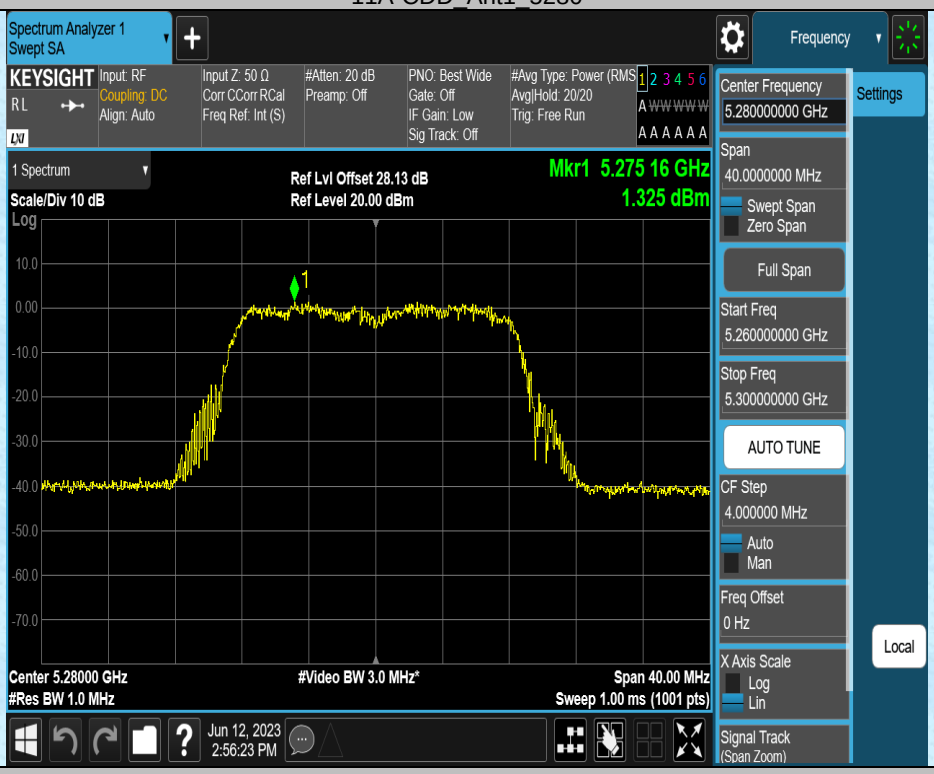
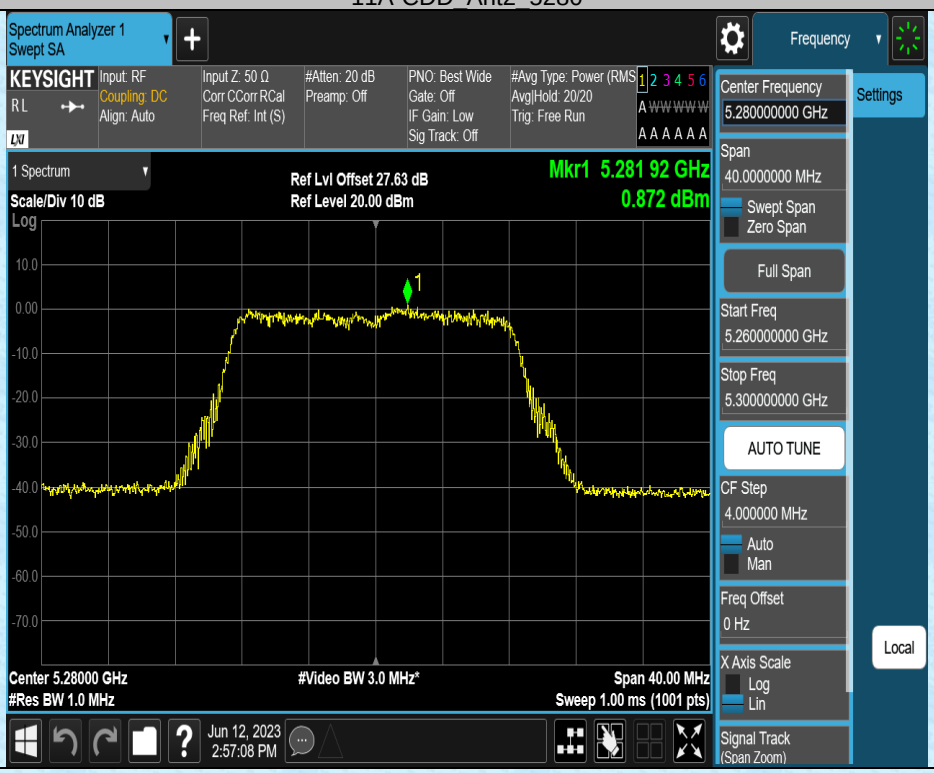
11A-CDD_Ant2_5280