

# Ucfer

## Your safer home


Version 1.0

### Packing List



**Note:** The quantity of the camera and other accessories might vary with different models, and the actual product shall prevail.

### Camera Introduction

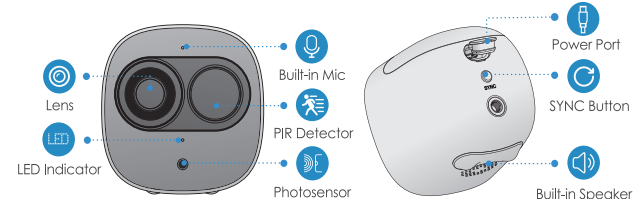


**Note:** Press the SYNC button to pair with the base station.  
Press and hold the SYNC button for 8 s to reset the camera.


The pattern of the LED indicator is included in the following table.

| LED Indicator Status                   | Device Status                                                                                     |
|----------------------------------------|---------------------------------------------------------------------------------------------------|
| Off                                    | <ul style="list-style-type: none"><li>● Sleeping mode</li><li>● Run out of battery</li></ul>      |
| Green light on                         | <ul style="list-style-type: none"><li>● Alarm is triggered</li><li>● Instructed to wake</li></ul> |
| Green light flashing                   | Reconnecting Wi-Fi                                                                                |
| Green light quick flashing             | Waiting for pairing with the base station                                                         |
| Green light stay on for 10 s, then off | Pairing succeeded                                                                                 |
| Red light stay on for 10 s, then off   | Pairing timeout                                                                                   |
| Red light stay on for 1 s, then off    | Reset completed                                                                                   |

### Installing Battery

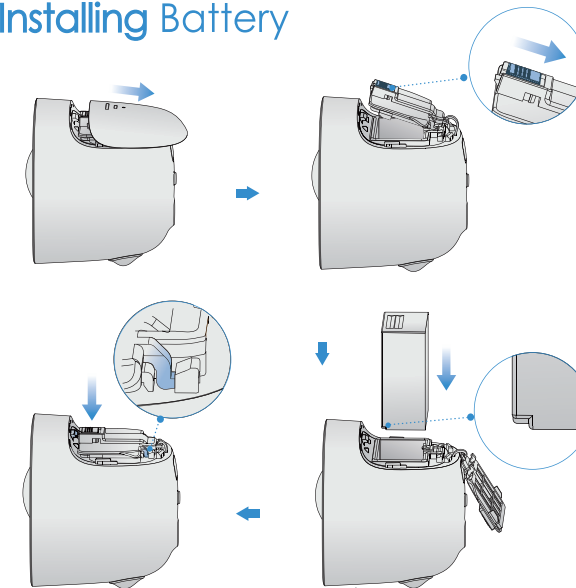


### Base station Introduction

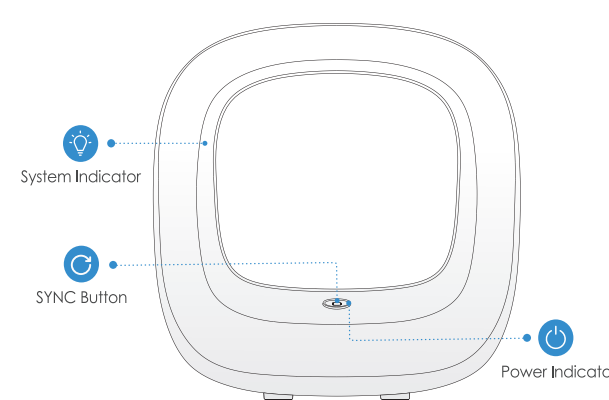

The pattern of the power indicator is included in the following table.

| Power Indicator Status | Device Status       |
|------------------------|---------------------|
| Off                    | Not powered up      |
| Blue light stay on     | Powered up properly |

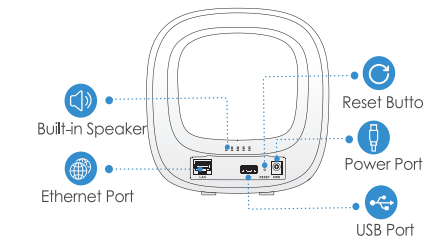

**Note:** Press the SYNC button to pair with cameras.  
Press and hold the Reset button for 5 s to reset the base station.  
You can connect USB drive to the USB port to record video.

**Caution:** The base station might format the USB drive, be sure to backup your data.  
The pattern of the system indicator is included in the following table.

| System Indicator Status                | Device Status                                                                                 |
|----------------------------------------|-----------------------------------------------------------------------------------------------|
| Off                                    | <ul style="list-style-type: none"><li>● Not powered up</li><li>● Operating properly</li></ul> |
| Blue light flashing                    | Booting up                                                                                    |
| Yellow light flashing                  | Waiting for network connection                                                                |
| White light flashing                   | Waiting for pairing with cameras                                                              |
| White light stay on for 10 s, then off | Pairing succeeded                                                                             |
| Red light stay on for 10 s, then off   | Pairing failed                                                                                |
| White light stay on for 1 s, then off  | Reset completed                                                                               |
| White light quick flashing             | Firmware updating                                                                             |



## Safety Instructions

- Do not short circuit the battery with other metal.
- Do not heat the battery or throw it into fire.
- Do not take apart the battery or press it to make it deformed.
- Keep the battery away from children.
- It is recommended to use the original battery.
- Do not use the battery at temperature above 60°C/140°F.
- The battery cannot be charged at temperature below 0°C/32°F.
- Recycle the waste battery as local regulations instructed.

## Support

- Support Email: support@ucfer.com
- FAQ: Scan the QR code below



## Adding Base station

### Step 1

Power up the base station, and then connect the Ethernet port to your router with the network cable.

### Step 2

The system indicator stays on with white light for 10 s, and then off, which means the base station is connected to the network.

### Step 3

Scan the following QR code or search "Ucfer" in Google Play or App Store to download and install the Ucfer App.

### Step 4

Run Ucfer App, and then register an account for first use.

### Step 5

Do the following operations to finish adding base station.

- Note:**
- If you have more than one camera, do step 5 to add them one by one.
  - If the Wi-Fi network changed or the indicator status goes wrong, reset the camera, and then do step 5 to add it again.



## Pairing Camera

### Step 1

On the base station: Press the SYNC button, and then the system indicator on the base station flashes with white light.

### Step 2

On the camera: Press the SYNC button, and then the indicator on the camera flashes with green light.



**Note:** You can pair six cameras at most with one base station, and pair one camera at a time. Keep the distance of the base station and the camera within 30 cm (12 inches) during pairing.


### Step 3

The pairing starts, and the indicators flash as described below:

- The system indicator on the base station stays on with white light for 10 s, and then off.
  - The indicator on the camera stays on with green light for 10 s, and then off.
- The pairing succeeded then.

## Installing Camera

**Note:** Make sure the mounting surface is strong enough to hold at least three times the device weight.

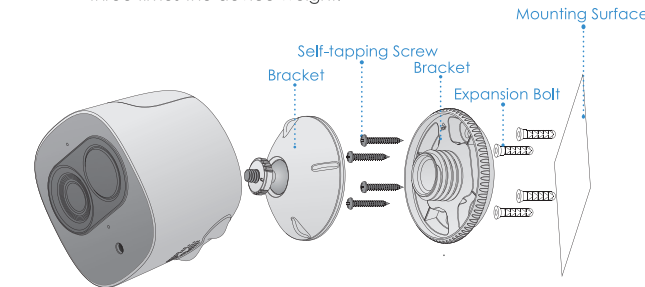

**Step1** Drill screw holes on the mounting surface as the positioning map shows, and then put in the expansion bolts.

**Step2** Open the bracket, and then attach the bottom of the bracket to the mounting surface with the self-tapping screws.

**Step3** Attach the other half of the bracket to the camera, then adjust the lens to the ideal angle, and then fix the bracket.