


[TestMode: TX high channel]; [Polarity: Vertical]

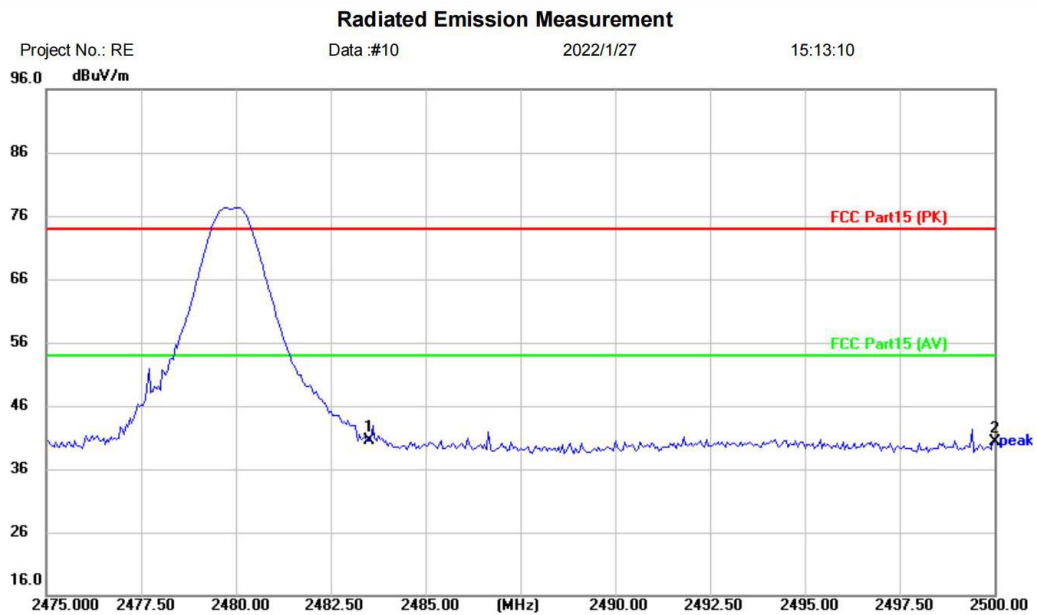

Site: Polarization: **Vertical** Temperature: (C)
Limit: FCC Part15 (PK) Power: Humidity: %RH
EUT: Trenbader Bravo Gallery Gallery Wi
M/N: BGA
Mode: TX-H
Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	2483.500	43.60	-3.14	40.46	74.00	-33.54	peak	
2		2500.000	43.35	-3.08	40.27	74.00	-33.73	peak	

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass


16 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25°C
Humidity	52%

16.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

16.2 BLOCK DIAGRAM OF TEST SETUP

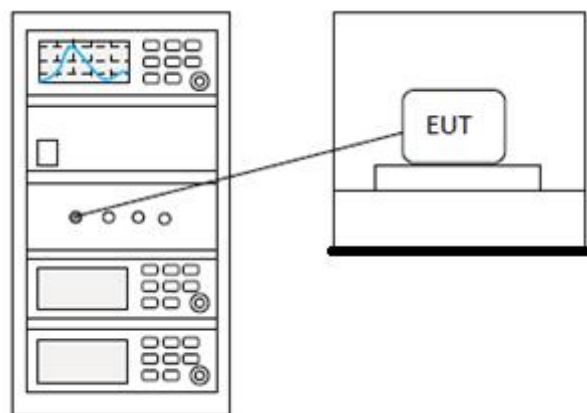

16.3 TEST DATA**Pass: Please Refer To Appendix: For Details**

BlueAsia


17 DWELL TIME

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.4
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25°C
Humidity	52%

17.1 LIMITS

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

17.2 BLOCK DIAGRAM OF TEST SETUP

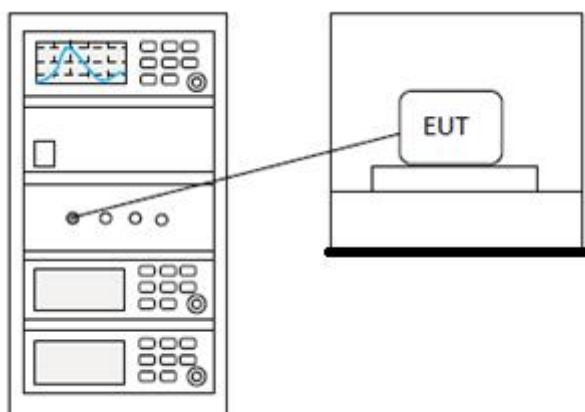

17.3 TEST DATA**Pass: Please Refer To Appendix: For Details**

BlueAsia


18 HOPPING CHANNEL NUMBER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.3
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25°C
Humidity	52%

18.1 LIMITS

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

18.2 BLOCK DIAGRAM OF TEST SETUP

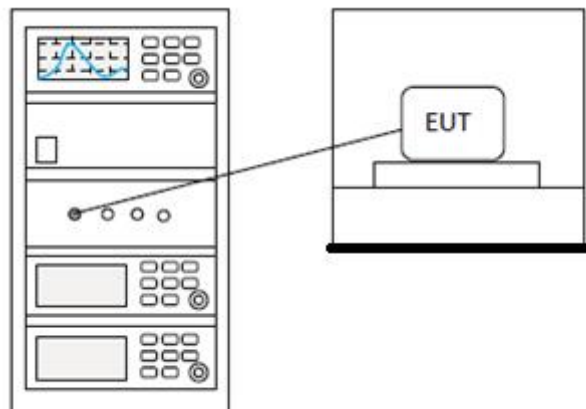

18.3 TEST DATA

Pass: Please Refer To Appendix: For Details


19 CARRIER FREQUENCIES SEPARATION

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25°C
Humidity	52%

19.1 LIMITS

Limit:	2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W
---------------	--

19.2 BLOCK DIAGRAM OF TEST SETUP

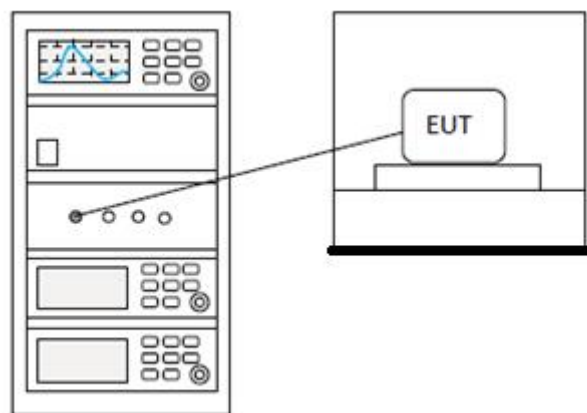


19.3 TEST DATA

Pass: Please Refer To Appendix: For Details
--

20 20DB BANDWIDTH

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.7
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Sven
Temperature	25°C
Humidity	52%

20.1 BLOCK DIAGRAM OF TEST SETUP

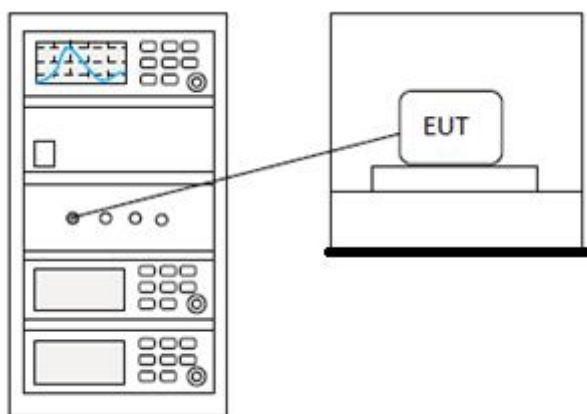

20.2 TEST DATA


Pass: Please Refer To Appendix: For Details

21 APPENDIX


21.1 MAXIMUM CONDUCTED OUTPUT POWER

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	3.803	3.803	21	Pass
NVNT	1-DH1	2441	Ant1	0.732	0.732	21	Pass
NVNT	1-DH1	2480	Ant1	-1.857	-1.857	21	Pass


Power NVNT 1-DH1 2402MHz Ant1

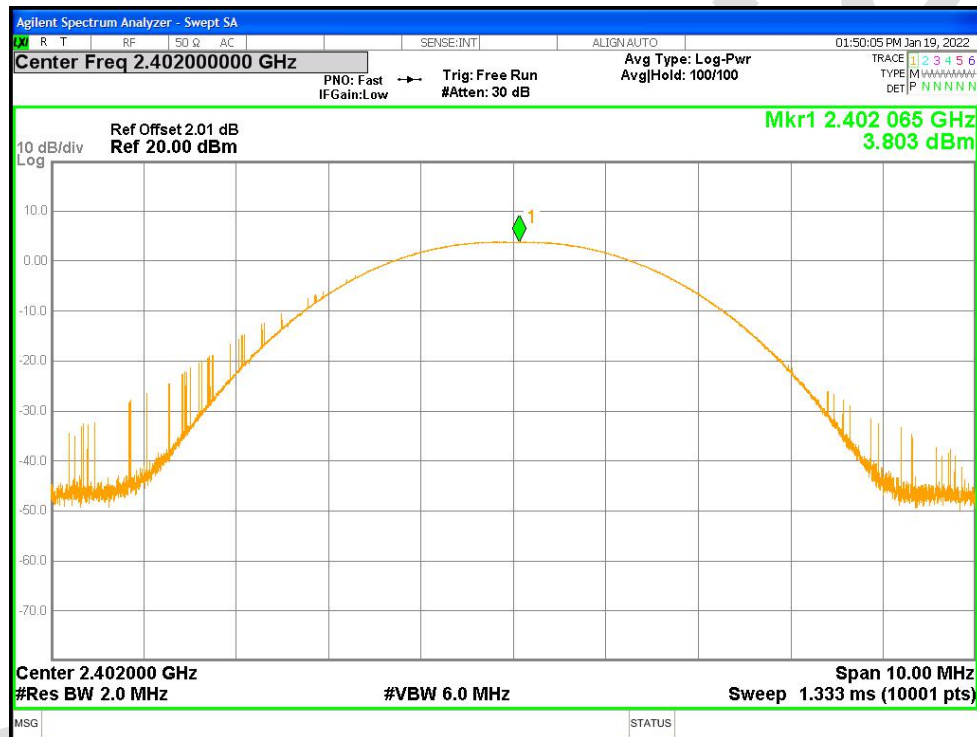

Power NVNT 1-DH1 2441MHz Ant1

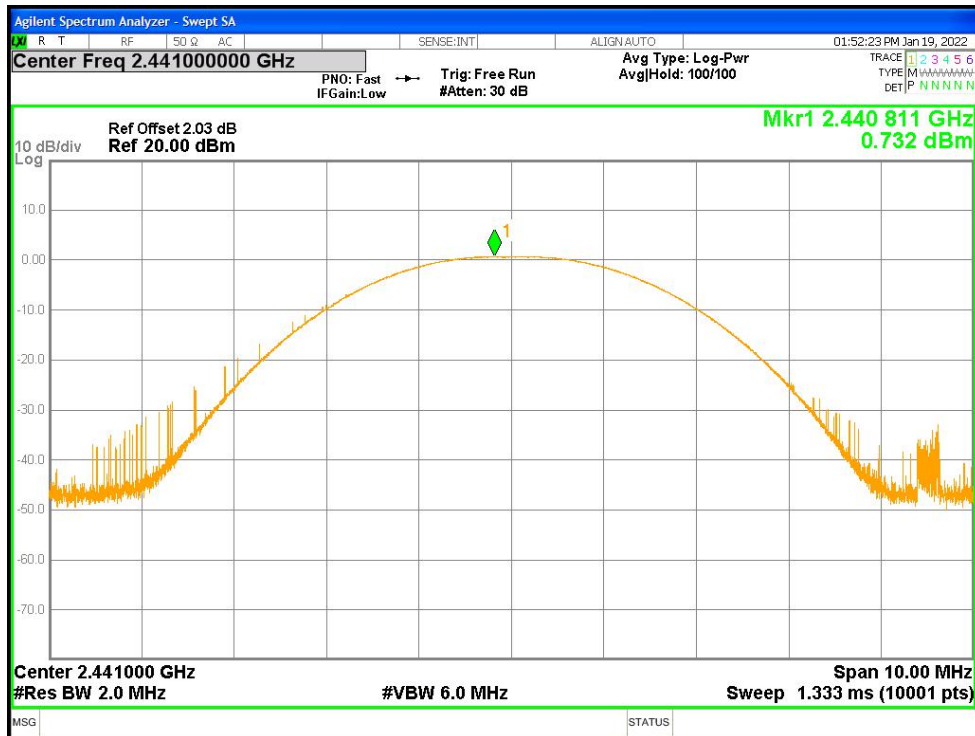


Power NVNT 1-DH1 2480MHz Ant1

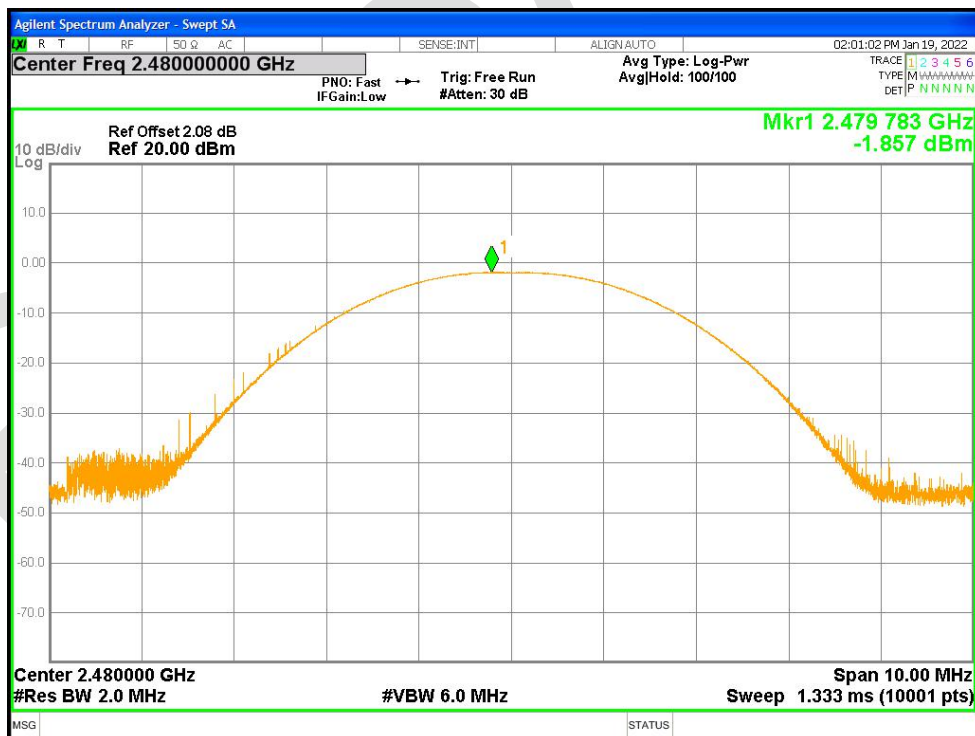


21.2 -20DB BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant1	1.014	0	Pass
NVNT	1-DH1	2441	Ant1	0.991	0	Pass
NVNT	1-DH1	2480	Ant1	1.01	0	Pass


-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1

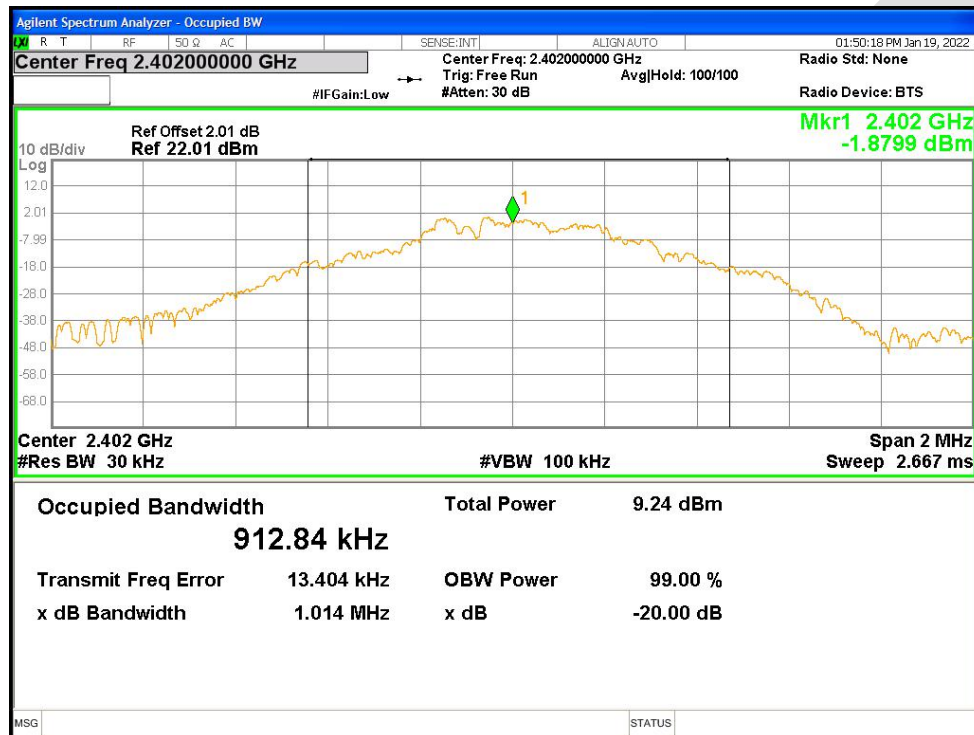

-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1

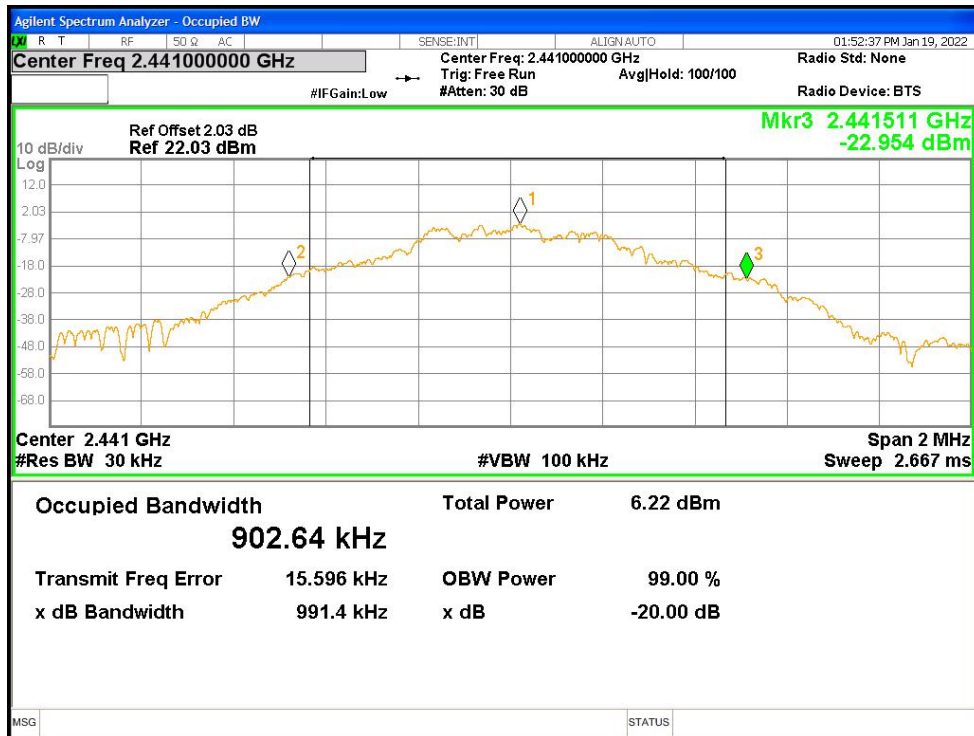


-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

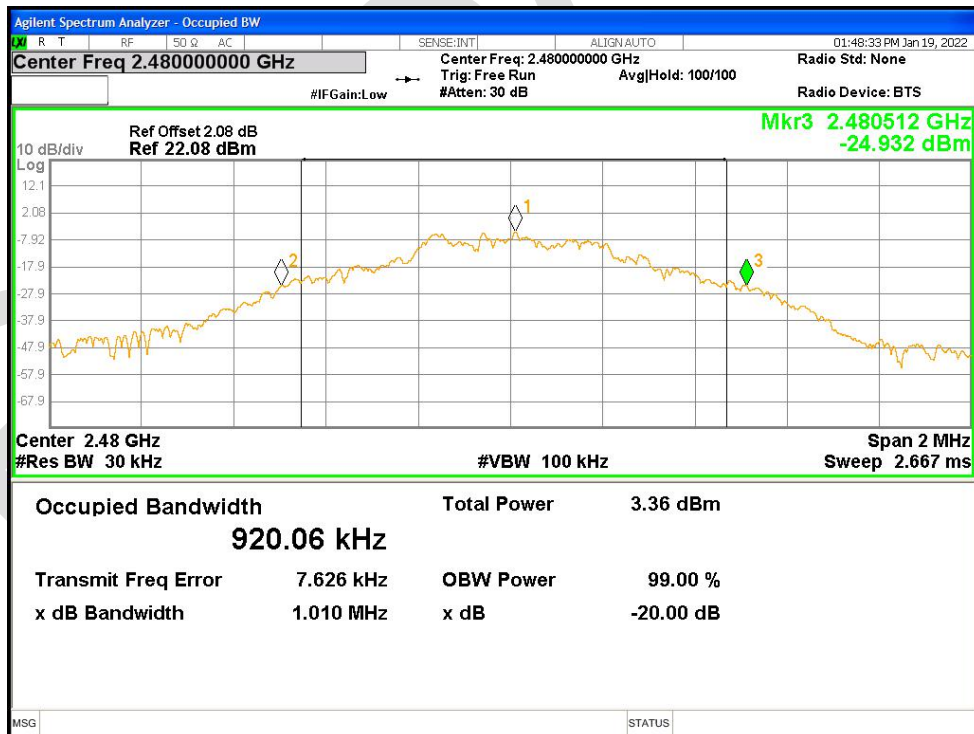


21.3 OCCUPIED CHANNEL BANDWIDTH

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH1	2402	Ant1	0.9178704424
NVNT	1-DH1	2441	Ant1	0.8797261114
NVNT	1-DH1	2480	Ant1	0.9064813761


OBW NVNT 1-DH1 2402MHz Ant1

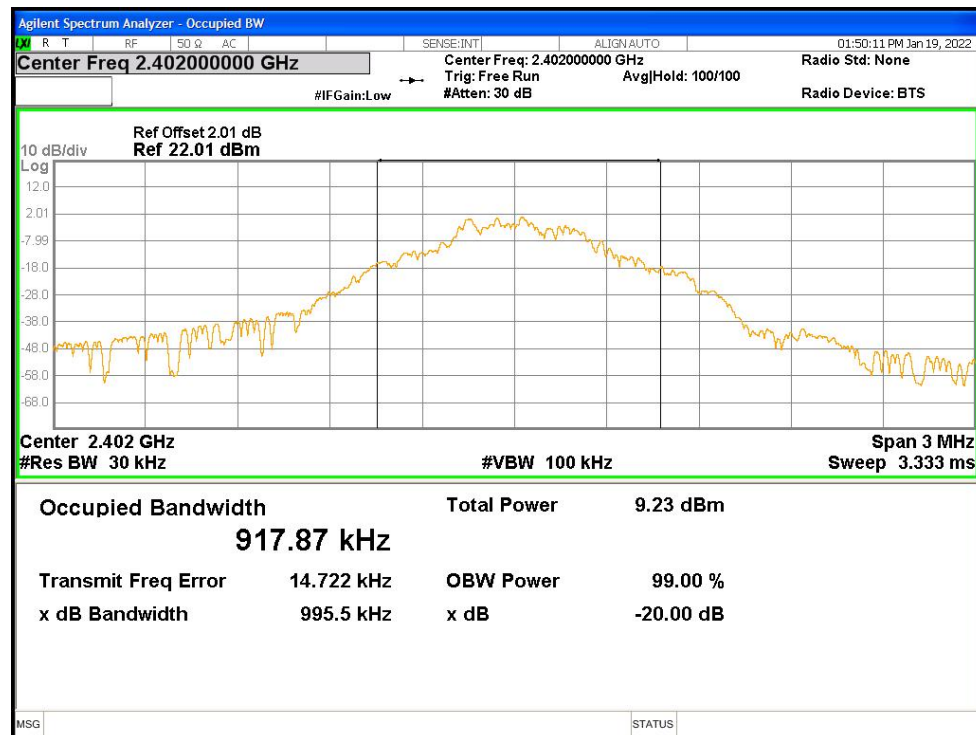

OBW NVNT 1-DH1 2441MHz Ant1

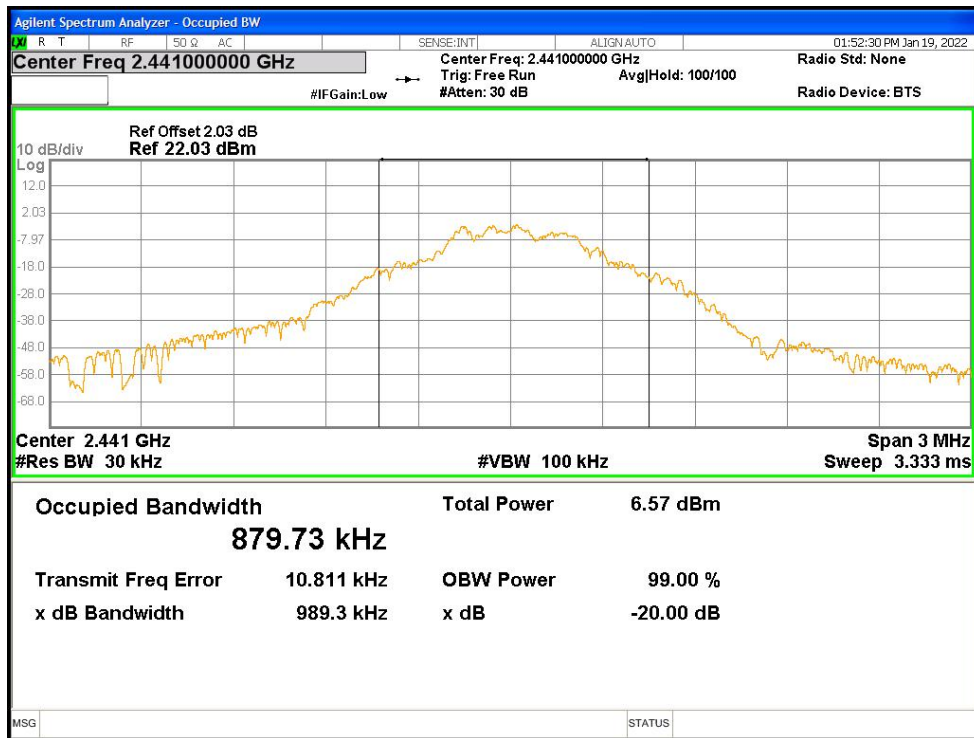

OBW NVNT 1-DH1 2480MHz Ant1

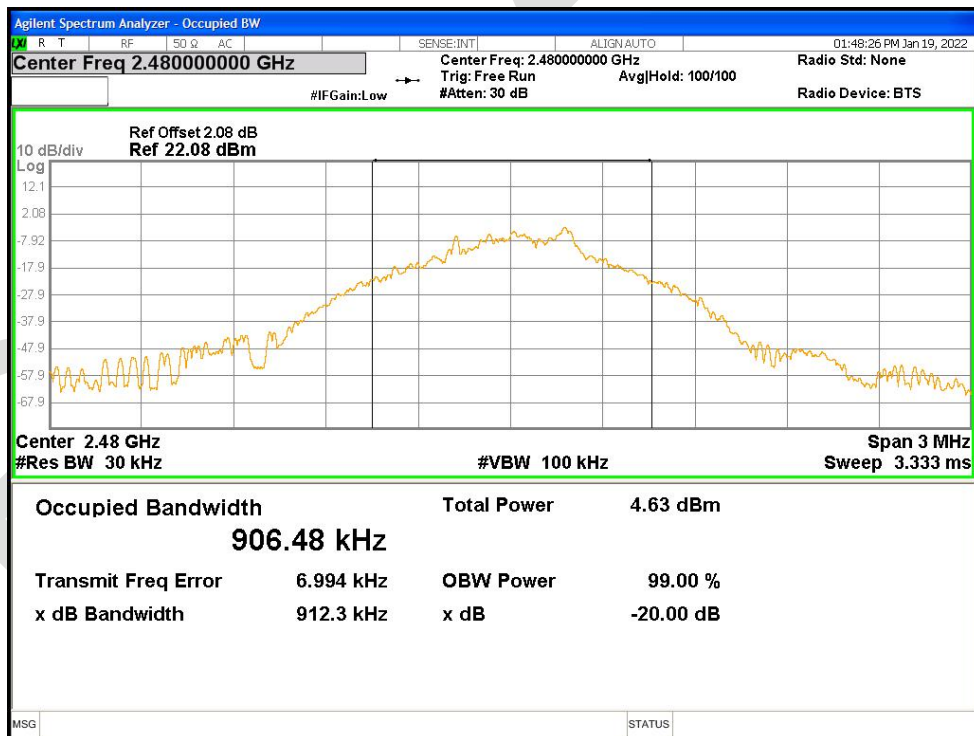


21.4 BAND EDGE

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	No-Hopping	-52.95	-20	Pass
NVNT	1-DH1	2480	Ant1	No-Hopping	-53.63	-20	Pass

Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Ref




Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Emission

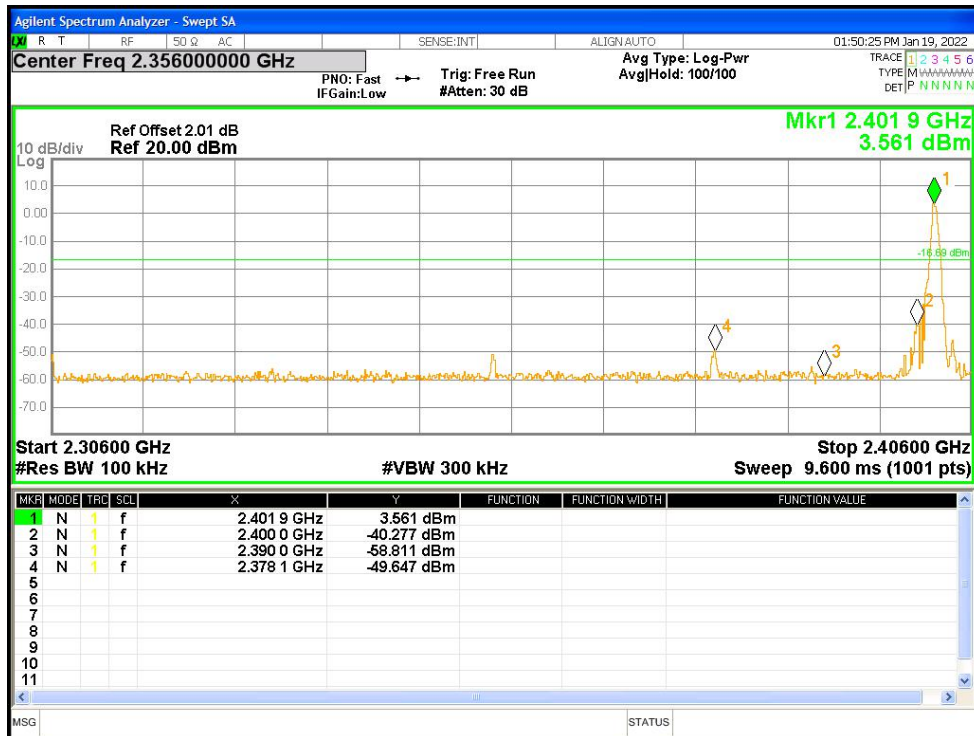

Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Ref



Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Emission

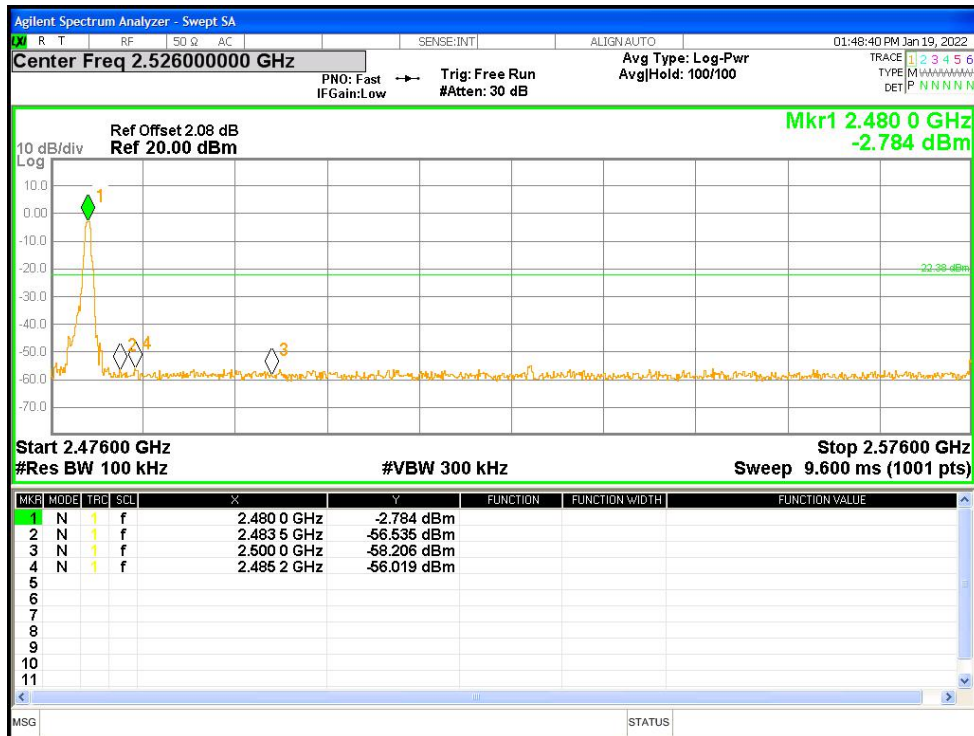


21.5 BAND EDGE(HOPPING)

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	Hopping	-49.14	-20	Pass
NVNT	1-DH1	2480	Ant1	Hopping	-49.84	-20	Pass

Band Edge(Hopping) NVNT 1-DH1 2402MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 1-DH1 2402MHz Ant1 Hopping Emission

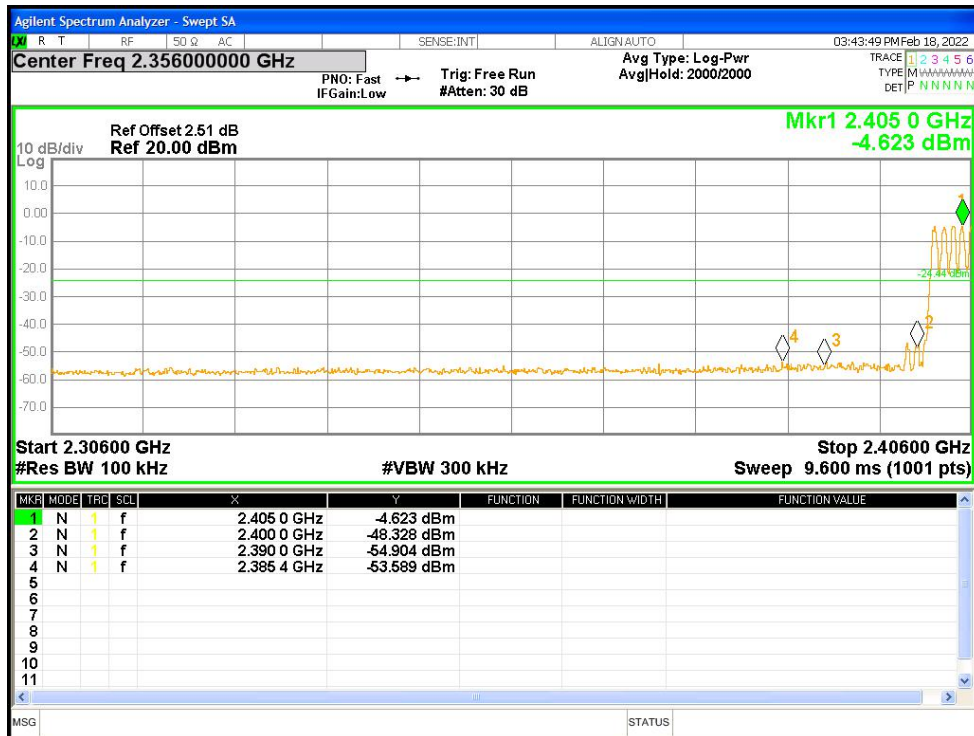

Band Edge(Hopping) NVNT 1-DH1 2480MHz Ant1 Hopping Ref




Band Edge(Hopping) NVNT 1-DH1 2480MHz Ant1 Hopping Emission

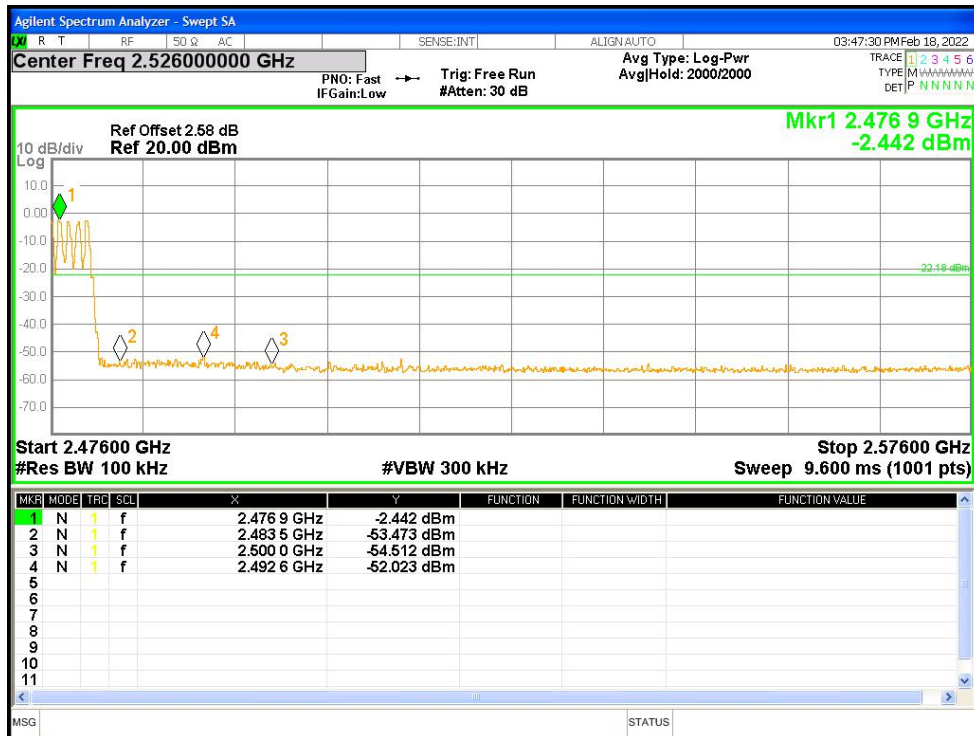


21.6 CONDUCTED RF SPURIOUS EMISSION

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	-23.86	-20	Pass
NVNT	1-DH1	2441	Ant1	-25.94	-20	Pass
NVNT	1-DH1	2480	Ant1	-27.62	-20	Pass


Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Ref

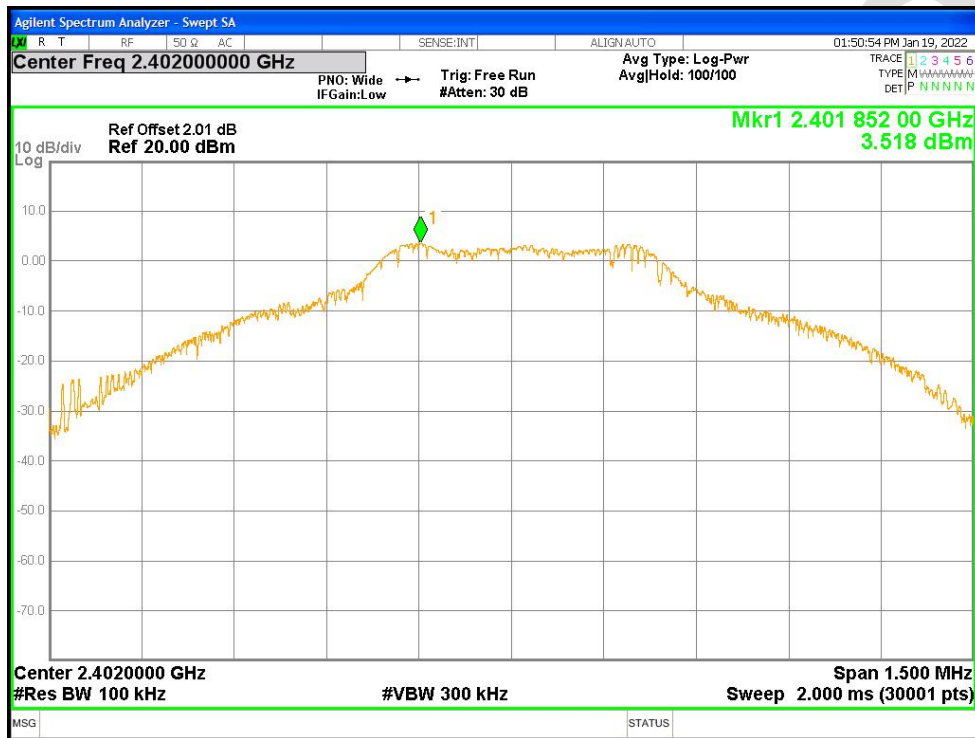


Tx. Spurious NVNT 1-DH1 2402MHz Ant1 Emission

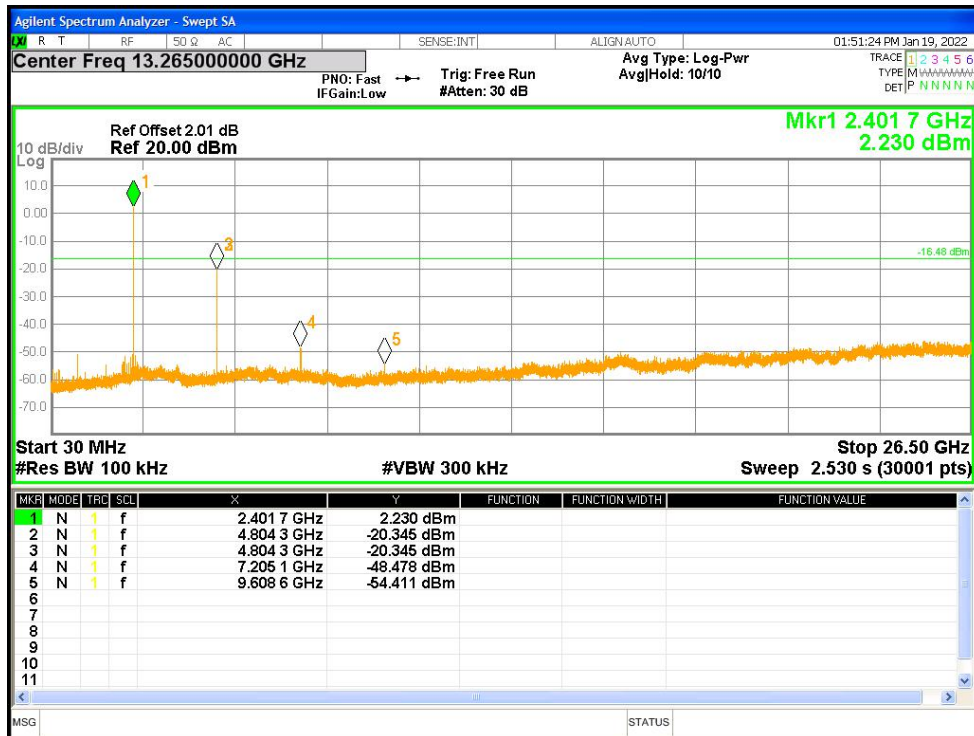


Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Ref

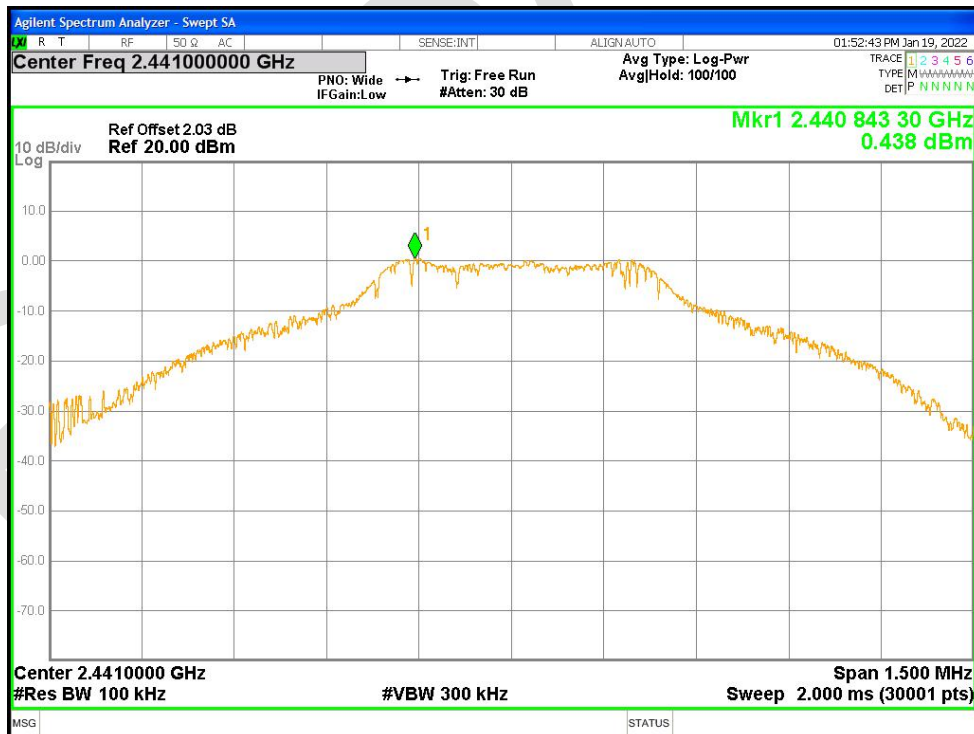


Tx. Spurious NVNT 1-DH1 2441MHz Ant1 Emission

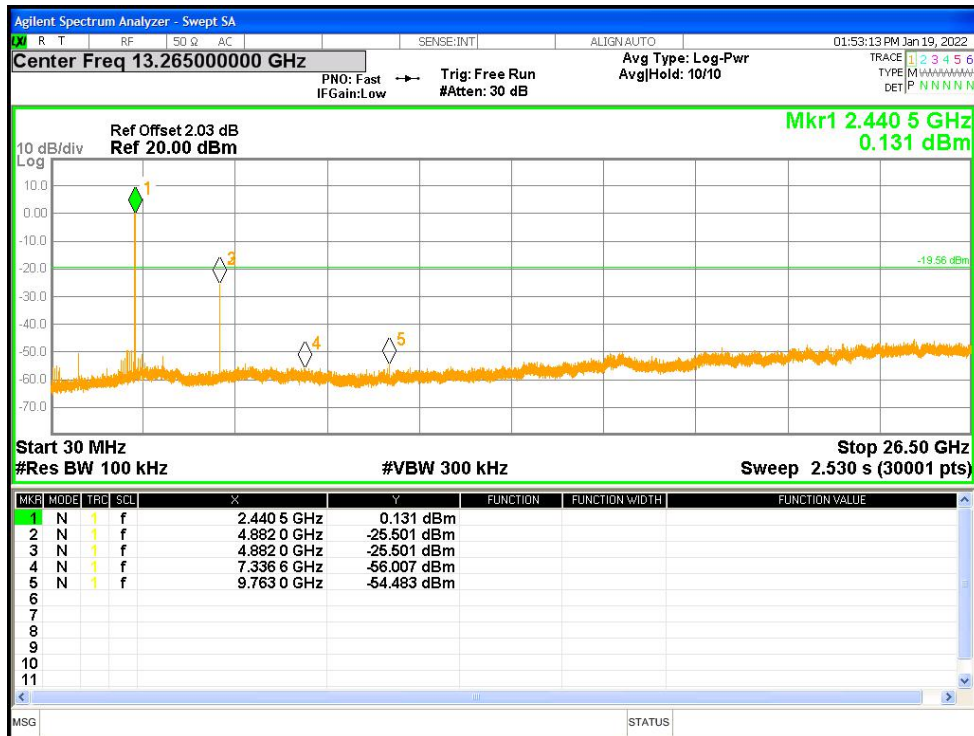

Tx. Spurious NVNT 1-DH1 2480MHz Ant1 Ref

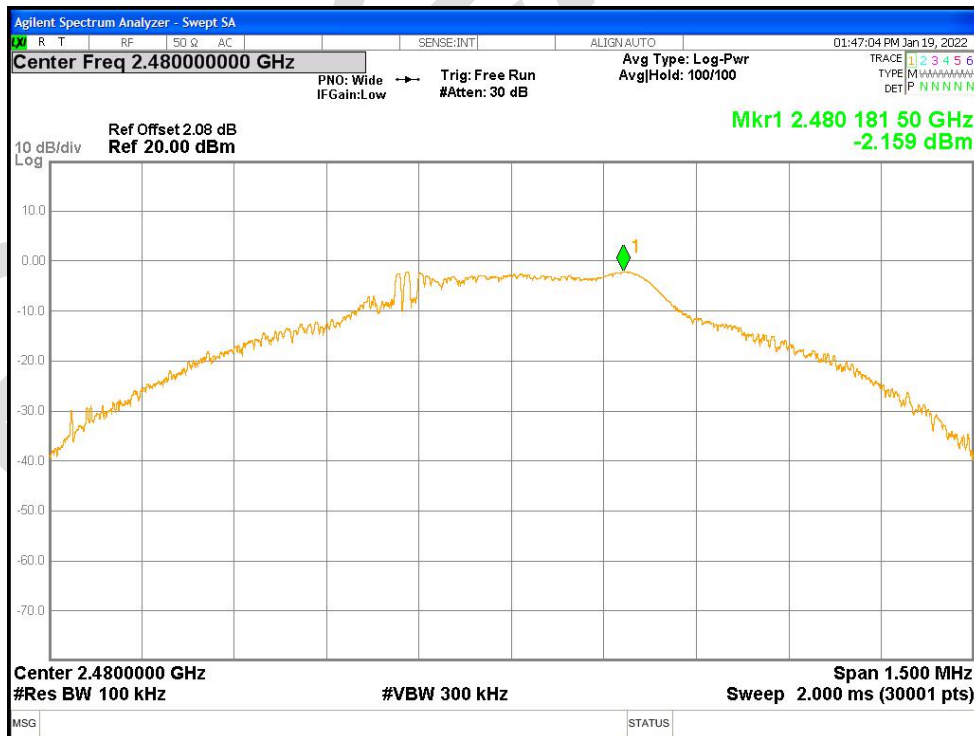


Tx. Spurious NVNT 1-DH1 2480MHz Ant1 Emission

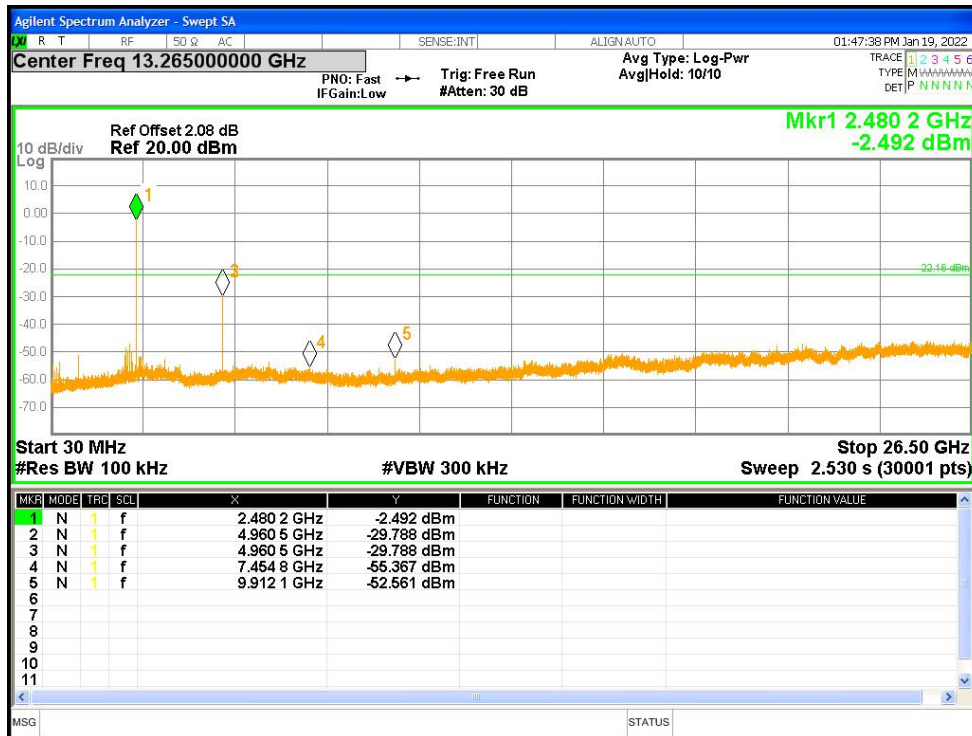

21.7 CARRIER FREQUENCIES SEPARATION

Condition	Mode	Antenna	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH1	Ant1	2441.0125	2442.043	1.0305	0.991	Pass


CFS NVNT 1-DH1 2441MHz Ant1

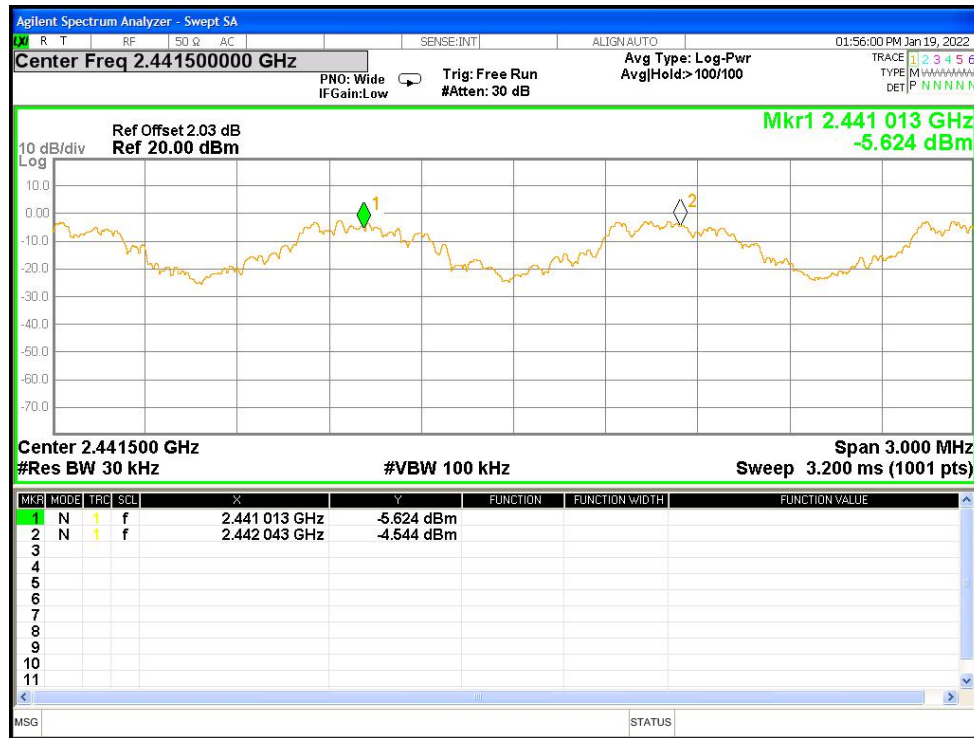

21.8 NUMBER OF HOPPING CHANNEL

Condition	Mode	Antenna	Hopping Number	Limit	Verdict
NVNT	1-DH1	Ant1	79	15	Pass


Hopping No. NVNT 1-DH1 2441MHz Ant1

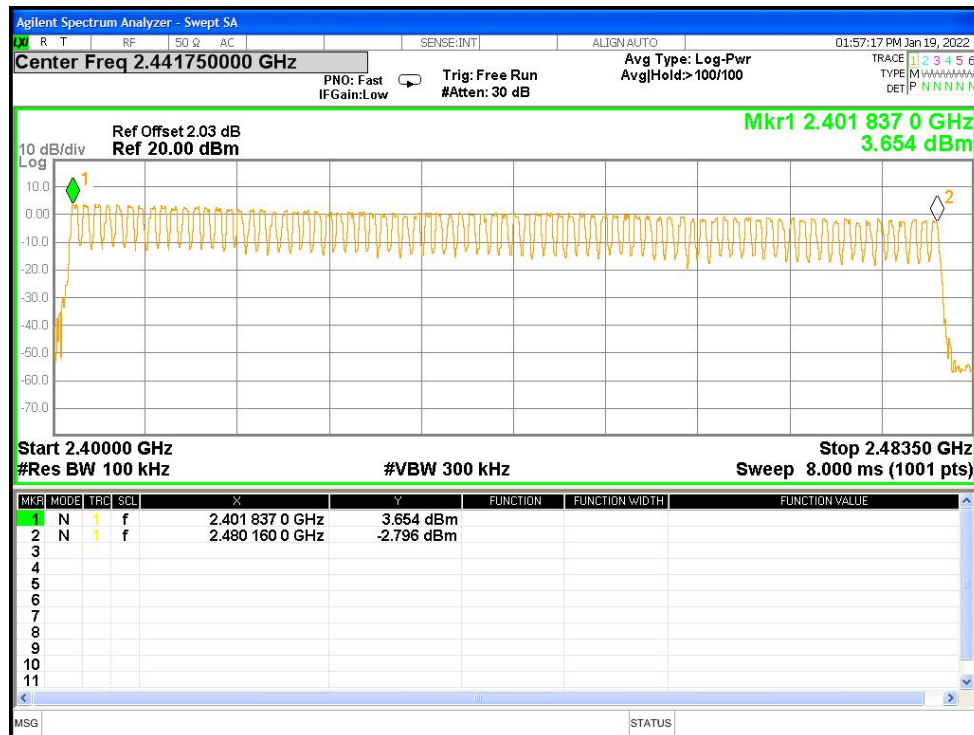


21.9 DWELL TIME

Condition	Mode	Frequency (MHz)	Antenna	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	Ant1	0.382	120.712	316	31600	400	Pass
NVNT	1-DH3	2441	Ant1	1.638	273.546	167	31600	400	Pass
NVNT	1-DH5	2441	Ant1	2.887	323.344	112	31600	400	Pass


Dwell NVNT 1-DH1 2441MHz Ant1 One Burst

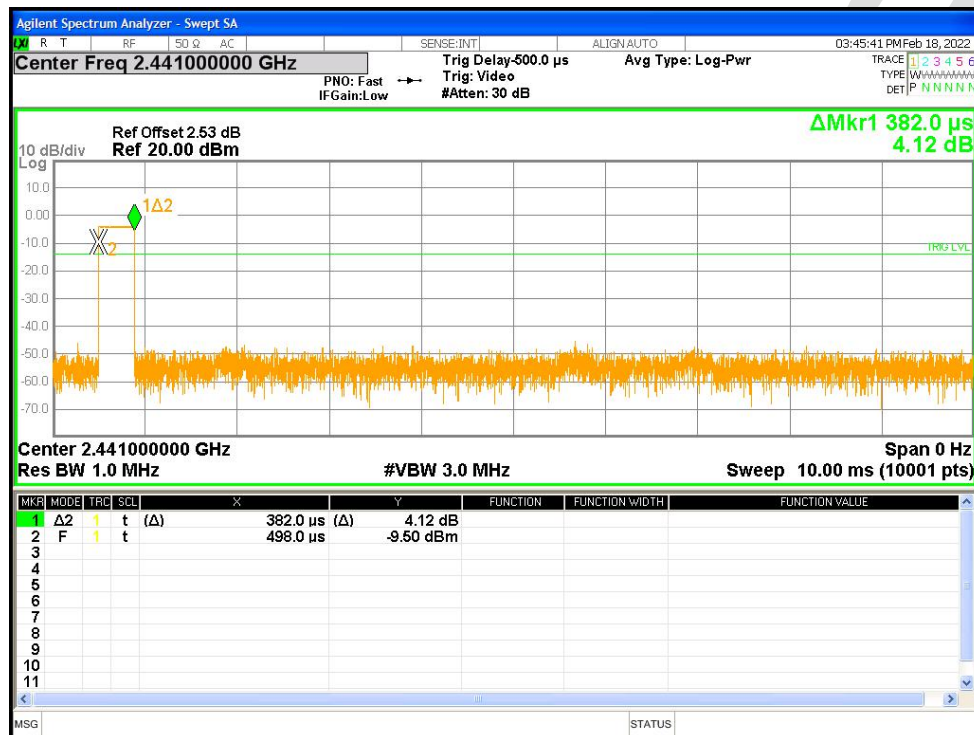


Dwell NVNT 1-DH1 2441MHz Ant1 Accumulated

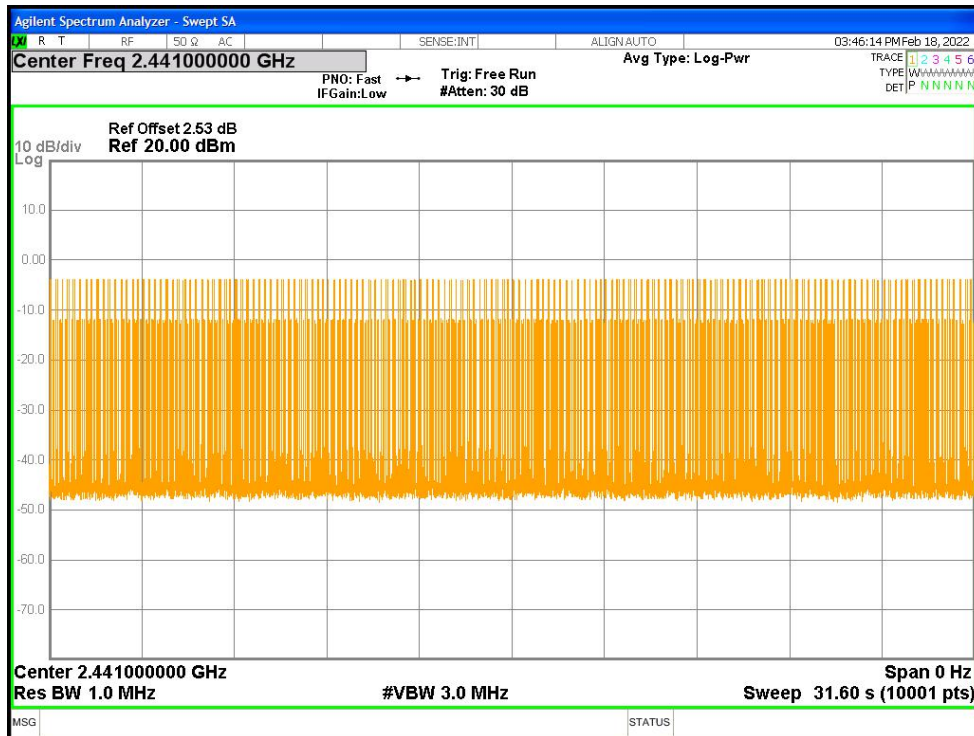


Dwell NVNT 1-DH3 2441MHz Ant1 One Burst

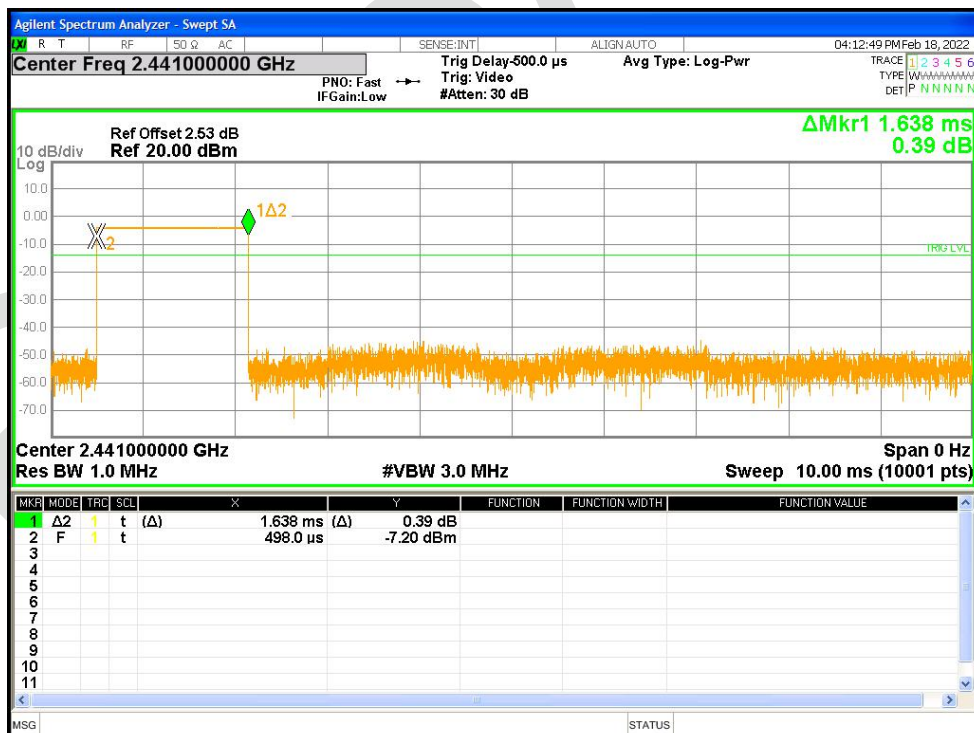


Dwell NVNT 1-DH3 2441MHz Ant1 Accumulated

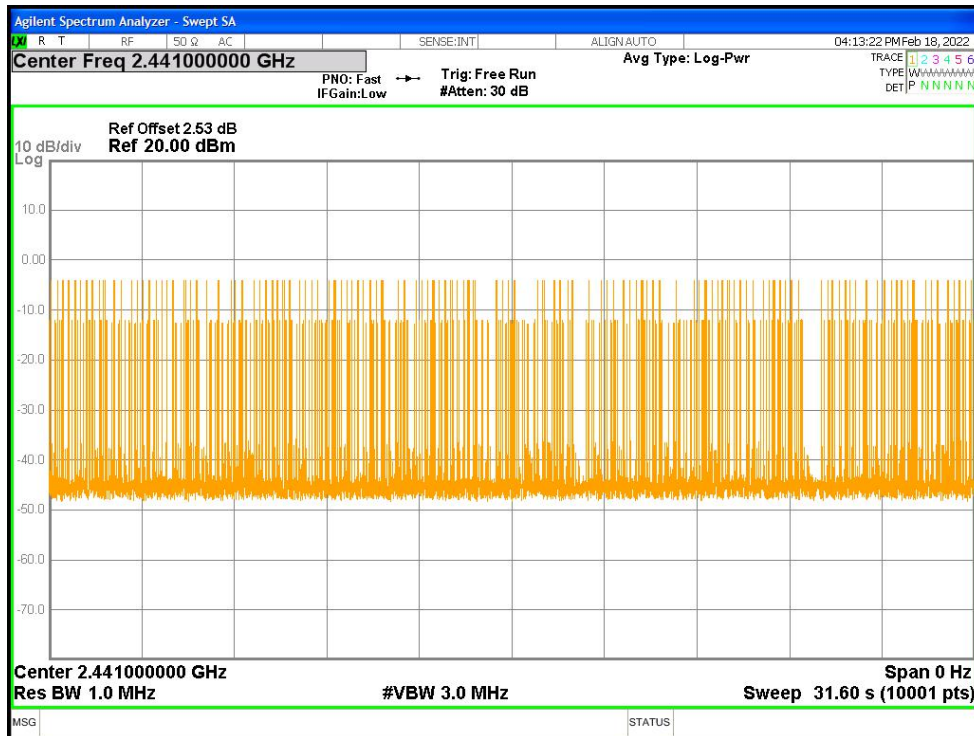

Dwell NVNT 1-DH5 2441MHz Ant1 One Burst

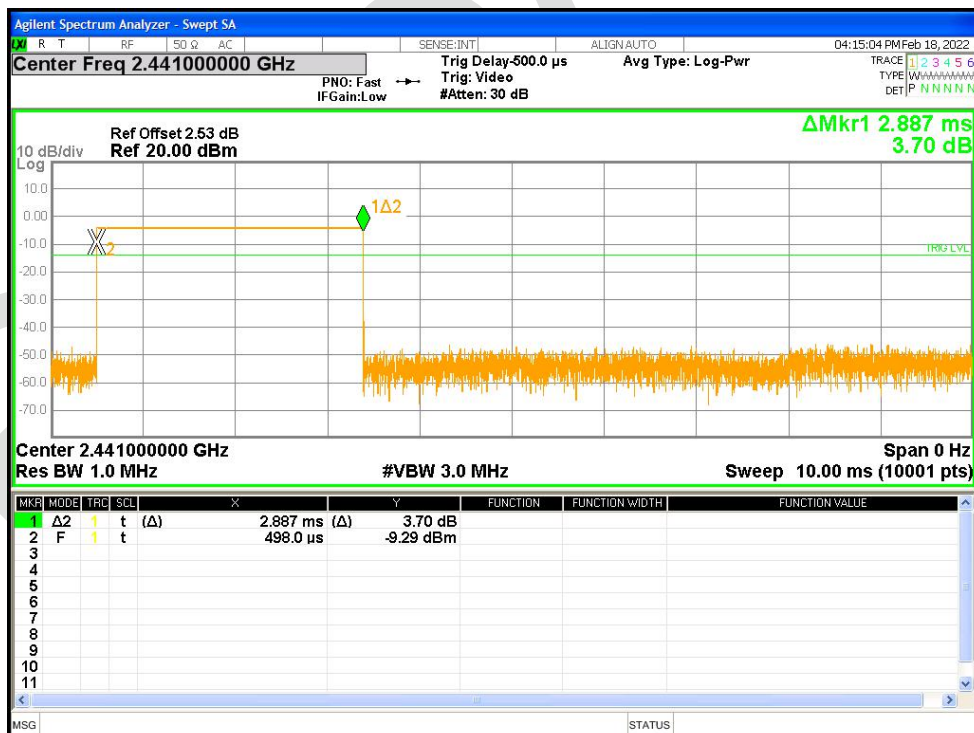

Dwell NVNT 1-DH5 2441MHz Ant1 Accumulated

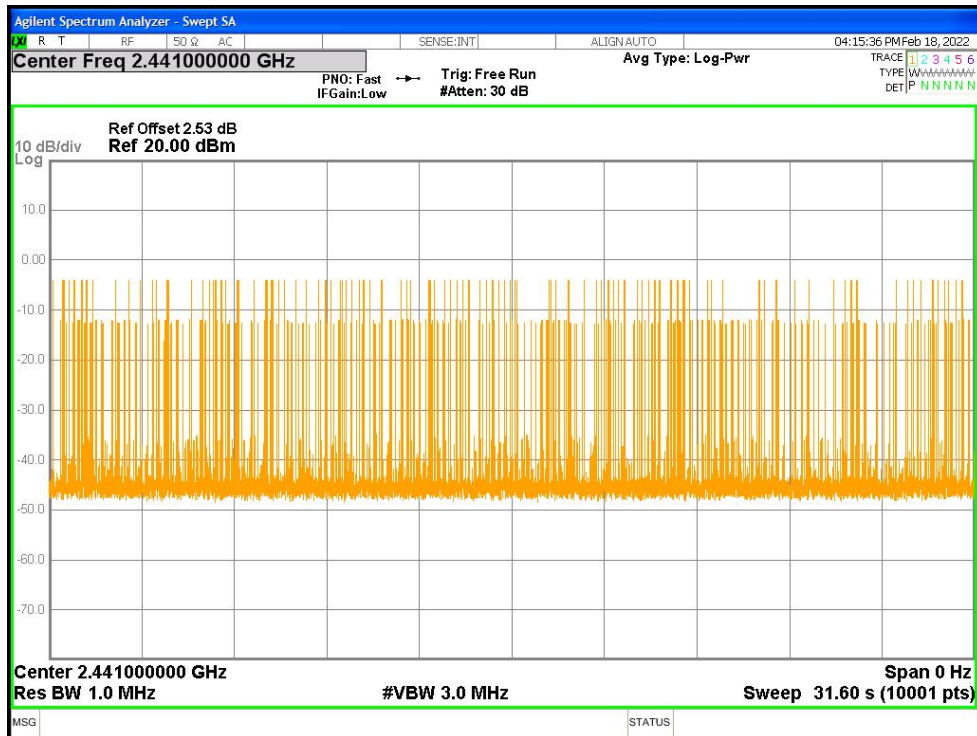


APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Conducted Emissions at AC Power Line (150kHz-30MHz)



Radiated Spurious Emissions

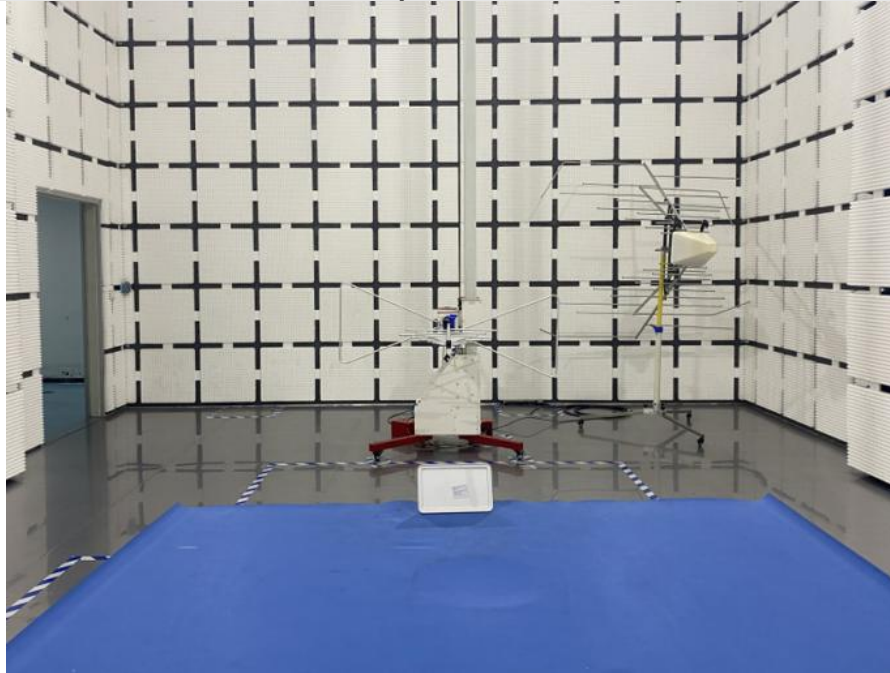

APPENDIX B: PHOTOGRAPHS OF EUT

(Reference to the test report No. BLA-EMC-202201-A0401)

----END OF REPORT----

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of BlueAsia, this report can't be reproduced except in full.