



Radio Test Report

Report No.: STS2606087W06

Issued for

THINKCAR TECH CO., LTD.

2606, building 4, phase II, TiananYungu, Gangtou community,
Bantian, Longgang District, Shenzhen, China

Product Name: Automotive Diagnostic Device

Brand Name: THINKCAR, MUCAR

Model Name: GVCI

Series Model(s): N/A

FCC ID: 2AUARTKGVC1

Test Standards: FCC Part15.247

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**TEST REPORT****Applicant's Name** THINKCAR TECH CO., LTD.Address..... 2606, building 4, phase II, TiananYungu, Gangtou community,
Bantian, Longgang District, Shenzhen, China**Manufacturer's Name** THINKCAR TECH CO., LTD.Address..... 2606, building 4, phase II, TiananYungu, Gangtou community,
Bantian, Longgang District, Shenzhen, China**Product Description**

Product Name Automotive Diagnostic Device

Brand Name THINKCAR, MUCAR

Model Name GVCI

Series Model(s) N/A

Standards FCC Part15.247

Test Procedure ANSI C63.10-2020+Cor 1-2023

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

Date of Test

Date of receipt of test item : 12 June 2026

Date (s) of performance of tests : 12 June 2026 ~ 16 July 2026

Date of Issue : 16 July 2026

Test Result : Pass

Testing Engineer :

(Aaron Bu)

Technical Manager :

(Skylar Li)

Authorized Signatory :

(Bovey Yang)





Table of Contents	Page
1. SUMMARY OF TEST RESULTS	7
1.1 TEST FACTORY	8
1.2 MEASUREMENT UNCERTAINTY	8
2. GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF THE EUT	9
2.2 DESCRIPTION OF THE TEST MODES	11
2.3 FREQUENCY HOPPING SYSTEM REQUIREMENTS	11
2.4 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	13
2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	13
2.6 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	14
2.7 EQUIPMENTS LIST	15
3. EMC EMISSION TEST	16
3.1 CONDUCTED EMISSION MEASUREMENT	16
3.2 RADIATED EMISSION MEASUREMENT	20
4. EMISSIONS AT RESTRICTED BAND	39
4.1 LIMITS OF RESTRICTED FREQUENCY BANDS	39
4.2 TEST PROCEDURE	39
4.3 DEVIATION FROM STANDARD	40
4.4 TEST SETUP	40
4.5 EUT OPERATION CONDITIONS	40
4.6 TEST RESULTS	40
5. CONDUCTED SPURIOUS & BAND EDGE EMISSION	41
5.1 LIMIT	41
5.2 TEST PROCEDURE	41
5.3 TEST SETUP	41
5.4 EUT OPERATION CONDITIONS	41
5.5 TEST RESULTS	42
6. NUMBER OF HOPPING CHANNEL	43
6.1 LIMIT	43
6.2 TEST PROCEDURE	43
6.3 TEST SETUP	43
6.4 EUT OPERATION CONDITIONS	43
6.5 TEST RESULTS	43



Table of Contents	Page
7. AVERAGE TIME OF OCCUPANCY	44
7.1 LIMIT	44
7.2 TEST PROCEDURE	44
7.3 TEST SETUP	44
7.4 EUT OPERATION CONDITIONS	44
7.5 TEST RESULTS	44
8. HOPPING CHANNEL SEPARATION MEASUREMENT	45
8.1 LIMIT	45
8.2 TEST PROCEDURE	45
8.3 TEST SETUP	45
8.4 EUT OPERATION CONDITIONS	45
8.5 TEST RESULTS	45
9. BANDWIDTH TEST	46
9.1 LIMIT	46
9.2 TEST PROCEDURE	46
9.3 TEST SETUP	46
9.4 EUT OPERATION CONDITIONS	46
9.5 TEST RESULTS	46
10. OUTPUT POWER TEST	47
10.1 LIMIT	47
10.2 TEST PROCEDURE	47
10.3 TEST SETUP	48
10.4 EUT OPERATION CONDITIONS	48
10.5 TEST RESULTS	48
11. ANTENNA REQUIREMENT	49
11.1 STANDARD REQUIREMENT	49
11.2 EUT ANTENNA	49
APPENDIX 1-TEST DATA	50
DWELL TIME	50
DUTY CYCLE	60
MAXIMUM PEAK CONDUCTED OUTPUT POWER	66
-20DB BANDWIDTH	72



Table of Contents	Page
CARRIER FREQUENCIES SEPARATION	78
NUMBER OF HOPPING CHANNEL	84
BAND EDGE	87
BAND EDGE(HOPPING)	94
CONDUCTED RF SPURIOUS EMISSION	101
RESTRICT BAND	110
APPENDIX 2-PHOTOS OF TEST SETUP	117

**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	16 July 2026	STS2606087W06	ALL	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:
KDB 558074 D01 15.247 Meas Guidance v05r02.

FCC Part 15.247, Subpart C			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	--
15.247(a)(1)	Hopping Channel Separation	PASS	--
15.247(a)(1)&(b)(1)	Output Power	PASS	--
15.209	Radiated Spurious Emission	PASS	--
15.247(d)	Conducted Spurious & Band Edge Emission	PASS	--
15.247(a)(1)(iii)	Number of Hopping Frequency	PASS	--
15.247(a)(1)(iii)	Dwell Time	PASS	--
15.247(a)(1)	Bandwidth	PASS	--
15.205	Restricted bands of operation	PASS	--
Part 15.247(d)/part 15.209(a)	Band Edge Emission	PASS	--
15.203	Antenna Requirement	PASS	--

Note:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2020+Cor 1-2023.



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add. : 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.751\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.888\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 2.48\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 2.52\text{dB}$
5	All emissions, radiated 1G-18GHz	$\pm 3.48\text{dB}$
6	All emissions, radiated >18GHz	$\pm 4.18\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.48\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.52\text{dB}$
9	Occupied Channel Bandwidth	$\pm 3.6\%$
10	Duty Cycle	$\pm 3.2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Automotive Diagnostic Device
Brand Name	THINKCAR, MUCAR
Model Name	GVCI
Series Model(s)	N/A
Model Difference	N/A
Channel List	Please refer to the Note 3.
Bluetooth	Frequency:2402 – 2480 MHz Modulation: GFSK(1Mbps), $\pi/4$ -DQPSK(2Mbps), 8DPSK(3Mbps)
Bluetooth Configuration	BR+EDR
Antenna Type	PCB
Antenna Gain	-1.88dBi
Power Rating	Input: 9-18V 130mA
Adapter	N/A
Battery	N/A
Hardware version	V1.0
Software version	V1.0
Sample Number	260612003-2
Connecting I/O Port(s)	Please refer to the Note 1.

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna details in this report are based on the manufacturer provided antenna specification documents and apply only to the tested sample identified herein.
Any discrepancies in the antenna information may affect the accuracy of the test results, and the customer assumes responsibility for any related issues.



3.

Channel List					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	27	2429	54	2456
01	2403	28	2430	55	2457
02	2404	29	2431	56	2458
03	2405	30	2432	57	2459
04	2406	31	2433	58	2460
05	2407	32	2434	59	2461
06	2408	33	2435	60	2462
07	2409	34	2436	61	2463
08	2410	35	2437	62	2464
09	2411	36	2438	63	2465
10	2412	37	2439	64	2466
11	2413	38	2440	65	2467
12	2414	39	2441	66	2468
13	2415	40	2442	67	2469
14	2416	41	2443	68	2470
15	2417	42	2444	69	2471
16	2418	43	2445	70	2472
17	2419	44	2446	71	2473
18	2420	45	2447	72	2474
19	2421	46	2448	73	2475
20	2422	47	2449	74	2476
21	2423	48	2450	75	2477
22	2424	49	2451	76	2478
23	2425	50	2452	77	2479
24	2426	51	2453	78	2480
25	2427	52	2454		
26	2428	53	2455		



2.2 DESCRIPTION OF THE TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate/Modulation
Mode 1	TX CH00	1Mbps/GFSK
Mode 2	TX CH39	1Mbps/GFSK
Mode 3	TX CH78	1Mbps/GFSK
Mode 4	TX CH00	2 Mbps/ $\pi/4$ -DQPSK
Mode 5	TX CH39	2 Mbps/ $\pi/4$ -DQPSK
Mode 6	TX CH78	2 Mbps/ $\pi/4$ -DQPSK
Mode7	TX CH00	3 Mbps/8DPSK
Mode 8	TX CH39	3 Mbps/8DPSK
Mode 9	TX CH78	3 Mbps/8DPSK
Mode 10	Hopping	GFSK
Mode 11	Hopping	$\pi/4$ -DQPSK
Mode 12	Hopping	8DPSK

Note:

(1) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.

(2) We tested for all available U.S. voltage and frequencies (For 120V, 50/60Hz and 240V, 50/60Hz) for which the device is capable of operation, and the worst case of 120V/ 60Hz is shown in the report.

For AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 13 : Keeping BT TX

2.3 FREQUENCY HOPPING SYSTEM REQUIREMENTS

(1) Standard and Limit

According to FCC Part 15.247(a)(1), The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Frequency hopping spread spectrum systems are not required to employ all available hopping channels during each transmission. However, the system, consisting of both the transmitter and the receiver, must be designed to comply with all of the regulations in this section should the transmitter be presented with a continuous data (or information) stream. In addition, a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.




The incorporation of intelligence within a frequency hopping spread spectrum system that permits the system to recognize other users within the spectrum band so that it individually and independently chooses and adapts its hop sets to avoid hopping on occupied channels is permitted. The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

(2) The Pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first one of 9 consecutive ones: i.e. the shift register is initialized with nine ones.

Numver of shift register stages:9


Length of pseudo-random sequence: $2^9-1=511$ bits

Longest sequence of zeros: 8(non-inverted signal)

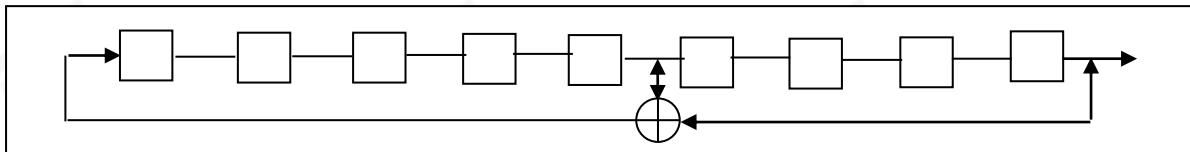

Linear Feedback Shift Register for Generator of the PRBS sequence

An example of Pseudorandom Frequency Hopping Sequence as follow:

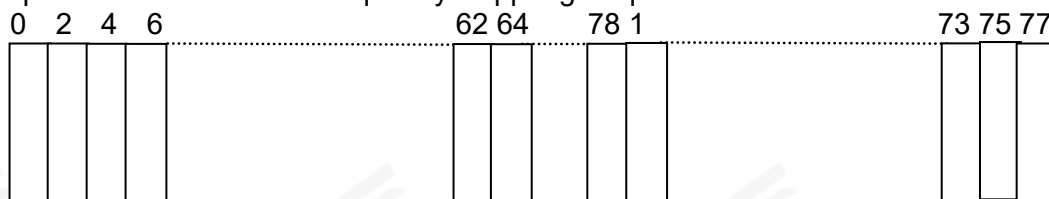

Each frequency used equally on th average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies ini synchronization with the transmitted signals.

(3) Frequency Hopping System

This transmitter device is frequency hopping device, and complies with FCC part 15.247 rule.

This device uses Bluetooth radio which operates in 2400-2483.5 MHz band. Bluetooth uses a radio technology called frequency-hopping spread spectrum, which chops up the data being sent and transmits chunks of it on up to 79 bands (1 MHz each; centred from 2402 to 2480 MHz) in the range 2,400-2,483.5MHz. The transmitter switches hop frequencies 1,600 times per second to assure a high degree of data security. All Bluetooth devices participating in a given piconet are synchronized to the frequency-hopping channel for the piconet. The frequency hopping sequence is determined by the master's device address and the phase of the hopping sequence (the frequency to hop at a specific time) is determined by the master's internal clock. Therefore, all slaves in a piconet must know the master's device address and must synchronize their clocks with the master's clock.

Adaptive Frequency Hopping (AFH) was introduced in the Bluetooth specification to provide an effective way for a Bluetooth radio to counteract normal interference. AFH identifies "bad" channels, where either other wireless devices are interfering with the Bluetooth signal or the Bluetooth signal is interfering with another device. The AFH-enabled Bluetooth device will then communicate with other devices within its piconet to share details of any identified bad channels. The devices will then switch to alternative available "good" channels, away from the areas of interference, thus having no impact on the bandwidth used.

This device was tested with a bluetooth system receiver to check that the device maintained hopping synchronization, and the device complied with these requirements FCC Part 15.247 rule.



2.4 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING


During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters of FHSS.

(Control software) Parameters(1/2/3Mbps)	Test program: Bluetooth		
	Packet type: DH1:4:27 2DH1:20:54 3DH1:24:83	Packet type: DH3:11:183 2DH3:26:367 3DH3:27:552	Packet type: DH5:15:339 2DH5:30:679 3DH5:31:1021


RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	Power Class	Software For Testing
BT	BR+EDR	GFSK	-1.88	6	SecureCRT
		$\pi/4$ -DQPSK	-1.88	6	
		8DPSK	-1.88	6	

2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Conducted Emission Test

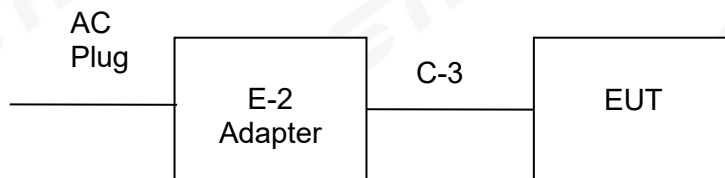

Radiated Spurious Emission Test

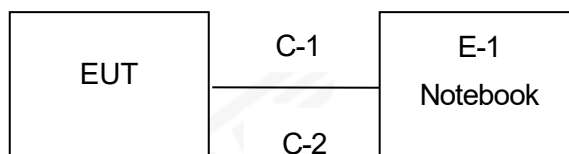

RF Conducted Test

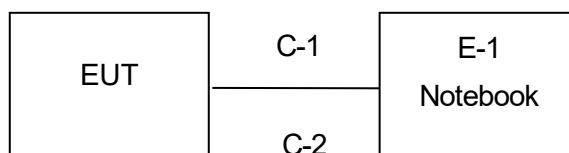



2.6 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Note
E-1	Notebook	DELL	Inspiron 3501	N/A
E-2	Adapter	ZTC	NB-A515A	N/A
C-1	Serial port board	XES	WTYZK	N/A
C-2	USB Cable	MI	RYEW3A	N/A
C-3	USB Cable	ZTC	NB-A515A	N/A

Item	Equipment	Mfr/Brand	Length	Note
C-2	Shielded	NO	150cm	N/A
C-3	Shielded	NO	100cm	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (2) “YES” is means “with core”; “NO” is means “without core”.



2.7 EQUIPMENTS LIST

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
966 chamber	CHENYU	966 Room	966	2025.08.13	2028.08.12
Temperature & Humidity	TORIE	TP502V4-P	6700000124280	2025.10.13	2026.10.12
Pre-Amplifier(0.1M-3GHz)	EM	EM330	060665	2026.02.05	2027.02.04
Pre-Amplifier(1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2025.09.25	2026.09.24
Pre-Amplifier(18G-40GHz)	SKET	LNPA_1840-50	SK2018101801	2026.03.04	2027.03.03
Active loop Antenna	ZHINAN	ZN30900C	16035	2025.02.25	2027.02.24
Bilog Antenna	TESEQ	CBL6111D	34678	2025.09.27	2027.09.26
Horn Antenna	SCHWARZBECK	BBHA 9120D	02014	2025.09.27	2027.09.26
Horn Antenna	A-INFOMW	LB-180400-KF	J211020657	2025.09.27	2027.09.26
Positioning Controller	MF	MF-7802	MF-780208587	2025.09.25	2026.09.24
Signal Analyzer	R&S	FSV 40-N	101823	2025.09.26	2026.09.25
Switch Control Box	SKET	SU319E	51409043	2025.09.26	2026.09.25
Band 2.4G-2.5G Filter	HX MICROWAVE	HXLBQ-DZA61	5410025	2025.09.23	2026.09.22
Antenna Mast	MF	MFA-440H	1308023	N/A	N/A
Turn Table	MF	SC100_1	60531	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC Power Supply	Zhaoxin	RXN 605D	20R605D11010081	2025.09.22	2026.09.21
RF Coaxial Cable	LEITAI M-WAVE	CA360	DC-18G	2025.09.26	2026.09.25
RF Coaxial Cable	LEITAI M-WAVE	CA360	DC-18G	2025.09.26	2026.09.25
RF Coaxial Cable	LEITAI M-WAVE	CA3507	DC-40G	2025.09.26	2026.09.25
RF Coaxial Cable	LEITAI M-WAVE	CA3507	DC-40G	2025.09.26	2026.09.25
Test SW	EZ-EMC	Ver.STSLAB-03A1 RE			
AC Conduction Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2025.09.25	2026.09.24
Limiter	CYBERTEK	EM5010	N/A	2025.09.25	2026.09.24
LISN	R&S	ENV216	101242	2025.09.25	2026.09.24
LISN	EMCO	3810/2NM	23625	2025.09.25	2026.09.24
CE Cable	EASTSHEEP	C01	10057	2025.09.25	2026.09.24
Temperature & Humidity	TORIE	TP502V4-P	6700000422137	2025.08.26	2026.08.25
Test SW	EZ-EMC	Ver.STSLAB-03A1 CE			
RF Conduction Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Signal Analyzer	Agilent	N9020A	MY51510623	2026.02.04	2027.02.03
Switch control box	MW	MW100-RFCB	052206001	2025.09.23	2026.09.22
RF Coaxial Cable	XINQY	CT40PE	DC-40G	2026.02.04	2027.02.03
Temperature& Humidity test chamber	Safety test	AG80L	171200018	2026.02.04	2027.02.03
Temperature & Humidity	TORIE	TP502V4-P	6700000124211	2025.10.09	2026.10.08
Test SW	MW	MTS 8310_2.0.0.0			



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

The radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table.

FREQUENCY (MHz)	Conducted Emission limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “*” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

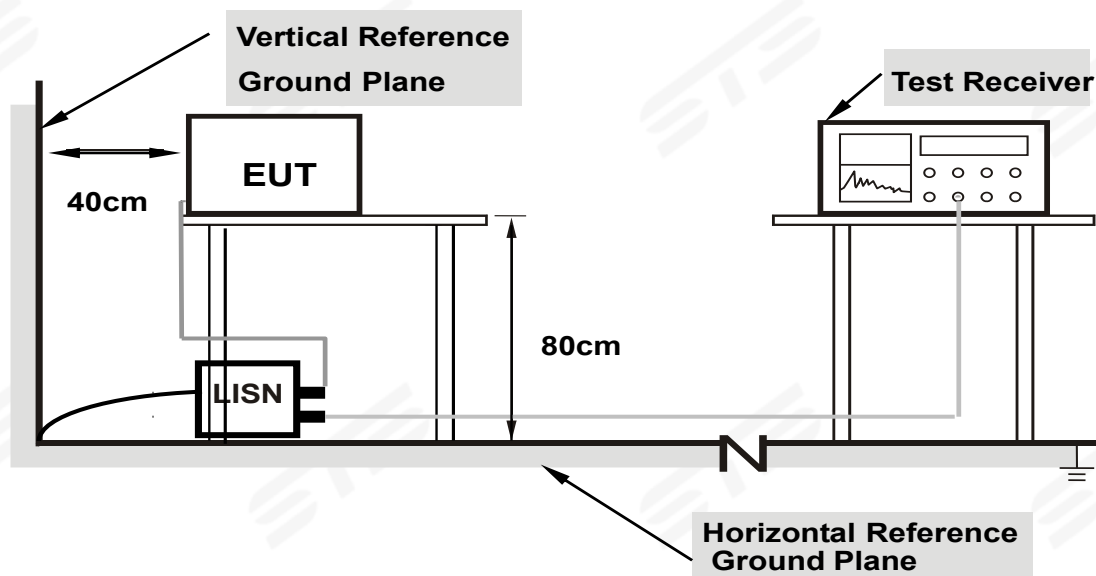

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.


3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.5 TEST RESULT

Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode:	Mode 13		

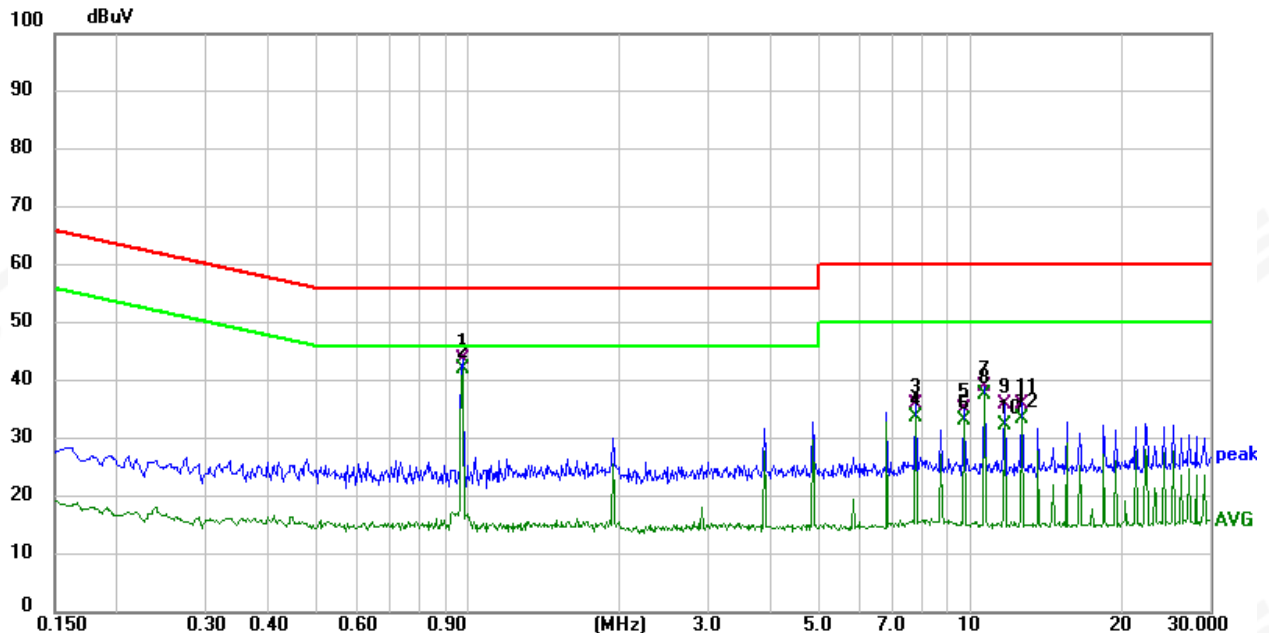


No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Over (dB)	Detector	Pass/Fail
1	0.9700	24.48	19.35	43.83	56.00	-12.17	QP	Pass
2 *	0.9700	22.74	19.35	42.09	46.00	-3.91	AVG	Pass
3	7.7540	16.44	19.50	35.94	60.00	-24.06	QP	Pass
4	7.7540	14.13	19.50	33.63	50.00	-16.37	AVG	Pass
5	9.6899	15.48	19.62	35.10	60.00	-24.90	QP	Pass
6	9.6899	13.54	19.62	33.16	50.00	-16.84	AVG	Pass
7	10.6580	19.38	19.65	39.03	60.00	-20.97	QP	Pass
8	10.6580	17.99	19.65	37.64	50.00	-12.36	AVG	Pass
9	11.6300	16.42	19.68	36.10	60.00	-23.90	QP	Pass
10	11.6300	12.72	19.68	32.40	50.00	-17.60	AVG	Pass
11	12.5980	16.42	19.69	36.11	60.00	-23.89	QP	Pass
12	12.5980	13.83	19.69	33.52	50.00	-16.48	AVG	Pass

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)



Temperature:	26°C	Relative Humidity:	54%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode:	Mode 13		

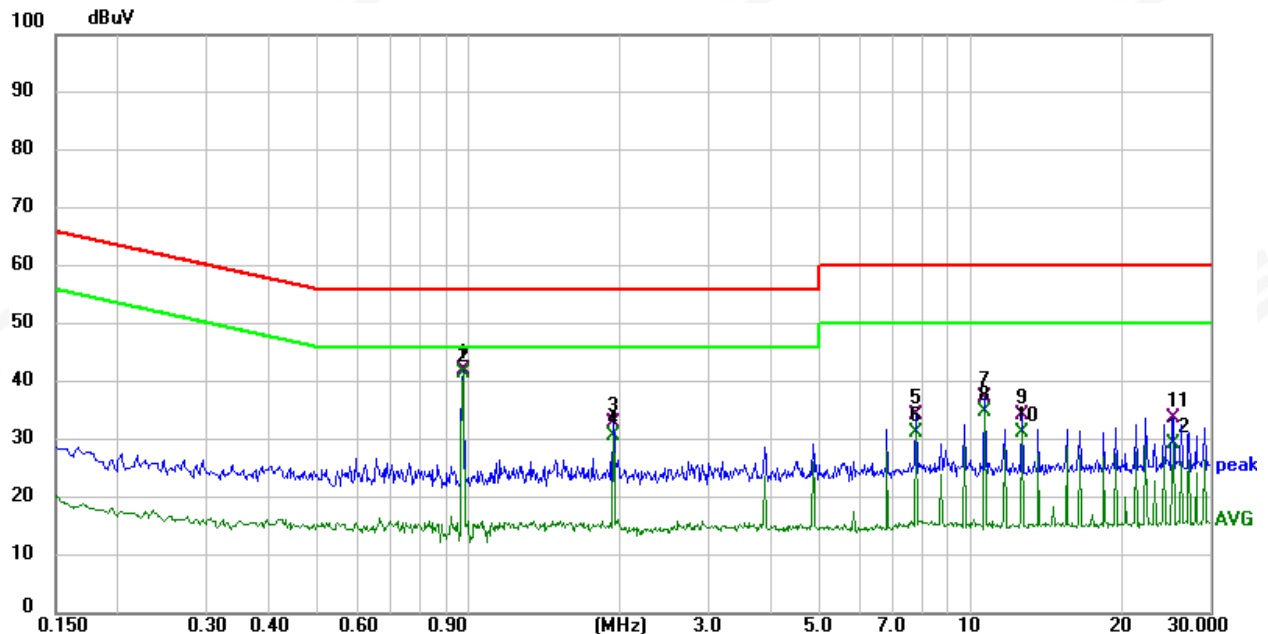

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Over (dB)	Detector	Pass/Fail
1	0.9700	22.60	19.39	41.99	56.00	-14.01	QP	Pass
2 *	0.9700	22.06	19.39	41.45	46.00	-4.55	AVG	Pass
3	1.9380	13.55	19.38	32.93	56.00	-23.07	QP	Pass
4	1.9380	11.21	19.38	30.59	46.00	-15.41	AVG	Pass
5	7.7500	14.69	19.51	34.20	60.00	-25.80	QP	Pass
6	7.7500	11.72	19.51	31.23	50.00	-18.77	AVG	Pass
7	10.6580	17.55	19.70	37.25	60.00	-22.75	QP	Pass
8	10.6580	15.27	19.70	34.97	50.00	-15.03	AVG	Pass
9	12.5980	14.43	19.77	34.20	60.00	-25.80	QP	Pass
10	12.5980	11.45	19.77	31.22	50.00	-18.78	AVG	Pass
11	25.1940	14.12	19.73	33.85	60.00	-26.15	QP	Pass
12	25.1940	9.69	19.73	29.42	50.00	-20.58	AVG	Pass

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor)-Limit
3. Factor=LISN factor+Cable loss+Limiter (10dB)



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

In any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the Restricted band specified on Part15.205(a)&209(a) limit in the table and according to ANSI C63.10-2020+Cor 1-2023 below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (1000MHz-25GHz)

FREQUENCY (MHz)	(dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

3.2.2 TEST PROCEDURE

- a. The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- e. If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested with a band-stop filter and performed pretest to three orthogonal axis. The worst-case emissions were reported.

3.2.3 DEVIATION FROM TEST STANDARD


No deviation.

3.2.4 TESTSETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

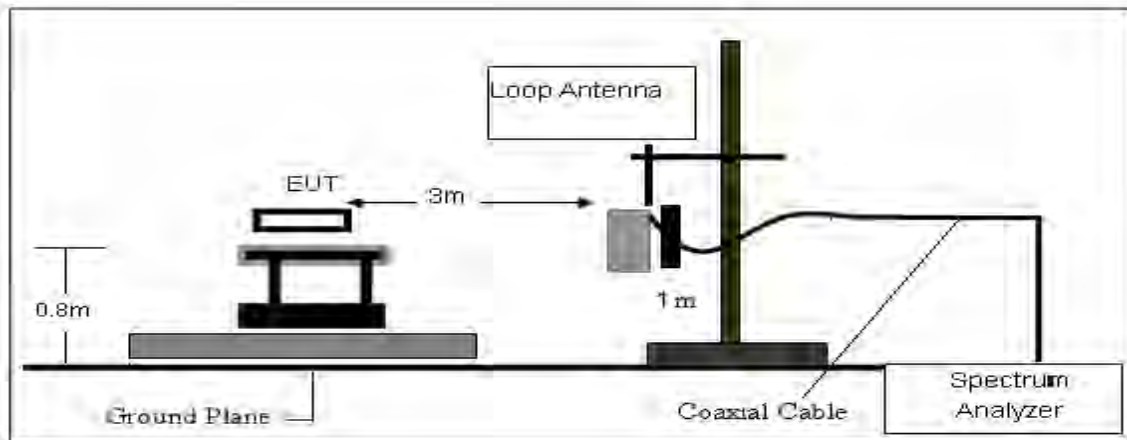

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

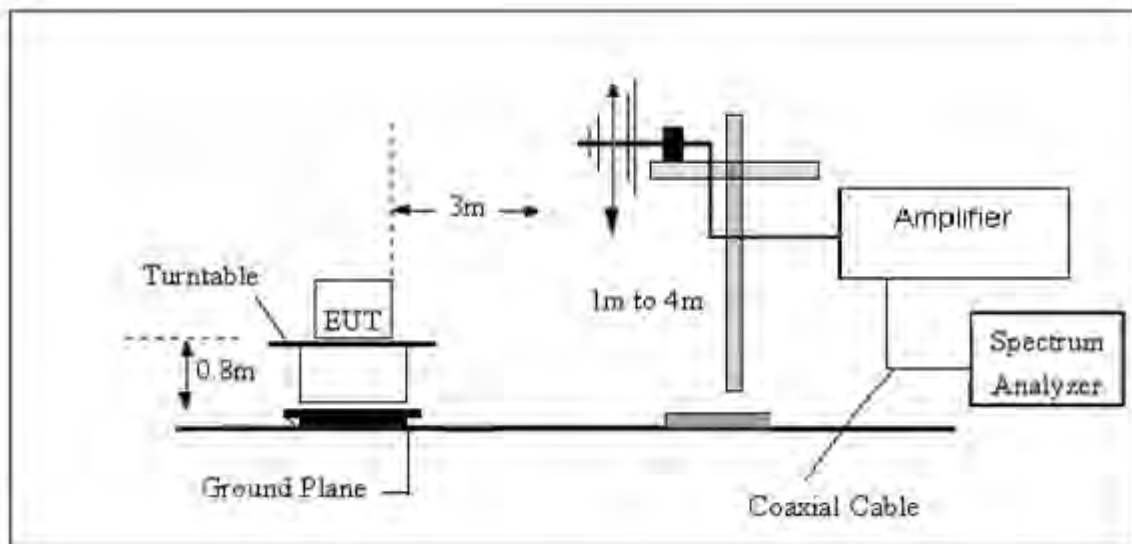

(C) Radiated Emission Test-Up Frequency Above 1GHz

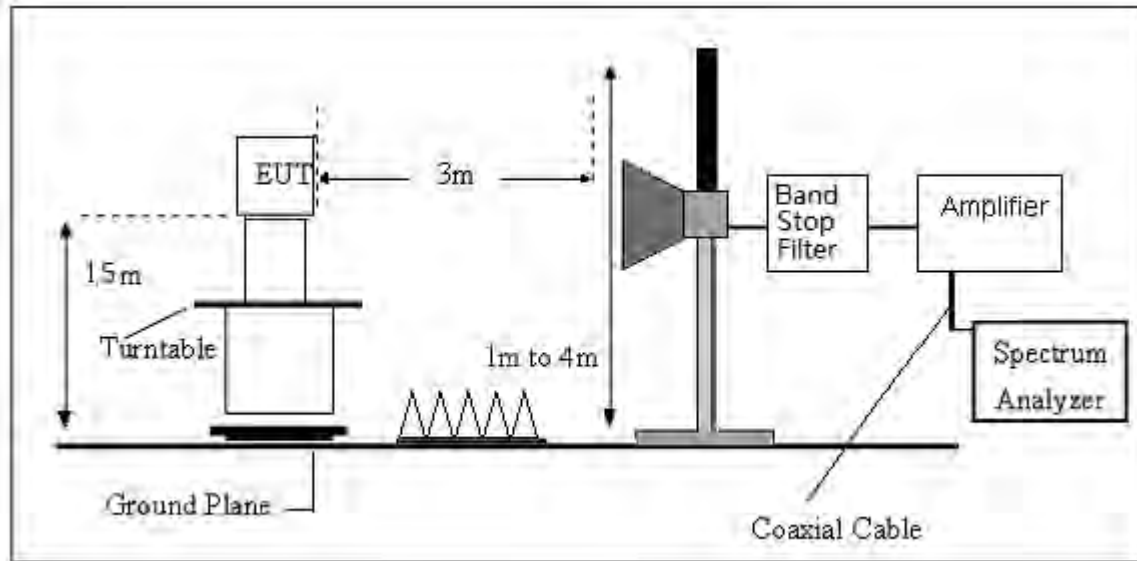



3.2.5 EUT OPERATING CONDITIONS

Please refer to section 3.1.4 of this report.

3.2.6 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$




3.2.7 TEST RESULTS

(9KHz-30MHz)

9KHz-150KHz

Temperature:	24.1℃	Relative Humidity:	64%
Test Voltage:	DC 12V	Polarization:	Coaxial
Test Mode:	Mode 1/2/3/4/5/6/7/8/9(Mode 8 worst mode)		

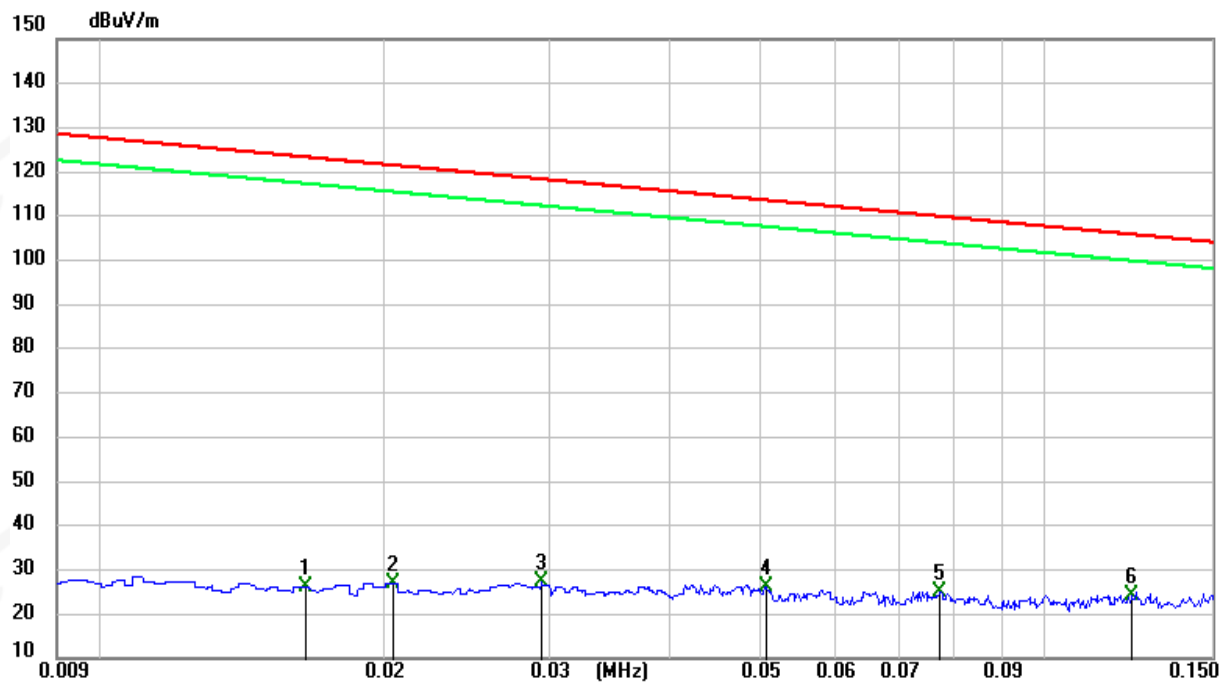

No.	Frequency (MHz)	Reading Level(dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Pass/Fail
1	0.0165	6.39	19.85	26.24	123.26	-97.02	AVG	Pass
2	0.0204	7.02	20.09	27.11	121.41	-94.30	AVG	Pass
3	0.0292	7.24	19.92	27.16	118.30	-91.14	AVG	Pass
4	0.0505	6.57	19.49	26.06	113.54	-87.48	AVG	Pass
5	0.0772	6.39	18.69	25.08	109.85	-84.77	AVG	Pass
6 *	0.1232	6.64	17.55	24.19	105.79	-81.60	AVG	Pass


Remark:

1. Margin = Result (Result =Reading + Factor)-Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
3. The coaxial and coplanar directions of all modes have been tested, only show the worst data in this report.



150KHz-30MHz

Temperature:	24.1°C	Relative Humidity:	64%
Test Voltage:	DC 12V	Polarization:	Coaxial
Test Mode:	Mode 1/2/3/4/5/6/7/8/9(Mode 8 worst mode)		

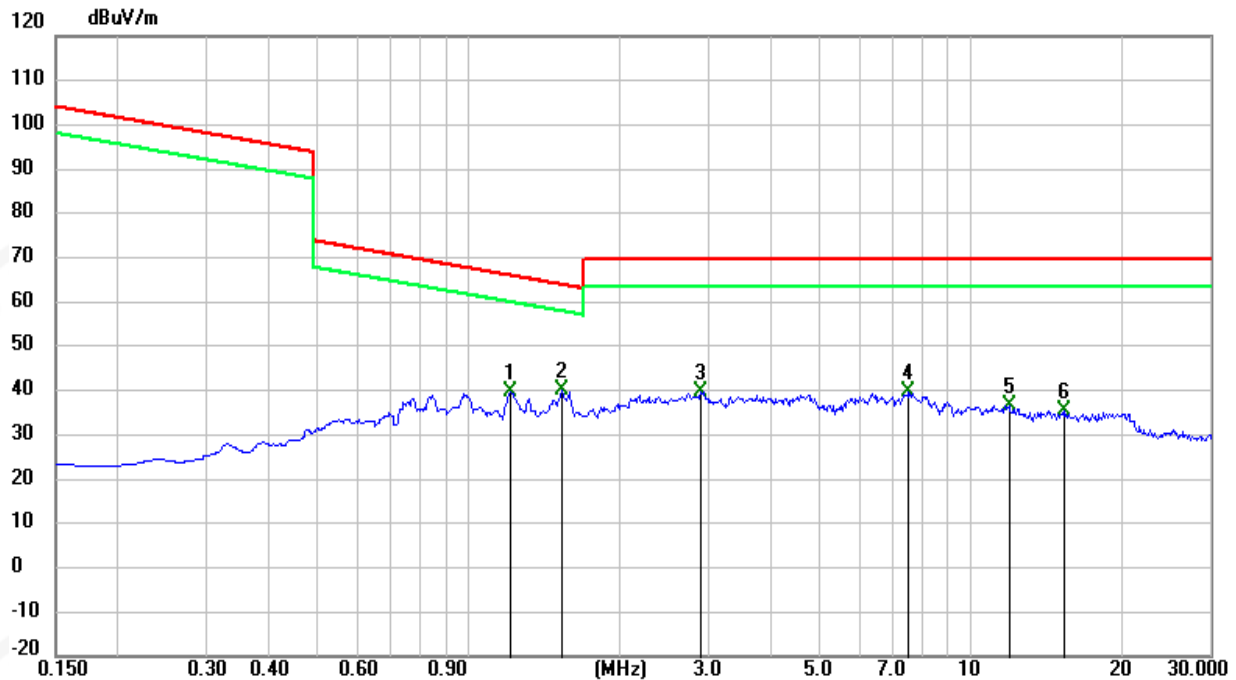

No.	Frequency (MHz)	Reading Level(dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Pass/Fail
1	1.2034	19.47	20.24	39.71	66.00	-26.29	QP	Pass
2	1.5230	19.87	20.30	40.17	63.95	-23.78	QP	Pass
3	2.8961	19.60	20.13	39.73	69.50	-29.77	QP	Pass
4	7.4931	19.21	20.35	39.56	69.50	-29.94	QP	Pass
5	11.9108	15.94	20.62	36.56	69.50	-32.94	QP	Pass
6 *	15.3138	14.00	21.38	35.38	69.50	-34.12	QP	Pass


Remark:

1. Margin = Result (Result = Reading + Factor)-Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
3. The coaxial and coplanar directions of all modes have been tested, only show the worst data in this report.



(30MHz-1000MHz)

Temperature:	23.4°C	Relative Humidity:	56%
Test Voltage:	DC 12V	Phase:	Horizontal
Test Mode:	Mode 1/2/3/4/5/6/7/8/9(Mode 8 worst mode)		

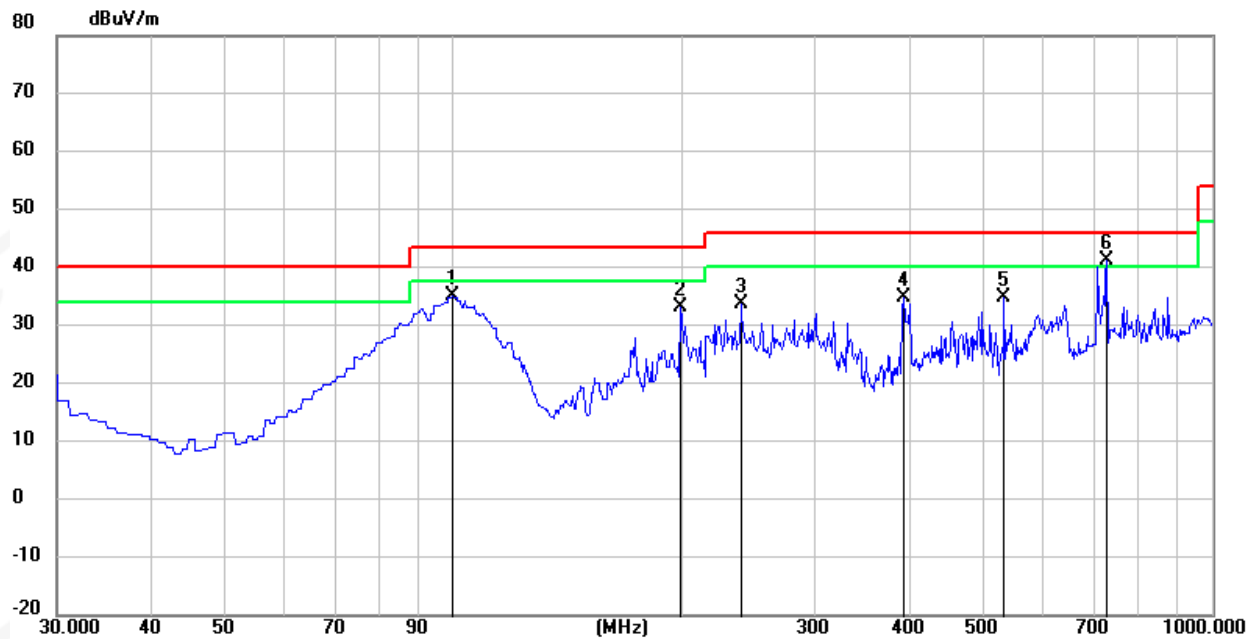


No.	Frequency (MHz)	Reading Level(dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Pass/Fail
1	99.5281	55.32	-20.21	35.11	43.50	-8.39	QP	Pass
2	198.5880	54.32	-21.12	33.20	43.50	-10.30	QP	Pass
3	238.5500	52.01	-18.23	33.78	46.00	-12.22	QP	Pass
4	390.8400	46.42	-11.54	34.88	46.00	-11.12	QP	Pass
5	531.4900	42.13	-7.37	34.76	46.00	-11.24	QP	Pass
6 *	724.5200	44.16	-2.89	41.27	46.00	-4.73	QP	Pass

Remark:

1. Margin = Result (Result = Reading + Factor)-Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
3. All modes have been tested,only show the worst case.



Temperature:	23.4°C	Relative Humidity:	56%
Test Voltage:	DC 12V	Phase:	Vertical
Test Mode:	Mode 1/2/3/4/5/6/7/8/9(Mode 8 worst mode)		

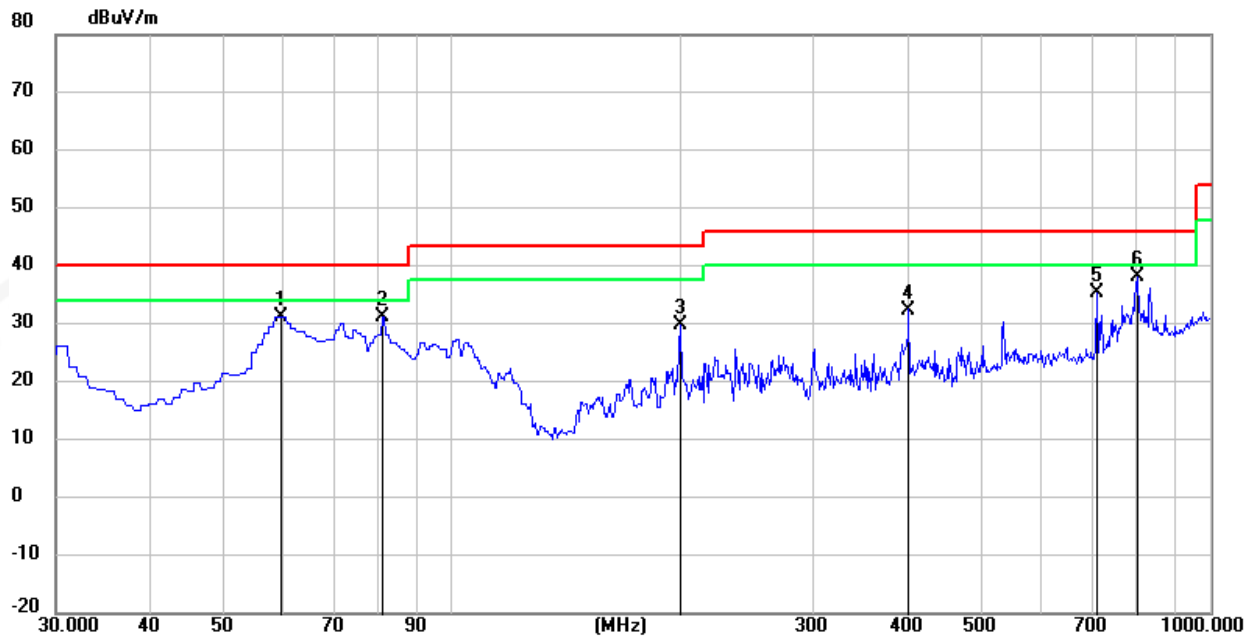


No.	Frequency (MHz)	Reading Level(dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Pass/Fail
1	59.4405	57.11	-25.77	31.34	40.00	-8.66	QP	Pass
2	80.9275	54.11	-22.87	31.24	40.00	-8.76	QP	Pass
3	199.7500	51.04	-21.11	29.93	43.50	-13.57	QP	Pass
4	399.5700	43.66	-11.16	32.50	46.00	-13.50	QP	Pass
5	707.0600	39.34	-3.94	35.40	46.00	-10.60	QP	Pass
6 *	799.2100	40.35	-2.04	38.31	46.00	-7.69	QP	Pass

Remark:

1. Margin = Result (Result =Reading + Factor)-Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain
3. All modes have been tested,only show the worst case.




(1GHz~25GHz) Spurious emission Requirements

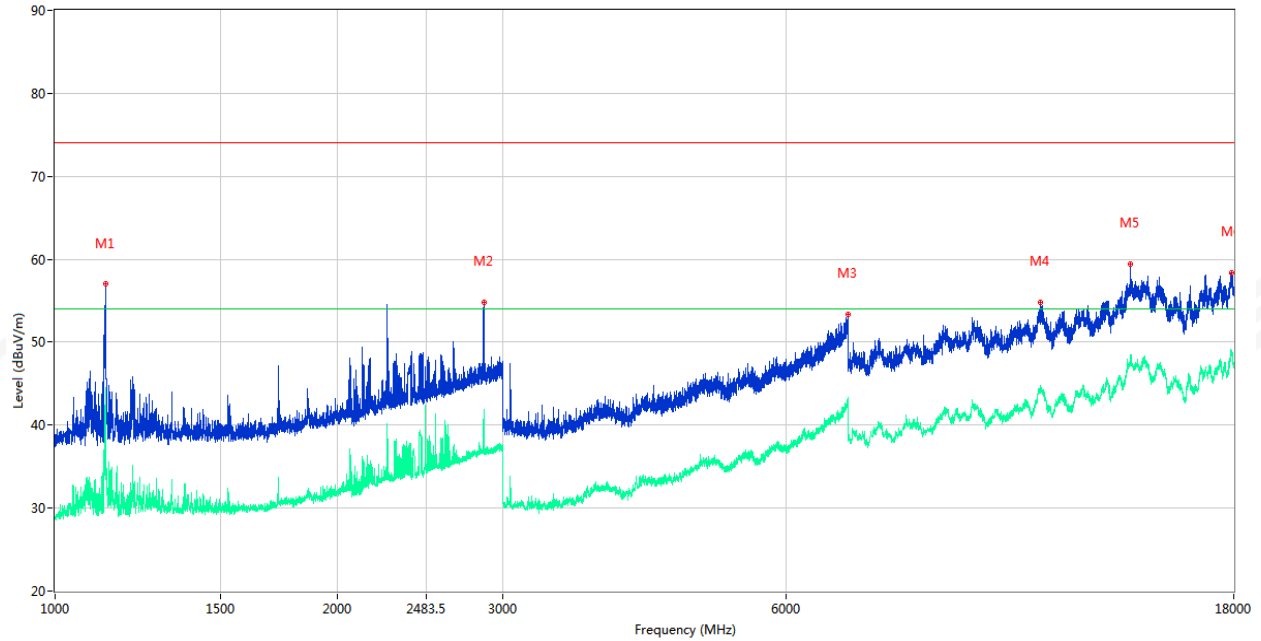8DPSK
Low Channel
Horizontal


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin-(dB)	Detector	Table (Degree)	Antenna	Verdict
1	1131.000	56.98	-1.71	74.0	-17.02	Peak	151.00	Horizontal	Pass
1**	1131.000	44.48	-1.71	54.0	-9.52	AV	151.00	Horizontal	Pass
2	2863.500	54.77	4.97	74.0	-19.23	Peak	111.20	Horizontal	Pass
2**	2863.500	41.93	4.97	54.0	-12.07	AV	111.20	Horizontal	Pass
3	6996.000	53.30	1.29	74.0	-20.70	Peak	1.00	Horizontal	Pass
3**	6996.000	42.87	1.29	54.0	-11.13	AV	1.00	Horizontal	Pass
4	11207.500	54.81	2.59	74.0	-19.19	Peak	55.10	Horizontal	Pass
4**	11207.500	44.49	2.59	54.0	-9.51	AV	55.10	Horizontal	Pass
5	13954.750	59.45	7.88	74.0	-14.55	Peak	264.40	Horizontal	Pass
5**	13954.750	48.45	7.88	54.0	-5.55	AV	264.40	Horizontal	Pass
6	17890.001	58.40	7.15	74.0	-15.60	Peak	40.20	Horizontal	Pass
6**	17890.001	48.49	7.15	54.0	-5.51	AV	40.20	Horizontal	Pass



18GHz-26GHz

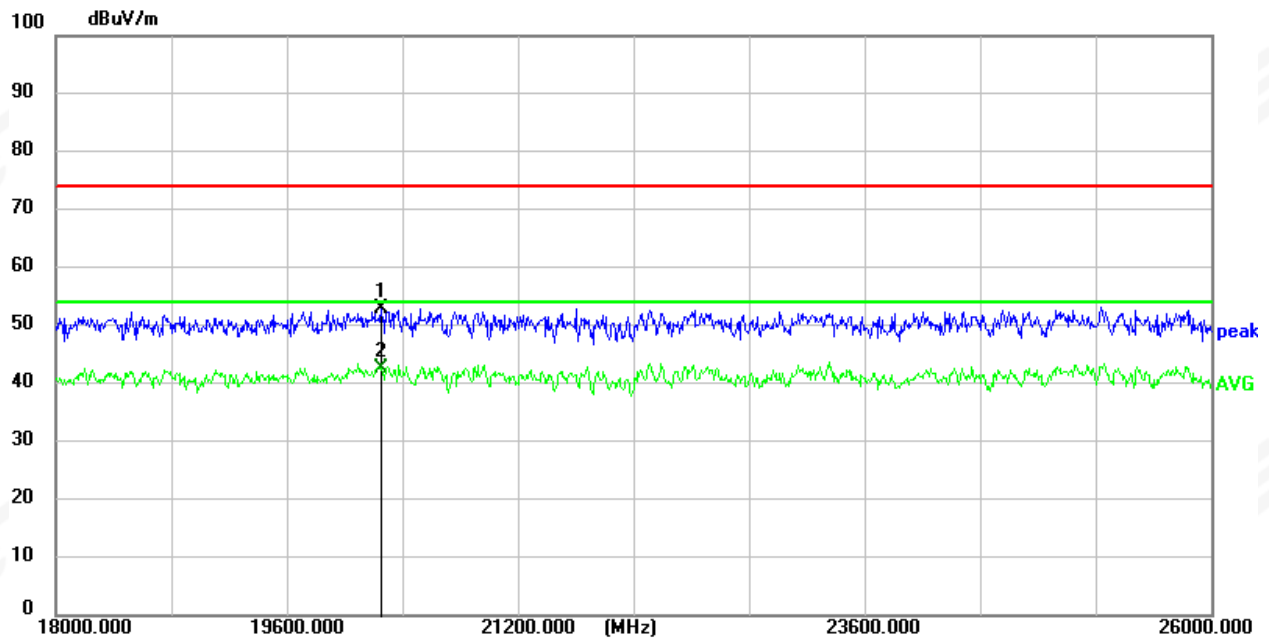


No.	Frequency (MHz)	Reading Level(dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Pass/Fail
1	20256.0000	50.79	2.02	52.81	74.00	-21.19	peak	Pass
2 *	20256.0000	40.52	2.02	42.54	54.00	-11.46	AVG	Pass

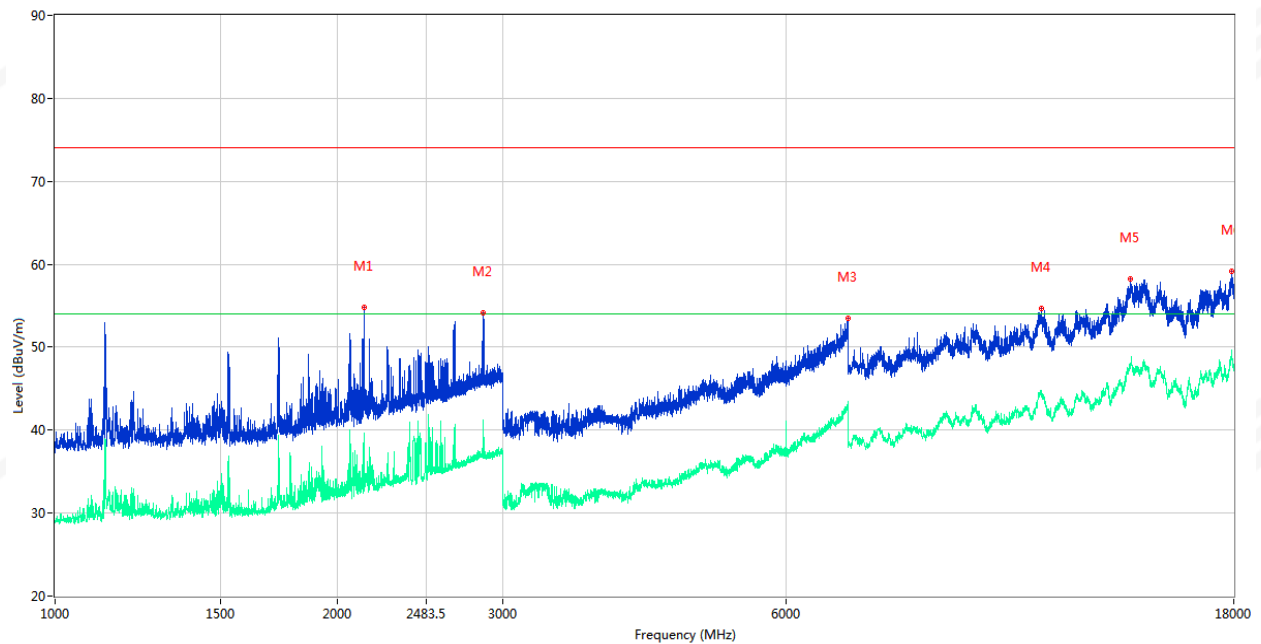Vertical
1GHz-18GHz


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin-(dB)	Detector	Table (Degree)	Antenna	Verdict
1	2133.000	54.83	1.53	74.0	-19.17	Peak	93.60	Vertical	Pass
1**	2133.000	39.68	1.53	54.0	-14.32	AV	93.60	Vertical	Pass
2	2857.000	54.20	4.98	74.0	-19.80	Peak	76.90	Vertical	Pass
2**	2857.000	41.23	4.98	54.0	-12.77	AV	76.90	Vertical	Pass
3	6984.000	53.49	1.19	74.0	-20.51	Peak	311.60	Vertical	Pass
3**	6984.000	42.95	1.19	54.0	-11.05	AV	311.60	Vertical	Pass
4	11229.500	54.70	2.52	74.0	-19.30	Peak	159.40	Vertical	Pass
4**	11229.500	44.56	2.52	54.0	-9.44	AV	159.40	Vertical	Pass
5	13957.500	58.27	7.92	74.0	-15.73	Peak	8.80	Vertical	Pass
5**	13957.500	47.83	7.92	54.0	-6.17	AV	8.80	Vertical	Pass
6	17909.250	59.16	7.17	74.0	-14.84	Peak	80.60	Vertical	Pass
6**	17909.250	48.83	7.17	54.0	-5.17	AV	80.60	Vertical	Pass



18GHz-26GHz

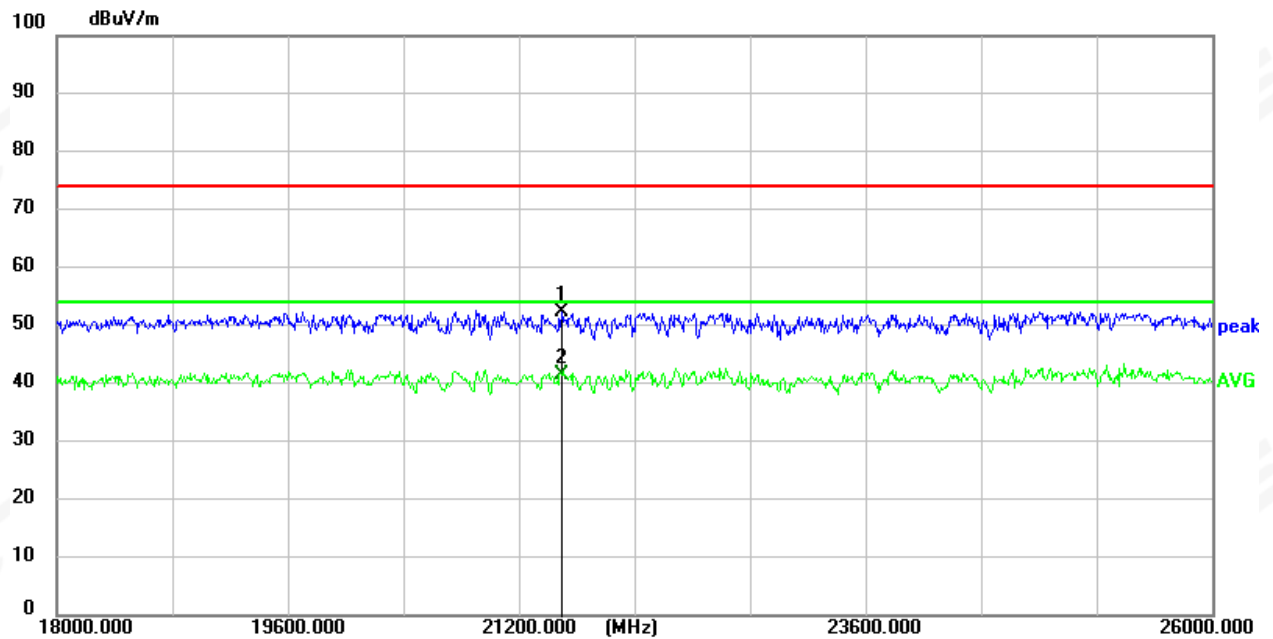


No.	Frequency (MHz)	Reading Level(dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Pass/Fail
1	21496.0000	49.32	2.94	52.26	74.00	-21.74	peak	Pass
2 *	21496.0000	38.59	2.94	41.53	54.00	-12.47	AVG	Pass

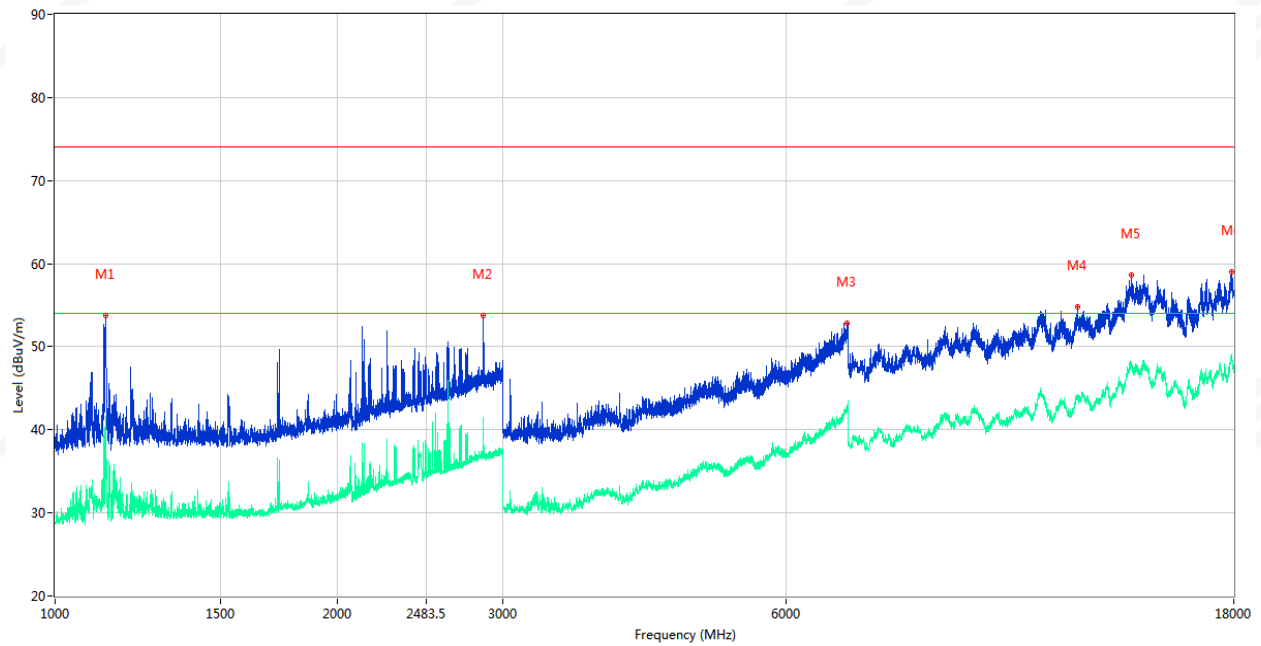Mid Channel
Horizontal
1GHz-18GHz


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin-(dB)	Detector	Table (Degree)	Antenna	Verdict
1	1133.000	53.76	-1.70	74.0	-20.24	Peak	232.40	Horizontal	Pass
1**	1133.000	40.47	-1.70	54.0	-13.53	AV	232.40	Horizontal	Pass
2	2859.500	53.76	4.98	74.0	-20.24	Peak	130.40	Horizontal	Pass
2**	2859.500	40.45	4.98	54.0	-13.55	AV	130.40	Horizontal	Pass
3	6974.000	52.82	1.11	74.0	-21.18	Peak	33.70	Horizontal	Pass
3**	6974.000	42.70	1.11	54.0	-11.30	AV	33.70	Horizontal	Pass
4	12280.001	54.81	2.94	74.0	-19.19	Peak	42.60	Horizontal	Pass
4**	12280.001	43.76	2.94	54.0	-10.24	AV	42.60	Horizontal	Pass
5	13993.250	58.65	8.37	74.0	-15.35	Peak	358.90	Horizontal	Pass
5**	13993.250	48.08	8.37	54.0	-5.92	AV	358.90	Horizontal	Pass
6	17906.500	59.00	7.19	74.0	-15.00	Peak	89.80	Horizontal	Pass
6**	17906.500	48.95	7.19	54.0	-5.05	AV	89.80	Horizontal	Pass



18GHz-26GHz

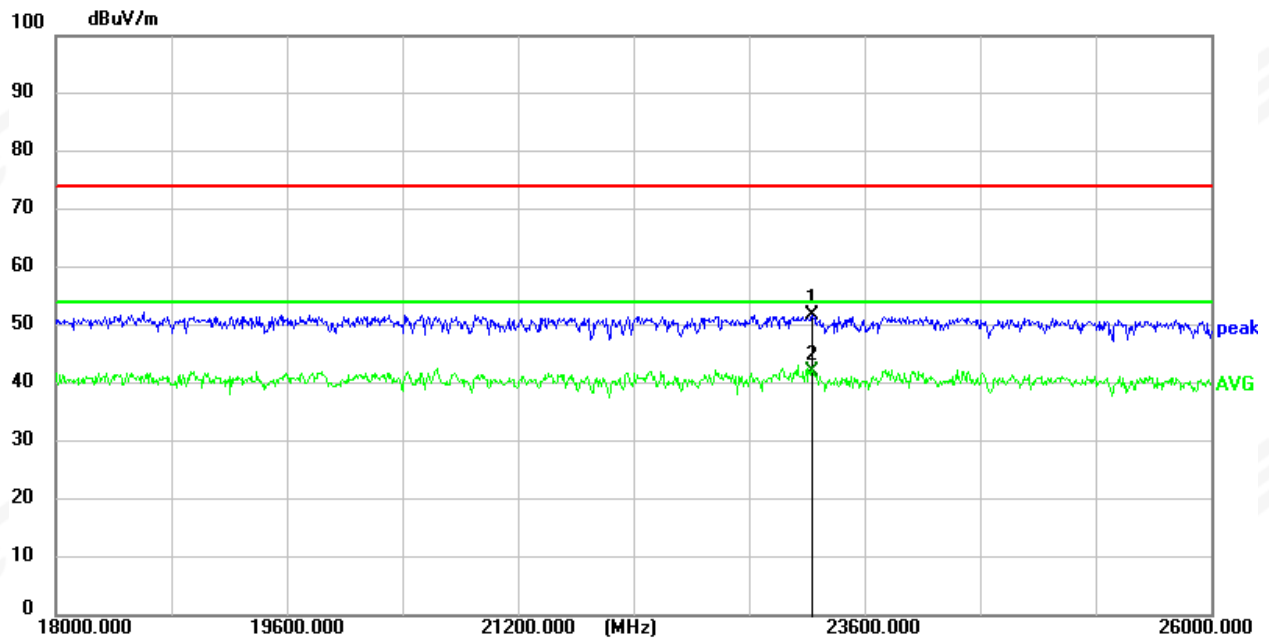


No.	Frequency (MHz)	Reading Level(dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Pass/Fail
1	23240.0000	47.81	3.87	51.68	74.00	-22.32	peak	Pass
2 *	23240.0000	38.31	3.87	42.18	54.00	-11.82	AVG	Pass

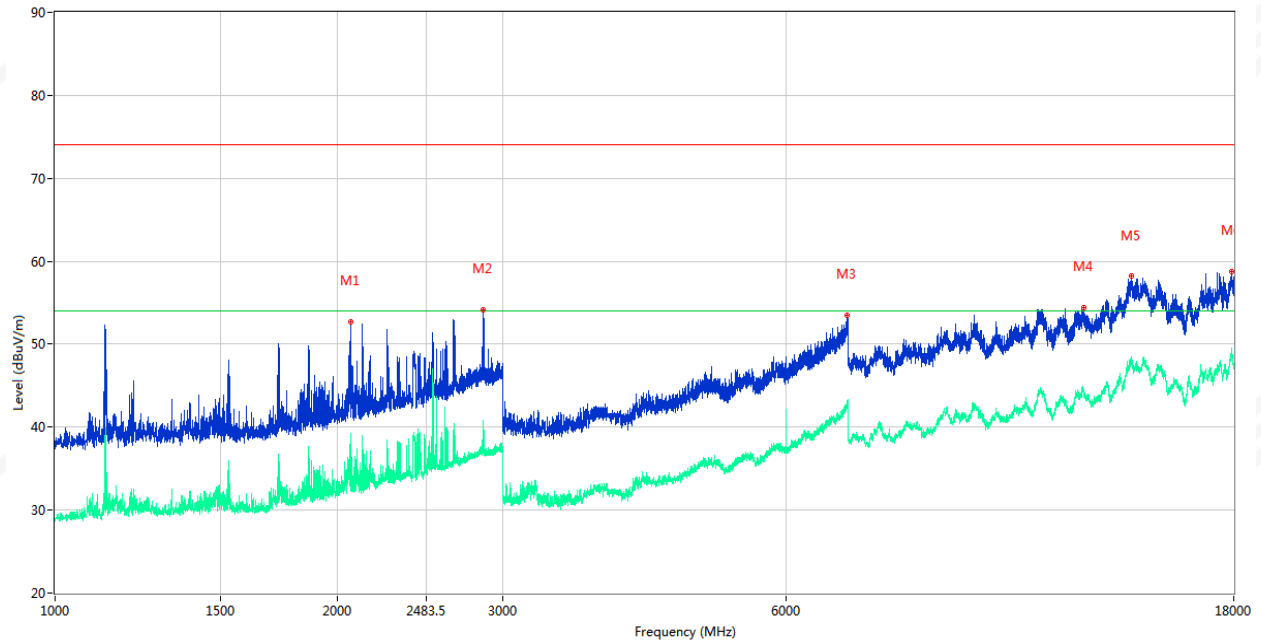Vertical
1GHz-18GHz


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin-(dB)	Detector	Table (Degree)	Antenna	Verdict
1	2063.500	52.69	0.83	74.0	-21.31	Peak	104.00	Vertical	Pass
1**	2063.500	39.19	0.83	54.0	-14.81	AV	104.00	Vertical	Pass
2	2854.500	54.14	4.99	74.0	-19.86	Peak	224.80	Vertical	Pass
2**	2854.500	40.05	4.99	54.0	-13.95	AV	224.80	Vertical	Pass
3	6981.000	53.45	1.17	74.0	-20.55	Peak	95.90	Vertical	Pass
3**	6981.000	43.14	1.17	54.0	-10.86	AV	95.90	Vertical	Pass
4	12450.500	54.37	2.67	74.0	-19.63	Peak	191.30	Vertical	Pass
4**	12450.500	44.14	2.67	54.0	-9.86	AV	191.30	Vertical	Pass
5	13996.000	58.17	8.40	74.0	-15.83	Peak	217.30	Vertical	Pass
5**	13996.000	48.12	8.40	54.0	-5.88	AV	217.30	Vertical	Pass
6	17892.749	58.73	7.18	74.0	-15.27	Peak	238.50	Vertical	Pass
6**	17892.749	48.67	7.18	54.0	-5.33	AV	238.50	Vertical	Pass



18GHz-26GHz

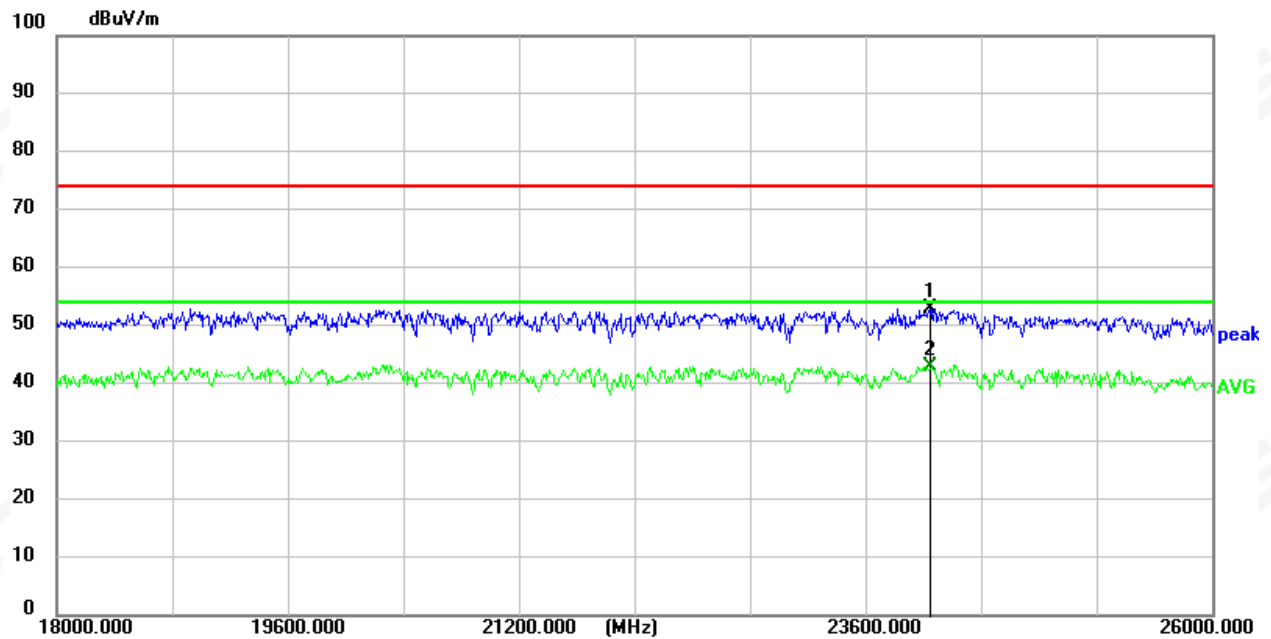


No.	Frequency (MHz)	Reading Level(dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Pass/Fail
1	24048.0000	48.29	4.64	52.93	74.00	-21.07	peak	Pass
2 *	24048.0000	38.37	4.64	43.01	54.00	-10.99	AVG	Pass

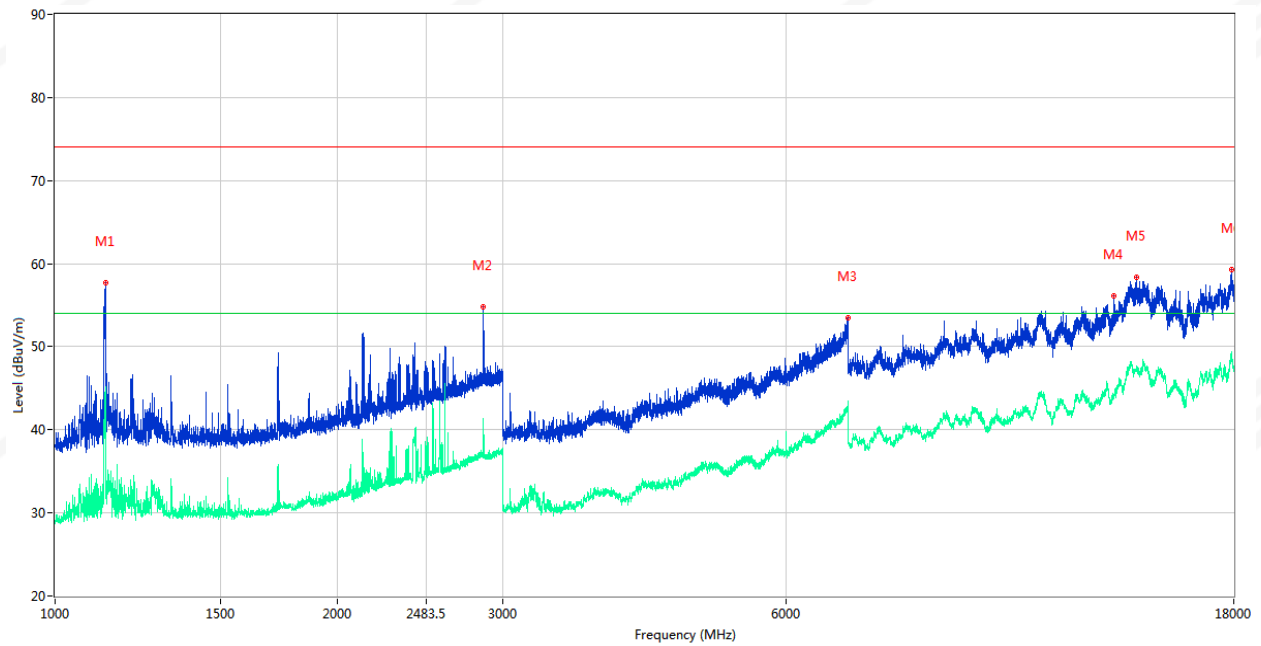High Channel
Horizontal
1GHz-18GHz


No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin-(dB)	Detector	Table (Degree)	Antenna	Verdict
1	1133.000	57.65	-1.70	74.0	-16.35	Peak	95.20	Horizontal	Pass
1**	1133.000	41.21	-1.70	54.0	-12.79	AV	95.20	Horizontal	Pass
2	2856.000	54.77	4.98	74.0	-19.23	Peak	128.00	Horizontal	Pass
2**	2856.000	41.35	4.98	54.0	-12.65	AV	128.00	Horizontal	Pass
3	7000.000	53.47	1.32	74.0	-20.53	Peak	245.00	Horizontal	Pass
3**	7000.000	43.09	1.32	54.0	-10.91	AV	245.00	Horizontal	Pass
4	13413.000	56.10	4.39	74.0	-17.90	Peak	5.80	Horizontal	Pass
4**	13413.000	44.09	4.39	54.0	-9.91	AV	5.80	Horizontal	Pass
5	14183.000	58.33	6.94	74.0	-15.67	Peak	16.70	Horizontal	Pass
5**	14183.000	47.05	6.94	54.0	-6.95	AV	16.70	Horizontal	Pass
6	17920.250	59.27	7.08	74.0	-14.73	Peak	213.40	Horizontal	Pass
6**	17920.250	48.98	7.08	54.0	-5.02	AV	213.40	Horizontal	Pass



18GHz-26GHz

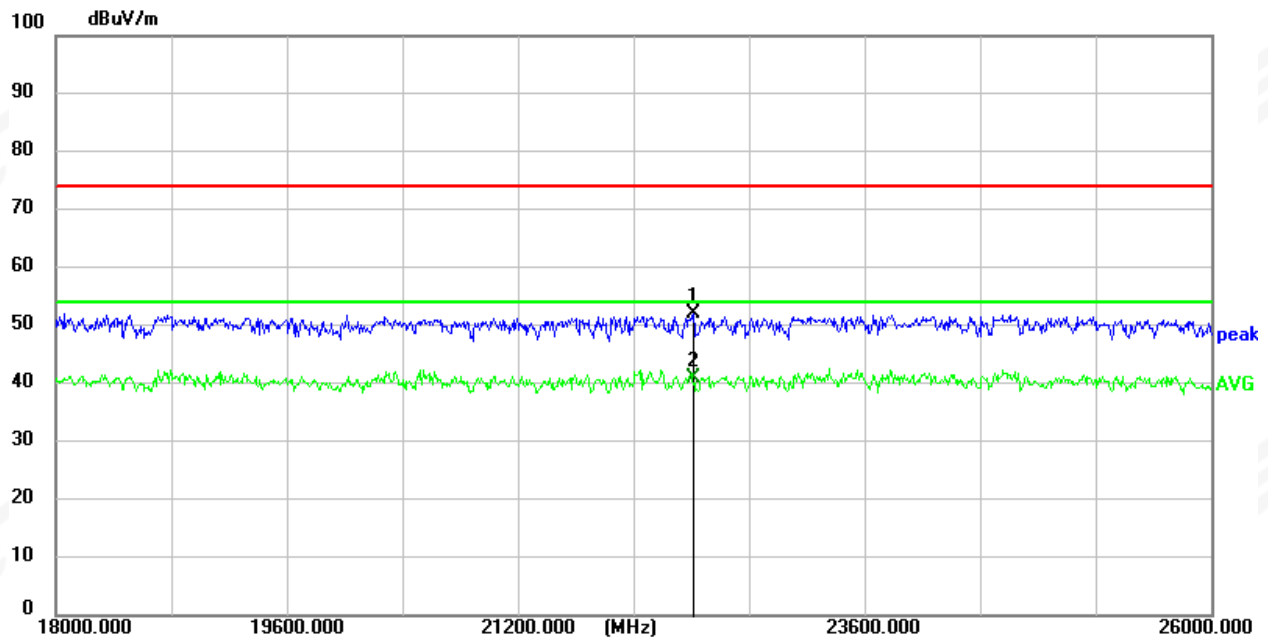


No.	Frequency (MHz)	Reading Level(dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Pass/Fail
1	22416.0000	48.25	3.83	52.08	74.00	-21.92	peak	Pass
2 *	22416.0000	37.16	3.83	40.99	54.00	-13.01	AVG	Pass

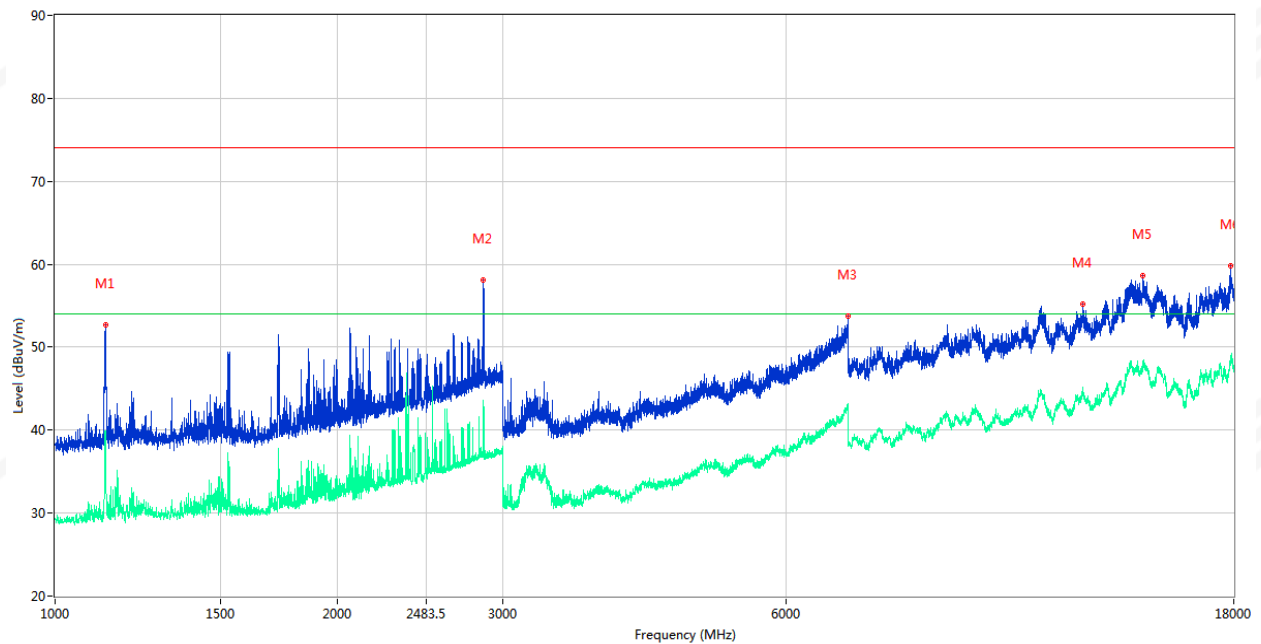Vertical
1GHz-18GHz

No.	Frequency (MHz)	Results (dBuV/m)	Factor (dB/m)	Limit (dBuV/m)	Margin-(dB)	Detector	Table (Degree)	Antenna	Verdict
1	1133.000	52.76	-1.70	74.0	-21.24	Peak	32.20	Vertical	Pass
1**	1133.000	39.94	-1.70	54.0	-14.06	AV	32.20	Vertical	Pass
2	2856.500	58.12	4.98	74.0	-15.88	Peak	137.50	Vertical	Pass
2**	2856.500	43.53	4.98	54.0	-10.47	AV	137.50	Vertical	Pass
3	6998.000	53.70	1.30	74.0	-20.30	Peak	262.40	Vertical	Pass
3**	6998.000	42.99	1.30	54.0	-11.01	AV	262.40	Vertical	Pass
4	12428.500	55.18	2.89	74.0	-18.82	Peak	358.90	Vertical	Pass
4**	12428.500	44.35	2.89	54.0	-9.65	AV	358.90	Vertical	Pass
5	14416.750	58.60	6.87	74.0	-15.40	Peak	360.40	Vertical	Pass
5**	14416.750	48.16	6.87	54.0	-5.84	AV	360.40	Vertical	Pass
6	17873.500	59.77	7.01	74.0	-14.23	Peak	357.90	Vertical	Pass
6**	17873.500	48.52	7.01	54.0	-5.48	AV	357.90	Vertical	Pass



18GHz-26GHz

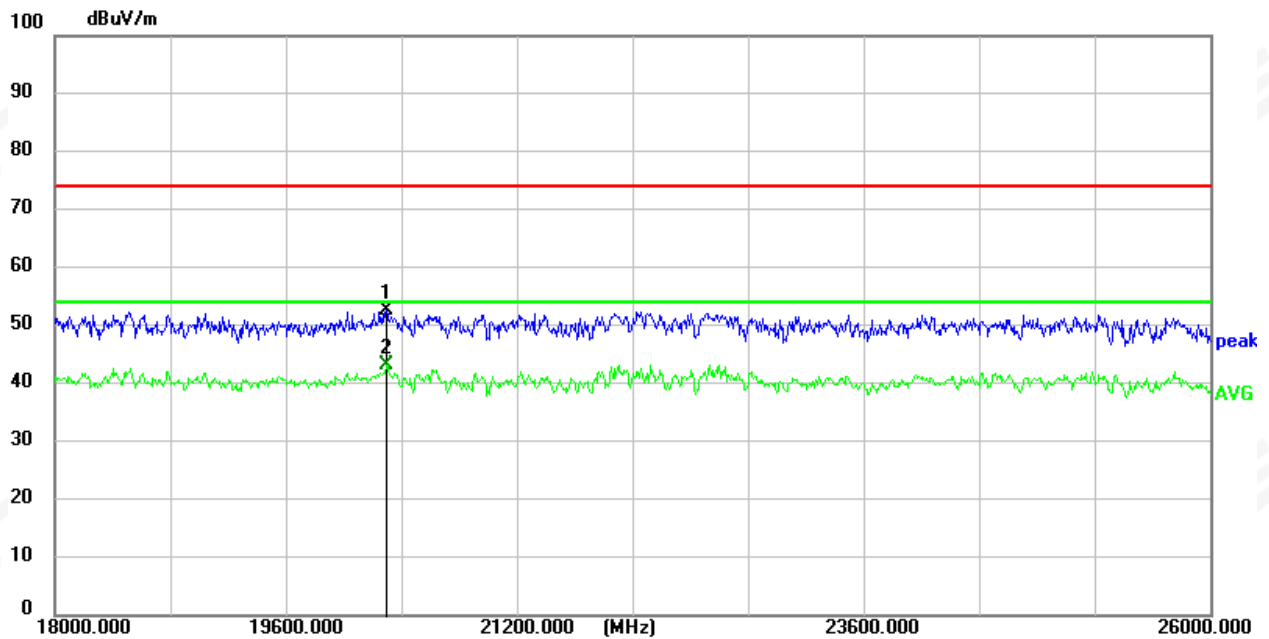

No.	Frequency (MHz)	Reading Level(dBuV/m)	Factor (dB)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Pass/Fail
1	20296.0000	50.57	2.06	52.63	74.00	-21.37	peak	Pass
2 *	20296.0000	41.18	2.06	43.24	54.00	-10.76	AVG	Pass

Note:

- 1) Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Emission Level = Reading + Factor.
- 2) The frequency emission of peak points that did not show above the forms are at least 20dB below the limit, the frequency emission is mainly from the environment noise.
- 3) All modes have been tested, only show the worst mode of 8DPSK in the report.



4. EMISSIONS AT RESTRICTED BAND

4.1 LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

4.2 TEST PROCEDURE

According to ANSI C63.10 Field Strength Approach (linear terms):

$$E = \text{EIRP} - 20 \log d + 104.8$$

Where:

E is the electric field strength in dBuV/m

EIRP is the equivalent isotropically radiated power in dBm

d is the specified measurement distance in m

f) Compare the resultant electric field strength level with the applicable regulatory limit.

g) Perform the radiated spurious emission test.

Where all terms are as previously defined.

- 1). Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2). Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to an EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
- 3). Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz for peak detector and RBW=1MHz, VBW=3 MHz for AVG detector, Max Hold=Average, Trace=100times for AV test.
- 4). Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
- 5). Repeat above procedures until all measured frequencies were complete.
- 6). Measure the conducted output power (in dBm) using the detector specified by the appropriate regulatory agency for guidance regarding measurement procedures for determining quasi-peak, peak, and average conducted output power, respectively).
- 7). Add the maximum transmit antenna gain (in dBi) to the measured output power level to determine the EIRP level (see 12.2.5 for guidance on determining the applicable antenna gain)
- 8). Add the appropriate maximum ground reflection factor to the EIRP level (6 dB for frequencies ≤ 30 MHz, 4.7 dB for frequencies between 30 MHz and 1000 MHz, inclusive and 0 dB for frequencies $>$



1000 MHz).

9). For devices with multiple antenna-ports, measure the power of each individual chain and sum the EIRP of all chains in linear terms (e.g., Watts, mW).


10). Compare the resultant electric field strength level to the applicable regulatory limit.

11). Perform radiated spurious emission test duress until all measured frequencies were complete.

4.3 DEVIATION FROM STANDARD

No deviation.

4.4 TEST SETUP

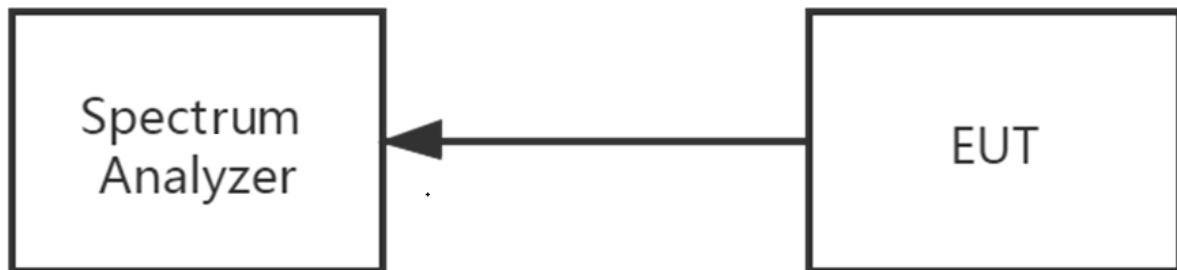

4.5 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

4.6 TEST RESULTS

Note: The test data please refer to APPENDIX 1.

Remark:

- 1). Test results including cable loss;
- 2). Measured at difference Packet Type for each mode and recorded worst case for each mode.
- 3). "----" means that the fundamental frequency not for 15.209 limits requirement.
- 4). Measured at Hopping and Non-Hopping mode, recorded worst at Non-Hopping mode.
- 5). The other emission levels were very low against the limit.
- 6). The average measurement was not performed when the peak measured data under the limit of average detection.
- 7). Detector AV is setting spectrum/receiver. RBW=1MHz/VBW=3MHz/Sweep time=Auto/Detector=RMS, Max Hold=Average, Trace=100times.
- 8). Since the out-of-band characteristics of the EUT transmit antenna will often be unknown, the use of a conservative antenna gain value is necessary. Thus, when determining the EIRP based on the measured conducted power, the upper bound on antenna gain for a device with a single RF output shall be selected as the maximum in-band gain of the antenna across all operating bands, or 2 dBi, whichever is greater. However, for devices that operate in multiple frequency bands while using the same transmit antenna, the highest gain of the antenna within the operating band nearest in frequency to the restricted band emission being measured may be used in lieu of the overall highest gain when the emission is at a frequency that is within 20 percent of the nearest band edge frequency, but in no case shall a value less than 2 dBi be used.



5. CONDUCTED SPURIOUS & BAND EDGE EMISSION

5.1 LIMIT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.2 TEST PROCEDURE

Spectrum Parameter	Setting
Detector	Peak
Start/Stop Frequency	30 MHz to 10th carrier harmonic
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Band edge

Spectrum Parameter	Setting
Detector	Peak
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

For Hopping Band edge

For Hopping Band edge	For Hopping Band edge
Detector	Peak
RB / VB (emission in restricted band)	100 KHz/300 KHz
Trace-Mode:	Max hold

5.3 TEST SETUP



The EUT is connected to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. Tune the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, the span is set to be greater than RBW.

5.4 EUT OPERATION CONDITIONS



Please refer to section 3.1.4 of this report.

5.5 TEST RESULTS

Note:

1. The test data please refer to APPENDIX 1.

2. Input compensation coefficient (dB) = Cable Loss (dB)

For Conducted spurious emissions plots from 30MHz to 26.5GHz, the worst cable loss and attenuator factors have been set in the 'Input Correction' of the Spectrum Analyzer during the test.



6. NUMBER OF HOPPING CHANNEL

6.1 LIMIT


FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(iii)	Number of Hopping Channel	≥ 15	2400-2483.5	PASS

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> Operating Frequency Range
RB	100KHz
VB	300KHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as shown in the block diagram below.
- Spectrum Setting: RBW= 100KHz, VBW=300KHz, Sweep time = Auto.

6.3 TEST SETUP

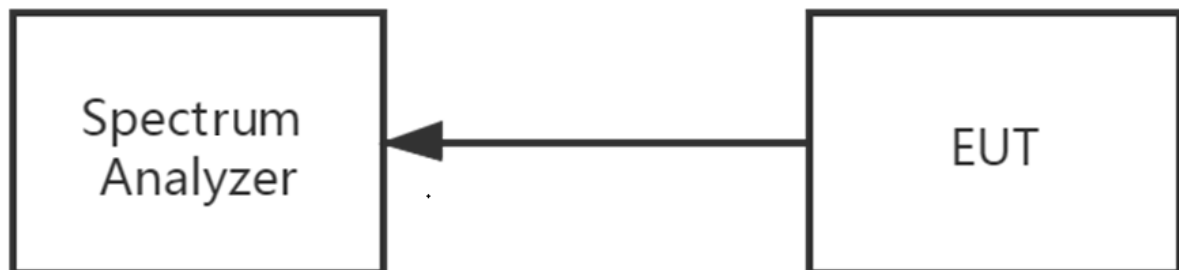

6.4 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

6.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



7. AVERAGE TIME OF OCCUPANCY


7.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)(iii)	Average Time of Occupancy	0.4sec	2400-2483.5	PASS

7.2 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyzer.
- Set RBW = 1MHz/VBW = 3MHz.
- Use a video trigger with the trigger level set to enable triggering only on full pulses.
- Sweep Time is more than once pulse time.
Set the center frequency on any frequency would be measure and set the frequency span to
- zero span.
- Measure the maximum time duration of one single pulse.
The Dwell Time = Burst Width * Total Hops. The detailed calculations are showed as follows:
The duration for dwell time calculation: $0.4[s] * \text{hopping number} = 0.4[s] * 79[\text{ch}] = 31.6[s * \text{ch}]$;
Dwell Time Calculate formula:
Dwell time = pulse time (ms) x pulse number in 31.6s

7.3 TEST SETUP

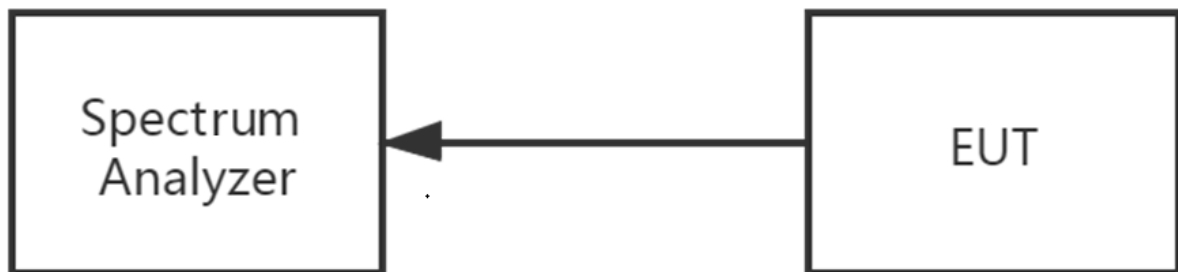

7.4 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

7.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



8. HOPPING CHANNEL SEPARATION MEASUREMENT

8.1 LIMIT

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 20 dB Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 300 kHz (Channel Separation)
VB	$\geq 3 \times \text{RB}$ kHz (20dB Bandwidth) / 300 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.2 TEST PROCEDURE

- The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
- The resolution bandwidth of 30 kHz and the video bandwidth of be equal or greater than $3 \times \text{RB}$ kHz were utilised for 20 dB bandwidth measurement.
- The resolution bandwidth of 300 kHz and the video bandwidth of 300 kHz were utilised for channel separation measurement.

8.3 TEST SETUP



8.4 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



9. BANDWIDTH TEST

9.1 LIMIT

FCC Part15 15.247,Subpart C				
Section	Test Item	Limit	FrequencyRange (MHz)	Result
15.247 (a)(1)	Bandwidth	N/A	2400-2483.5	PASS

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> Measurement Bandwidth or Channel Separation
RB	30 kHz (20dB Bandwidth) / 300 kHz (Channel Separation)
VB	$\geq 3 \times \text{RB}$ kHz (20dB Bandwidth) / 300 kHz (Channel Separation)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting: RBW= 30KHz, VBW $\geq 3 \times$ RB KHz, Sweep time = Auto.

9.3 TEST SETUP



9.4 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

9.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



10. OUTPUT POWER TEST

10.1 LIMIT

FCC Part 15.247, Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247 (a)(1)&(b)(1)	Output Power	1 W or 0.125W	2400-2483.5	PASS
		if channel separation > 2/3 bandwidth provided the systems operate with an output power no greater than 125 mW (20.97dBm)		

10.2 TEST PROCEDURE

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. The hopping shall be disabled for this test:

a) Use the following spectrum analyzer settings:

1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.

2) RBW > 20 dB bandwidth of the emission being measured.

3) VBW ≥ RBW.

4) Sweep: Auto.

5) Detector function: Peak.

6) Trace: Max hold.

b) Allow trace to stabilize.

c) Use the marker-to-peak function to set the marker to the peak of the emission.

d) The indicated level is the peak output power, after any corrections for external attenuators and cables.

e) A plot of the test results and setup description shall be included in the test report.



10.3 TEST SETUP



10.4 EUT OPERATION CONDITIONS

Please refer to section 3.1.4 of this report.

10.5 TEST RESULTS

Note: The test data please refer to APPENDIX 1.



11. ANTENNA REQUIREMENT

11.1 STANDARD REQUIREMENT


15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


11.2 EUT ANTENNA


The EUT antenna is PCB Antenna. It comply with the standard requirement.


**APPENDIX 1-TEST DATA****Dwell Time**


Condition	Mode	Frequency (MHz)	Pulse Time (ms)	Total Dwell Time (ms)	Burst Count	Period Time (ms)	Limit (ms)	Verdict
NVNT	1-DH1	2441	0.381	119.634	314	31600	<=400	Pass
NVNT	1-DH3	2441	1.637	235.728	144	31600	<=400	Pass
NVNT	1-DH5	2441	2.885	343.315	119	31600	<=400	Pass
NVNT	2-DH1	2441	0.389	120.979	311	31600	<=400	Pass
NVNT	2-DH3	2441	1.641	264.201	161	31600	<=400	Pass
NVNT	2-DH5	2441	2.889	335.124	116	31600	<=400	Pass
NVNT	3-DH1	2441	0.389	122.924	316	31600	<=400	Pass
NVNT	3-DH3	2441	1.64	252.56	154	31600	<=400	Pass
NVNT	3-DH5	2441	2.892	309.444	107	31600	<=400	Pass

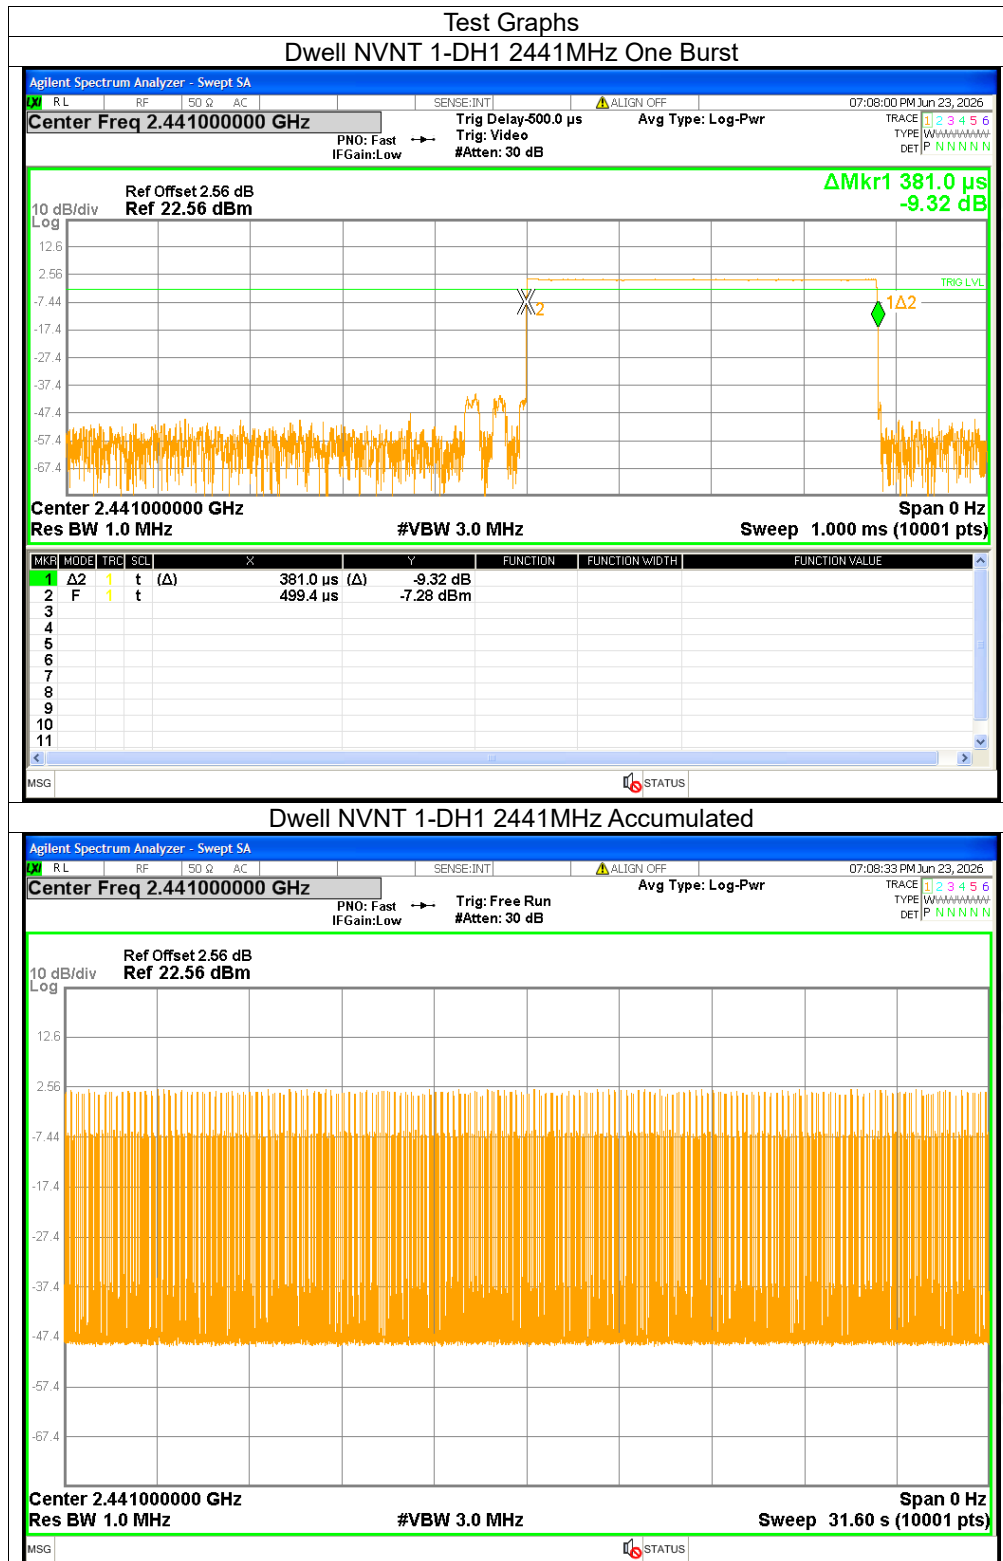


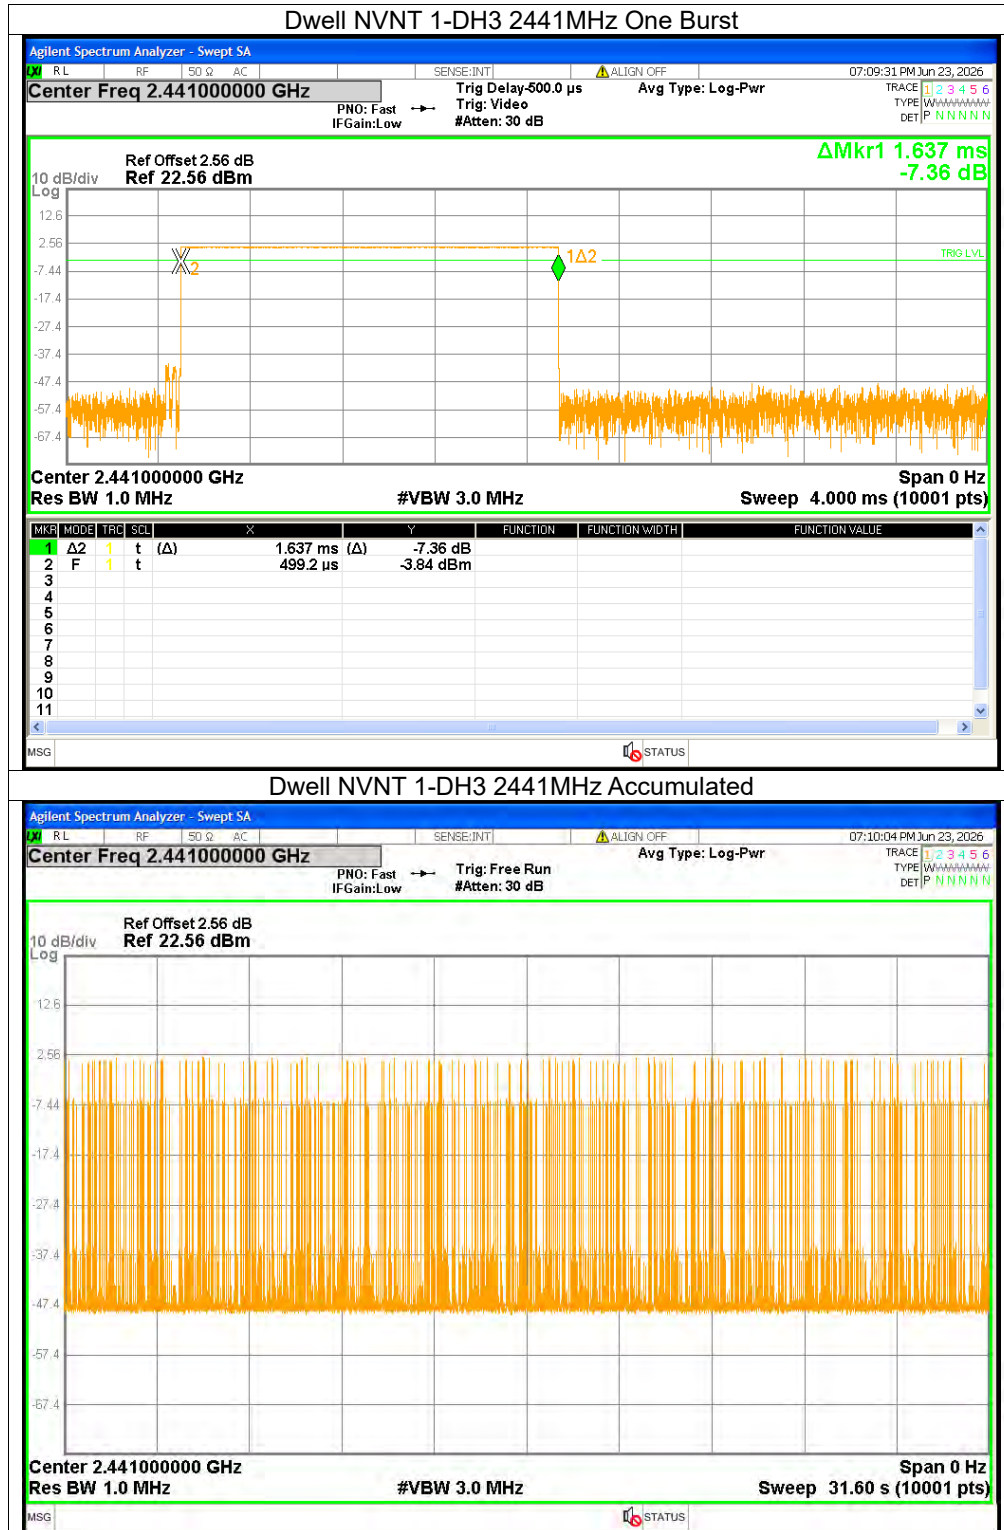


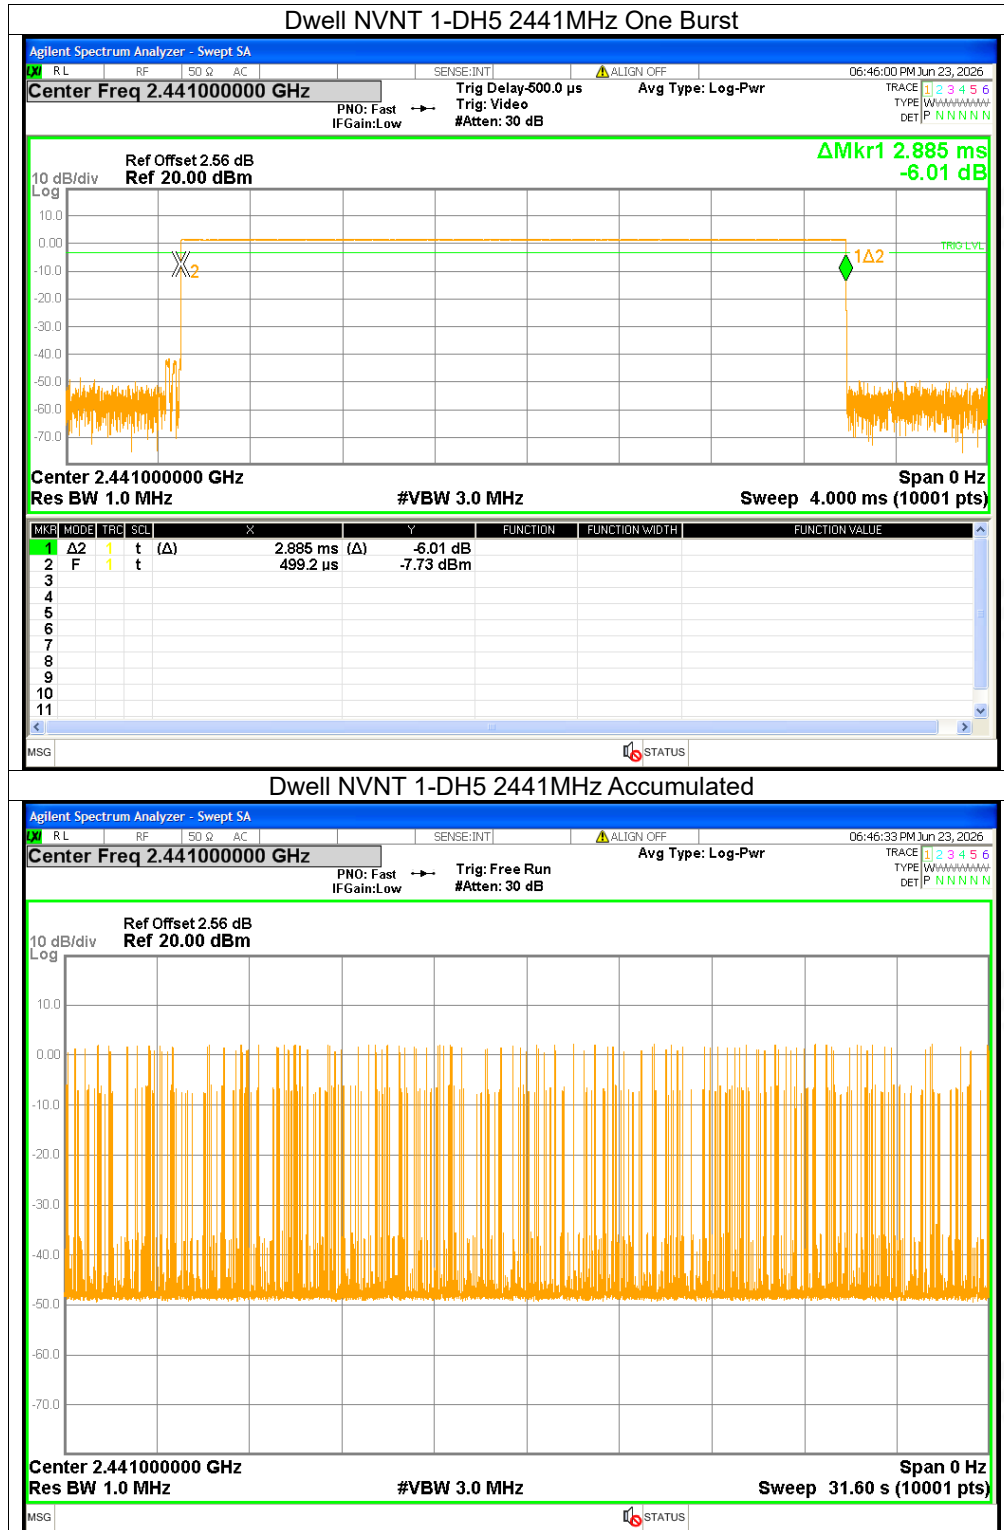


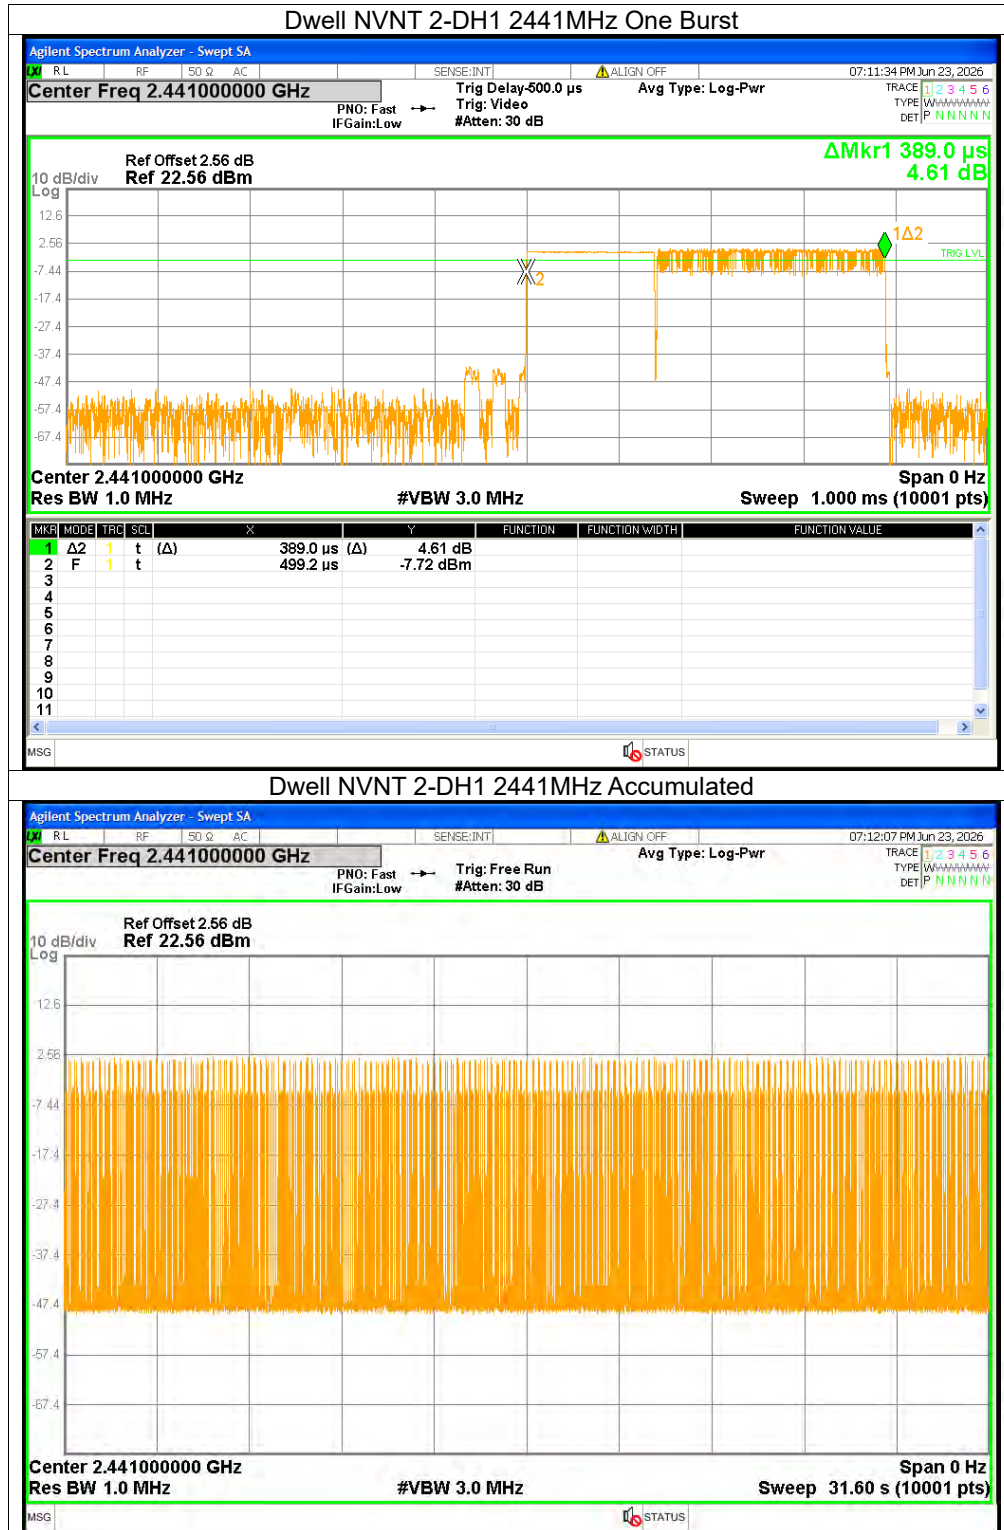


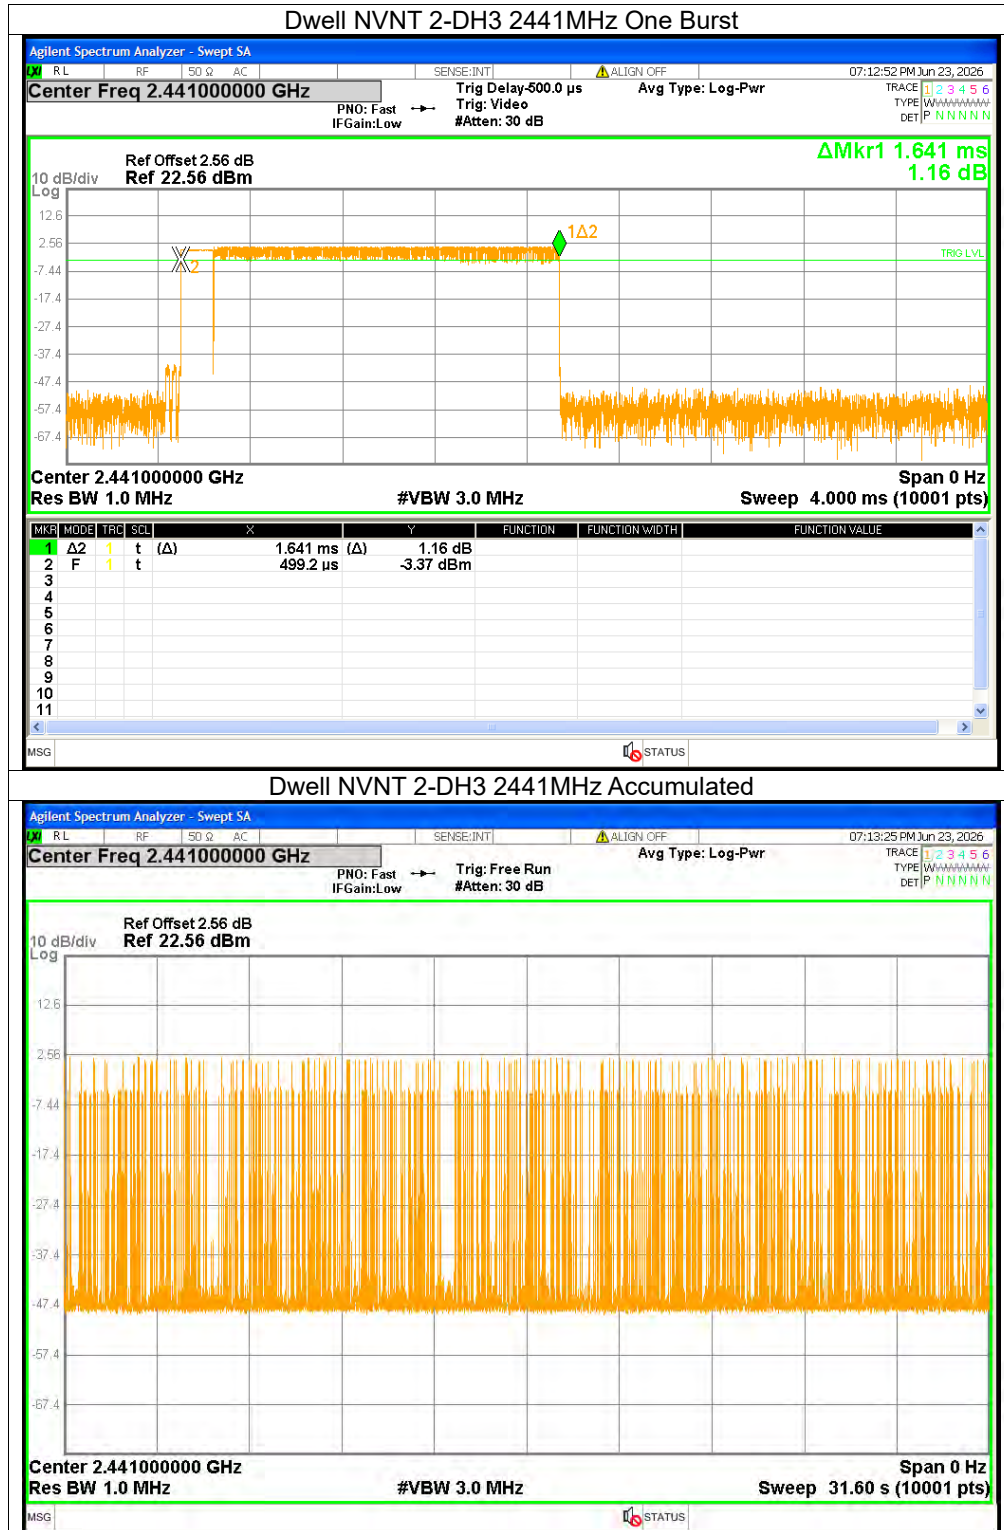

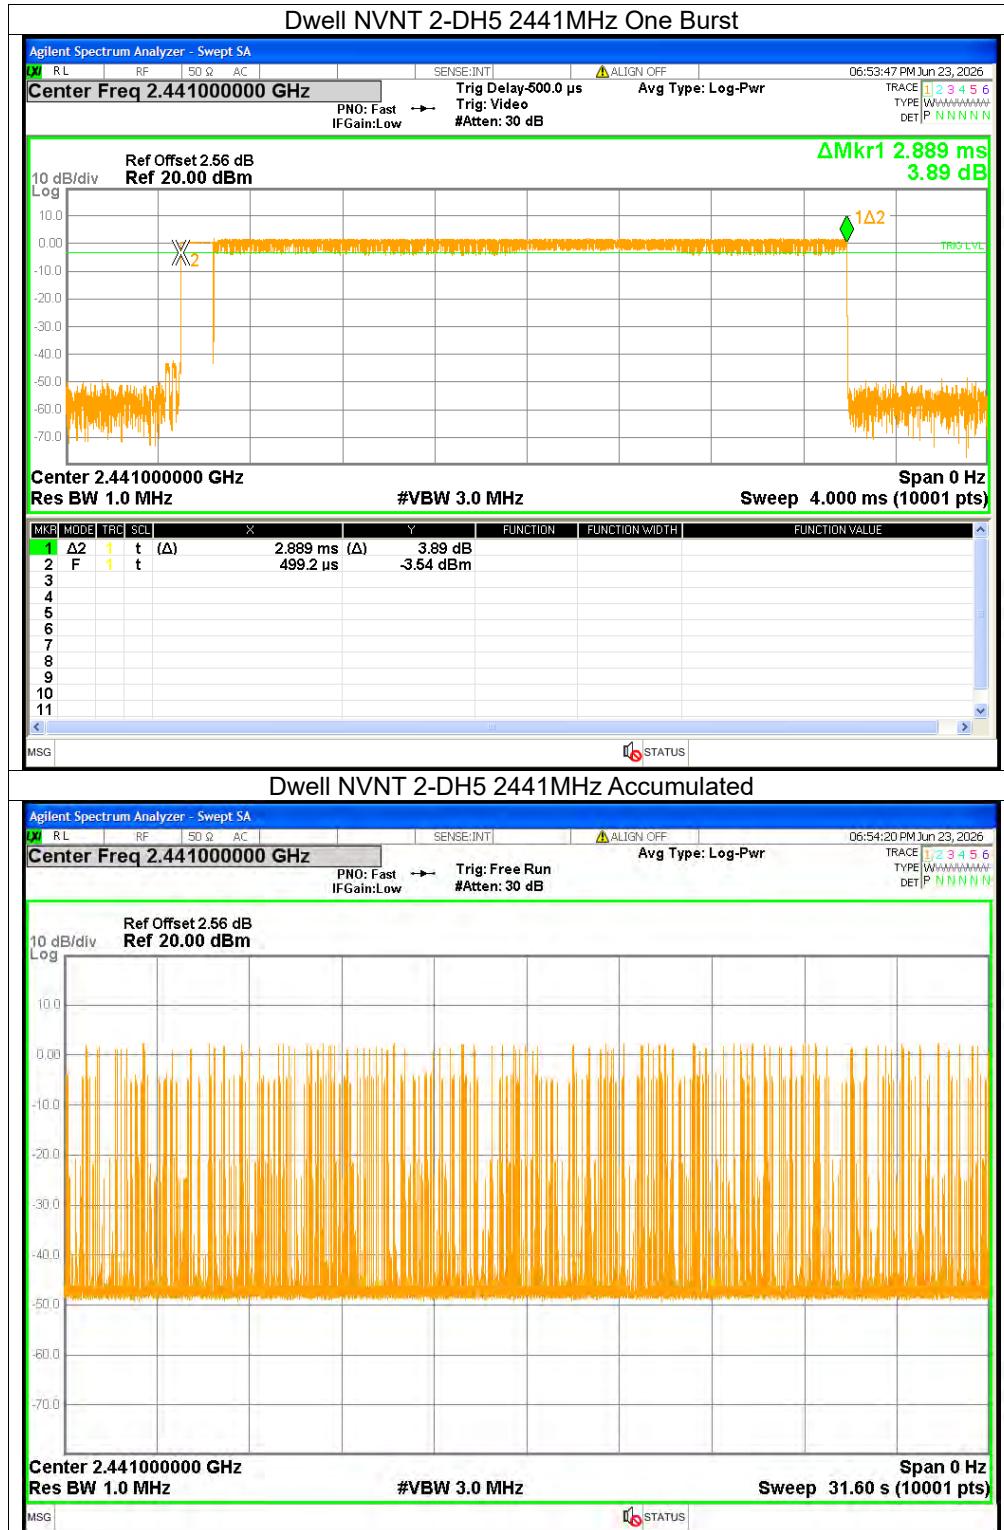

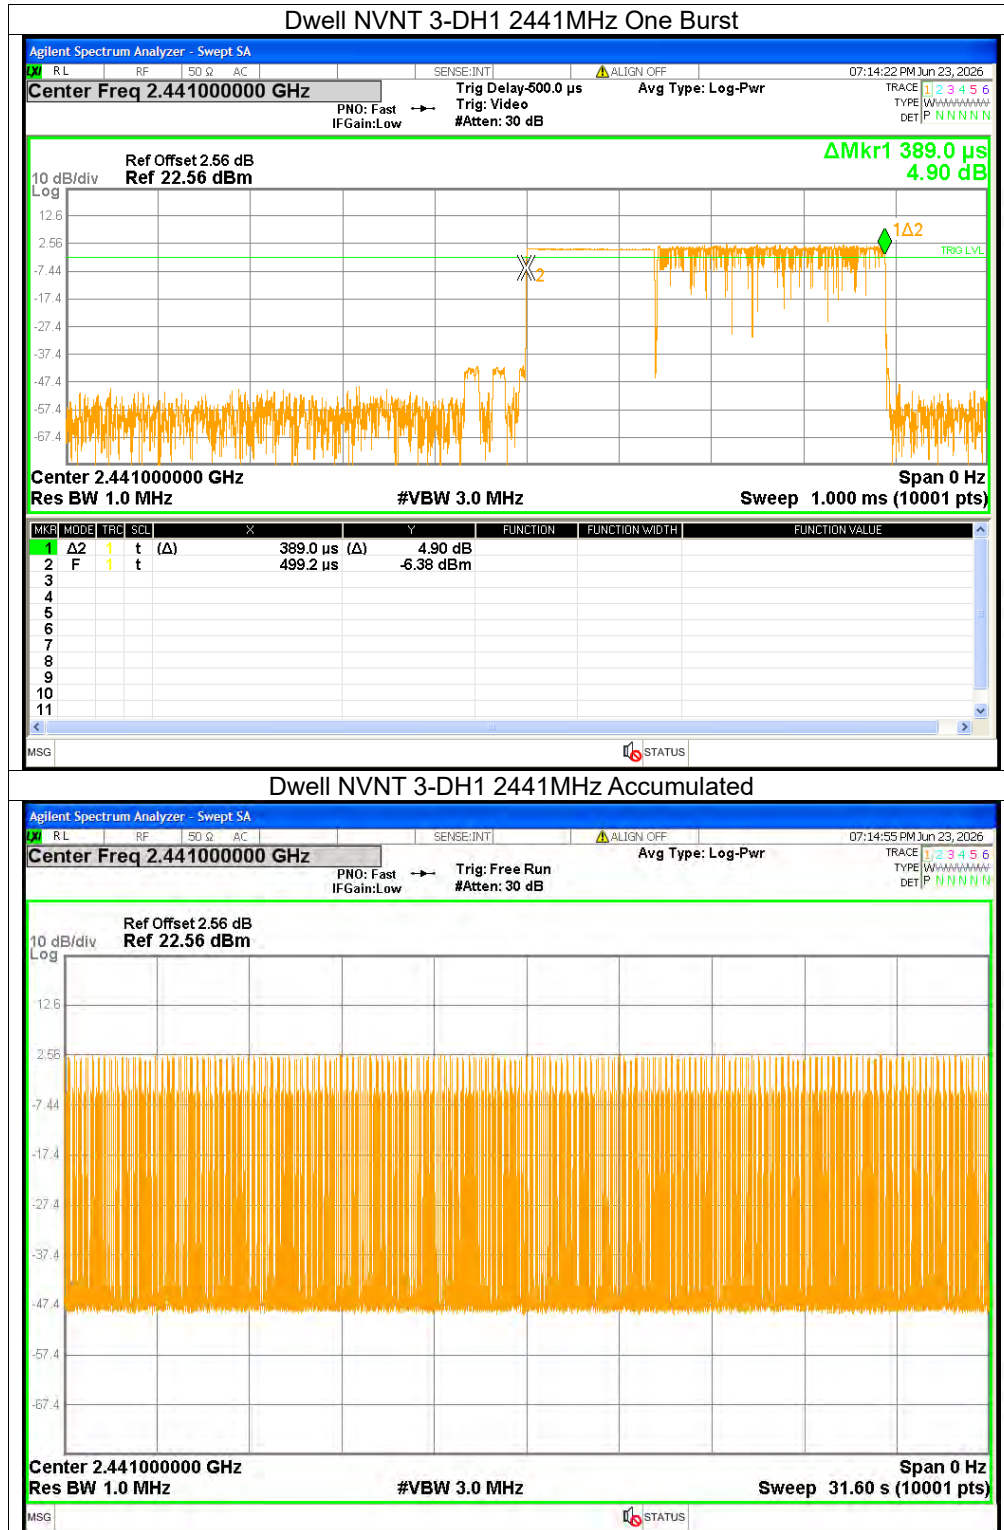

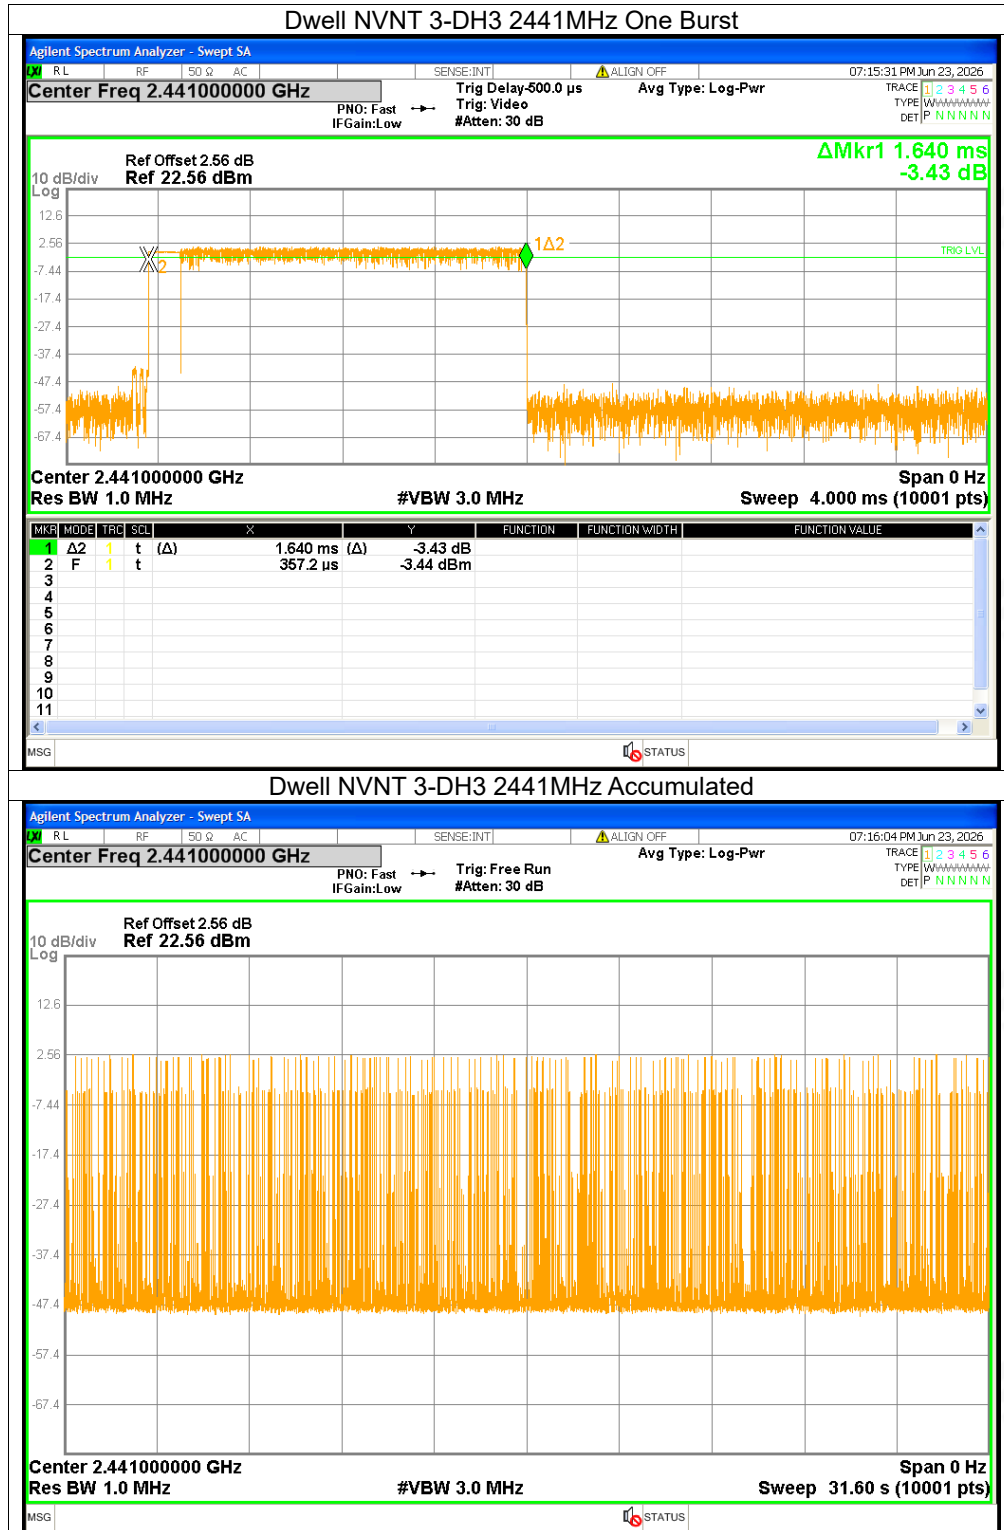


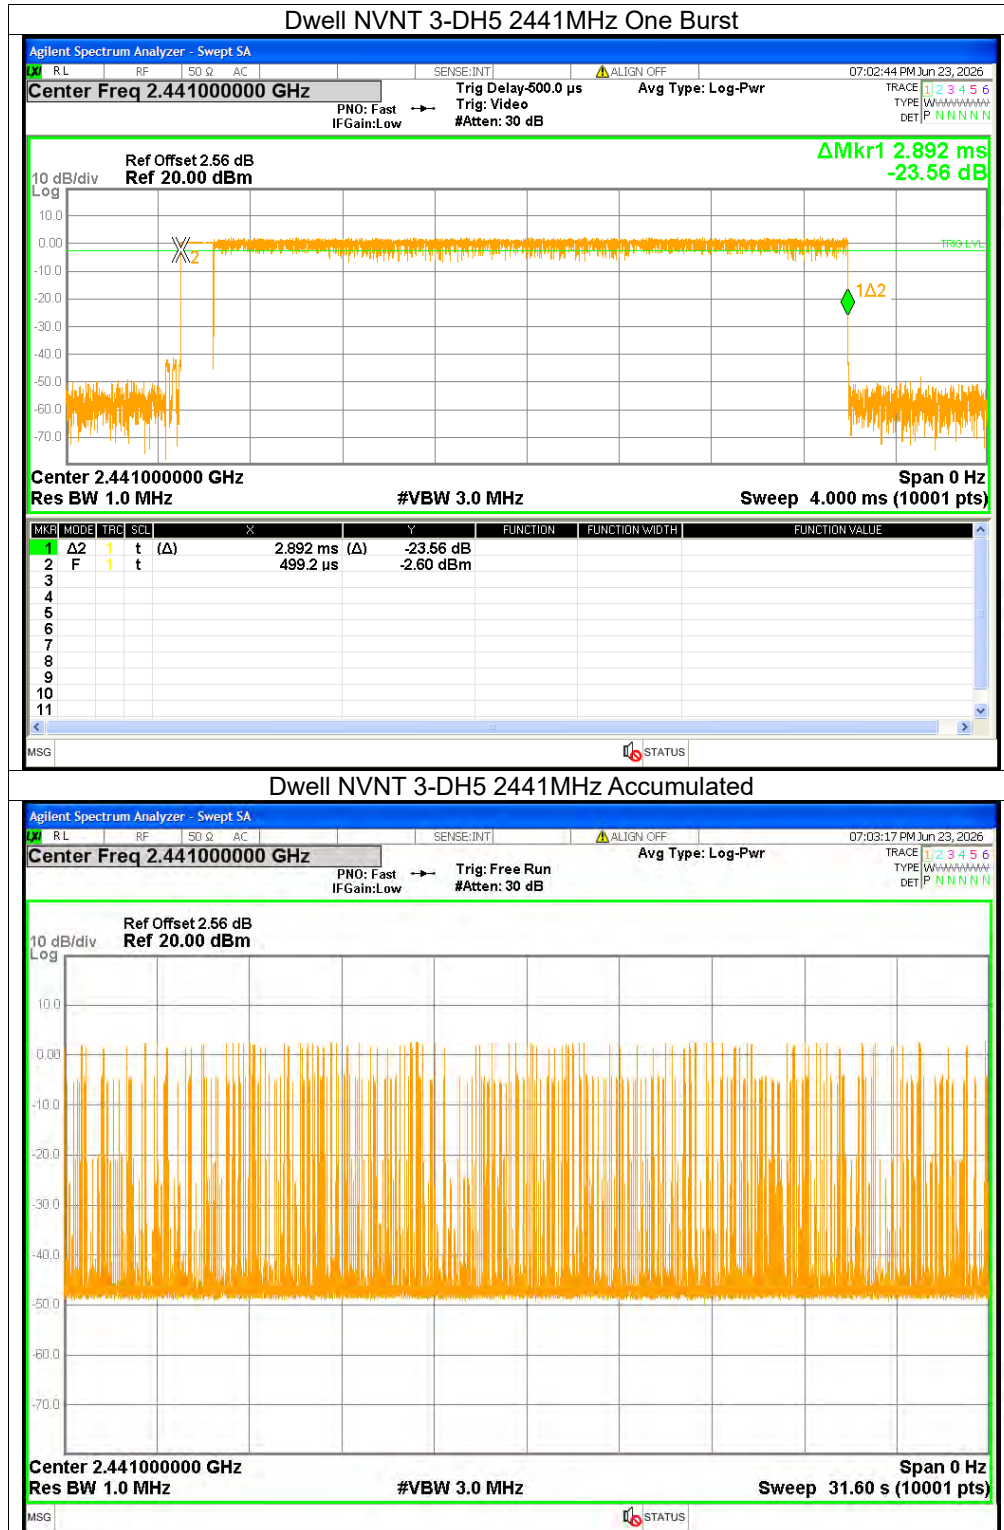





Duty Cycle


Condition	Mode	Frequency (MHz)	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	1-DH5	2402	2.886	3.75	76.96	1.14	0.35
NVNT	1-DH5	2441	2.886	3.75	76.96	1.14	0.35
NVNT	1-DH5	2480	2.886	3.75	76.96	1.14	0.35
NVNT	2-DH5	2402	2.89	3.75	77.07	1.13	0.35
NVNT	2-DH5	2441	2.89	3.75	77.07	1.13	0.35
NVNT	2-DH5	2480	2.89	3.75	77.07	1.13	0.35
NVNT	3-DH5	2402	2.892	3.75	77.12	1.13	0.35
NVNT	3-DH5	2441	2.894	3.75	77.17	1.13	0.35
NVNT	3-DH5	2480	2.892	3.75	77.12	1.13	0.35

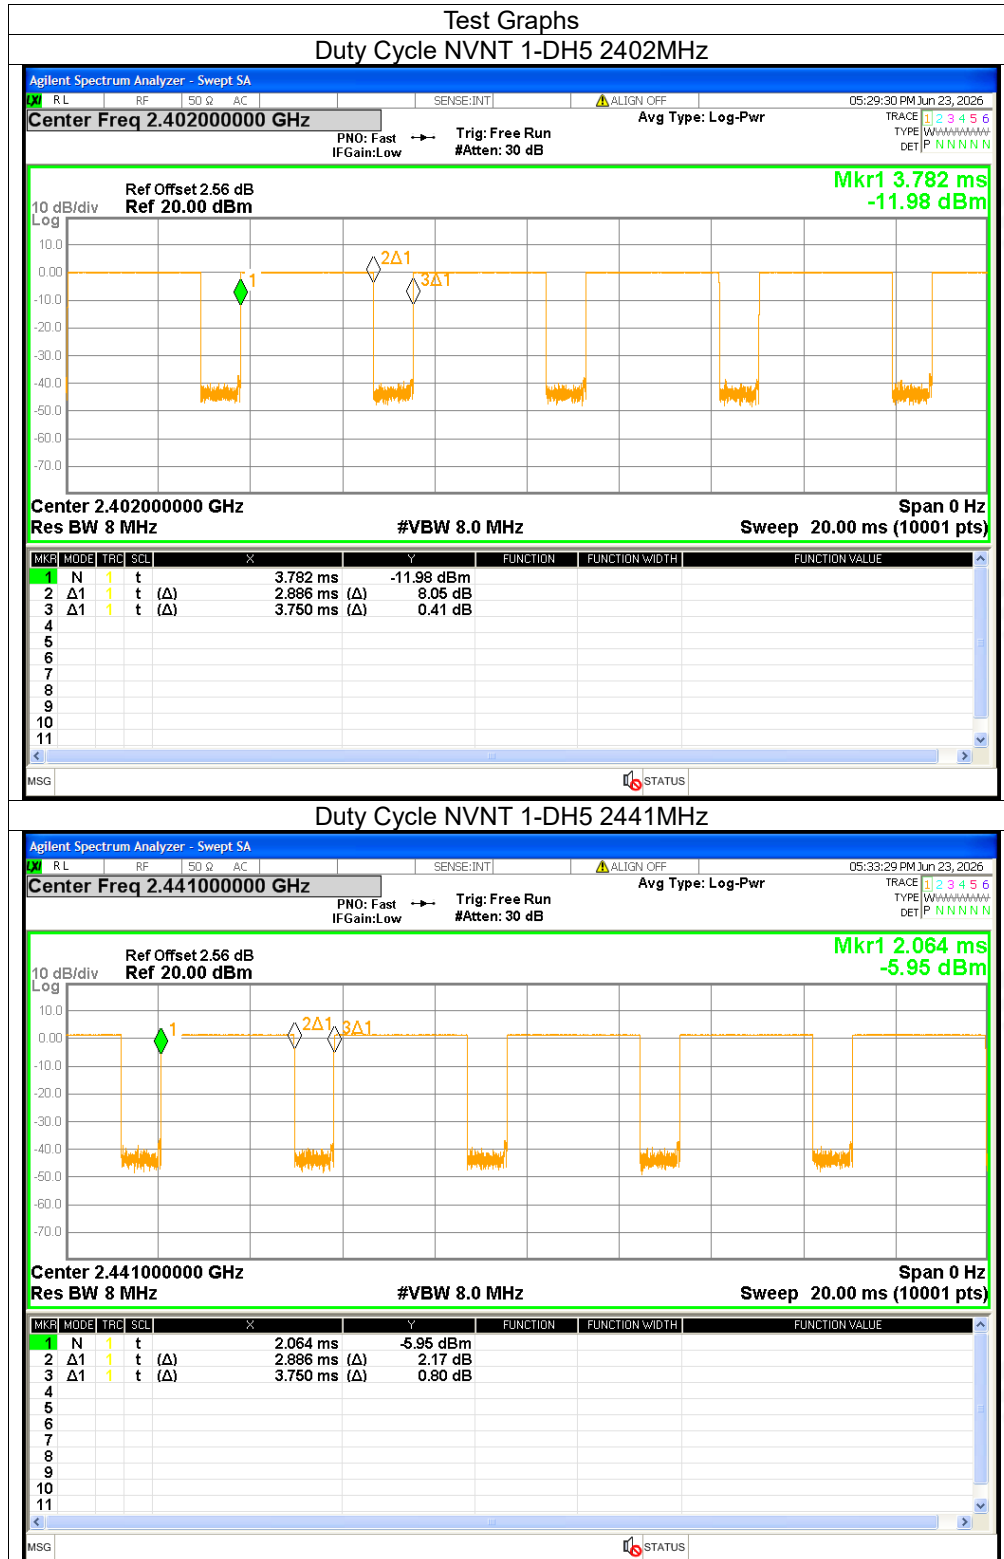

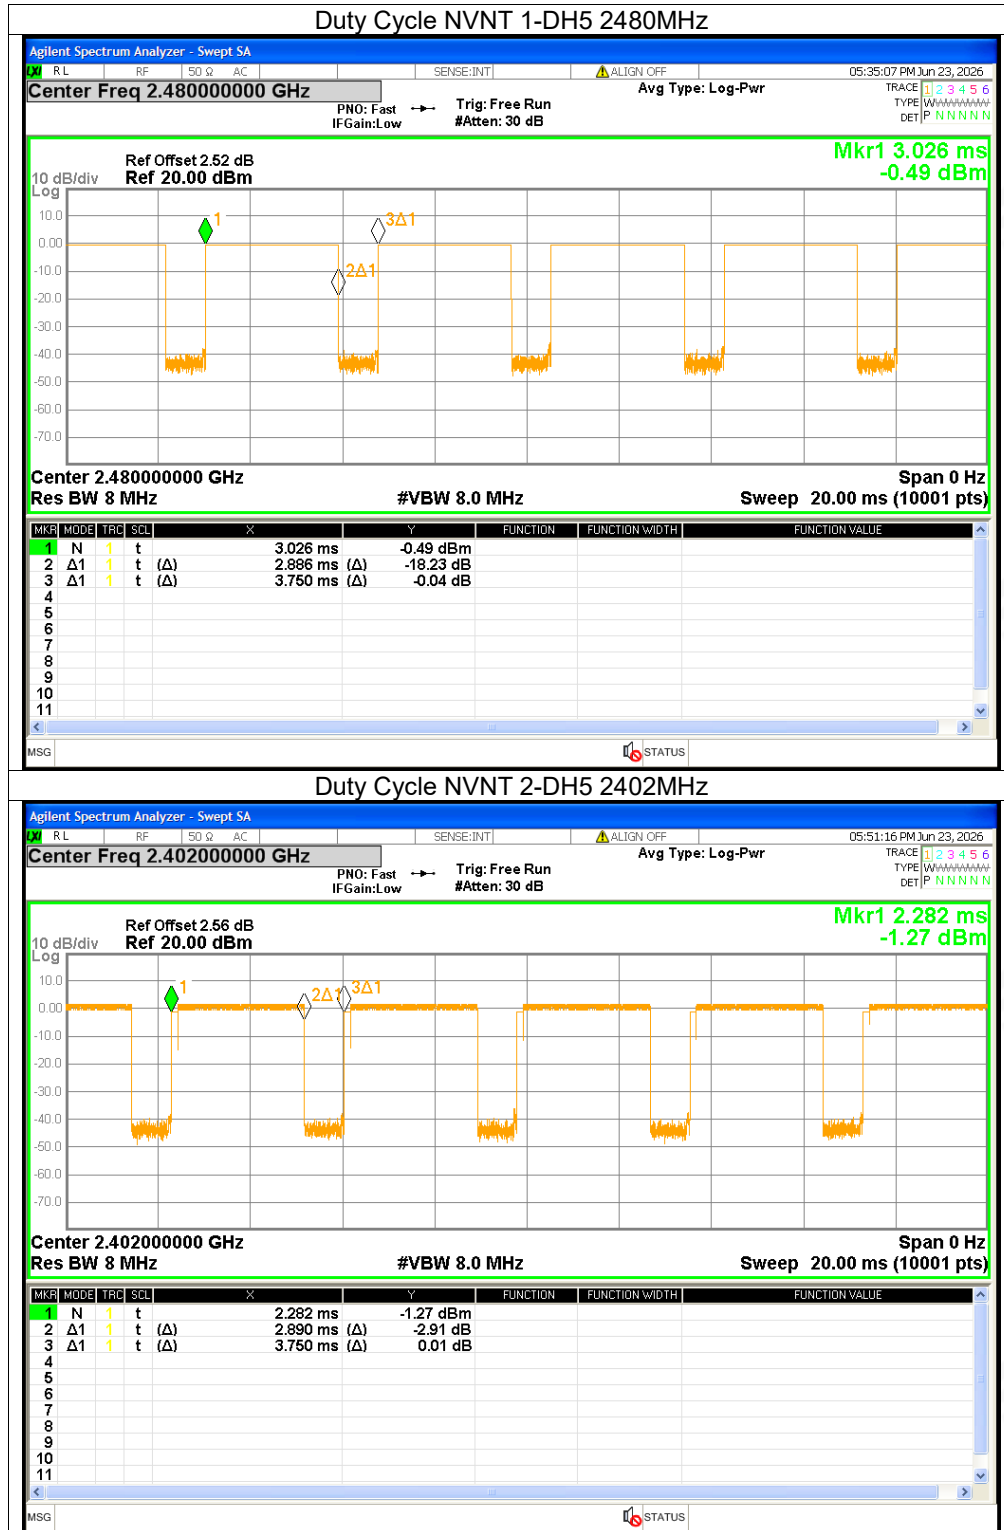



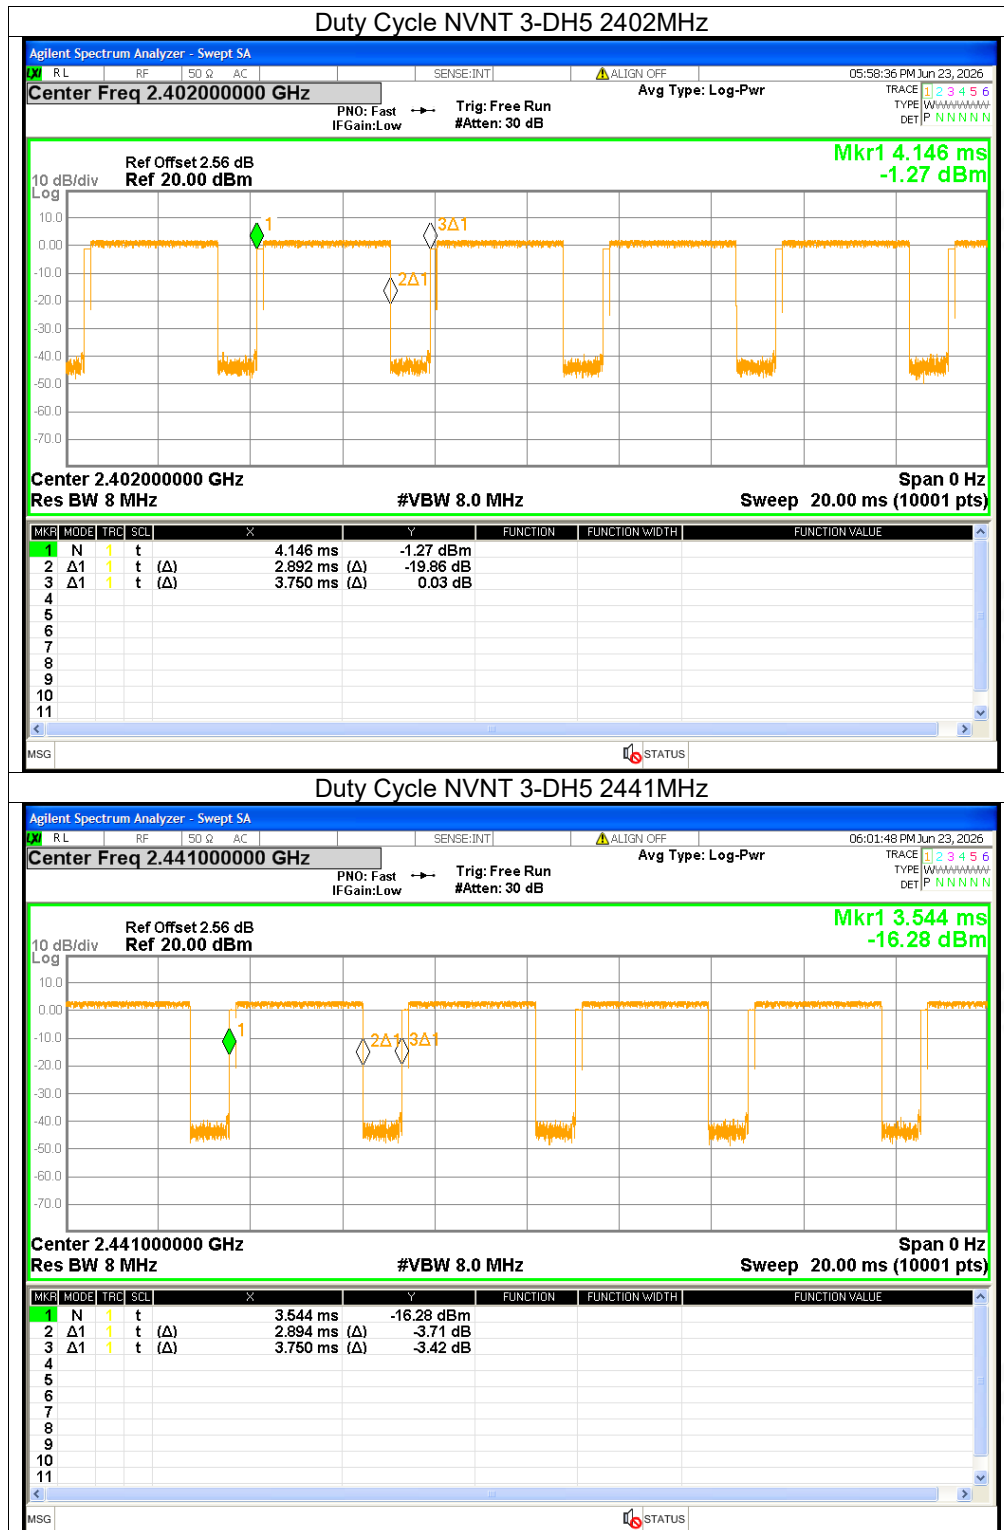


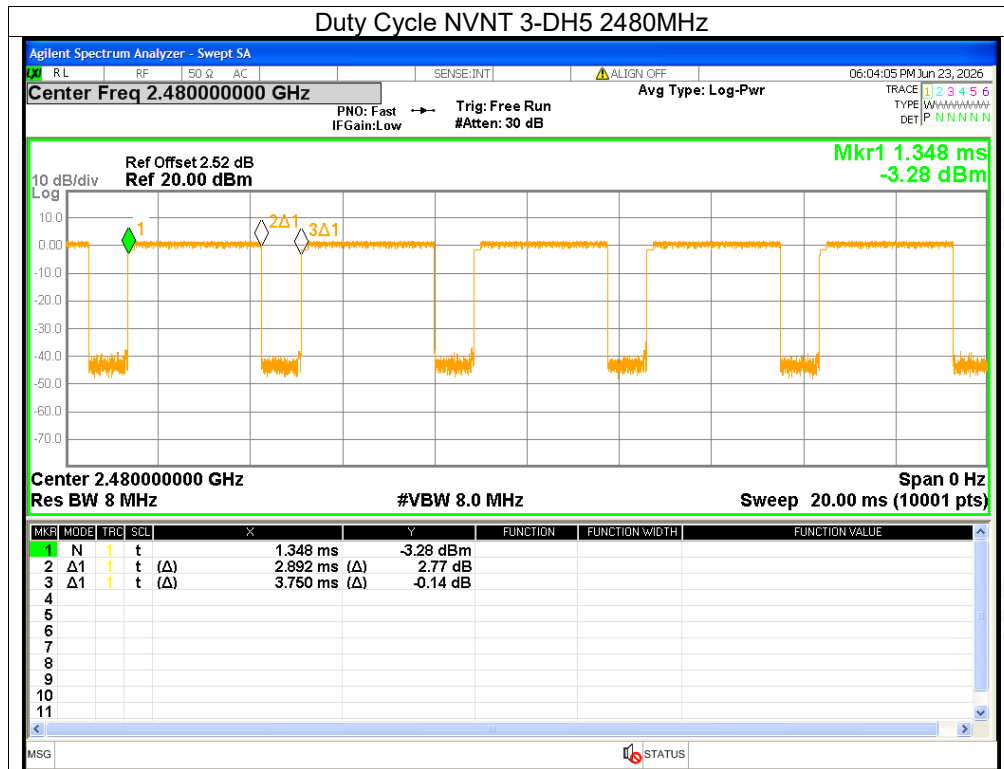






Maximum Peak Conducted Output Power


Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH5	2402	-0.02	<=30	Pass
NVNT	1-DH5	2441	1.37	<=30	Pass
NVNT	1-DH5	2480	-0.35	<=30	Pass
NVNT	2-DH5	2402	0.99	<=21	Pass
NVNT	2-DH5	2441	2.46	<=21	Pass
NVNT	2-DH5	2480	0.58	<=21	Pass
NVNT	3-DH5	2402	1.12	<=21	Pass
NVNT	3-DH5	2441	2.58	<=21	Pass
NVNT	3-DH5	2480	0.75	<=21	Pass

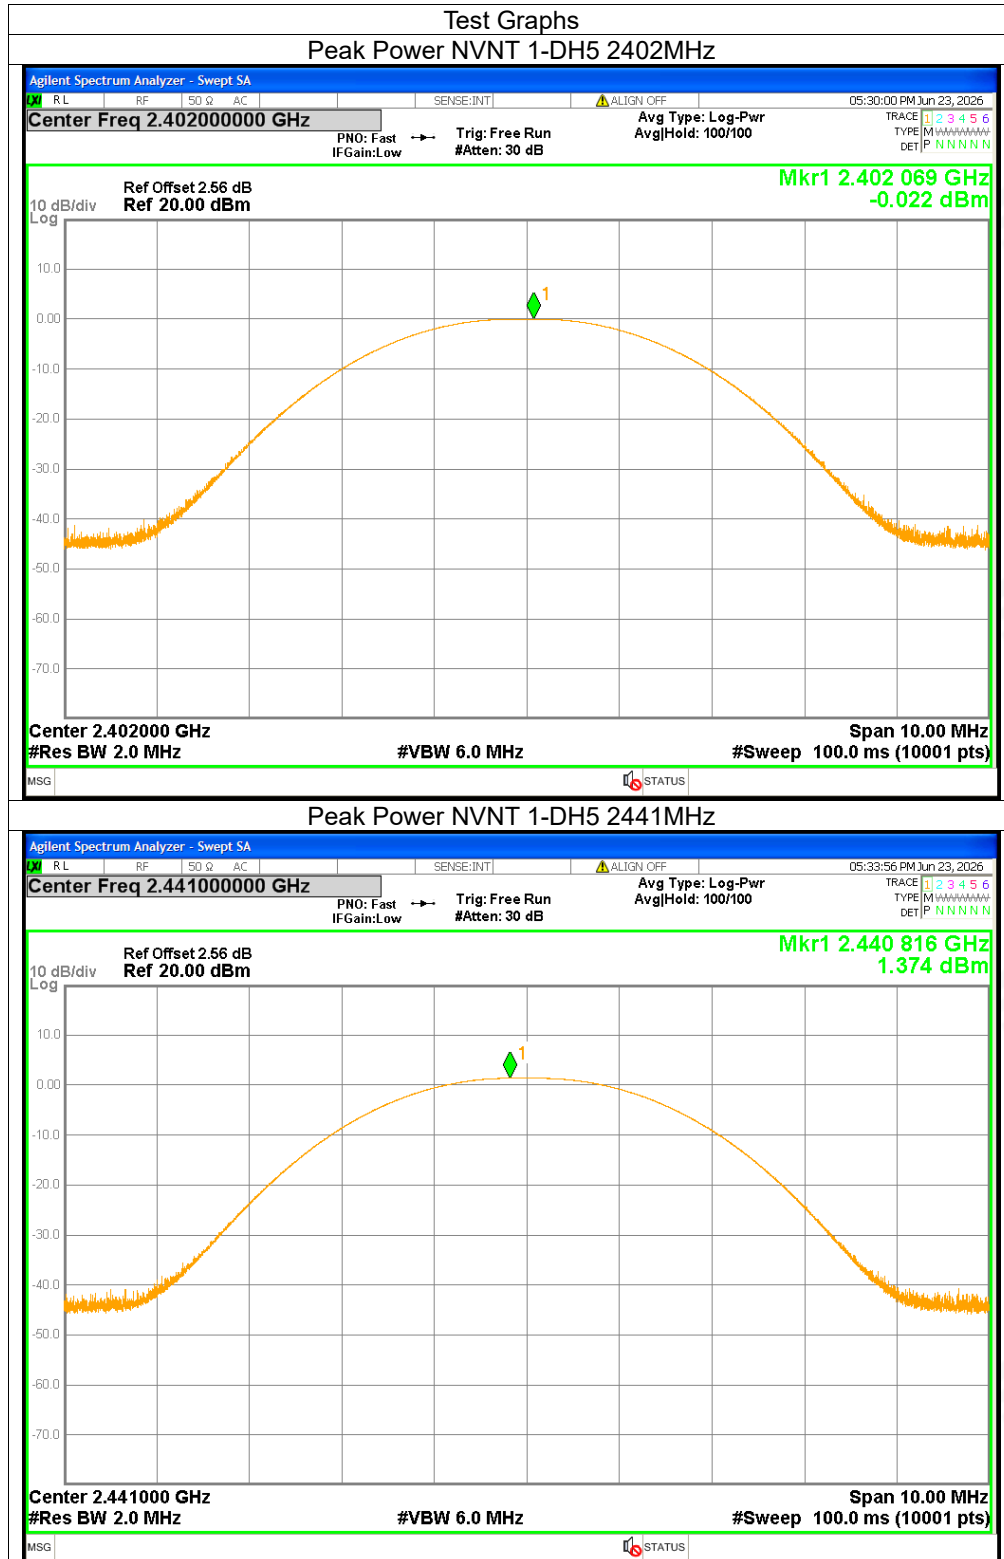

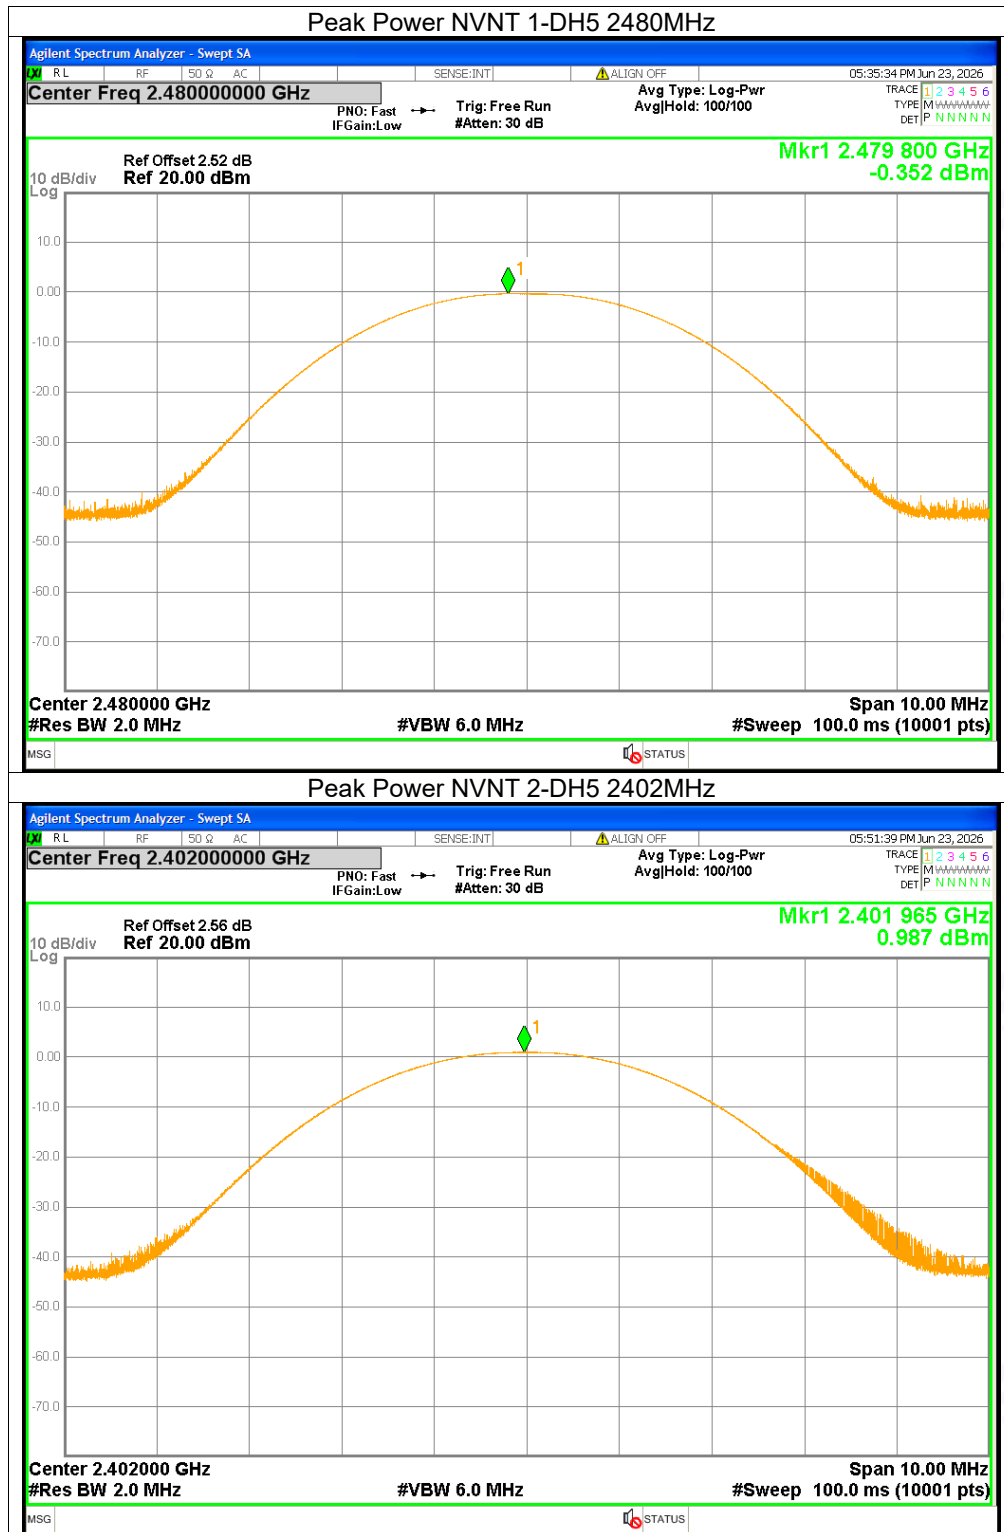

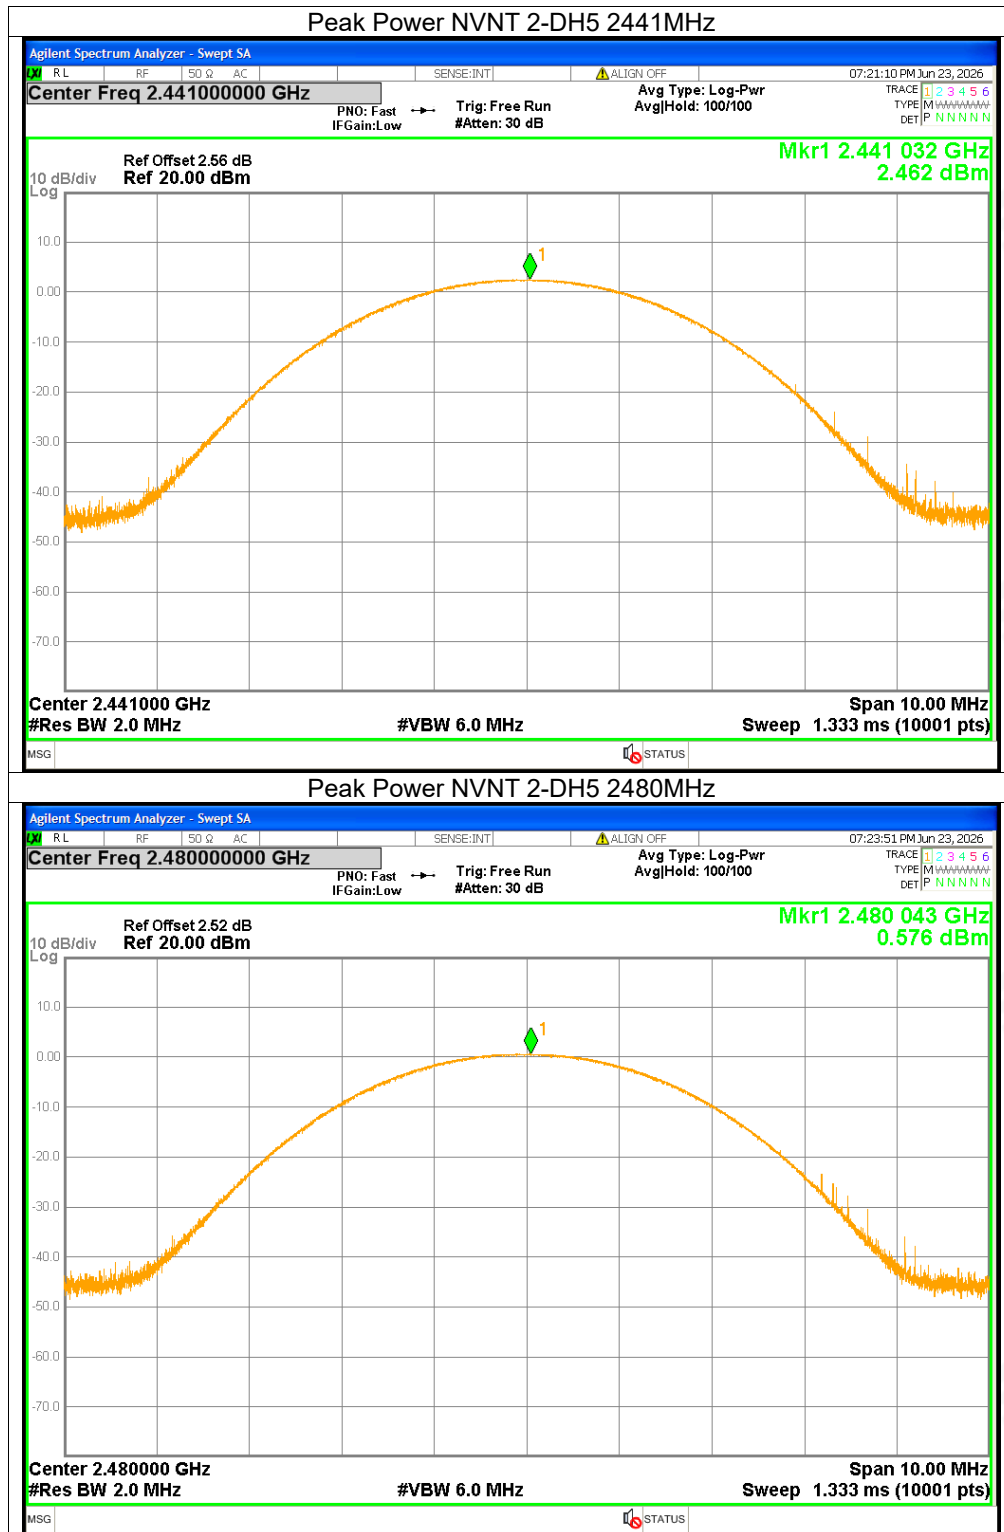


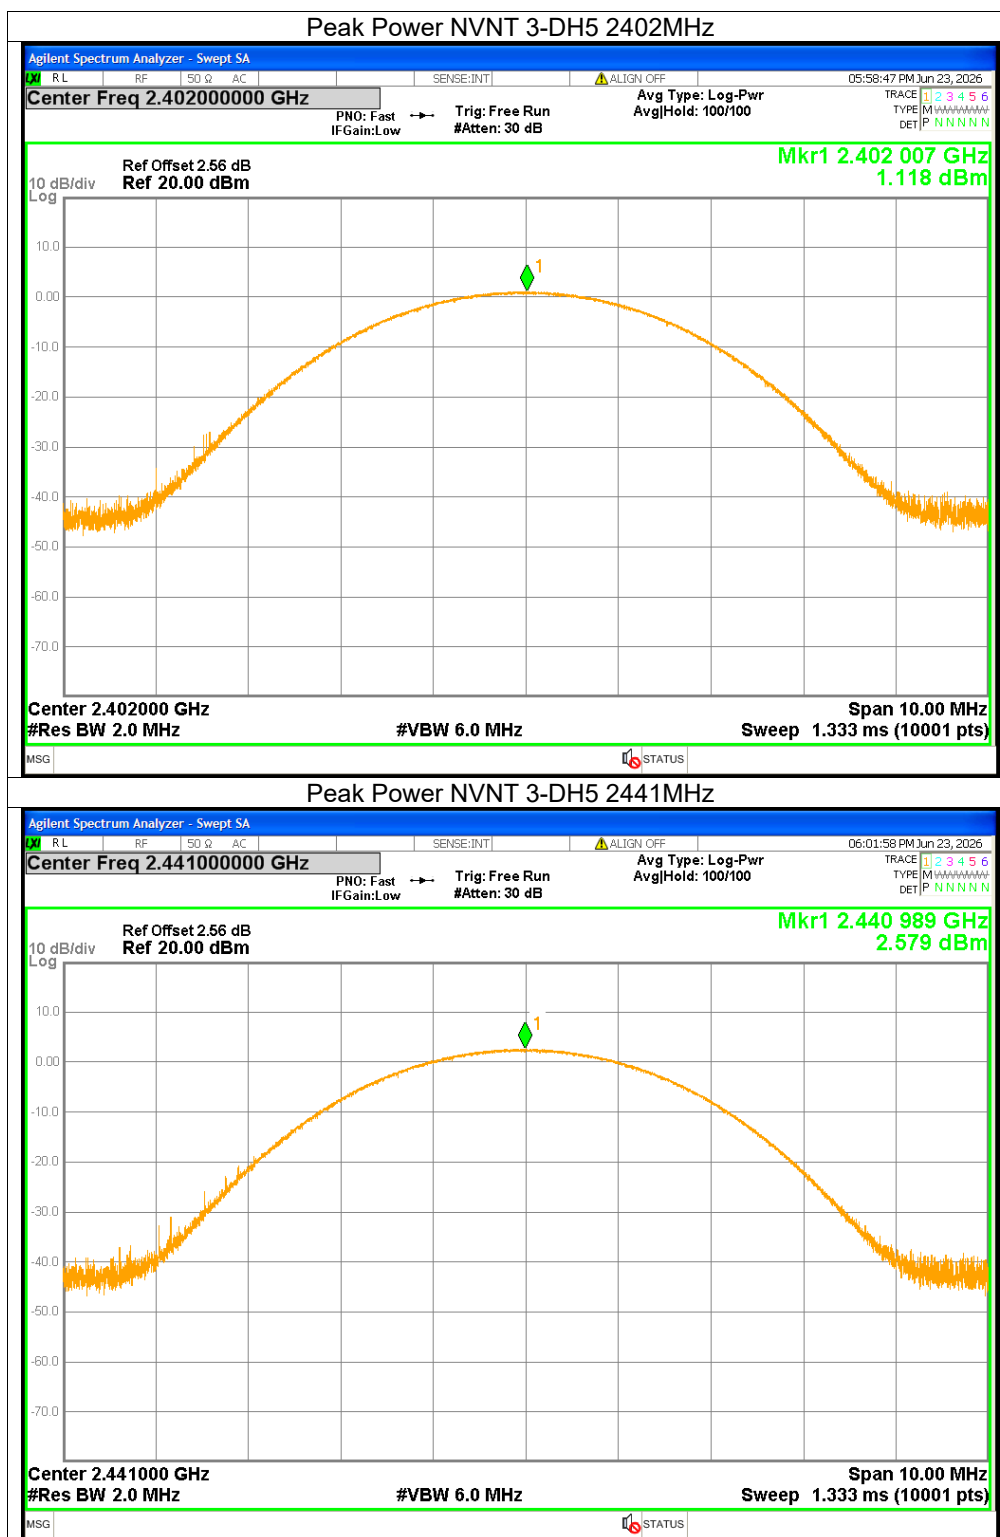


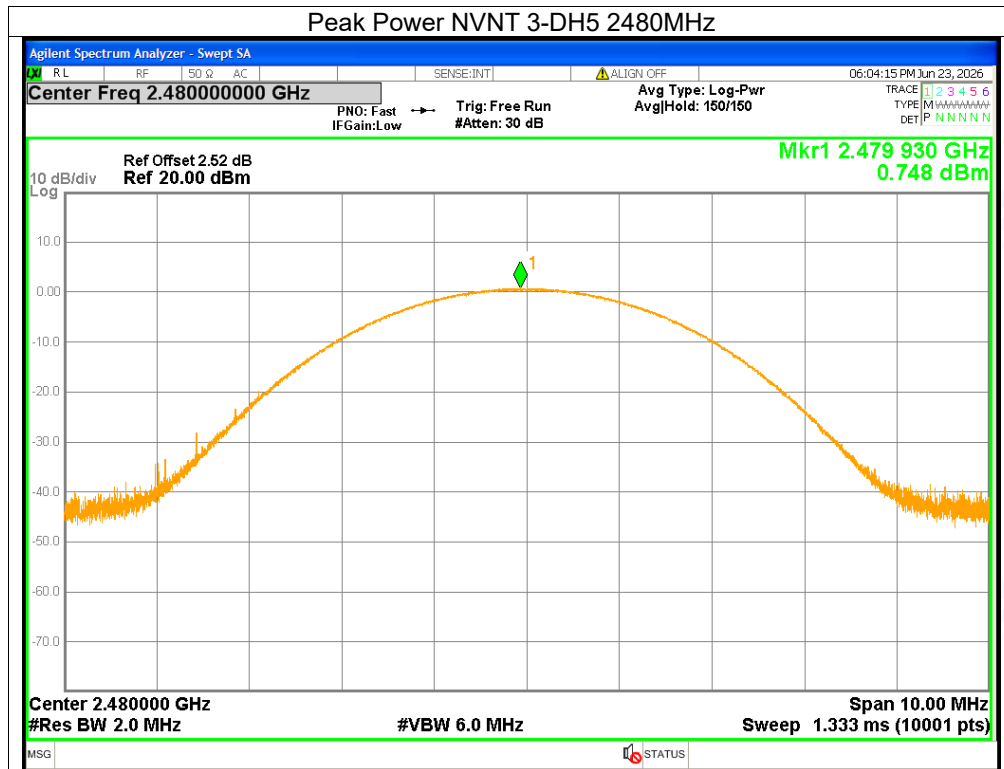



**-20dB Bandwidth**


Condition	Mode	Frequency (MHz)	-20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH5	2402	0.9512	Pass
NVNT	1-DH5	2441	0.9578	Pass
NVNT	1-DH5	2480	0.9411	Pass
NVNT	2-DH5	2402	1.481	Pass
NVNT	2-DH5	2441	1.488	Pass
NVNT	2-DH5	2480	1.436	Pass
NVNT	3-DH5	2402	1.484	Pass
NVNT	3-DH5	2441	1.513	Pass
NVNT	3-DH5	2480	1.524	Pass

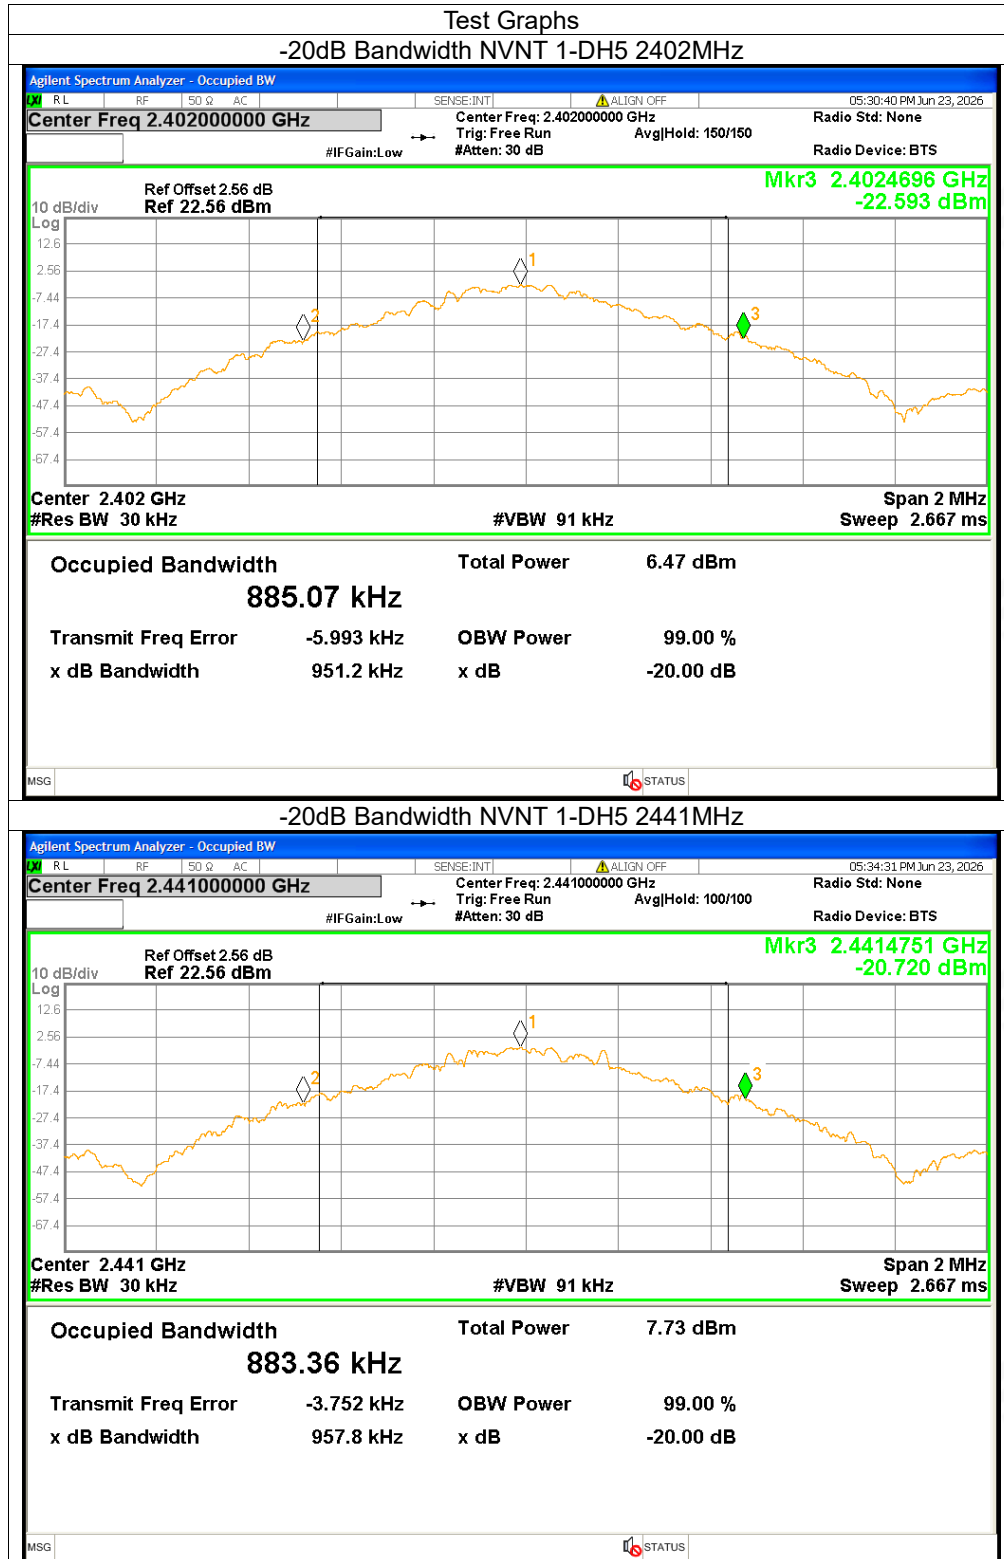

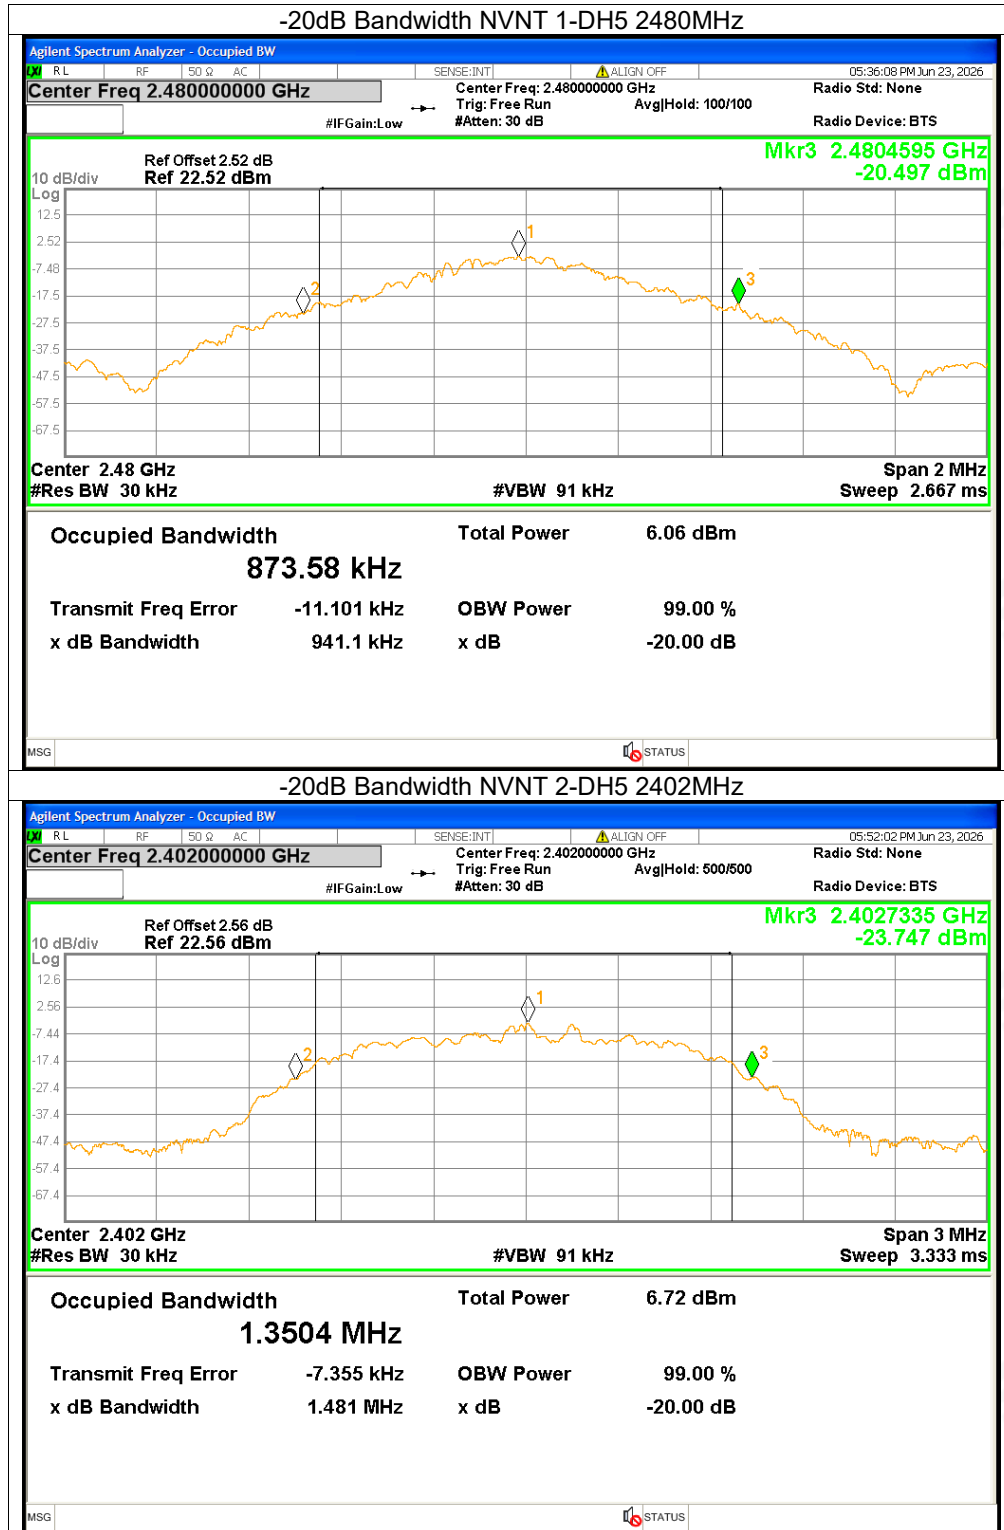

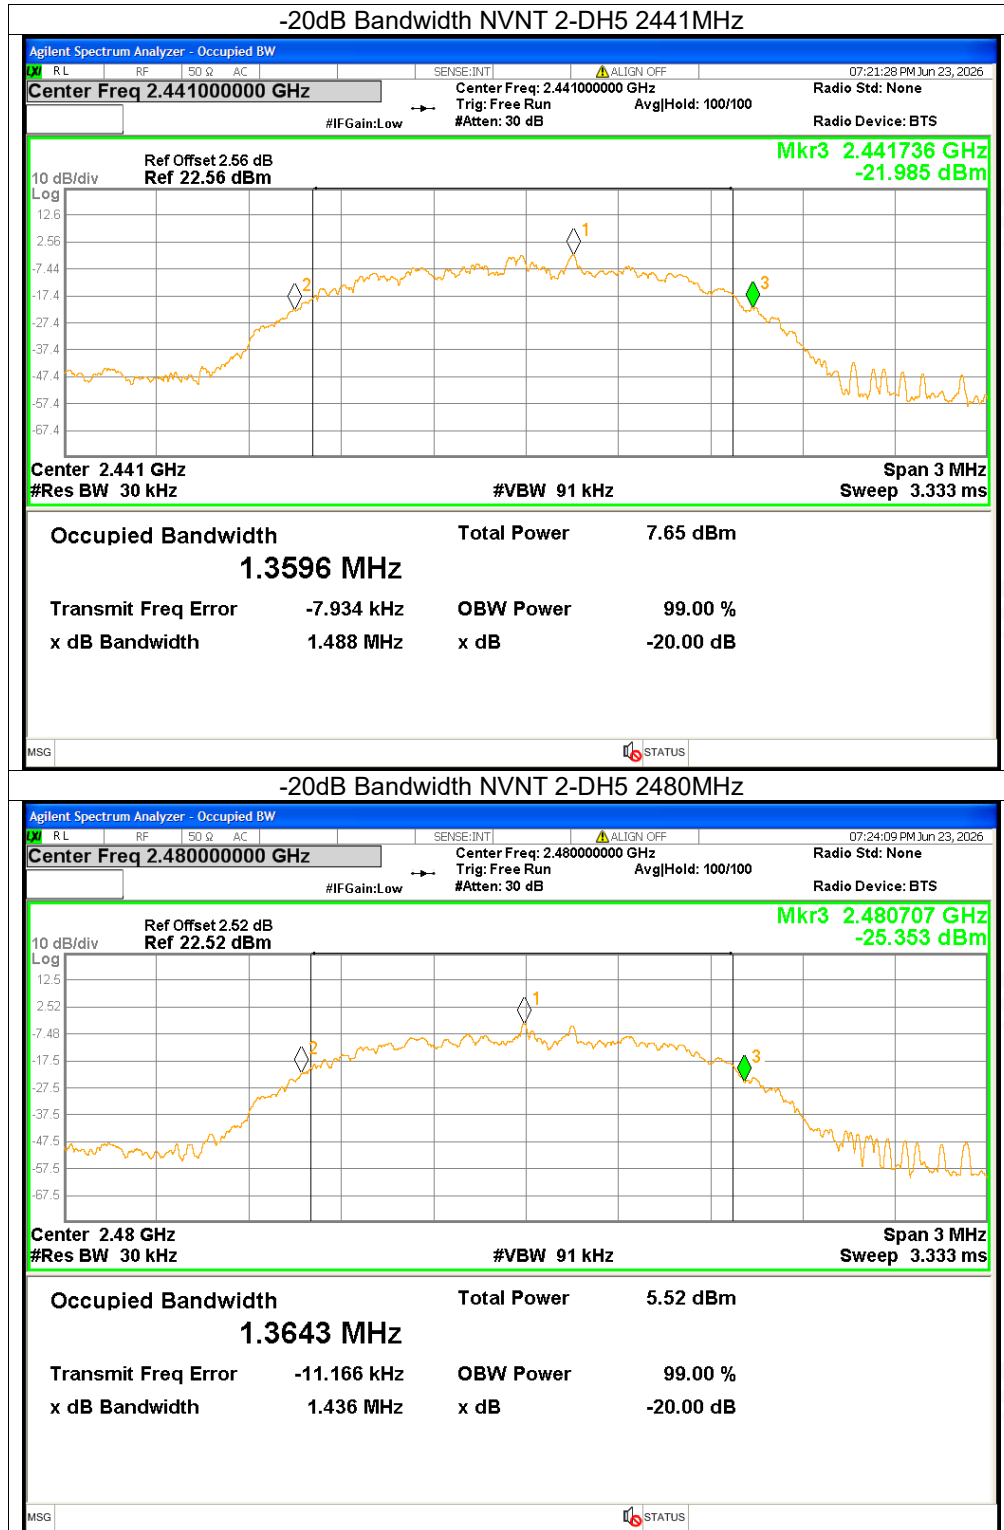

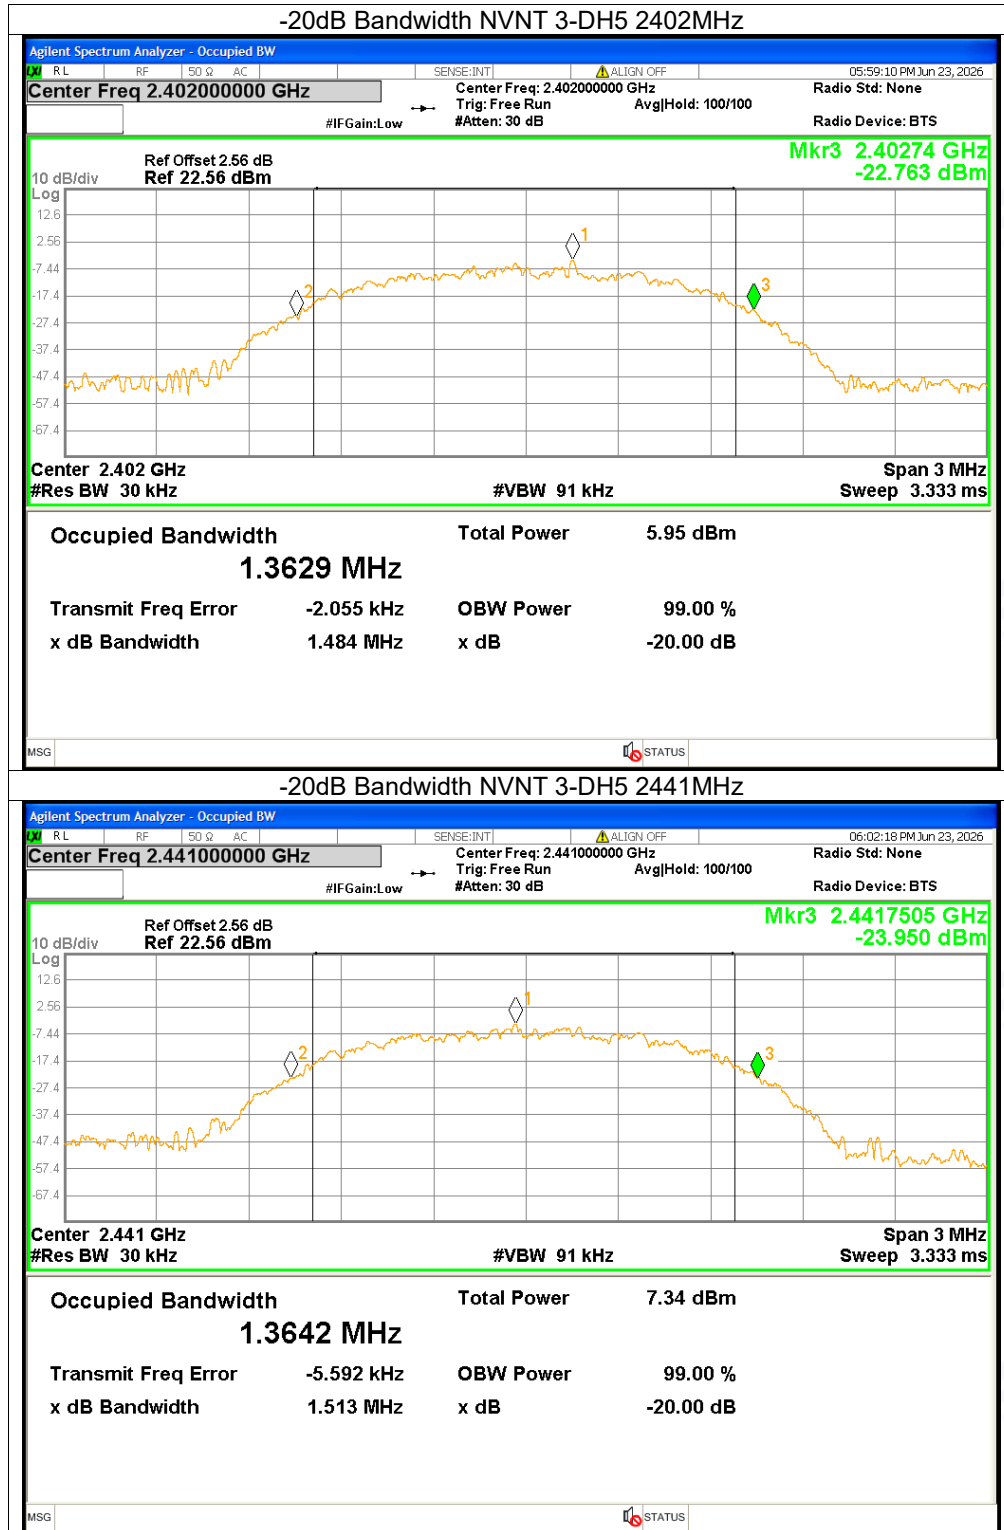


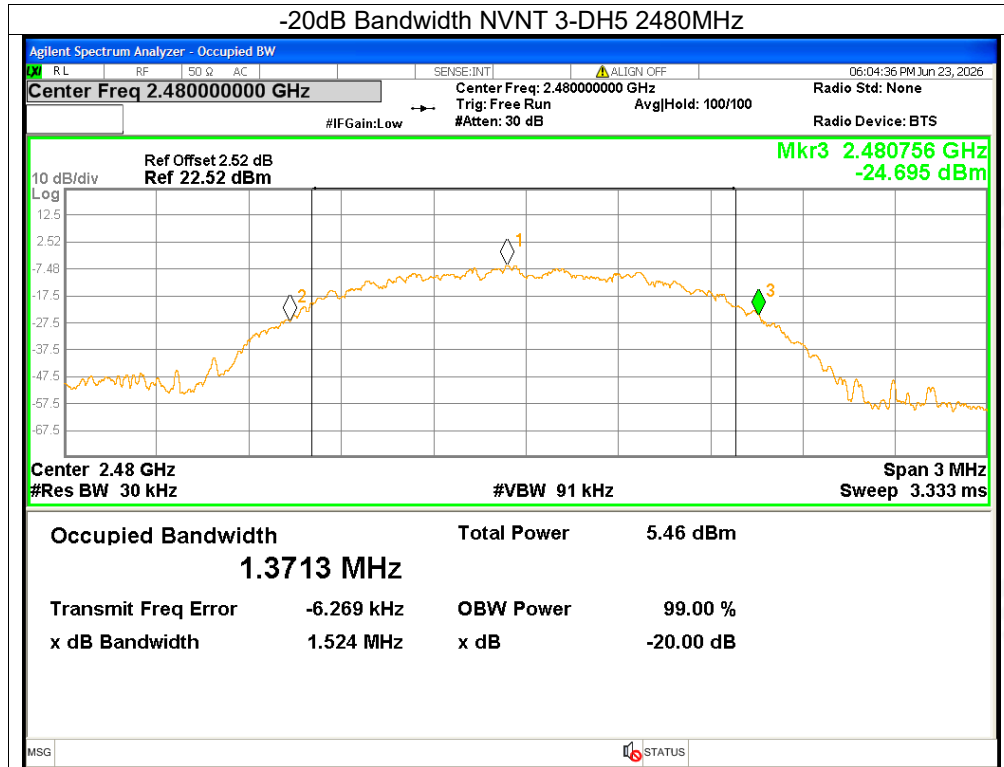






Carrier Frequencies Separation


Condition	Mode	Hopping Freq1 (MHz)	Hopping Freq2 (MHz)	HFS (MHz)	Limit (MHz)	Verdict
NVNT	1-DH5	2402.146	2403.148	1.002	≥ 0.951	Pass
NVNT	1-DH5	2441.158	2442.148	0.99	≥ 0.958	Pass
NVNT	1-DH5	2478.834	2479.848	1.014	≥ 0.941	Pass
NVNT	2-DH5	2401.888	2403.091	1.203	≥ 0.987	Pass
NVNT	2-DH5	2440.864	2442.076	1.212	≥ 1.077	Pass
NVNT	2-DH5	2478.876	2479.884	1.008	≥ 0.992	Pass
NVNT	3-DH5	2401.828	2402.884	1.056	≥ 0.989	Pass
NVNT	3-DH5	2440.933	2442.013	1.08	≥ 1.009	Pass
NVNT	3-DH5	2478.894	2480.1	1.206	≥ 1.016	Pass

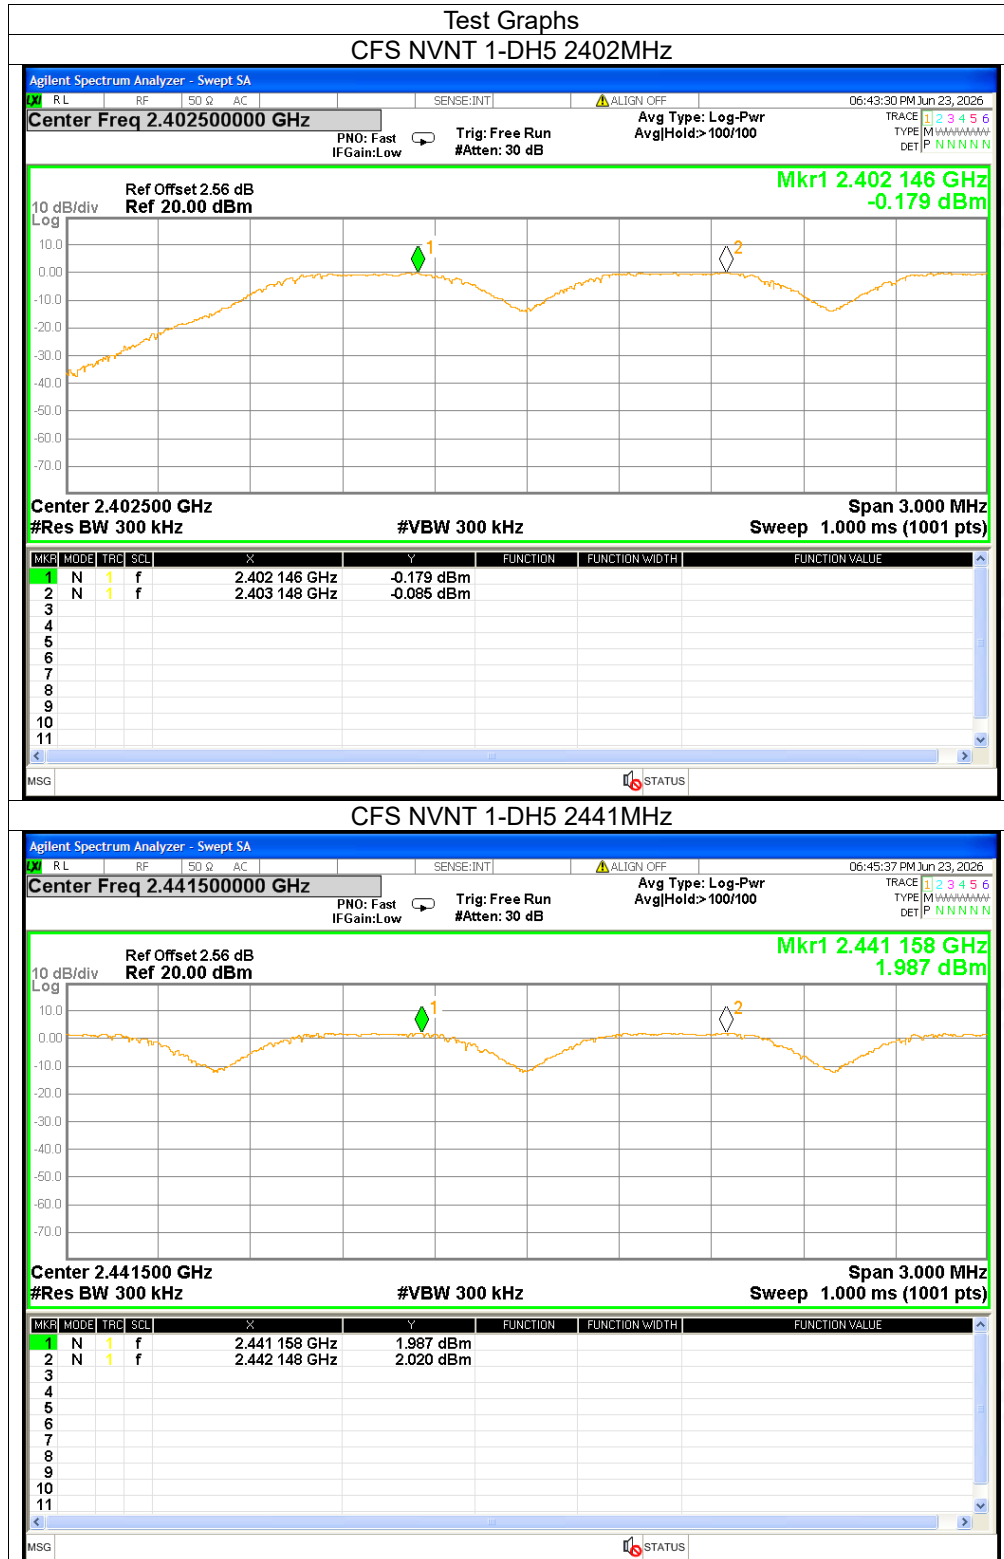

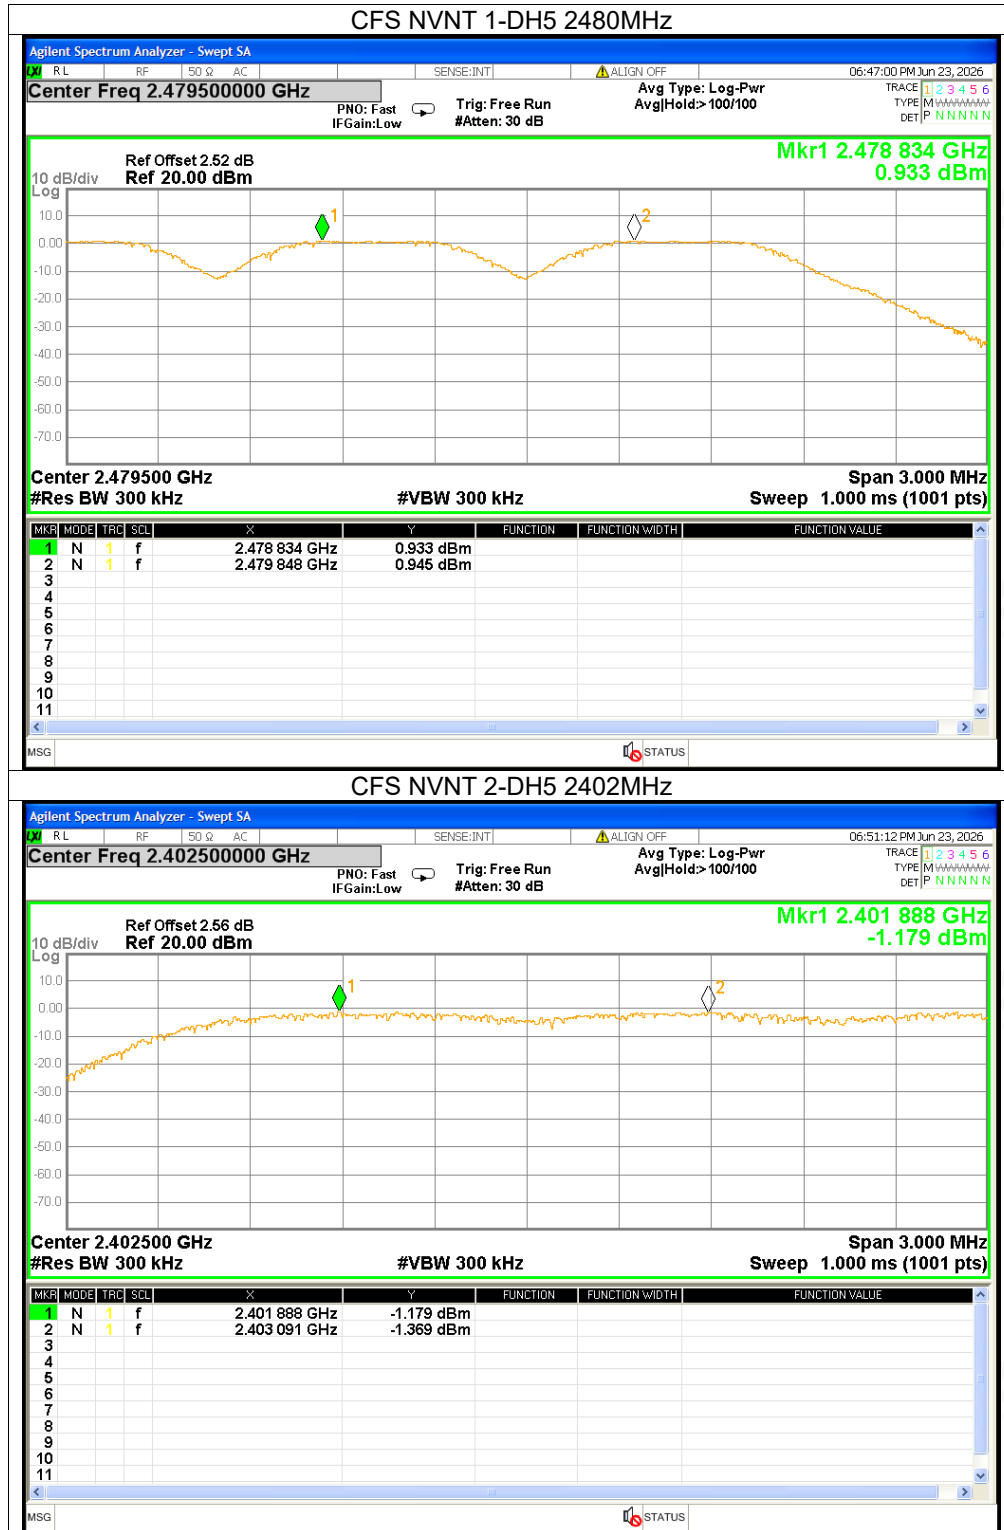

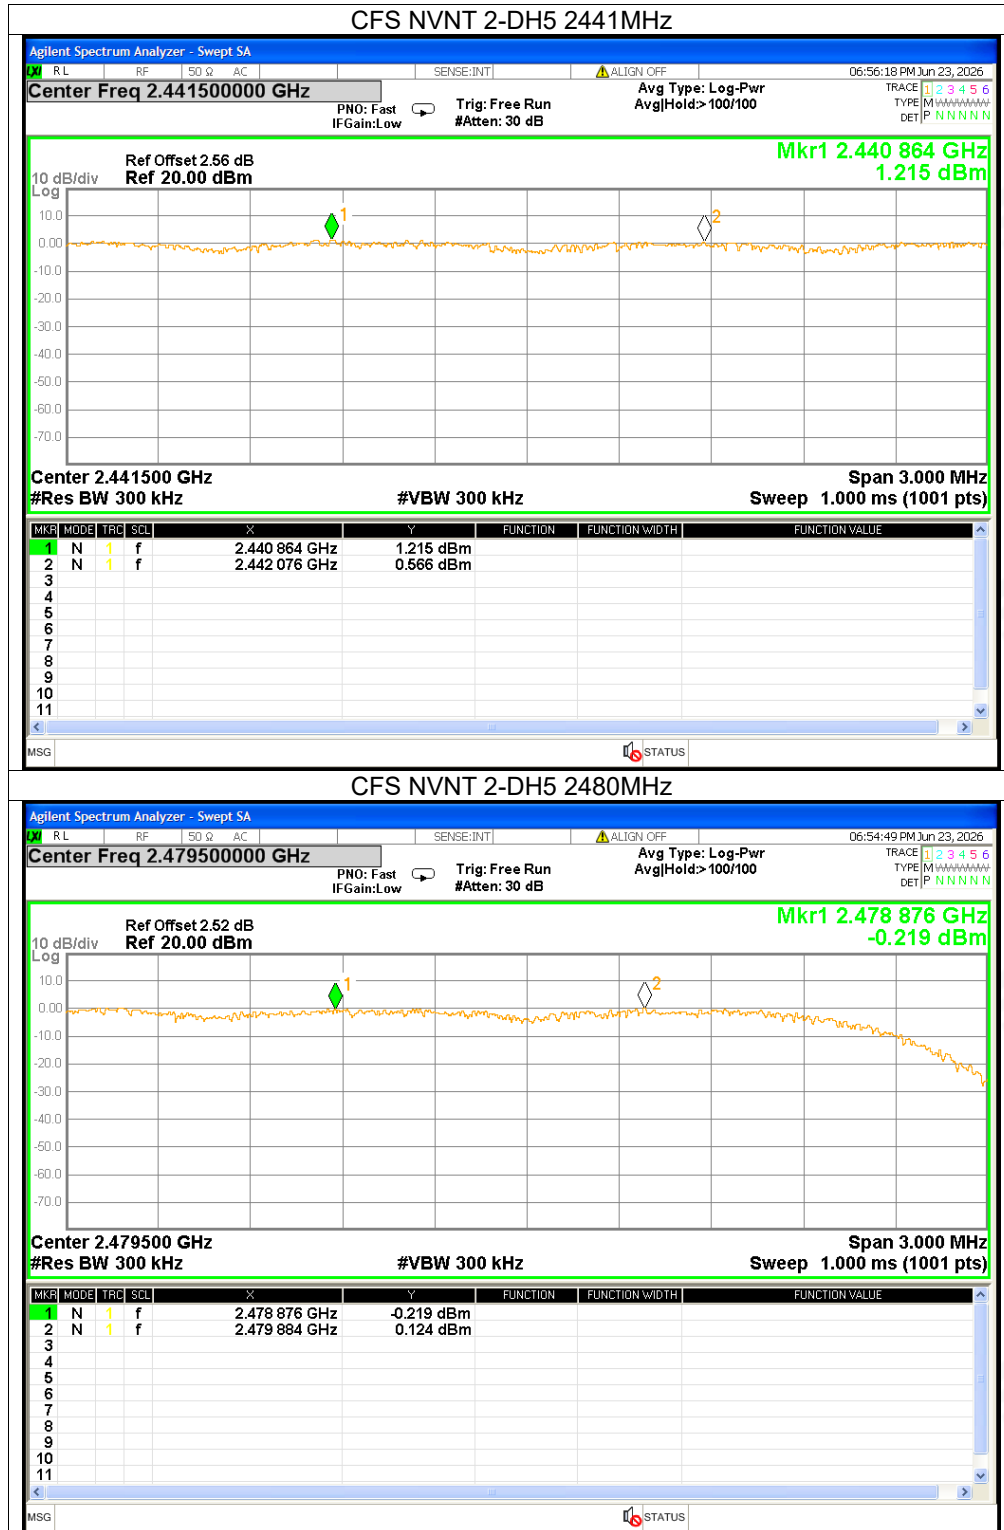

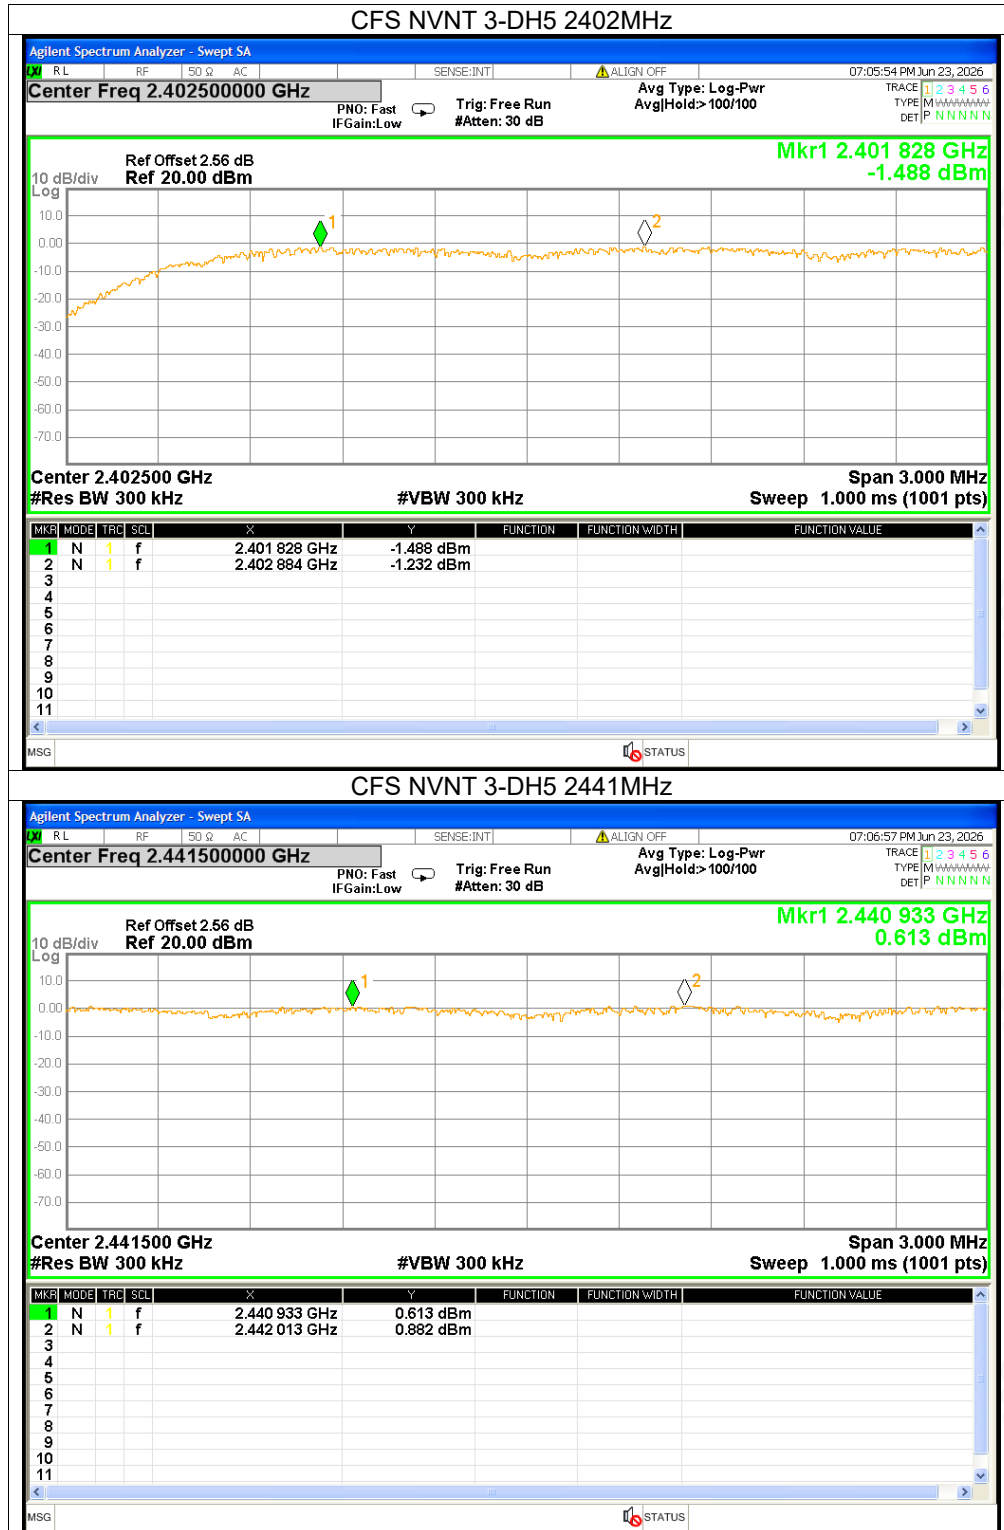


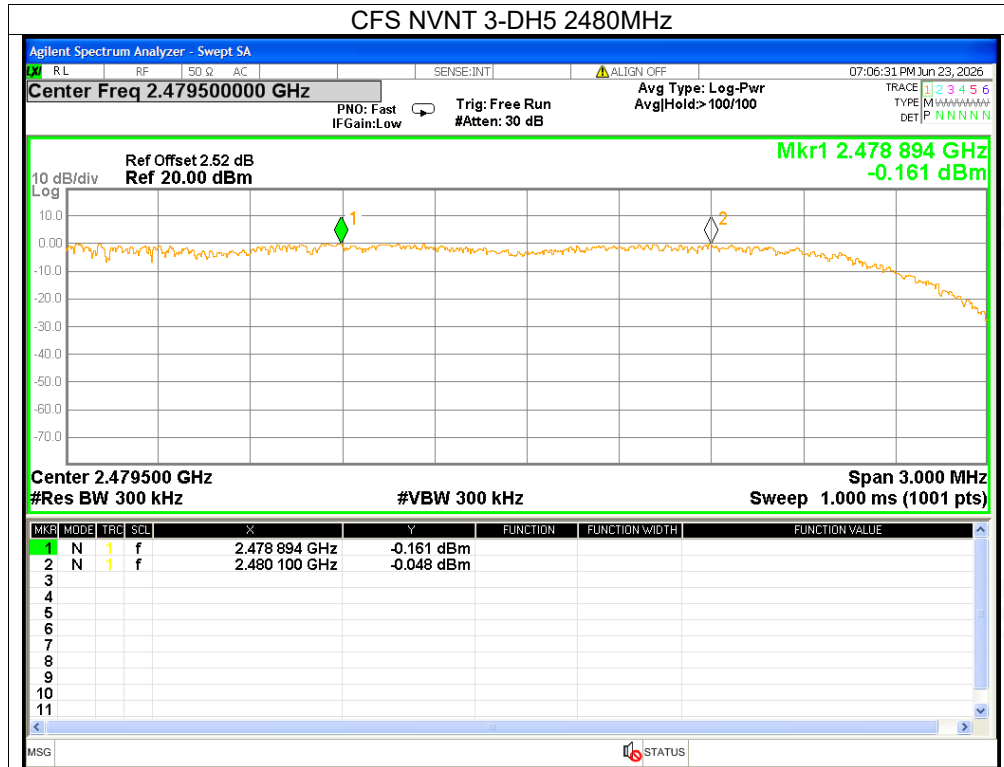




Number of Hopping Channel

Condition	Mode	Hopping Number	Limit	Verdict
NVNT	1-DH5	79	≥ 15	Pass
NVNT	2-DH5	79	≥ 15	Pass
NVNT	3-DH5	79	≥ 15	Pass

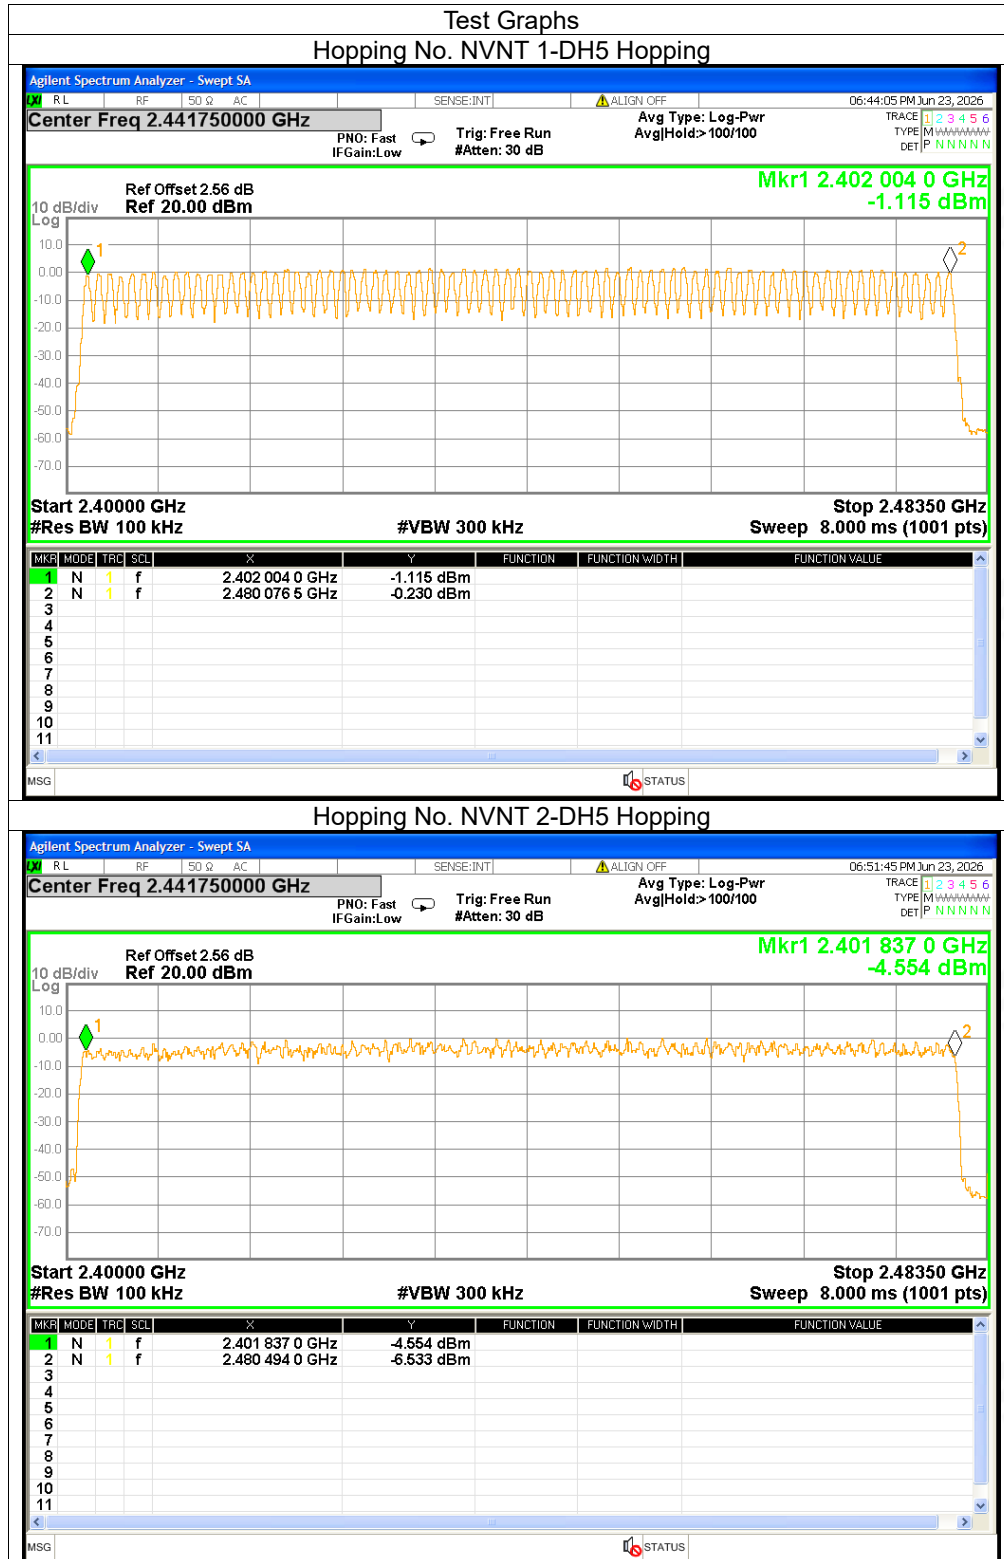


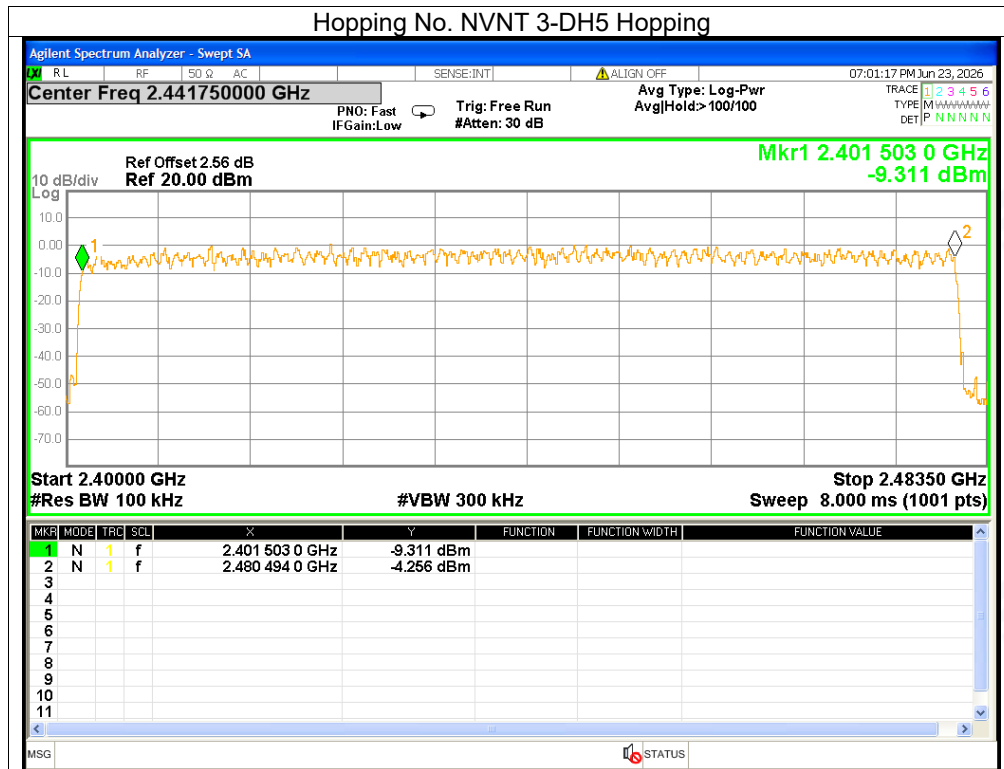






Band Edge


Condition	Mode	Frequency (MHz)	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	No-Hopping	-55.79	≤ -20	Pass
NVNT	1-DH5	2480	No-Hopping	-45.93	≤ -20	Pass
NVNT	2-DH5	2402	No-Hopping	-55.24	≤ -20	Pass
NVNT	2-DH5	2480	No-Hopping	-44.29	≤ -20	Pass
NVNT	3-DH5	2402	No-Hopping	-54.97	≤ -20	Pass
NVNT	3-DH5	2480	No-Hopping	-42.86	≤ -20	Pass

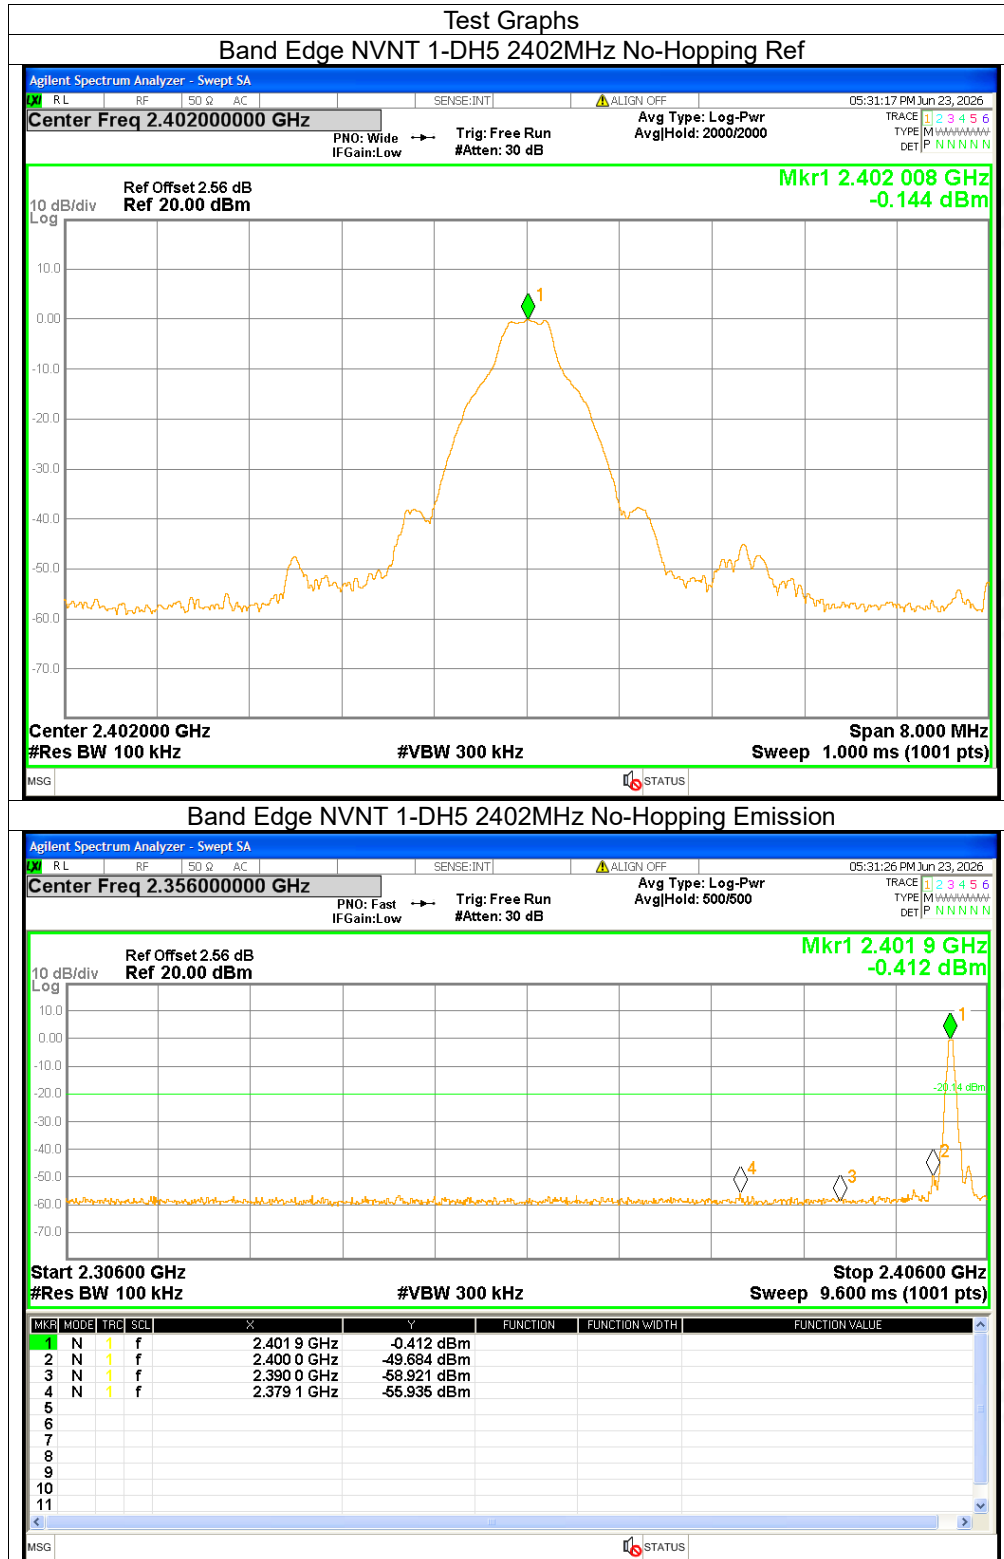


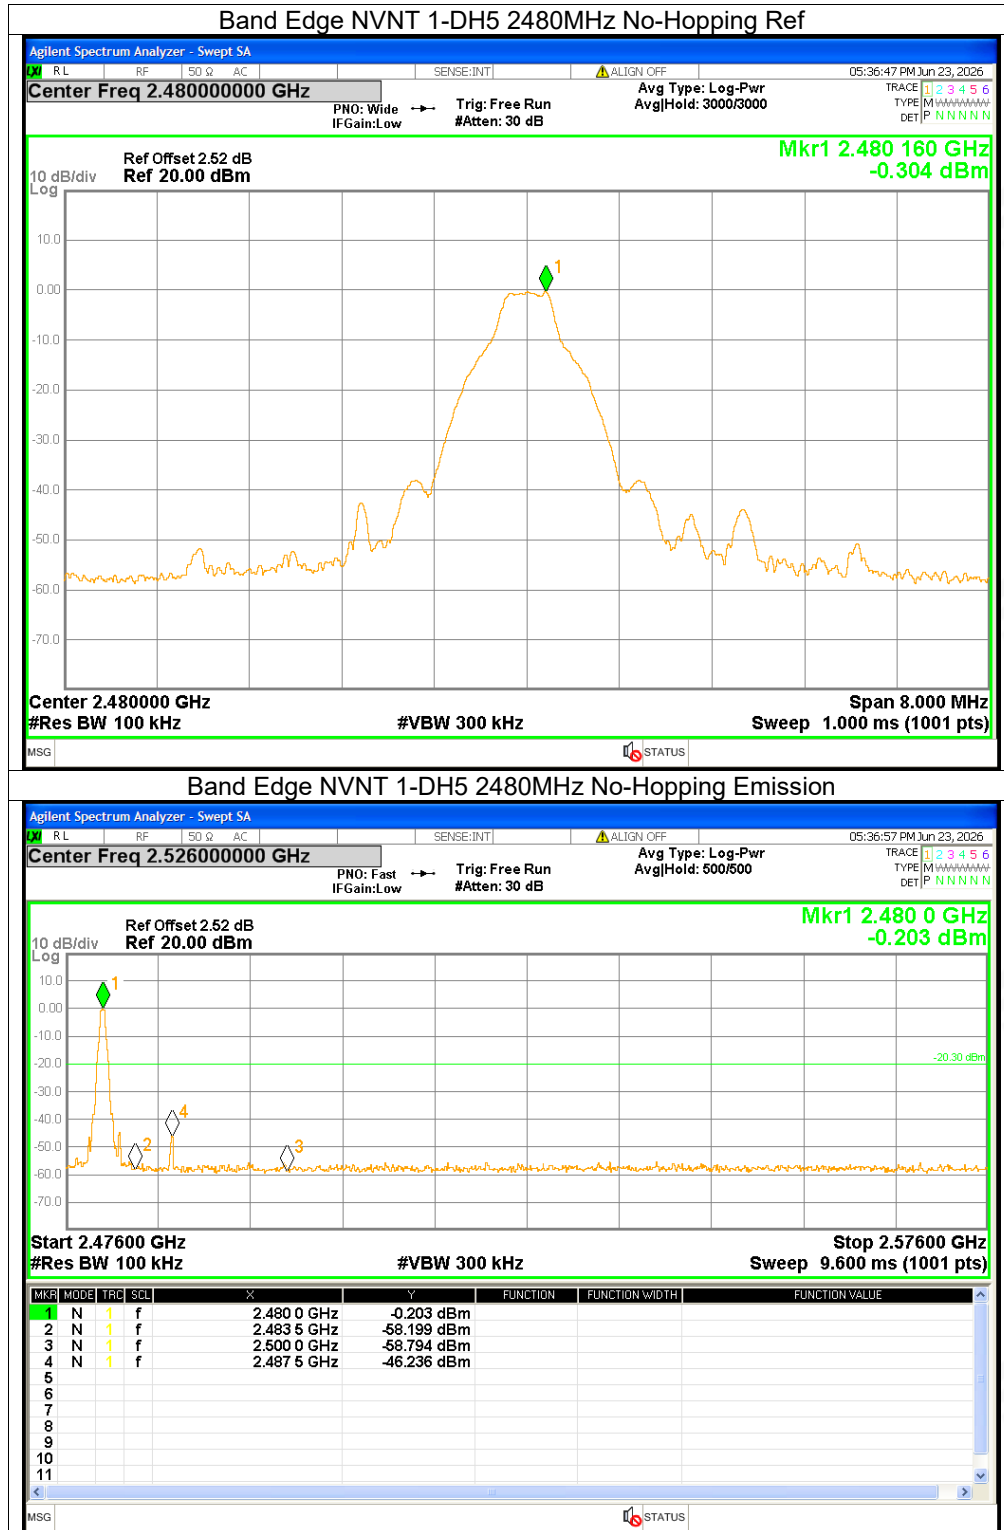

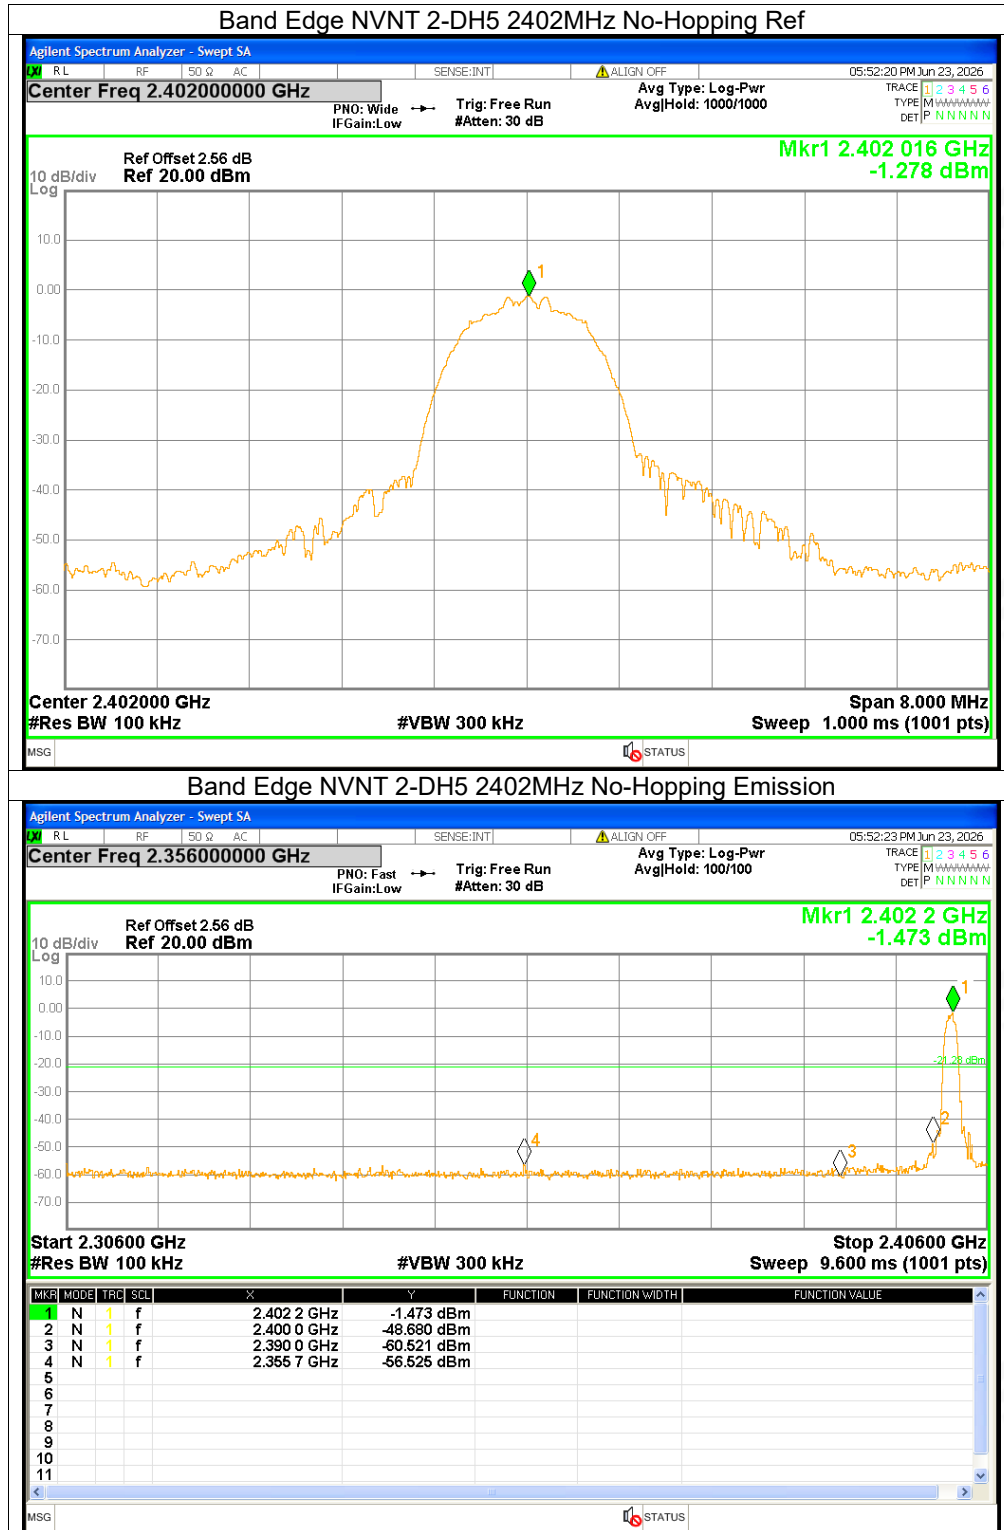

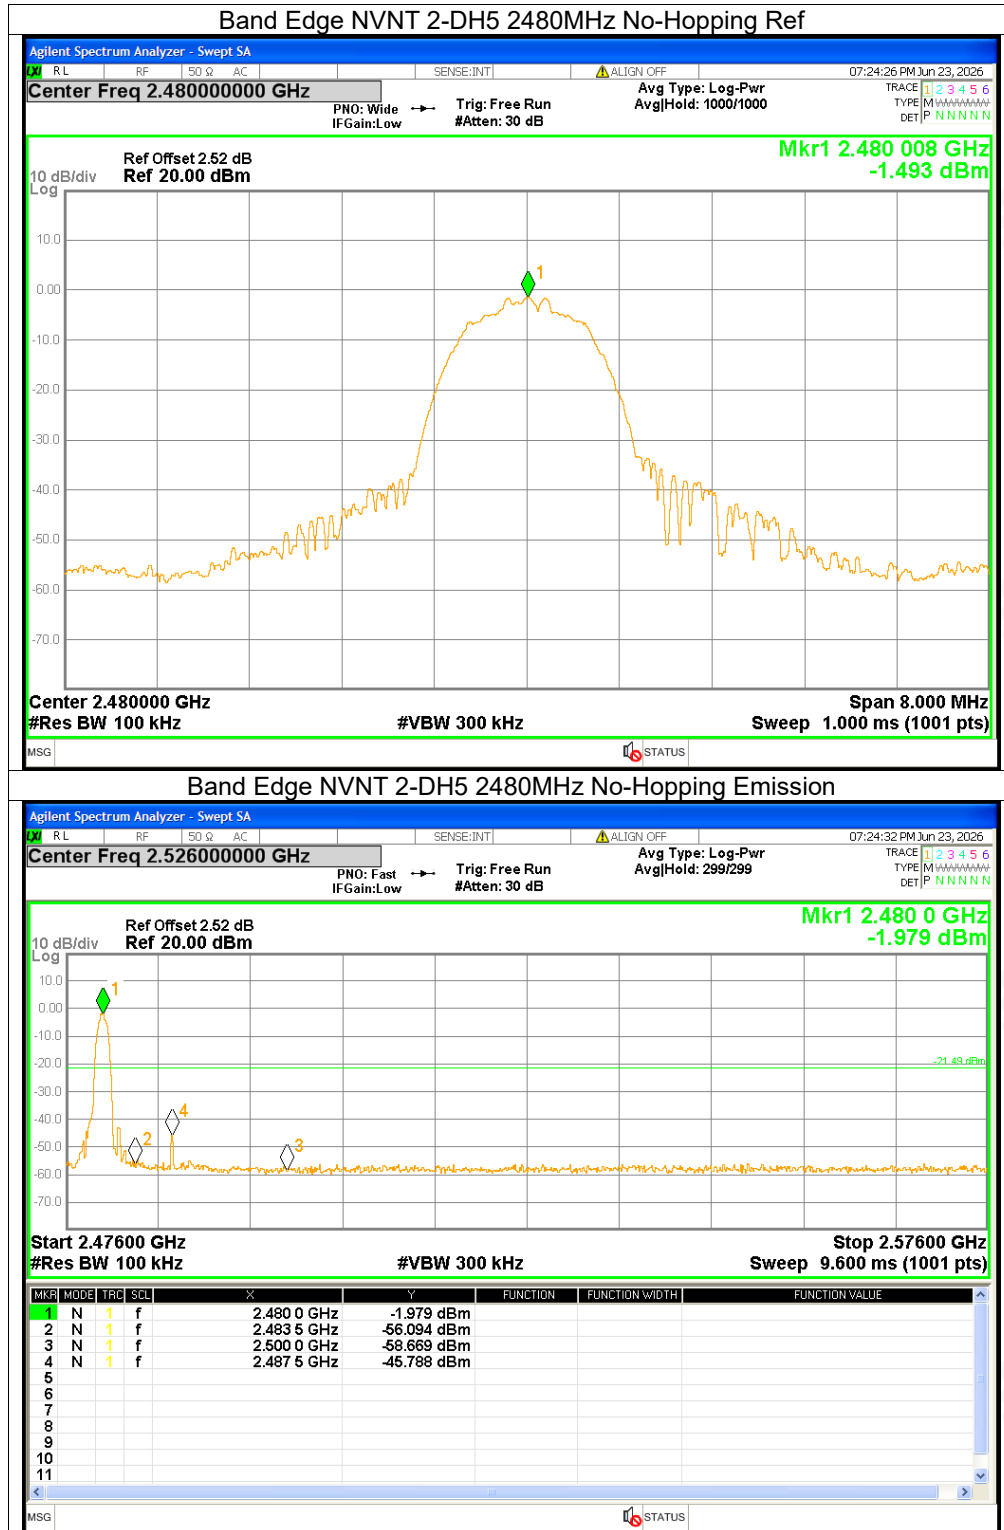

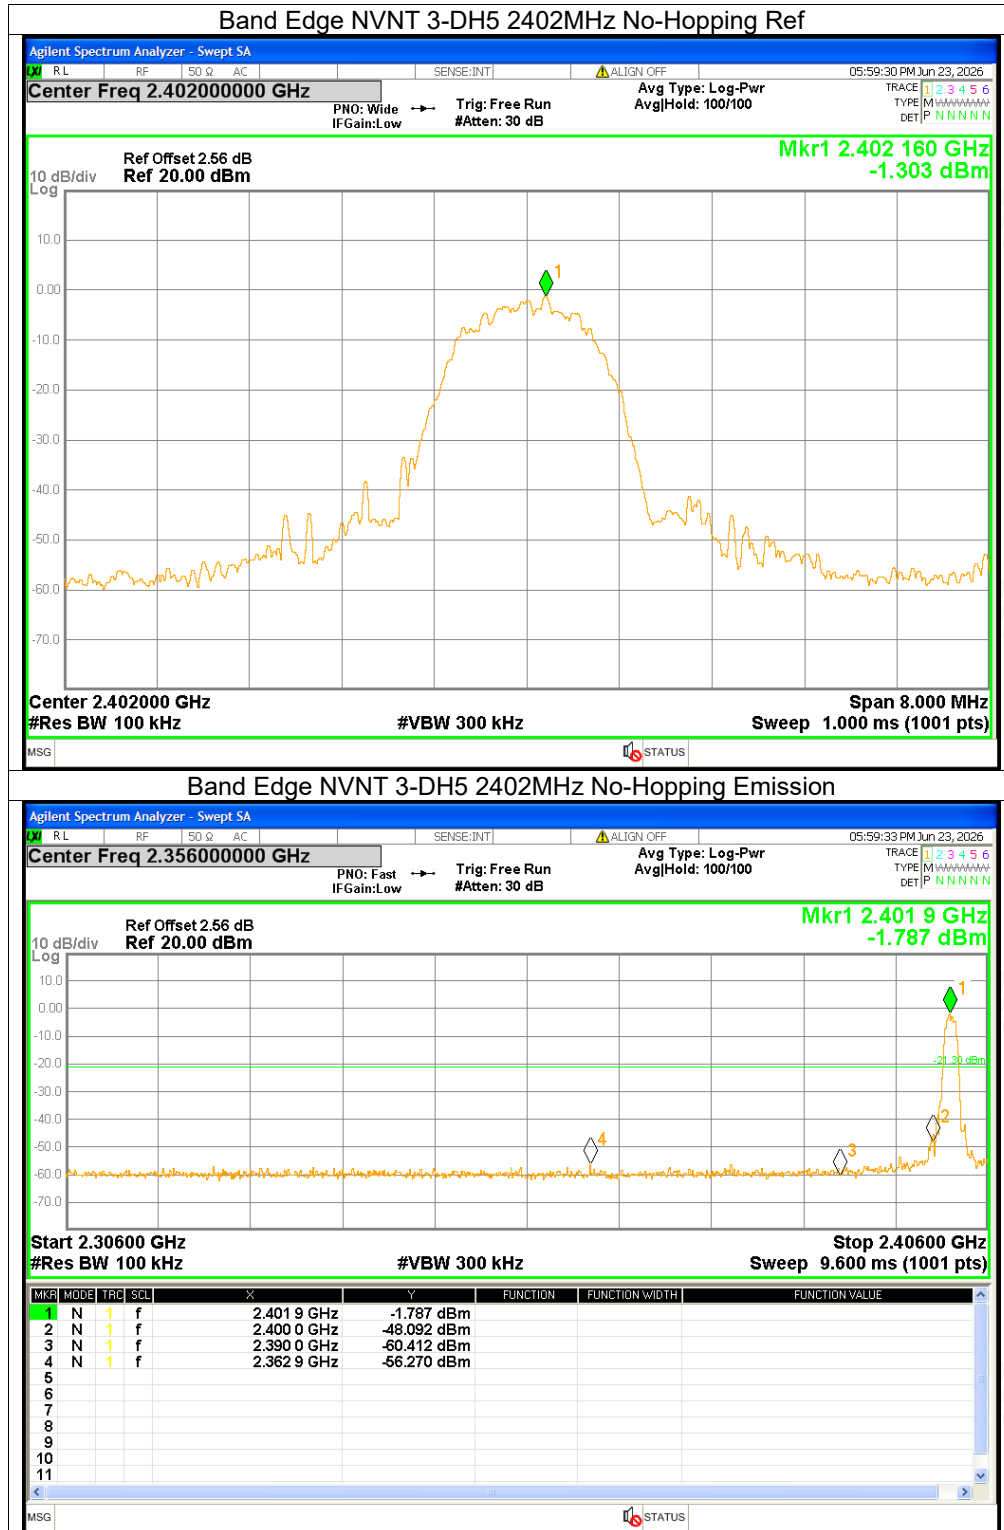


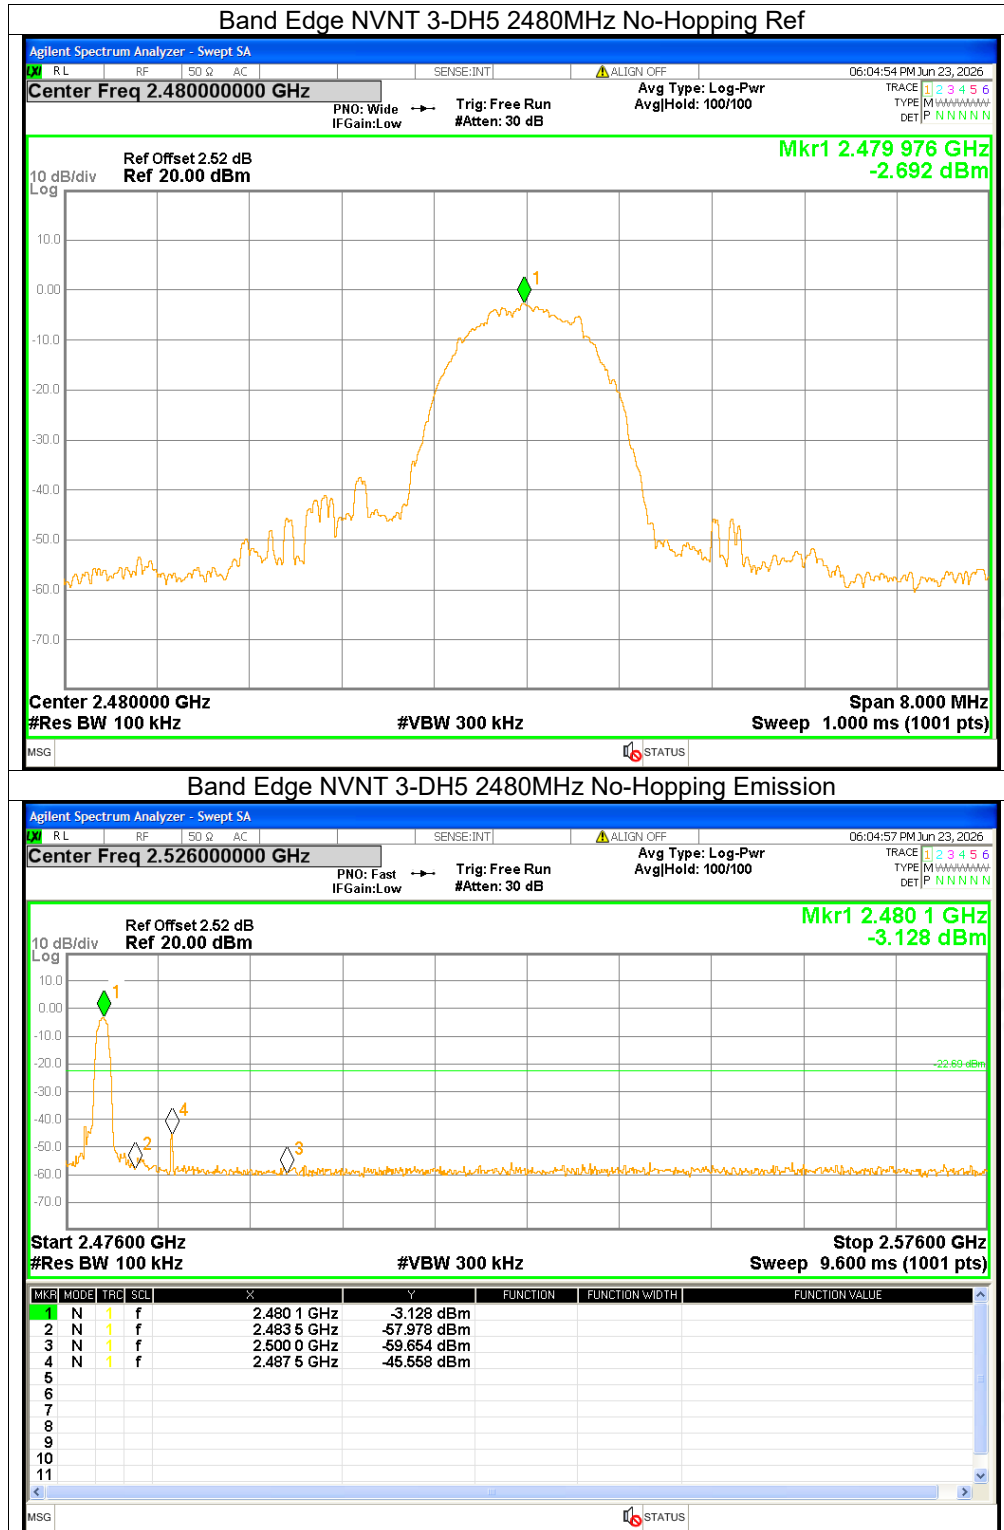





Band Edge(Hopping)


Condition	Mode	Frequency (MHz)	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	Hopping	-54.91	<=-20	Pass
NVNT	1-DH5	2480	Hopping	-56.08	<=-20	Pass
NVNT	2-DH5	2402	Hopping	-54.17	<=-20	Pass
NVNT	2-DH5	2480	Hopping	-52.36	<=-20	Pass
NVNT	3-DH5	2402	Hopping	-53.81	<=-20	Pass
NVNT	3-DH5	2480	Hopping	-54.17	<=-20	Pass

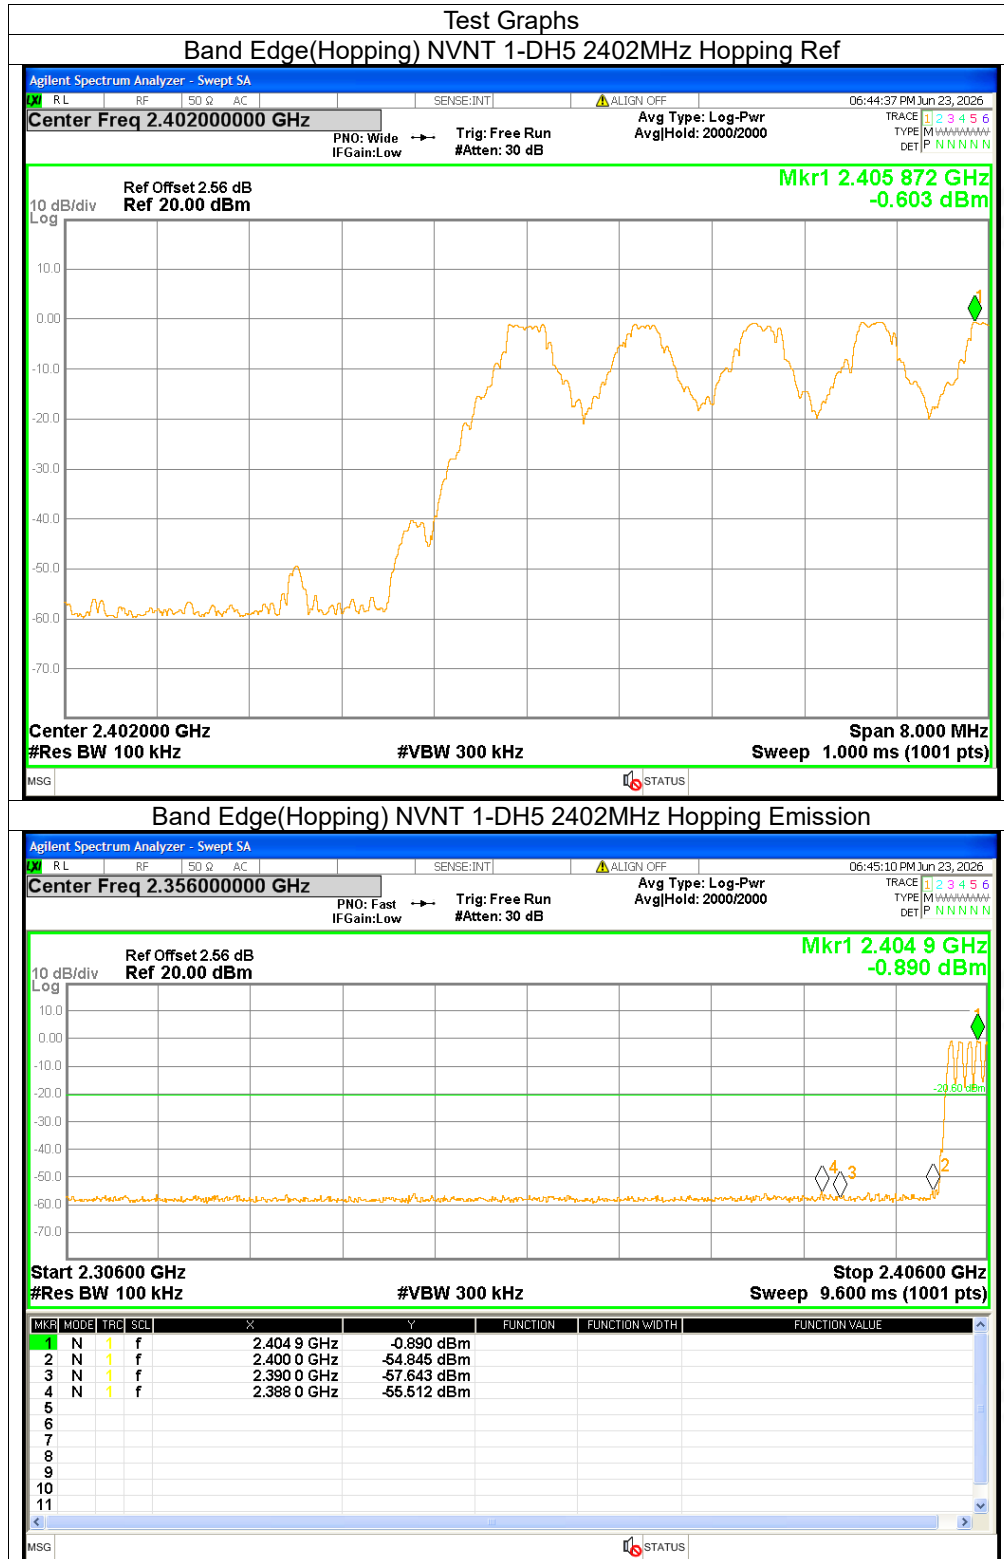




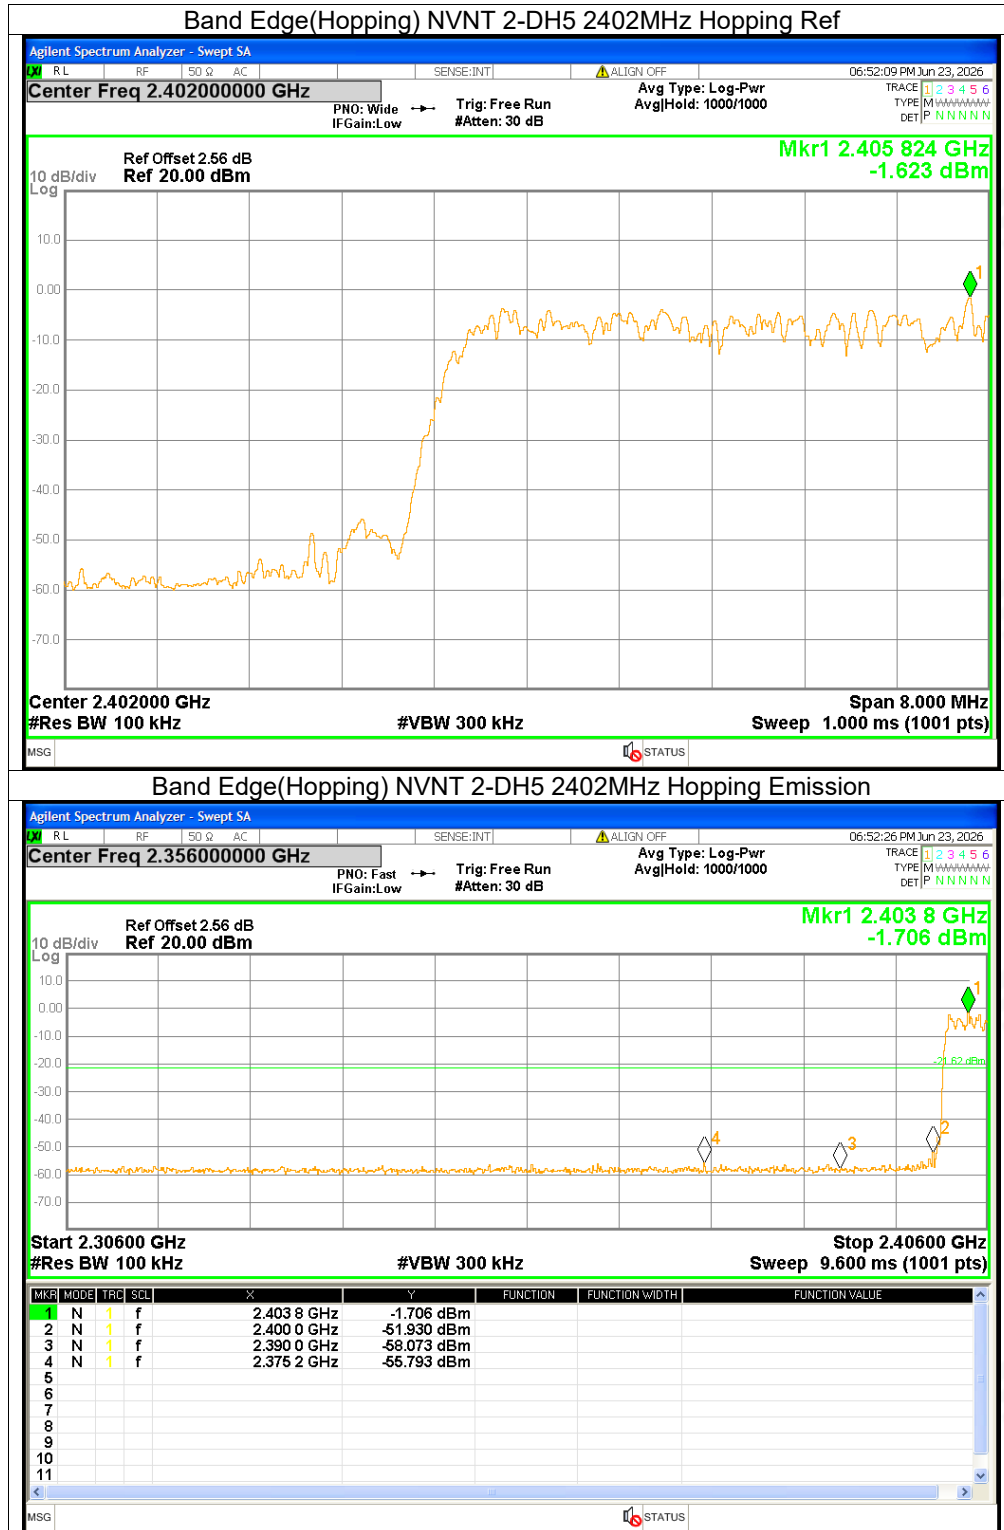

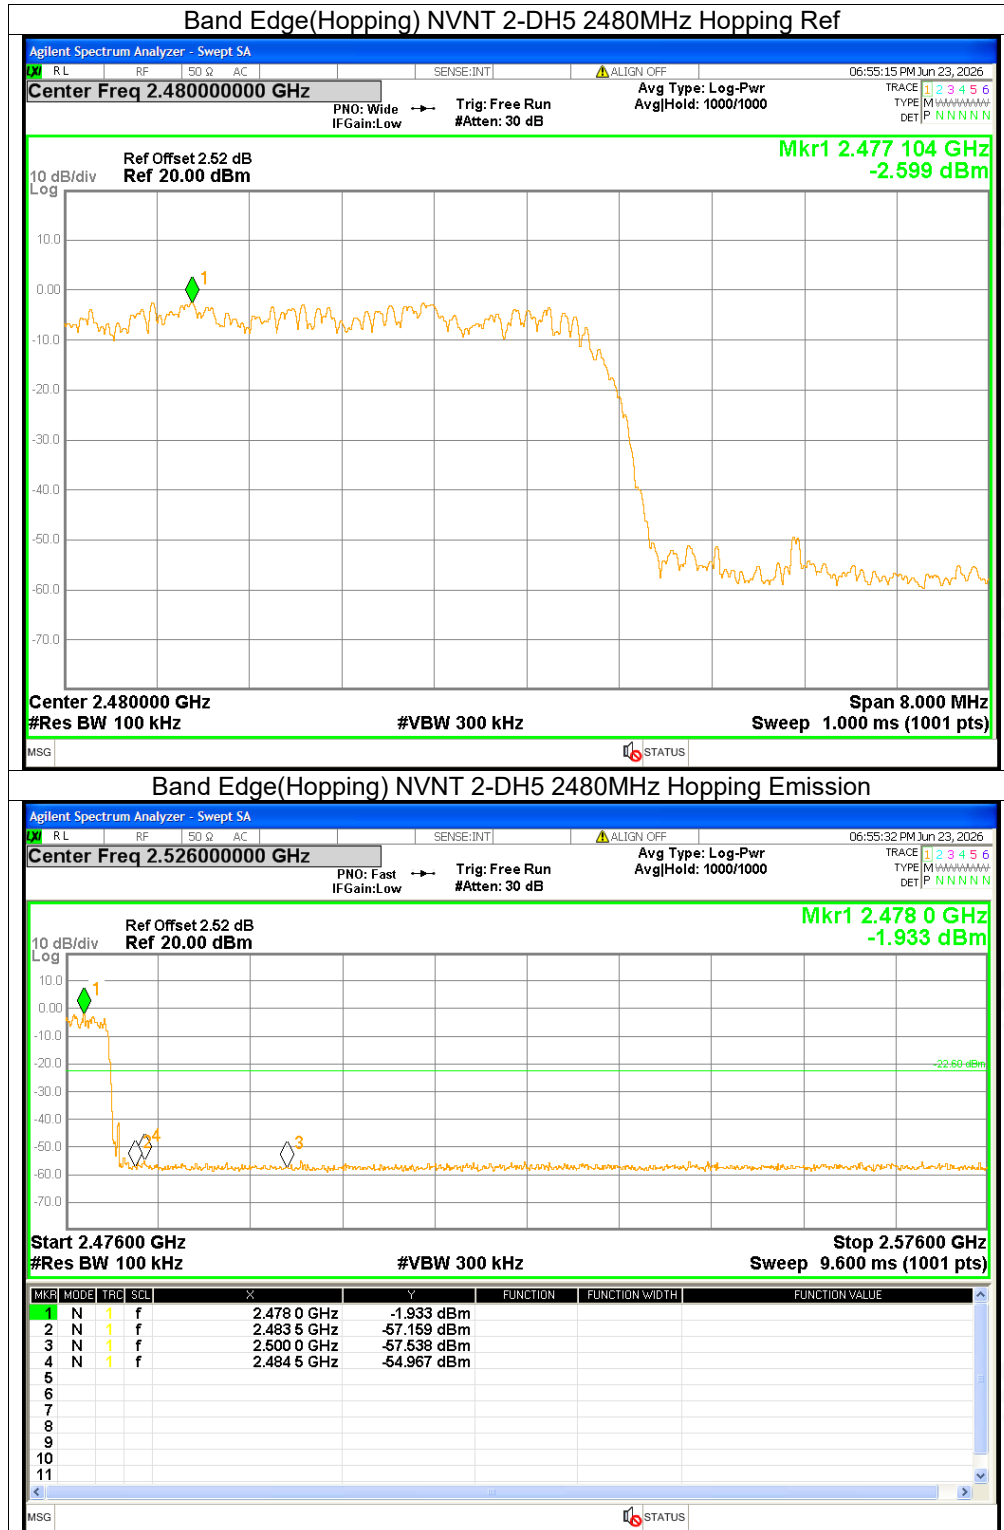

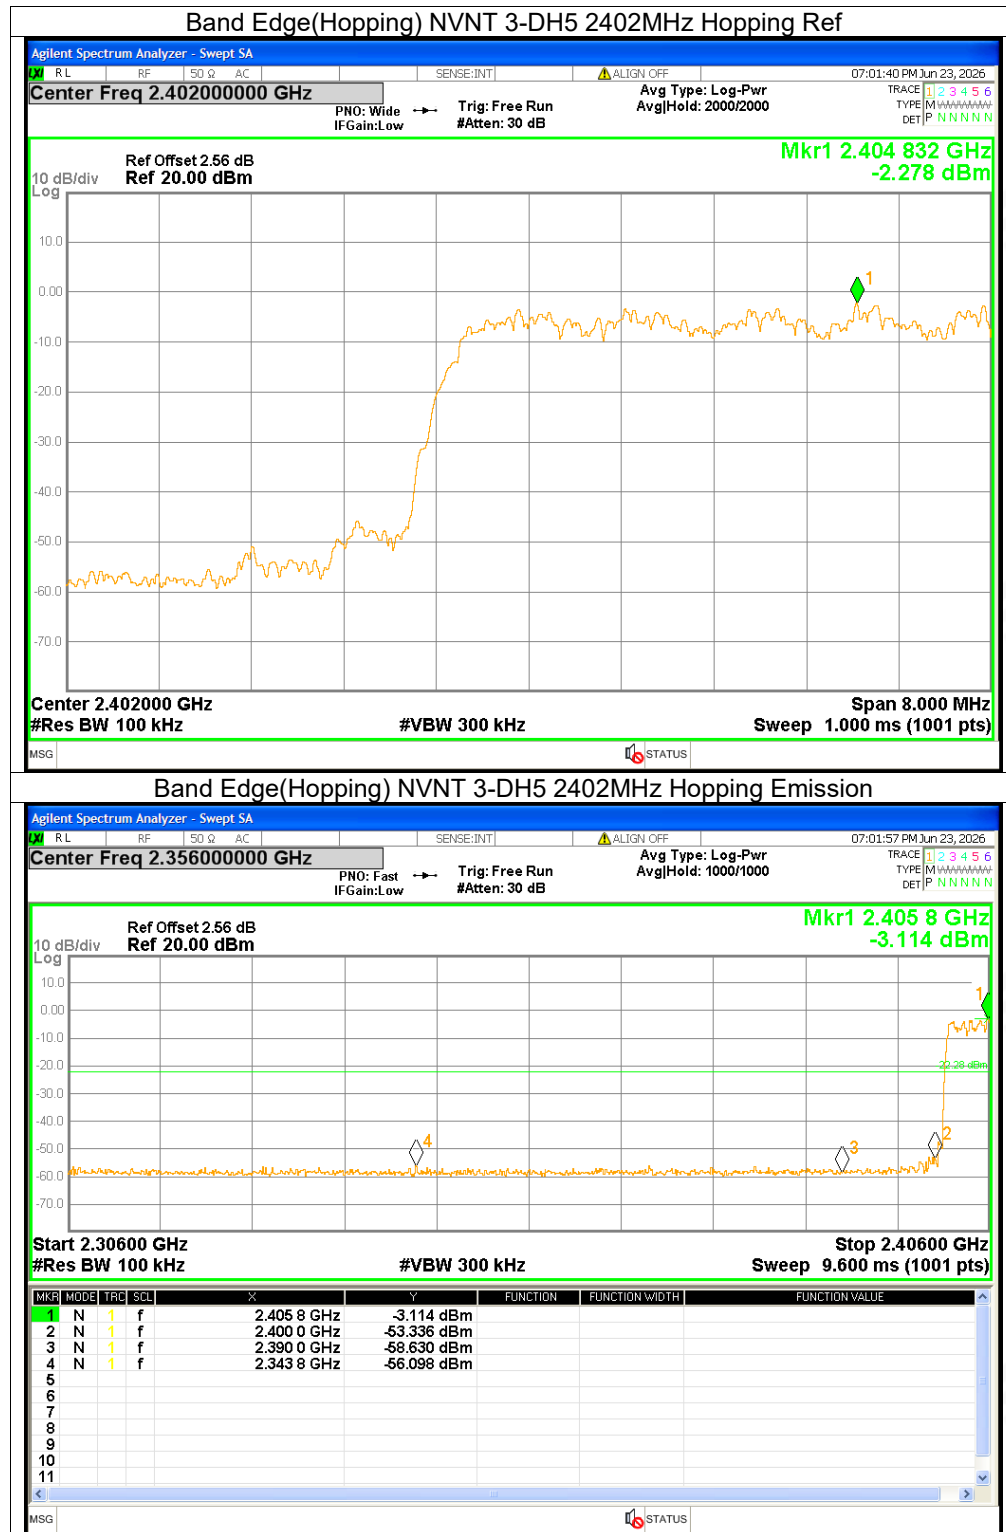


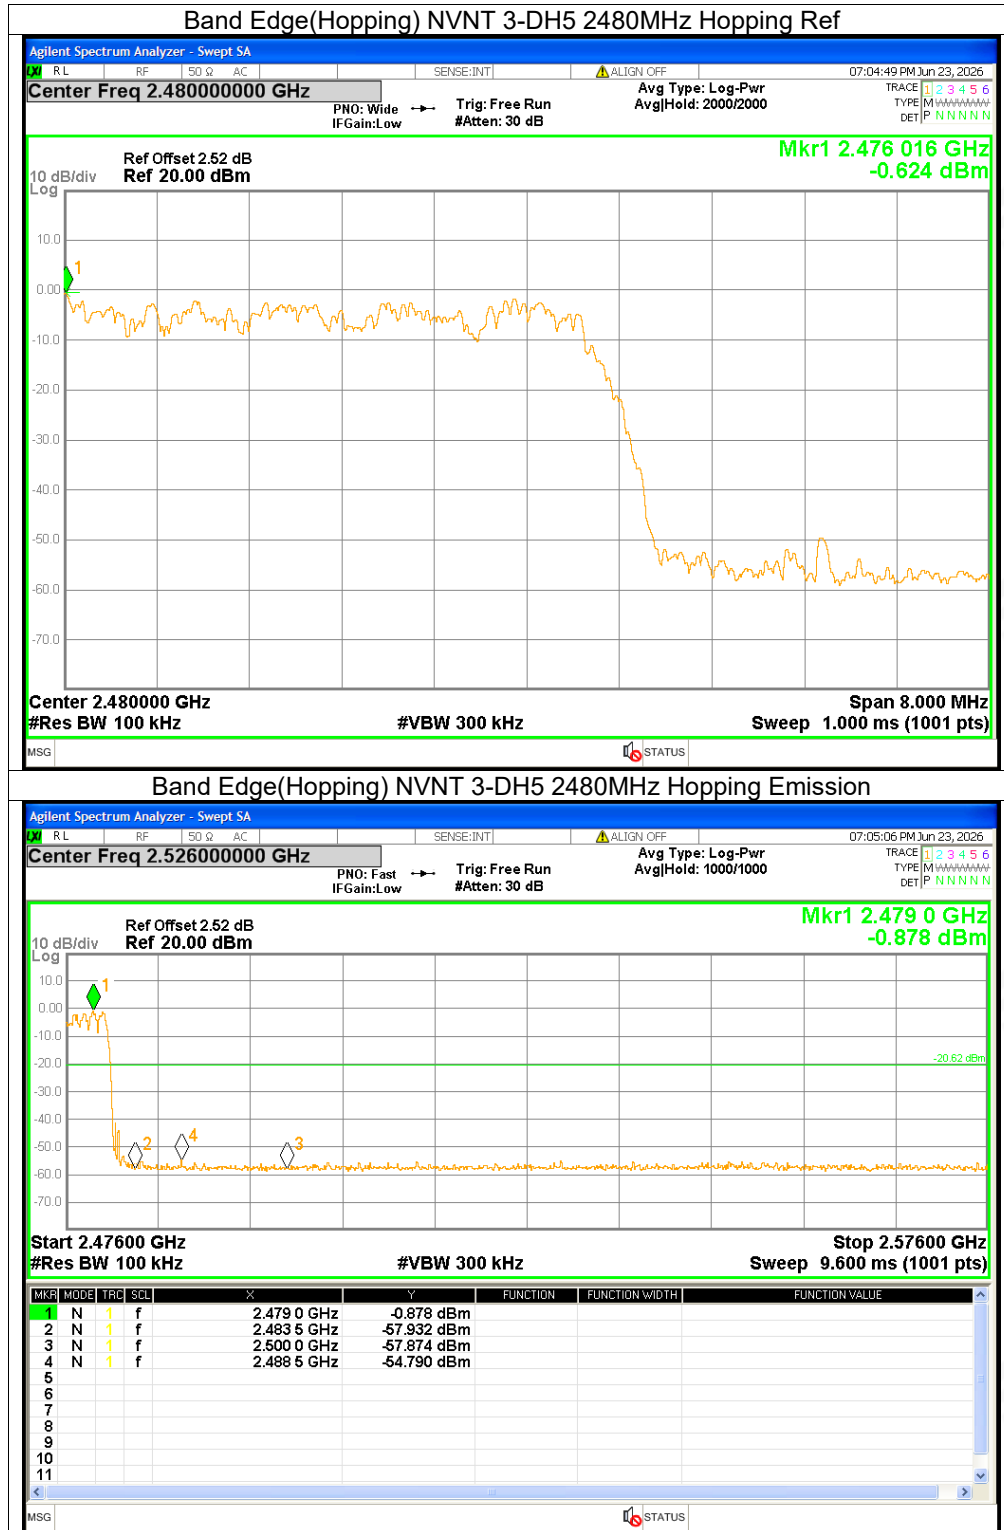






Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH5	2402	-40.87	<=-20	Pass
NVNT	1-DH5	2480	-38.77	<=-20	Pass
NVNT	2-DH5	2402	-39.11	<=-20	Pass
NVNT	2-DH5	2441	-40.51	<=-20	Pass
NVNT	2-DH5	2480	-38.13	<=-20	Pass
NVNT	3-DH5	2402	-37.76	<=-20	Pass
NVNT	3-DH5	2441	-40.28	<=-20	Pass
NVNT	3-DH5	2480	-36.6	<=-20	Pass

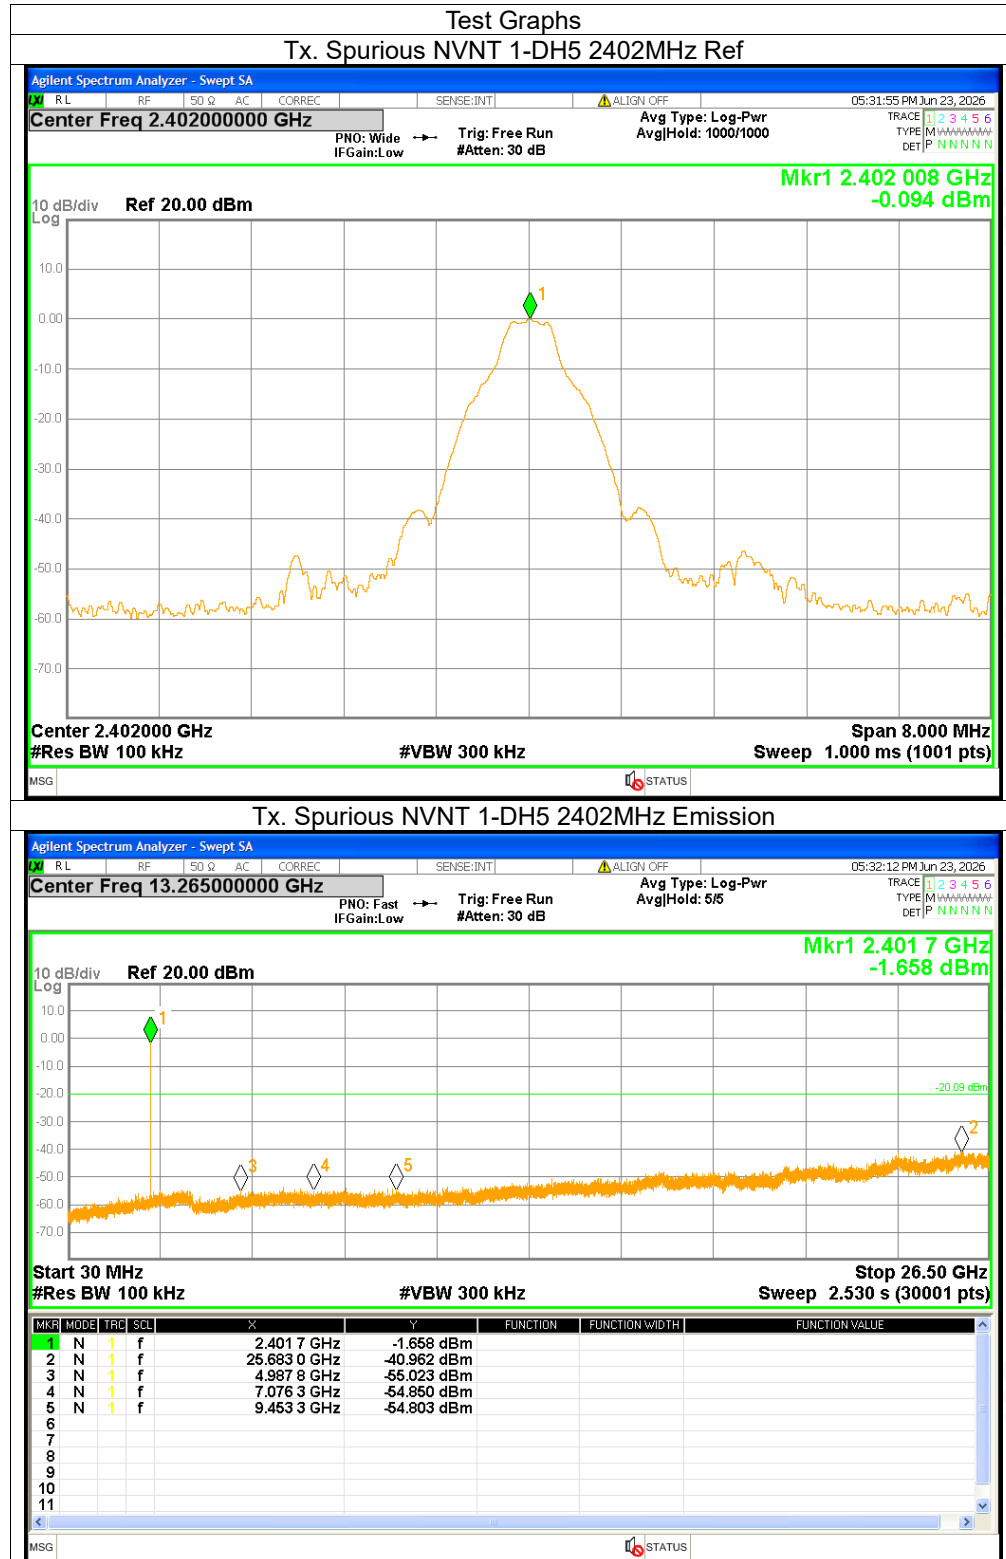


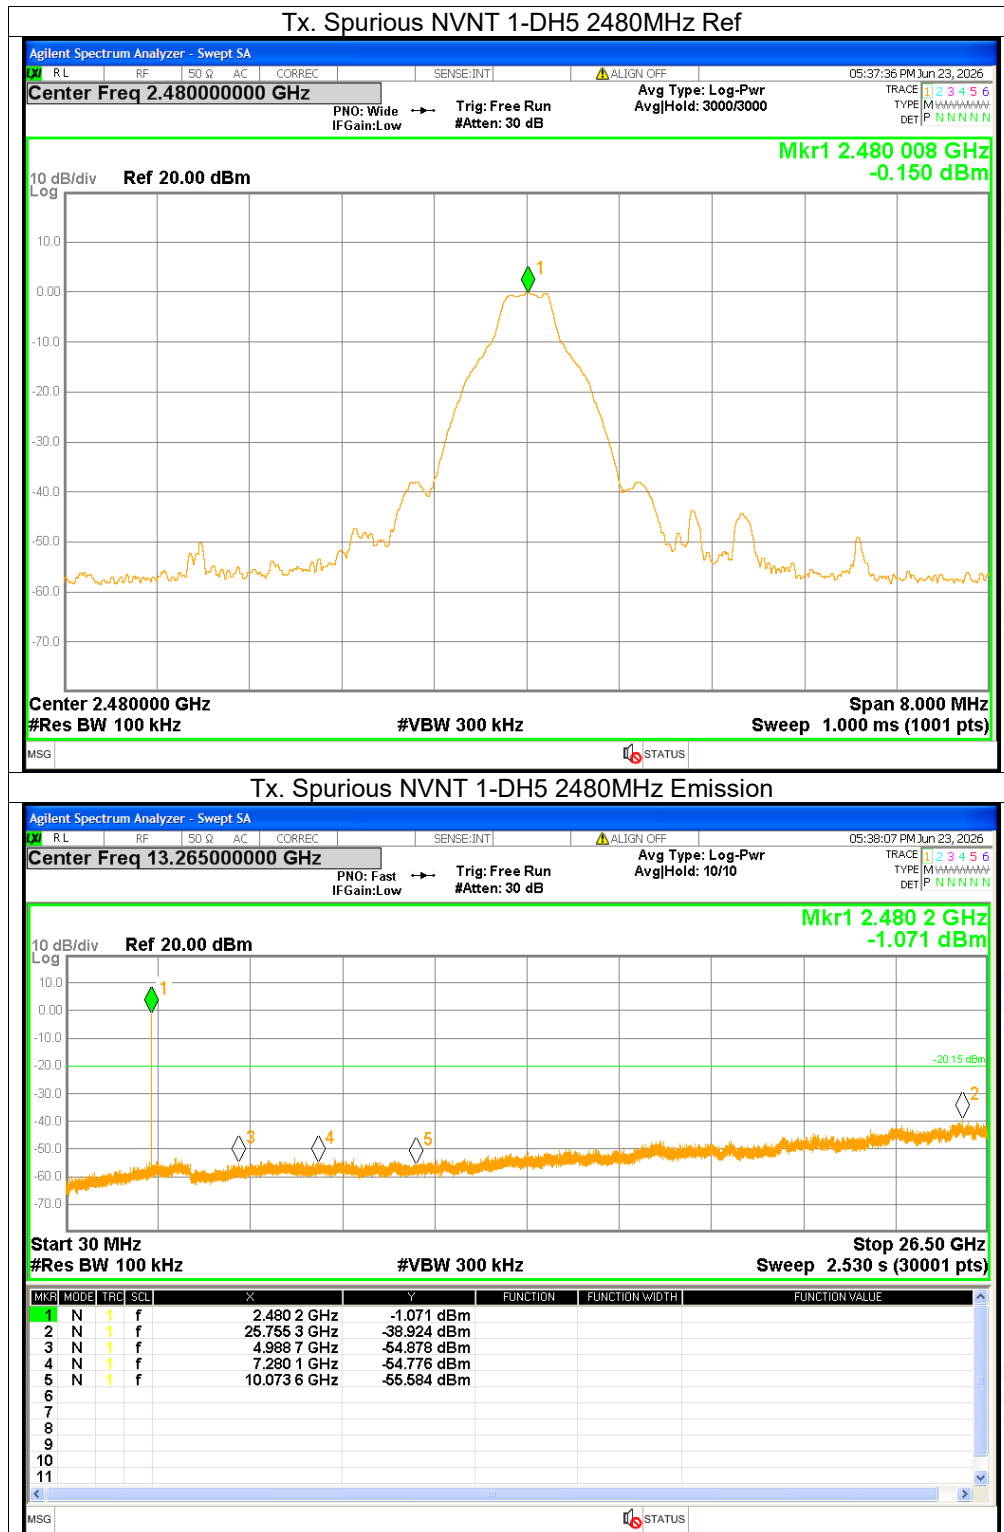


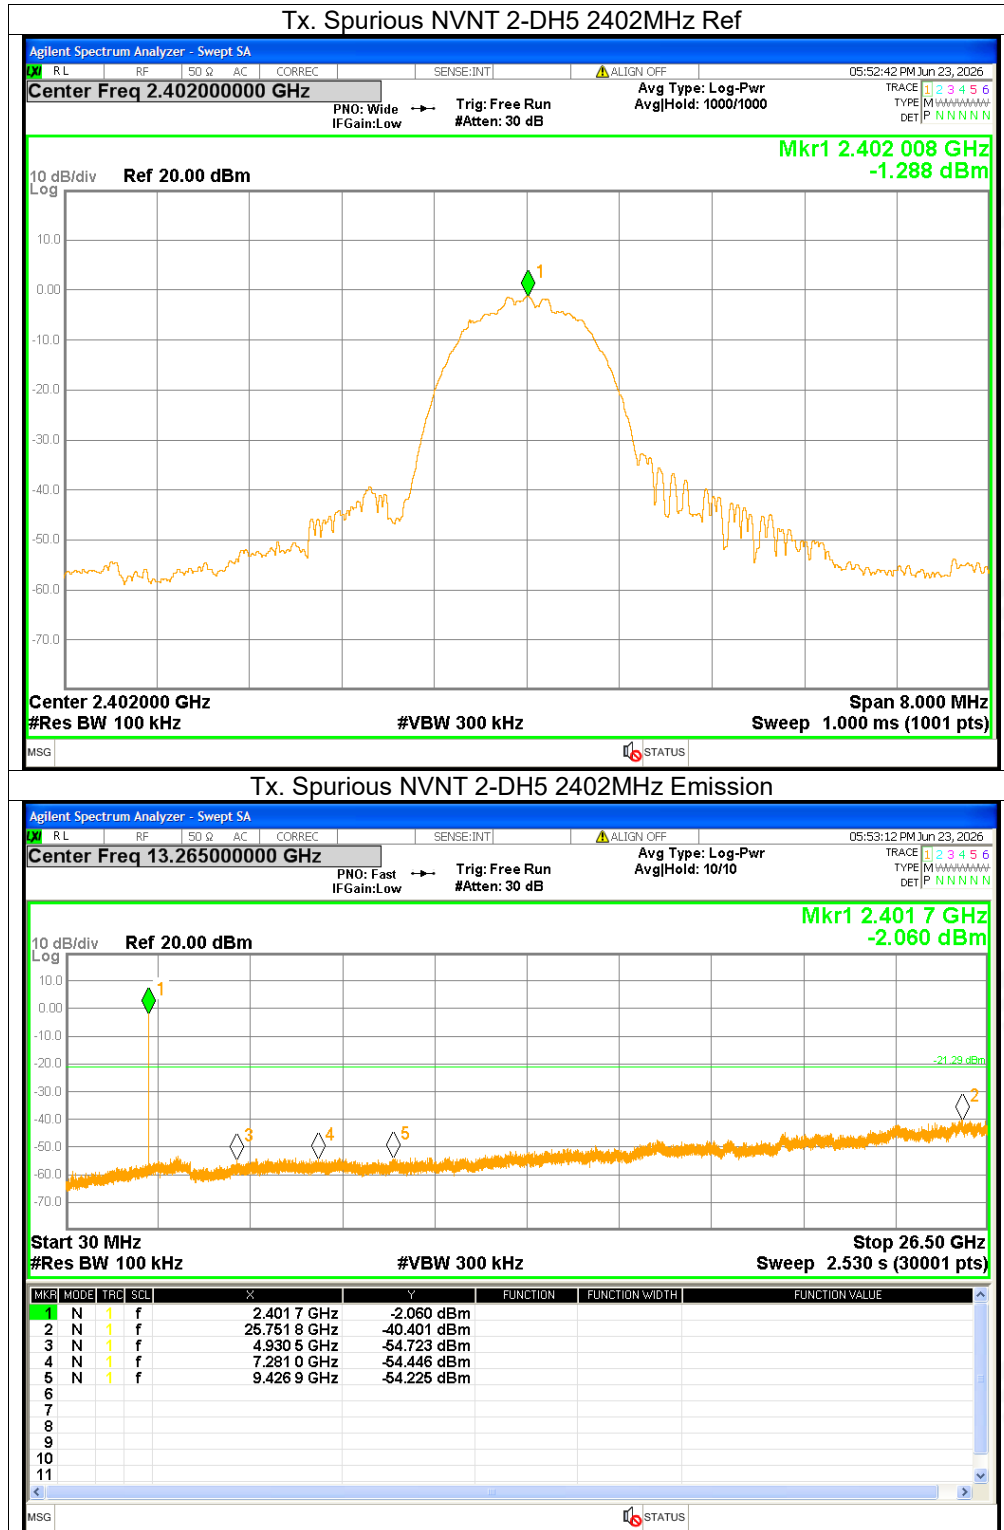


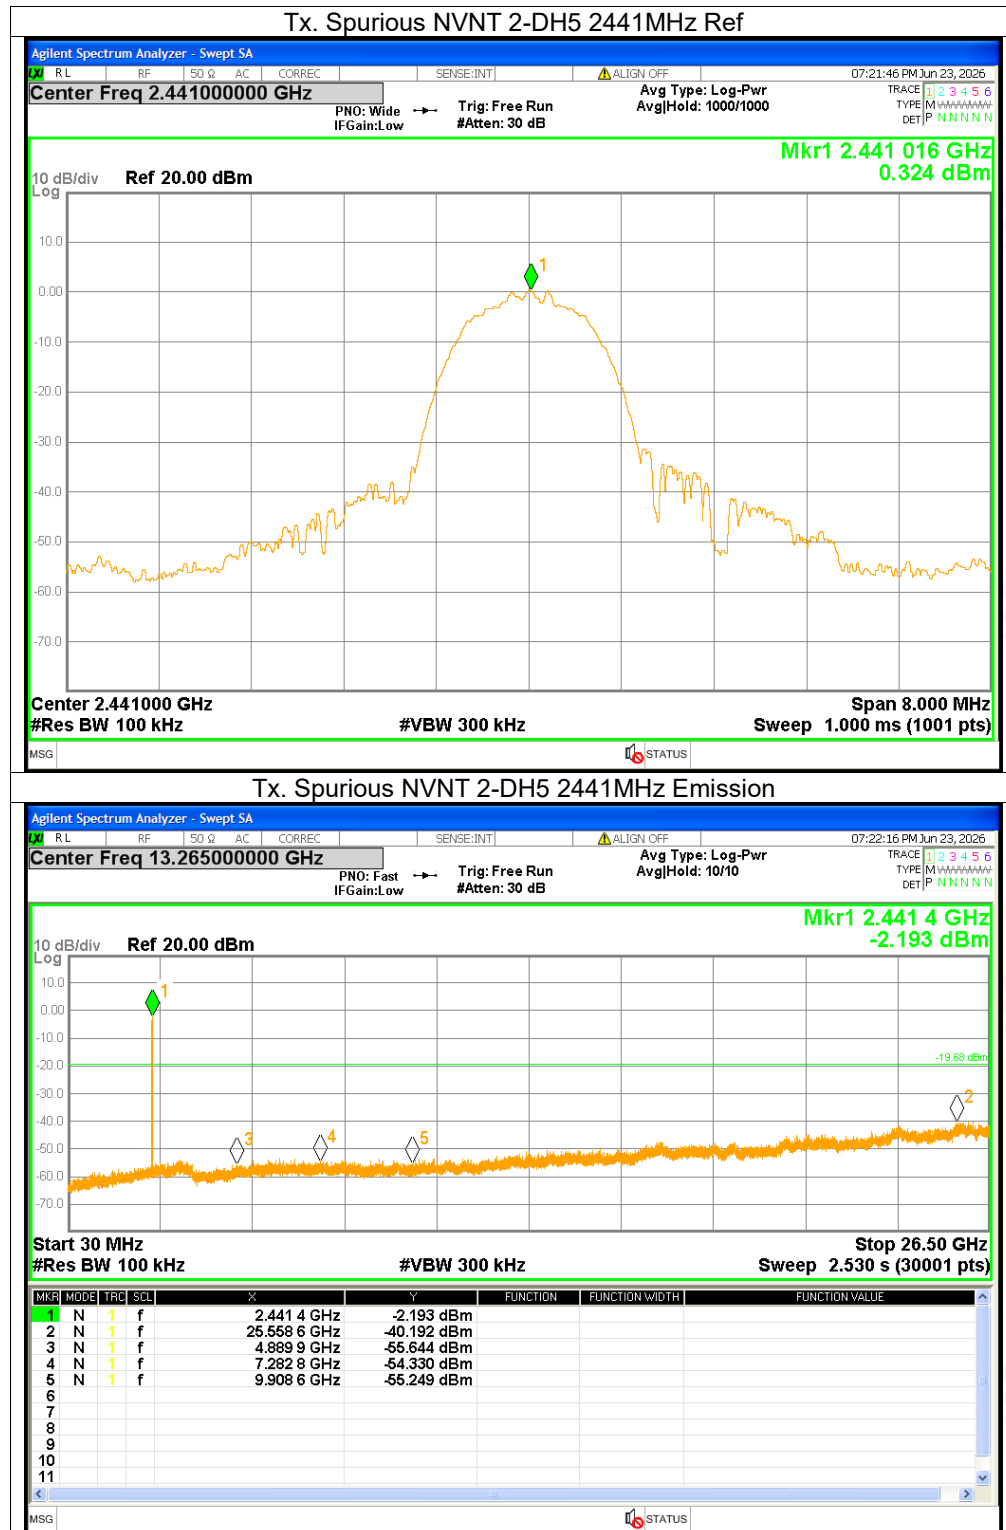

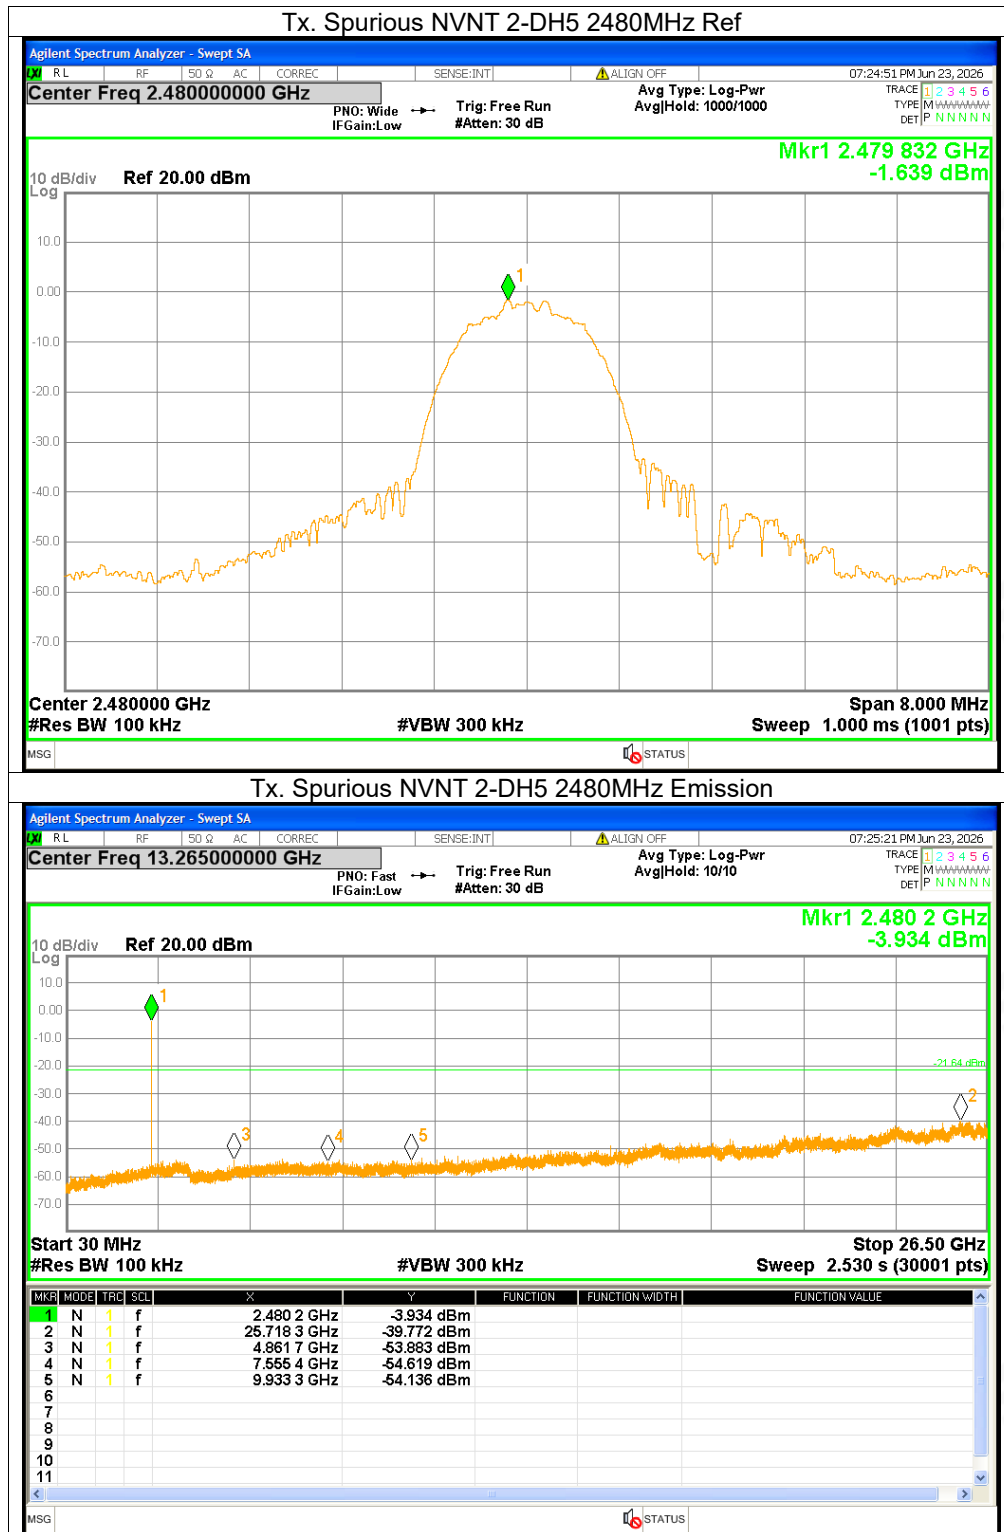

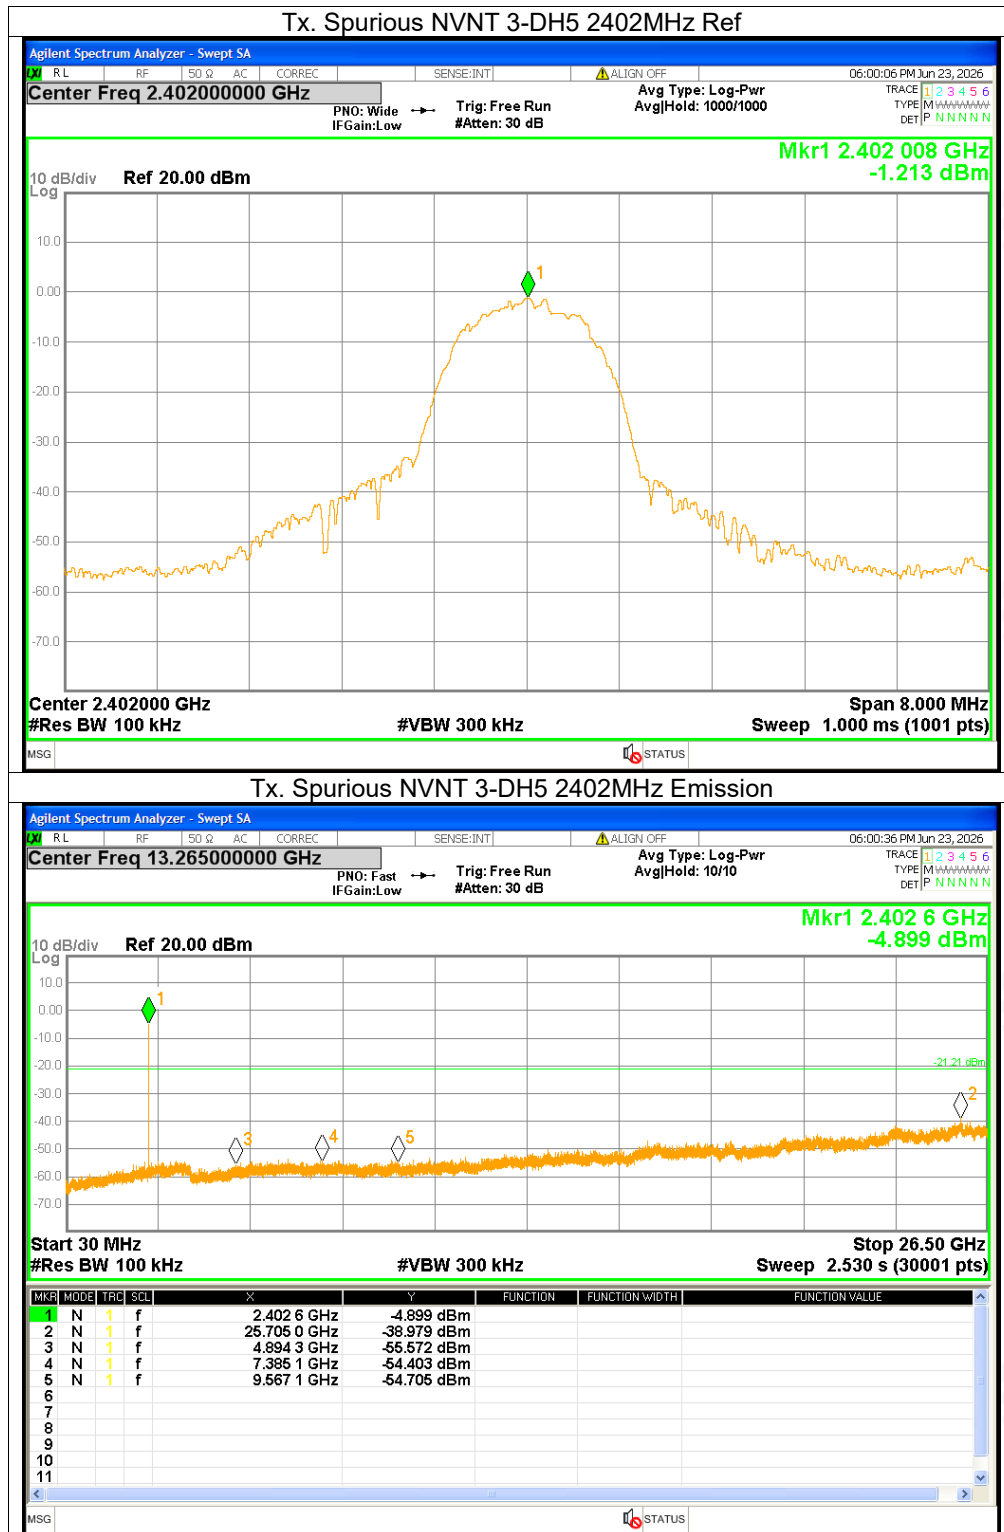

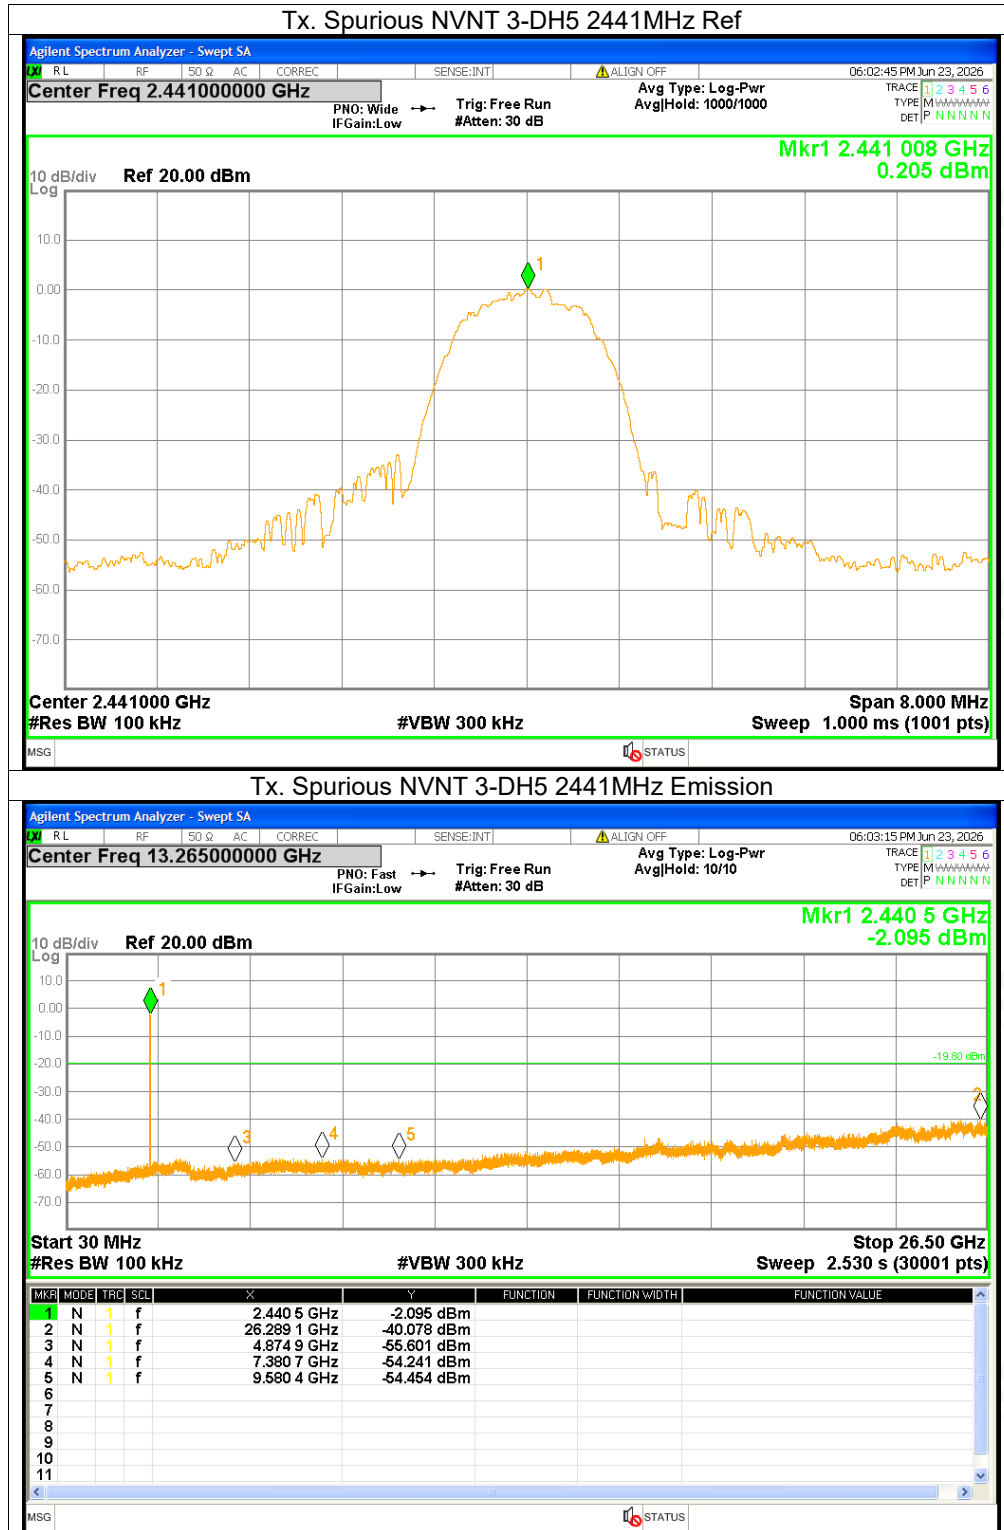


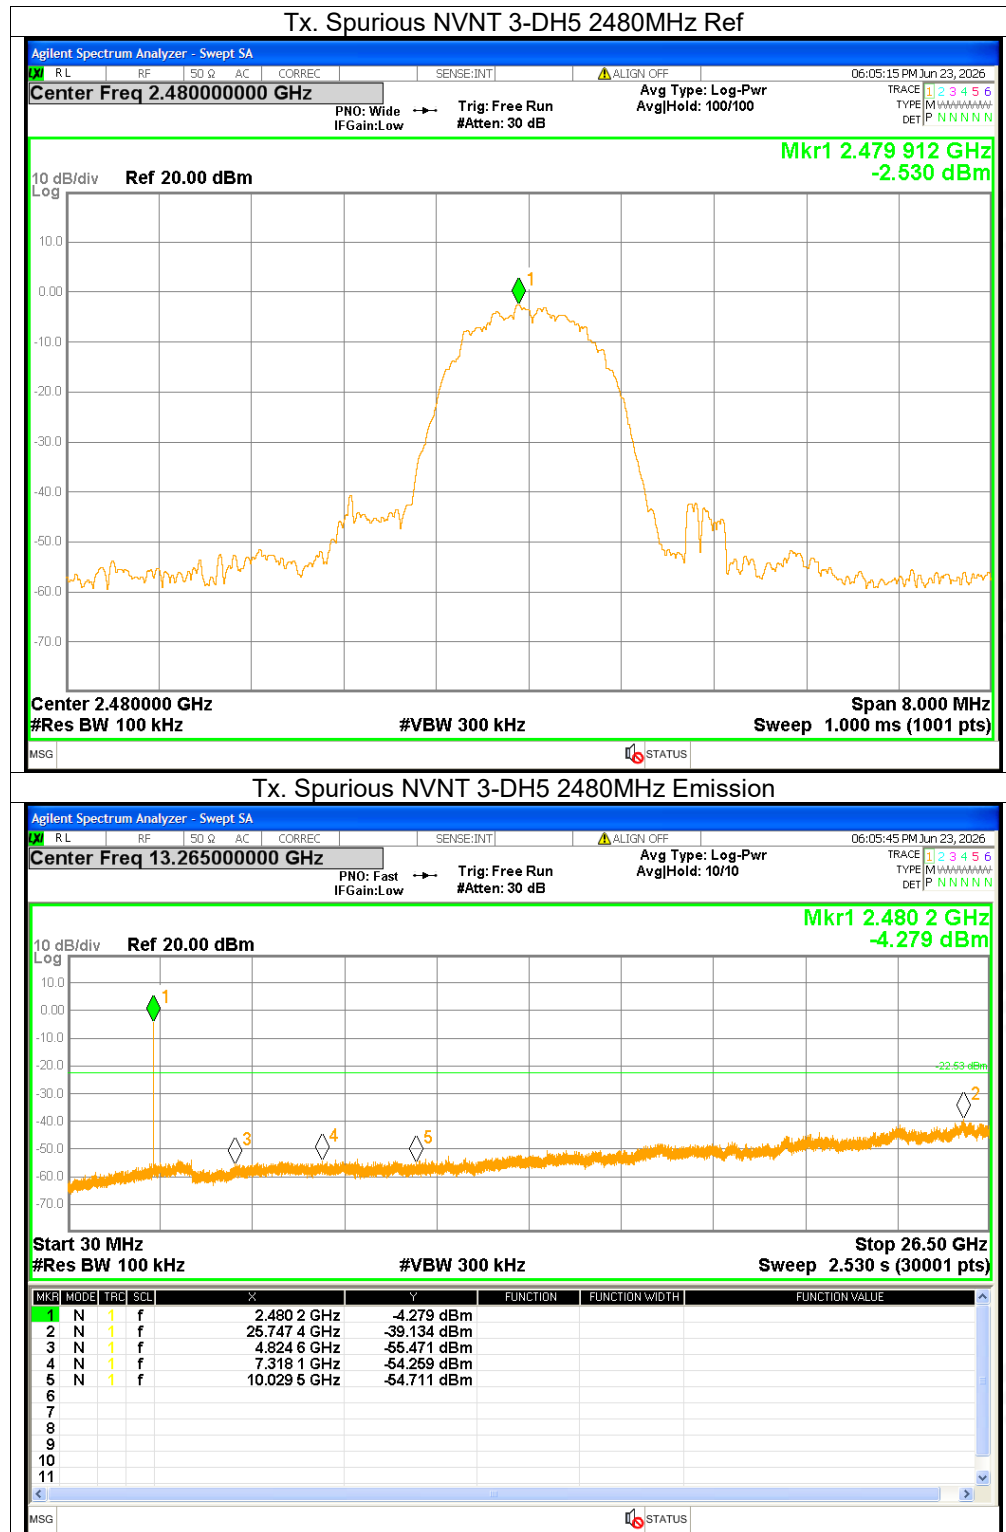






Restrict Band


Condition	Mode	Frequency (MHz)	Hopping Mode	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	1-DH5	2402	No-Hopping	2310	-49.7	2	47.56	Peak	<=74	Pass
NVNT	1-DH5	2402	No-Hopping	2310	-58.45	2	38.81	Average	<=54	Pass
NVNT	1-DH5	2402	No-Hopping	2379.12	-46.65	2	50.61	Peak	<=74	Pass
NVNT	1-DH5	2402	No-Hopping	2389.584	-57.25	2	40.01	Average	<=54	Pass
NVNT	1-DH5	2402	No-Hopping	2390	-50.56	2	46.7	Peak	<=74	Pass
NVNT	1-DH5	2402	No-Hopping	2390	-58.14	2	39.12	Average	<=54	Pass
NVNT	1-DH5	2480	No-Hopping	2483.5	-49.55	2	47.71	Peak	<=74	Pass
NVNT	1-DH5	2480	No-Hopping	2483.5	-57.18	2	40.08	Average	<=54	Pass
NVNT	1-DH5	2480	No-Hopping	2487.568	-42.41	2	54.85	Peak	<=74	Pass
NVNT	1-DH5	2480	No-Hopping	2487.448	-56.24	2	41.02	Average	<=54	Pass
NVNT	1-DH5	2480	No-Hopping	2500	-50.17	2	47.09	Peak	<=74	Pass
NVNT	1-DH5	2480	No-Hopping	2500	-57.43	2	39.83	Average	<=54	Pass
NVNT	2-DH5	2402	No-Hopping	2310	-49.29	2	47.97	Peak	<=74	Pass
NVNT	2-DH5	2402	No-Hopping	2310	-58.06	2	39.2	Average	<=54	Pass
NVNT	2-DH5	2402	No-Hopping	2368.944	-47.04	2	50.22	Peak	<=74	Pass
NVNT	2-DH5	2402	No-Hopping	2359.92	-57.37	2	39.89	Average	<=54	Pass
NVNT	2-DH5	2402	No-Hopping	2390	-49.93	2	47.33	Peak	<=74	Pass
NVNT	2-DH5	2402	No-Hopping	2390	-58.08	2	39.18	Average	<=54	Pass
NVNT	2-DH5	2480	No-Hopping	2483.5	-46.3	2	50.96	Peak	<=74	Pass
NVNT	2-DH5	2480	No-Hopping	2483.5	-55.63	2	41.63	Average	<=54	Pass
NVNT	2-DH5	2480	No-Hopping	2487.064	-43.5	2	53.76	Peak	<=74	Pass
NVNT	2-DH5	2480	No-Hopping	2483.584	-55.14	2	42.12	Average	<=54	Pass
NVNT	2-DH5	2480	No-Hopping	2500	-49.02	2	48.24	Peak	<=74	Pass
NVNT	2-DH5	2480	No-Hopping	2500	-57.29	2	39.97	Average	<=54	Pass
NVNT	3-DH5	2402	No-Hopping	2310	-49.26	2	48	Peak	<=74	Pass
NVNT	3-DH5	2402	No-Hopping	2310	-58.36	2	38.9	Average	<=54	Pass
NVNT	3-DH5	2402	No-Hopping	2388.432	-46.76	2	50.5	Peak	<=74	Pass
NVNT	3-DH5	2402	No-Hopping	2389.872	-56.95	2	40.31	Average	<=54	Pass
NVNT	3-DH5	2402	No-Hopping	2390	-49.25	2	48.01	Peak	<=74	Pass
NVNT	3-DH5	2402	No-Hopping	2390	-57.74	2	39.52	Average	<=54	Pass
NVNT	3-DH5	2480	No-Hopping	2483.5	-47.55	2	49.71	Peak	<=74	Pass
NVNT	3-DH5	2480	No-Hopping	2483.5	-55.05	2	42.21	Average	<=54	Pass
NVNT	3-DH5	2480	No-Hopping	2487.736	-41.89	2	55.37	Peak	<=74	Pass
NVNT	3-DH5	2480	No-Hopping	2483.752	-54.57	2	42.69	Average	<=54	Pass
NVNT	3-DH5	2480	No-Hopping	2500	-48.51	2	48.75	Peak	<=74	Pass
NVNT	3-DH5	2480	No-Hopping	2500	-57.85	2	39.41	Average	<=54	Pass

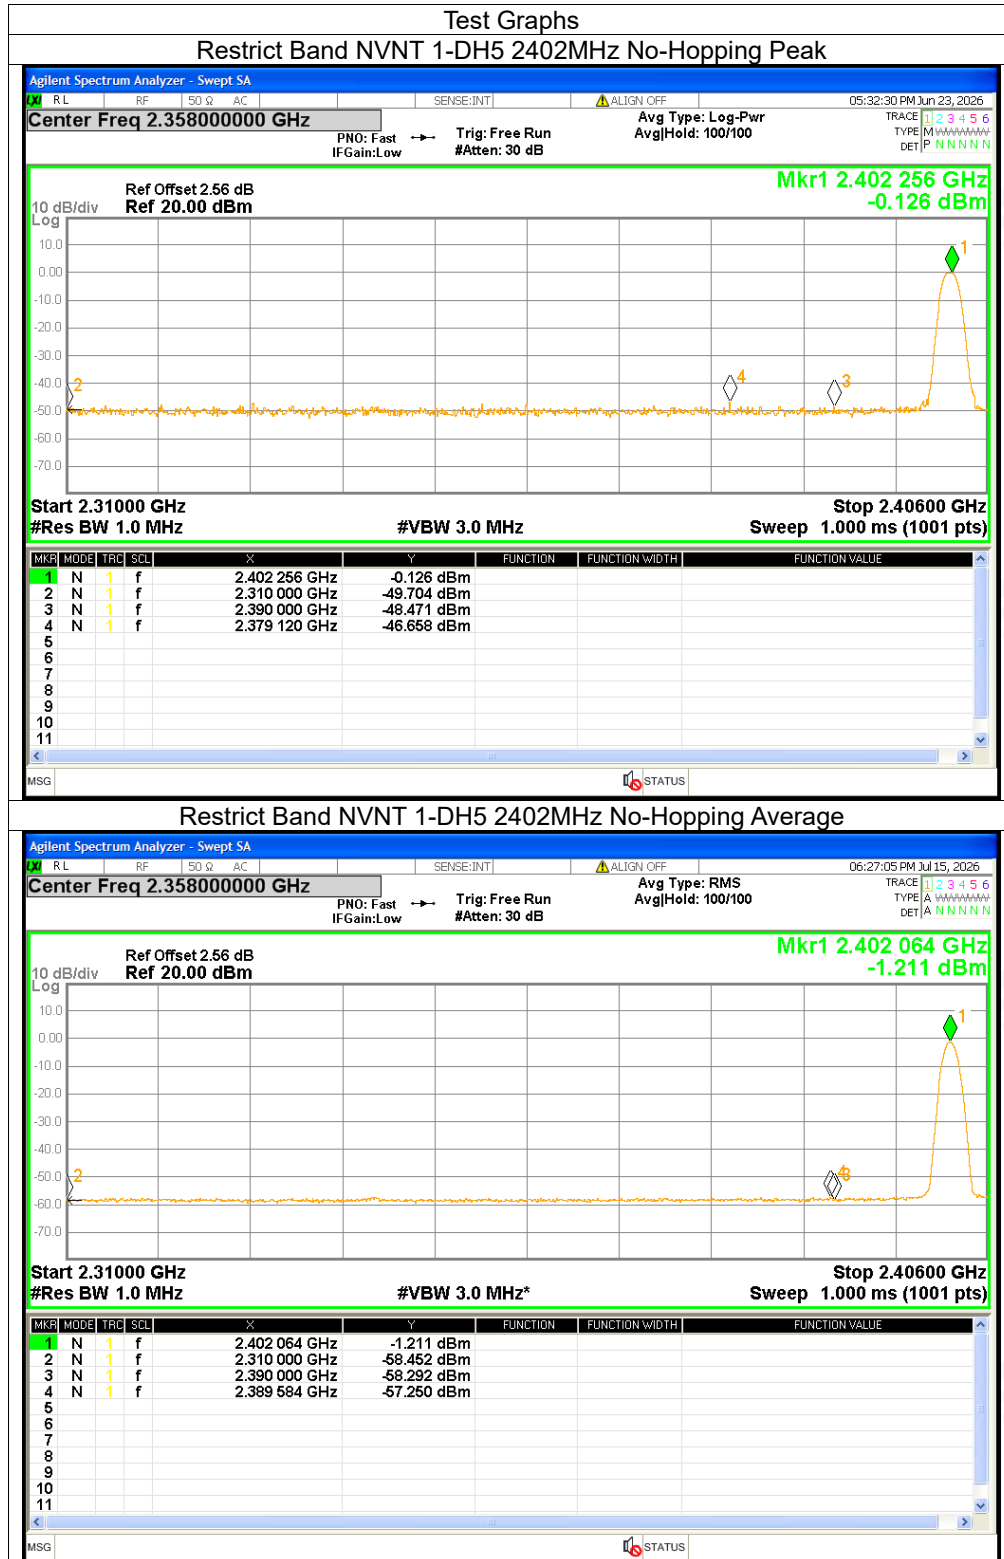


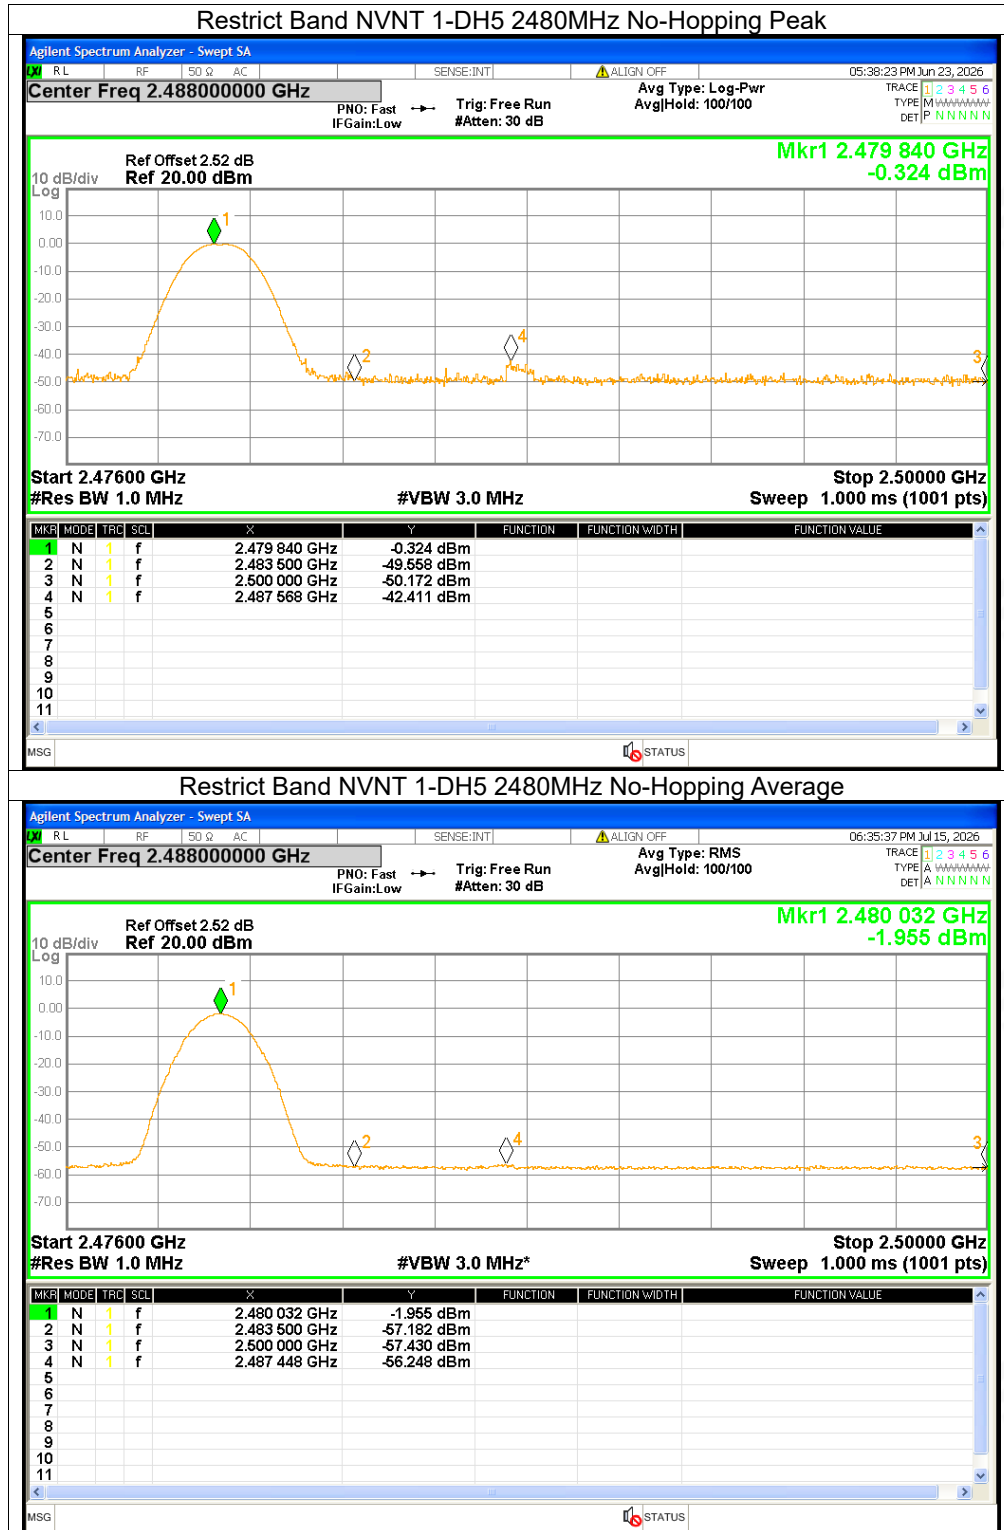

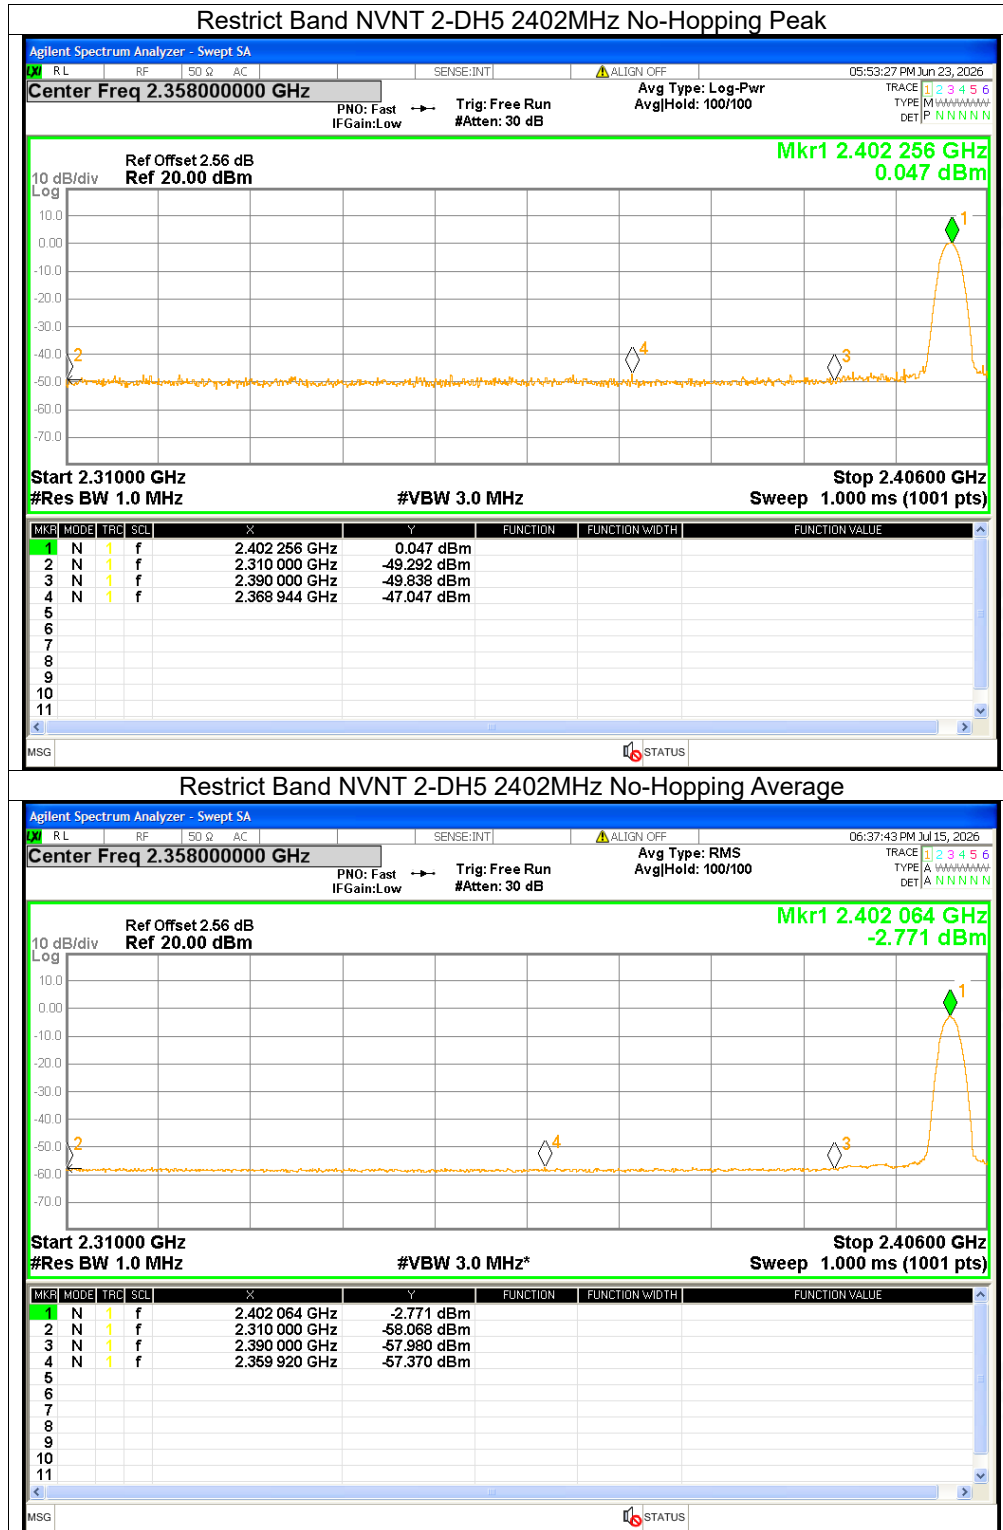

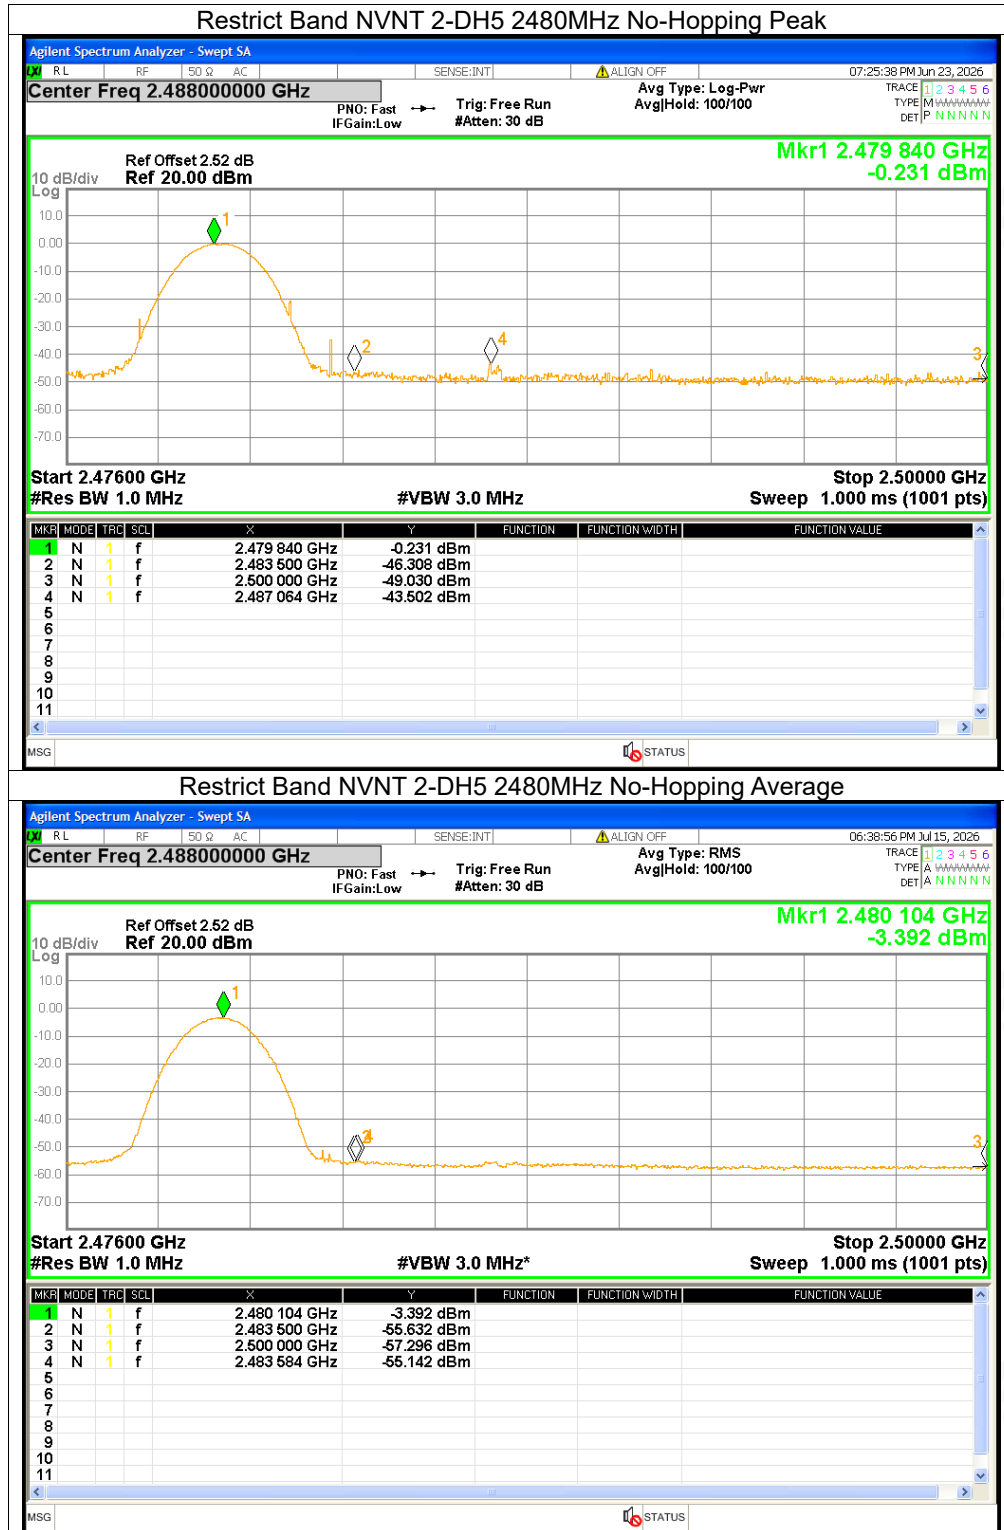

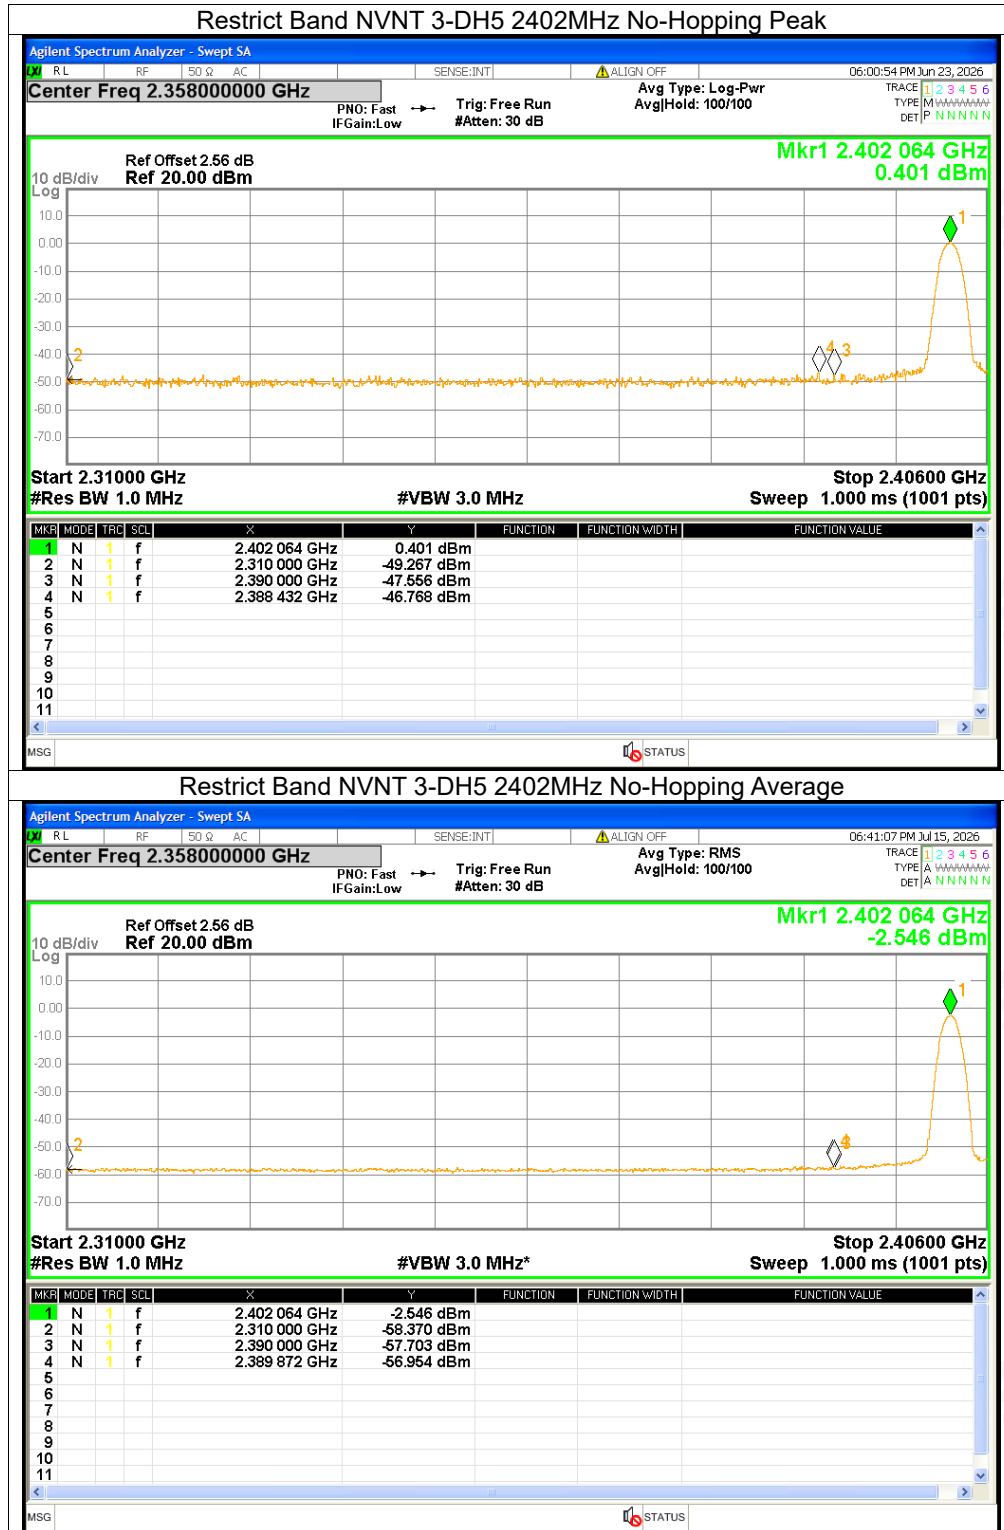

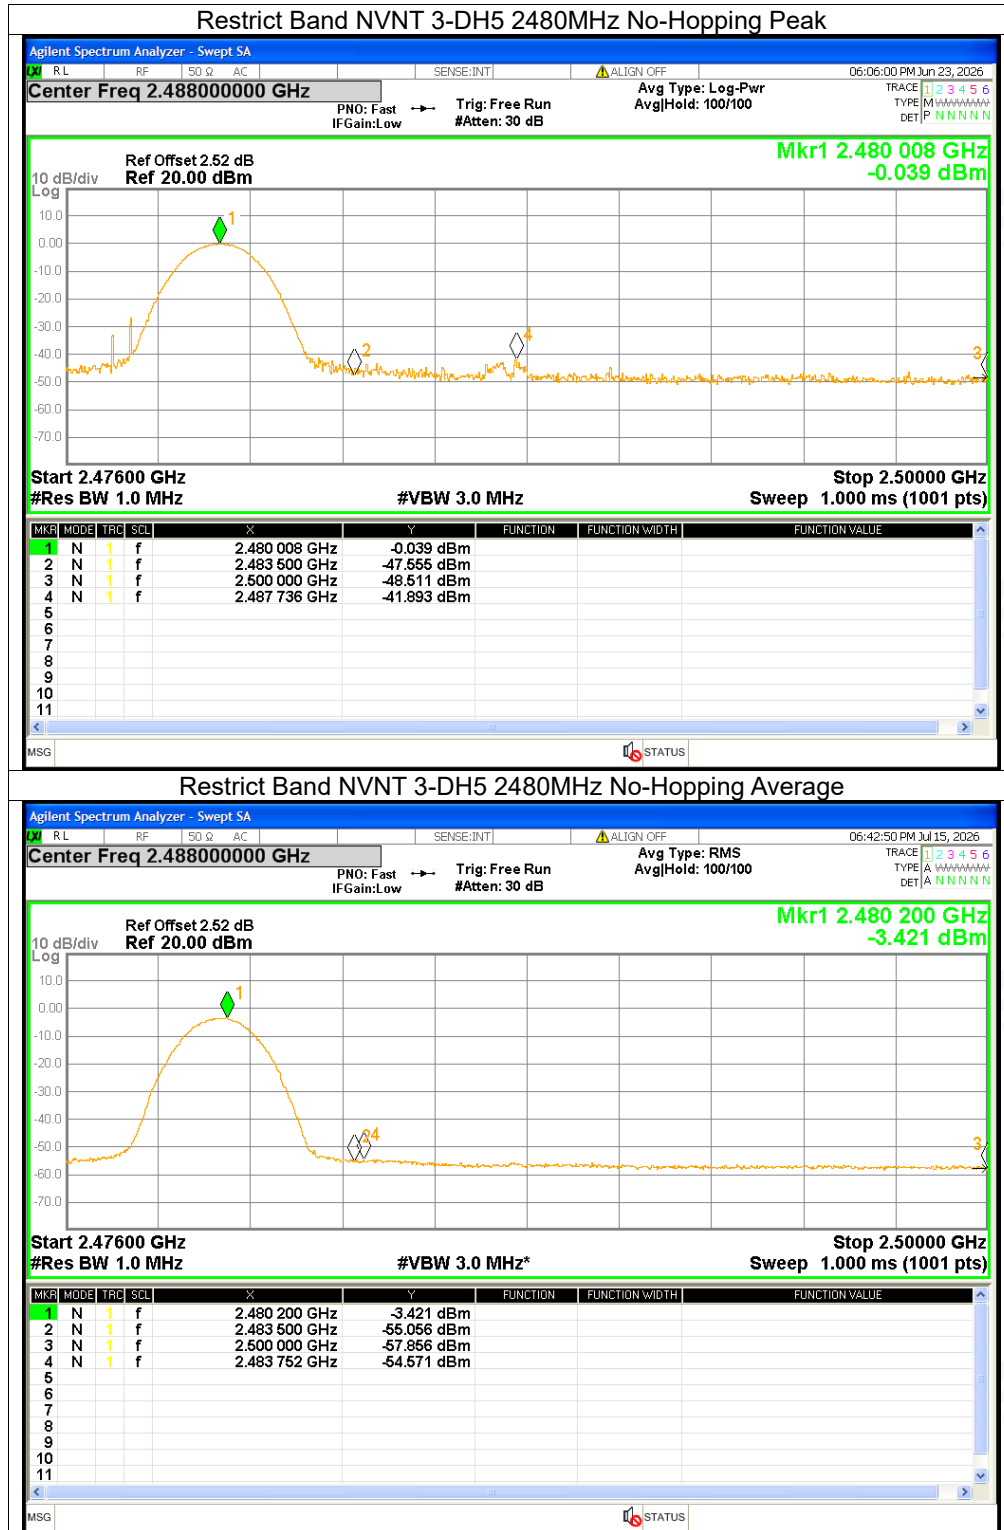



APPENDIX 2-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****