5.8 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT

Test overview

Radiated spurious emissions measurements are performed using the substitution method described in ANSI C63.26-2015 with the EUT transmitting into an integral antenna. Measurements on signalsoperating below 1GHz are performed using horizontally and vertically polarized tuned dipole antennas.Measurements on signals operating above 1GHz are performed using vertically and horizontally polarizedhorn antennas. All measurements are performed as peak measurements while the EUT isoperating at maximum power and at the appropriate frequencies.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10th harmonic.

Test procedure

1. The testing FCC KDB 971168 D01 Section 5.8 and ANSI C63.26-2015-Section 5.5.
2. RBW = 100kHz for emissions below 1GHz and 1MHz for emissions above 1GHz
3. VBW ≥ 3 x RBW
4. Span = 1.5 times the OBW
5.No. of sweep points > 2 x span/RBW
6. Detector = Peak
7. Trace mode = max hold
8. The trace was allowed to stabilize
9. Effective Isotropic Spurious Radiation was measured by substitution method according to TIA/EIA-603-D. The EUT was replaced by the substitution antenna at same location, and then a known power from S.G. was applied into the dipole antenna through a Tx cable, and then recorded the maximum Analyzer reading through raised and lowered the test antenna. The correction factor (in dB) = S.G. - Tx Cable loss + Substitution antenna gain - Analyzer reading. Then the EUT's EIRP/ERP was calculated with the correction factor,

ERP/EIRP = P.SG + GT – LC

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as PMeas, t ypically dBW or dBm);

P.SG = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

TEST SETUP

For radiated test from 30MHz to 1GHz

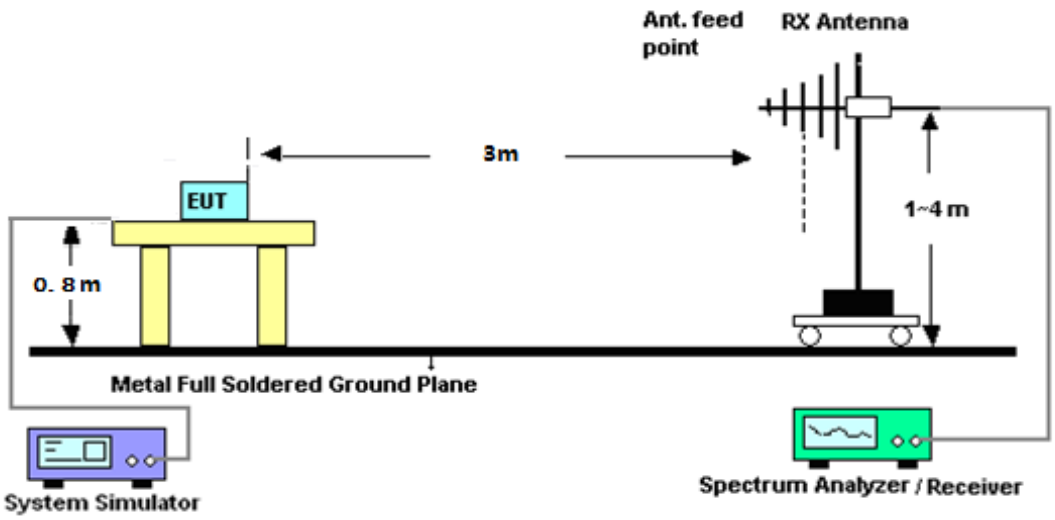

For radiated test from above 1GHz

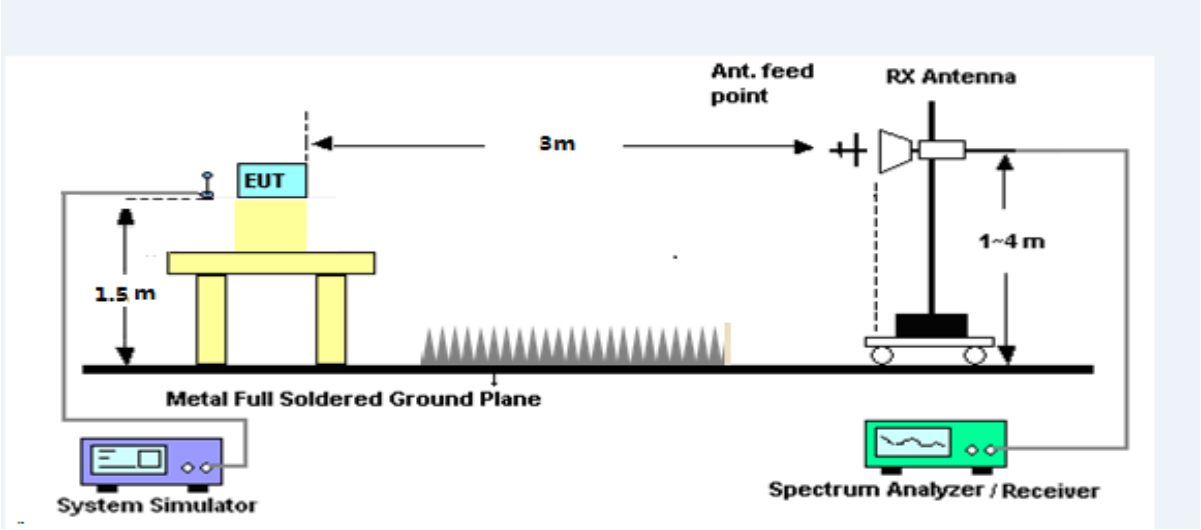

APPENDIX A.TESTRESULT

A1.CONDUCTED OUTPUT POWER

GSM 850:

GSM 850		
Mode	Frequency (MHz)	AVG Power(dBm)
GSM (GMSK,1-Slot)	824.2	**32.90**
	836.6	32.85
	848.8	32.86
GPRS (GMSK,1-Slot)	824.2	28.70
	836.6	28.57
	848.8	28.61
GPRS (GMSK,2-Slot)	824.2	28.22
	836.6	28.14
	848.8	28.13
GPRS (GMSK,3-Slot)	824.2	27.72
	836.6	27.65
	848.8	27.66
GPRS (GMSK,4-Slot)	824.2	27.26
	836.6	27.24
	848.8	27.20
EGPRS (8PSK,1-Slot)	824.2	28.71
	836.6	28.60
	848.8	28.63
EGPRS (8PSK,2-Slot)	824.2	27.99
	836.6	27.84
	848.8	27.90
EGPRS (8PSK,3-Slot)	824.2	27.23
	836.6	27.07
	848.8	27.11
EGPRS (8PSK,4-Slot)	824.2	26.50
	836.6	26.30
	848.8	26.40

PCS 1900:

PCS 1900		
Mode	Frequency (MHz)	AVG Power(dBm)
GSM (GMSK,1-Slot)	1850.2	30.37
	1880.0	**30.40**
	1909.8	30.35
GPRS (GMSK,1-Slot)	1850.2	26.10
	1880.0	26.31
	1909.8	26.32
GPRS (GMSK,2-Slot)	1850.2	25.67
	1880.0	25.89
	1909.8	25.91
GPRS (GMSK,3-Slot)	1850.2	25.18
	1880.0	25.41
	1909.8	25.47
GPRS (GMSK,4-Slot)	1850.2	24.73
	1880.0	24.99
	1909.8	25.01
EGPRS (8PSK,1-Slot)	1850.2	26.28
	1880.0	26.32
	1909.8	26.10
EGPRS (8PSK,2-Slot)	1850.2	25.58
	1880.0	25.59
	1909.8	25.35
EGPRS (8PSK,3-Slot)	1850.2	24.81
	1880.0	24.84
	1909.8	24.60
EGPRS (8PSK,4-Slot)	1850.2	24.07
	1880.0	24.10
	1909.8	23.83

UMTS BAND V

UMTS BAND V		
Mode	Frequency(MHz)	AVG Power
WCDMA 850 RMC	826.4	**21.54**
	836.6	21.23
	846.6	21.14
HSDPA Subtest 1	826.4	20.96
	836.6	21.14
	846.6	20.99
HSDPA Subtest 2	826.4	20.52
	836.6	20.69
	846.6	20.57
HSDPA Subtest 3	826.4	20.15
	836.6	20.22
	846.6	20.09
HSDPA Subtest 4	826.4	19.79
	836.6	19.83
	846.6	19.79
HSUPA Subtest 1	826.4	20.93
	836.6	21.06
	846.6	20.54
HSUPA Subtest 2	826.4	20.04
	836.6	20.12
	846.6	19.58
HSUPA Subtest 3	826.4	20.03
	836.6	19.66
	846.6	19.13
HSUPA Subtest 4	826.4	19.68
	836.6	19.32
	846.6	18.68
HSUPA Subtest 5	826.4	18.20
	836.6	17.87
	846.6	17.28

UMTS BAND II

UMTS BAND II		
Mode	Frequency(MHz)	AVG Power
WCDMA 1900 RMC	1852.4	**22.04**
	1880	21.74
	1907.6	21.75
HSDPA Subtest 1	1852.4	19.62
	1880	19.77
	1907.6	19.85
HSDPA Subtest 2	1852.4	19.13
	1880	19.28
	1907.6	19.36
HSDPA Subtest 3	1852.4	18.77
	1880	18.82
	1907.6	18.91
HSDPA Subtest 4	1852.4	18.40
	1880	18.40
	1907.6	18.42
HSUPA Subtest 1	1852.4	19.61
	1880	19.73
	1907.6	19.41
HSUPA Subtest 2	1852.4	18.75
	1880	18.74
	1907.6	18.51
HSUPA Subtest 3	1852.4	18.68
	1880	18.28
	1907.6	18.07
HSUPA Subtest 4	1852.4	18.20
	1880	17.88
	1907.6	17.67
HSUPA Subtest 5	1852.4	16.77
	1880	16.40
	1907.6	16.17

CDMA BC0

Mode	Frequency(MHz)	AVG Power
CDMA BC0	824.7	24.03
	836.52	**24.22**
	848.31	24.19
EVDO BC0	824.7	23.89
	836.52	24.16
	848.31	23.97

CDMA BC1

CDMA BC1		
Mode	Frequency(MHz)	AVG Power
CDMA BC1	1851.25	**24.19**
	1880	23.68
	1908.75	23.85
EVDO BC1	1851.25	23.94
	1880	23.78
	1908.75	23.82

A2. PEAK-TO-AVERAGE RADIO

GSM 850		
Mode	Frequency (MHz)	PAR
GSM 850	824.2	0.22
	836.6	0.24
	848.8	0.26
GPRS 850	824.2	0.28
	836.6	0.29
	848.8	0.31
EGPRS 850	824.2	0.27
	836.6	0.30
	848.8	0.34

PCS 1900		
Mode	Frequency (MHz)	PAR
PCS1900	1850.2	0.33
	1880	0.37
	1909.8	0.46
GPRS1900	1850.2	0.47
	1880	0.51
	1909.8	0.57
EGPRS1900	1850.2	0.46
	1880	0.52
	1909.8	0.57

UMTS Band II		
Mode	Frequency (MHz)	PAR
WCDMA 1900 RMC	1852.4	2.85
	1880	3.13
	1907.6	3.11
HSDPA 1900	1852.4	3.20
	1880	3.27
	1907.6	3.27
HSUPA 1900	1852.4	3.18
	1880	3.25
	1907.6	3.20

UMTS Band V		
Mode	Frequency (MHz)	PAR
WCDMA 850 RMC	826.4	2.91
	836.6	2.64
	846.6	3.08
HSDPA 850	826.4	3.17
	836.6	3.18
	846.6	3.35
HSUPA 850	826.4	3.25
	836.6	3.33
	846.6	3.41

CDMA BC0		
Mode	Frequency (MHz)	PAR
CDMA BC0	824.7	2.69
	836.52	2.21
	848.31	3.42
EVDO BC0	824.7	3.14
	836.52	2.54
	848.31	3.42

CDMA BC1		
Mode	Frequency (MHz)	PAR
CDMA BC1	1851.25	3.02
	1880	2.54
	1908.75	3.42
EVDO BC1	1851.25	3.14
	1880	2.54
	1908.75	3.42

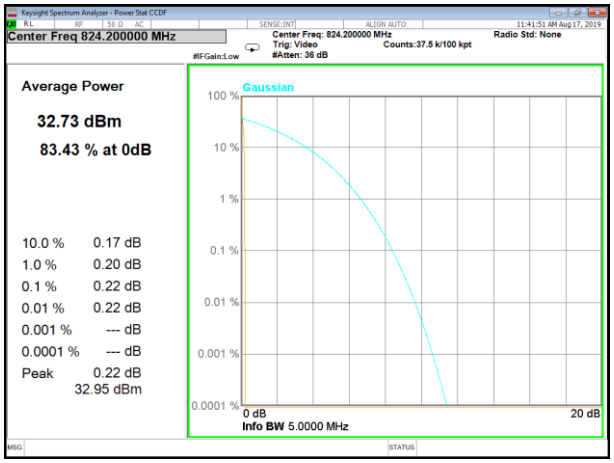

GSM850_QPSK_Lower

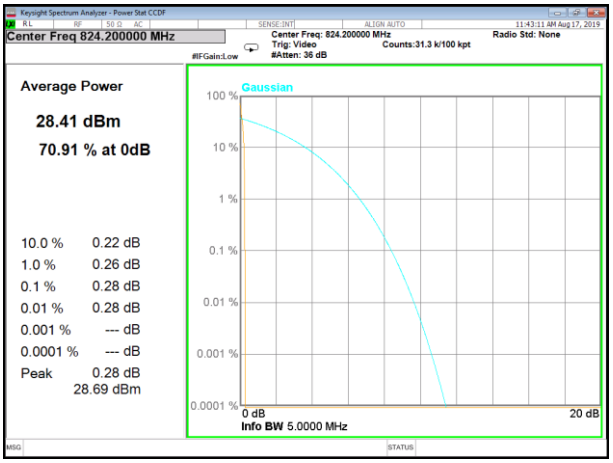

GPRS850_QPSK_Lower

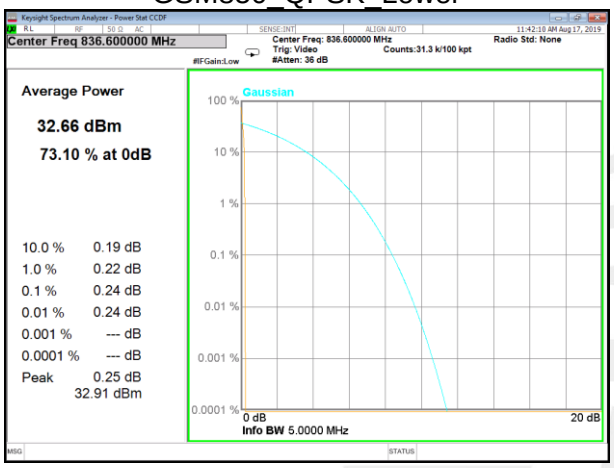

GSM850_QPSK_Middle

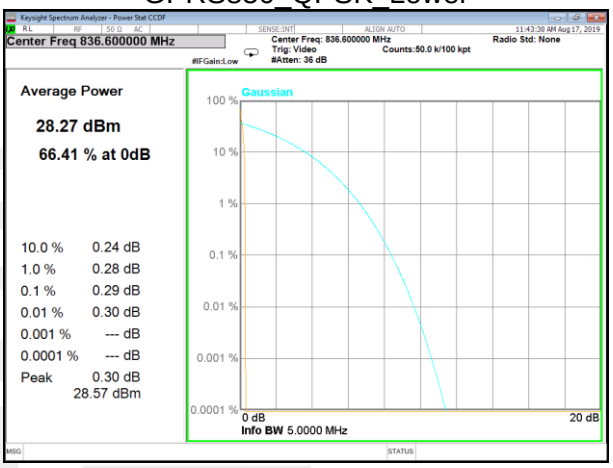

GPRS850_QPSK_Middle

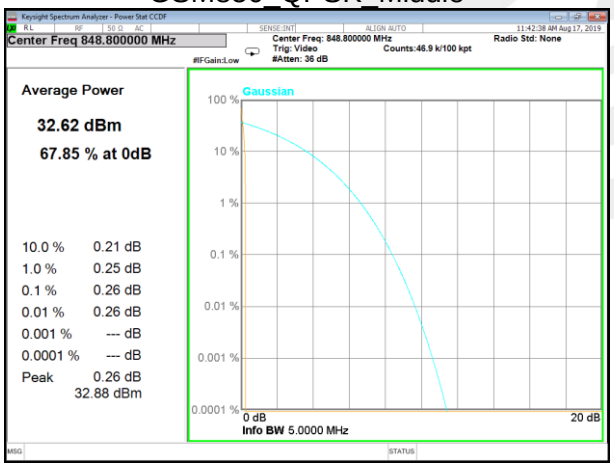

GSM850_QPSK_Higher_

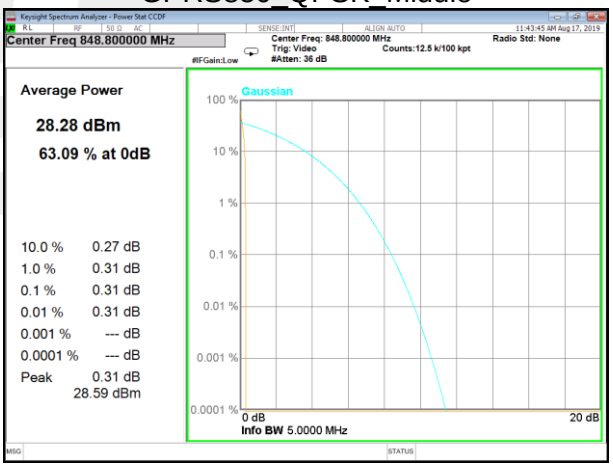

GPRS850_QPSK_Higher_

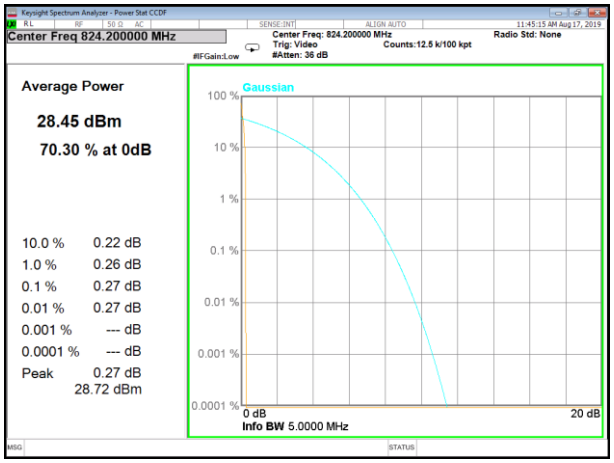

EGPRS850_QPSK_Lower

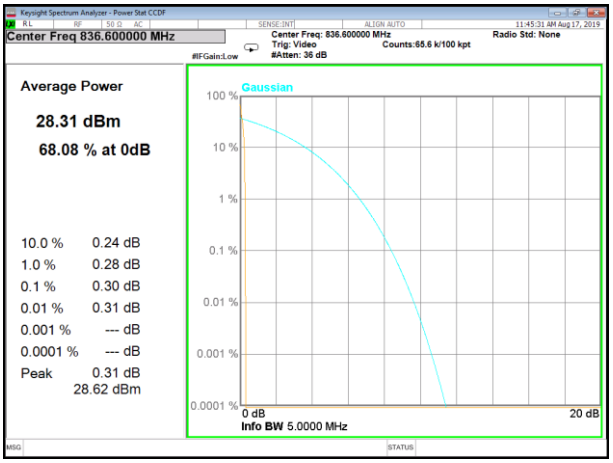

EGPRS850_QPSK_Middle

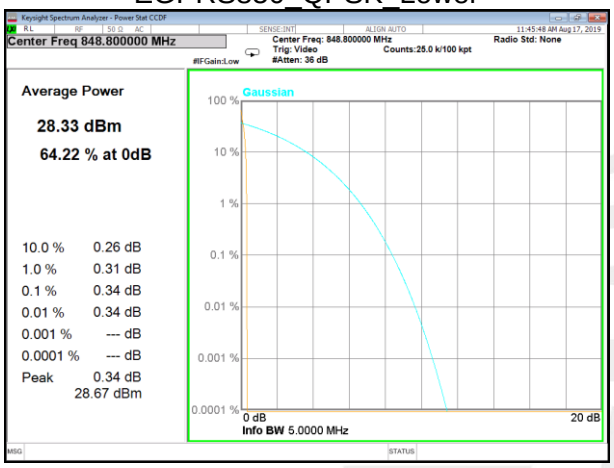

EGPRS850_QPSK_Higher

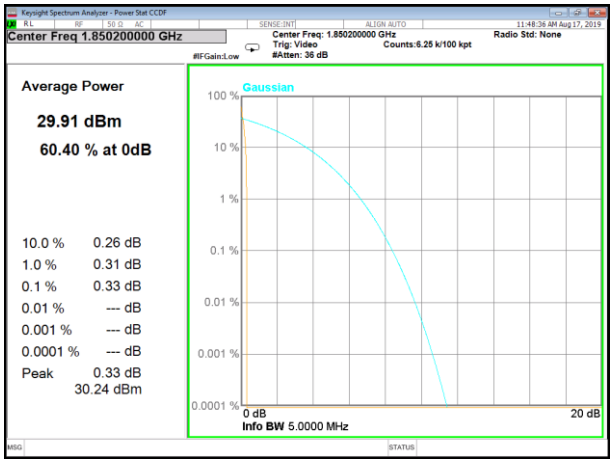

GSM1900_QPSK_Lower

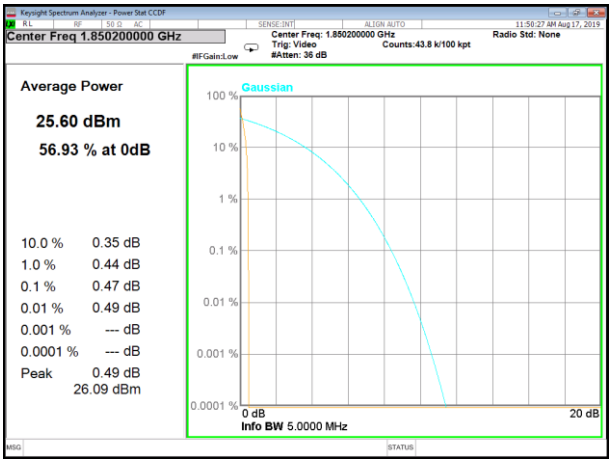

GPRS1900_QPSK_Lower

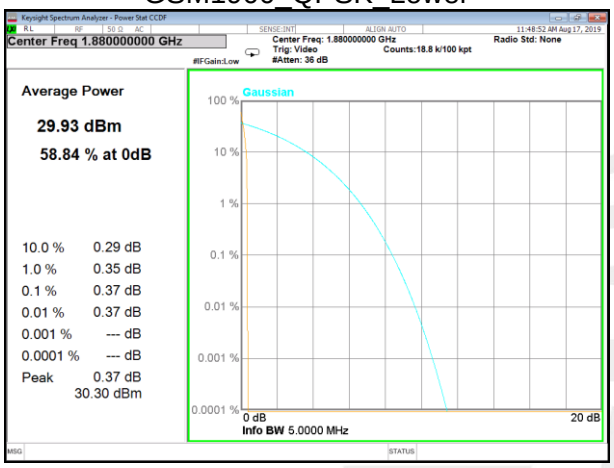

GSM1900_QPSK_Middle

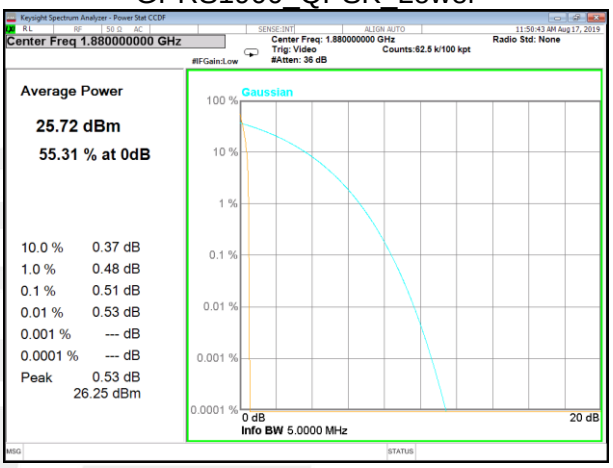

GPRS1900_QPSK_Middle

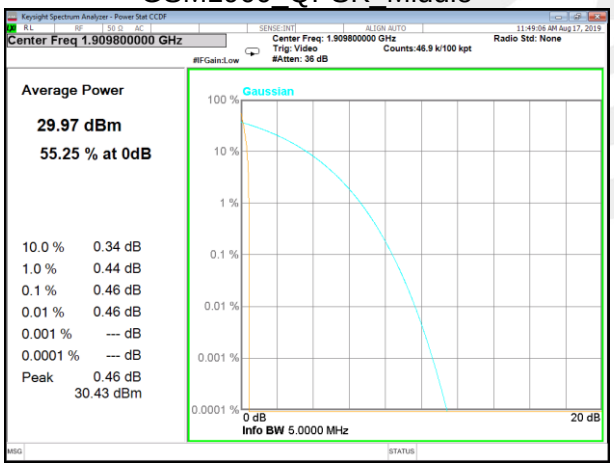

GSM1900_QPSK_Higher

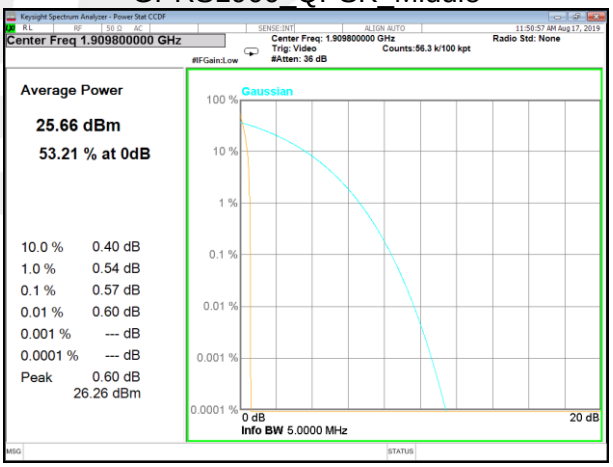

GPRS1900_QPSK_Higher

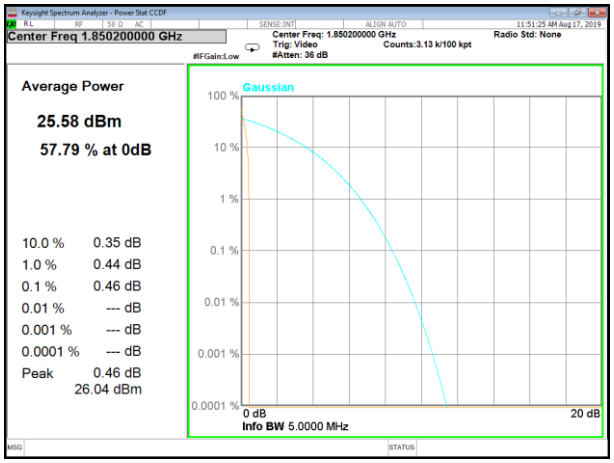

EGPRS1900_QPSK_Lower_

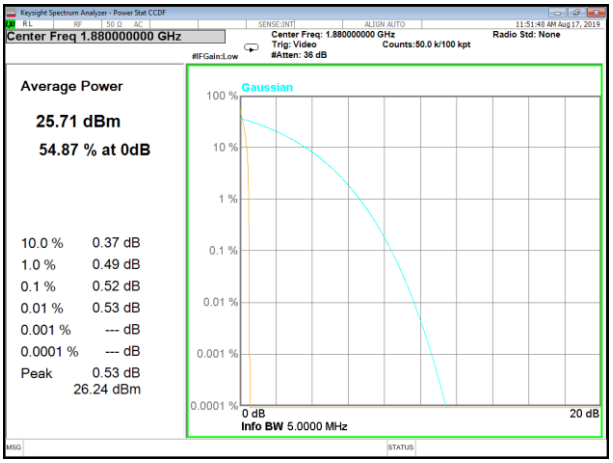

EGPRS1900_QPSK_Middle_

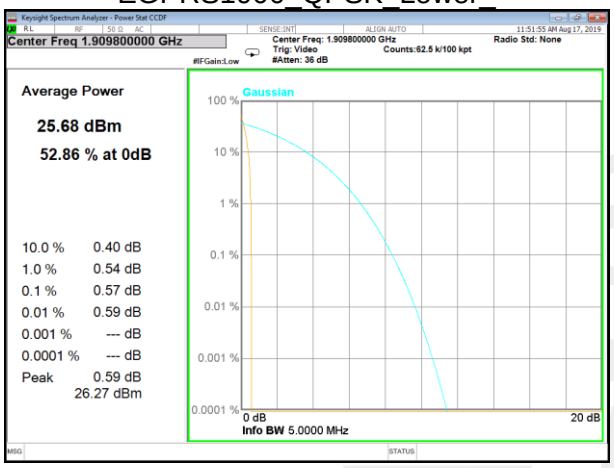

EGPRS1900_QPSK_Higher_

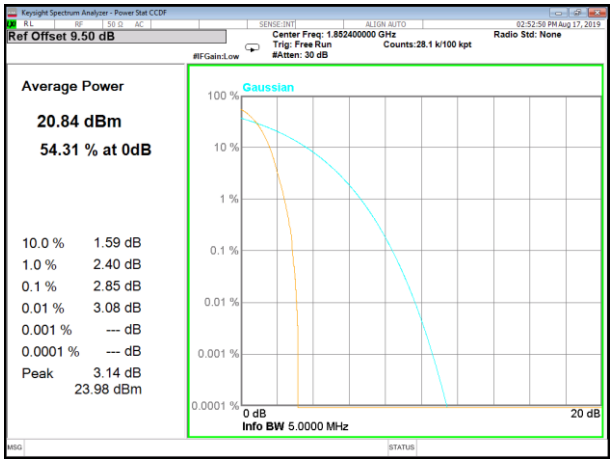

WCDMA2_QPSK_Lower

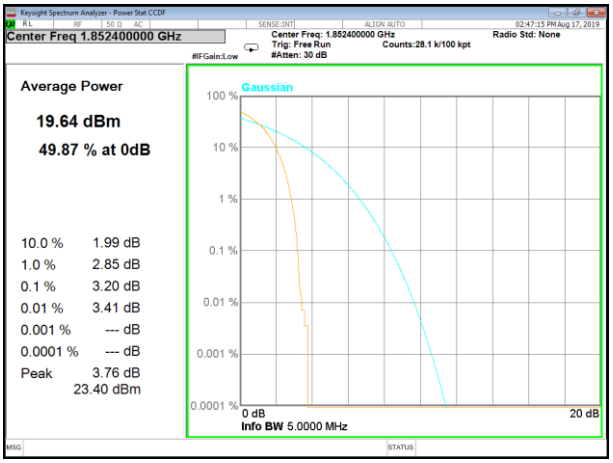

HSDPA2_QPSK_Lower

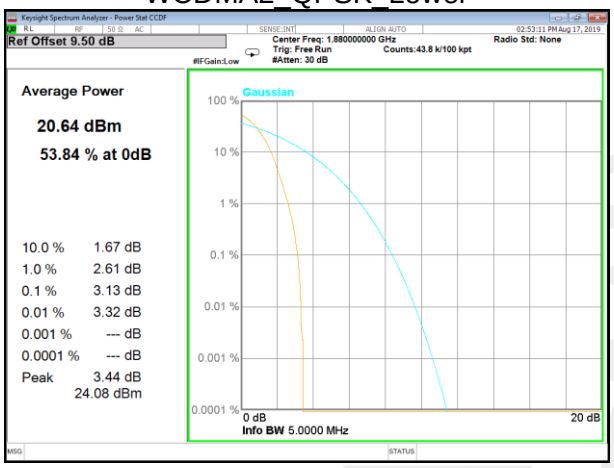

WCDMA2_QPSK_Middle

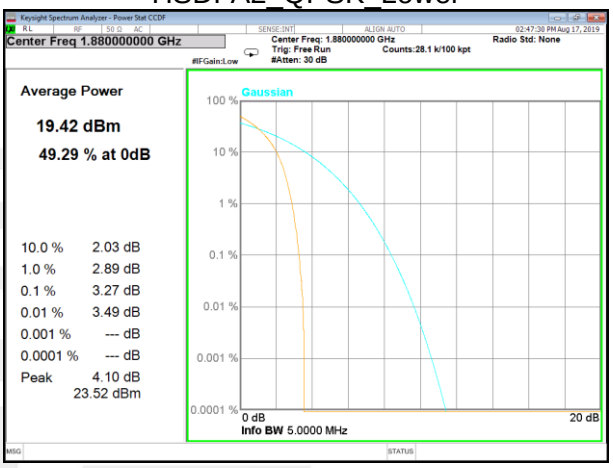

HSDPA2_QPSK_Middle

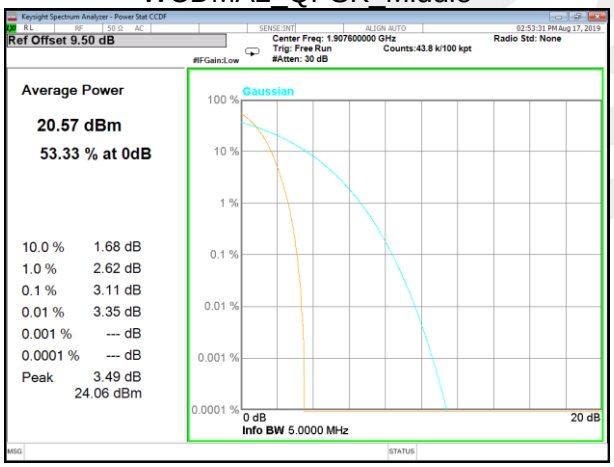

WCDMA2_QPSK_Higher_

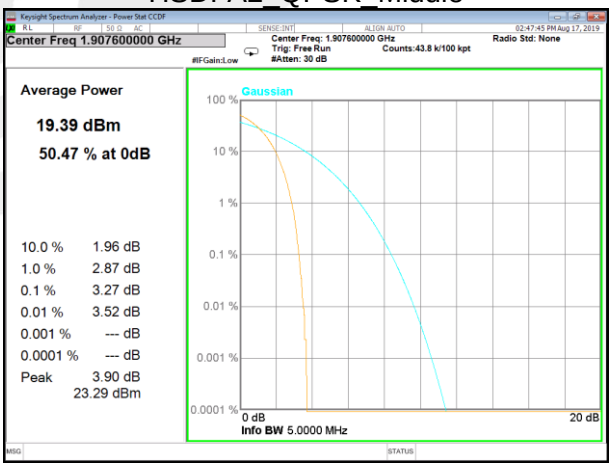

HSDPA2_QPSK_Higher_

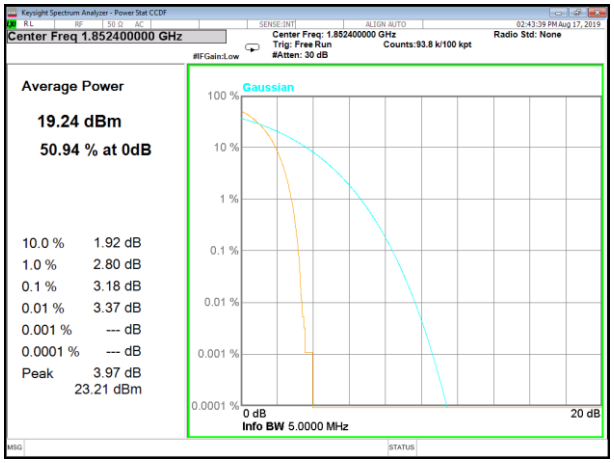

HSUPA2_QPSK_Lower_

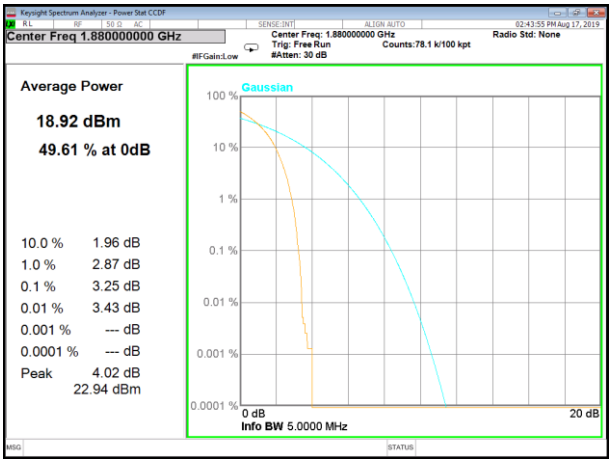

HSUPA2_QPSK_Middle_

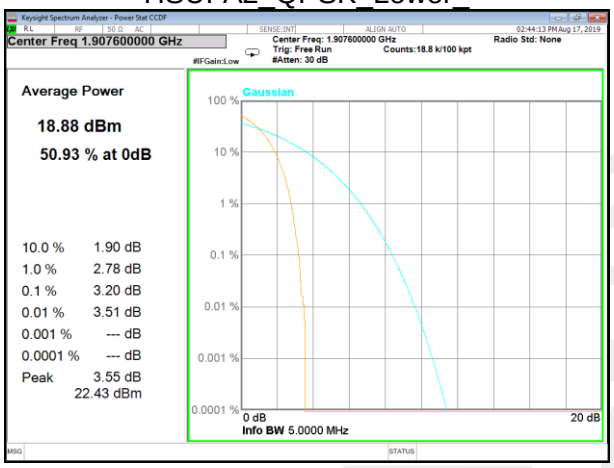

HSUPA2_QPSK_Higher_

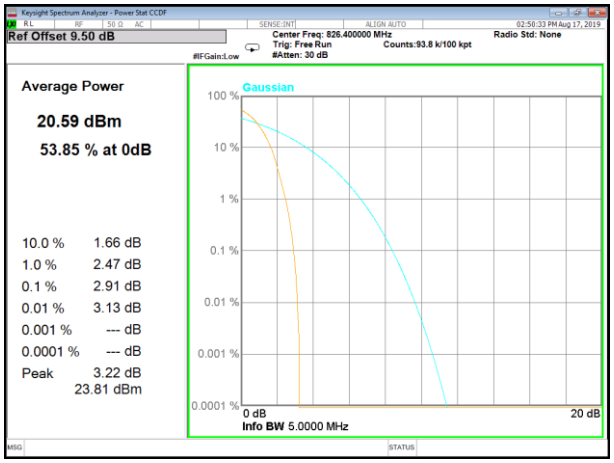

WCDMA5_QPSK_Lower_

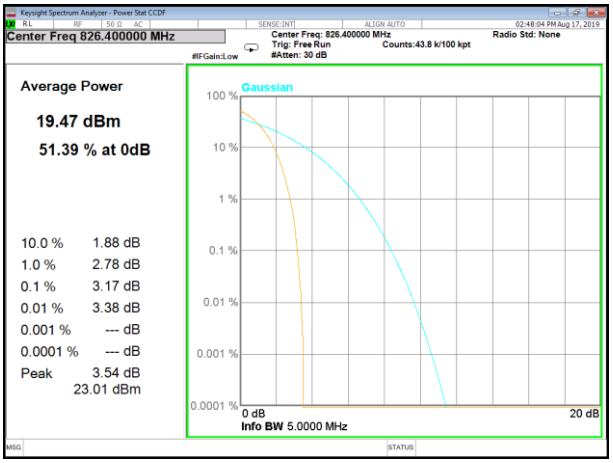

HSDPA5_QPSK_Lower_

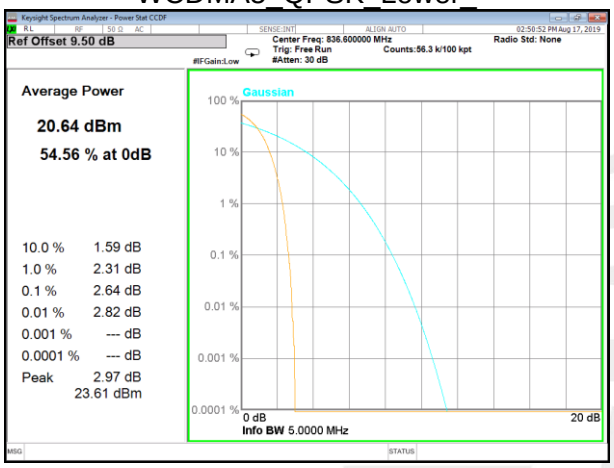

WCDMA5_QPSK_Middle_

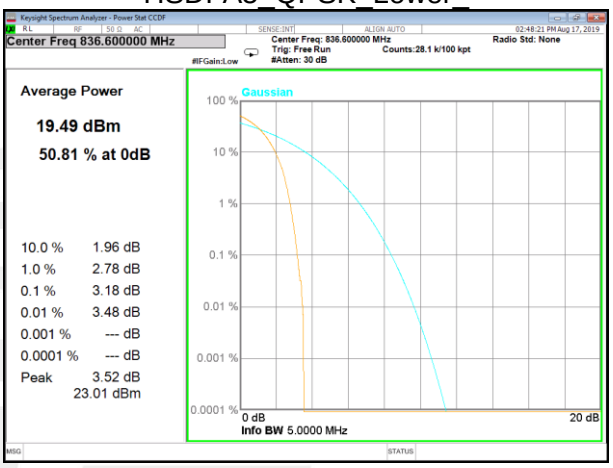

HSDPA5_QPSK_Middle_

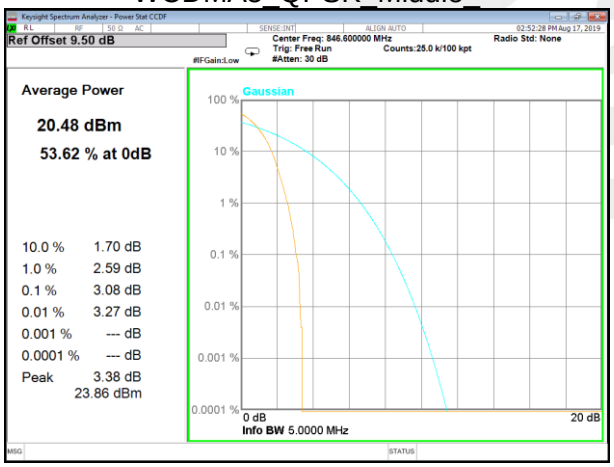

WCDMA5_QPSK_Higher_

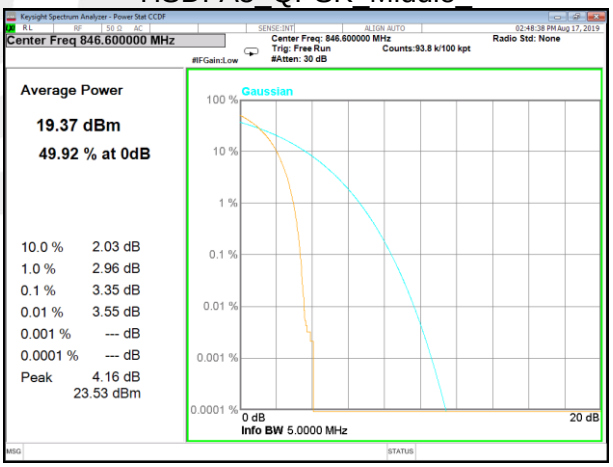

HSDPA5_QPSK_Higher_

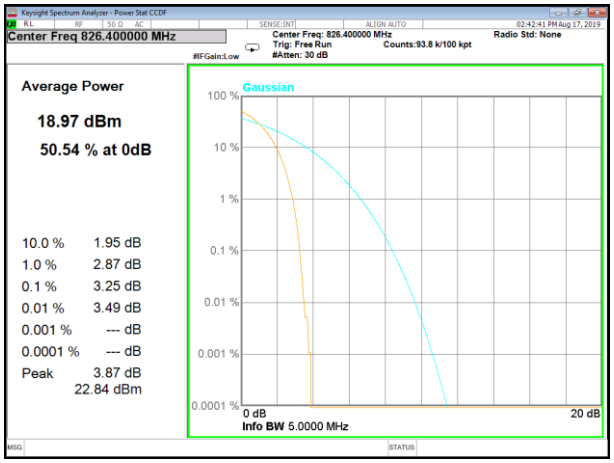

HSUPA5_QPSK_Lower_

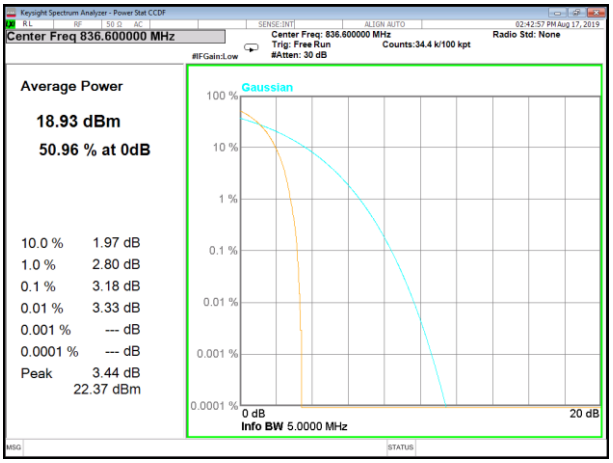

HSUPA5_QPSK_Middle_

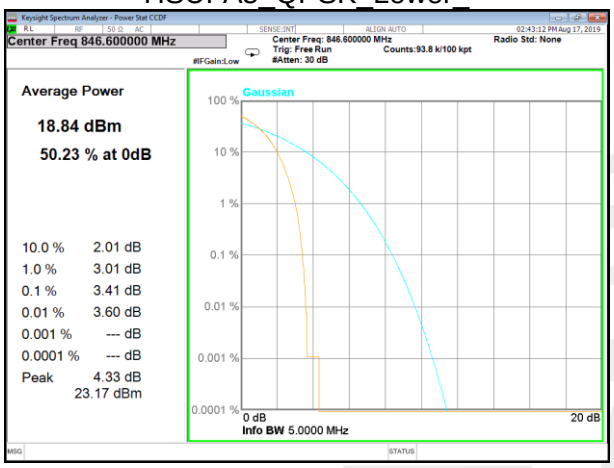

HSUPA5_QPSK_Higher_