



UHF Dynamic Handheld Wireless Microphone

User Manual

PDWM95

Unique Features:

- 16 Selectable UHF Channels
- Studio-Quality Vocal Clarity
- Removable & Rechargeable Battery (3.7V Lithium)
- USB-C Charging for Receiver and Microphone

Features:

- Anti-Interference Technology
- Portable Design
- Digital Display with Channel Selection
- Integrated Long-Range Antenna
- Simple Plug-and-Play Setup
- Color-Coded LED Ring (Green/On, Red/Mute)
- Includes Plug-in Audio Receiver (1/4" Jack)
- Built-in Acoustic Pop Filter
- Ultra-Wide Frequency Response
- Noise-Eliminating SMT Technology
- Durable Steel Mesh Grill Construction
- Ideal for Stage, Studio, Home Karaoke, Classroom and Business Use
- Connects Directly to Amplifiers, Stereos, Audio Processors, DJ Mixers

What's in the Box:

- (1) Receiver
- (1) Microphone
- (1) USB-C to USB Charging Cable
- (2) 18650 Battery (one for the microphone, one for the receiver)
- (1) Black Foam Windscreen



Visit Our Website



SCAN ME
PyleUSA.com

Technical Specs:

- Construction Material: ABS Plastic
- Wireless Operation: UHF Band Transmitter
- Microphone Element/Type: Dynamic
- Pickup/Polar Pattern: Uni-Directional
- Wireless Operating Range: Up to 165 ft.
- Receiver Connector Type: 1/4 Inch (6.3mm)
- Receiving Sensitivity: -95 dBm
- S/N Ratio: 96 dB
- Distortion: < 0.1%
- Modulation Mode: FM
- Output Power: 10mW
- Harmonic Radiation: < 50 dBc
- Receiver Working Current: < 100 mA
- Receiver Rechargeable Battery: 3.7V Li-ion, 800mAh - 2.96 Wh - 29.6g
- Power Supply: USB, DC 5V
- Mic/Receiver Battery Life: 6 Hours
- Battery Operated Microphone, Requires (1) x '18650 Battery' (Included)
- Battery Operated Receiver, Requires (1) x '18650 Battery' (Included)
- Battery Construction Material: Steel
- Milliamp Hours (mAh): 800mAh
- Item Weight: 0.84 lbs.
- Handheld Mic Dimensions (L x W x H): 9.53 x 2.09 x 2.09 Inches

California Prop 65 Warning



This product may expose you to chemicals, which is known to the state of California to cause cancer, birth defects and other reproductive harm. Do not ingest.

For more info go to: www.P65warnings.ca.gov




Questions? Comments?

We are here to help!

Phone: (1) 718-535-1800

PyleUSA.com/ContactUs

Receiver and Transmitter Overview

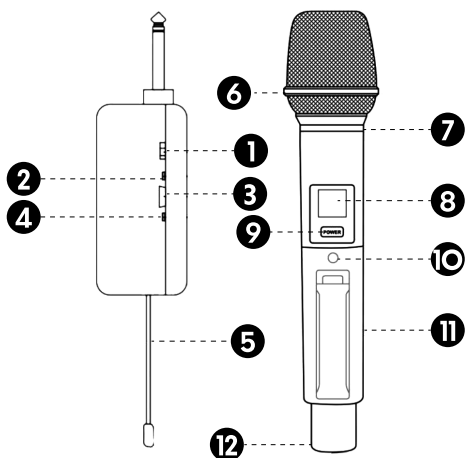

1. ON/OFF Switch
2. LED Indicator (Power/Charging)
3. DC 5V USB-C Charging Port1
4. RF LED Indicator
5. Antenna
6. Mesh Grill Cap
7. LED Light Ring (ON = Green, MUTE = Red)
8. Frequency Display
9. Power Button (ON/OFF/MUTE)
10. Frequency Selection Button
11. Battery Compartment
12. DC 5V USB-C Charging Port

How to Use

1. Install the 18650 lithium battery into the receiver or microphone. Make sure the "+" and "-" polarity is correct.
2. Turn the ON/OFF switch (1) to ON. The power LED will light up.
3. Plug the 1/4 in. (6.3 mm) jack into the audio input of your audio equipment.

Register Product

Thank you for choosing PyleUSA. By registering your product, you ensure that you receive the full benefits of our exclusive warranty and personalized customer support. Complete the form to access expert support and to keep your PyleUSA purchase in perfect condition.

4. Turn ON the microphone using the Power Button (9). The display will light up, and the light ring will turn green.
5. Short press the Power Button (9) to mute the microphone. The light ring will turn red.
6. Press and hold the Power Button (9) to turn the system ON or OFF.
7. When the battery is low, use the USB-C charging cable to recharge the unit.

Important Notes

- Noise or distortion may be caused by a low battery. Recharge if needed.
- Always turn OFF the system after use.
- Remove the batteries if the system will not be used for a long time.

Frequency Adjustment

The system is factory-preset and ready to use. Frequency adjustment is usually not required. To change the frequency, press the Frequency Selection Button (10) on the transmitter.

Frequency Matching (If Multiple Systems Are Used)

1. Turn OFF both the transmitter and receiver.
2. On the transmitter, press and hold the Power Button (9) and Frequency Selection Button (10) at the same time for about 4 seconds until the display blinks.
3. Turn ON the receiver. The RF LED will flash four times.
4. Short press the Frequency Selection Button (10) to complete matching.

Start Here



Model Number:
PDWM95

PyleUSA.com/pages/register

Get Into It!

FCC Statement

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: 1) this device may not cause harmful interference, and 2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Radiation Exposure Statement

This device complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. The device can be used in portable exposure condition without restriction.