FCC RF Test Report

APPLICANT	:	vivo Mobile Communication Co., Ltd.
EQUIPMENT	:	Mobile Phone
BRAND NAME	:	vivo
MODEL NAME	:	V2553
FCC ID	:	2AUCY-V2553
STANDARD	:	FCC Part 15 Subpart E §15.407
CLASSIFICATION	:	(NII) Unlicensed National Information Infrastructure
TEST DATE(S)	:	Dec. 21, 2025 ~ Jan. 06, 2026

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Fly Liang

Approved by: Fly Liang

ACCREDITED
Cert #5145.01

Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China

TABLE OF CONTENTS

REVISION HISTORY **3**

SUMMARY OF TEST RESULT **4**

1 GENERAL DESCRIPTION **5**

1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test 5
1.4 Product Specification of Equipment Under Test 6
1.5 Modification of EUT 7
1.6 Testing Location 7
1.7 Test Software 7
1.8 Applicable Standards 8

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST **9**

2.1 Carrier Frequency and Channel 9
2.2 Test Mode 10
2.3 Connection Diagram of Test System 12
2.4 Support Unit used in test configuration and system 13
2.5 EUT Operation Test Setup 13
2.6 Measurement Results Explanation Example 13

3 TEST RESULT **14**

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement 14
3.2 Maximum Conducted Output Power Measurement 19
3.3 Power Spectral Density Measurement 21
3.4 Unwanted Emissions Measurement 25
3.5 AC Conducted Emission Measurement 30
3.6 Antenna Requirements 32

4 LIST OF MEASURING EQUIPMENT **33**

5 MEASUREMENT UNCERTAINTY **34**

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR5N1402D	Rev. 01	Initial issue of report	Jan. 26, 2026

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	-	6dB Bandwidth > 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm/MHz	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) &15.209(a)	Pass	Under limit 4.42 dB at 5146.05 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass	Under limit 14.09 dB at 0.490 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	15.203 & 15.407(a)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section “Measurement Uncertainty”

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

vivo Mobile Communication Co., Ltd.
No.1, vivo Road, Chang'an, Dongguan, Guangdong, China

1.2 Manufacturer

vivo Mobile Communication Co., Ltd.
No.1, vivo Road, Chang'an, Dongguan, Guangdong, China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	vivo
Model Name	V2553
FCC ID	2AUCY-V2553
IMEI Code	Conducted: 864005071998672/864005071998664 Conduction: 864005071997930/864005071997922 Radiation: 864005071997856/864005071997849
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz
Maximum Output Power to Antenna	**<5180 MHz ~ 5240 MHz>** 802.11a : 18.22 dBm / 0.0664 W 802.11n HT20 : 18.05 dBm / 0.0638 W 802.11n HT40 : 17.83 dBm / 0.0607 W 802.11ac VHT20: 17.54 dBm / 0.0568 W 802.11ac VHT40: 17.27 dBm / 0.0533 W 802.11ac VHT80: 9.20 dBm / 0.0083 W **<5260 MHz ~ 5320 MHz>** 802.11a : 16.30 dBm / 0.0427 W 802.11n HT20 : 16.57 dBm / 0.0454 W 802.11n HT40 : 17.65 dBm / 0.0582 W 802.11ac VHT20: 16.53 dBm / 0.0450 W 802.11ac VHT40: 17.22 dBm / 0.0527 W 802.11ac VHT80: 9.37 dBm / 0.0086 W **<5500 MHz ~ 5720 MHz >** 802.11a : 16.50 dBm / 0.0447 W 802.11n HT20 : 16.36 dBm / 0.0433 W 802.11n HT40 : 17.52 dBm / 0.0565 W 802.11ac VHT20: 16.30 dBm / 0.0427 W 802.11ac VHT40: 17.12 dBm / 0.0515 W 802.11ac VHT80: 16.63 dBm / 0.0460 W **<5745 MHz ~ 5825 MHz>** 802.11a : 18.11 dBm / 0.0647 W 802.11n HT20 : 17.71 dBm / 0.0514 W 802.11n HT40 : 17.65 dBm / 0.0582 W 802.11ac VHT20: 17.28 dBm / 0.0535 W 802.11ac VHT40: 17.09 dBm / 0.0512 W 802.11ac VHT80: 14.09 dBm / 0.0256 W
99% Occupied Bandwidth	**<5180 MHz ~ 5240 MHz>** 802.11a : 17.17 MHz 802.11n HT20 : 18.01 MHz 802.11n HT40 : 36.43 MHz 802.11ac VHT80 : 75.17 MHz **<5260 MHz ~ 5320 MHz>** 802.11a : 16.77 MHz 802.11n HT20 : 17.81 MHz 802.11n HT40 : 36.43 MHz 802.11ac VHT80 : 75.10 MHz **<5500 MHz ~ 5720 MHz>** 802.11a : 16.89 MHz 802.11n HT20 : 17.81 MHz 802.11n HT40 : 36.60 MHz 802.11ac VHT80 : 75.30 MHz **<5745 MHz ~ 5825 MHz>** 802.11a : 16.94 MHz 802.11n HT20 : 17.95 MHz 802.11n HT40 : 36.40 MHz 802.11ac VHT80 : 75.20 MHz

Antenna Type / Gain	**<5180 MHz ~ 5240 MHz>** IFA Antenna with gain 0.38 dBi **<5260 MHz ~ 5320 MHz>** IFA Antenna with gain 0.29 dBi **<5500 MHz ~ 5720 MHz>** IFA Antenna with gain -0.47 dBi **<5745 MHz ~ 5825 MHz>** IFA Antenna with gain -0.22 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)

Note: For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing has assessed only 802.11n HT20/ HT40 by referring to their higher conducted power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	**Sporton Site No.**	**FCC Designation No.**	**FCC Test Firm Registration No.**
	TH01-SZ CO02-SZ, 03CH01-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24
2.	CO02-SZ	AUDIX	E3	6.120613b

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ANSI C63.10-2020

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X/Y plane) were recorded in this report.

b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42#	5210	-	-

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58#	5290	-	-

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5500-5720MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106#	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155#	5775	165	5825

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122#	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138#	5690	144	5720
	142*	5710	-	-

Note:

1. The above Frequency and Channel in "*" are 40MHz bandwidth.
2. The above Frequency and Channel in "#" are 80MHz bandwidth.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	**6 Mbps**
802.11n HT20	**MCS0**
802.11n HT40	**MCS0**
802.11ac VHT80	**MCS0**

AC Conducted Emission	Mode 1 : GSM850 Idle + Bluetooth Link + WLAN(5G)Link + USB Cable (Charging from Adapter 1) + Earphone
Remark: For Radiated Test Cases, The tests were performance with Adapter1, Earphone and USB Cable.	

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		20M BW	20M BW	20M BW	20M BW
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		40M BW	40M BW	40M BW	40M BW
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159
Straddle		-	-	142	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		80M BW	80M BW	80M BW	80M BW
L	Low	-	-	106	-
M	Middle	42	58	-	155
H	High	-	-	122	-
Straddle		-	-	138	-

2.3 Connection Diagram of Test System

AC Conducted Emission:

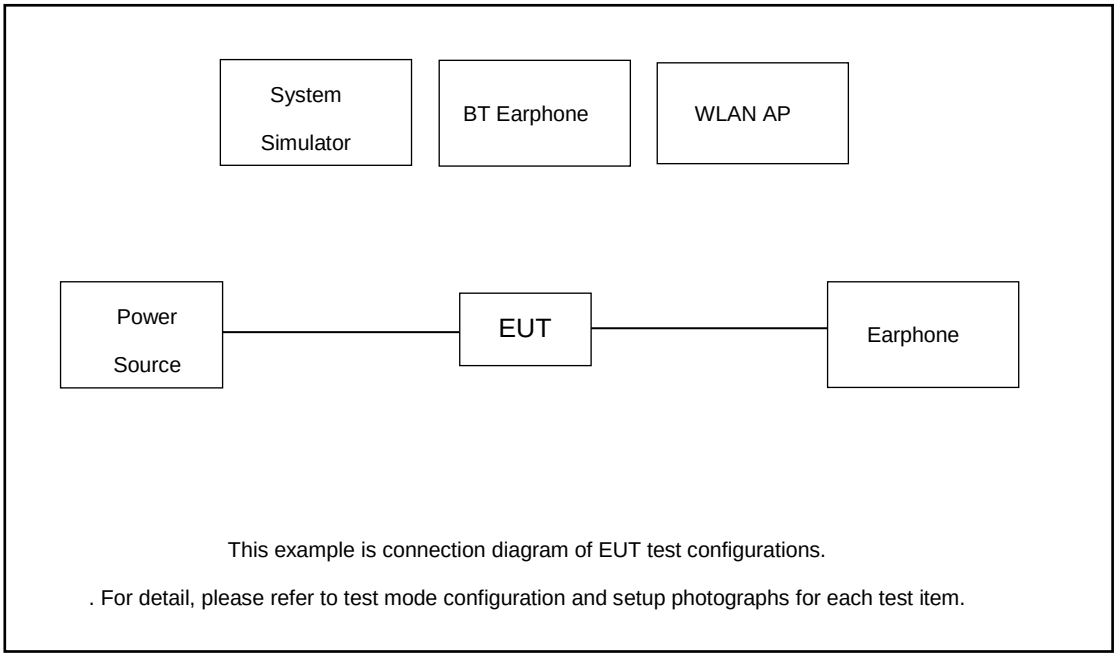

Radiated Emission:

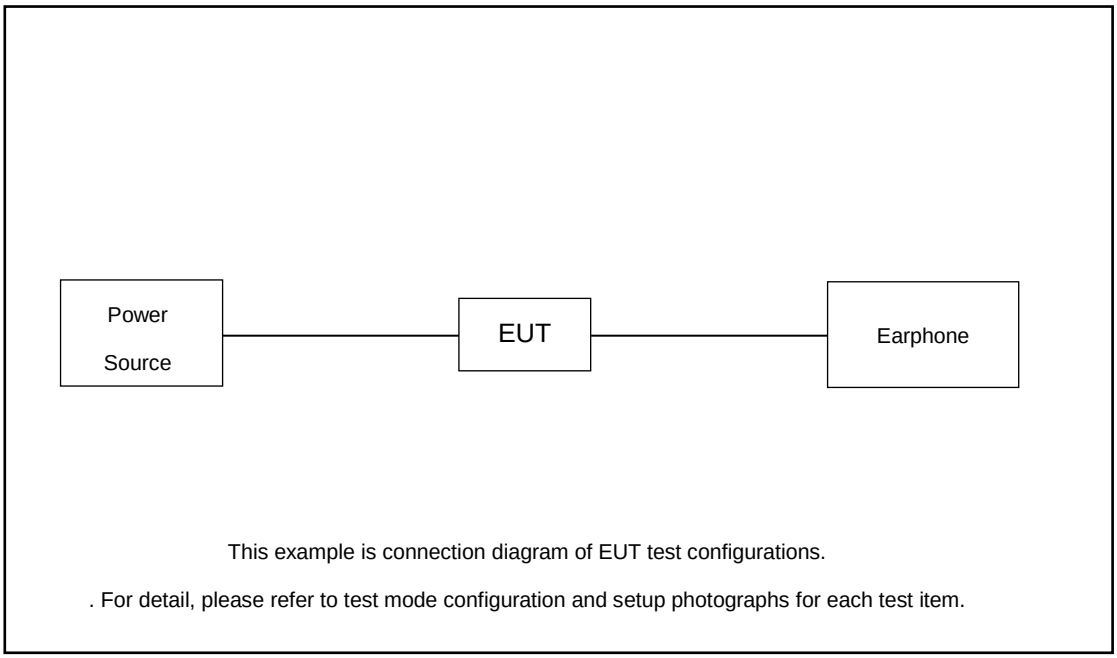

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
3.	Earphone	N/A	N/A	N/A	N/A	N/A
4.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.8 dB and 10dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 2.8 + 10 = 12.8 (dB)

3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01 & ANSI C63.10-2020 clause 12.5.1 for 6dB BW and 12.5.2 for 26dB BW and 6.9.3 for 99% occupied bandwidth measurements.

☒	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	1. Set RBW = shall be in the range of 1% to 5% of the emission bandwidth. **2.** Set the VBW > RBW. **3.** Detector = Peak. **4.** Trace mode = max hold **5.** Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%. **6.** For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW. **7.** Measure and record the results in the test report.
☒	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	1. Set RBW = 100 kHz. **2.** Set the VBW ≥ 3 x RBW. **3.** Detector = Peak. **4.** Trace mode = max hold **5.** Measure the maximum width of the emission that is 6 dB down from the peak of the emission. **6.** Measure and record the results in the test report.

3.1.4 Test Setup

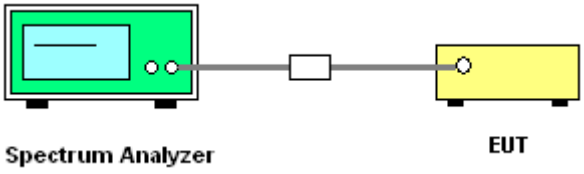

3.1.5 Test Result of 6dB and 26dB and 99% Occupied Bandwidth

Please refer to Appendix A.

Minimum 6dB Bandwidth

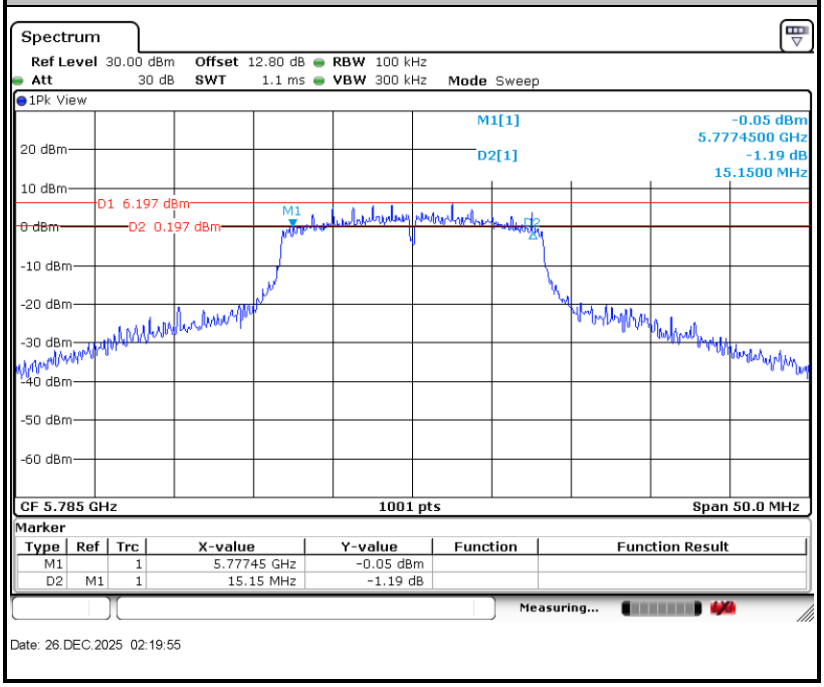

Maximum 26dB Bandwidth for 20M BW

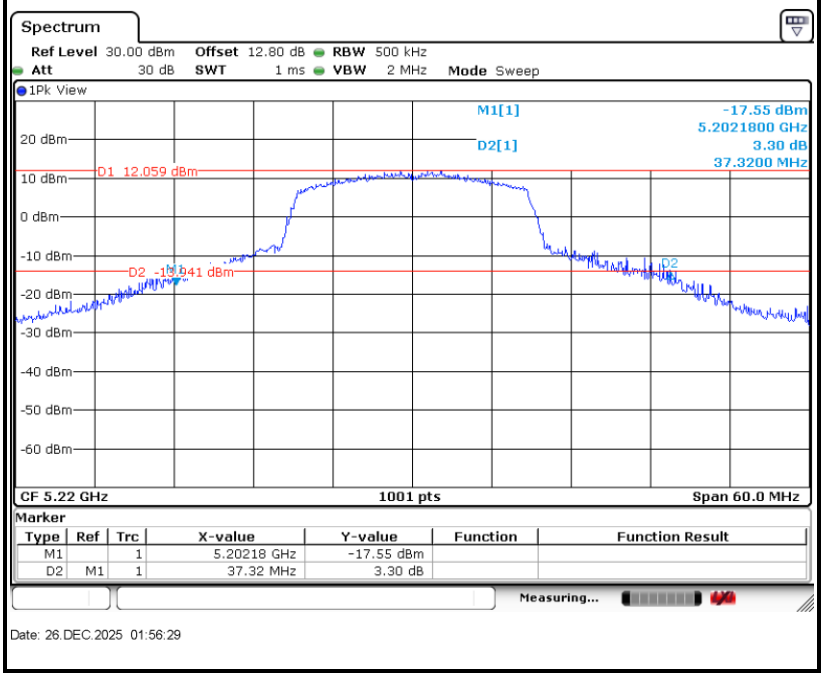

Maximum 26dB Bandwidth for 40M BW

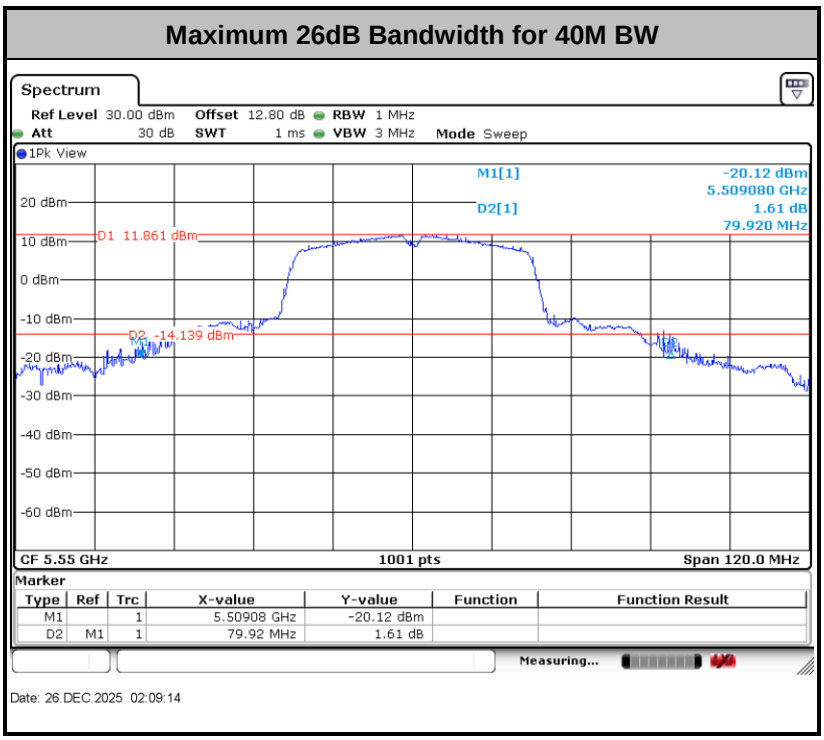

Maximum 26dB Bandwidth for 80M BW

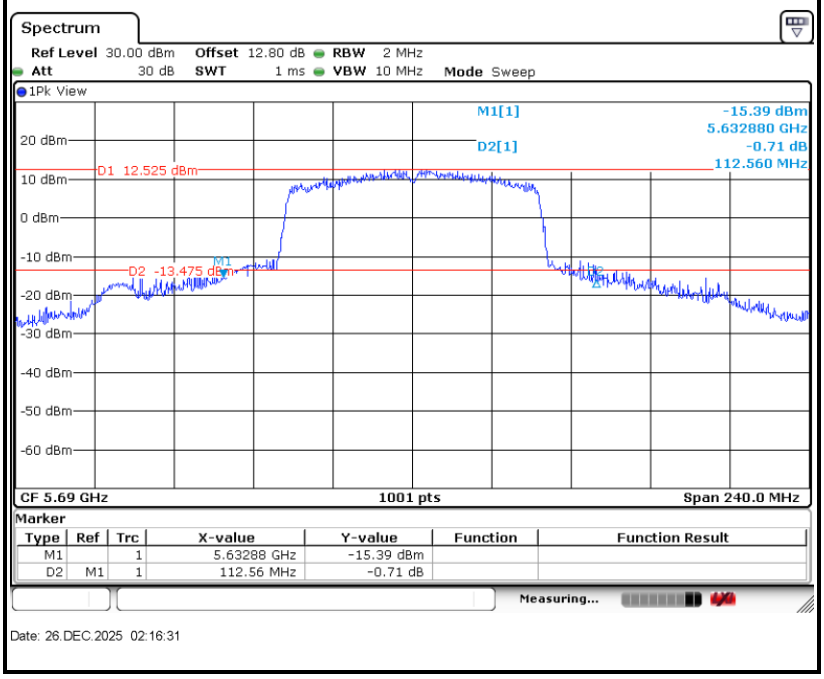

Maximum 99% Occupied Bandwidth for 20M BW

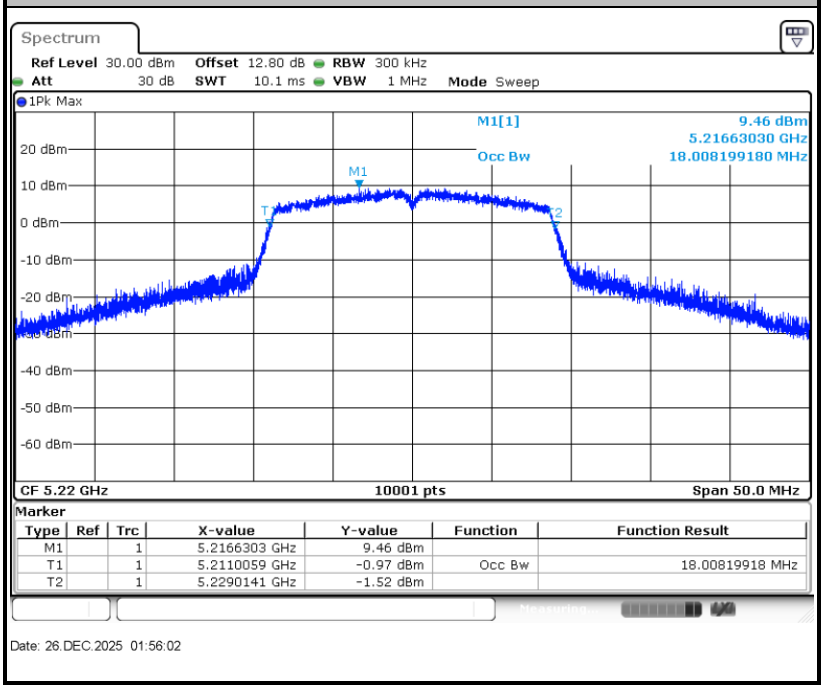

Maximum 99% Occupied Bandwidth for 40M BW

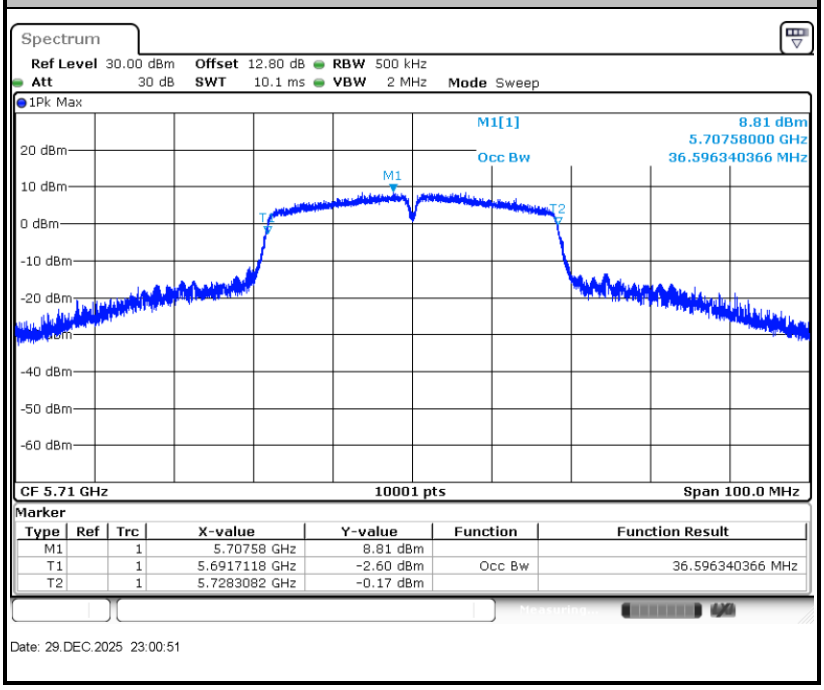

Maximum 99% Occupied Bandwidth for 80M BW

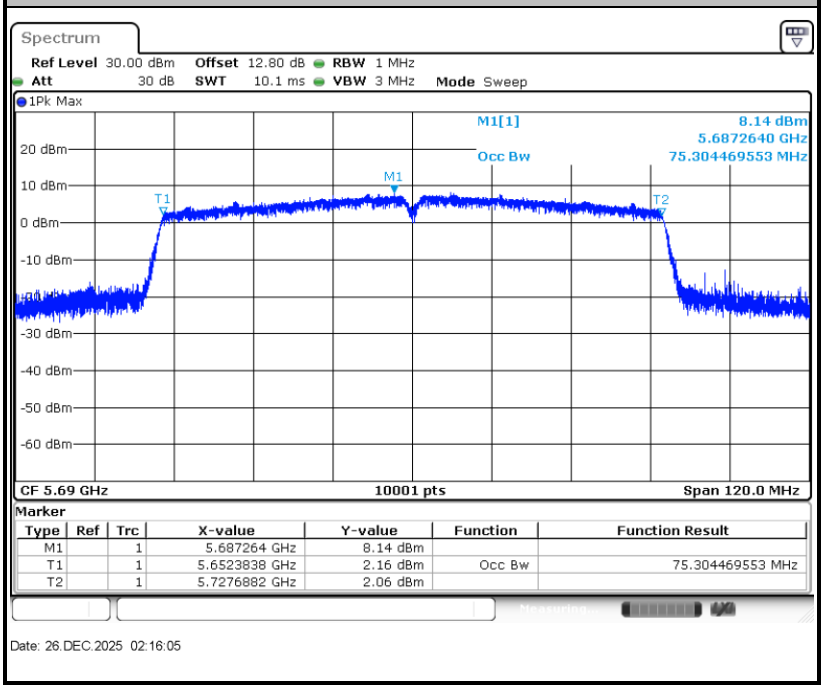

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm +10 $\log_{10}$ B, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, 10 log(1/x), where x is the duty cycle.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

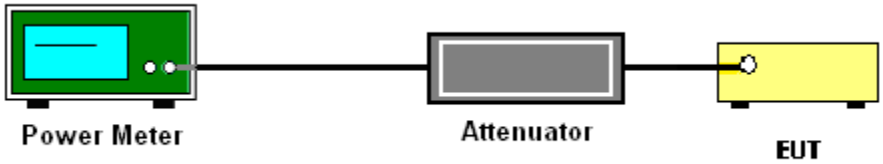

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section F) Maximum power spectral density.

For devices operating in the bands UNII-1/2A/2C

 # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW ≥ 3 MHz.
- Number of points in sweep ≥ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add 10 log(1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add 10 log(1/0.25) = 6 dB if the duty cycle is 25 percent.

For devices operating in the band UNII-3

 # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500KHz (or 300 kHz if the SA can’t set RBW=500KHz).
- Set VBW ≥ 1 MHz.
- Number of points in sweep ≥ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- If the SA can’t set RBW=500KHz, then add 10 log(500kHz/RBW) to the test result.
- Add 10 log(1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add 10 log(1/0.25) = 6 dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

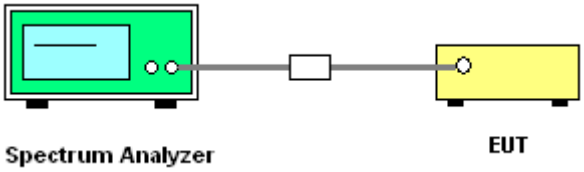

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

For devices operating in the bands UNII-1/2A/2C

Worst Case Power Density (dBm/MHz)

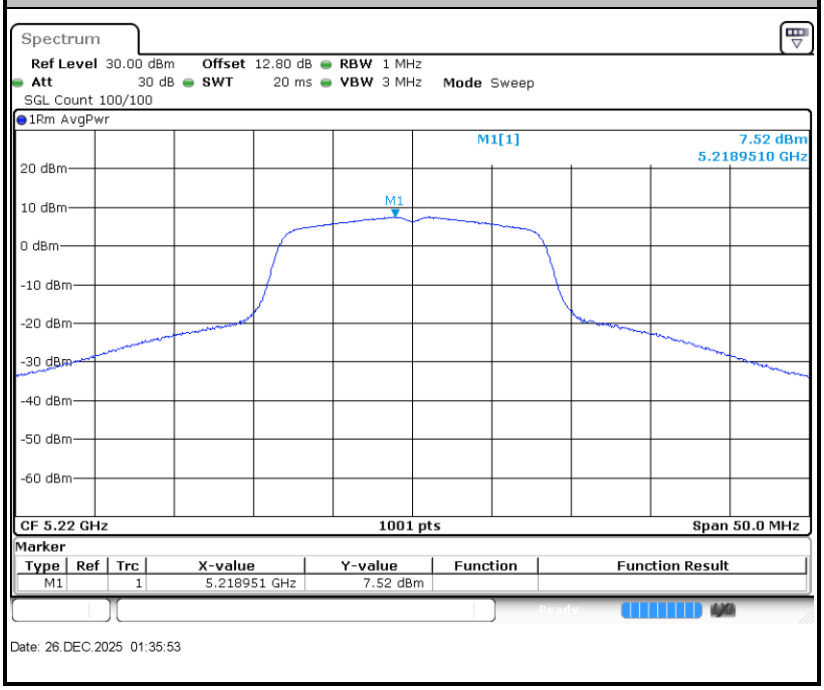

Note: Average Power Density (dB) = Measured value+ Duty Factor

For devices operating in the band UNII-3

Worst Case Power Density (dBm/300kHz)

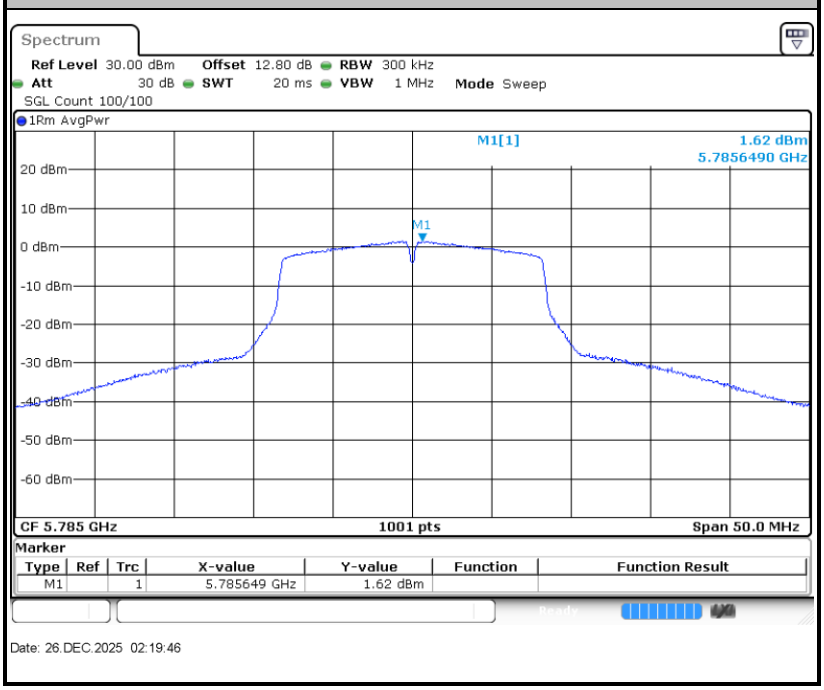

Note: Average Power Density (dB) = Measured value+ Duty Factor+10 log(500kHz/RBW)

3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part15.205.

3.4.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of –27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

(2) For transmitters operating in the 5.725-5.85 GHz band:
15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.3

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log(d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBµV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.

   (1) Procedure for Unwanted Emissions Measurements Below 1000MHz

   - RBW = 120 kHz
   - VBW = 300 kHz
   - Detector = Peak
   - Trace mode = max hold

   (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

   - RBW = 1 MHz
   - VBW ≥ 3 MHz
   - Detector = Peak
   - Sweep time = auto
   - Trace mode = max hold

   (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz

   - RBW = 1 MHz
   - VBW = 10 Hz, when duty cycle is no less than 98 percent.
   - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on.

   (4) Procedures for Average Unwanted Emissions Measurements Above 1000MHz

   - RBW = 1 MHz
   - VBW = 3 MHz
   - Detector = power averaging (rms), set span/(# of points in sweep) ≥ RBW/2.
   - Averaging type = power averaging(RMS)
   - The correction factor shall be offset is 10 log (1/x), where x is the duty cycle.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the

limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.

7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup

For radiated emissions below 30MHz

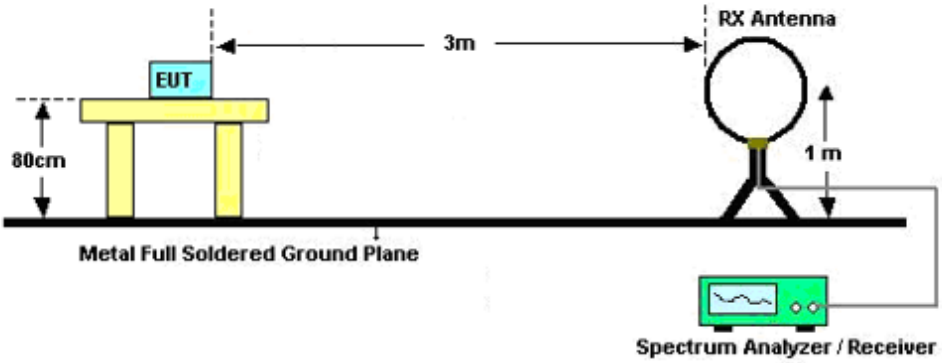

For radiated emissions from 30MHz to 1GHz

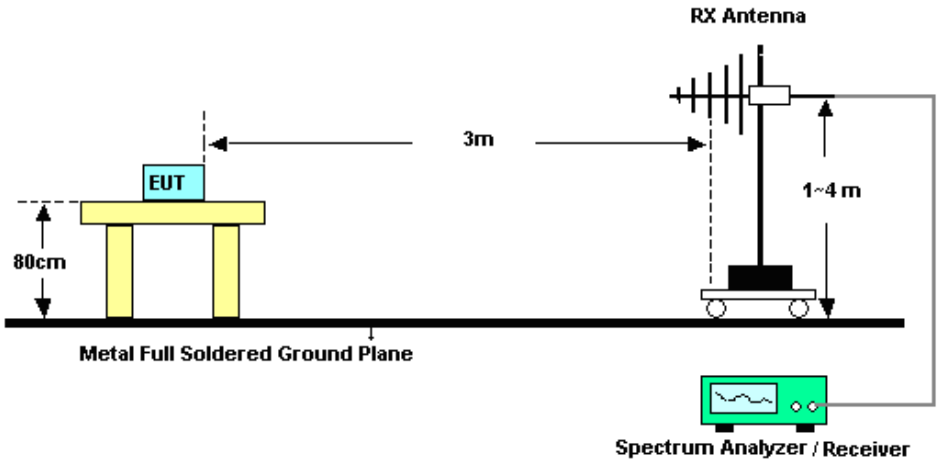

For radiated emissions above 1GHz

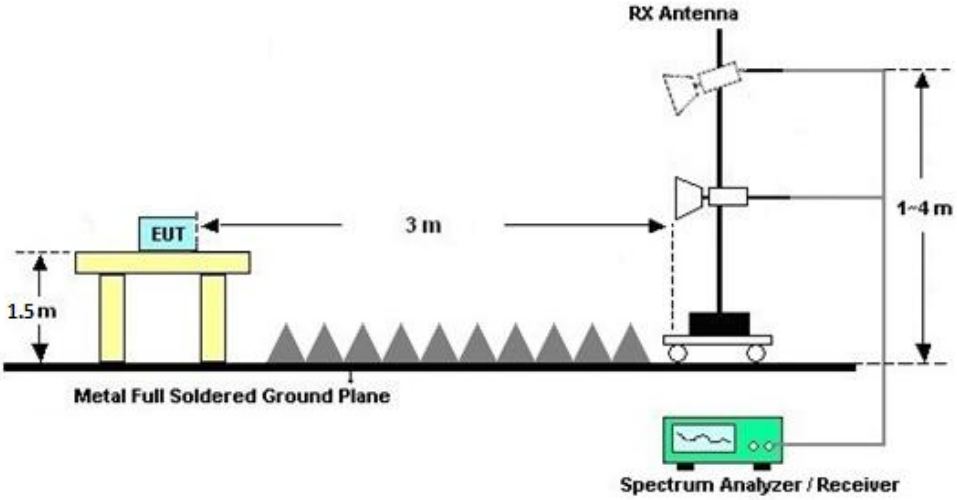

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

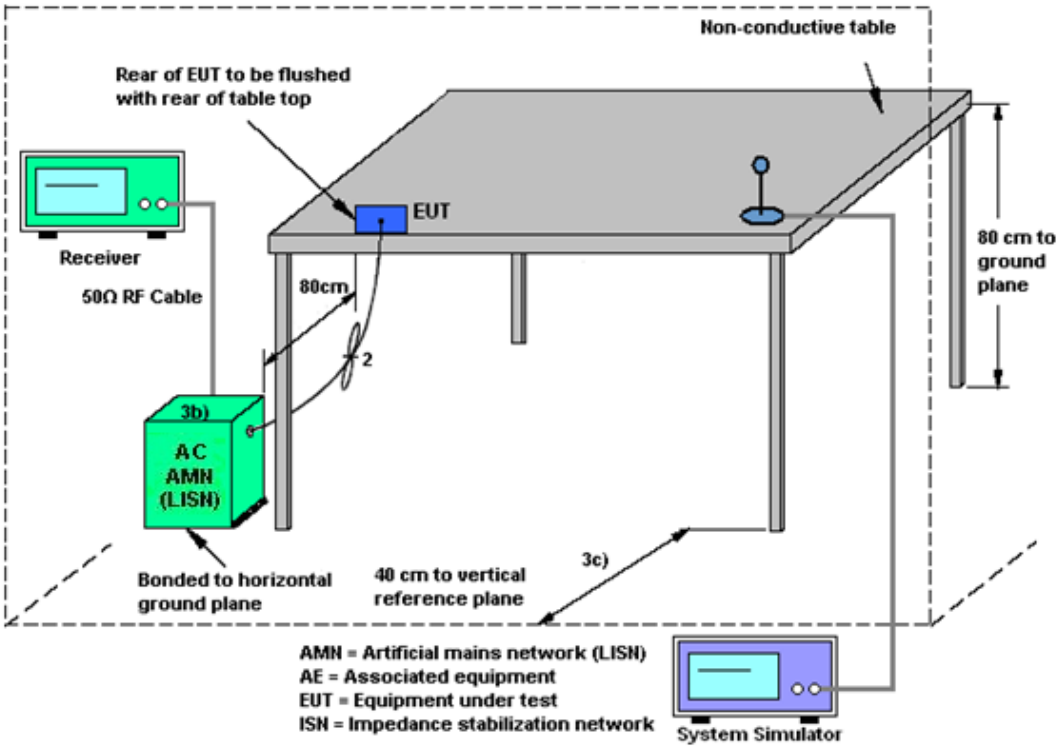

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.6 Antenna Requirements

3.6.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2) ,if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 02, 2025	Dec. 26, 2025~ Dec. 29, 2025	Apr. 01, 2026	Conducted (TH01-SZ)
Pulse Power Senor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 24, 2025	Dec. 26, 2025~ Dec. 29, 2025	Dec. 23, 2026	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Oct. 13, 2025	Dec. 26, 2025~ Dec. 29, 2025	Oct. 12, 2026	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 02, 2025	Dec. 26, 2025~ Dec. 29, 2025	Jul. 01, 2026	Conducted (TH01-SZ)
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 24, 2025	Dec. 30, 2025~ Jan. 05, 2026	Dec. 23, 2026	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2025	Dec. 30, 2025~ Jan. 05, 2026	Jul. 02, 2026	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 26, 2025	Dec. 30, 2025~ Jan. 05, 2026	Dec. 25, 2026	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Dec. 23, 2025	Dec. 30, 2025~ Jan. 05, 2026	Dec. 22, 2026	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 16, 2025	Dec. 30, 2025~ Jan. 05, 2026	Jul. 15, 2026	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 03, 2025	Dec. 30, 2025~ Jan. 05, 2026	Apr. 02, 2027	Radiation (03CH01-SZ)
LF Amplifier	EM Electronics	EM330	060788	20MHz-3GHz	Dec. 25, 2025	Dec. 30, 2025~ Jan. 05, 2026	Dec. 24, 2026	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 13, 2025	Dec. 30, 2025~ Jan. 05, 2026	Oct. 12, 2026	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 13, 2025	Dec. 30, 2025~ Jan. 05, 2026	Oct. 12, 2026	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 02, 2025	Dec. 30, 2025~ Jan. 05, 2026	Jul. 01, 2026	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Oct. 14, 2025	Dec. 30, 2025~ Jan. 05, 2026	Oct. 13, 2026	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Dec. 30, 2025~ Jan. 05, 2026	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Dec. 30, 2025~ Jan. 05, 2026	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 02, 2025	Dec. 21, 2025	Jul. 01, 2026	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2025	Dec. 21, 2025	Jul. 02, 2026	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec.25, 2024	Dec. 21, 2025	Dec. 24, 2025	Conduction (CO02-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5dB

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8 dB

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2 dB

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3 dB

---------- THE END ----------

Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	HuangKaibiao	Temperature:	21~25	°C
Test Date:	2025/12/26~2025/12/29	Relative Humidity:	51~54	%

Report Number : FR5N1402D

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)		
11a	6Mbps	1	36	5180	16.56	20.64		
11a	6Mbps	1	44	5220	17.08	36.84		
11a	6Mbps	1	48	5240	17.17	37.08		
HT20	MCS0	1	36	5180	17.66	20.94		
HT20	MCS0	1	44	5220	18.01	37.32		
HT20	MCS0	1	48	5240	17.95	36.66		
HT40	MCS0	1	38	5190	36.04	41.88		
HT40	MCS0	1	46	5230	36.43	70.92		
VHT80	MCS0	1	42	5210	75.17	82.80		

Report Number : FR5N1402D

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2A								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	52	5260	16.69	28.50	23.98	
11a	6M bps	1	60	5300	16.77	27.72	23.98	
11a	6M bps	1	64	5320	16.62	20.58	23.98	
HT20	MCS 0	1	52	5260	17.80	32.46	23.98	
HT20	MCS 0	1	60	5300	17.81	31.20	23.98	
HT20	MCS 0	1	64	5320	17.66	20.94	23.98	
HT40	MCS 0	1	54	5270	36.43	73.32	23.98	
HT40	MCS 0	1	62	5310	36.05	41.64	23.98	
VHT80	MCS 0	1	58	5290	75.10	82.80	23.98	

Report Number : FR5N1402D

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2C								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	100	5500	16.57	20.70	23.98	
11a	6M bps	1	116	5580	16.72	26.88	23.98	
11a	6M bps	1	140	5700	16.59	20.64	23.98	
11a	6Mbps	1	144	5720	16.89	28.62	23.98	
HT20	MCS 0	1	100	5500	17.66	20.94	23.98	
HT20	MCS 0	1	116	5580	17.76	32.82	23.98	
HT20	MCS 0	1	140	5700	17.68	20.88	23.98	
HT20	MCS0	1	144	5720	17.81	31.86	23.98	
HT40	MCS 0	1	102	5510	36.05	42.00	23.98	
HT40	MCS 0	1	110	5550	36.38	79.92	23.98	
HT40	MCS 0	1	134	5670	36.13	41.76	23.98	
HT40	MCS0	1	142	5710	36.60	72.60	23.98	
VHT80	MCS 0	1	106	5530	75.14	82.80	23.98	
VHT80	MCS 0	1	122	5610	75.10	88.32	23.98	
VHT80	MCS0	1	138	5690	75.30	112.56	23.98	

Report Number : FR5N1402D

TEST RESULTS DATA
Power Spectral Density

U-NII-1										
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	-	Pass/Fail
11a	6Mbps	1	36	5180	0.12	1.25	11.00	0.38		Pass
11a	6Mbps	1	44	5220	0.12	7.64	11.00	0.38		Pass
11a	6Mbps	1	48	5240	0.12	7.57	11.00	0.38		Pass
HT20	MCS0	1	36	5180	0.13	0.87	11.00	0.38		Pass
HT20	MCS0	1	44	5220	0.13	6.93	11.00	0.38		Pass
HT20	MCS0	1	48	5240	0.13	6.58	11.00	0.38		Pass
HT40	MCS0	1	38	5190	0.20	-3.53	11.00	0.38		Pass
HT40	MCS0	1	46	5230	0.20	4.02	11.00	0.38		Pass
VHT80	MCS0	1	42	5210	0.65	-7.53	11.00	0.38		Pass

Report Number : FR5N1402D

TEST RESULTS DATA
Power Spectral Density

U-NII-2A										
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	52	5260	0.12	5.48	11.00	0.29		Pass
11a	6M bps	1	60	5300	0.12	5.84	11.00	0.29		Pass
11a	6M bps	1	64	5320	0.12	0.00	11.00	0.29		Pass
HT20	MCS 0	1	52	5260	0.13	5.77	11.00	0.29		Pass
HT20	MCS 0	1	60	5300	0.13	5.65	11.00	0.29		Pass
HT20	MCS 0	1	64	5320	0.13	-0.26	11.00	0.29		Pass
HT40	MCS 0	1	54	5270	0.20	3.83	11.00	0.29		Pass
HT40	MCS 0	1	62	5310	0.20	-3.57	11.00	0.29		Pass
VHT80	MCS 0	1	58	5290	0.65	-7.78	11.00	0.29		Pass

Report Number : FR5N1402D

TEST RESULTS DATA
Power Spectral Density

U-NII-2C										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	100	5500	0.12	-0.43	11.00	-0.47		Pass
11a	6M bps	1	116	5580	0.12	5.08	11.00	-0.47		Pass
11a	6M bps	1	140	5700	0.12	1.35	11.00	-0.47		Pass
11a	6Mbps	1	144	5720	0.12	4.68	11.00	-0.47		Pass
HT20	MCS 0	1	100	5500	0.13	-0.84	11.00	-0.47		Pass
HT20	MCS 0	1	116	5580	0.13	4.81	11.00	-0.47		Pass
HT20	MCS 0	1	140	5700	0.13	1.00	11.00	-0.47		Pass
HT20	MCS0	1	144	5720	0.13	5.02	11.00	-0.47		Pass
HT40	MCS 0	1	102	5510	0.20	-4.67	11.00	-0.47		Pass
HT40	MCS 0	1	110	5550	0.20	3.28	11.00	-0.47		Pass
HT40	MCS 0	1	134	5670	0.20	-1.15	11.00	-0.47		Pass
HT40	MCS0	1	142	5710	0.20	3.38	11.00	-0.47		Pass
VHT80	MCS 0	1	106	5530	0.65	-7.52	11.00	-0.47		Pass
VHT80	MCS 0	1	122	5610	0.65	-2.36	11.00	-0.47		Pass
VHT80	MCS0	1	138	5690	0.65	-0.39	11.00	-0.47		Pass

Report Number : FR5N1402D

TEST RESULTS DATA
Average Power Table

U-NII-1											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail	Power Setting
11a	6Mbps	1	36	5180	0.12	12.15	23.98	0.38		Pass	12
11a	6Mbps	1	44	5220	0.12	18.22	23.98	0.38		Pass	18
11a	6Mbps	1	48	5240	0.12	18.17	23.98	0.38		Pass	18
HT20	MCS0	1	36	5180	0.13	12.10	23.98	0.38		Pass	12
HT20	MCS0	1	44	5220	0.13	18.05	23.98	0.38		Pass	17.5
HT20	MCS0	1	48	5240	0.13	17.60	23.98	0.38		Pass	17.5
HT40	MCS0	1	38	5190	0.20	10.08	23.98	0.38		Pass	10
HT40	MCS0	1	46	5230	0.20	17.83	23.98	0.38		Pass	17.5
VHT20	MCS0	1	36	5180	0.13	12.05	23.98	0.38		Pass	12
VHT20	MCS0	1	44	5220	0.13	17.54	23.98	0.38		Pass	17
VHT20	MCS0	1	48	5240	0.13	17.47	23.98	0.38		Pass	17
VHT40	MCS0	1	38	5190	0.20	10.02	23.98	0.38		Pass	10
VHT40	MCS0	1	46	5230	0.20	17.27	23.98	0.38		Pass	17
VHT80	MCS0	1	42	5210	0.65	9.20	23.98	0.38		Pass	9

Report Number : FR5N1402D

TEST RESULTS DATA
Average Power Table

U-NII-2A											
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail	Power Setting
11a	6M bps	1	52	5260	0.12	16.22	23.98	0.29	26.99	Pass	16
11a	6M bps	1	60	5300	0.12	16.30	23.98	0.29	26.99	Pass	16
11a	6M bps	1	64	5320	0.12	10.65	23.98	0.29	26.99	Pass	10.5
HT20	MCS 0	1	52	5260	0.13	16.11	23.98	0.29	26.99	Pass	16
HT20	MCS 0	1	60	5300	0.13	16.57	23.98	0.29	26.99	Pass	16
HT20	MCS 0	1	64	5320	0.13	10.61	23.98	0.29	26.99	Pass	10.5
HT40	MCS 0	1	54	5270	0.20	17.65	23.98	0.29	26.99	Pass	17.5
HT40	MCS 0	1	62	5310	0.20	10.34	23.98	0.29	26.99	Pass	10
VHT20	MCS 0	1	52	5260	0.13	16.04	23.98	0.29	26.99	Pass	16
VHT20	MCS 0	1	60	5300	0.13	16.53	23.98	0.29	26.99	Pass	16
VHT20	MCS 0	1	64	5320	0.13	10.55	23.98	0.29	26.99	Pass	10.5
VHT40	MCS 0	1	54	5270	0.20	17.22	23.98	0.29	26.99	Pass	17
VHT40	MCS 0	1	62	5310	0.20	10.30	23.98	0.29	26.99	Pass	10
VHT80	MCS 0	1	58	5290	0.65	9.37	23.98	0.29	26.99	Pass	9

Report Number : FR5N1402D

TEST RESULTS DATA
Average Power Table

U-NII-2C											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail	Power Setting
11a	6M bps	1	100	5500	0.12	10.51	23.98	-0.47	26.99	Pass	10.5
11a	6M bps	1	104	5520	0.12	16.50	23.98	-0.47	26.99	Pass	16
11a	6M bps	1	116	5580	0.12	16.11	23.98	-0.47	26.99	Pass	16
11a	6M bps	1	136	5680	0.12	16.48	23.98	-0.47	26.99	Pass	16
11a	6M bps	1	140	5700	0.12	12.04	23.98	-0.47	26.99	Pass	12
11a	6M bps	1	144	5720	0.12	16.10	23.98	-0.47	26.99	Pass	16
HT20	MCS 0	1	100	5500	0.13	10.52	23.98	-0.47	26.99	Pass	10.5
HT20	MCS 0	1	104	5520	0.13	16.36	23.98	-0.47	26.99	Pass	16
HT20	MCS 0	1	116	5580	0.13	16.07	23.98	-0.47	26.99	Pass	16
HT20	MCS 0	1	136	5680	0.13	16.26	23.98	-0.47	26.99	Pass	16
HT20	MCS 0	1	140	5700	0.13	12.06	23.98	-0.47	26.99	Pass	12
HT20	MCS 0	1	144	5720	0.13	16.14	23.98	-0.47	26.99	Pass	16
HT40	MCS 0	1	102	5510	0.20	9.52	23.98	-0.47	26.99	Pass	9.5
HT40	MCS 0	1	110	5550	0.20	17.14	23.98	-0.47	26.99	Pass	17
HT40	MCS 0	1	134	5670	0.20	13.13	23.98	-0.47	26.99	Pass	13
HT40	MCS 0	1	142	5710	0.20	17.52	23.98	-0.47	26.99	Pass	17.5
VHT20	MCS 0	1	100	5500	0.13	10.51	23.98	-0.47	26.99	Pass	10.5
VHT20	MCS 0	1	104	5520	0.13	16.30	23.98	-0.47	26.99	Pass	16
VHT20	MCS 0	1	116	5580	0.13	16.03	23.98	-0.47	26.99	Pass	16
VHT20	MCS 0	1	140	5700	0.13	12.01	23.98	-0.47	26.99	Pass	12
VHT20	MCS 0	1	136	5680	0.13	16.21	23.98	-0.47	26.99	Pass	16
VHT20	MCS 0	1	144	5720	0.13	16.11	23.98	-0.47	26.99	Pass	16
VHT40	MCS 0	1	102	5510	0.20	9.51	23.98	-0.47	26.99	Pass	9.5
VHT40	MCS 0	1	110	5550	0.20	17.12	23.98	-0.47	26.99	Pass	17
VHT40	MCS 0	1	134	5670	0.20	13.01	23.98	-0.47	26.99	Pass	13
VHT40	MCS 0	1	142	5710	0.20	17.02	23.98	-0.47	26.99	Pass	17
VHT80	MCS 0	1	106	5530	0.65	9.55	23.98	-0.47	26.99	Pass	9.5
VHT80	MCS 0	1	122	5610	0.65	14.67	23.98	-0.47	26.99	Pass	14.5
VHT80	MCS 0	1	138	5690	0.65	16.63	23.98	-0.47	26.99	Pass	16.5

Report Number : FR5N1402D

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

U-NII-3									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6dB Bandwidth min. Limit (MHz)	Pass/Fail
11a	6M bps	1	149	5745	16.94	34.44	15.40	0.5	Pass
11a	6Mbps	1	157	5785	16.89	33.66	15.15	0.5	Pass
11a	6Mbps	1	165	5825	16.93	35.28	15.20	0.5	Pass
HT20	MCS 0	1	149	5745	17.88	37.08	15.15	0.5	Pass
HT20	MCS 0	1	157	5785	17.90	34.20	15.15	0.5	Pass
HT20	MCS 0	1	165	5825	17.95	35.88	15.20	0.5	Pass
HT40	MCS 0	1	151	5755	36.40	73.56	35.28	0.5	Pass
HT40	MCS 0	1	159	5795	36.35	74.28	35.28	0.5	Pass
VHT80	MCS 0	1	155	5775	75.20	90.00	75.52	0.5	Pass

Report Number : FR5N1402D

TEST RESULTS DATA
Average Power Table

U-NII-3											
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail	Setting
11a	6M bps	1	149	5745	0.12	18.05	30.00	-0.22		Pass	18
11a	6Mbps	1	157	5785	0.12	18.09	30.00	-0.22		Pass	18
11a	6Mbps	1	165	5825	0.12	18.11	30.00	-0.22		Pass	18
HT20	MCS 0	1	149	5745	0.13	17.71	30.00	-0.22		Pass	17.5
HT20	MCS 0	1	157	5785	0.13	17.59	30.00	-0.22		Pass	17.5
HT20	MCS 0	1	165	5825	0.13	17.60	30.00	-0.22		Pass	17.5
HT40	MCS 0	1	151	5755	0.20	17.58	30.00	-0.22		Pass	17.5
HT40	MCS 0	1	159	5795	0.20	17.65	30.00	-0.22		Pass	17.5
VHT20	MCS 0	1	149	5745	0.13	17.28	30.00	-0.22		Pass	17
VHT20	MCS 0	1	157	5785	0.13	17.11	30.00	-0.22		Pass	17
VHT20	MCS 0	1	165	5825	0.13	17.27	30.00	-0.22		Pass	17
VHT40	MCS 0	1	151	5755	0.20	17.09	30.00	-0.22		Pass	17
VHT40	MCS 0	1	159	5795	0.20	17.05	30.00	-0.22		Pass	17
VHT80	MCS 0	1	155	5775	0.65	14.09	30.00	-0.22		Pass	14

Report Number : FR5N1402D

TEST RESULTS DATA
Power Spectral Density

U-NII-3										
Mod.	Data Rate	N_{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	0.12	2.22	3.88	30.00	-0.22	Pass
11a	6Mbps	1	157	5785	0.12	2.22	3.96	30.00	-0.22	Pass
11a	6Mbps	1	165	5825	0.12	2.22	3.70	30.00	-0.22	Pass
HT20	MCS 0	1	149	5745	0.13	2.22	3.45	30.00	-0.22	Pass
HT20	MCS 0	1	157	5785	0.13	2.22	3.39	30.00	-0.22	Pass
HT20	MCS 0	1	165	5825	0.13	2.22	3.50	30.00	-0.22	Pass
HT40	MCS 0	1	151	5755	0.20	2.22	0.43	30.00	-0.22	Pass
HT40	MCS 0	1	159	5795	0.20	2.22	0.00	30.00	-0.22	Pass
VHT80	MCS 0	1	155	5775	0.65	2.22	-5.74	30.00	-0.22	Pass

Appendix B. AC Conducted Emission Test Results

Test Engineer :	Nathon	**Temperature :**	22~24℃
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	**Phase :**	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

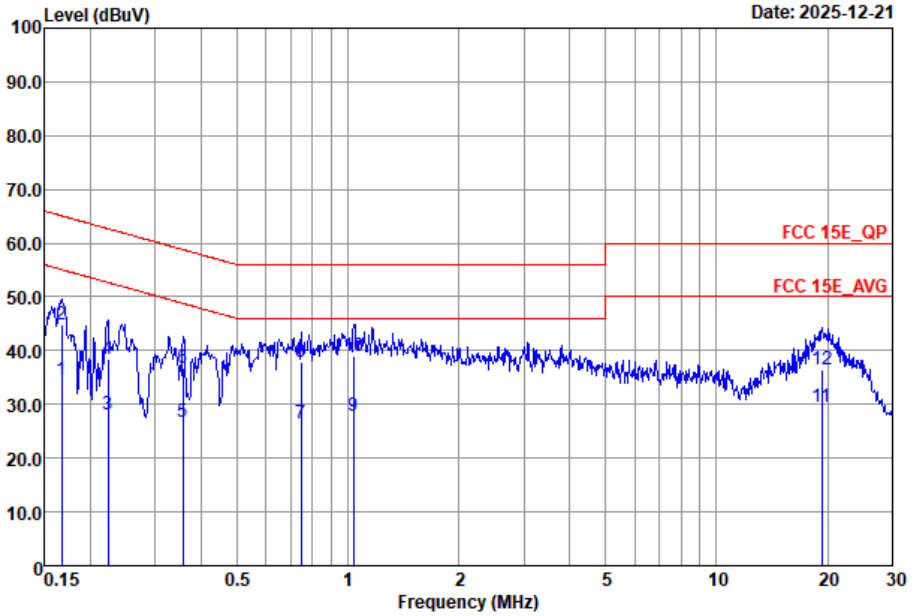

Site : CO02-SZ
Condition : FCC 15E_QP LISN_2025-L LINE

		Freq MHz	Level dBuV	Over Limit dB	Limit Line dBuV	Read Level dBuV	LISN Factor dB	Cable Loss dB	Remark
1		0.17	34.64	-20.44	55.08	14.80	9.68	10.16	Average
2		0.17	44.84	-20.24	65.08	25.00	9.68	10.16	QP
3		0.22	28.27	-24.43	52.70	8.39	9.72	10.16	Average
4		0.22	38.47	-24.23	62.70	18.59	9.72	10.16	QP
5		0.36	26.67	-22.11	48.78	6.79	9.73	10.15	Average
6		0.36	36.87	-21.91	58.78	16.99	9.73	10.15	QP
7		0.75	26.40	-19.60	46.00	6.60	9.67	10.13	Average
8		0.75	37.90	-18.10	56.00	18.10	9.67	10.13	QP
9		1.04	27.79	-18.21	46.00	8.00	9.67	10.12	Average
10	*	1.04	38.99	-17.01	56.00	19.20	9.67	10.12	QP
11		19.33	29.42	-20.58	50.00	9.39	9.69	10.34	Average
12		19.33	36.42	-23.58	60.00	16.39	9.69	10.34	QP

Test Engineer :	Nathon	**Temperature :**	22~24℃
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	**Phase :**	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

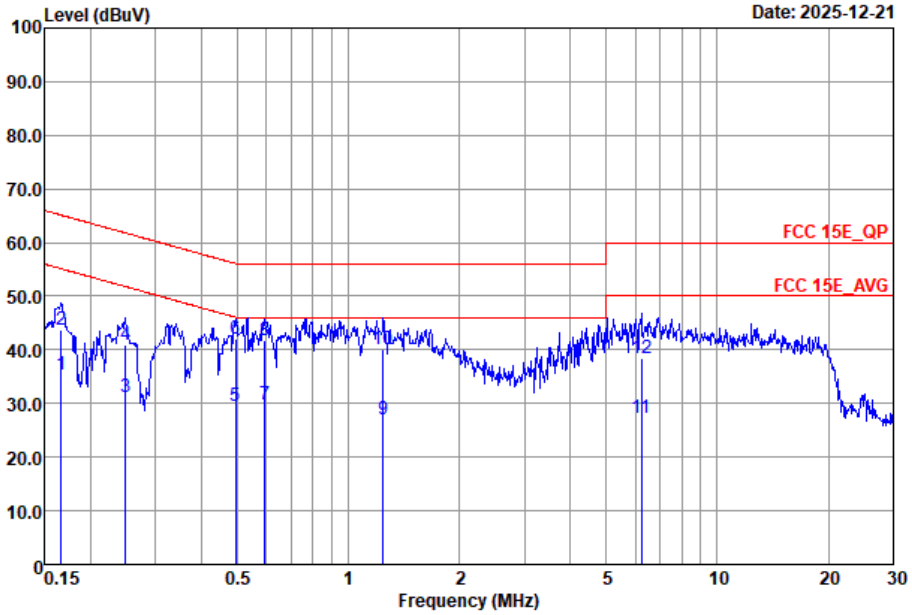

Site : CO02-SZ
Condition : FCC 15E_QP LISN_2025-N NEUTRAL

		Freq MHz	Level dBuV	Over Limit dB	Limit Line dBuV	Read Level dBuV	LISN Factor dB	Cable Loss dB	Remark
1		0.17	35.48	-19.64	55.12	15.60	9.72	10.16	Average
2		0.17	43.68	-21.44	65.12	23.80	9.72	10.16	QP
3		0.25	31.08	-20.70	51.78	11.40	9.52	10.16	Average
4		0.25	40.98	-20.80	61.78	21.30	9.52	10.16	QP
5		0.49	29.51	-16.59	46.10	9.30	10.07	10.14	Average
6	*	0.49	42.01	-14.09	56.10	21.80	10.07	10.14	QP
7		0.59	29.87	-16.13	46.00	10.10	9.64	10.13	Average
8		0.59	41.77	-14.23	56.00	22.00	9.64	10.13	QP
9		1.24	26.92	-19.08	46.00	7.10	9.69	10.13	Average
10		1.24	40.22	-15.78	56.00	20.40	9.69	10.13	QP
11		6.22	27.39	-22.61	50.00	7.39	9.75	10.25	Average
12		6.22	38.39	-21.61	60.00	18.39	9.75	10.25	QP

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)

Appendix C. Radiated Spurious Emission

Test Engineer :	Kuang Jia	Relative Humidity :	50%
		Temperature :	20~22℃

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	22	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	22	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	22	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-2A	5.25-5.35	22	802.11a	52	5260	6Mbps	-	-
Mode 5	U-NII-2A	5.25-5.35	22	802.11a	60	5300	6Mbps	-	-
Mode 6	U-NII-2A	5.25-5.35	22	802.11a	64	5320	6Mbps	-	-
Mode 7	U-NII-2C	5.47-5.725	22	802.11a	100	5500	6Mbps	-	-
Mode 8	U-NII-2C	5.47-5.725	22	802.11a	116	5580	6Mbps	-	-
Mode 9	U-NII-2C	5.47-5.725	22	802.11a	140	5700	6Mbps	-	-
Mode 10	U-NII-1	5.15-5.25	22	802.11n HT20	36	5180	MCS0	Full	-
Mode 11	U-NII-1	5.15-5.25	22	802.11n HT20	44	5220	MCS0	Full	-
Mode 12	U-NII-1	5.15-5.25	22	802.11n HT20	48	5240	MCS0	Full	-
Mode 13	U-NII-2A	5.25-5.35	22	802.11n HT20	52	5260	MCS0	Full	-
Mode 14	U-NII-2A	5.25-5.35	22	802.11n HT20	60	5300	MCS0	Full	-
Mode 15	U-NII-2A	5.25-5.35	22	802.11n HT20	64	5320	MCS0	Full	-
Mode 16	U-NII-2C	5.47-5.725	22	802.11n HT20	100	5500	MCS0	Full	-
Mode 17	U-NII-2C	5.47-5.725	22	802.11n HT20	116	5580	MCS0	Full	-
Mode 18	U-NII-2C	5.47-5.725	22	802.11n HT20	140	5700	MCS0	Full	-
Mode 19	U-NII-1	5.15-5.25	22	802.11n HT40	38	5190	MCS0	Full	-
Mode 20	U-NII-1	5.15-5.25	22	802.11n HT40	46	5230	MCS0	Full	-
Mode 21	U-NII-2A	5.25-5.35	22	802.11n HT40	54	5270	MCS0	Full	-
Mode 22	U-NII-2A	5.25-5.35	22	802.11n HT40	62	5310	MCS0	Full	-
Mode 23	U-NII-2C	5.47-5.725	22	802.11n HT40	102	5510	MCS0	Full	-
Mode 24	U-NII-2C	5.47-5.725	22	802.11n HT40	134	5670	MCS0	Full	-
Mode 25	U-NII-1	5.15-5.25	22	802.11ac VHT80	42	5210	MCS0	Full	-
Mode 26	U-NII-2A	5.25-5.35	22	802.11ac VHT80	58	5290	MCS0	Full	-
Mode 27	U-NII-2C	5.47-5.725	22	802.11ac VHT80	106	5530	MCS0	Full	-
Mode 28	U-NII-2C	5.47-5.725	22	802.11ac VHT80	122	5610	MCS0	Full	-
Mode 29	U-NII-2C	5.47-5.85	22	802.11a	144	5720	6Mbps	Full	-
Mode 30	U-NII-2C	5.47-5.85	22	802.11n HT20	144	5720	MCS0	Full	-
Mode 31	U-NII-2C	5.725-5.85	22	802.11n HT40	142	5710	MCS0	-	-
Mode 32	U-NII-2C	5.725-5.85	22	802.11ac VHT80	138	5690	MCS0	-	-
Mode 33	U-NII-3	5.725-5.85	22	802.11a	149	5745	6Mbps	-	-
Mode 34	U-NII-3	5.725-5.85	22	802.11a	157	5785	6Mbps	Full	-
Mode 35	U-NII-3	5.725-5.85	22	802.11a	165	5825	6Mbps	Full	-
Mode 36	U-NII-3	5.725-5.85	22	802.11n HT20	149	5745	MCS0	Full	-

Mode 37	U-NII-3	5.725-5.85	22	802.11n HT20	157	5785	MCS0	Full	-
Mode 38	U-NII-3	5.725-5.85	22	802.11n HT20	165	5825	MCS0	Full	-
Mode 39	U-NII-3	5.725-5.85	22	802.11n HT40	151	5755	MCS0	Full	-
Mode 40	U-NII-3	5.15-5.25	22	802.11n HT40	159	5795	MCS0	-	-
Mode 41	U-NII-3	5.25-5.35	22	802.11ac VHT80	155	5775	MCS0	-	-
Mode 42	U-NII-1	5.15-5.25	22	802.11n HT40 LF	46	5230	MCS0	Full	-
Mode 43	U-NII-3	5.725-5.85	22	802.11a LF	165	5825	6Mbps	-	-
Mode 44	Co-TX	5.15-5.25	22	802.11n HT40	46	5230	MCS0	Full	-
Mode 44	Co-TX	2400-2483.5	22	Bluetooth-LE_GSFK	38	2478	2M	-	-
Mode 45	U-NII-1	5.15-5.25	22	802.11a	40	5200	6Mbps	-	-
Mode 46	U-NII-1	5.15-5.25	22	802.11a	104	5520	6Mbps	-	-
Mode 47	U-NII-1	5.15-5.25	22	802.11a	136	5680	6Mbps	-	-
Mode 48	U-NII-1	5.15-5.25	22	802.11n HT20	40	5200	MCS0	-	-
Mode 49	U-NII-1	5.15-5.25	22	802.11n HT20	104	5520	MCS0	-	-
Mode 50	U-NII-1	5.15-5.25	22	802.11n HT20	136	5680	MCS0	-	-
Mode 51	U-NII-2C	5.47-5.725	22	802.11n HT40	110	5550	MCS0	Full	-
Mode 52	U-NII-2C	5.47-5.725	22	802.11n HT40	126	5630	MCS0	Full	-

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	PEAK Avg.	Result	Remark
1	802.11a	36	5149.40	43.22	54.00	-10.78	H	AVERAGE	Pass	Band Edge
1	802.11a	36	10360.00	47.76	68.30	-20.54	V	Peak	Pass	Harmonic
2	802.11a	44	5149.16	43.61	54.00	-10.39	H	AVERAGE	Pass	Band Edge
2	802.11a	44	10440.00	47.53	68.30	-20.77	H	Peak	Pass	Harmonic
3	802.11a	48	5149.28	43.12	54.00	-10.88	H	AVERAGE	Pass	Band Edge
3	802.11a	48	10480.00	48.92	68.30	-19.38	V	Peak	Pass	Harmonic
4	802.11a	52	5457.60	42.91	54.00	-11.09	H	AVERAGE	Pass	Band Edge
4	802.11a	52	10520.00	47.50	68.30	-20.80	V	Peak	Pass	Harmonic
5	802.11a	60	5352.96	43.35	54.00	-10.65	H	AVERAGE	Pass	Band Edge
5	802.11a	60	10600.00	47.54	74.00	-26.46	V	Peak	Pass	Harmonic
6	802.11a	64	5350.52	43.25	54.00	-10.75	H	AVERAGE	Pass	Band Edge
6	802.11a	64	15960.00	47.31	74.00	-26.69	V	Peak	Pass	Harmonic
7	802.11a	100	5458.45	43.13	54.00	-10.87	H	AVERAGE	Pass	Band Edge
7	802.11a	100	16500.00	47.73	68.30	-20.57	H	Peak	Pass	Harmonic
8	802.11a	116	5444.99	42.52	54.00	-11.48	H	AVERAGE	Pass	Band Edge
8	802.11a	116	16740.00	47.55	68.30	-20.75	V	Peak	Pass	Harmonic
9	802.11a	140	5725.09	55.87	68.30	-12.43	H	PEAK	Pass	Band Edge
9	802.11a	140	17100.00	48.39	68.30	-19.91	V	Peak	Pass	Harmonic
10	802.11n HT20	36	5149.94	43.74	54.00	-10.26	H	AVERAGE	Pass	Band Edge
10	802.11n HT20	36	10360.00	47.82	68.30	-20.48	V	Peak	Pass	Harmonic
11	802.11n HT20	44	5148.50	43.49	54.00	-10.51	H	AVERAGE	Pass	Band Edge
11	802.11n HT20	44	10440.00	47.30	68.30	-21.00	H	Peak	Pass	Harmonic

12	802.11n HT20	48	5128.16	43.69	54.00	-10.31	H	AVERAGE	Pass	Band Edge
12	802.11n HT20	48	10480.00	47.74	68.30	-20.56	H	Peak	Pass	Harmonic
13	802.11n HT20	52	5449.60	42.92	54.00	-11.08	H	AVERAGE	Pass	Band Edge
13	802.11n HT20	52	10520.00	47.79	68.30	-20.51	H	Peak	Pass	Harmonic
14	802.11n HT20	60	5350.24	44.64	54.00	-9.36	H	AVERAGE	Pass	Band Edge
14	802.11n HT20	60	15900.00	47.84	74.00	-26.16	V	Peak	Pass	Harmonic
15	802.11n HT20	64	5446.00	42.84	54.00	-11.16	H	AVERAGE	Pass	Band Edge
15	802.11n HT20	64	15960.00	47.60	74.00	-26.40	H	Peak	Pass	Harmonic
16	802.11n HT20	100	5458.90	43.38	54.00	-10.62	H	AVERAGE	Pass	Band Edge
16	802.11n HT20	100	16500.00	47.68	68.30	-20.62	V	Peak	Pass	Harmonic
17	802.11n HT20	116	5454.42	42.56	54.00	-11.44	H	AVERAGE	Pass	Band Edge
17	802.11n HT20	116	16740.00	47.28	68.30	-21.02	H	Peak	Pass	Harmonic
18	802.11n HT20	140	5725.48	56.98	68.30	-11.32	H	PEAK	Pass	Band Edge
18	802.11n HT20	140	17100.00	47.70	68.30	-20.60	H	Peak	Pass	Harmonic
19	802.11n HT40	38	5149.34	44.27	54.00	-9.73	H	AVERAGE	Pass	Band Edge
19	802.11n HT40	38	-	-	-	-	-	-	-	Harmonic
20	802.11n HT40	46	5146.05	49.58	54.00	-4.42	H	AVERAGE	Pass	Band Edge
20	802.11n HT40	46	10460.00	48.14	68.30	-20.16	V	Peak	Pass	Harmonic
21	802.11n HT40	54	5350.18	49.15	54.00	-4.85	H	AVERAGE	Pass	Band Edge
21	802.11n HT40	54	-	-	-	-	-	-	-	Harmonic
22	802.11n HT40	62	5350.05	45.43	54.00	-8.57	H	AVERAGE	Pass	Band Edge
22	802.11n HT40	62	-	-	-	-	-	-	-	Harmonic
23	802.11n HT40	102	5454.16	43.51	54.00	-10.49	V	AVERAGE	Pass	Band Edge
23	802.11n HT40	102	-	-	-	-	-	-	-	Harmonic
24	802.11n HT40	134	5458.16	43.40	54.00	-10.60	H	AVERAGE	Pass	Band Edge
24	802.11n HT40	134	-	-	-	-	-	-	-	Harmonic
25	802.11ac VHT80	42	5149.73	44.26	54.00	-9.74	H	AVERAGE	Pass	Band Edge
25	802.11ac VHT80	42	-	-	-	-	-	-	-	Harmonic
26	802.11ac VHT80	58	5350.01	44.39	54.00	-9.61	H	AVERAGE	Pass	Band Edge
26	802.11ac VHT80	58	-	-	-	-	-	-	-	Harmonic
27	802.11ac VHT80	106	5457.82	44.04	54.00	-9.96	H	AVERAGE	Pass	Band Edge
27	802.11ac VHT80	106	-	-	-	-	-	-	-	Harmonic
28	802.11ac VHT80	122	5459.72	46.76	54.00	-7.24	H	AVERAGE	Pass	Band Edge
28	802.11ac VHT80	122	-	-	-	-	-	-	-	Harmonic
29	802.11a	144	-	-	-	-	-	-	-	Band Edge
29	802.11a	144	17160.00	47.93	68.30	-20.37	H	Peak	Pass	Harmonic
30	802.11n HT20	144	5458.35	41.76	54.00	-12.24	H	Peak	Pass	Band Edge
30	802.11n HT20	144	17160.00	47.92	68.30	-20.38	V	Peak	Pass	Harmonic
31	802.11n HT40	142	5457.25	42.53	54.00	-11.47	H	Peak	Pass	Band Edge
31	802.11n HT40	142	-	-	-	-	-	-	-	Harmonic
32	802.11ac VHT80	138	5459.45	44.36	54.00	-9.64	H	Peak	Pass	Band Edge
32	802.11ac VHT80	138	-	-	-	-	-	-	-	Harmonic
33	802.11a	149	5643.79	52.74	68.30	-15.56	H	PEAK	Pass	Band Edge
33	802.11a	149	11490.00	46.48	54.00	-7.52	H	Average	Pass	Harmonic
34	802.11a	157	-	-	-	-	-	-	-	Band Edge
34	802.11a	157	11570.00	48.08	54.00	-5.92	H	Average	Pass	Harmonic
35	802.11a	165	5929.38	52.44	68.30	-15.86	V	PEAK	Pass	Band Edge

35	802.11a	165	11650.00	48.96	54.00	-5.04	H	Average	Pass	Harmonic
36	802.11n HT20	149	5636.54	53.25	68.30	-15.05	H	PEAK	Pass	Band Edge
36	802.11n HT20	149	11490.00	44.96	54.00	-9.04	H	Average	Pass	Harmonic
37	802.11n HT20	157	-	-	-	-	-	-	-	Band Edge
37	802.11n HT20	157	11570.00	46.20	54.00	-7.80	H	Average	Pass	Harmonic
38	802.11n HT20	165	5926.88	53.08	68.30	-15.22	V	PEAK	Pass	Band Edge
38	802.11n HT20	165	11650.00	46.97	54.00	-7.03	H	Average	Pass	Harmonic
39	802.11n HT40	151	5651.00	53.98	69.04	-15.06	H	PEAK	Pass	Band Edge
39	802.11n HT40	151	-	-	-	-	-	-	-	Harmonic
40	802.11n HT40	159	5949.85	52.63	68.30	-15.67	H	PEAK	Pass	Band Edge
40	802.11n HT40	159	-	-	-	-	-	-	-	Harmonic
41	802.11ac VHT80	155	5631.15	54.38	68.30	-13.92	H	PEAK	Pass	Band Edge
41	802.11ac VHT80	155	-	-	-	-	-	-	-	Harmonic
42	802.11n HT40 LF	46	209.45	25.90	43.50	-17.60	H	PEAK	Pass	LF
43	802.11a LF	165	206.54	26.00	43.50	-17.50	H	PEAK	Pass	LF
44	802.11n HT40	46	10460.00	47.59	68.30	-20.71	H	Peak	Pass	Harmonic
45	802.11a	40	5150.00	46.93	54.00	-7.07	H	AVERAGE	Pass	Band Edge
45	802.11a	40	-	-	-	-	-	-	-	Harmonic
46	802.11a	104	5459.31	44.59	54.00	-9.41	H	AVERAGE	Pass	Band Edge
46	802.11a	104	-	-	-	-	-	-	-	Harmonic
47	802.11a	136	5728.45	53.77	68.30	-14.53	H	PEAK	Pass	Band Edge
47	802.11a	136	-	-	-	-	-	-	-	Harmonic
48	802.11n HT20	40	5149.60	47.10	54.00	-6.90	H	AVERAGE	Pass	Band Edge
48	802.11n HT20	40	-	-	-	-	-	-	-	Harmonic
49	802.11n HT20	104	5458.80	44.86	54.00	-9.14	H	AVERAGE	Pass	Band Edge
49	802.11n HT20	104	-	-	-	-	-	-	-	Harmonic
50	802.11n HT20	136	5726.84	54.56	68.30	-13.74	H	PEAK	Pass	Band Edge
50	802.11n HT20	136	-	-	-	-	-	-	-	Harmonic
51	802.11n HT40	110	5458.80	49.23	54.00	-4.77	H	AVERAGE	Pass	Band Edge
51	802.11n HT40	110	-	-	-	-	-	-	-	Harmonic
52	802.11n HT40	126	5456.68	43.26	54.00	-10.74	H	AVERAGE	Pass	Band Edge
52	802.11n HT40	126	-	-	-	-	-	-	-	Harmonic

Mode	1	
	Band Edge	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz	
ANT	22	
Pol.	Horizontal	Fundamental
Peak	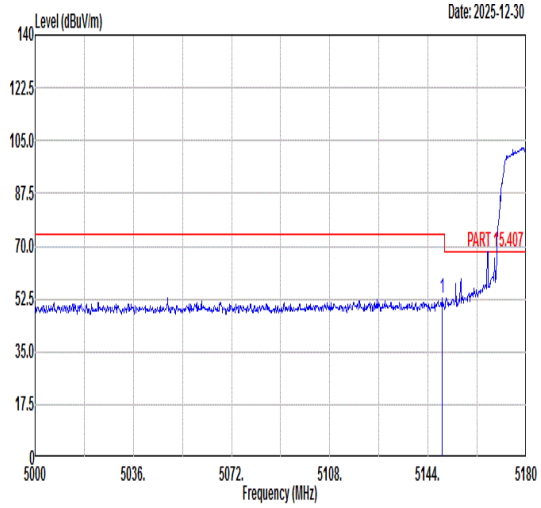 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 5149.22 52.88 74.00 -21.12 42.53 35.29 8.53 33.47 100 41 PEAK	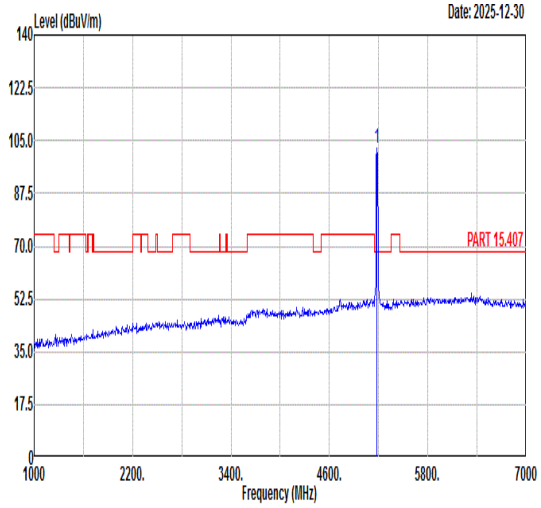 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 5180.00 102.25 ------ ------ 91.82 35.31 8.58 33.46 100 41 PEAK
Avg	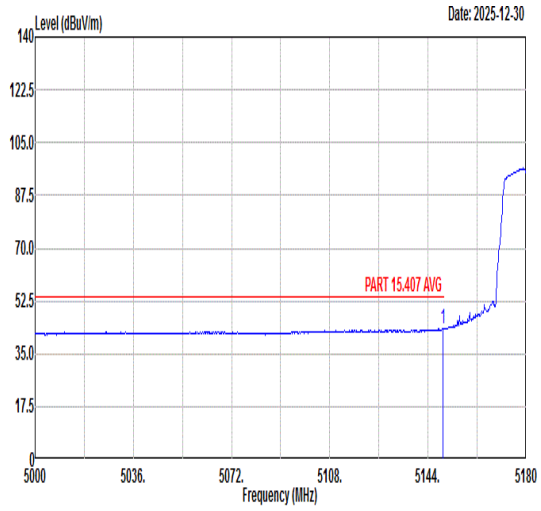 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 5149.40 43.22 54.00 -10.78 32.87 35.29 8.53 33.47 100 41 AVERAGE	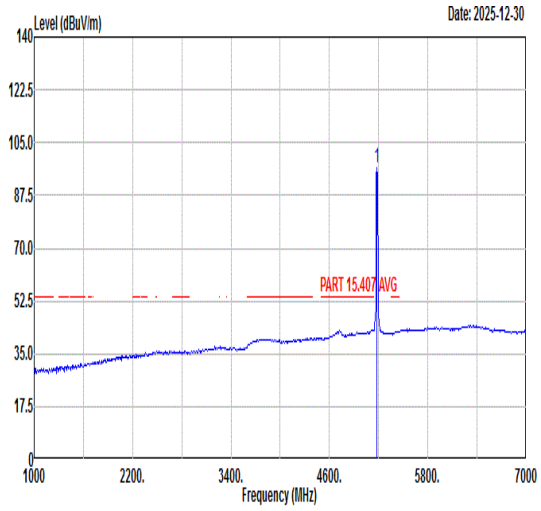 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 5180.00 96.47 ------ ------ 86.04 35.31 8.58 33.46 100 41 AVERAGE

Mode	1	
	Band Edge	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	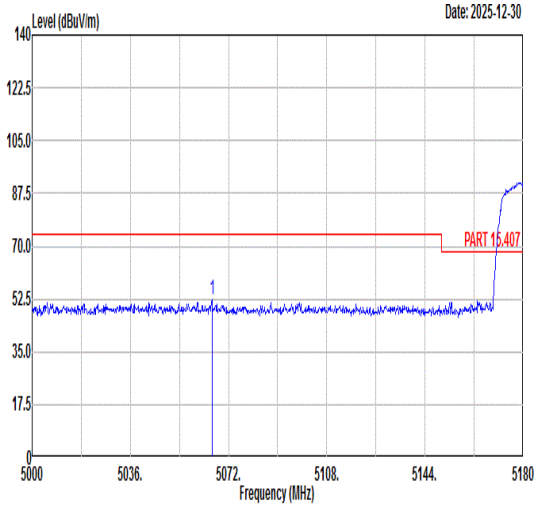 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5065.88 52.17 74.00 -21.83 42.04 35.24 8.38 33.49 200 26 PEAK	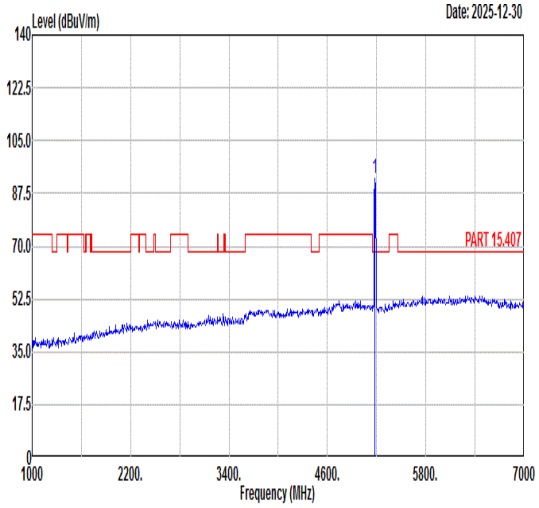 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5180.00 92.67 ------ ------ 82.23 35.31 8.59 33.46 200 26 PEAK
Avg	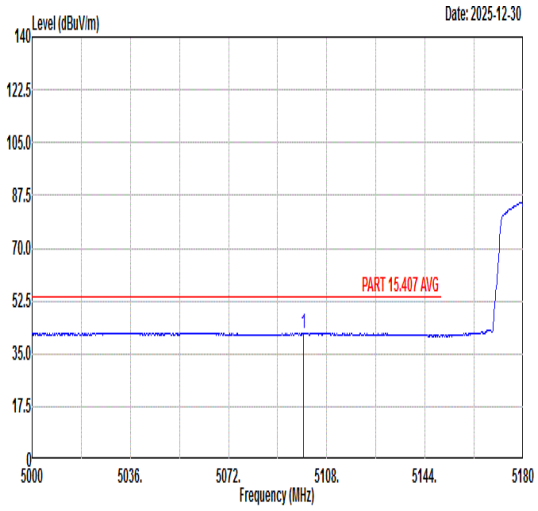 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5099.54 41.98 54.00 -12.02 31.76 35.26 8.44 33.48 200 26 AVERAGE	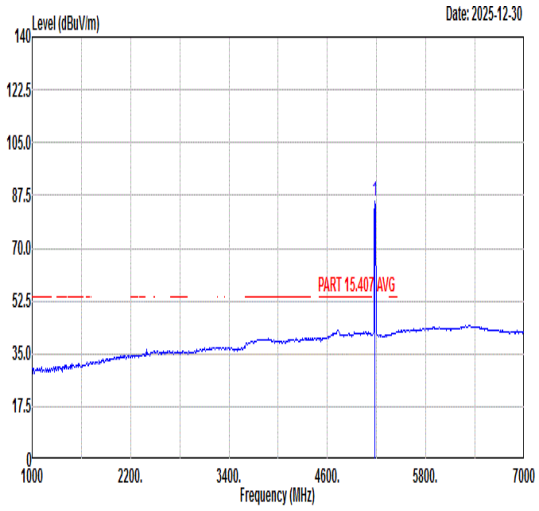 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5180.00 85.45 ------ ------ 75.01 35.31 8.59 33.46 200 26 AVERAGE

Mode	1	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz	
ANT	22	
Pol.	Horizontal	Vertical
Peak Avg	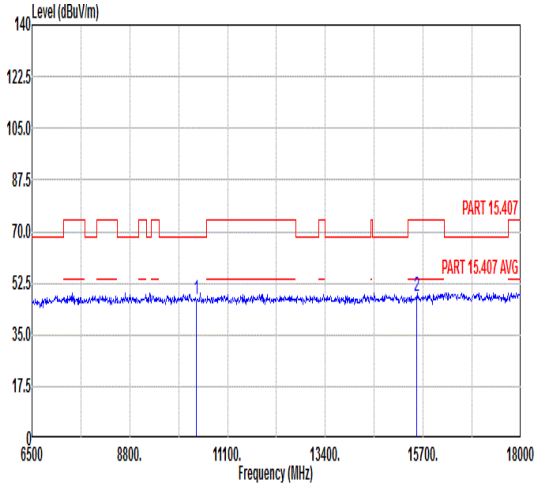 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 10360.00 47.07 68.30 -21.23 48.45 38.04 12.06 51.48 --- --- Peak 2 15540.00 47.92 74.00 -26.08 44.91 40.91 14.58 52.48 --- --- Peak	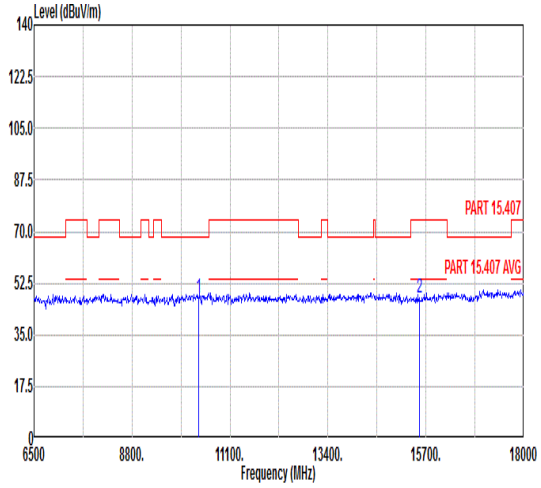 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 10360.00 47.76 68.30 -20.54 49.14 38.04 12.06 51.48 --- --- Peak 2 15540.00 47.71 74.00 -26.29 44.70 40.91 14.58 52.48 --- --- Peak

Mode	2	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	22	
Pol.	Horizontal	Fundamental
Peak	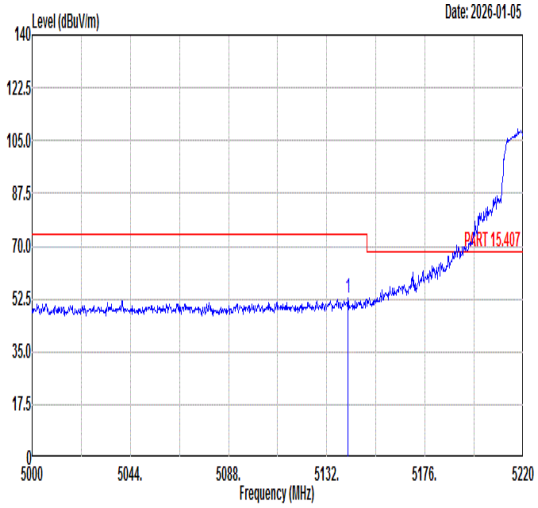 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 5141.46 52.79 74.00 -21.21 42.46 35.28 8.52 33.47 100 41 PEAK	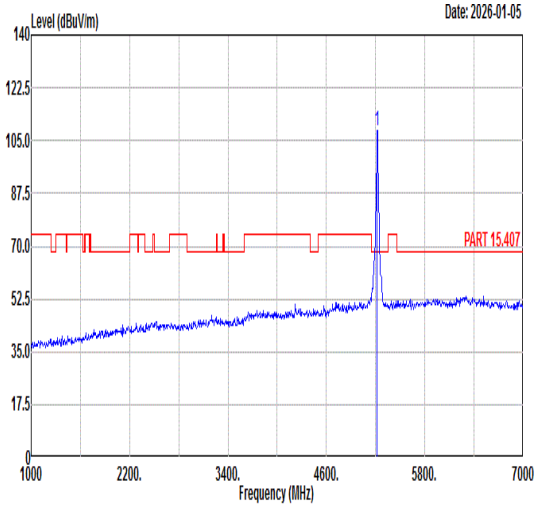 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 5220.00 108.55 ------ ------ 97.97 35.33 8.71 33.46 100 41 PEAK
Avg	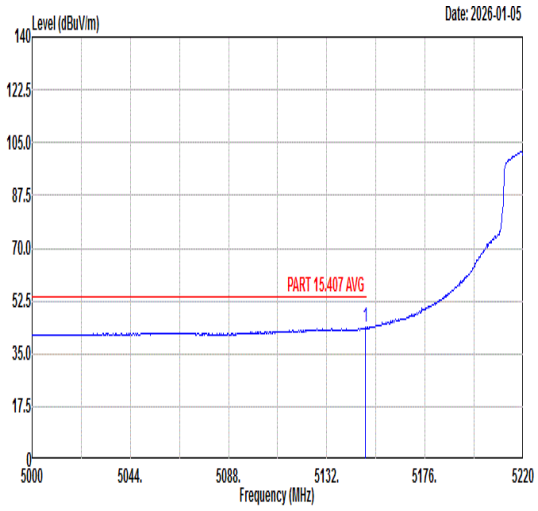 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 5149.16 43.61 54.00 -10.39 33.26 35.29 8.53 33.47 100 41 AVERAGE	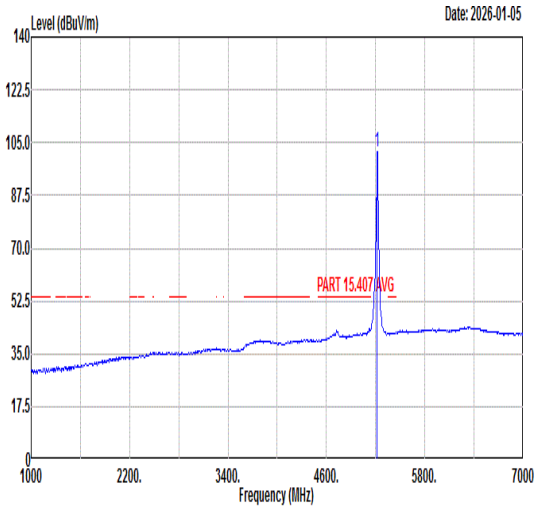 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 5220.00 102.01 ------ ------ 91.46 35.33 8.68 33.46 100 41 AVERAGE

Mode	2	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	22	
Pol.	Horizontal	Fundamental
Peak	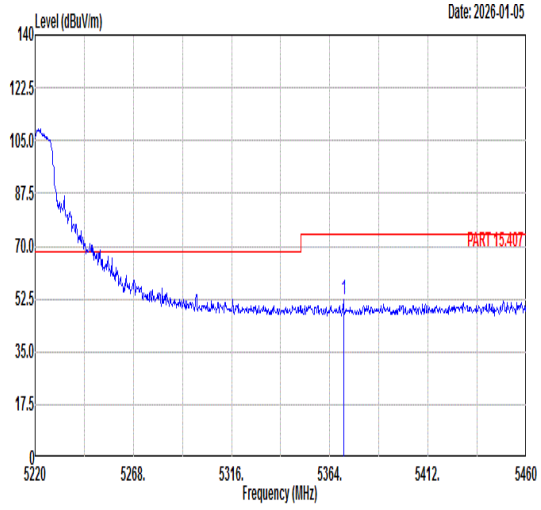 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5370.72 52.05 74.00 -21.95 40.59 35.42 9.47 33.43 100 41 PEAK	Blank
Avg	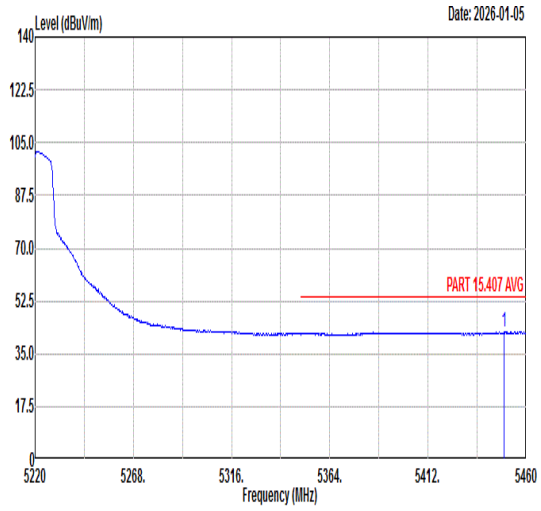 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5449.20 42.19 54.00 -11.81 30.45 35.47 9.68 33.41 100 41 AVERAGE	Blank

Mode	2	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	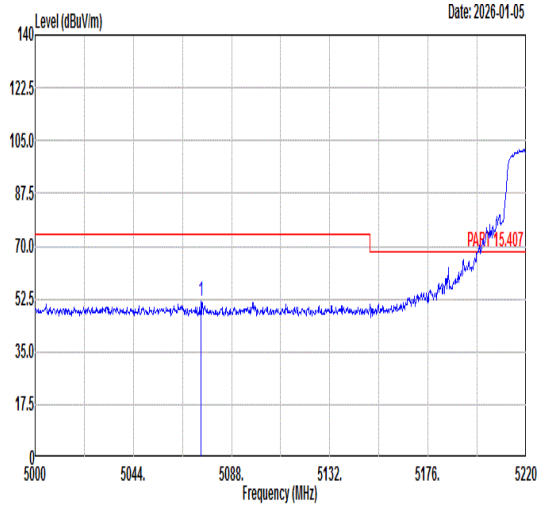 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5074.36 51.59 74.00 -22.41 41.44 35.24 8.40 33.49 100 271 PEAK	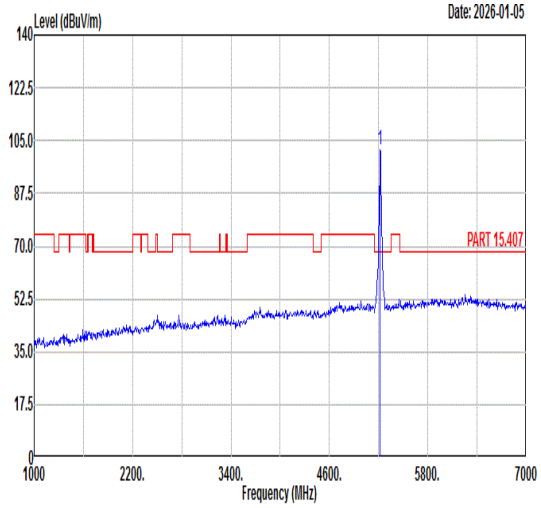 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5220.00 102.06 ------ ------ 91.51 35.33 8.68 33.46 100 271 PEAK
Avg	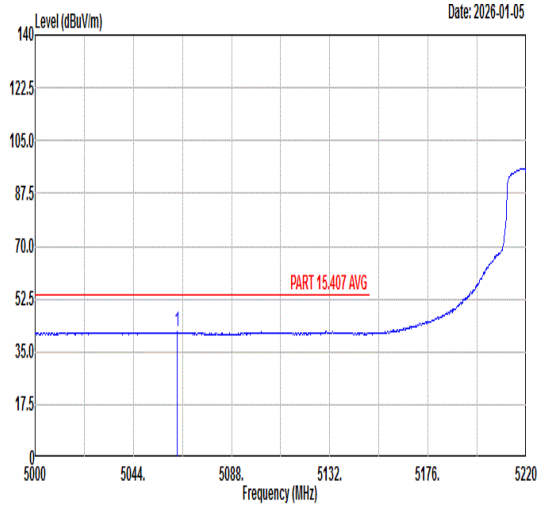 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5063.58 41.68 54.00 -12.32 31.55 35.24 8.38 33.49 100 271 AVERAGE	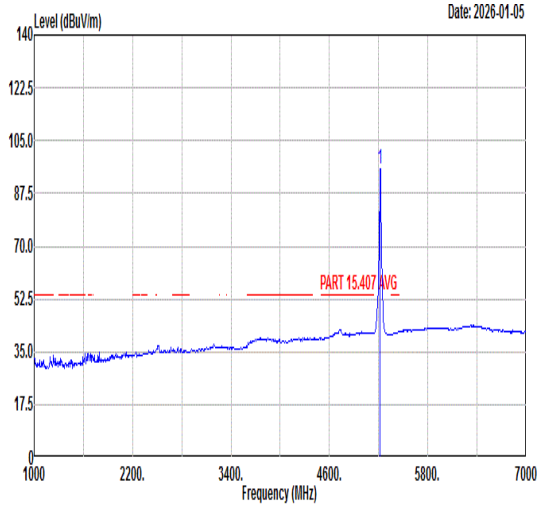 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5220.00 95.82 ------ ------ 85.27 35.33 8.68 33.46 100 271 AVERAGE

Mode	2	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	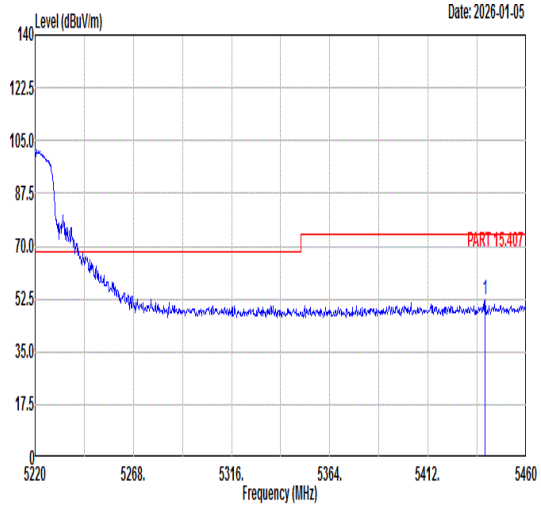 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5439.84 52.09 74.00 -21.91 40.36 35.46 9.68 33.41 100 271 PEAK	Blank
Avg	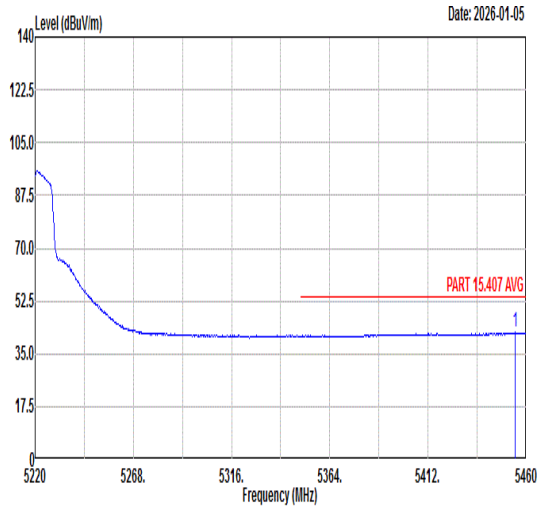 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5454.48 42.12 54.00 -11.88 30.38 35.47 9.68 33.41 100 271 AVERAGE	Blank

Mode	2	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	22	
Pol.	Horizontal	Vertical
Peak Avg	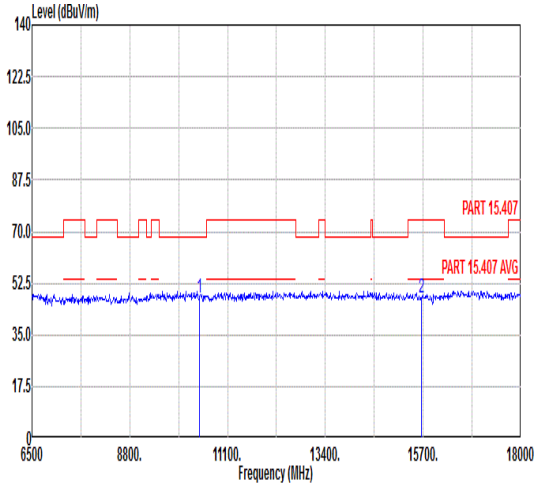 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 10440.00 47.53 68.30 -20.77 48.65 38.08 12.12 51.32 --- --- Peak 2 15660.00 47.67 74.00 -26.33 44.54 41.05 14.64 52.56 --- --- Peak	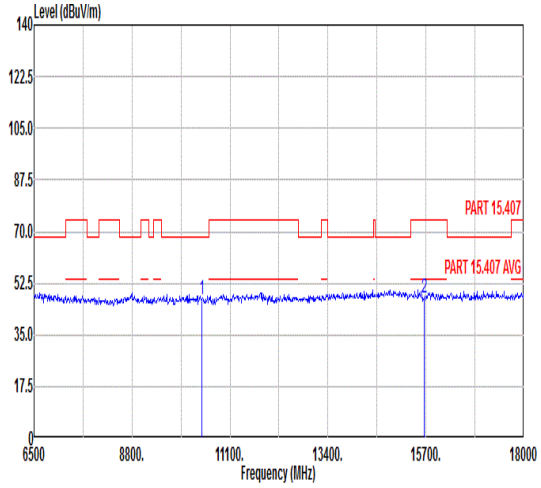 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 10440.00 46.86 68.30 -21.44 47.98 38.08 12.12 51.32 --- --- Peak 2 15660.00 47.60 74.00 -26.40 44.47 41.05 14.64 52.56 --- --- Peak

Mode	3	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	22	
Pol.	Horizontal	Fundamental
Peak	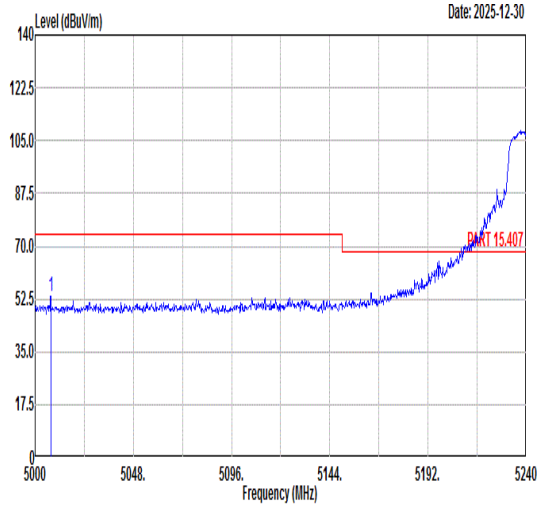 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 5007.68 53.57 74.00 -20.43 43.55 35.20 8.32 33.50 103 36 PEAK	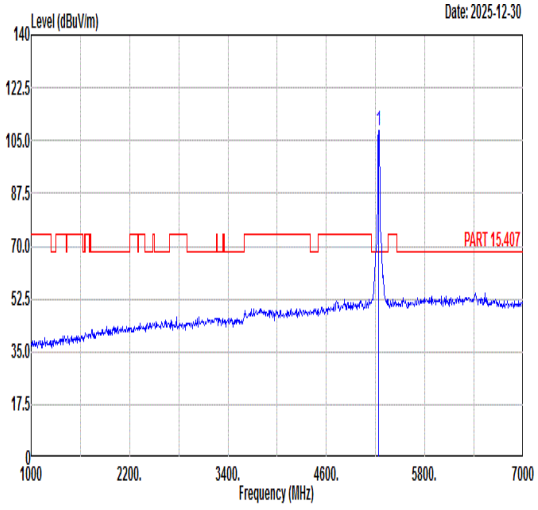 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 5240.00 108.41 ------ ------ 97.75 35.34 8.77 33.45 103 36 PEAK
Avg	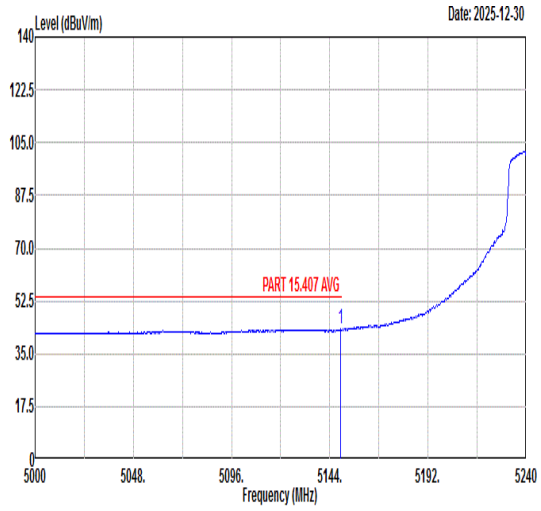 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 5149.28 43.12 54.00 -10.88 32.77 35.29 8.53 33.47 103 36 AVERAGE	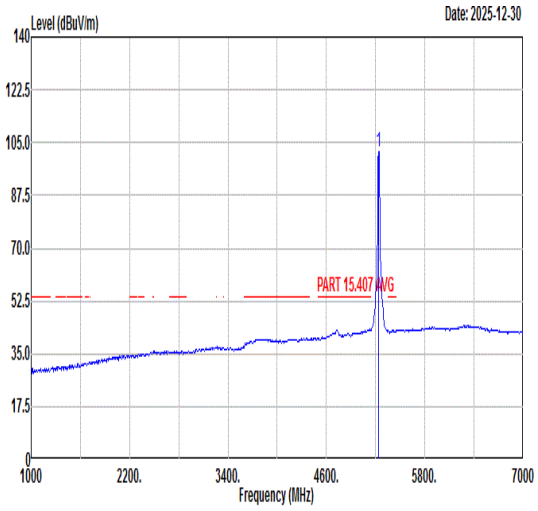 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 5240.00 102.06 ------ ------ 91.35 35.35 8.81 33.45 103 36 AVERAGE

Mode	3	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	22	
Pol.	Horizontal	Fundamental
Peak	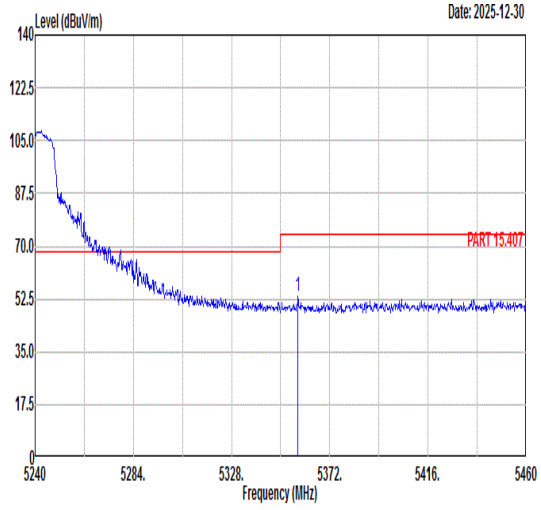 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5357.70 53.16 74.00 -20.84 41.78 35.41 9.40 33.43 103 36 PEAK	Blank
Avg	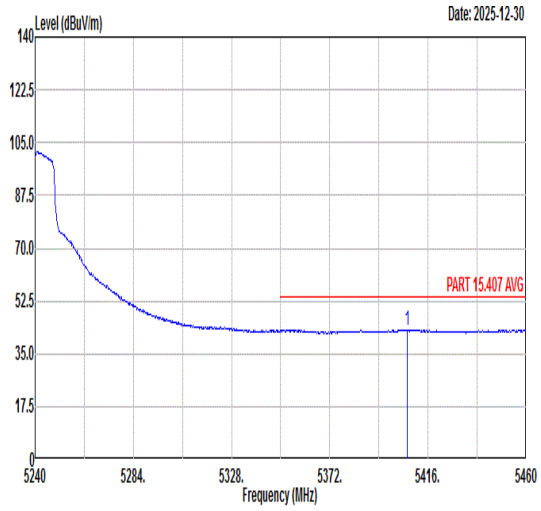 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5406.76 42.90 54.00 -11.10 31.22 35.44 9.66 33.42 103 36 AVERAGE	Blank

Mode	3	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	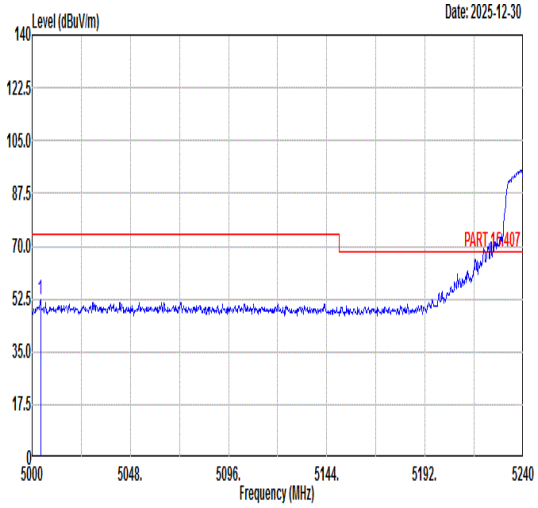 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 5004.08 52.51 74.00 -21.49 42.48 35.20 8.33 33.50 100 33 PEAK	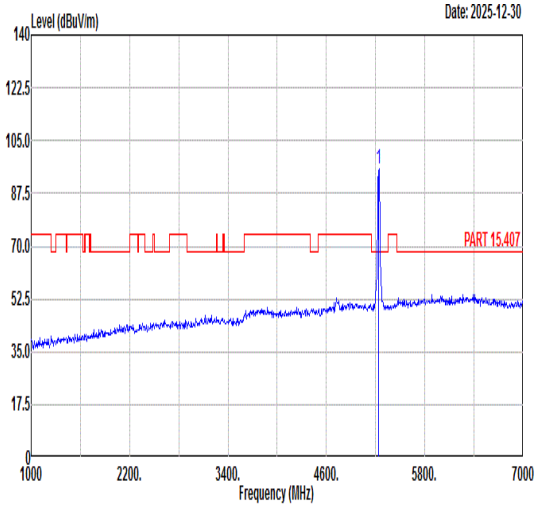 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 5240.00 95.57 ------ ------ 84.86 35.35 8.81 33.45 100 33 PEAK
Avg	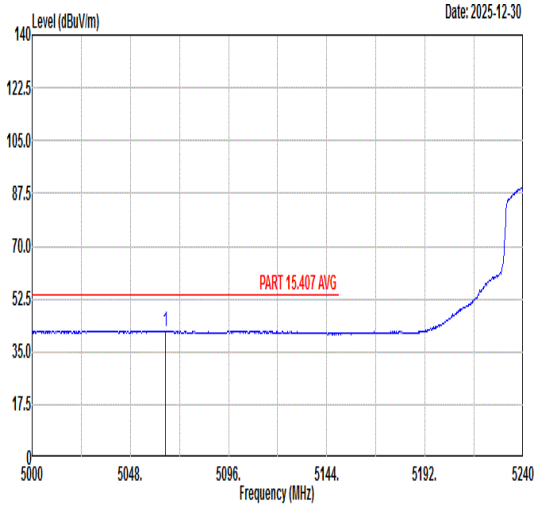 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 5065.28 41.96 54.00 -12.04 31.83 35.24 8.38 33.49 100 33 AVERAGE	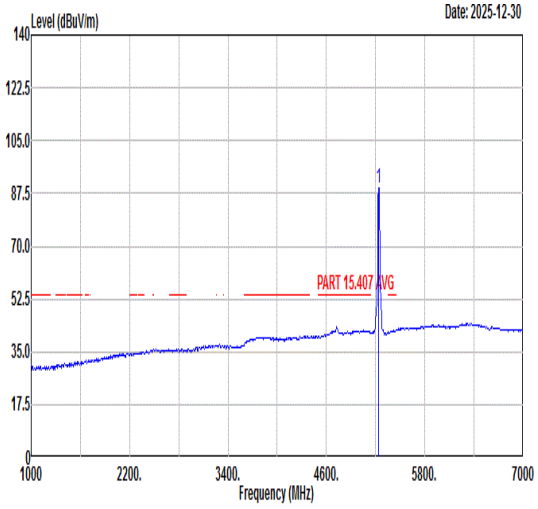 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 5240.00 89.40 ------ ------ 78.69 35.35 8.81 33.45 100 33 AVERAGE

Mode	3	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	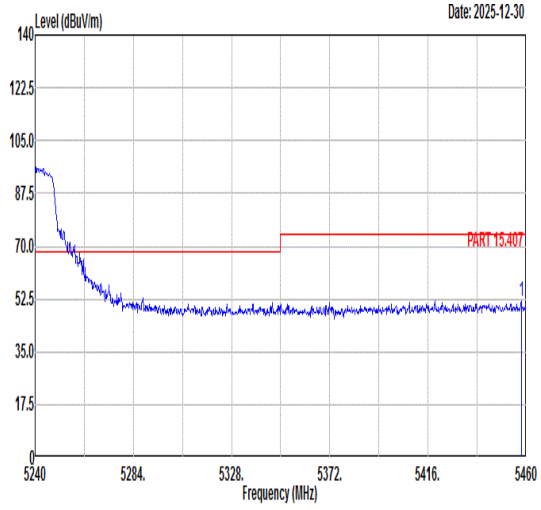 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5457.80 51.92 74.00 -22.08 40.17 35.47 9.69 33.41 100 33 PEAK	Blank
Avg	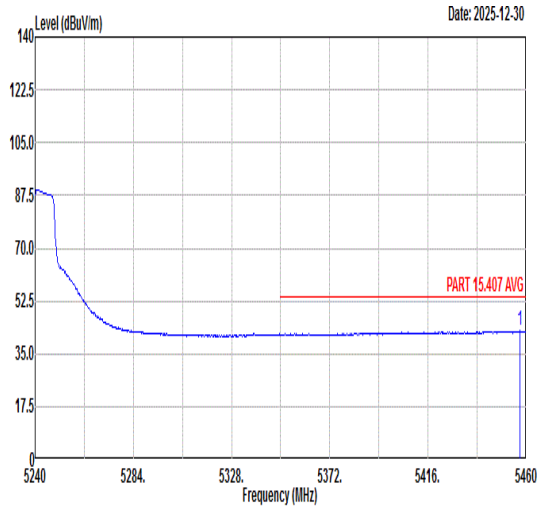 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5457.14 42.58 54.00 -11.42 30.83 35.47 9.69 33.41 100 33 AVERAGE	Blank

Mode	3	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	22	
Pol.	Horizontal	Vertical
Peak Avg	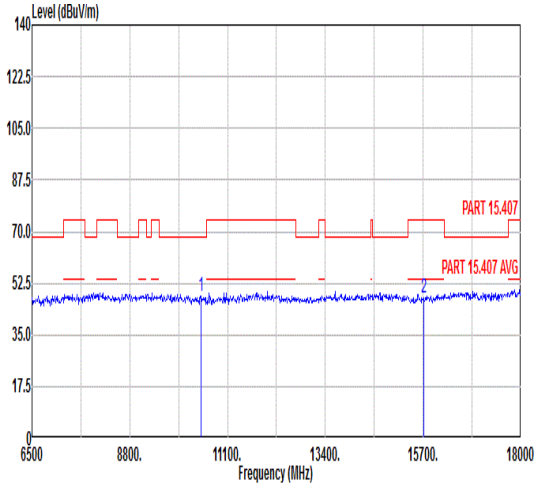 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 10480.00 48.07 68.30 -20.23 49.07 38.09 12.15 51.24 --- --- Peak 2 15720.00 47.31 74.00 -26.69 44.13 41.12 14.66 52.60 --- --- Peak	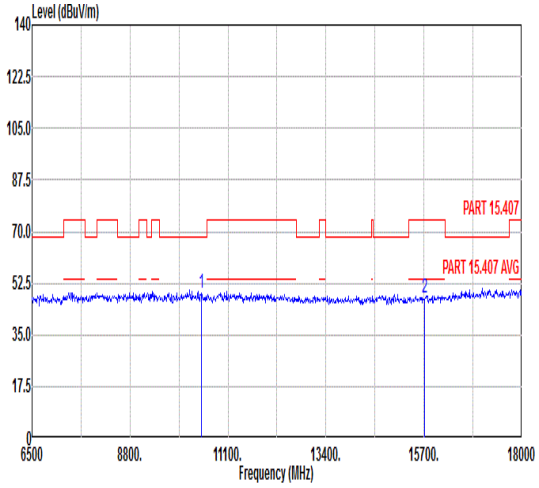 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 10480.00 48.92 68.30 -19.38 49.92 38.09 12.15 51.24 --- --- Peak 2 15720.00 47.37 74.00 -26.63 44.19 41.12 14.66 52.60 --- --- Peak

Mode	4	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz	
ANT	22	
Pol.	Horizontal	Fundamental
Peak	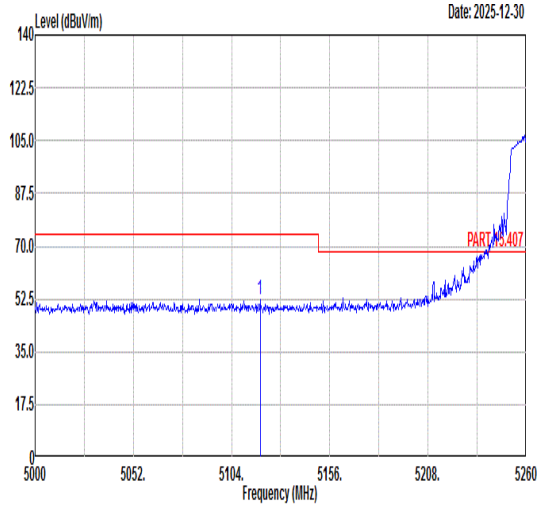 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5119.08 52.07 74.00 -21.93 41.80 35.27 8.48 33.48 100 39 PEAK	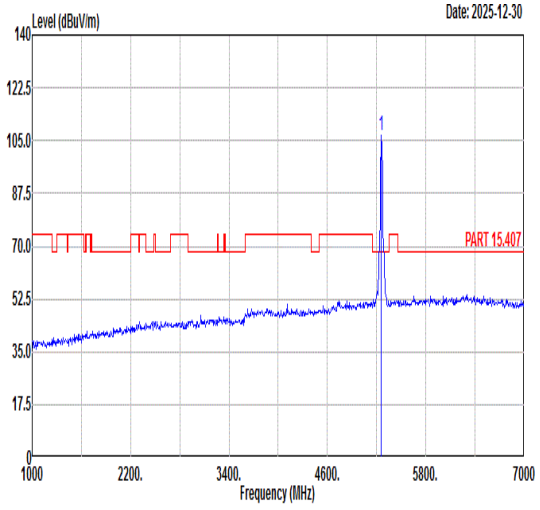 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5260.00 106.51 ------ ------ 95.74 35.35 8.87 33.45 100 39 PEAK
Avg	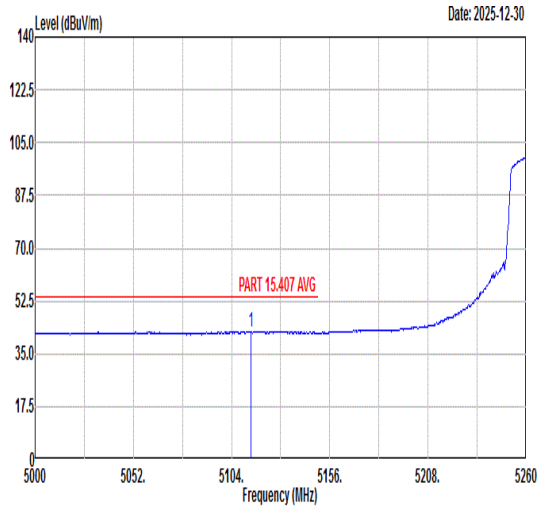 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5114.40 42.47 54.00 -11.53 32.21 35.27 8.47 33.48 100 39 AVERAGE	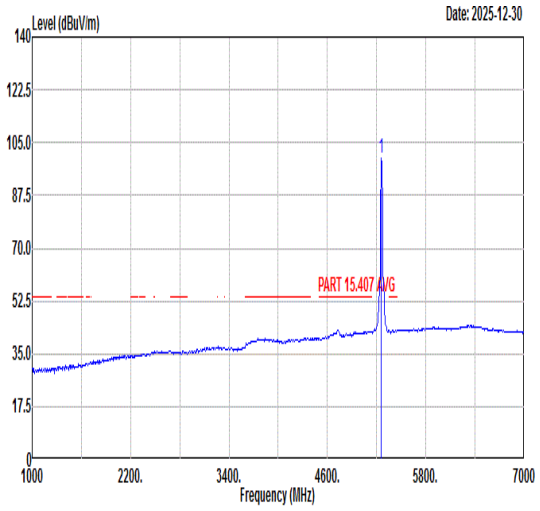 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5260.00 99.76 ------ ------ 88.95 35.36 8.90 33.45 100 39 AVERAGE

Mode	4	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz	
ANT	22	
Pol.	Horizontal	Fundamental
Peak	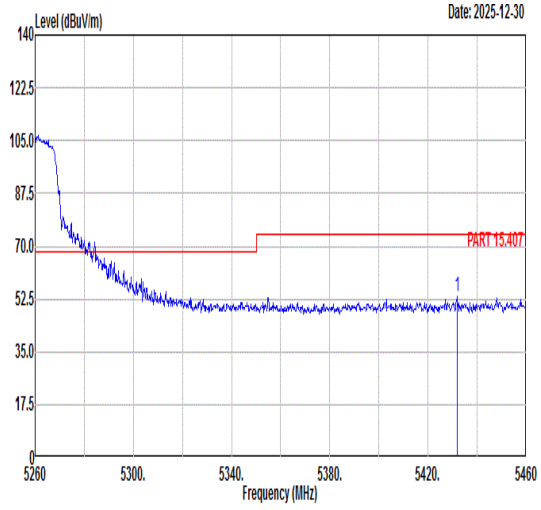 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5431.80 53.24 74.00 -20.76 41.52 35.46 9.67 33.41 100 39 PEAK	Blank
Avg	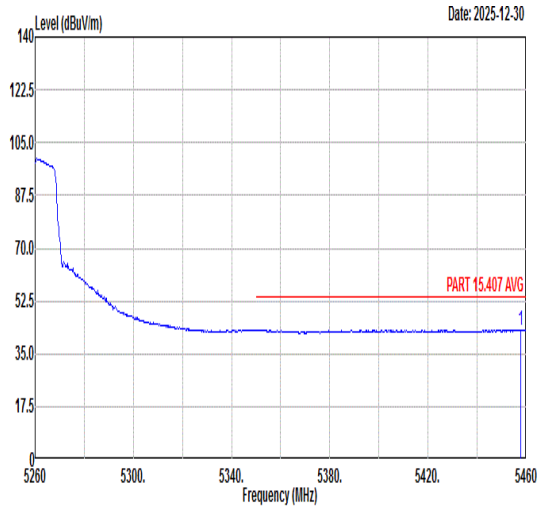 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5457.60 42.91 54.00 -11.09 31.16 35.47 9.69 33.41 100 39 AVERAGE	Blank

Mode	4	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	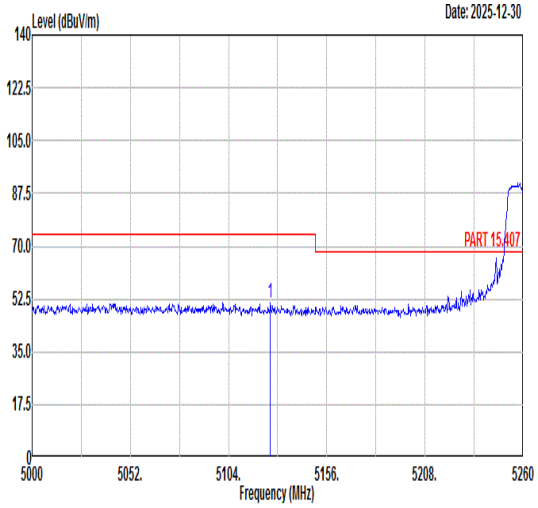 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5126.10 51.23 74.00 -22.77 40.93 35.28 8.49 33.47 300 235 PEAK	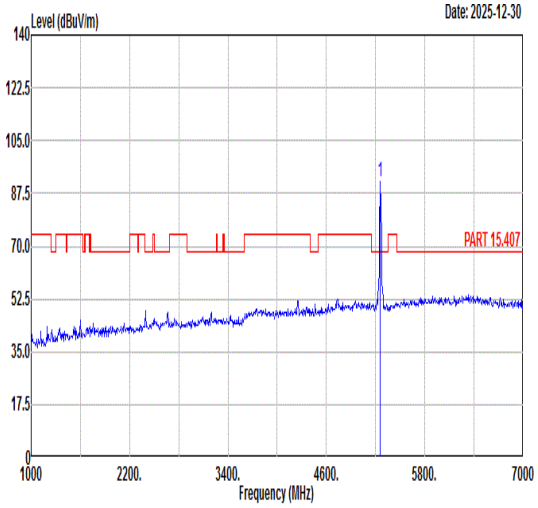 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5260.00 91.47 ------ ------ 80.66 35.36 8.90 33.45 300 235 PEAK
Avg	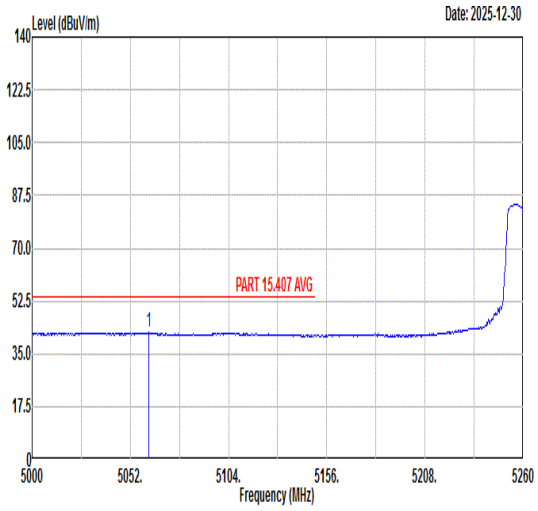 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5061.88 42.02 54.00 -11.98 31.90 35.24 8.37 33.49 300 235 AVERAGE	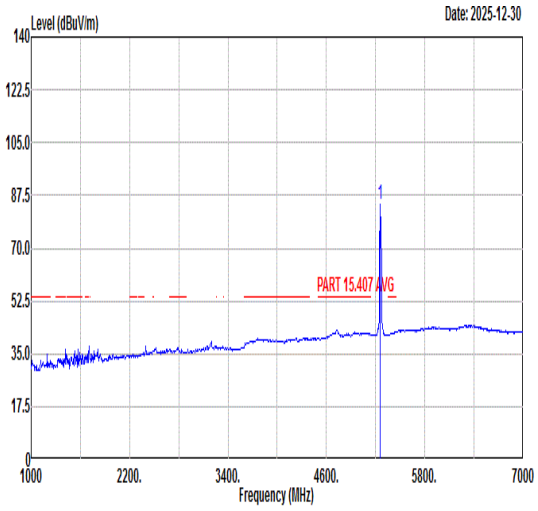 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5260.00 84.46 ------ ------ 73.69 35.35 8.87 33.45 300 235 AVERAGE

Mode	4	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	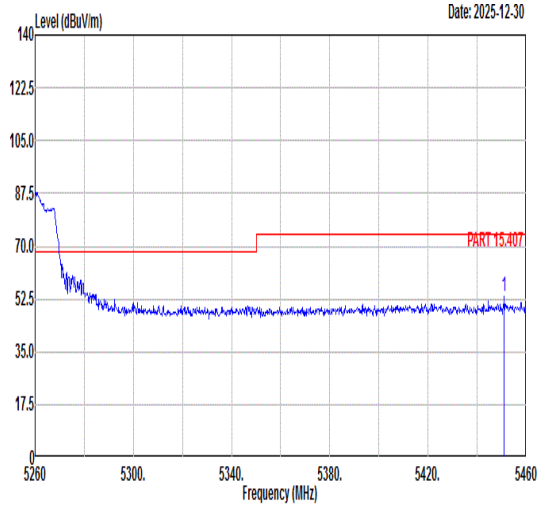 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5451.00 53.42 74.00 -20.58 41.68 35.47 9.68 33.41 300 235 PEAK	Blank
Avg	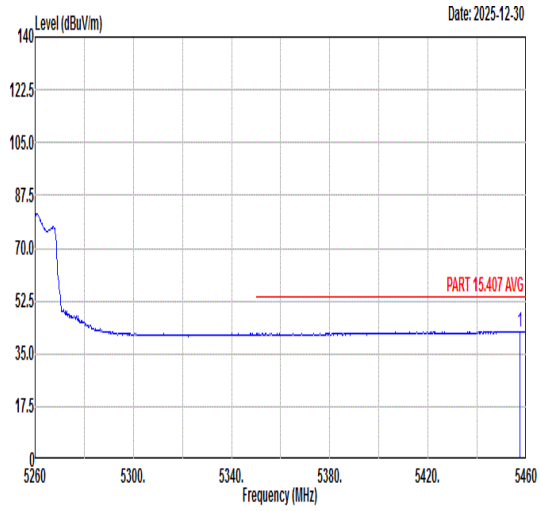 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5457.40 42.47 54.00 -11.53 30.72 35.47 9.69 33.41 300 235 AVERAGE	Blank

Mode	4	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz	
ANT	22	
Pol.	Horizontal	Vertical
Peak Avg	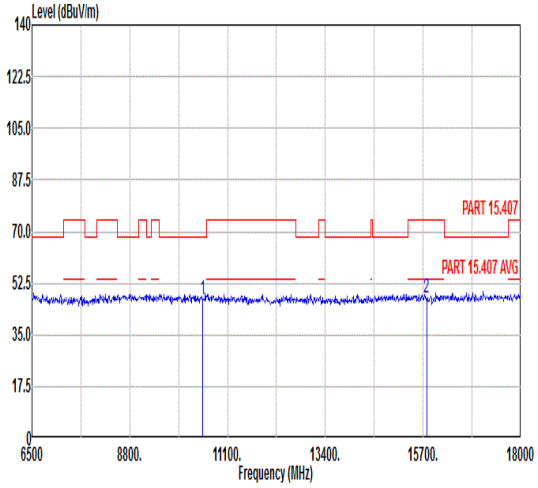 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 10520.00 46.90 68.30 -21.40 47.77 38.11 12.18 51.16 --- --- Peak 2 15780.00 47.29 74.00 -26.71 44.07 41.18 14.69 52.65 --- --- Peak	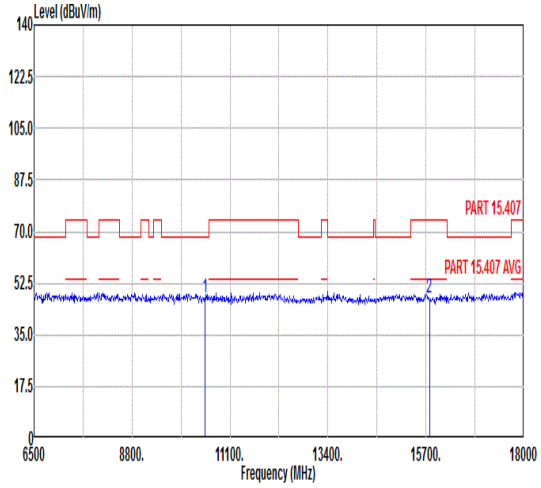 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 10520.00 47.50 68.30 -20.80 48.37 38.11 12.18 51.16 --- --- Peak 2 15780.00 47.70 74.00 -26.30 44.48 41.18 14.69 52.65 --- --- Peak

Mode	5	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz	
ANT	22	
Pol.	Horizontal	Fundamental
Peak	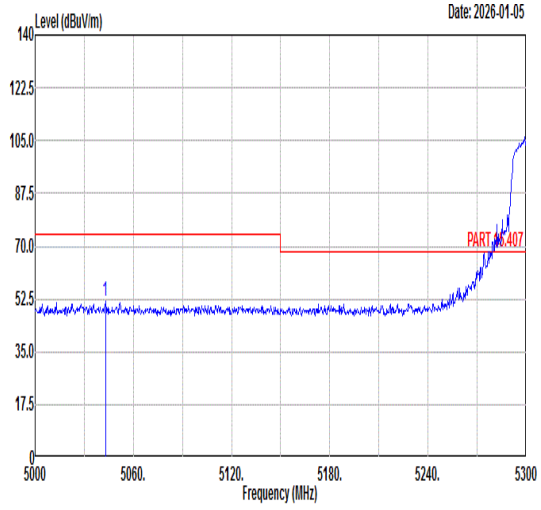 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 5042.90 51.74 74.00 -22.26 41.66 35.23 8.34 33.49 100 61 PEAK	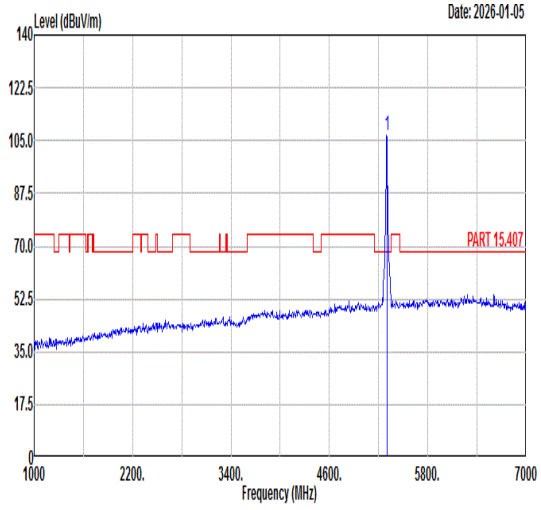 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 5300.00 106.46 ------ ------ 95.43 35.38 9.09 33.44 100 61 PEAK
Avg	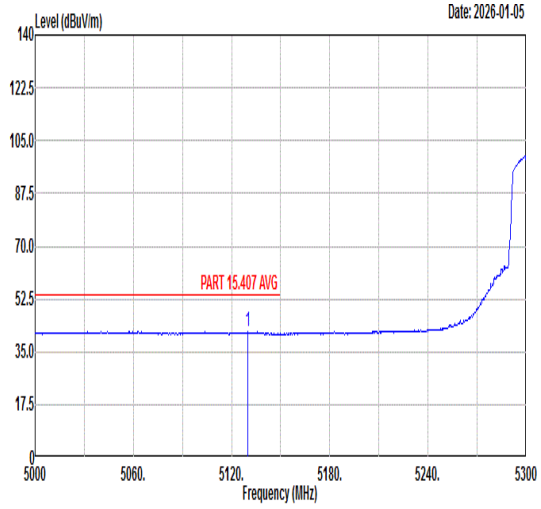 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 5129.90 41.58 54.00 -12.42 31.27 35.28 8.50 33.47 100 61 AVERAGE	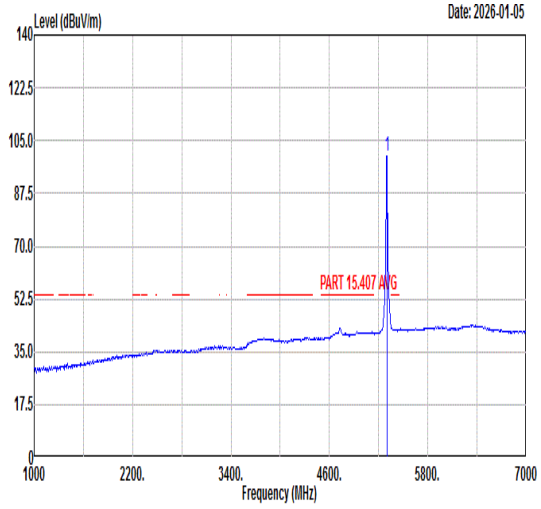 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 5300.00 99.63 ------ ------ 88.60 35.38 9.09 33.44 100 61 AVERAGE

Mode	5	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz	
ANT	22	
Pol.	Horizontal	Fundamental
Peak	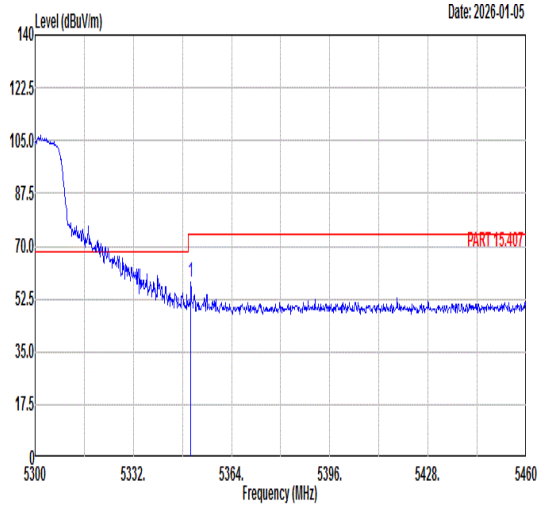 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5350.72 58.11 74.00 -15.89 46.76 35.41 9.37 33.43 100 61 PEAK	Blank
Avg	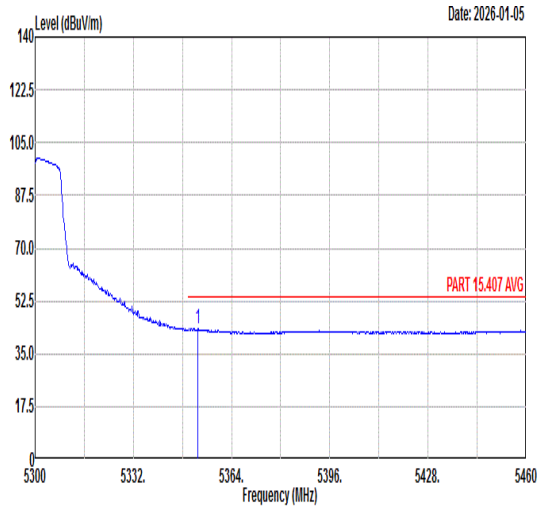 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5352.96 43.35 54.00 -10.65 31.99 35.41 9.38 33.43 100 61 AVERAGE	Blank

Mode	5	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	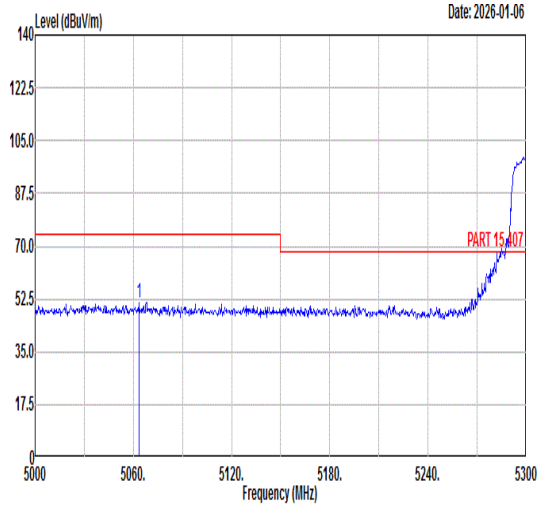 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5063.30 51.49 74.00 -22.51 41.36 35.24 8.38 33.49 396 287 PEAK	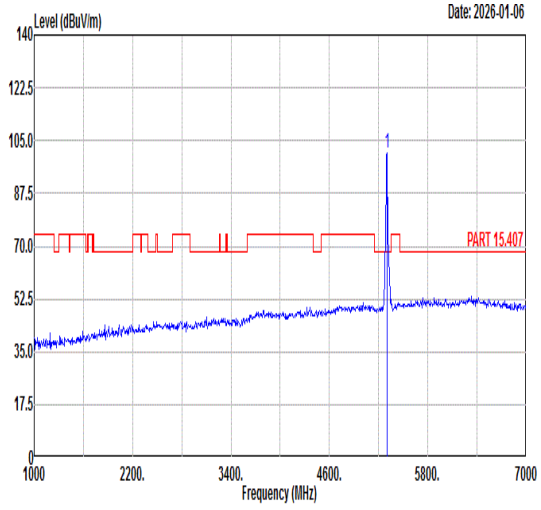 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5300.00 100.74 ------ ------ 89.68 35.38 9.12 33.44 396 287 PEAK
Avg	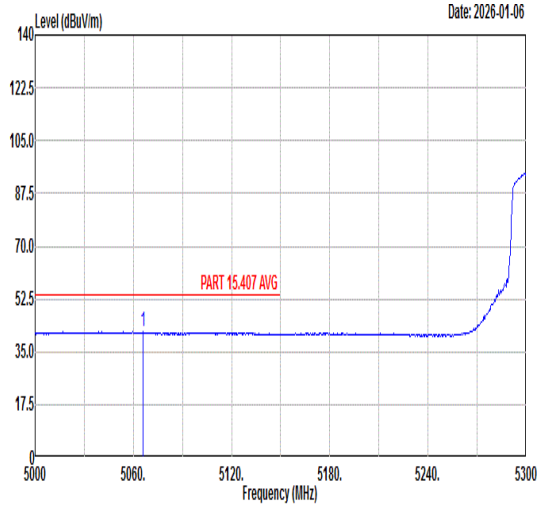 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5066.00 41.74 54.00 -12.26 31.61 35.24 8.38 33.49 396 287 AVERAGE	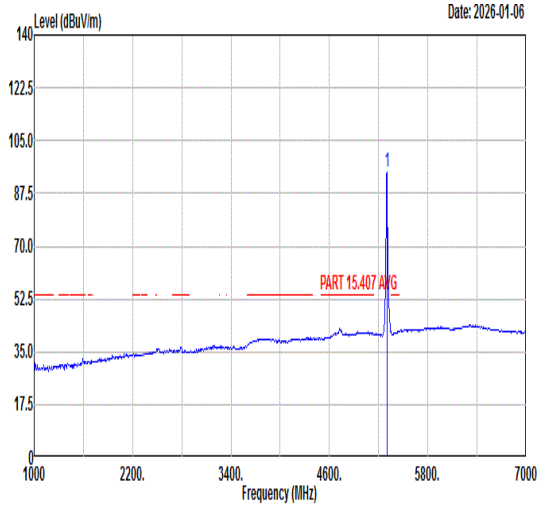 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5300.00 94.49 ------ ------ 83.43 35.38 9.12 33.44 396 287 AVERAGE

Mode	5	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	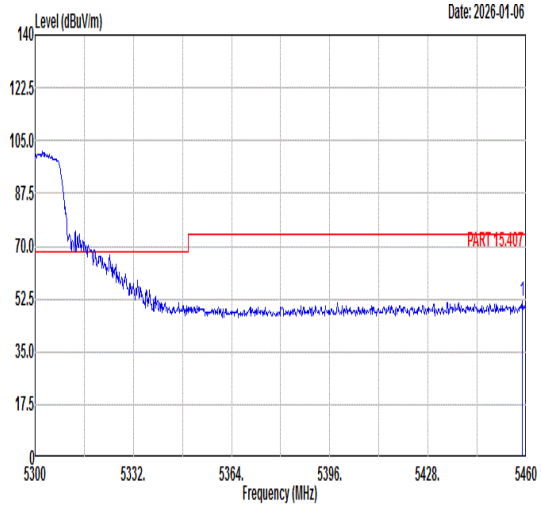 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5458.72 51.92 74.00 -22.08 40.16 35.48 9.69 33.41 396 287 PEAK	Blank
Avg	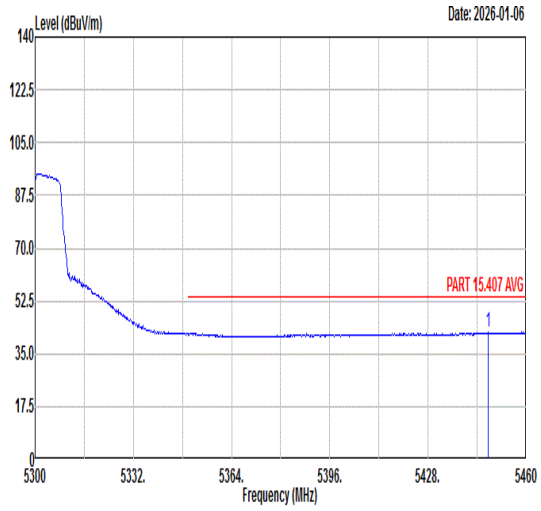 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5447.68 42.12 54.00 -11.88 30.38 35.47 9.68 33.41 396 287 AVERAGE	Blank

Mode	5	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz	
ANT	22	
Pol.	Horizontal	Vertical
Peak Avg	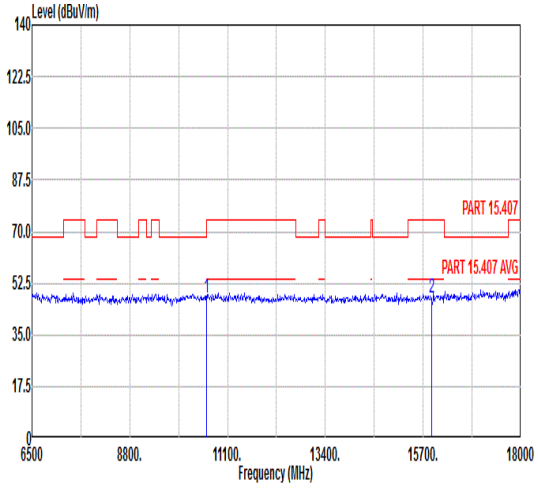 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 10600.00 47.41 74.00 -26.59 48.04 38.14 12.23 51.00 --- --- Peak 2 15900.00 47.42 74.00 -26.58 44.08 41.32 14.75 52.73 --- --- Peak	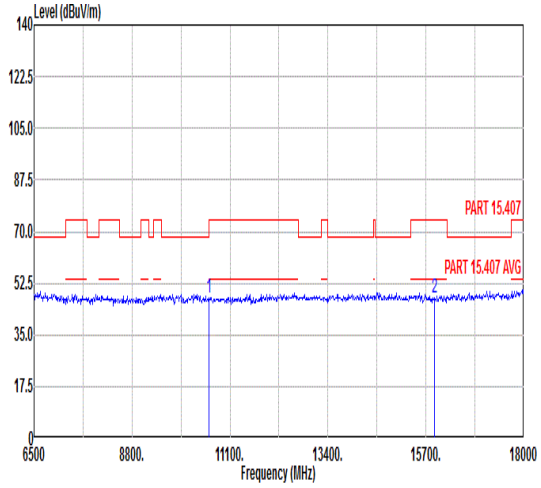 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 10600.00 47.54 74.00 -26.46 48.17 38.14 12.23 51.00 --- --- Peak 2 15900.00 47.52 74.00 -26.48 44.18 41.32 14.75 52.73 --- --- Peak

Mode	6	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz	
ANT	22	
Pol.	Horizontal	Fundamental
Peak	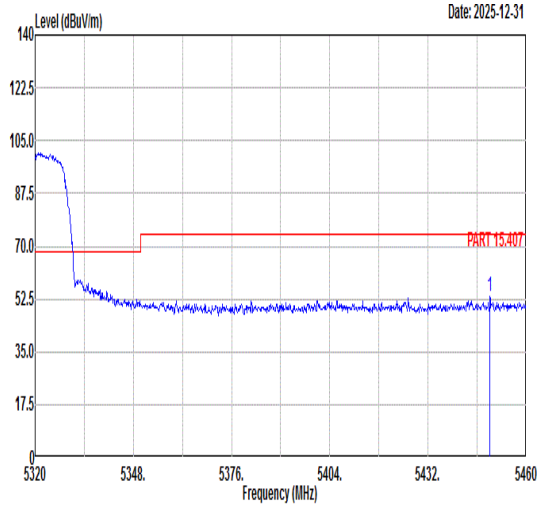 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 5449.64 53.35 74.00 -20.65 41.61 35.47 9.68 33.41 101 35 PEAK	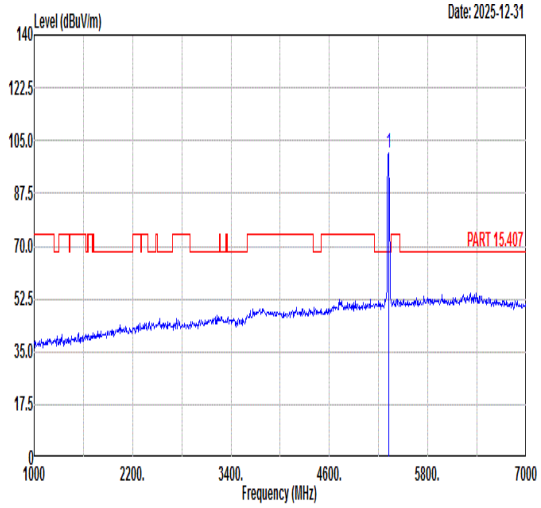 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 5320.00 100.67 ------ ------ 89.51 35.39 9.21 33.44 101 35 PEAK
Avg	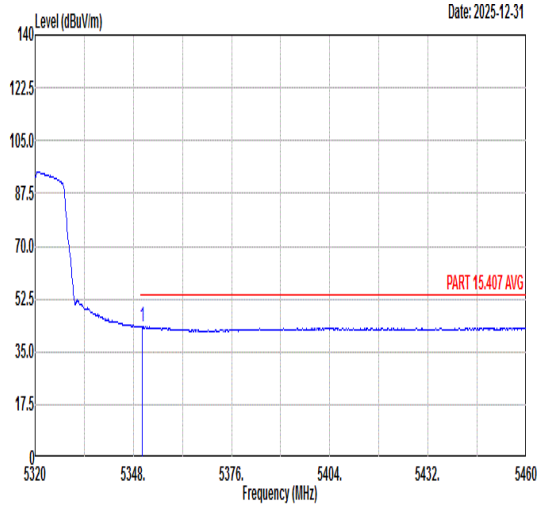 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 5350.52 43.25 54.00 -10.75 31.90 35.41 9.37 33.43 101 35 AVERAGE	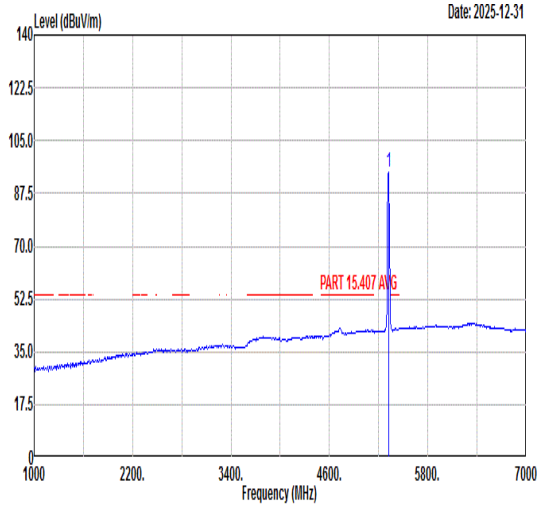 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark 1 5320.00 94.54 ------ ------ 83.38 35.39 9.21 33.44 101 35 AVERAGE

Mode	6	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	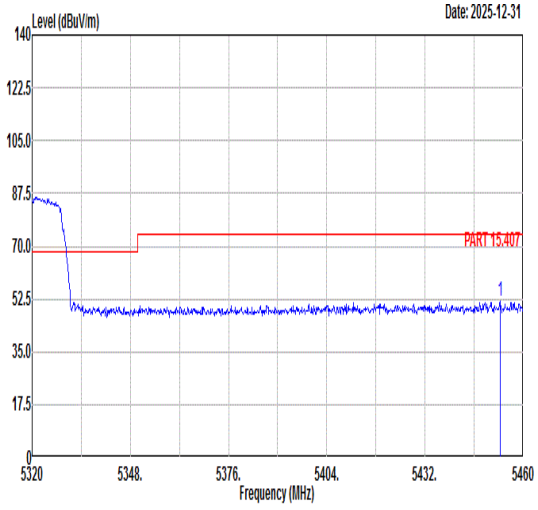 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5453.42 51.73 74.00 -22.27 39.99 35.47 9.68 33.41 100 22 PEAK	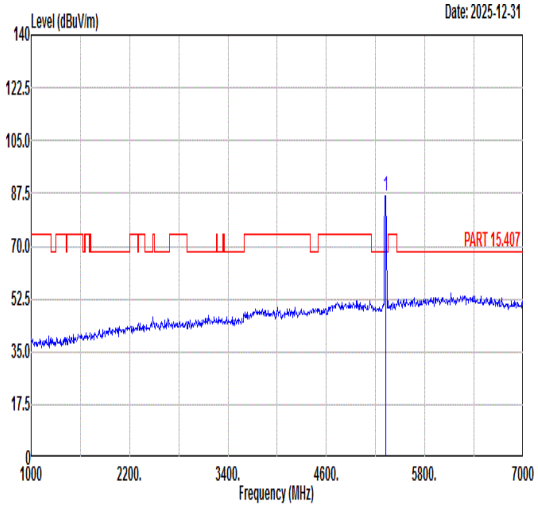 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5320.00 86.63 ------ ------ 75.47 35.39 9.21 33.44 100 22 PEAK
Avg	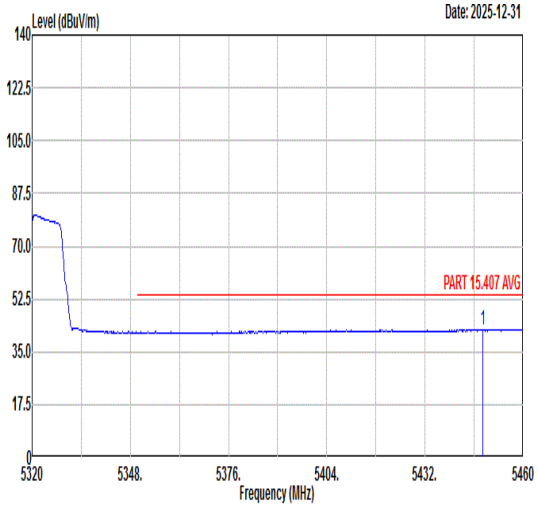 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5448.52 42.47 54.00 -11.53 30.73 35.47 9.68 33.41 100 22 AVERAGE	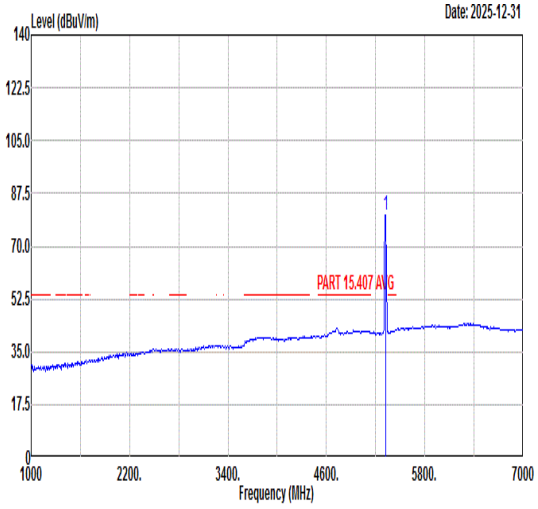 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5320.00 80.56 ------ ------ 69.40 35.39 9.21 33.44 100 22 AVERAGE

Mode	6	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz	
ANT	22	
Pol.	Horizontal	Vertical
Peak Avg	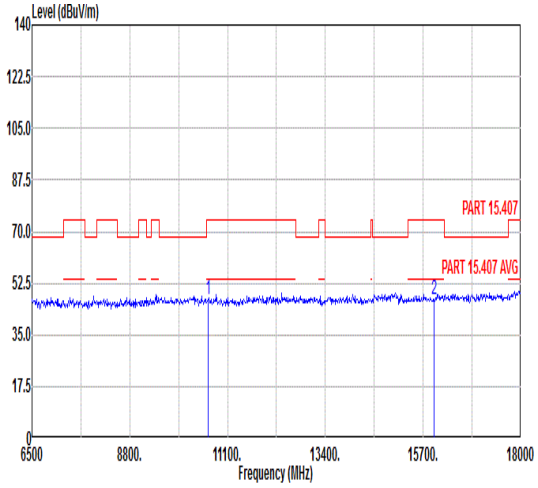 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 10640.00 47.06 74.00 -26.94 47.56 38.16 12.26 50.92 --- --- Peak 2 15960.00 46.82 74.00 -27.18 43.43 41.39 14.77 52.77 --- --- Peak	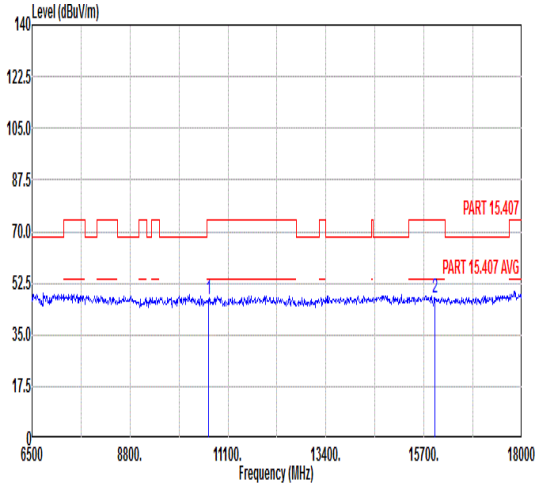 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 10640.00 47.25 74.00 -26.75 47.75 38.16 12.26 50.92 --- --- Peak 2 15960.00 47.31 74.00 -26.69 43.92 41.39 14.77 52.77 --- --- Peak

Mode	7
	Band Edge
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz
ANT	22

Pol.	Horizontal	Fundamental
Peak	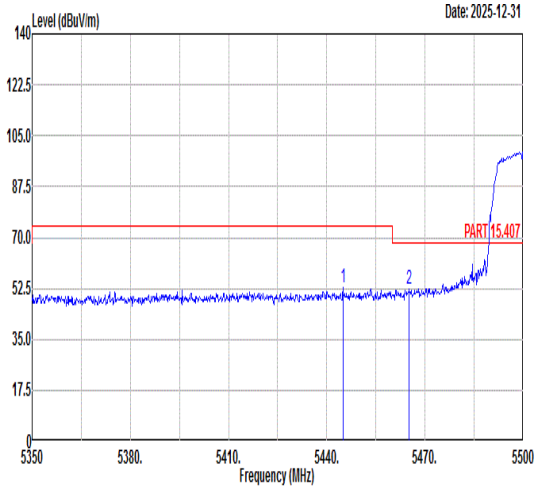 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5444.95 52.92 74.00 -21.08 41.18 35.47 9.68 33.41 114 58 PEAK 2 5465.20 52.31 68.30 -15.99 40.55 35.48 9.69 33.41 114 58 PEAK	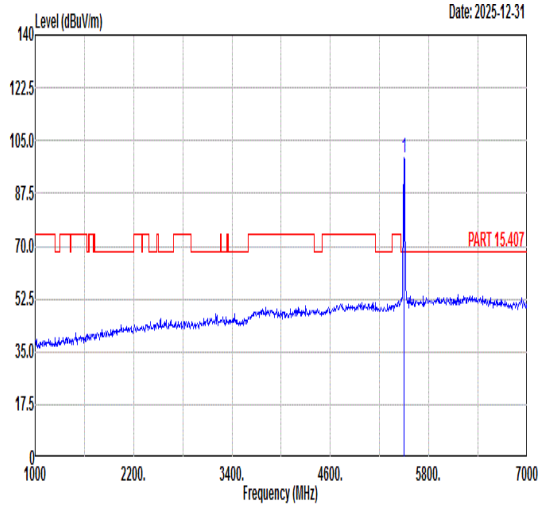 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5500.00 99.51 ------ ------ 87.70 35.50 9.71 33.40 114 58 PEAK
Avg	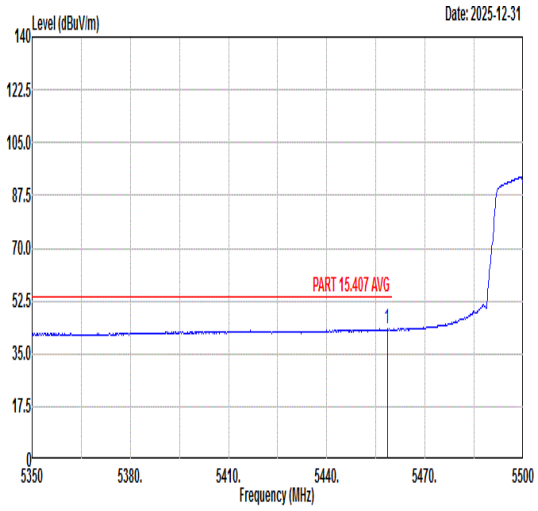 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5458.45 43.13 54.00 -10.87 31.37 35.48 9.69 33.41 114 58 AVERAGE	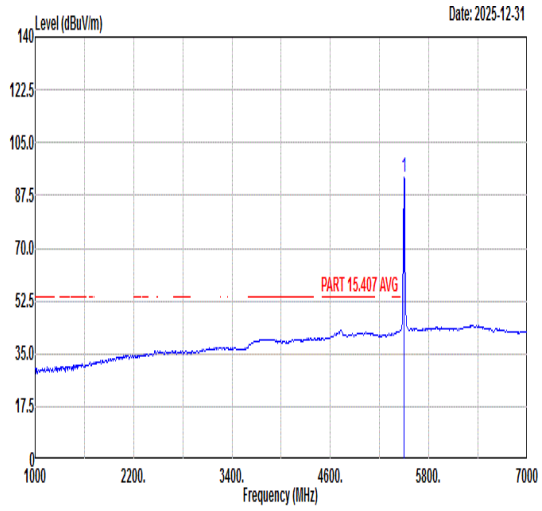 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5500.00 93.66 ------ ------ 81.85 35.50 9.71 33.40 114 58 AVERAGE

Mode	7
	Band Edge
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz
ANT	22

Pol.	Vertical	Fundamental
Peak	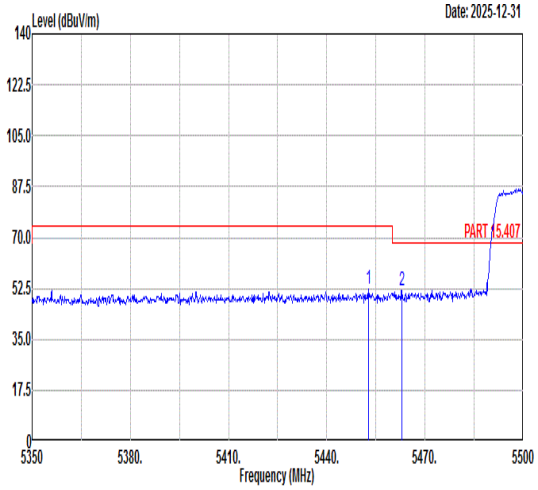 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5452.75 52.33 74.00 -21.67 40.59 35.47 9.68 33.41 100 268 PEAK 2 5462.95 51.86 68.30 -16.44 40.10 35.48 9.69 33.41 100 268 PEAK	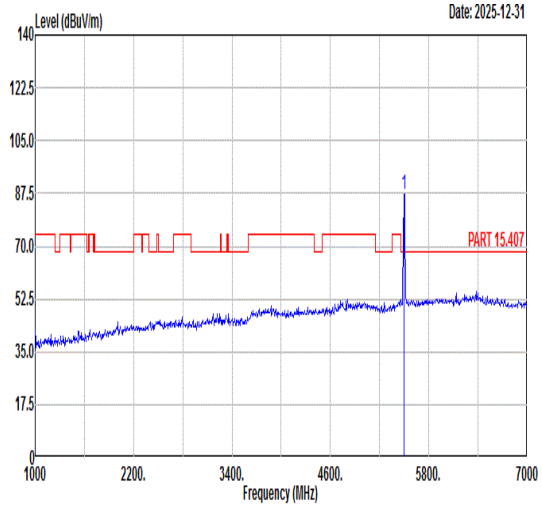 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5500.00 87.13 ------ ------ 75.32 35.50 9.71 33.40 100 268 PEAK
Avg	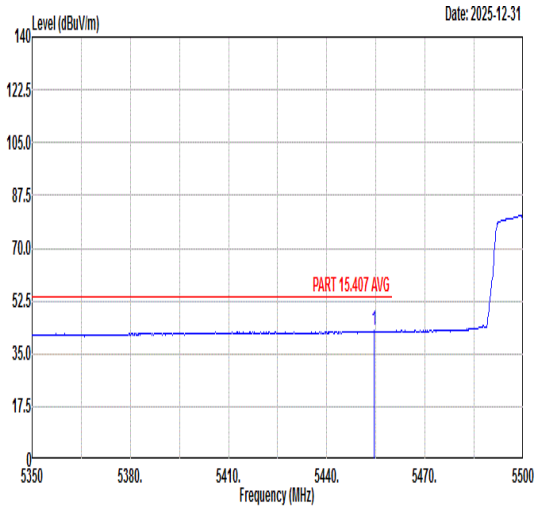 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5454.40 42.54 54.00 -11.46 30.80 35.47 9.68 33.41 100 268 AVERAGE	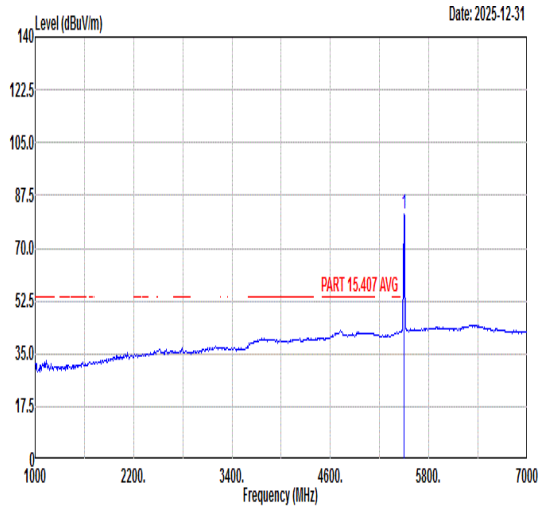 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5500.00 81.20 ------ ------ 69.39 35.50 9.71 33.40 100 268 AVERAGE

Mode	7	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz	
ANT	22	
Pol.	Horizontal	Vertical
Peak Avg	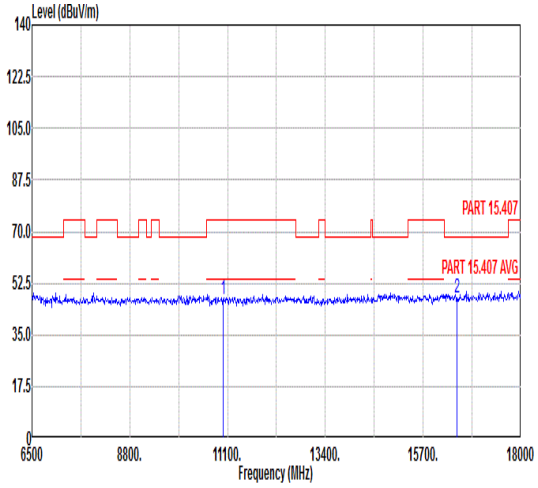 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 11000.00 47.11 74.00 -26.89 46.49 38.30 12.52 50.20 --- --- Peak 2 16500.00 47.73 68.30 -20.57 43.36 42.00 15.17 52.80 --- --- Peak	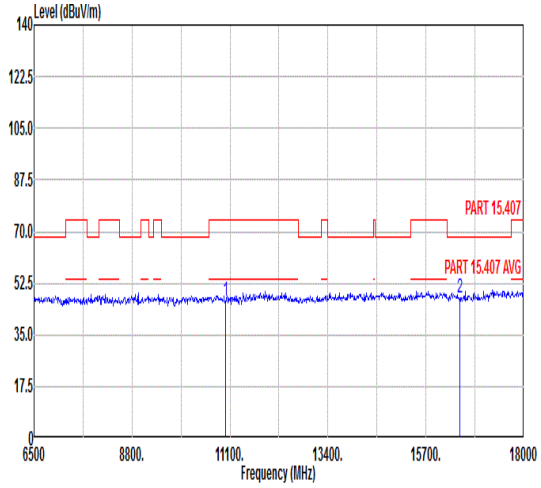 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 11000.00 46.66 74.00 -27.34 46.04 38.30 12.52 50.20 --- --- Peak 2 16500.00 47.59 68.30 -20.71 43.22 42.00 15.17 52.80 --- --- Peak

Mode	8
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz
ANT	22

Pol.	Horizontal	Fundamental
Peak	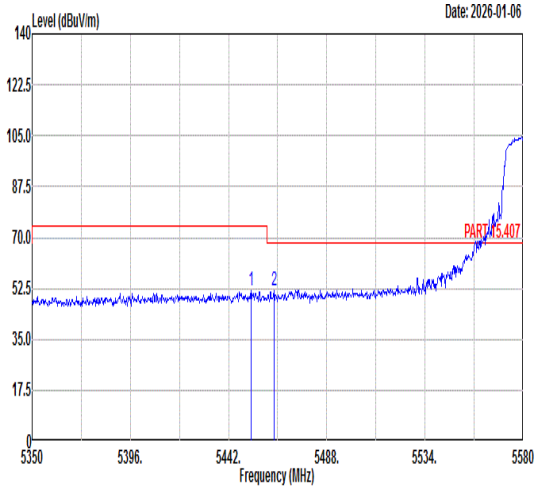 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5452.58 51.93 74.00 -22.07 40.19 35.47 9.68 33.41 100 42 PEAK 2 5463.16 51.83 68.30 -16.47 40.07 35.48 9.69 33.41 100 42 PEAK	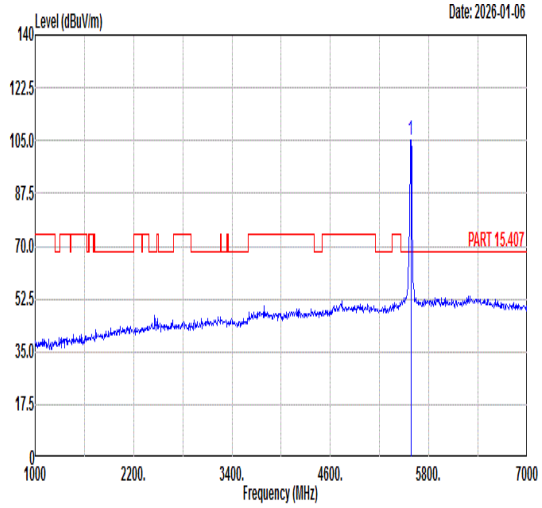 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5580.00 105.14 ------ ------ 93.19 35.62 9.75 33.42 100 42 PEAK
Avg	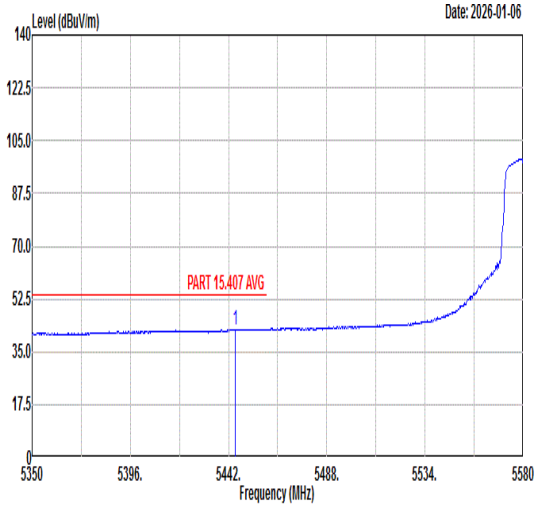 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5444.99 42.52 54.00 -11.48 30.78 35.47 9.68 33.41 100 42 AVERAGE	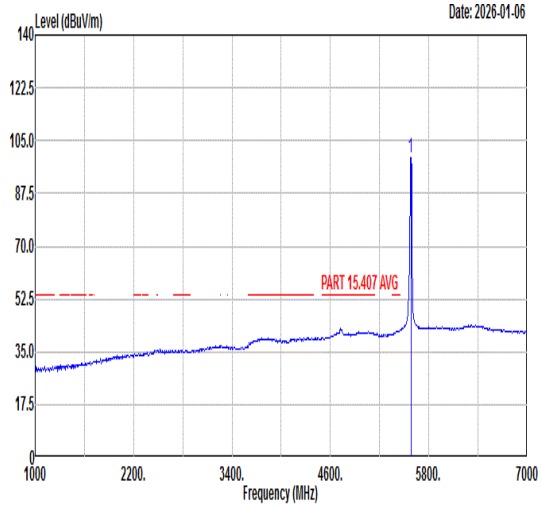 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5580.00 99.12 ------ ------ 87.18 35.61 9.75 33.42 100 42 AVERAGE

Mode	8	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz	
ANT	22	
Pol.	Horizontal	Fundamental
Peak	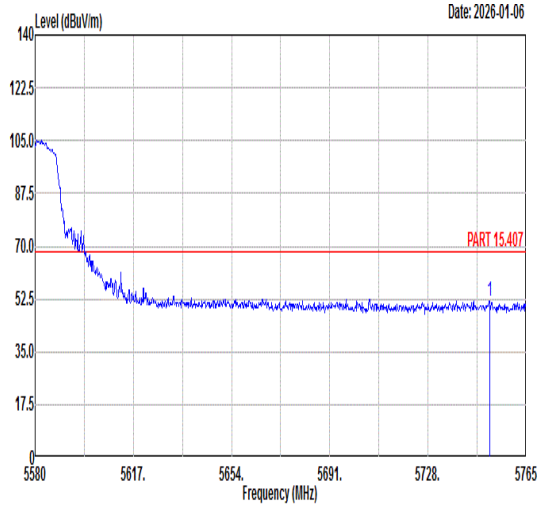 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5751.13 51.98 68.30 -16.32 39.51 35.85 10.07 33.45 100 42 PEAK	Blank

Mode	8
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz
ANT	22

Pol.	Vertical	Fundamental
Peak	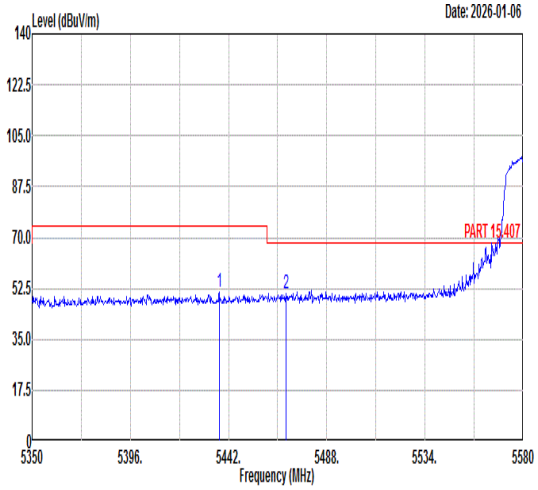 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5437.63 51.00 74.00 -23.00 39.27 35.46 9.68 33.41 114 179 PEAK 2 5468.91 50.75 68.30 -17.55 38.99 35.48 9.69 33.41 114 179 PEAK	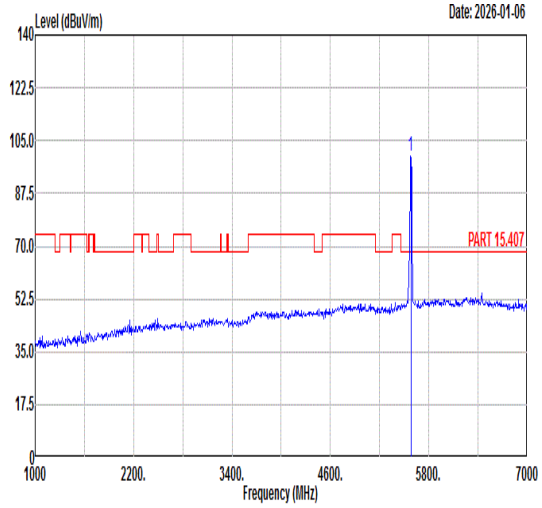 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5580.00 99.86 ------ ------ 87.92 35.61 9.75 33.42 114 179 PEAK
Avg	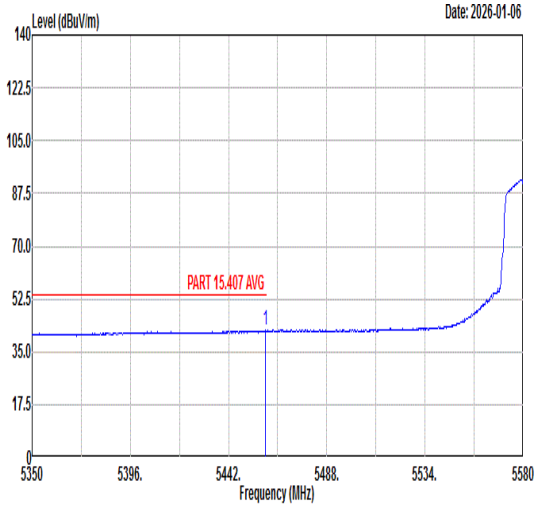 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5459.25 42.26 54.00 -11.74 30.50 35.48 9.69 33.41 114 179 AVERAGE	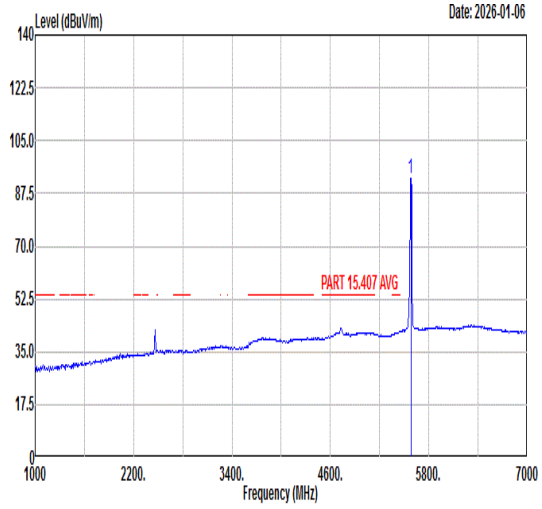 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5580.00 92.40 ------ ------ 80.45 35.62 9.75 33.42 114 179 AVERAGE

Mode	8	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	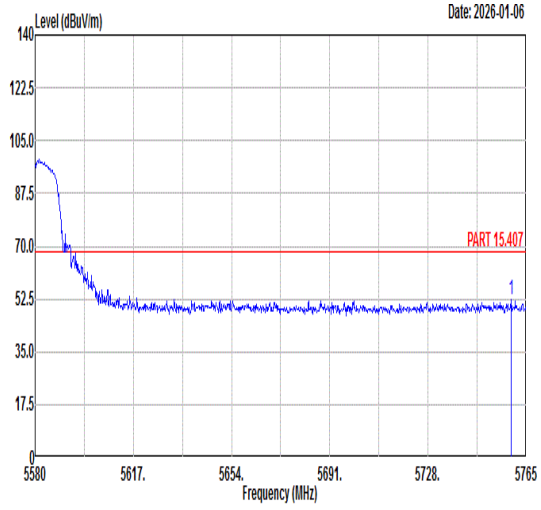 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5759.45 52.11 68.30 -16.19 39.61 35.86 10.09 33.45 114 179 PEAK	Blank

Mode	8	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz	
ANT	22	
Pol.	Horizontal	Vertical
Peak Avg	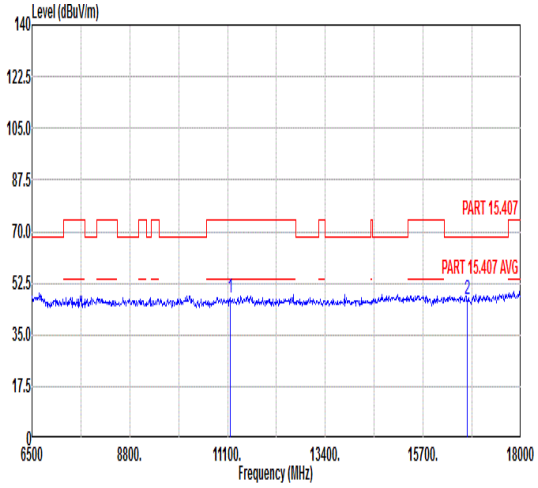 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 11160.00 47.61 74.00 -26.39 46.96 38.35 12.64 50.34 --- --- Peak 2 16740.00 47.01 68.30 -21.29 42.19 42.27 15.35 52.80 --- --- Peak	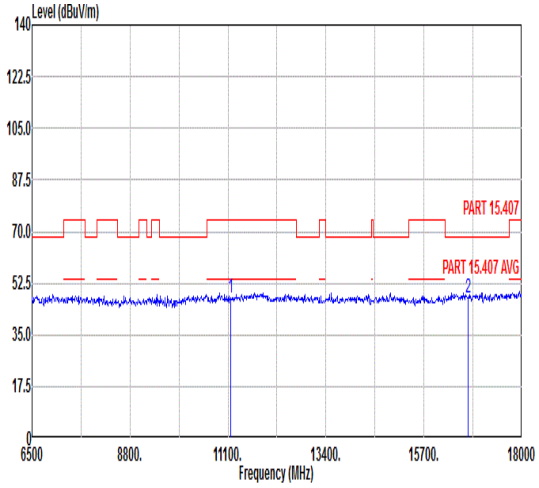 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 11160.00 47.73 74.00 -26.27 47.08 38.35 12.64 50.34 --- --- Peak 2 16740.00 47.55 68.30 -20.75 42.73 42.27 15.35 52.80 --- --- Peak

Mode	9	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz	
ANT	22	
Pol.	Horizontal	Fundamental
Peak	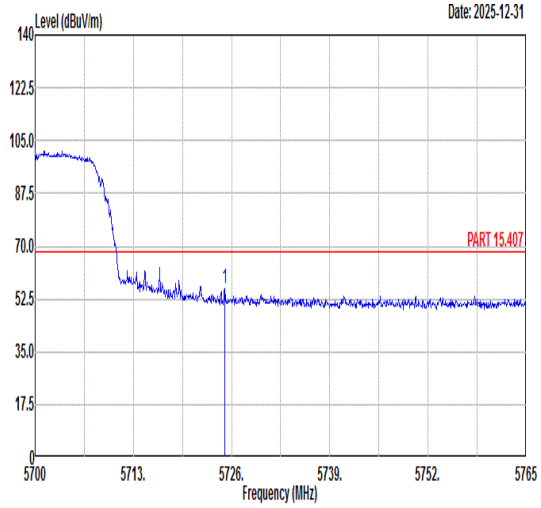 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5725.09 55.87 68.30 -12.43 43.48 35.82 10.02 33.45 100 49 PEAK	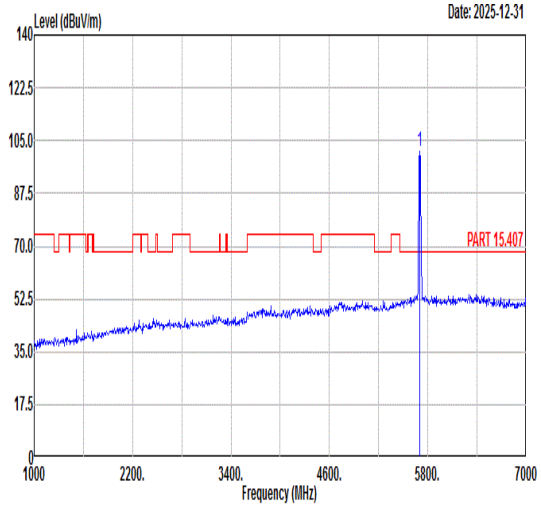 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5700.00 101.21 ------ ------ 88.89 35.79 9.97 33.44 100 49 PEAK
Avg	Blank	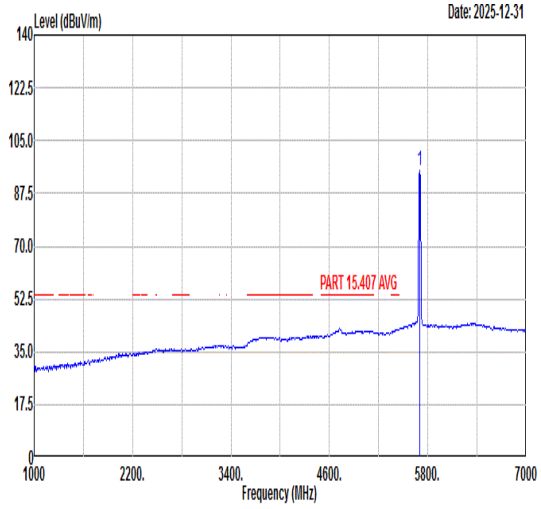 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5700.00 95.06 ------ ------ 82.76 35.78 9.96 33.44 100 49 AVERAGE

Mode	9	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	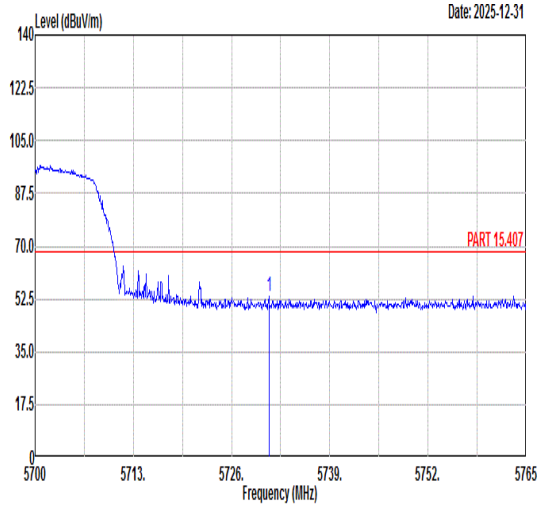 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5730.94 53.50 68.30 -14.80 41.10 35.82 10.03 33.45 100 186 PEAK	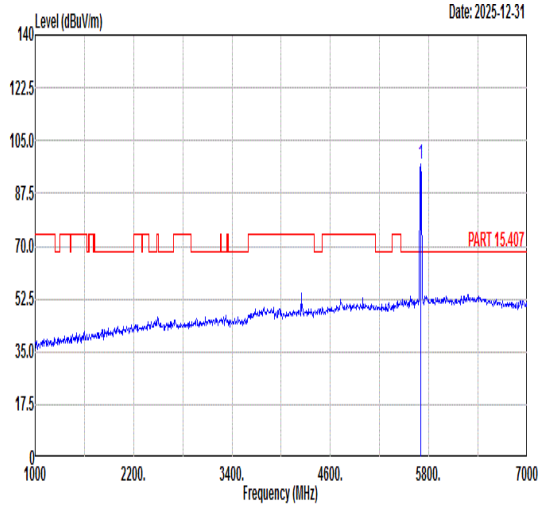 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5700.00 97.06 ------ ------ 84.76 35.78 9.96 33.44 100 186 PEAK
Avg	Blank	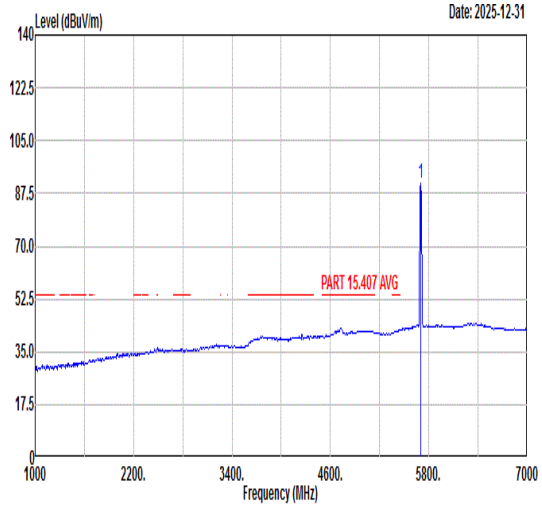 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5700.00 90.85 ------ ------ 78.55 35.78 9.96 33.44 100 186 AVERAGE

Mode	9	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz	
ANT	22	
Pol.	Horizontal	Vertical
Peak Avg	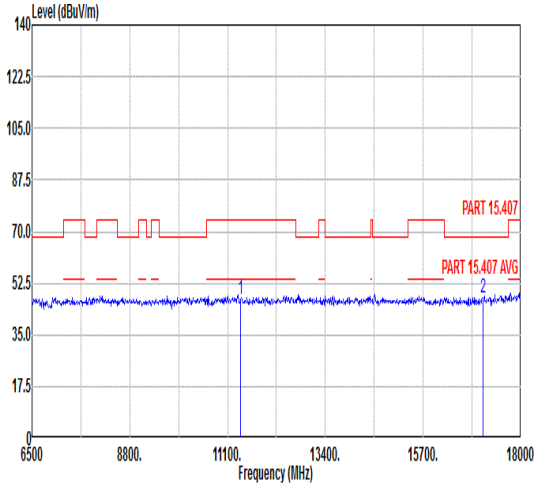 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 11400.00 47.01 74.00 -26.99 46.34 38.42 12.81 50.56 --- --- Peak 2 17100.00 47.38 68.30 -20.92 41.90 42.68 15.62 52.82 --- --- Peak	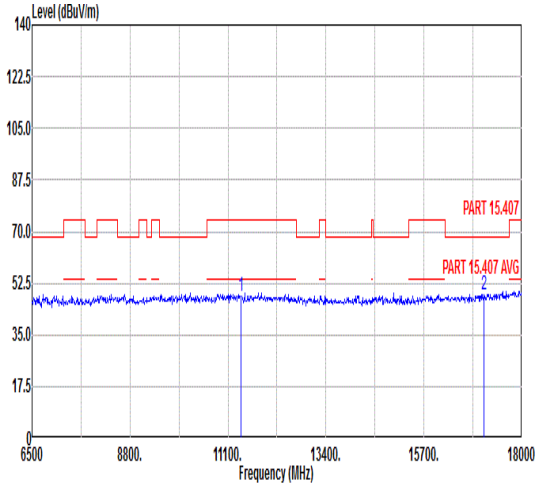 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 11400.00 47.94 74.00 -26.06 47.27 38.42 12.81 50.56 --- --- Peak 2 17100.00 48.39 68.30 -19.91 42.91 42.68 15.62 52.82 --- --- Peak

Mode	10	
	Band Edge	
	U-NII-1_5.15-5.25_802.11n HT20_CH36_Full_5180MHz	
ANT	22	
Pol.	Horizontal	Fundamental
Peak	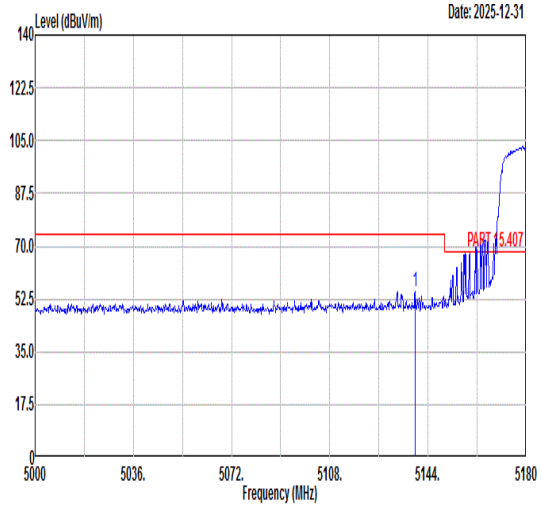 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5139.32 55.05 74.00 -18.95 44.72 35.28 8.52 33.47 100 34 PEAK	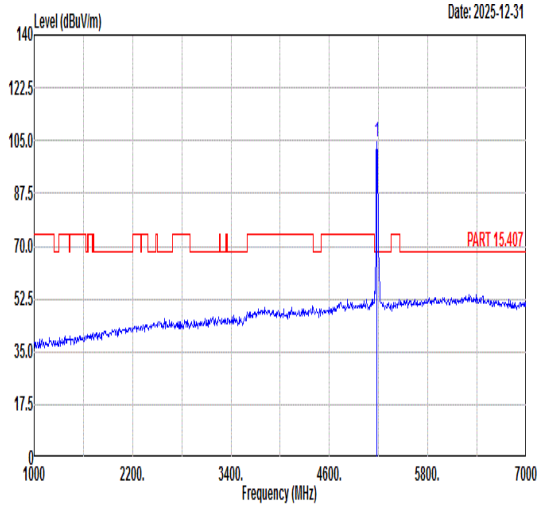 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5180.00 104.76 ------ ------ 94.33 35.31 8.58 33.46 100 34 PEAK
Avg	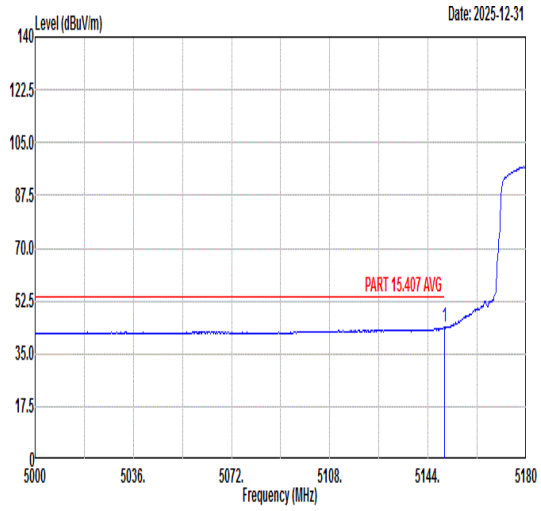 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5149.94 43.74 54.00 -10.26 33.38 35.29 8.54 33.47 100 34 AVERAGE	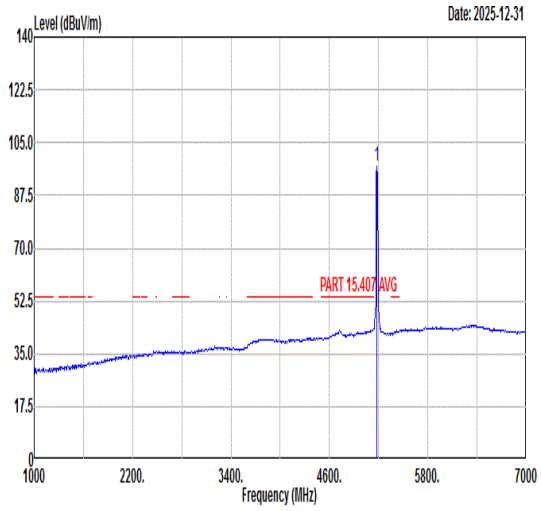 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5180.00 97.03 ------ ------ 86.60 35.31 8.58 33.46 100 34 AVERAGE

Mode	10	
	Band Edge	
	U-NII-1_5.15-5.25_802.11n HT20_CH36_Full_5180MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	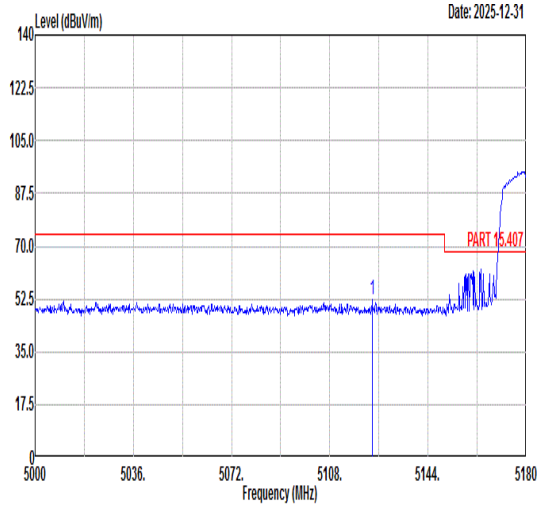 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5123.48 52.21 74.00 -21.79 41.93 35.27 8.49 33.48 100 259 PEAK	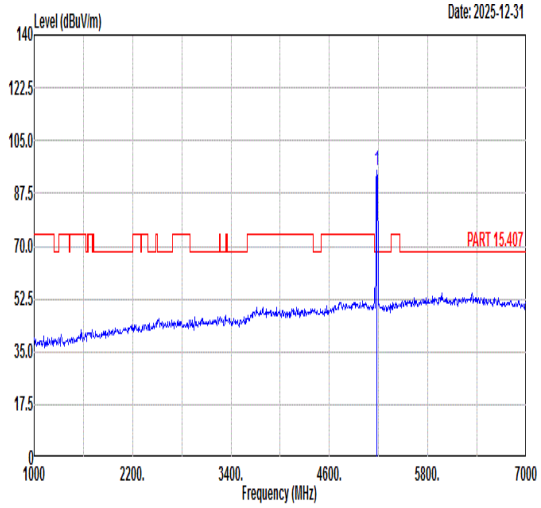 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5180.00 95.25 ------ ------ 84.81 35.31 8.59 33.46 100 259 PEAK
Avg	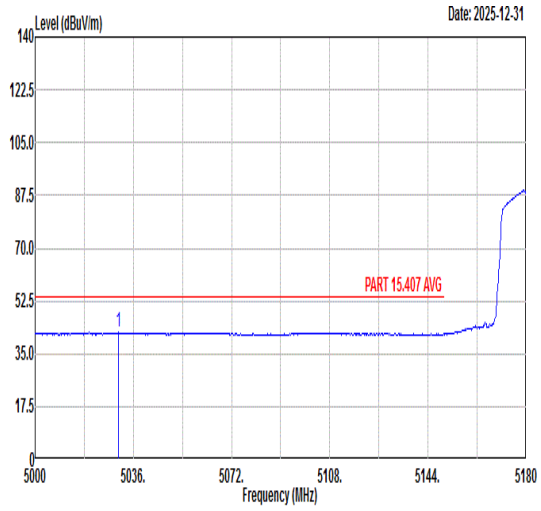 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5030.42 42.20 54.00 -11.80 32.16 35.22 8.31 33.49 100 259 AVERAGE	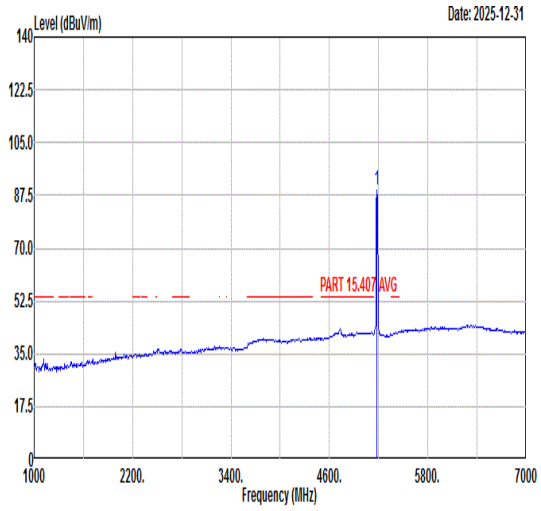 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5180.00 89.30 ------ ------ 78.86 35.31 8.59 33.46 100 259 AVERAGE

Mode	10	
	Harmonic	
	U-NII-1_5.15-5.25_802.11n HT20_CH36_Full_5180MHz	
ANT	22	
Pol.	Horizontal	Vertical
Peak Avg	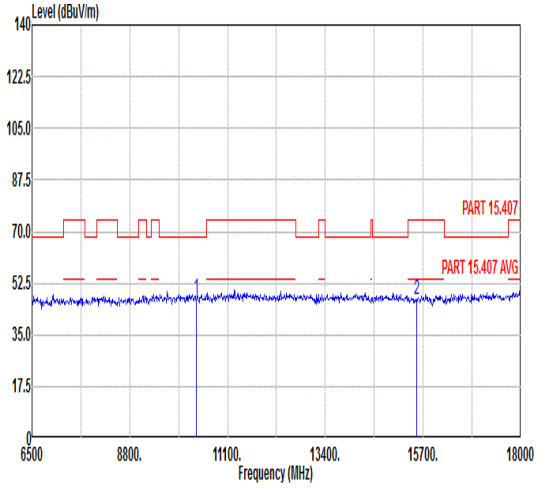 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 10360.00 47.78 68.30 -20.52 49.16 38.04 12.06 51.48 --- --- Peak 2 15540.00 47.27 74.00 -26.73 44.26 40.91 14.58 52.48 --- --- Peak	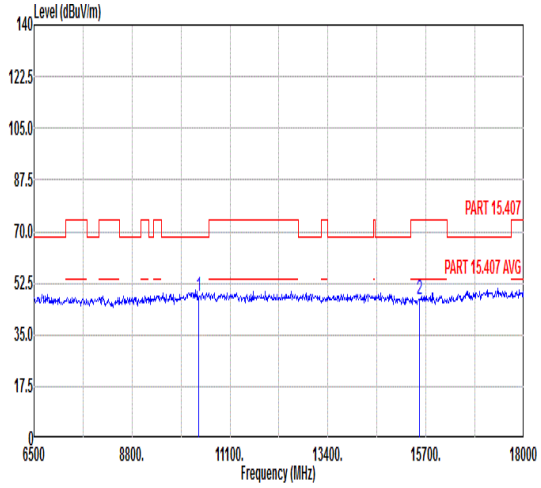 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 10360.00 47.82 68.30 -20.48 49.20 38.04 12.06 51.48 --- --- Peak 2 15540.00 47.28 74.00 -26.72 44.27 40.91 14.58 52.48 --- --- Peak

Mode	11	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11n HT20_CH44_Full_5220MHz	
ANT	22	
Pol.	Horizontal	Fundamental
Peak	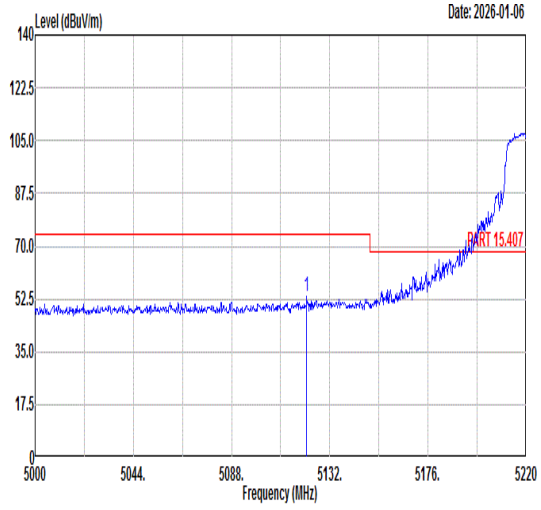 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5121.66 53.51 74.00 -20.49 43.24 35.27 8.48 33.48 100 39 PEAK	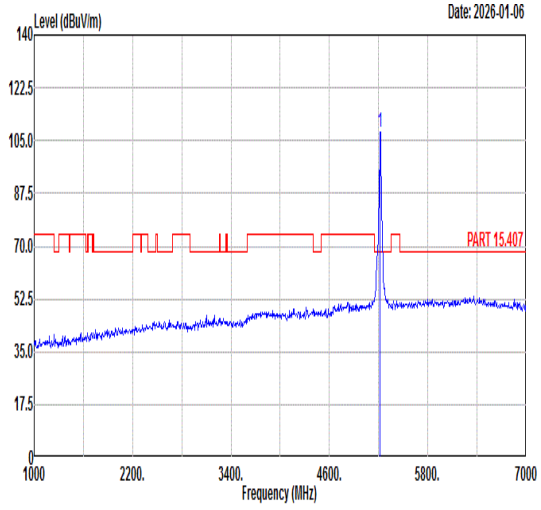 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5220.00 107.94 ------ ------ 97.39 35.33 8.68 33.46 100 39 PEAK
Avg	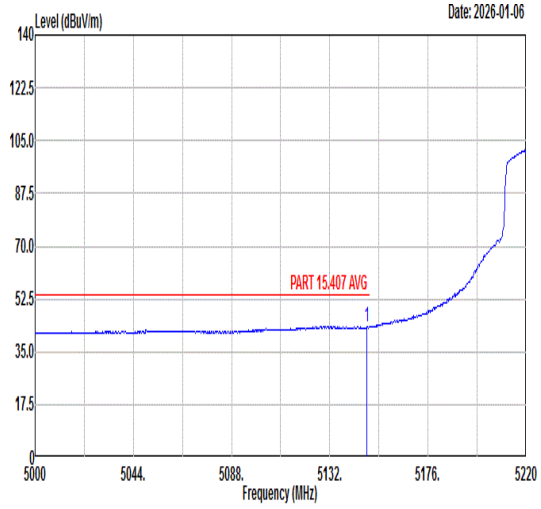 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5148.50 43.49 54.00 -10.51 33.14 35.29 8.53 33.47 100 39 AVERAGE	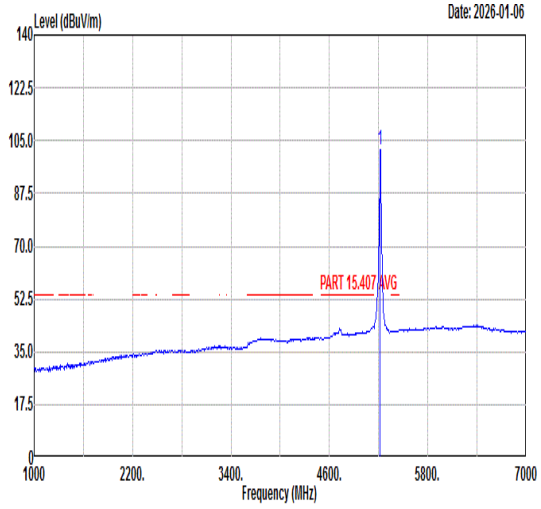 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5220.00 101.80 ------ ------ 91.22 35.33 8.71 33.46 100 39 AVERAGE

Mode	11	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11n HT20_CH44_Full_5220MHz	
ANT	22	
Pol.	Horizontal	Fundamental
Peak	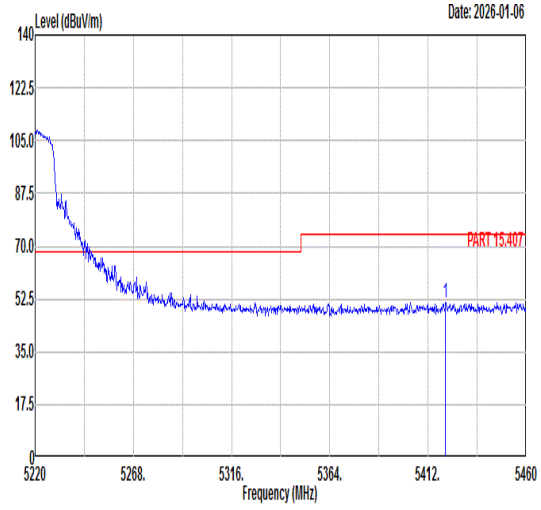 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5420.64 51.17 74.00 -22.83 39.47 35.45 9.67 33.42 100 39 PEAK	Blank
Avg	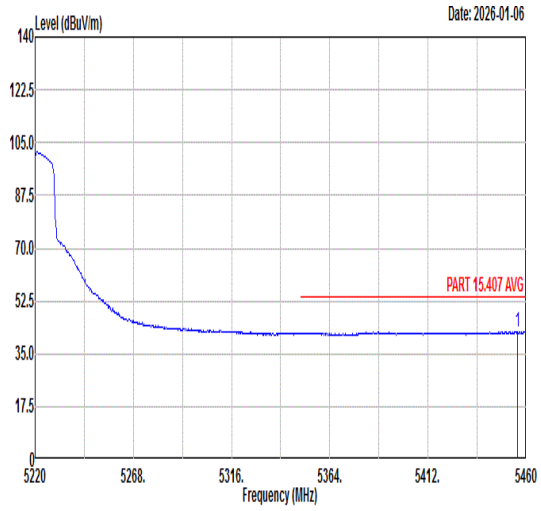 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5455.68 42.31 54.00 -11.69 30.57 35.47 9.68 33.41 100 39 AVERAGE	Blank

Mode	11	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11n HT20_CH44_Full_5220MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	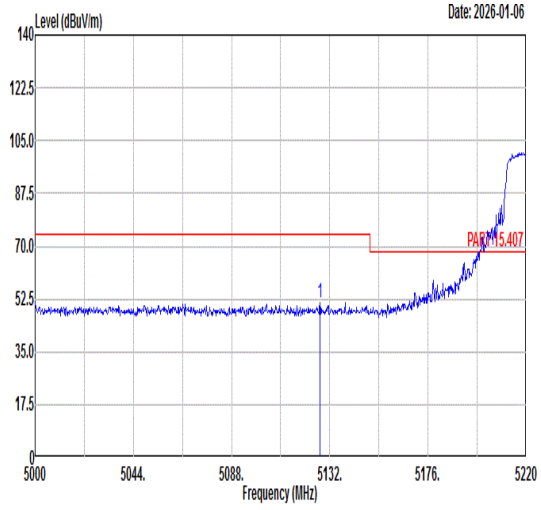 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5127.60 51.19 74.00 -22.81 40.89 35.28 8.49 33.47 100 271 PEAK	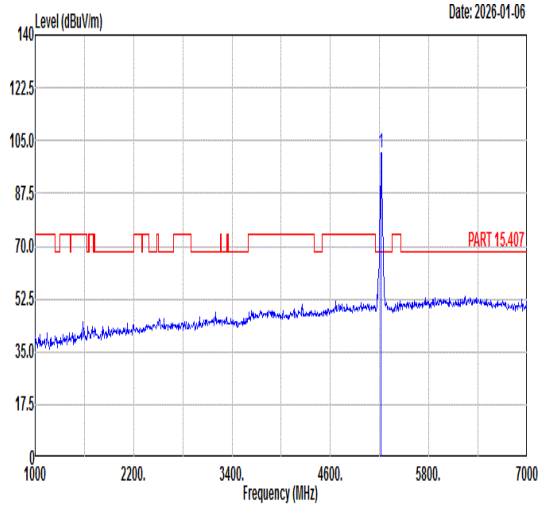 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5220.00 101.04 ------ ------ 90.49 35.33 8.68 33.46 100 271 PEAK
Avg	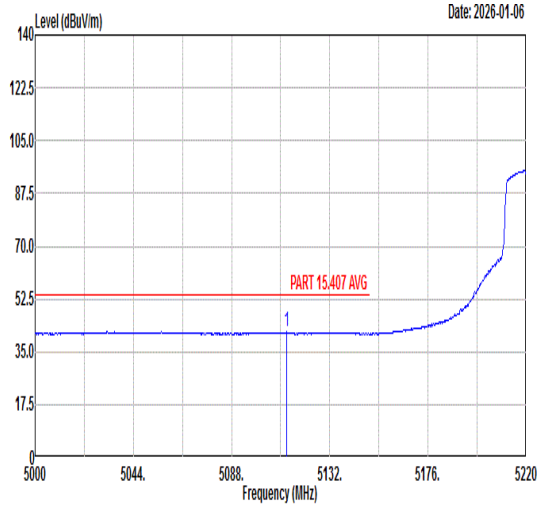 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5112.64 41.60 54.00 -12.40 31.34 35.27 8.47 33.48 100 271 AVERAGE	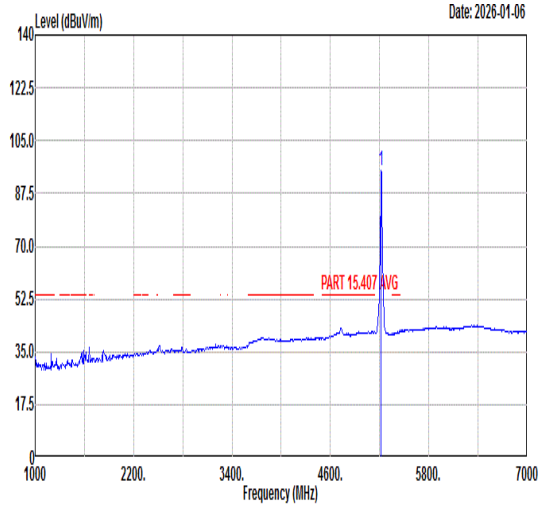 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5220.00 95.03 ------ ------ 84.48 35.33 8.68 33.46 100 271 AVERAGE

Mode	11	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11n HT20_CH44_Full_5220MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	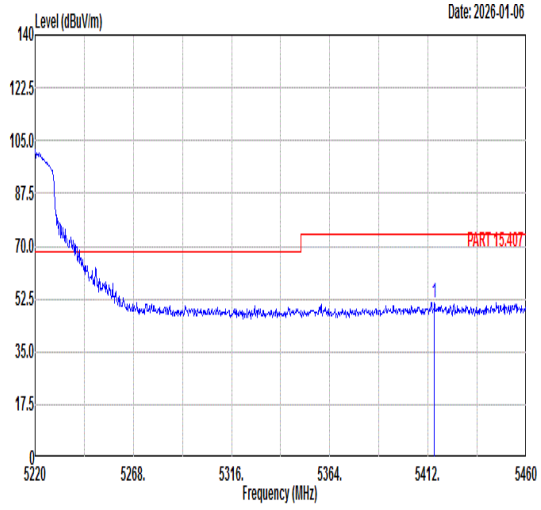 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5415.12 51.04 74.00 -22.96 39.35 35.45 9.66 33.42 100 271 PEAK	Blank
Avg	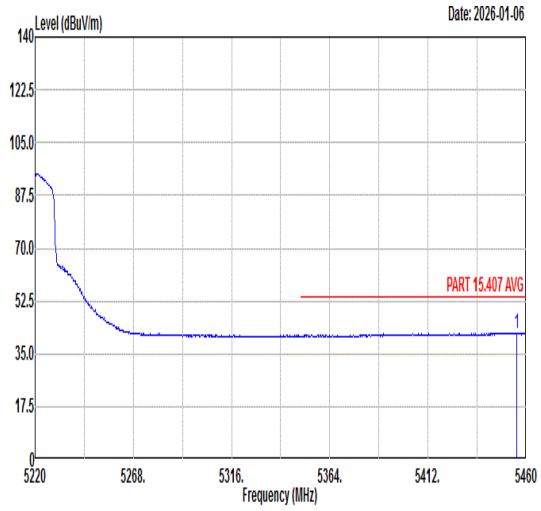 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5455.44 41.94 54.00 -12.06 30.20 35.47 9.68 33.41 100 271 AVERAGE	Blank

Mode	11	
	Harmonic	
	U-NII-1_5.15-5.25_802.11n HT20_CH44_Full_5220MHz	
ANT	22	
Pol.	Horizontal	Vertical
Peak Avg	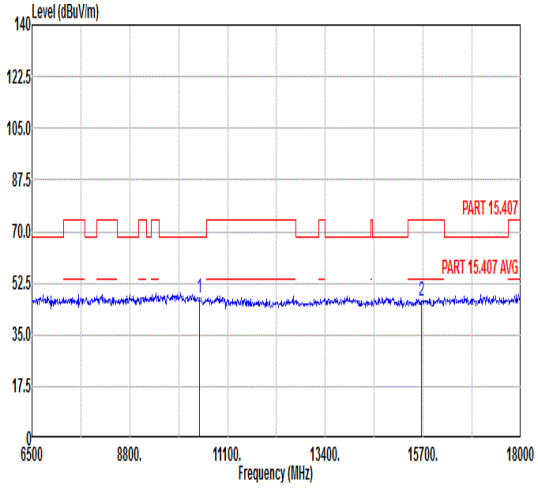 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 10440.00 47.30 68.30 -21.00 48.42 38.08 12.12 51.32 --- --- Peak 2 15660.00 46.63 74.00 -27.37 43.50 41.05 14.64 52.56 --- --- Peak	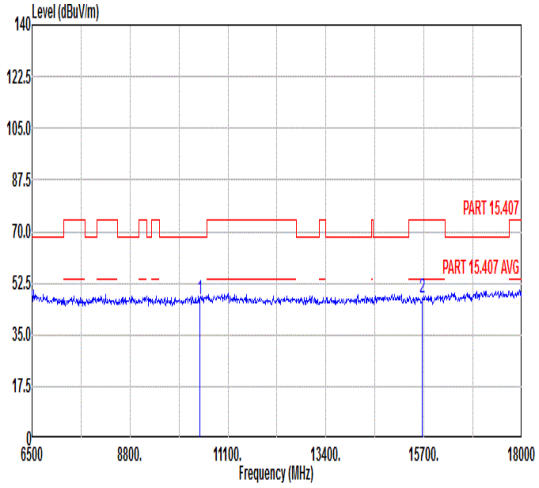 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 10440.00 47.20 68.30 -21.10 48.32 38.08 12.12 51.32 --- --- Peak 2 15660.00 47.59 74.00 -26.41 44.46 41.05 14.64 52.56 --- --- Peak

Mode	12	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11n HT20_CH48_Full_5240MHz	
ANT	22	
Pol.	Horizontal	Fundamental
Peak	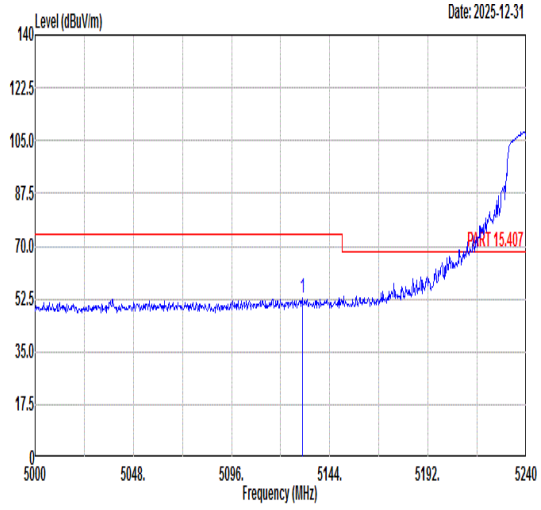 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5130.56 52.86 74.00 -21.14 42.55 35.28 8.50 33.47 100 28 PEAK	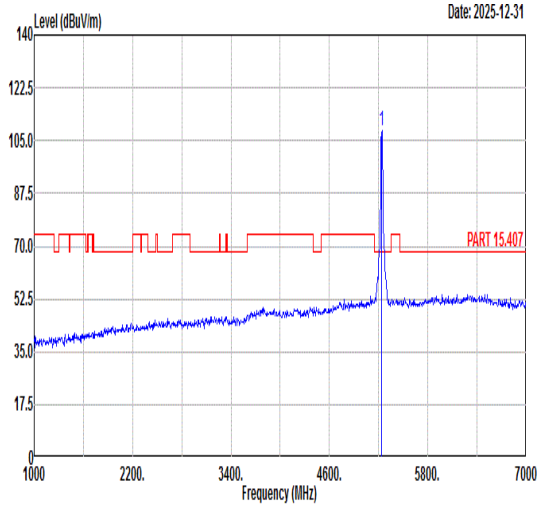 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5240.00 108.05 ------ ------ 97.34 35.35 8.81 33.45 100 28 PEAK
Avg	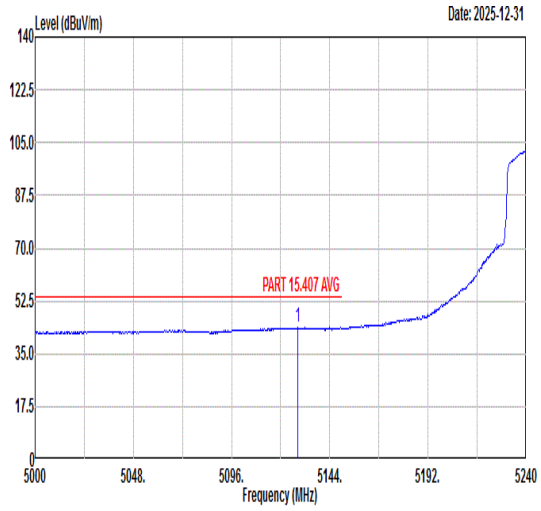 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5128.16 43.69 54.00 -10.31 33.38 35.28 8.50 33.47 100 28 AVERAGE	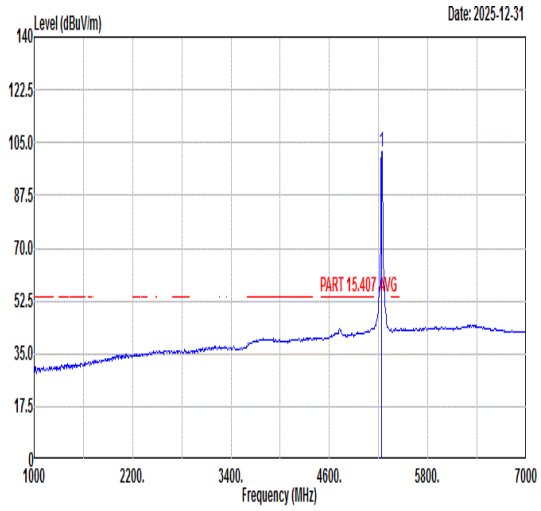 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5240.00 101.88 ------ ------ 91.17 35.35 8.81 33.45 100 28 AVERAGE

Mode	12	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11n HT20_CH48_Full_5240MHz	
ANT	22	
Pol.	Horizontal	Fundamental
Peak	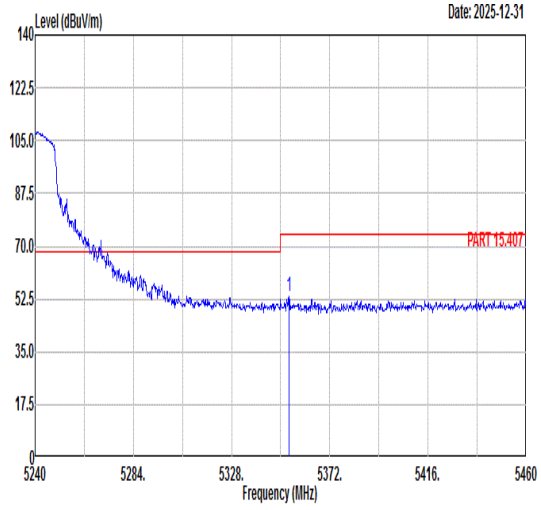 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5353.74 53.37 74.00 -20.63 42.01 35.41 9.38 33.43 100 28 PEAK	Blank
Avg	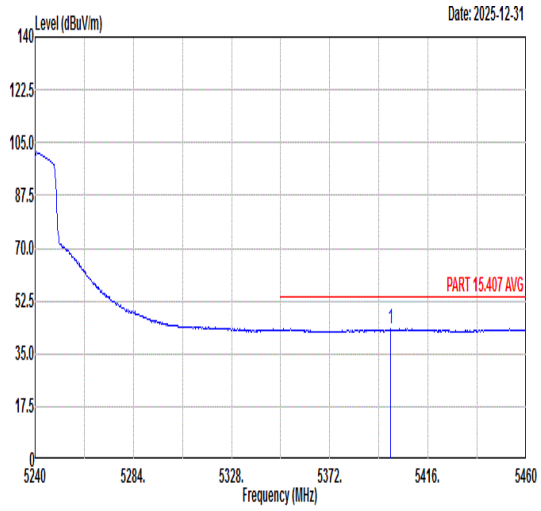 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5399.28 43.18 54.00 -10.82 31.54 35.44 9.62 33.42 100 28 AVERAGE	Blank

Mode	12	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11n HT20_CH48_Full_5240MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	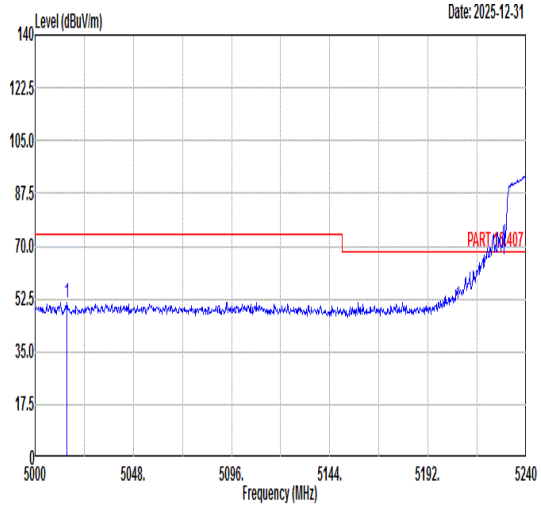 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5015.36 51.35 74.00 -22.65 41.35 35.21 8.29 33.50 100 360 PEAK	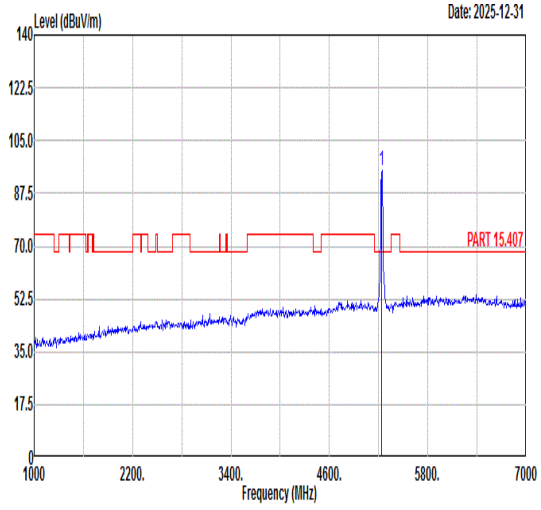 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5240.00 95.30 ------ ------ 84.56 35.35 8.84 33.45 100 360 PEAK
Avg	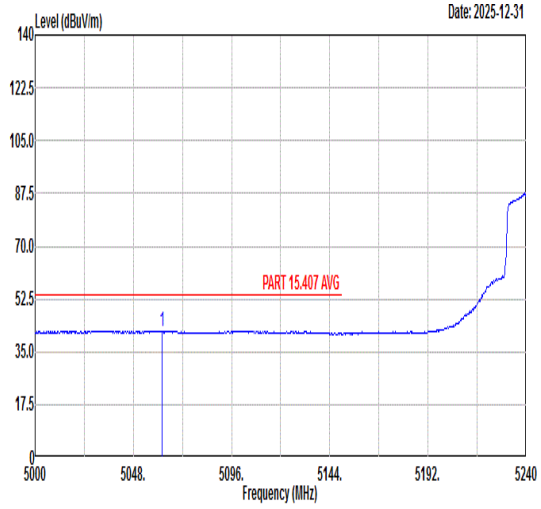 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5061.92 41.95 54.00 -12.05 31.83 35.24 8.37 33.49 100 360 AVERAGE	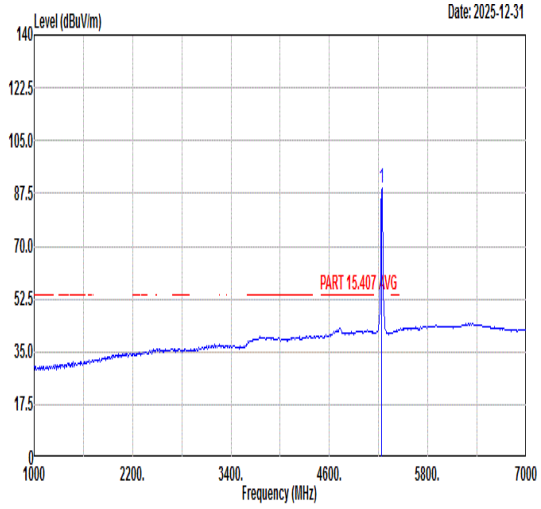 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5240.00 89.06 ------ ------ 78.35 35.35 8.81 33.45 100 360 AVERAGE

Mode	12	
	Band Edge - R	
	U-NII-1_5.15-5.25_802.11n HT20_CH48_Full_5240MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	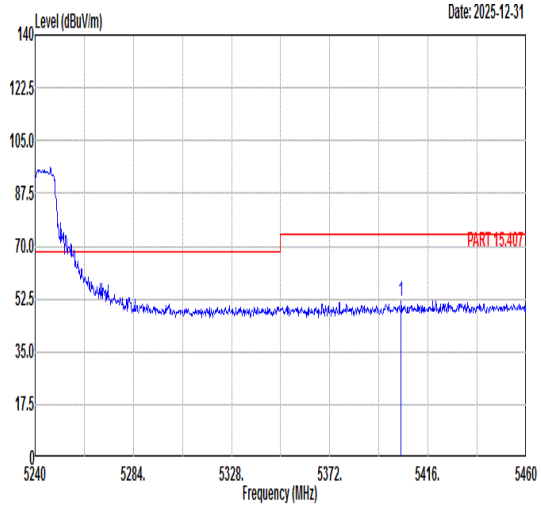 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5403.90 51.69 74.00 -22.31 40.03 35.44 9.64 33.42 100 360 PEAK	Blank
Avg	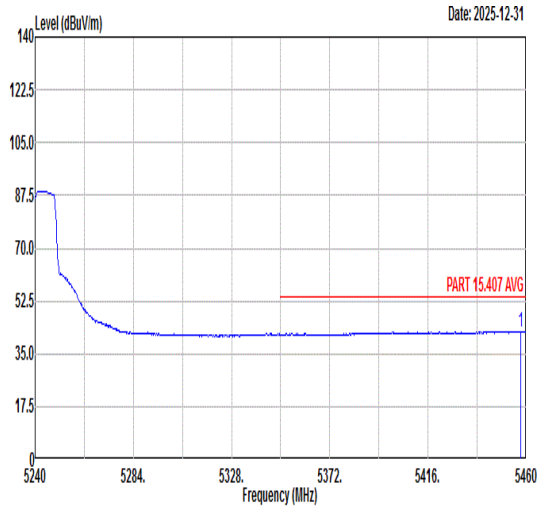 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5457.58 42.51 54.00 -11.49 30.76 35.47 9.69 33.41 100 360 AVERAGE	Blank

Mode	12	
	Harmonic	
	U-NII-1_5.15-5.25_802.11n HT20_CH48_Full_5240MHz	
ANT	22	
Pol.	Horizontal	Vertical
Peak Avg	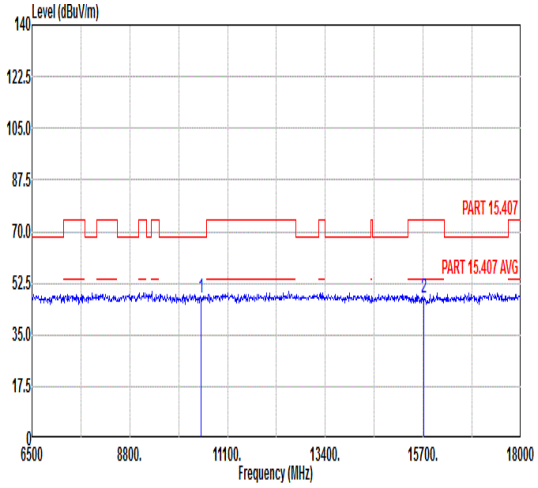 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 10480.00 47.74 68.30 -20.56 48.74 38.09 12.15 51.24 --- --- Peak 2 15720.00 47.35 74.00 -26.65 44.17 41.12 14.66 52.60 --- --- Peak	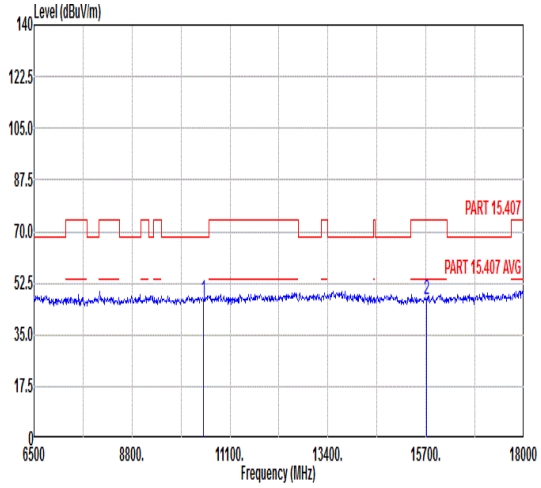 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 10480.00 47.19 68.30 -21.11 48.19 38.09 12.15 51.24 --- --- Peak 2 15720.00 47.13 74.00 -26.87 43.95 41.12 14.66 52.60 --- --- Peak

Mode	13	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_Full_5260MHz	
ANT	22	
Pol.	Horizontal	Fundamental
Peak	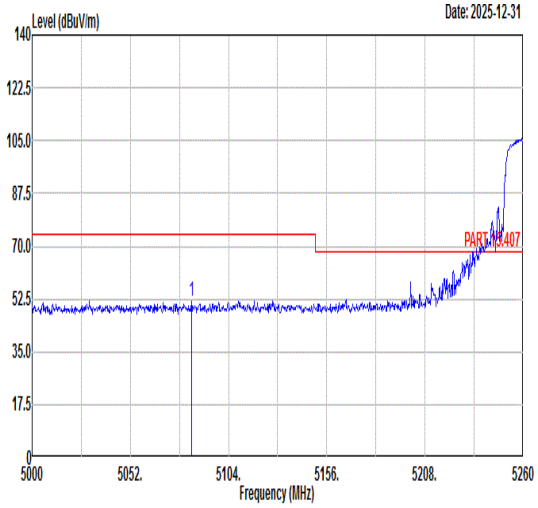 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5084.24 51.89 74.00 -22.11 41.71 35.25 8.41 33.48 118 32 PEAK	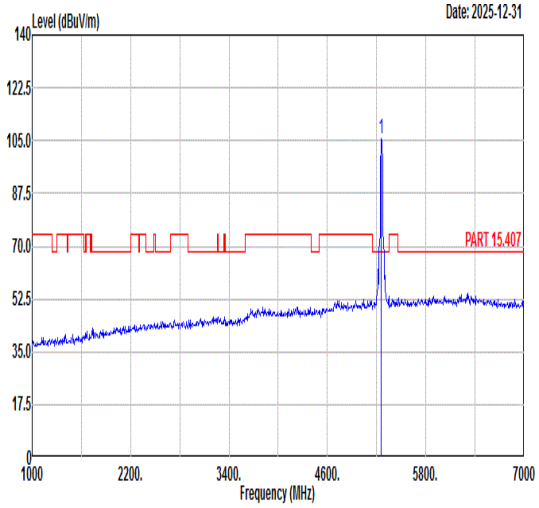 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5260.00 105.88 ------ ------ 95.07 35.36 8.90 33.45 118 32 PEAK
Avg	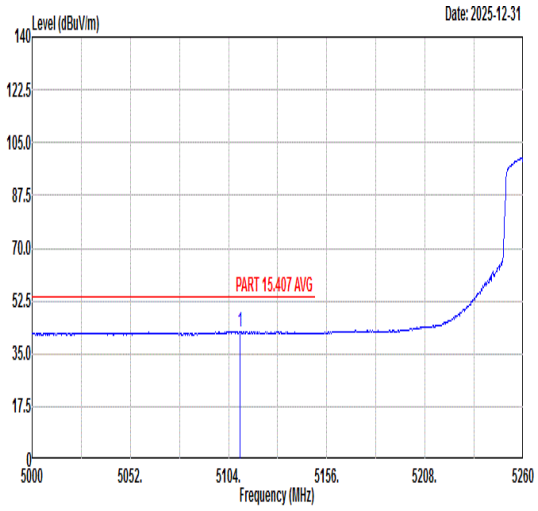 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5110.24 42.23 54.00 -11.77 31.98 35.27 8.46 33.48 118 32 AVERAGE	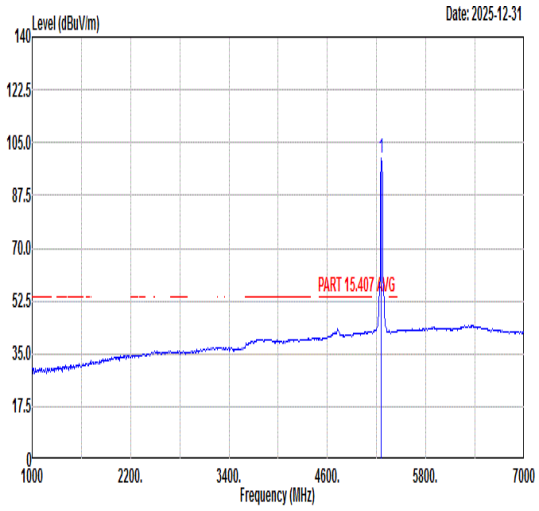 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5260.00 99.82 ------ ------ 89.01 35.36 8.90 33.45 118 32 AVERAGE

Mode	13	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_Full_5260MHz	
ANT	22	
Pol.	Horizontal	Fundamental
Peak	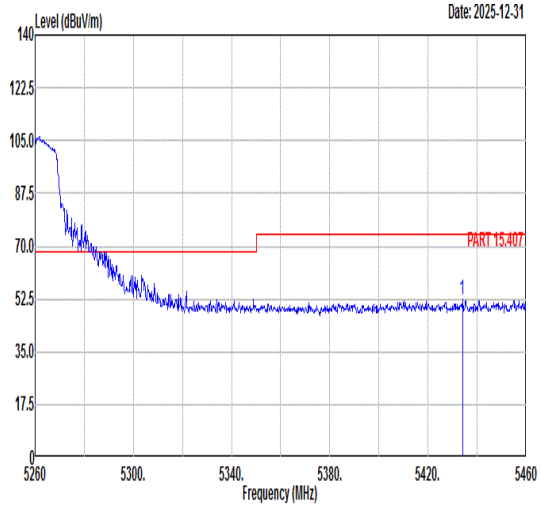 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5434.00 52.48 74.00 -21.52 40.76 35.46 9.67 33.41 118 32 PEAK	Blank
Avg	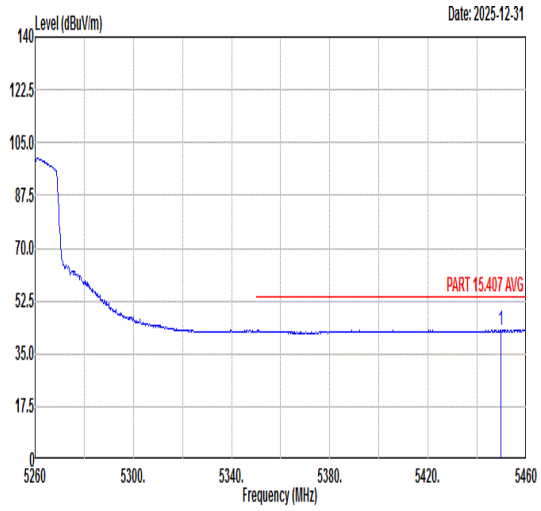 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5449.60 42.92 54.00 -11.08 31.18 35.47 9.68 33.41 118 32 AVERAGE	Blank

Mode	13	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_Full_5260MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	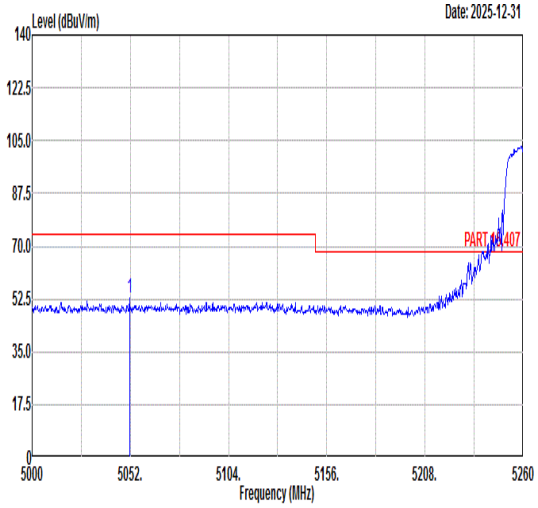 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5051.48 52.70 74.00 -21.30 42.61 35.23 8.35 33.49 347 291 PEAK	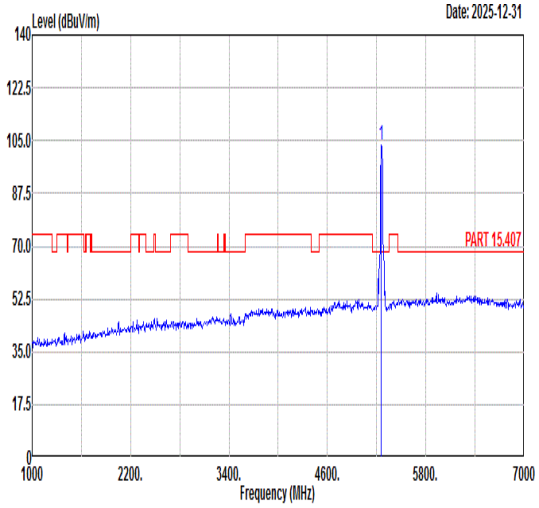 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5260.00 103.71 ------ ------ 92.90 35.36 8.90 33.45 347 291 PEAK
Avg	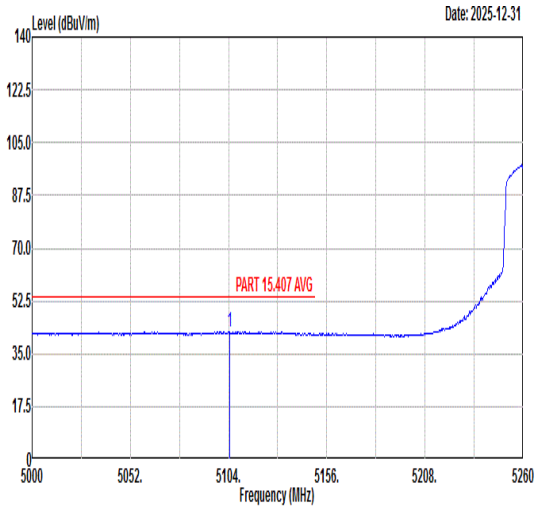 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5104.52 42.28 54.00 -11.72 32.05 35.26 8.45 33.48 347 291 AVERAGE	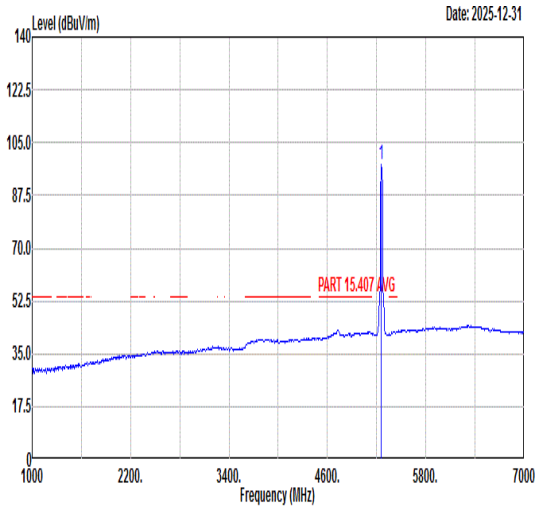 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5260.00 97.48 ------ ------ 86.67 35.36 8.90 33.45 347 291 AVERAGE

Mode	13	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_Full_5260MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	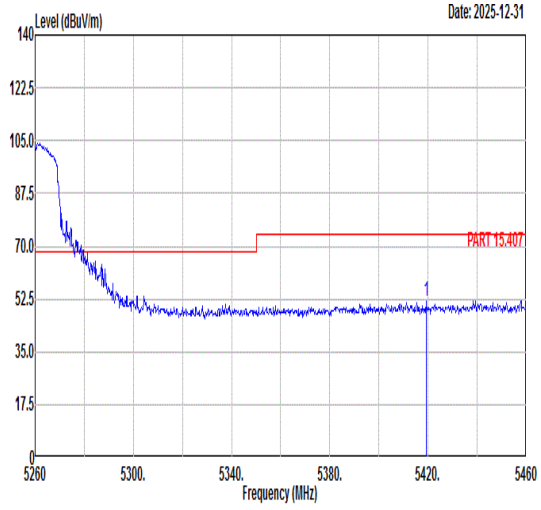 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5419.20 52.02 74.00 -21.98 40.32 35.45 9.67 33.42 347 291 PEAK	Blank
Avg	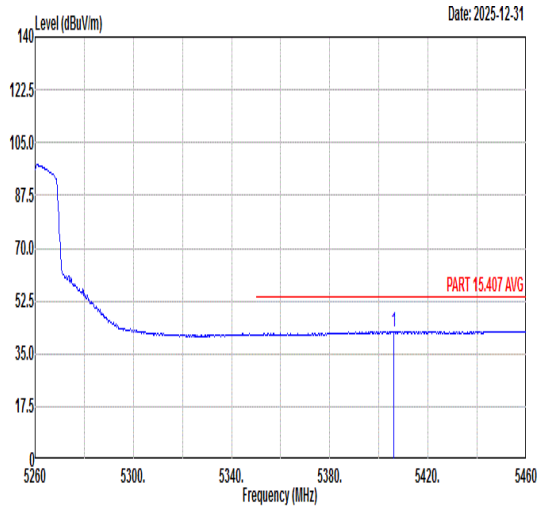 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5406.00 42.48 54.00 -11.52 30.81 35.44 9.65 33.42 347 291 AVERAGE	Blank

Mode	13	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_Full_5260MHz	
ANT	22	
Pol.	Horizontal	Vertical
Peak Avg	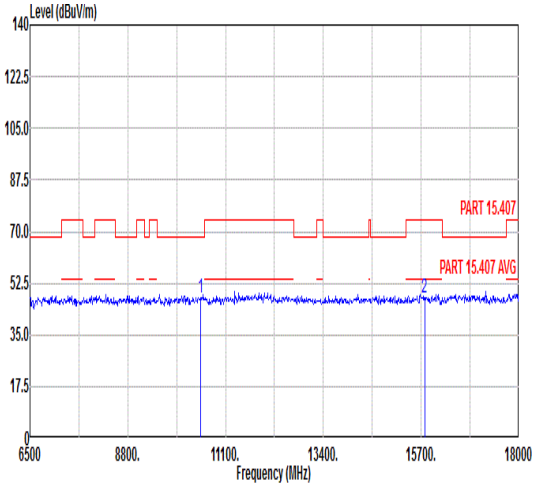 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 10520.00 47.79 68.30 -20.51 48.66 38.11 12.18 51.16 --- --- Peak 2 15780.00 47.56 74.00 -26.44 44.34 41.18 14.69 52.65 --- --- Peak	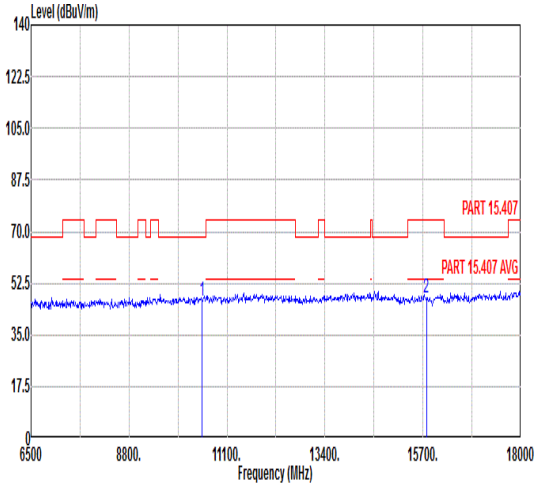 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 10520.00 46.50 68.30 -21.80 47.37 38.11 12.18 51.16 --- --- Peak 2 15780.00 47.57 74.00 -26.43 44.35 41.18 14.69 52.65 --- --- Peak

Mode	14	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_Full_5300MHz	
ANT	22	
Pol.	Horizontal	Fundamental
Peak	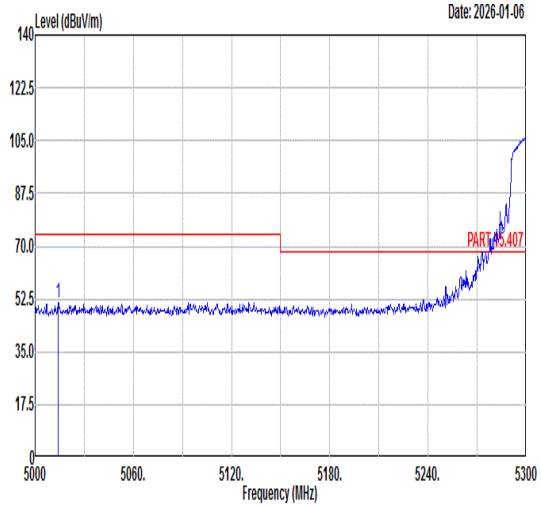 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5014.10 51.36 74.00 -22.64 41.35 35.21 8.30 33.50 100 60 PEAK	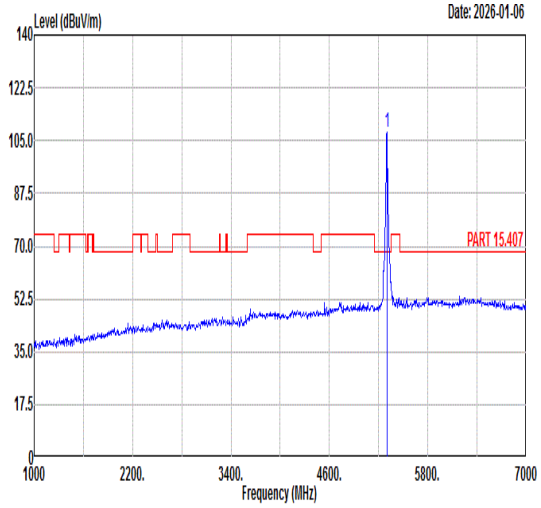 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5300.00 107.67 ------ ------ 96.61 35.38 9.12 33.44 100 60 PEAK
Avg	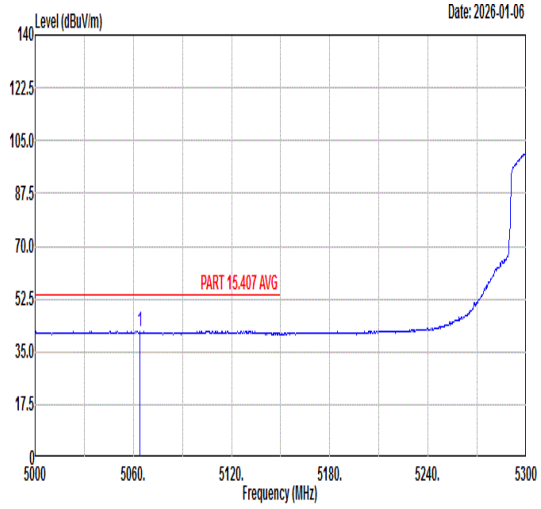 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5064.20 41.75 54.00 -12.25 31.62 35.24 8.38 33.49 100 60 AVERAGE	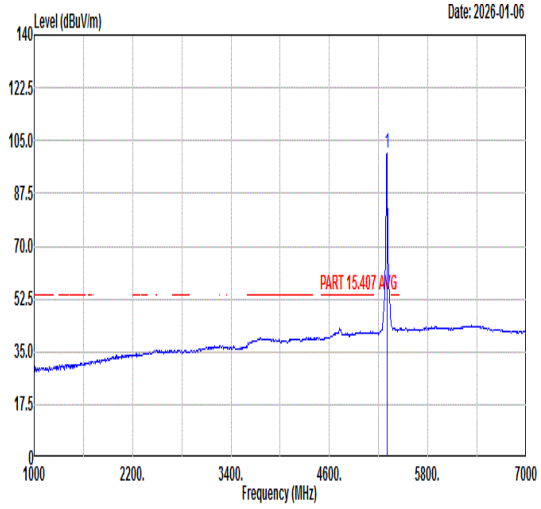 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5300.00 100.66 ------ ------ 89.60 35.38 9.12 33.44 100 60 AVERAGE

Mode	14	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_Full_5300MHz	
ANT	22	
Pol.	Horizontal	Fundamental
Peak	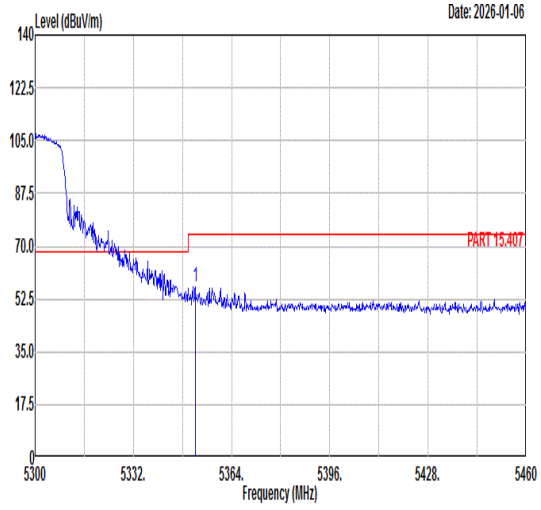 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5352.16 56.49 74.00 -17.51 45.13 35.41 9.38 33.43 100 60 PEAK	Blank
Avg	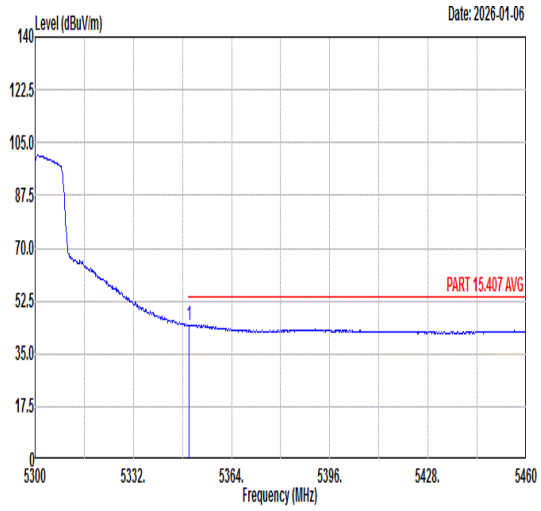 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5350.24 44.64 54.00 -9.36 33.29 35.41 9.37 33.43 100 60 AVERAGE	Blank

Mode	14	
	Band Edge - L	
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_Full_5300MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	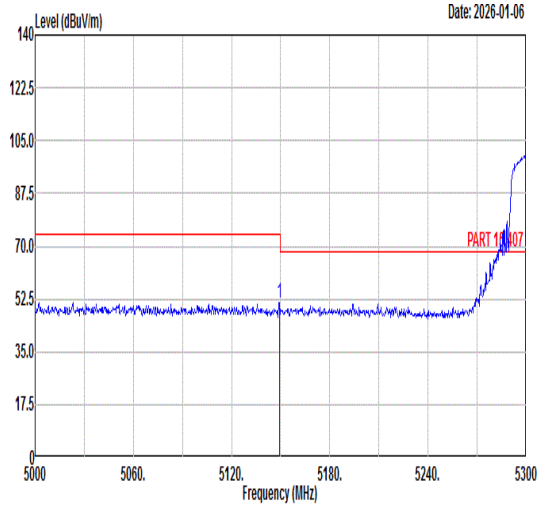 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5149.10 51.44 74.00 -22.56 41.09 35.29 8.53 33.47 397 294 PEAK	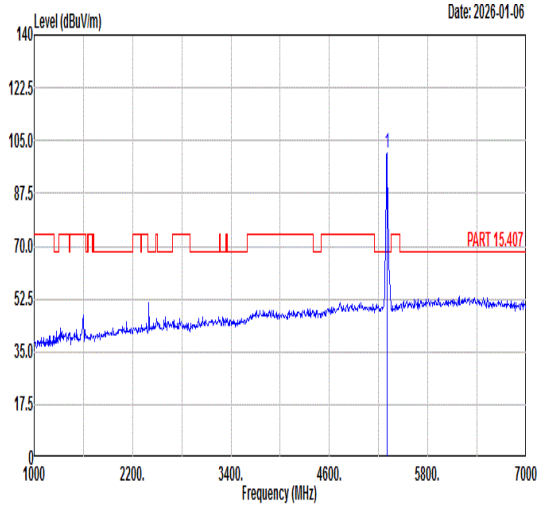 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5300.00 100.93 ------ ------ 89.87 35.38 9.12 33.44 397 294 PEAK
Avg	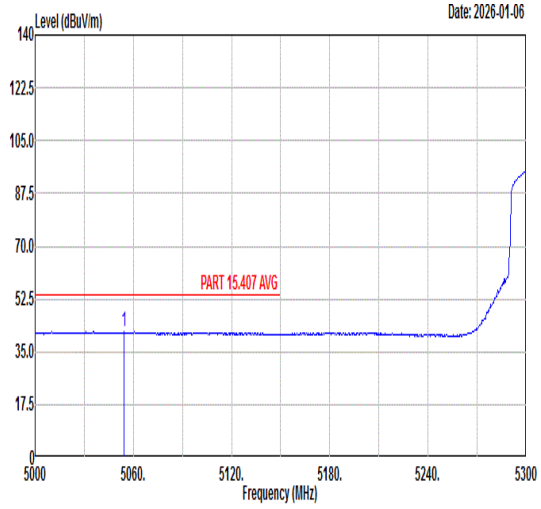 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5054.30 41.64 54.00 -12.36 31.54 35.23 8.36 33.49 397 294 AVERAGE	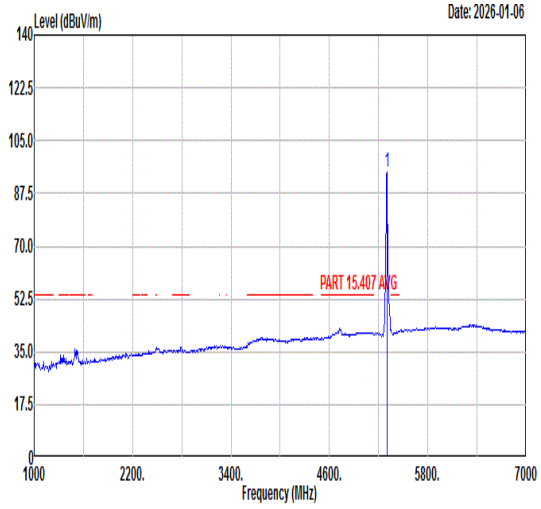 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5300.00 94.57 ------ ------ 83.51 35.38 9.12 33.44 397 294 AVERAGE

Mode	14	
	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_Full_5300MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	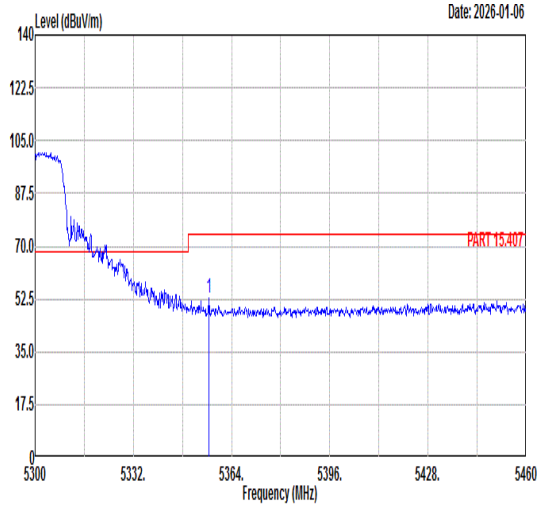 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5356.64 52.78 74.00 -21.22 41.40 35.41 9.40 33.43 397 294 PEAK	Blank
Avg	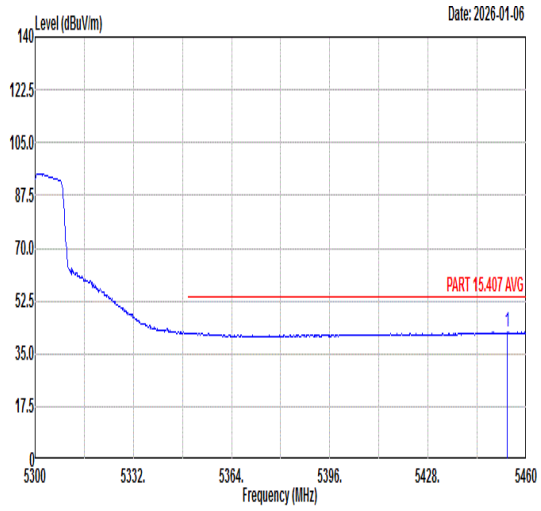 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5453.76 42.14 54.00 -11.86 30.40 35.47 9.68 33.41 397 294 AVERAGE	Blank

Mode	14	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_Full_5300MHz	
ANT	22	
Pol.	Horizontal	Vertical
Peak Avg	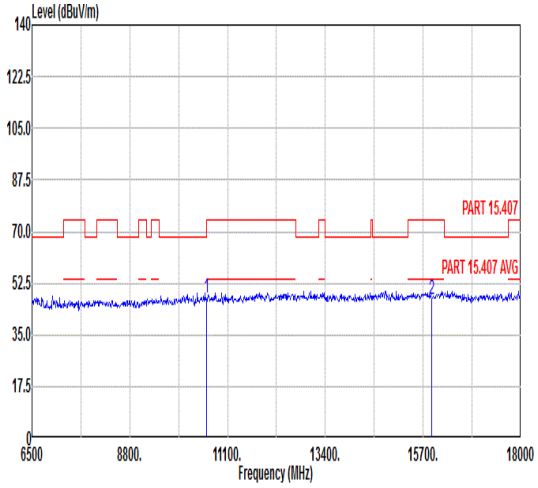 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 10600.00 47.47 74.00 -26.53 48.10 38.14 12.23 51.00 --- --- Peak 2 15900.00 47.21 74.00 -26.79 43.87 41.32 14.75 52.73 --- --- Peak	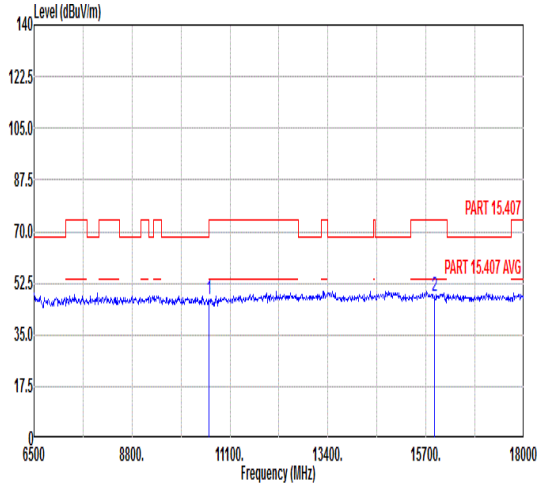 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 10600.00 47.11 74.00 -26.89 47.74 38.14 12.23 51.00 --- --- Peak 2 15900.00 47.84 74.00 -26.16 44.50 41.32 14.75 52.73 --- --- Peak

Mode	15	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_Full_5320MHz	
ANT	22	
Pol.	Horizontal	Fundamental
Peak	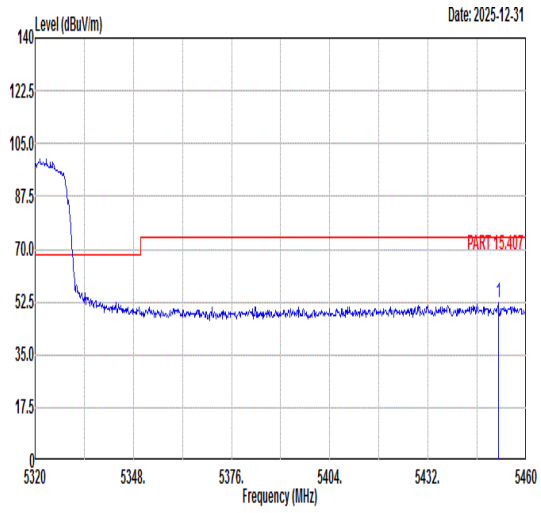 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5452.02 52.28 74.00 -21.72 40.54 35.47 9.68 33.41 349 360 PEAK	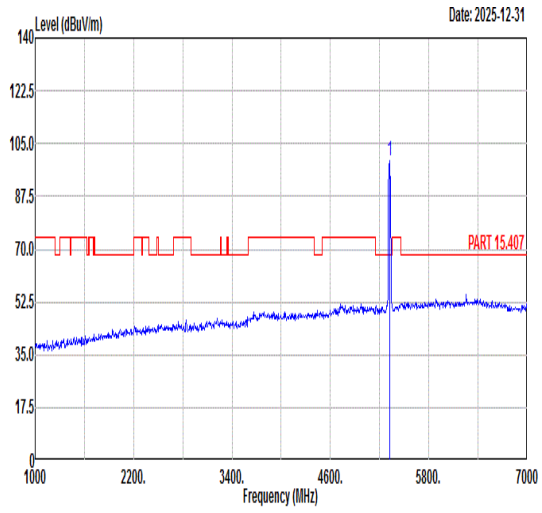 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5320.00 99.13 ------ ------ 87.97 35.39 9.21 33.44 349 360 PEAK
Avg	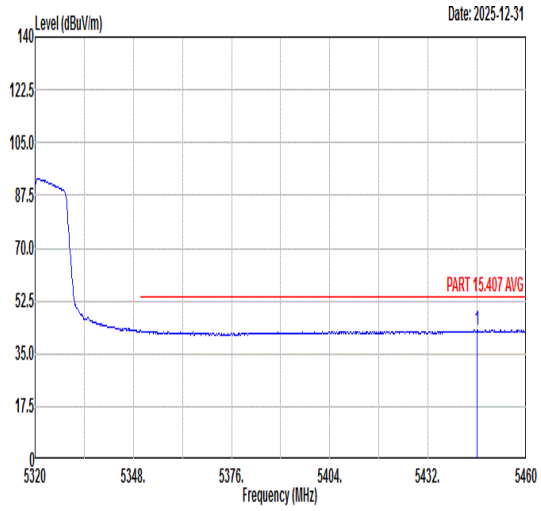 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5446.00 42.84 54.00 -11.16 31.10 35.47 9.68 33.41 349 360 AVERAGE	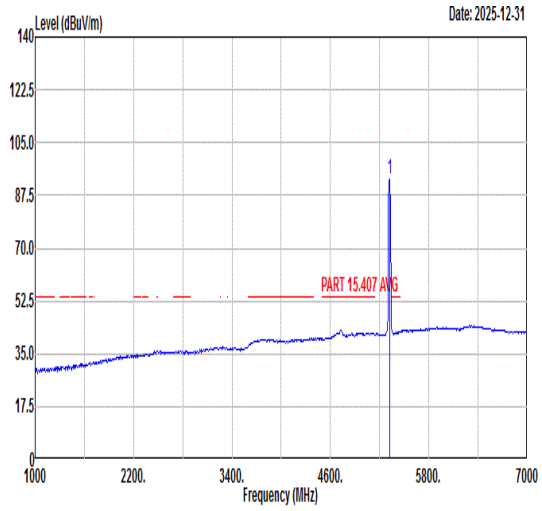 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5320.00 92.93 ------ ------ 81.77 35.39 9.21 33.44 349 360 AVERAGE

Mode	15	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_Full_5320MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	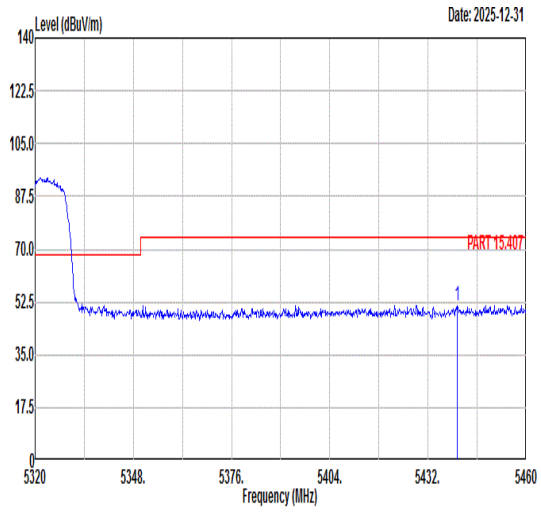 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5440.40 51.44 74.00 -22.56 39.71 35.46 9.68 33.41 353 0 PEAK	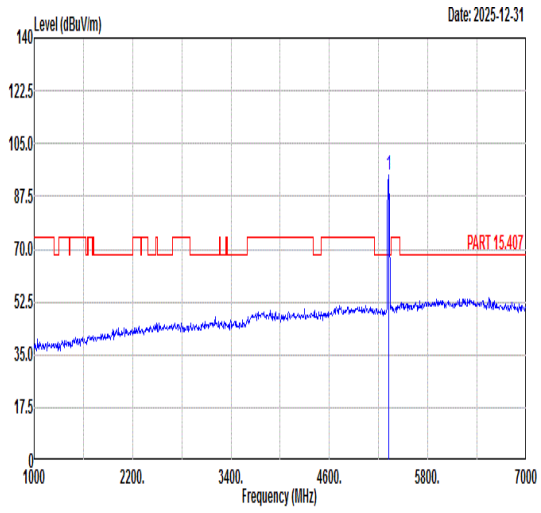 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5320.00 94.65 ------ ------ 83.49 35.39 9.21 33.44 353 0 PEAK
Avg	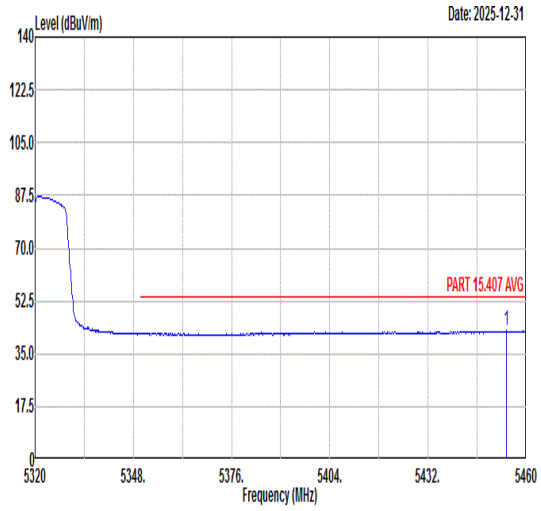 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5454.40 42.57 54.00 -11.43 30.83 35.47 9.68 33.41 353 0 AVERAGE	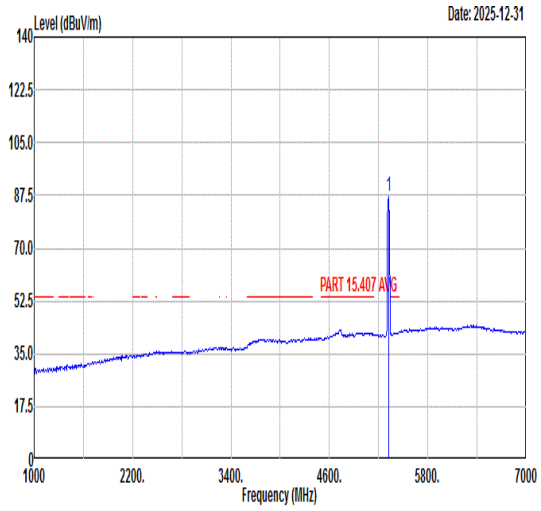 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5320.00 87.06 ------ ------ 75.90 35.39 9.21 33.44 353 0 AVERAGE

Mode	15	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_Full_5320MHz	
ANT	22	
Pol.	Horizontal	Vertical
Peak Avg	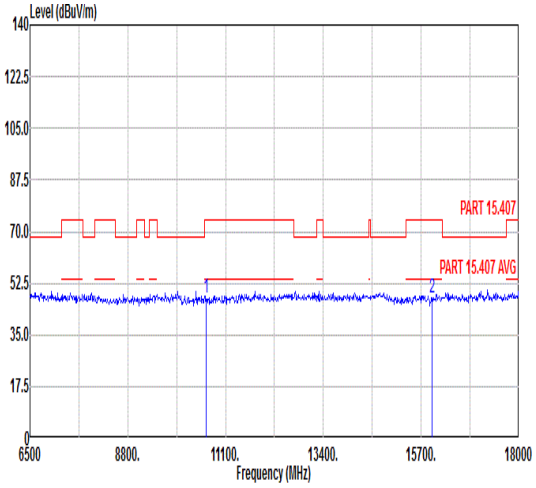 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 10640.00 47.58 74.00 -26.42 48.08 38.16 12.26 50.92 --- --- Peak 2 15960.00 47.60 74.00 -26.40 44.21 41.39 14.77 52.77 --- --- Peak	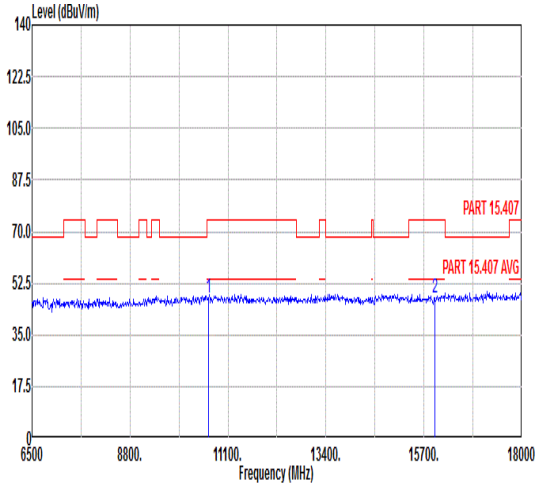 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 10640.00 47.33 74.00 -26.67 47.83 38.16 12.26 50.92 --- --- Peak 2 15960.00 47.52 74.00 -26.48 44.13 41.39 14.77 52.77 --- --- Peak

Mode	16	
	Band Edge	
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_Full_5500MHz	
ANT	22	
Pol.	Horizontal	Fundamental
Peak	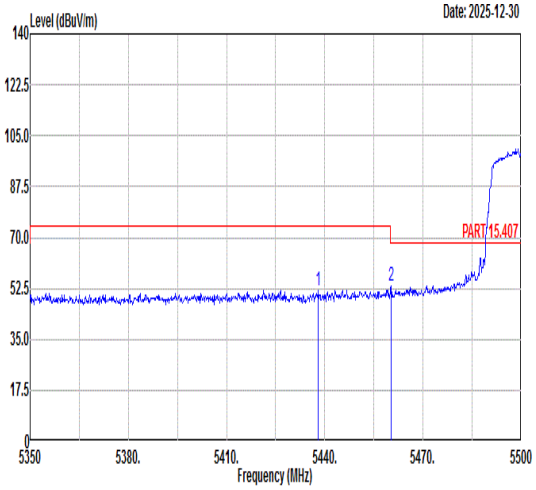 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5438.05 51.98 74.00 -22.02 40.25 35.46 9.68 33.41 100 54 PEAK 2 5460.25 53.32 68.30 -14.98 41.56 35.48 9.69 33.41 100 54 PEAK	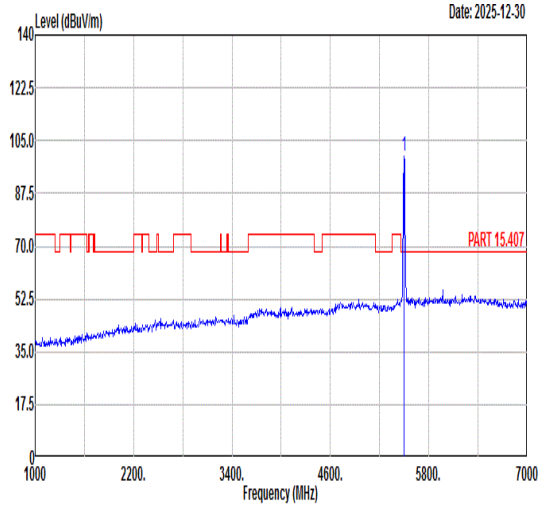 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5500.00 99.64 ------ ------ 87.83 35.50 9.71 33.40 100 54 PEAK
Avg	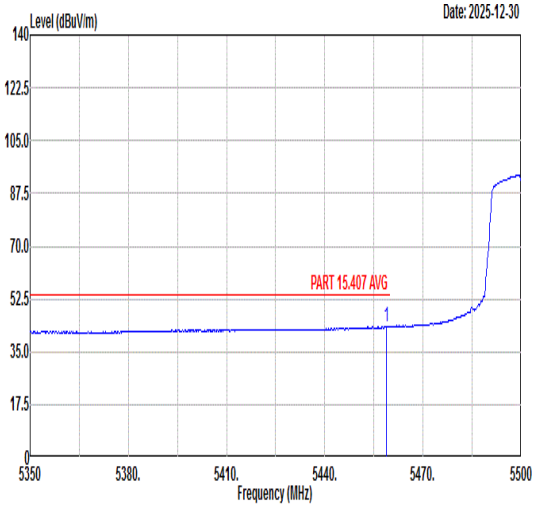 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5458.90 43.38 54.00 -10.62 31.62 35.48 9.69 33.41 100 54 AVERAGE	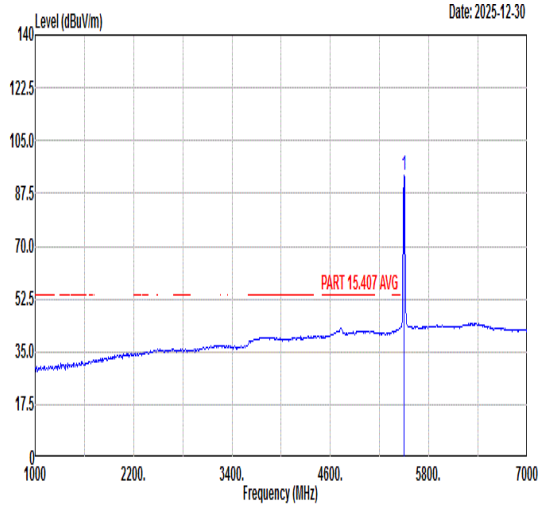 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5500.00 93.56 ------ ------ 81.75 35.50 9.71 33.40 100 54 AVERAGE

Mode	16
	Band Edge
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_Full_5500MHz
ANT	22

Pol.	Vertical	Fundamental
Peak	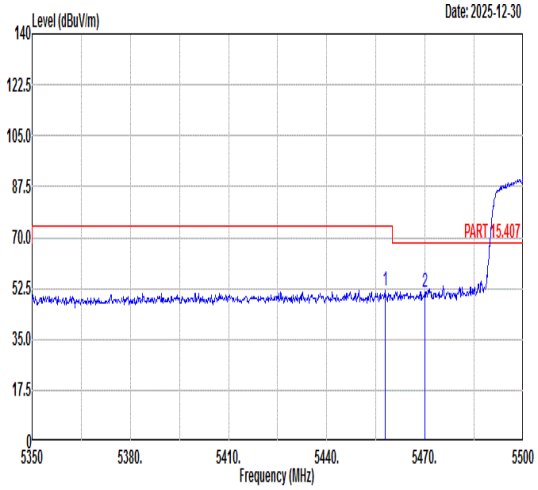 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5457.85 51.67 74.00 -22.33 39.92 35.47 9.69 33.41 400 109 PEAK 2 5469.85 51.50 68.30 -16.80 39.74 35.48 9.69 33.41 400 109 PEAK	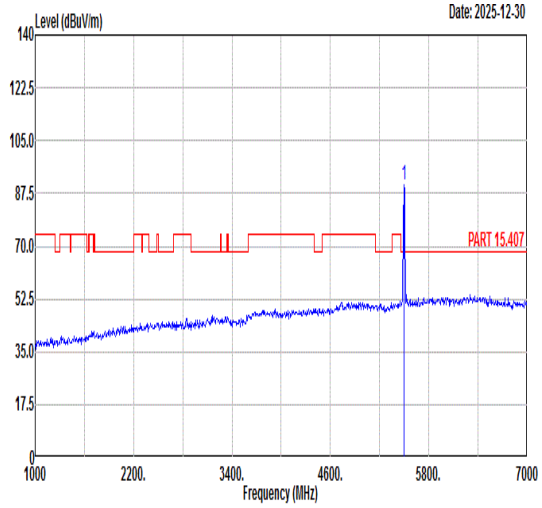 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5500.00 90.48 ------ ------ 78.67 35.50 9.71 33.40 400 109 PEAK
Avg	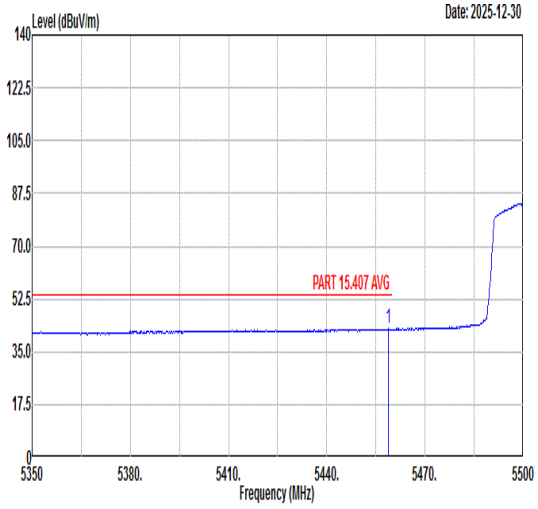 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5458.90 42.53 54.00 -11.47 30.77 35.48 9.69 33.41 400 109 AVERAGE	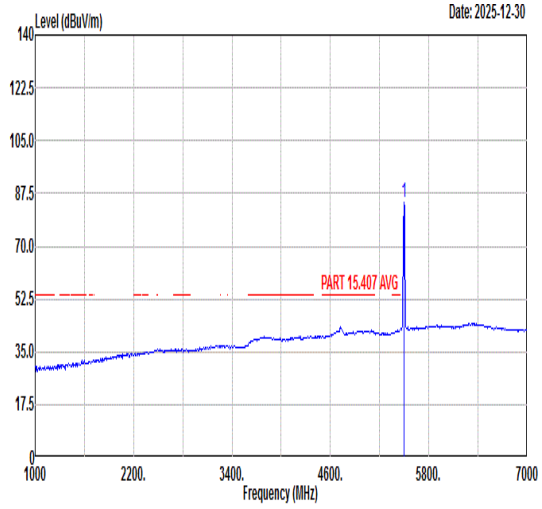 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5500.00 84.29 ------ ------ 72.48 35.50 9.71 33.40 400 109 AVERAGE

Mode	16	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_Full_5500MHz	
ANT	22	
Pol.	Horizontal	Vertical
Peak Avg	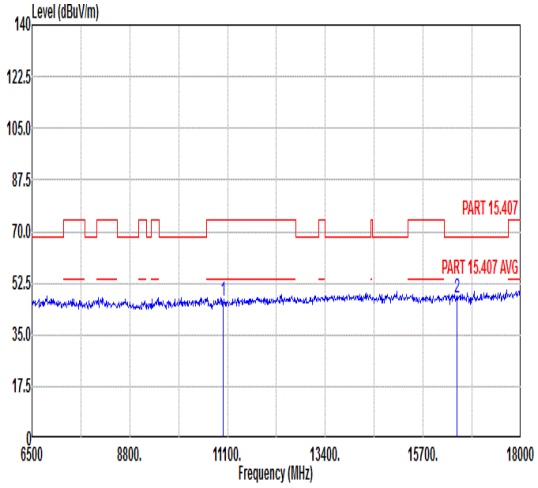 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 11000.00 46.71 74.00 -27.29 46.09 38.30 12.52 50.20 --- --- Peak 2 16500.00 47.46 68.30 -20.84 43.09 42.00 15.17 52.80 --- --- Peak	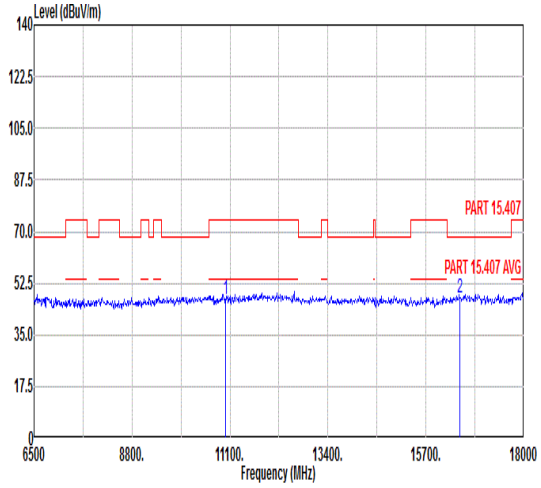 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 11000.00 47.11 74.00 -26.89 46.49 38.30 12.52 50.20 --- --- Peak 2 16500.00 47.68 68.30 -20.62 43.31 42.00 15.17 52.80 --- --- Peak

Mode	17
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_Full_5580MHz
ANT	22

Pol.	Horizontal	Fundamental
Peak	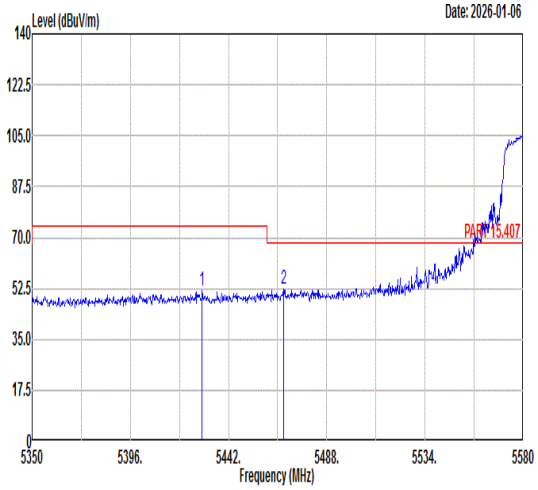 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5429.58 51.56 74.00 -22.44 39.84 35.46 9.67 33.41 100 56 PEAK 2 5467.76 52.09 68.30 -16.21 40.33 35.48 9.69 33.41 100 56 PEAK	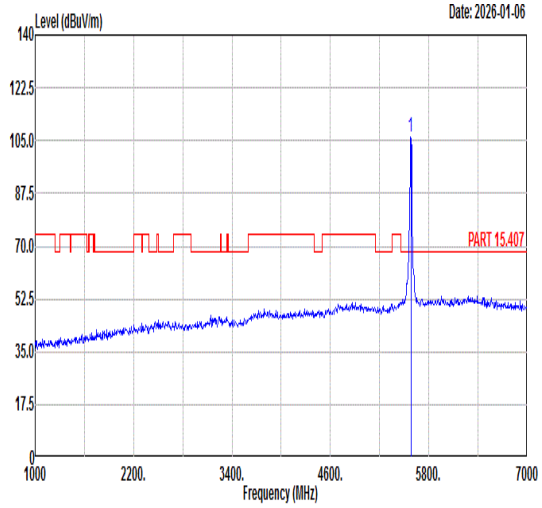 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5580.00 106.39 ------ ------ 94.45 35.61 9.75 33.42 100 56 PEAK
Avg	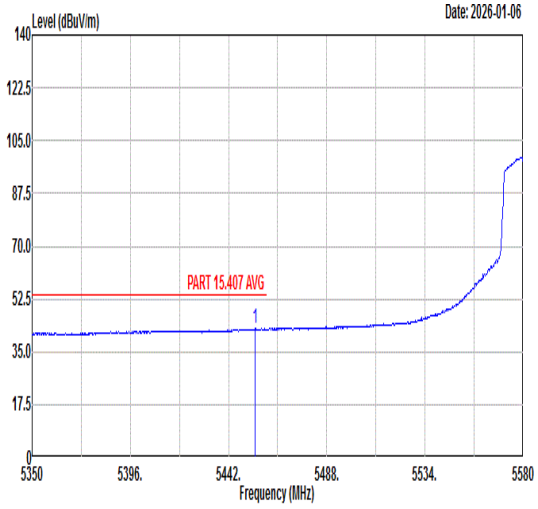 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5454.42 42.56 54.00 -11.44 30.82 35.47 9.68 33.41 100 56 AVERAGE	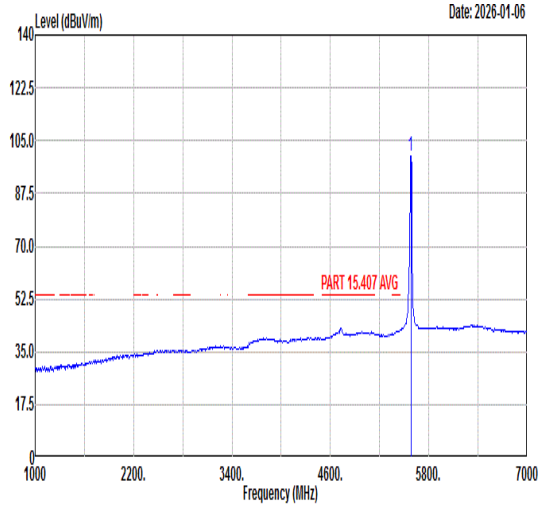 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5580.00 99.65 ------ ------ 87.70 35.62 9.75 33.42 100 56 AVERAGE

Mode	17	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_Full_5580MHz	
ANT	22	
Pol.	Horizontal	Fundamental
Peak	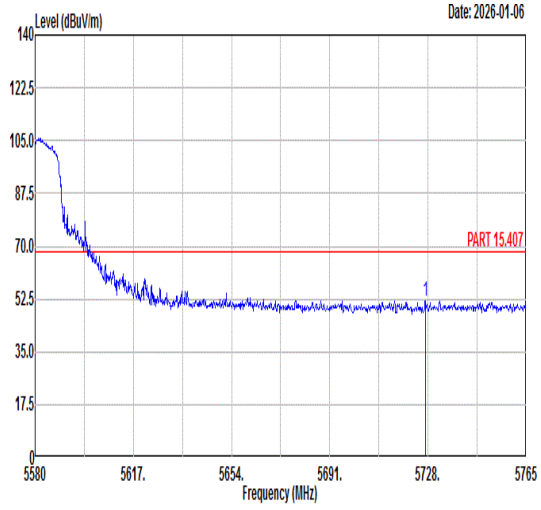 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5727.08 51.70 68.30 -16.60 39.31 35.82 10.02 33.45 100 56 PEAK	Blank

Mode	17
	Band Edge - L
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_Full_5580MHz
ANT	22

Pol.	Vertical	Fundamental
Peak	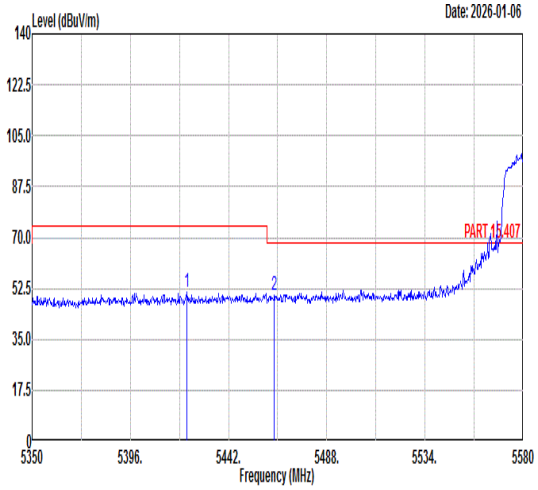 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5422.45 51.34 74.00 -22.66 39.64 35.45 9.67 33.42 114 180 PEAK 2 5463.39 50.30 68.30 -18.00 38.54 35.48 9.69 33.41 114 180 PEAK	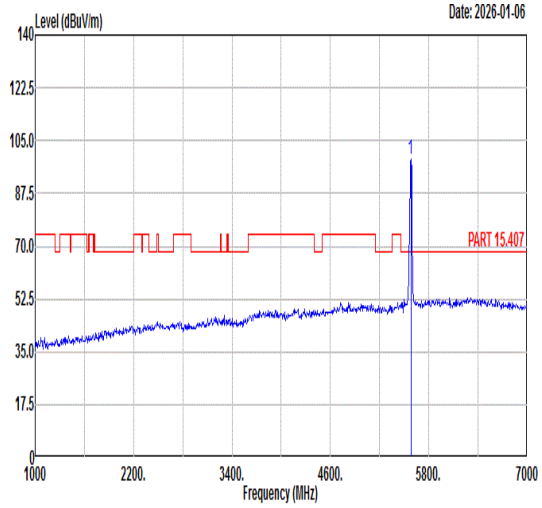 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5580.00 98.66 ------ ------ 86.71 35.62 9.75 33.42 114 180 PEAK
Avg	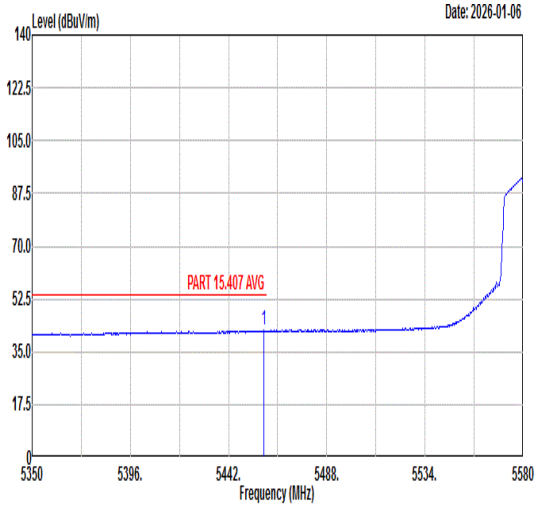 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5458.56 42.02 54.00 -11.98 30.26 35.48 9.69 33.41 114 180 AVERAGE	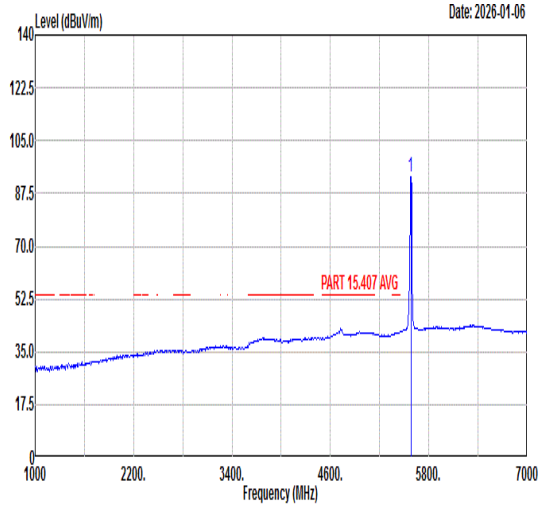 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5580.00 92.88 ------ ------ 80.94 35.61 9.75 33.42 114 180 AVERAGE

Mode	17	
	Band Edge - R	
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_Full_5580MHz	
ANT	22	
Pol.	Vertical	Fundamental
Peak	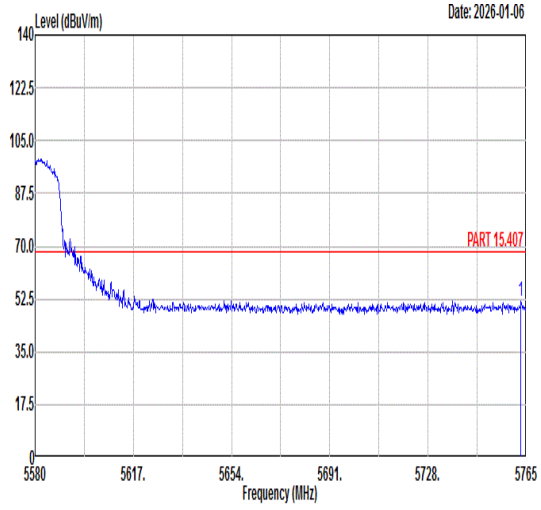 Freq Level Limit Line Margin (dB) Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dBuV dB/m dB dB cm deg 1 5762.97 51.99 68.30 -16.31 39.47 35.87 10.10 33.45 114 180 PEAK	Blank

Mode	17	
	Harmonic	
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_Full_5580MHz	
ANT	22	
Pol.	Horizontal	Vertical
Peak Avg	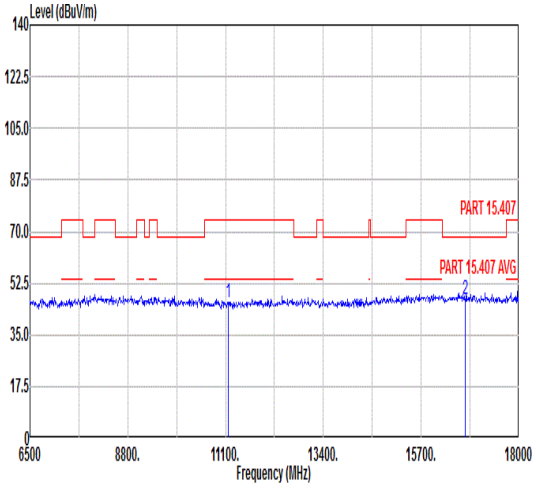 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 11160.00 46.12 74.00 -27.88 45.47 38.35 12.64 50.34 --- --- Peak 2 16740.00 47.28 68.30 -21.02 42.46 42.27 15.35 52.80 --- --- Peak	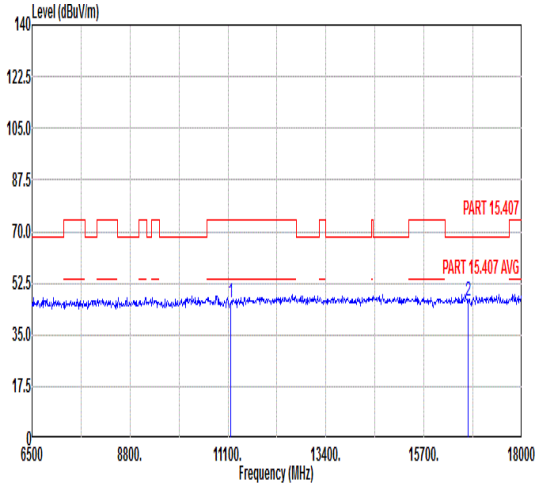 Freq Level Limit Line Margin Read Level Ant Factor Cable Loss Preamp Factor APos TPos Remark MHz dBuV/m dBuV/m dB dBuV dB/m dB dB cm deg 1 11160.00 45.86 74.00 -28.14 45.21 38.35 12.64 50.34 --- --- Peak 2 16740.00 46.73 68.30 -21.57 41.91 42.27 15.35 52.80 --- --- Peak