



FCC Radio Test Report

FCC ID: 2AUCY-V2604

This report concerns: Original Grant

Project No. : 2603C245
Equipment : Mobile Phone
Brand Name : vivo
Model Name : V2604
Applicant : vivo Mobile Communication Co., Ltd.
Address : No.1, vivo Road, Chang'an, Dongguan, Guangdong, China
Manufacturer : vivo Mobile Communication Co., Ltd.
Address : No.1, vivo Road, Chang'an, Dongguan, Guangdong, China
Date of Receipt : Mar. 30, 2026
Date of Test : Mar. 30, 2026 ~ Apr. 16, 2026
Issued Date : Apr. 21, 2026
Test Sample : Engineering Sample No.: DG920260330105 for conducted & radiated emissions above 18GHz, DG920260330104 for others.
Standard(s) : FCC CFR Title 47, Part 15, Subpart E

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan)

Prepared by


:



Sheldon Ou

Approved by

:



Chay Cai

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REVISION HISTORY	6
1 . APPLICABLE STANDARDS	7
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
2.3 TEST ENVIRONMENT CONDITIONS	9
3 . GENERAL INFORMATION	10
3.1 GENERAL DESCRIPTION OF EUT	10
3.2 TEST MODES	13
3.3 PARAMETERS OF TEST SOFTWARE	16
3.4 DUTY CYCLE	18
3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	20
3.6 SUPPORT UNITS	20
3.7 CUSTOMER INFORMATION DESCRIPTION	20
4 . AC POWER LINE CONDUCTED EMISSIONS	21
4.1 LIMIT	21
4.2 TEST PROCEDURE	21
4.3 DEVIATION FROM TEST STANDARD	21
4.4 TEST SETUP	22
4.5 EUT OPERATION CONDITIONS	22
4.6 TEST RESULTS	22
5 . RADIATED EMISSIONS	23
5.1 LIMIT	23
5.2 TEST PROCEDURE	24
5.3 DEVIATION FROM TEST STANDARD	25
5.4 TEST SETUP	25
5.5 EUT OPERATION CONDITIONS	27
5.6 TEST RESULTS - 9 KHZ TO 30 MHZ	27
5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	27
5.8 TEST RESULTS - ABOVE 1000 MHZ	27
6 . BANDWIDTH	28
6.1 LIMIT	28

Table of Contents	Page
6.2 TEST PROCEDURE	28
6.3 DEVIATION FROM STANDARD	28
6.4 TEST SETUP	29
6.5 EUT OPERATION CONDITIONS	29
6.6 TEST RESULTS	29
7 . MAXIMUM OUTPUT POWER	30
7.1 LIMIT	30
7.2 TEST PROCEDURE	30
7.3 DEVIATION FROM STANDARD	30
7.4 TEST SETUP	30
7.5 EUT OPERATION CONDITIONS	30
7.6 TEST RESULTS	30
8 . POWER SPECTRAL DENSITY	31
8.1 LIMIT	31
8.2 TEST PROCEDURE	31
8.3 DEVIATION FROM STANDARD	31
8.4 TEST SETUP	32
8.5 EUT OPERATION CONDITIONS	32
8.6 TEST RESULTS	32
9 . FREQUENCY STABILITY	33
9.1 LIMIT	33
9.2 TEST PROCEDURE	33
9.3 DEVIATION FROM STANDARD	33
9.4 TEST SETUP	33
9.5 EUT OPERATION CONDITIONS	33
9.6 TEST RESULTS	33
10 . MEASUREMENT INSTRUMENTS LIST	34
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	37
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	40
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	45
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	48
APPENDIX E - BANDWIDTH	120

Table of Contents	Page
APPENDIX F - MAXIMUM OUTPUT POWER	137
APPENDIX G - POWER SPECTRAL DENSITY	142
APPENDIX H - FREQUENCY STABILITY	151

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-8-2603C245	R00	Original Report.	Apr. 21, 2026	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standard:

ANSI C63.10-2020

The following reference test guidance is not within the scope of accreditation of A2LA:

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a) 15.407(e)	Bandwidth	APPENDIX E	PASS	-----
15.407(a)	Maximum Output Power	APPENDIX F	PASS	-----
15.407(a)	Power Spectral Density	APPENDIX G	PASS	-----
15.407(g)	Frequency Stability	APPENDIX H	PASS	-----
15.203	Antenna Requirements	-----	PASS	NOTE (2)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) For UNII-1 this device was functioned as a
 - ☐ Outdoor access point device
 - ☐ Indoor access point device
 - ☐ Fixed point-to-point access points device
 - ☒ Client device

2.1 TEST FACILITY

The test facilities used to collect the test data in this report:

For Radiated emissions 1GHz to 18GHz Item: Room 102 & 702, Building A3, No.9, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

For other Items: No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DGDLC02	CISPR	150kHz ~ 30MHz	2.66

B. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	U,(dB)
DGDLCB03	CISPR	9kHz ~ 30MHz	2.26

Test Site	Method	Measurement Frequency Range	Ant. H / V	U,(dB)
DGDLCB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

Test Site	Method	Measurement Frequency Range	U,(dB)
DGGDCB01 (3m)	CISPR	1GHz ~ 18GHz	3.98

Test Site	Method	Measurement Frequency Range	U,(dB)
DGDLCB03 (1m)	CISPR	18 ~ 26.5 GHz	4.30
		26.5 ~ 40 GHz	4.74

C. Other Measurement test:

Test Item	Uncertainty
Bandwidth	0.75 %
Maximum Output Power	1.3 dB
Power Spectral Density	1.8 dB
Frequency Stability	1.4 ppm
Temperature	0.7 °C
Humidity	1.7 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	25°C	54%	AC 120V/60Hz	Hayden Chen
Radiated Emissions -9kHz to 30MHz	23°C	44%	AC 120V/60Hz	Hayden Chen
Radiated Emissions -30MHz to 1000MHz	24°C	47%	AC 120V/60Hz	Allen Tong
Radiated Emissions -Above 1000 MHz	25°C	43%	AC 120V/60Hz	Lafu Li
	24°C	47%	AC 120V/60Hz	Torin Long
Bandwidth	23°C	51%	AC 120V/60Hz	Arvin Tong
Maximum Output Power	24°C	49-58%	AC 120V/60Hz	Alex Yin
Power Spectral Density	23°C	51%	AC 120V/60Hz	Arvin Tong
Frequency Stability	Normal & Extreme	51%	Normal & Extreme	Arvin Tong

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	Mobile Phone
Brand Name	vivo
Test Model	V2604
Model Name	V2604
Model Difference(s)	N/A
Software Version	MP_0.1
Hardware Version	PD2533F_EX_A_w.x.y.z.W30
Power Source	1# DC voltage supplied from AC adapter. 2# Supplied from battery. 3# Supplied from USB port.
Power Rating	1# I/P: 100-240V~ 50/60Hz, 1.1A O/P: 5V === 3A OR 9V === 2A OR 11V === 4A 2# DC 3.92V, 7920mAh, 31.05Wh 3# DC 5V
Operation Frequency Band(s)	UNII-1: 5150 MHz ~ 5250 MHz UNII-2A: 5250 MHz ~ 5350 MHz UNII-2C: 5470 MHz ~ 5725 MHz UNII-3: 5725 MHz ~ 5850 MHz
Modulation Type	IEEE 802.11a/n/ac: OFDM
Bit Rate of Transmitter	IEEE 802.11a: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 150 Mbps IEEE 802.11ac: up to 433.3 Mbps
Maximum Output Power UNII-1	IEEE 802.11a: 17.63 dBm (0.0579 W)
Maximum Output Power UNII-2A	IEEE 802.11a: 17.62 dBm (0.0578 W)
Maximum Output Power UNII-2C	IEEE 802.11a: 17.40 dBm (0.0550 W)
Maximum Output Power UNII-3	IEEE 802.11a: 17.34 dBm (0.0542 W)

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

2. Channel List:

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)		IEEE 802.11ac(VHT80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)		IEEE 802.11ac(VHT80)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)		IEEE 802.11ac(VHT80)	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580	134	5670		
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				

IEEE 802.11a IEEE 802.11n(HT20) IEEE 802.11ac(VHT20)		IEEE 802.11n(HT40) IEEE 802.11ac(VHT40)		IEEE 802.11ac(VHT80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

3. Antenna Specification:

Ant.	Manufacturer	Model Name	Antenna Type	Connector	Gain (dBi)
1	Dongguan Zhouhuang Plastic Hardware Products Co., Ltd.	ET3091B	IFA	N/A	0.41

4. The EUT contains following accessory devices:

Items	Trademark / Manufacturer	Model Name	Description
Adapter	Dongguan Aohai Technology Co.,Ltd	V4440L0A0-US	I/P: 100-240V~ 50/60Hz, 1.1A O/P: 5V  3A OR 9V  2A OR 11V  4A
	Huizhou Golden Lake Co.,Ltd	V4440L0B0-US	
Battery	Sunwoda Electronic CO.,LTD.	BB65	DC 3.92V, 7920mAh, 31.05Wh
USB-C Cable	vivo	BK-C-49-B	-

3.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX N(HT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX N(HT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 5	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 6	TX N(HT20) Mode Channel 52/60/64 (UNII-2A)
Mode 7	TX N(HT40) Mode Channel 54/62 (UNII-2A)
Mode 8	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 9	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 10	TX N(HT20) Mode Channel 100/116/140 (UNII-2C)
Mode 11	TX N(HT40) Mode Channel 102/110/134 (UNII-2C)
Mode 12	TX AC(VHT80) Mode Channel 106/122 (UNII-2C)
Mode 13	TX A Mode Channel 149/157/165 (UNII-3)
Mode 14	TX N(HT20) Mode Channel 149/157/165 (UNII-3)
Mode 15	TX N(HT40) Mode Channel 151/159 (UNII-3)
Mode 16	TX AC(VHT80) Mode Channel 155 (UNII-3)
Mode 17	TX A Mode Channel 40(UNII-1)

Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 17	TX A Mode Channel 40(UNII-1)

Radiated Emissions Test - Below 1GHz & Above 18 GHz	
Final Test Mode	Description
Mode 17	TX A Mode Channel 40(UNII-1)

Radiated Emissions Test - 1 GHz - 18 GHz	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX N(HT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX N(HT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 5	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 6	TX N(HT20) Mode Channel 52/60/64 (UNII-2A)
Mode 7	TX N(HT40) Mode Channel 54/62 (UNII-2A)
Mode 8	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 9	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 10	TX N(HT20) Mode Channel 100/116/140 (UNII-2C)
Mode 11	TX N(HT40) Mode Channel 102/110/134 (UNII-2C)
Mode 12	TX AC(VHT80) Mode Channel 106/122 (UNII-2C)
Mode 13	TX A Mode Channel 149/157/165 (UNII-3)
Mode 14	TX N(HT20) Mode Channel 149/157/165 (UNII-3)
Mode 15	TX N(HT40) Mode Channel 151/159 (UNII-3)
Mode 16	TX AC(VHT80) Mode Channel 155 (UNII-3)

Conducted Test	
Final Test Mode	Description
Mode 1	TX A Mode Channel 36/40/48 (UNII-1)
Mode 2	TX N(HT20) Mode Channel 36/40/48 (UNII-1)
Mode 3	TX N(HT40) Mode Channel 38/46 (UNII-1)
Mode 4	TX AC(VHT80) Mode Channel 42 (UNII-1)
Mode 5	TX A Mode Channel 52/60/64 (UNII-2A)
Mode 6	TX N(HT20) Mode Channel 52/60/64 (UNII-2A)
Mode 7	TX N(HT40) Mode Channel 54/62 (UNII-2A)
Mode 8	TX AC(VHT80) Mode Channel 58 (UNII-2A)
Mode 9	TX A Mode Channel 100/116/140 (UNII-2C)
Mode 10	TX N(HT20) Mode Channel 100/116/140 (UNII-2C)
Mode 11	TX N(HT40) Mode Channel 102/110/134 (UNII-2C)
Mode 12	TX AC(VHT80) Mode Channel 106/122 (UNII-2C)
Mode 13	TX A Mode Channel 149/157/165 (UNII-3)
Mode 14	TX N(HT20) Mode Channel 149/157/165 (UNII-3)
Mode 15	TX N(HT40) Mode Channel 151/159 (UNII-3)
Mode 16	TX AC(VHT80) Mode Channel 155 (UNII-3)

Note:

- (1) For AC power line conducted emissions and radiated emission below 1 GHz test, the TX A Mode Channel 40(UNII-1) is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, the spurious points of 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.
- (3) For radiated emission Harmonic 18-40GHz test, only tested the worst case and recorded.
- (4) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (5) For AC power line conducted emissions and radiated emissions below 1 GHz test, all adapters had been pre-tested and in this report only recorded the worst case.
- (6) HT20/HT40 covers VHT20/VHT40, due to same modulation. The power setting for 802.11ac VHT20 and VHT40 are the same or lower than 802.11n HT20 and HT40.
- (7) For radiated emission 1 GHz - 18GHz test, the polarization of Vertical and Horizontal are evaluated, the worst case is Horizontal for Band edge, Vertical for Harmonic. In this report only recorded the worst case.

3.3 PARAMETERS OF TEST SOFTWARE

UNII-1			
Test Software Version	ADB		
Frequency (MHz)	5180	5200	5240
IEEE 802.11a	17	18	18
IEEE 802.11n(HT20)	17	17	17.5
Frequency (MHz)	5190	5230	
IEEE 802.11n(HT40)	13	17	
Frequency (MHz)	5210		
IEEE 802.11ac(VHT80)	13		

UNII-2A			
Test Software Version	ADB		
Frequency (MHz)	5260	5300	5320
IEEE 802.11a	18	18	15
IEEE 802.11n(HT20)	17	17	15.5
Frequency (MHz)	5270	5310	
IEEE 802.11n(HT40)	17	12	
Frequency (MHz)	5290		
IEEE 802.11ac(VHT80)	14		

UNII-2C			
Test Software Version	ADB		
Frequency (MHz)	5500	5580	5700
IEEE 802.11a	14	18	16
IEEE 802.11n(HT20)	14	16.5	6.5
Frequency (MHz)	5510	5550	5670
IEEE 802.11n(HT40)	6	17	15
Frequency (MHz)	5530	5610	
IEEE 802.11ac(VHT80)	11	15	

UNII-3			
Test Software Version	ADB		
Frequency (MHz)	5745	5785	5825
IEEE 802.11a	18	18	18
IEEE 802.11n(HT20)	17	17	17
Frequency (MHz)	5755	5795	
IEEE 802.11n(HT40)	17	17	
Frequency (MHz)	5775		
IEEE 802.11ac(VHT80)	14		


3.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.


The output power = measured power + duty factor.

The power spectral density = measured power spectral density + duty factor.

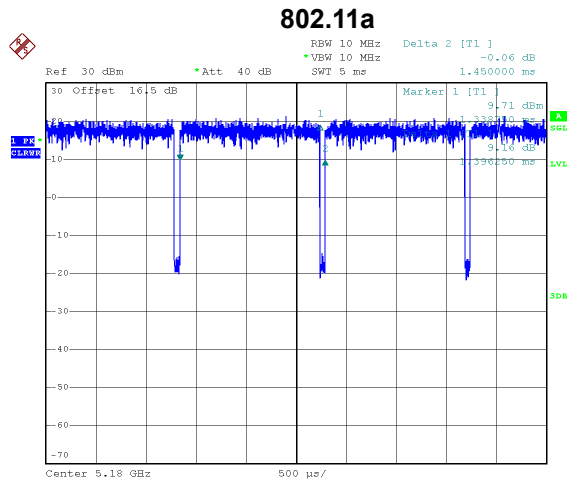


Date: 3.APR.2026 02:59:14

Duty cycle = $1.396 \text{ ms} / 1.450 \text{ ms} = 96.28\%$
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.16 \text{ dB}$

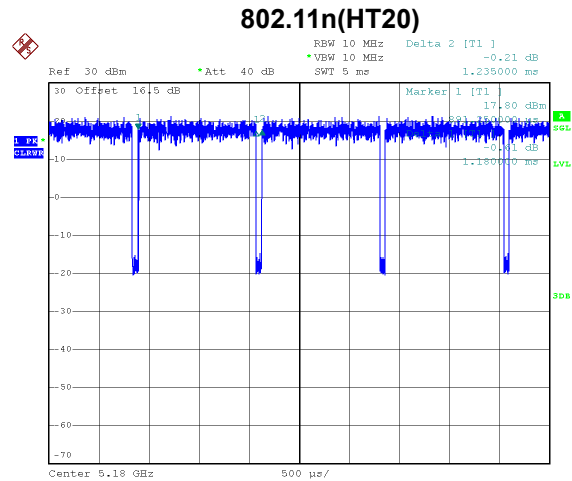


Date: 3.APR.2026 05:03:42

Duty cycle = $1.180 \text{ ms} / 1.235 \text{ ms} = 95.55\%$
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.20 \text{ dB}$

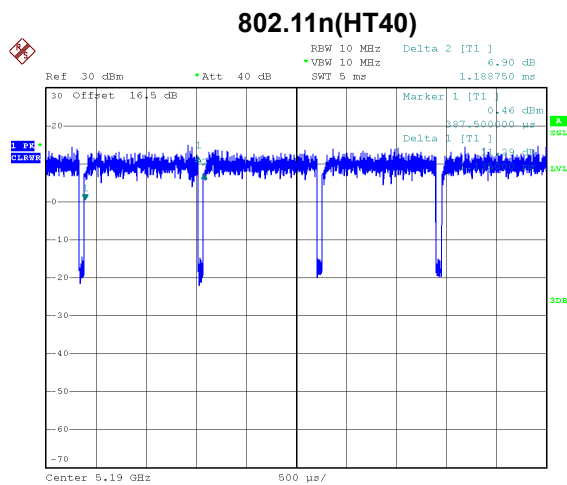

Date: 3.APR.2026 05:43:54

Duty cycle = $1.135 \text{ ms} / 1.189 \text{ ms} = 95.46\%$
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.20 \text{ dB}$

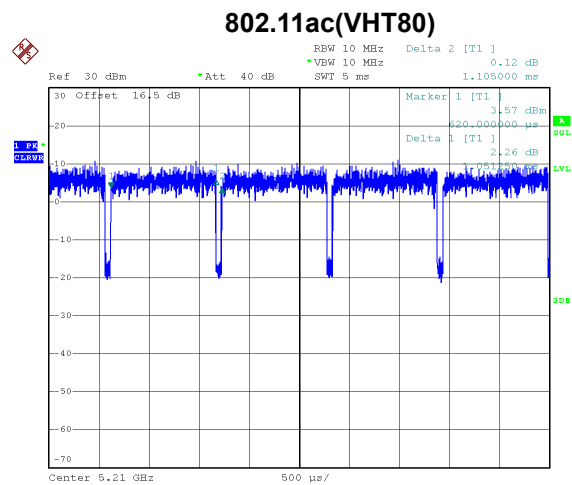

Date: 3.APR.2026 06:22:44

Duty cycle = $1.051 \text{ ms} / 1.105 \text{ ms} = 95.11\%$
Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.22 \text{ dB}$

NOTE:

For IEEE 802.11a:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 716 Hz (Duty cycle < 98%).

For IEEE 802.11n(HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 847 Hz (Duty cycle < 98%).


For IEEE 802.11n(HT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 881 Hz (Duty cycle < 98%).

For IEEE 802.11ac(VHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 kHz (Duty cycle < 98%).

3.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

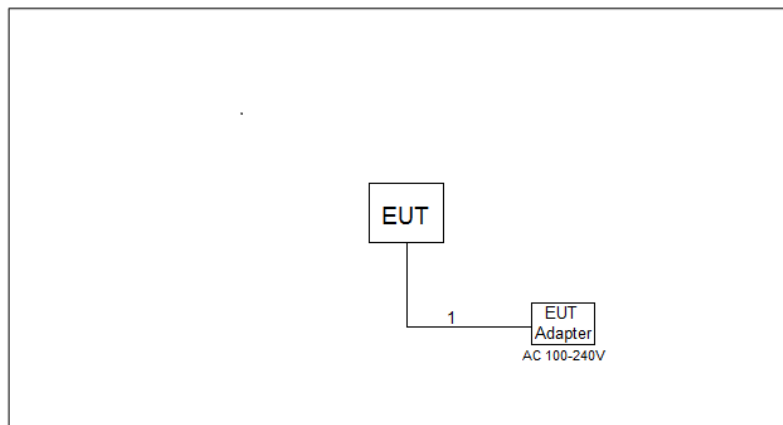

3.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
-	-	-	-	-

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.2m

3.7 CUSTOMER INFORMATION DESCRIPTION

- 1) The antenna gain is provided by the manufacturer.
- 2) Except for AC power line conducted emissions and radiated emissions, the results of all test items include cable losses. All cable losses are provided by the testing laboratory.

4. AC POWER LINE CONDUCTED EMISSIONS

4.1 LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value

4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameter	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP

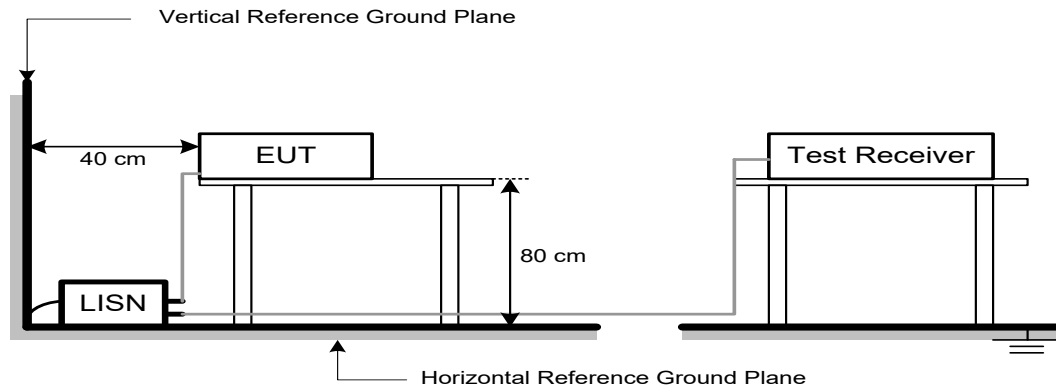

4.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

5. RADIATED EMISSIONS

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	EIRP Limit (dBm/MHz)	Band edge at 3m (dBμV/m)	Harmonic at 1m (dBμV/m)
5150-5250	-27	68.2	77.7 (Note 3)
5250-5350	-27	68.2	77.7 (Note 3)
5470-5725	-27	68.2	77.7 (Note 3)
5725-5850 NOTE (2)	-27	68.2	77.7 (Note 3)
	10	105.2	114.7 (Note 3)
	15.6	110.8	120.3 (Note 3)
	27	122.2	131.7 (Note 3)

NOTE:

- (1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

- (2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (3)

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

$20\log(d_{\text{limit}}/d_{\text{measure}}) = 20\log(3/1) = 9.5 \text{ dB}$.

FS_{limit} : Harmonic at 3m Peak and Average limit.

FS_{max} : Harmonic at 1m Peak and Average Maximum value.

d_{limit} : Harmonic at 3m test distance.

d_{measure} : Harmonic Actual test distance.

- (4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

5.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic or 40 GHz, whichever is lower
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~40 GHz for PK/AVG detector

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP


9 kHz to 30 MHz

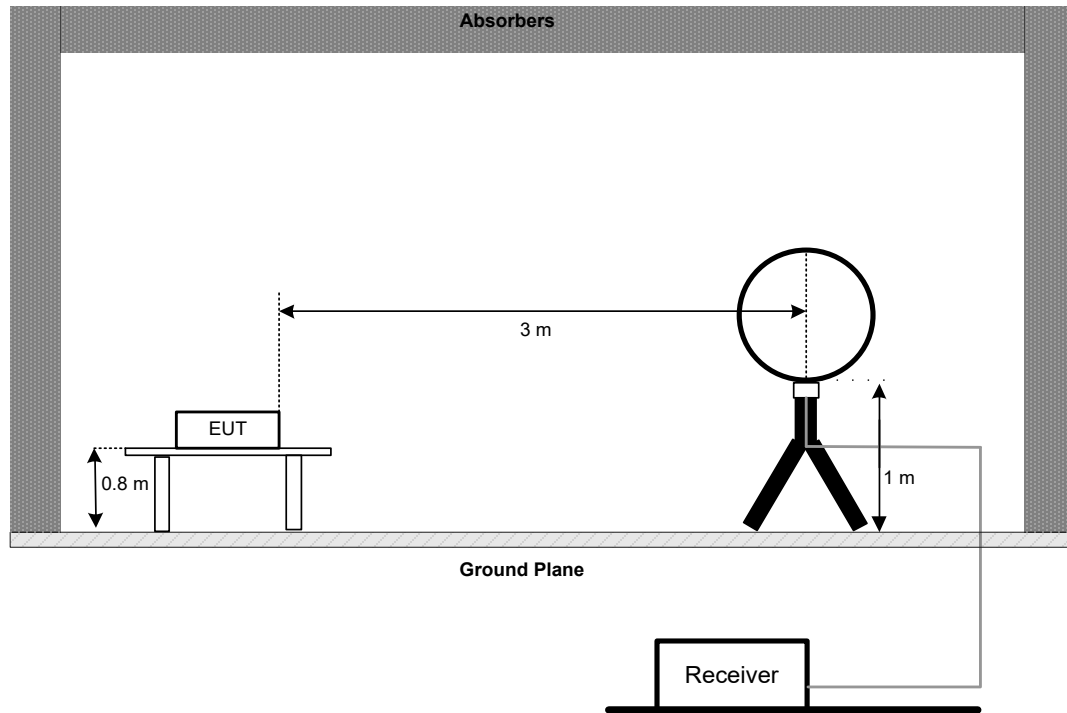


30 MHz to 1 GHz

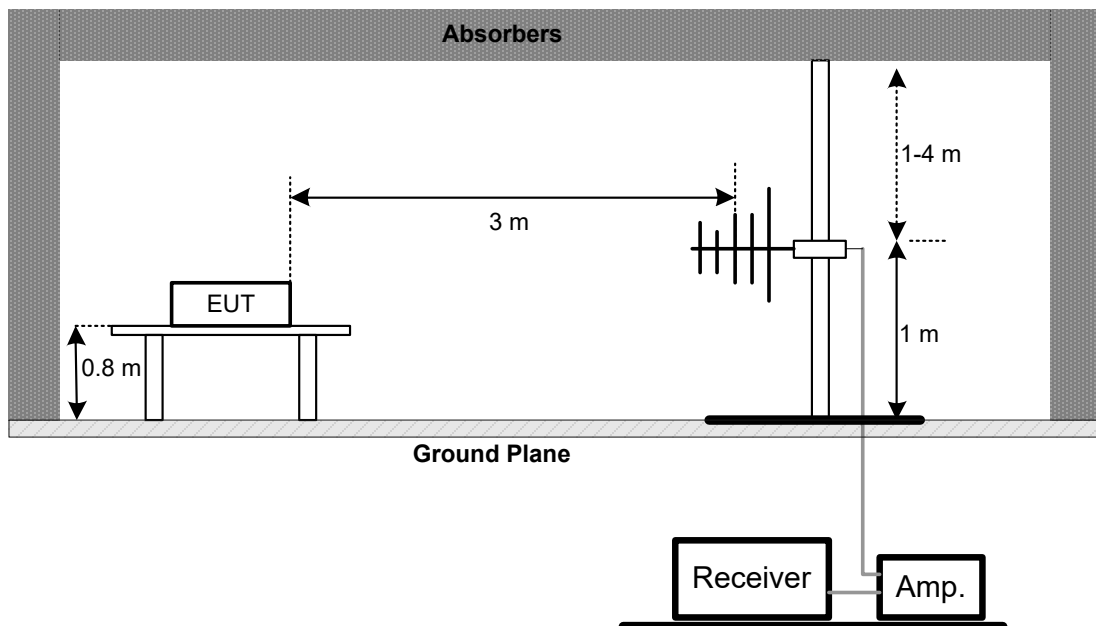

Above 1 GHz Band edge & Harmonic(1 GHz to 18 GHz)

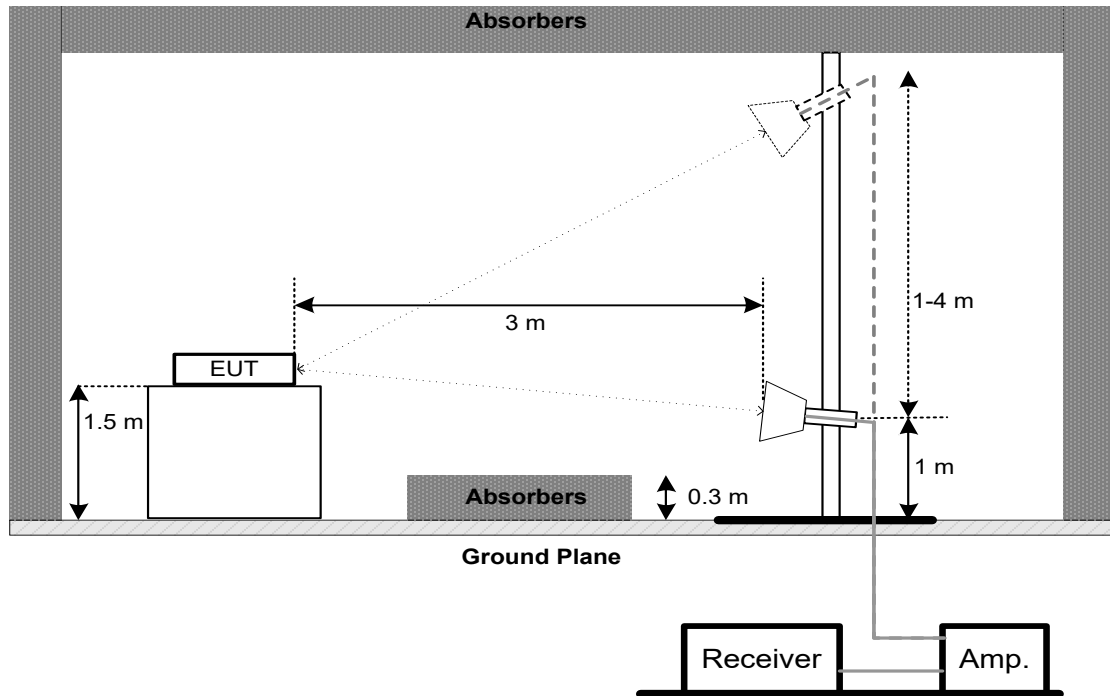

Harmonic(18 GHz to 40 GHz)

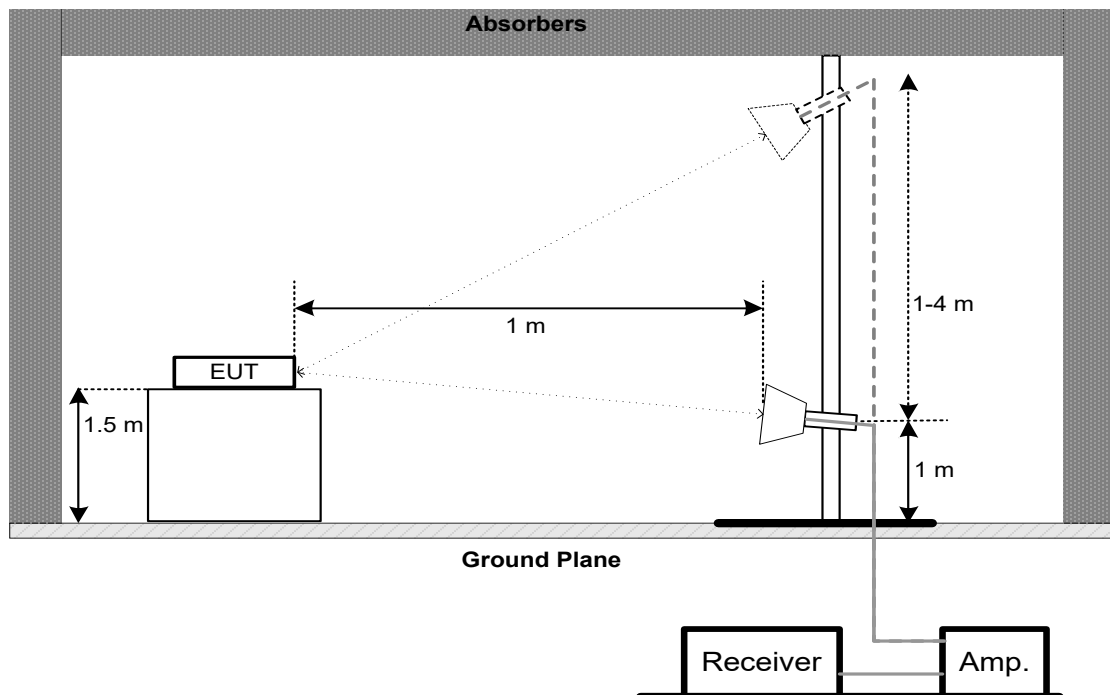

5.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

5.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a) FCC 15.407(e)	26 dB Bandwidth	-	5150-5250
	26 dB Bandwidth	-	5250-5350
	26 dB Bandwidth	-	5470-5725
	6 dB Bandwidth	Minimum 500 kHz	5725-5850

6.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below
- b. Spectrum Setting:
For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Span	> 26 dB Bandwidth
RBW	Appromiximately 1% of the emission bandwidth
VBW	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span	> 6 dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Occupied Bandwidth:

Spectrum Parameter	Setting
Span	1.5 times to 5 times the OBW
RBW	1% to 5% of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- c. Measured the spectrum width with power higher than 26 dB / 6 dB below carrier.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. MAXIMUM OUTPUT POWER

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Maximum Output Power	AP device: 1 Watt (30 dBm) Client device: 250 mW (23.98 dBm)	5150-5250
		250 mW (23.98 dBm)	5250-5350
		250 mW (23.98 dBm)	5470-5725
		1 Watt (30dBm)	5725-5850

Note:

- For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.


7.2 TEST PROCEDURE

- The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- The test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

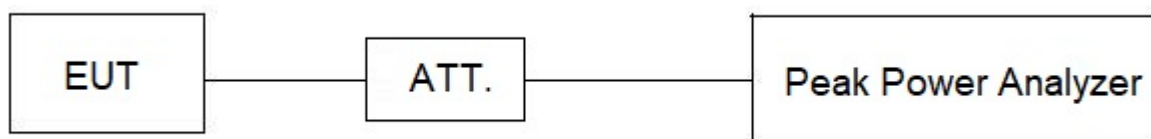

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. POWER SPECTRAL DENSITY

8.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Power Spectral Density	AP device: 17 dBm/MHz Client device: 11 dBm/MHz	5150-5250
		11 dBm/MHz	5250-5350
		11 dBm/MHz	5470-5725
		30 dBm/500 kHz	5725-5850

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:
For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Span	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz
VBW	3 MHz
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	100 kHz
VBW	300 kHz
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 100kHz and VBW at 300kHz if the spectrum analyzer does not have 500 kHz RBW. Then, add $10 \log (500 \text{ kHz}/100 \text{ kHz})$ to the measured result, i.e. 6.99 dB.

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9. FREQUENCY STABILITY

9.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(g)	Frequency Stability	An emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.	5150-5250
			5250-5350
			5470-5725
			5725-5850

9.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:


Spectrum Parameter	Setting
Span	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.
- User manual temperature is -10°C~55°C.

9.3 DEVIATION FROM STANDARD

No deviation.

9.4 TEST SETUP

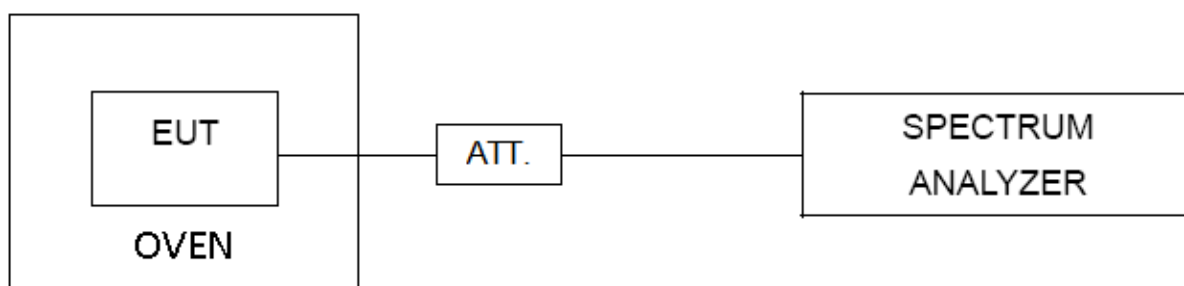

9.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

9.6 TEST RESULTS

Please refer to the APPENDIX H.

10. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions (Test Date: Apr. 07, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Nov. 21, 2026
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Nov. 21, 2026
3	BTL_RE_System	BTL	BTL_RE_System	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M-001	9M	Jul. 08, 2026
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz (Test Date: Apr. 03, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60	00025	Mar. 14, 2027
2	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2026
3	Cable	RegalWay	LMR400-NMNM-6m	N/A	Apr. 26, 2026
4	Cable	RegalWay	LMR400-NMRANM-3.5m	N/A	Apr. 26, 2026
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	966 Chamber room	CM	9*6*6	N/A	May 15, 2026

Radiated Emissions - 30 MHz to 1 GHz (Test Date: Apr. 03, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01462	Dec. 07, 2026
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec. 07, 2026
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	May 17, 2026
4	Cable	RegalWay	LMR400-NMNM-12.5m	N/A	Jun. 04, 2026
5	Cable	RegalWay	LMR400-NMNM-3m	N/A	Jun. 04, 2026
6	Cable	RegalWay	LMR400-NMNM-0.5m	N/A	Jun. 04, 2026
7	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2026
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	CM	9*6*6	N/A	May 15, 2026

Radiated Emissions - 1 GHz - 18 GHz (Test Date: Apr. 09, 2026 ~ Apr. 10, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Positioning Controller	MF	MF-7802	N/A	N/A
2	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
3	Double Ridged Horn Antenna	RF SPIN	DRH18-E	210509A18ES	Sep. 12, 2026
4	MXA Signal Analyzer	KEYSIGHT	N9020B	MY63430227	Jul. 25, 2026
5	Cable	EMC INSTRUMENT	EMC104-SM-SM-1 0000	N/A	Mar. 29, 2027
6	Cable	EMC INSTRUMENT	EMC104-SM-SM-3 000	N/A	Mar. 29, 2027
7	Cable	RegalWay	RWLP50-4.0A-SM RASM-1M	N/A	Mar. 29, 2027
8	966 Chamber room	Tai He	9*6*6 (NSA&VSWR)	N/A	May 18, 2026
9	Preamplifier	EMC INSTRUMENT	EMC118A45SE	981001	May 28, 2026
10	Attenuator	Talent Microwave	TA10A2-S-18	N/A	N/A
11	Filter	COM-MW	ZHPE6-M6500-180 00-547	N/A	Oct. 17, 2026

Radiated Emissions - Above 18 GHz (Test Date: Apr. 03, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Cable	Tonscend	HF160-KMKM-0.5M	N/A	Oct. 21, 2026
2	Cable	Tonscend	HF160-KMKM-5M	N/A	Oct. 21, 2026
3	Pre-Amplifier	EMC INSTRUMENT	EMC184045SE	980409	Nov. 21, 2026
4	DRG Horn Antenna	ETS	3116C	218942	Feb. 03, 2027
5	Positioning Controller	MF	MF-7802	N/A	N/A
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
7	EXA Spectrum Analyzer	Keysight	N9010A	MY55150209	Oct. 17, 2026
8	966 Chamber room	CM	9*6*6	N/A	May 15, 2026

Bandwidth & Power Spectral Density (Test Date: Apr. 03, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	May 17, 2026
2	CTA	BTL	CTA	N/A	N/A
3	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A

Maximum Output Power (Test Date: Apr. 02, 2026 ~ Apr. 15, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyzer	Keysight	8990B	MY51000506	May 17, 2026
2	Wideband power sensor	Keysight	N1923A	MY58310004	May 17, 2026
3	Isolation attenuator	Z-Link	ASMA-10-18-2W	N/A	N/A


Frequency Stability (Test Date: Apr. 03, 2026)					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100185	May 17, 2026
2	Multimeter	FLUKE	15B+(TR13)	45123773WS	May 17, 2026
3	CTA	BTL	CTA	N/A	N/A
4	Desktop Constant Temperature Chamber	BELL	BTH-50C	20170306001	Dec. 19, 2026
5	AC power source	Preen	AFC-S-1250	F123080107	Nov. 21, 2026
6	Isolation attenuator	Z-Link	ASMA-16-18-2W	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX A Mode Channel 40 (UNII-1)	Phase	Line
-----------	-------------------------------	-------	------

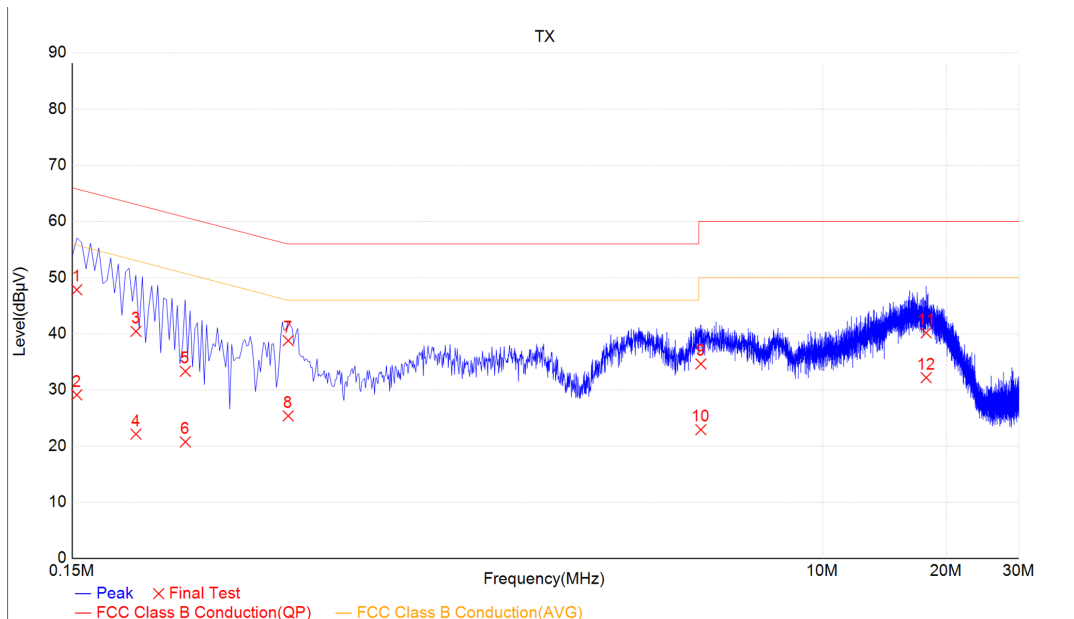


Suspected Note List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Content	
1	0.1538	37.48	10.37	47.85	65.78	-17.93	QP		
2	0.1538	18.76	10.37	29.13	55.78	-26.65	AVG		
3	0.2142	30.03	10.41	40.43	63.05	-22.61	QP		
4	0.2142	11.74	10.41	22.15	53.05	-30.9	AVG		
5	0.2824	22.88	10.44	33.33	60.76	-27.43	QP		
6	0.2824	10.3	10.44	20.75	50.76	-30.01	AVG		
7	0.5023	28.32	10.48	38.8	56	-17.2	QP		
8	0.5023	14.91	10.48	25.39	46	-20.61	AVG		
9	5.0578	23.5	11.15	34.65	60	-25.35	QP		
10	5.0578	11.78	11.15	22.93	50	-27.07	AVG		
11	17.8504	26.35	13.83	40.18	60	-19.82	QP		
12	17.8504	18.37	13.83	32.2	50	-17.8	AVG		

REMARKS:

(1) Level = Reading + Factor.

(2) Margin = Level - Limit.

Test Mode	TX A Mode Channel 40 (UNII-1)	Phase	Neutral
-----------	-------------------------------	-------	---------

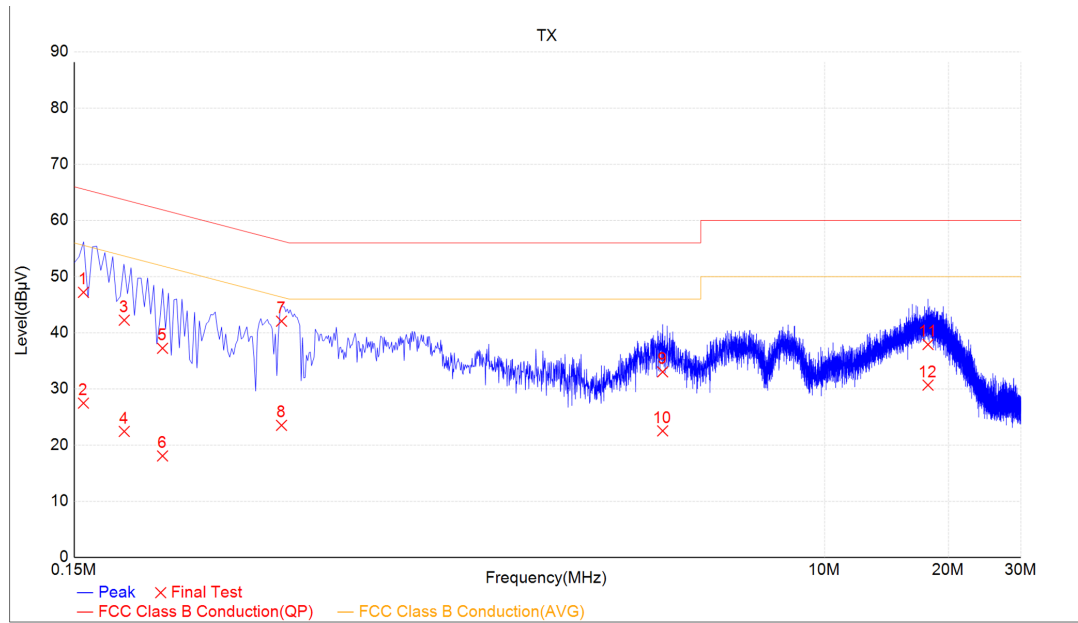

Suspected Note List									
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Content	
1	0.1579	36.79	10.42	47.21	65.57	-18.36	QP		
2	0.1579	17.06	10.42	27.48	55.57	-28.09	AVG		
3	0.1984	31.81	10.44	42.25	63.69	-21.45	QP		
4	0.1984	12.01	10.44	22.45	53.69	-31.24	AVG		
5	0.2458	26.79	10.45	37.25	61.89	-24.64	QP		
6	0.2458	7.63	10.45	18.08	51.89	-33.81	AVG		
7	0.4784	31.56	10.51	42.07	56.37	-14.3	QP		
8	0.4784	13.03	10.51	23.53	46.37	-22.84	AVG		
9	4.0385	22.13	10.92	33.05	56	-22.95	QP		
10	4.0385	11.62	10.92	22.54	46	-23.46	AVG		
11	17.8342	23.88	14.04	37.92	60	-22.08	QP		
12	17.8342	16.65	14.04	30.69	50	-19.31	AVG		


REMARKS:

(1) Level = Reading + Factor.

(2) Margin = Level - Limit.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX A Mode Channel 40 (UNII-1)	Polarization	Ant 0°
-----------	-------------------------------	--------------	--------

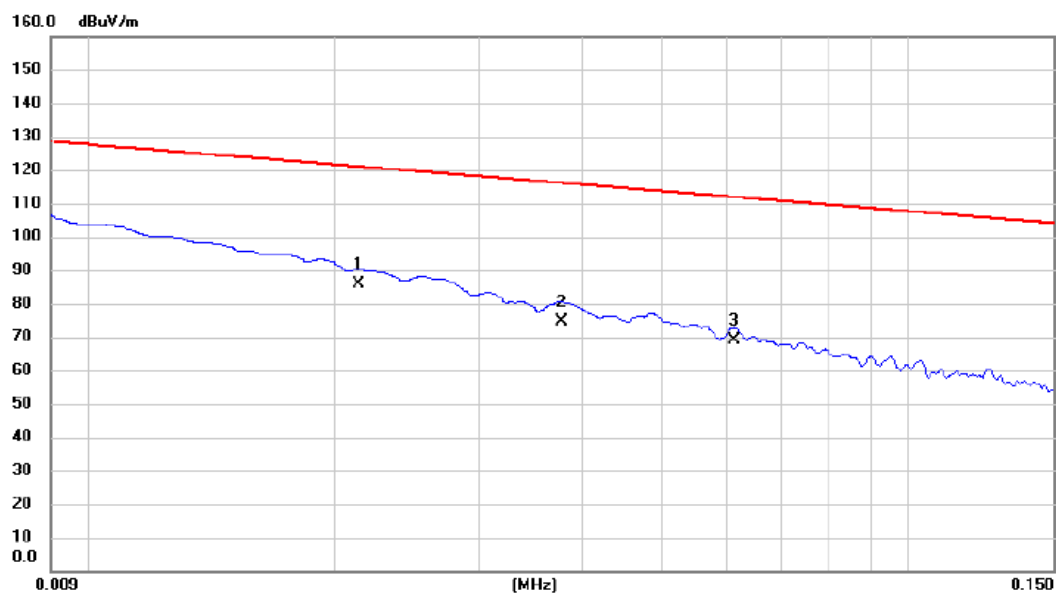


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.021	65.17	20.67	85.84	121.00	-35.16	AVG	
2		0.038	54.18	20.58	74.76	116.06	-41.30	AVG	
3		0.061	48.22	20.60	68.82	111.86	-43.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX A Mode Channel 40 (UNII-1)	Polarization	Ant 0°
-----------	-------------------------------	--------------	--------

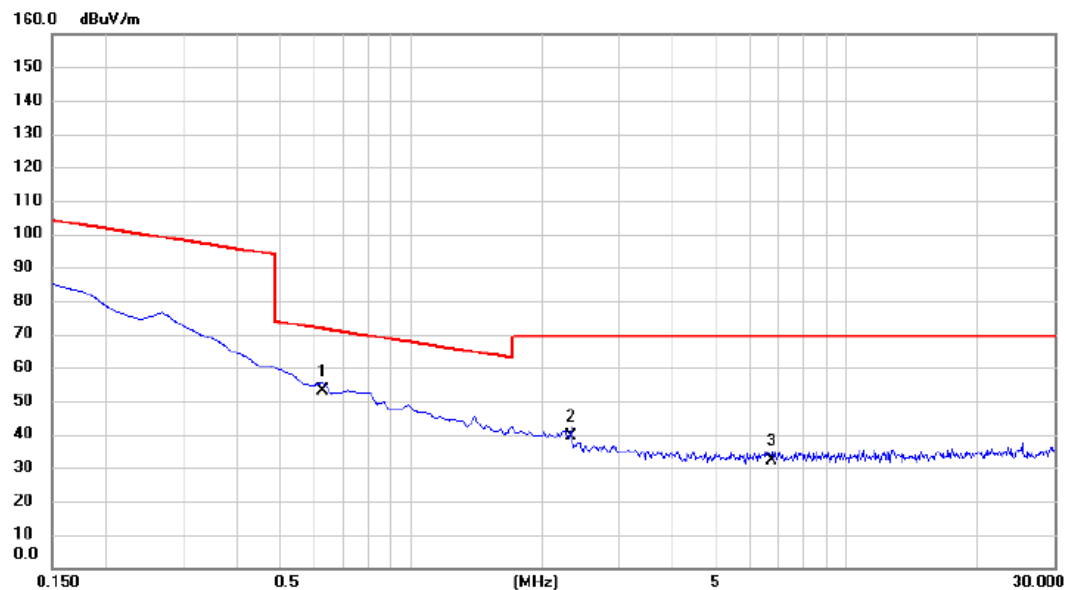


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.628	32.39	20.52	52.91	71.65	-18.74	QP	
2		2.329	19.09	20.31	39.40	69.54	-30.14	QP	
3		6.747	11.85	20.38	32.23	69.54	-37.31	QP	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX A Mode Channel 40 (UNII-1)	Polarization	Ant 90°
-----------	-------------------------------	--------------	---------

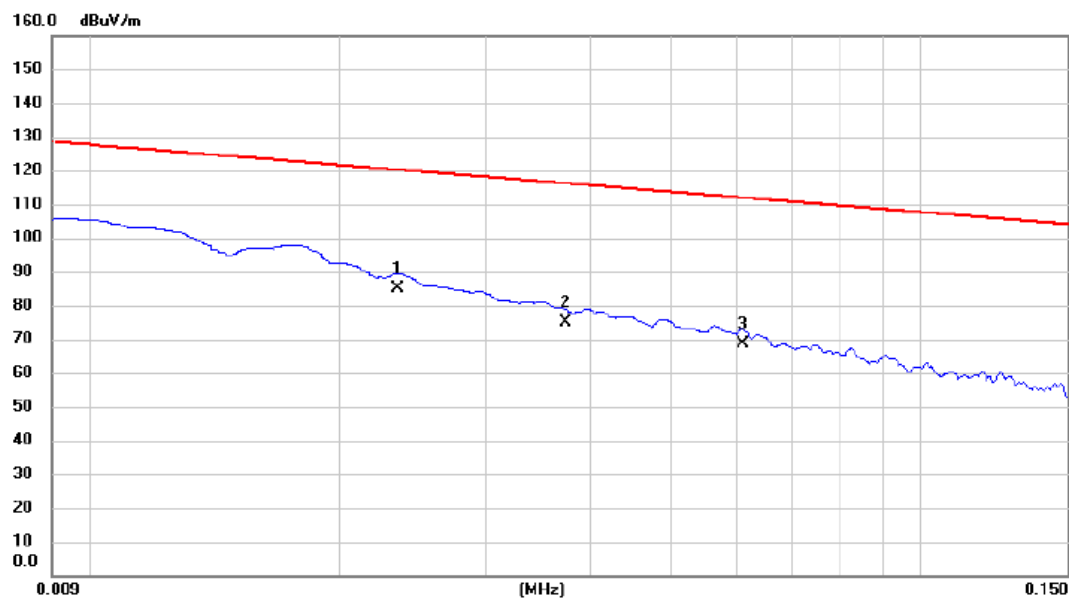


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.024	64.36	20.64	85.00	120.18	-35.18	AVG	
2		0.037	54.60	20.58	75.18	116.15	-40.97	AVG	
3		0.061	48.20	20.60	68.80	111.90	-43.10	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX A Mode Channel 40 (UNII-1)	Polarization	Ant 90°
-----------	-------------------------------	--------------	---------

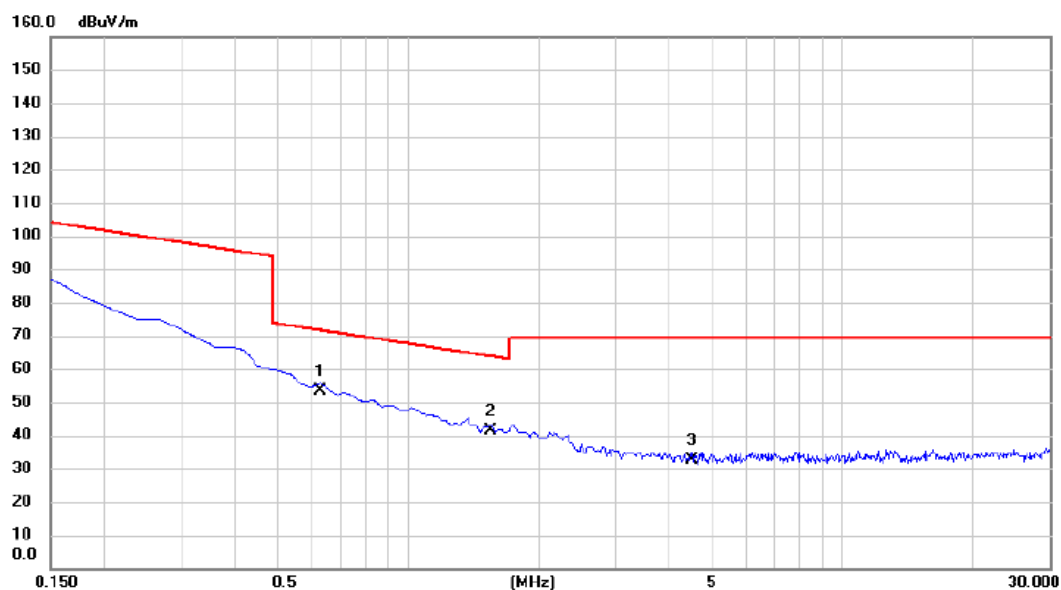


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	0.628	33.01	20.52	53.53	71.65	-18.12	QP	
2	1.553	21.21	20.18	41.39	63.78	-22.39	QP	
3	4.508	12.17	20.34	32.51	69.54	-37.03	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX A Mode Channel 40 (UNII-1)	Polarization	Vertical
-----------	-------------------------------	--------------	----------

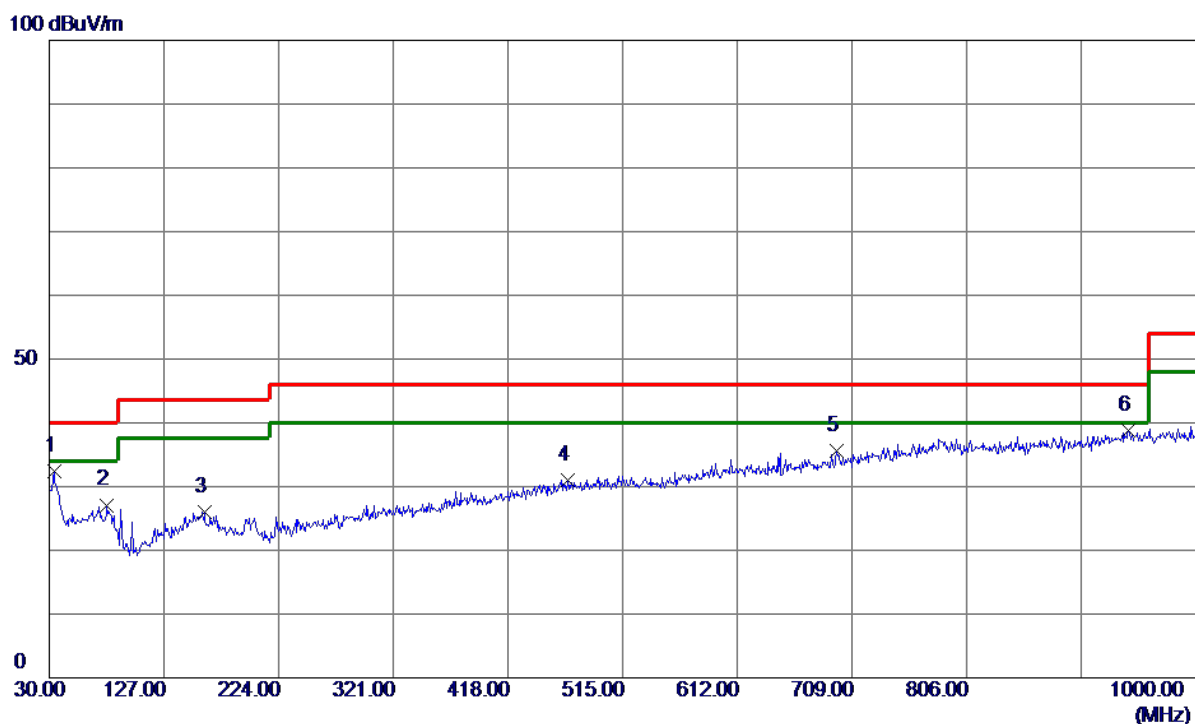

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	33.8800	44.88	-12.43	32.45	40.00	-7.55	Peak	
2	78.5000	42.15	-15.05	27.10	40.00	-12.90	Peak	
3	161.4350	36.74	-10.71	26.03	43.52	-17.49	Peak	
4	468.4400	36.87	-5.81	31.06	46.02	-14.96	Peak	
5	696.3900	37.51	-1.92	35.59	46.02	-10.43	Peak	
6 *	943.2550	37.56	1.26	38.82	46.02	-7.20	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX A Mode Channel 40 (UNII-1)	Polarization	Horizontal
-----------	-------------------------------	--------------	------------

100 dBuV/m

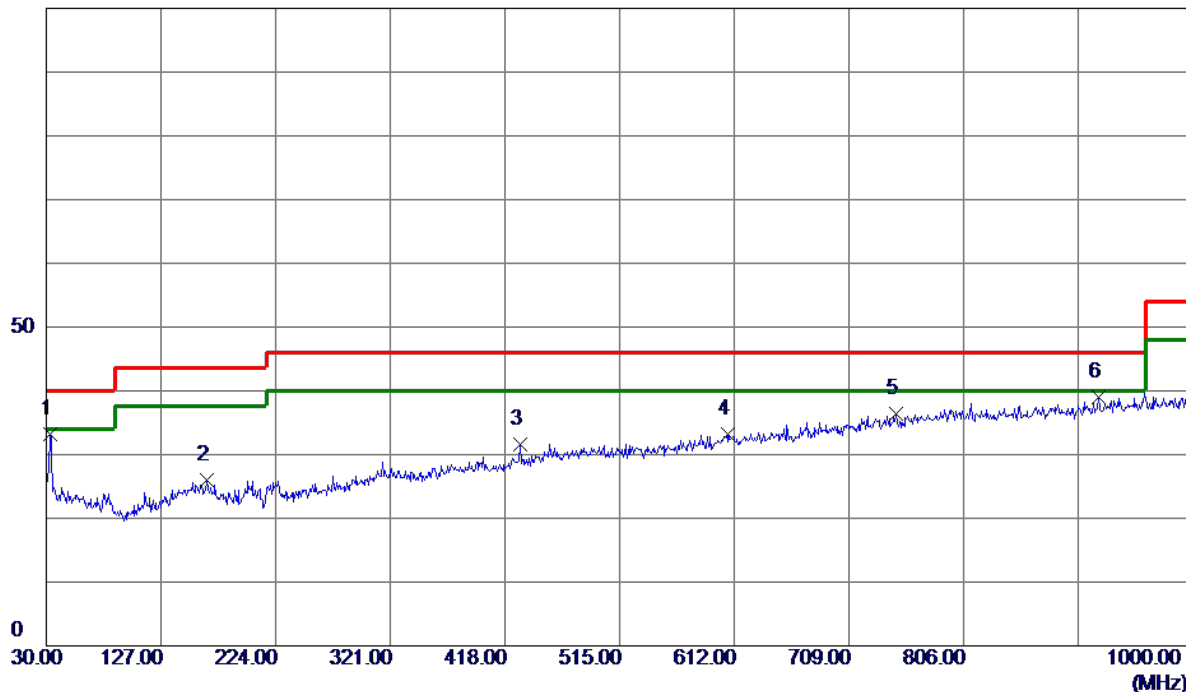

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	33.3950	45.74	-12.45	33.29	40.00	-6.71	Peak	
2	165.8000	36.79	-10.80	25.99	43.52	-17.53	Peak	
3	431.0950	38.16	-6.65	31.51	46.02	-14.51	Peak	
4	606.6650	36.31	-3.06	33.25	46.02	-12.77	Peak	
5	749.2550	37.55	-1.19	36.36	46.02	-9.66	Peak	
6	920.4600	38.44	0.61	39.05	46.02	-6.97	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

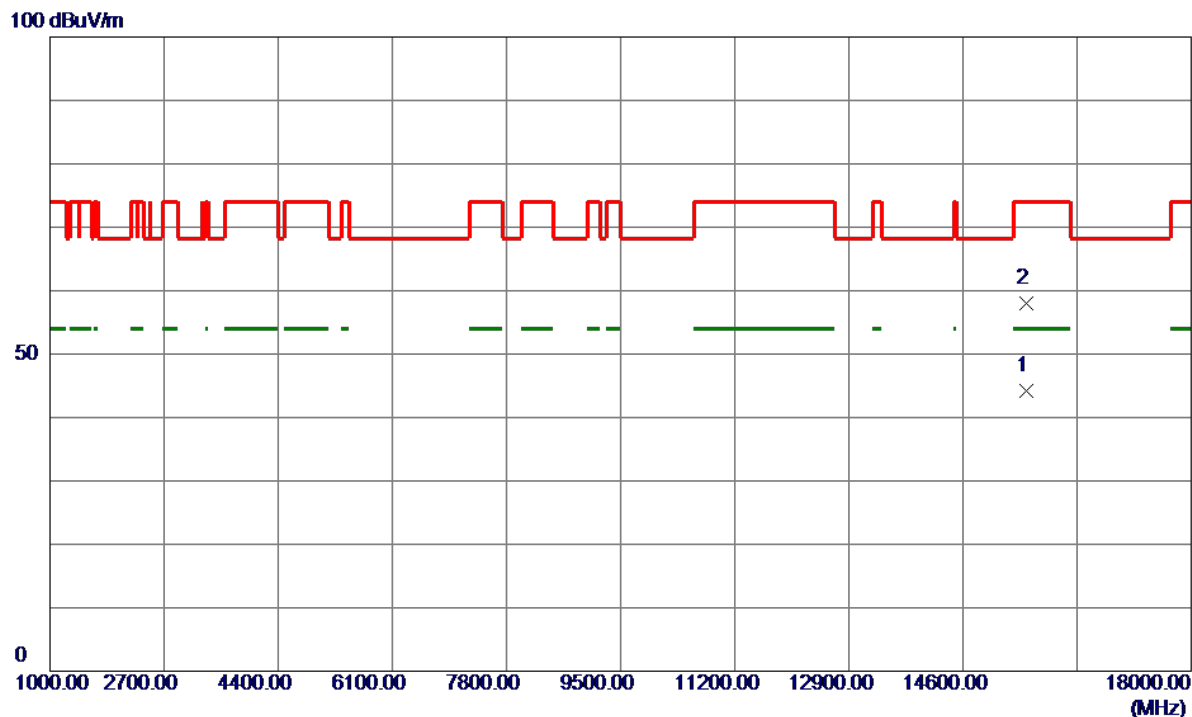


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15540.1500	32.87	11.39	44.26	54.00	-9.74	AVG	
2	15538.0200	46.70	11.39	58.09	74.00	-15.91	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5180 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

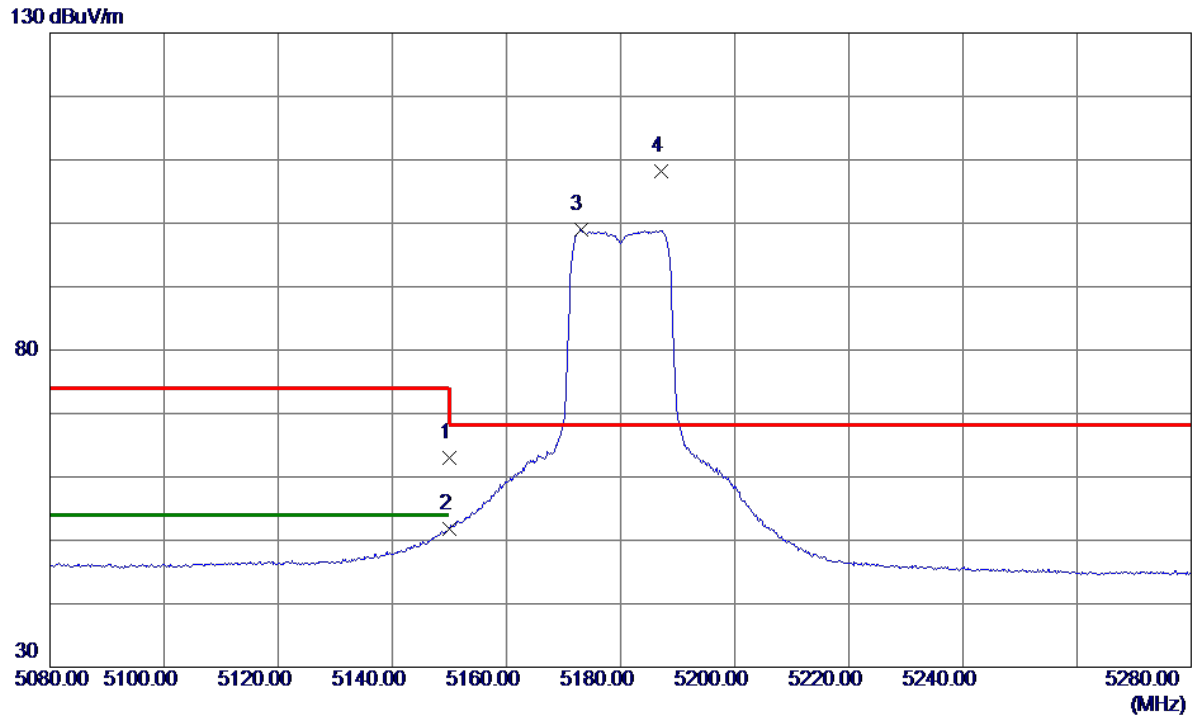


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	46.86	16.07	62.93	74.00	-11.07	Peak	
2	5150.0000	35.73	16.07	51.80	54.00	-2.20	AVG	
3	5173.0000	82.84	16.08	98.92	999.00	-900.08	AVG	No Limit
4 *	5187.2000	92.17	16.08	108.25	68.20	40.05	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

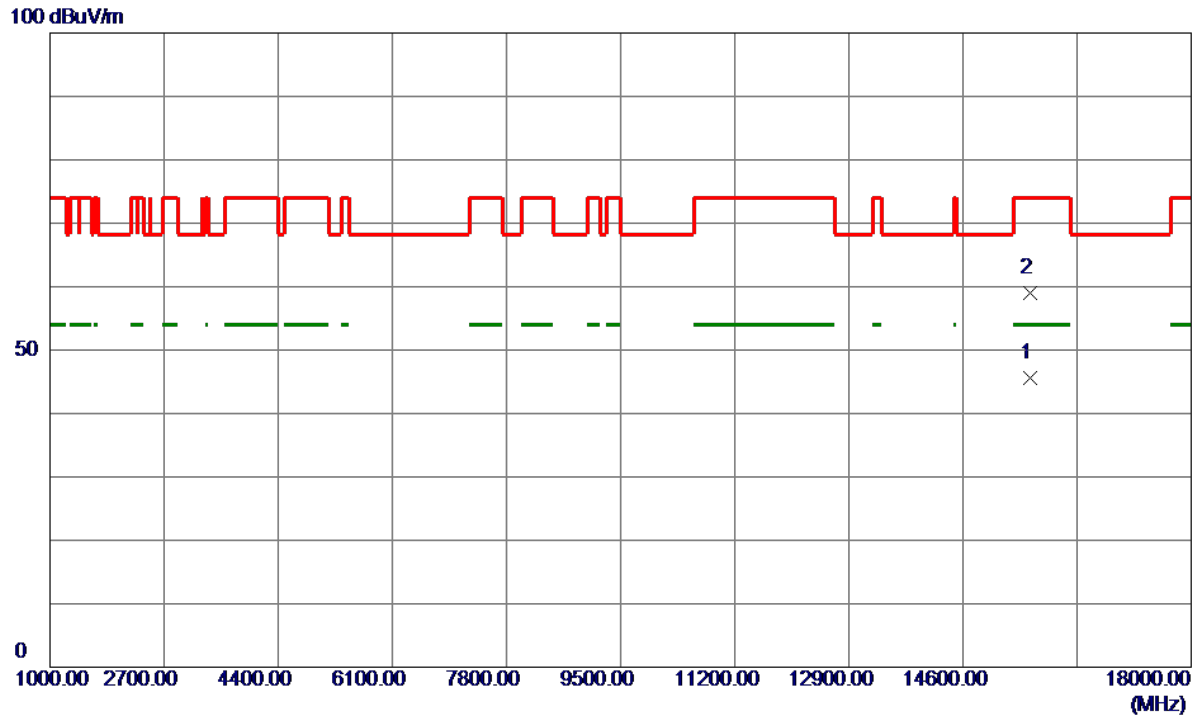


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15600.9600	34.15	11.38	45.53	54.00	-8.47	AVG	
2	15609.0900	47.61	11.38	58.99	74.00	-15.01	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

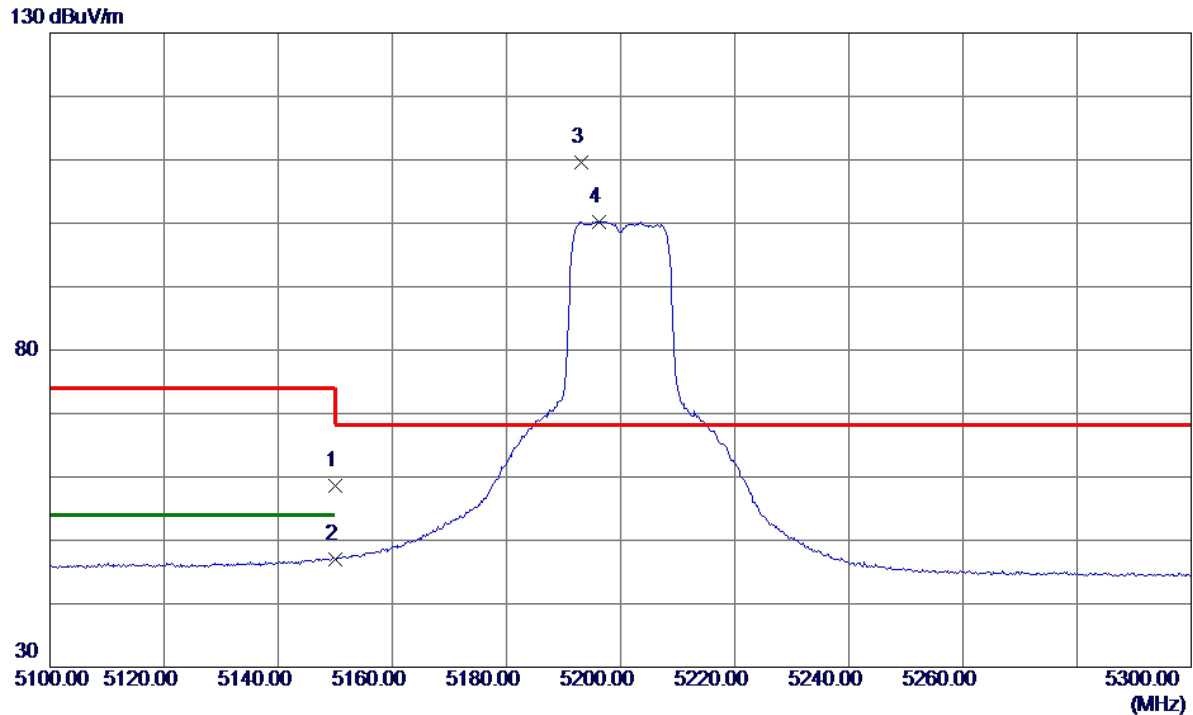


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	42.44	16.07	58.51	74.00	-15.49	Peak	
2	5150.0000	30.89	16.07	46.96	54.00	-7.04	AVG	
3 *	5193.2000	93.53	16.08	109.61	68.20	41.41	Peak	No Limit
4	5196.2000	84.21	16.08	100.29	999.00	-898.71	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5240 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

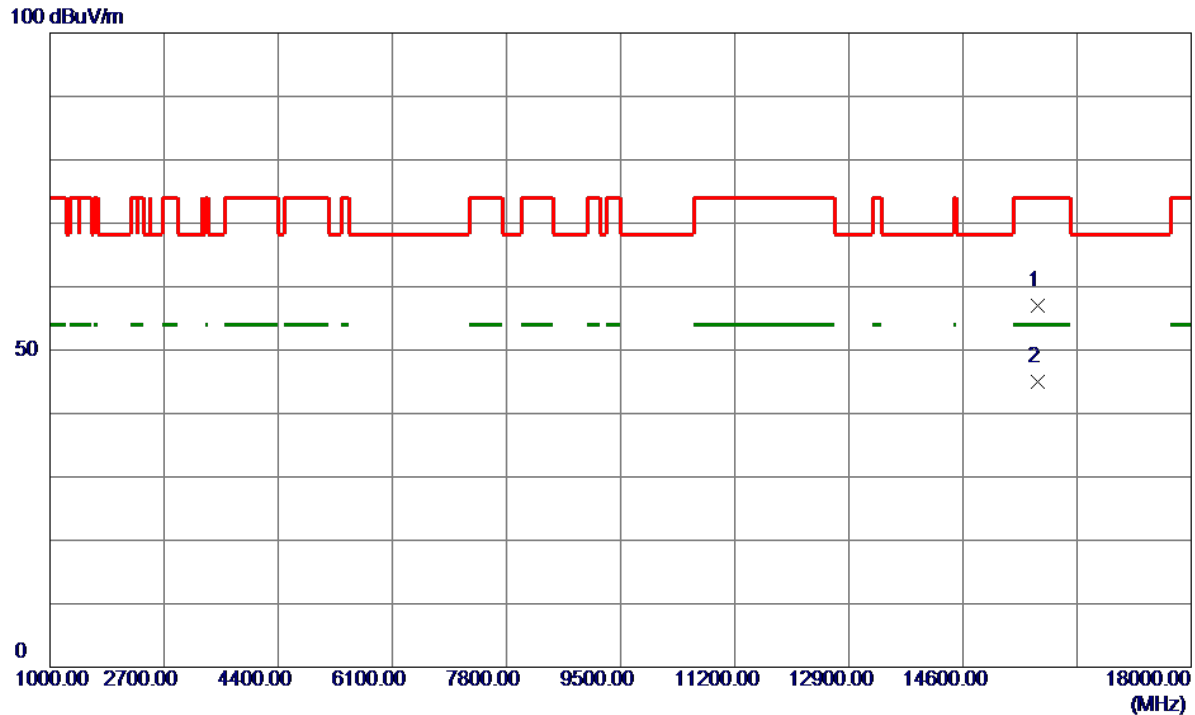


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15722.9700	45.61	11.36	56.97	74.00	-17.03	Peak	
2 *	15720.4800	33.61	11.36	44.97	54.00	-9.03	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT20) Mode 5180 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

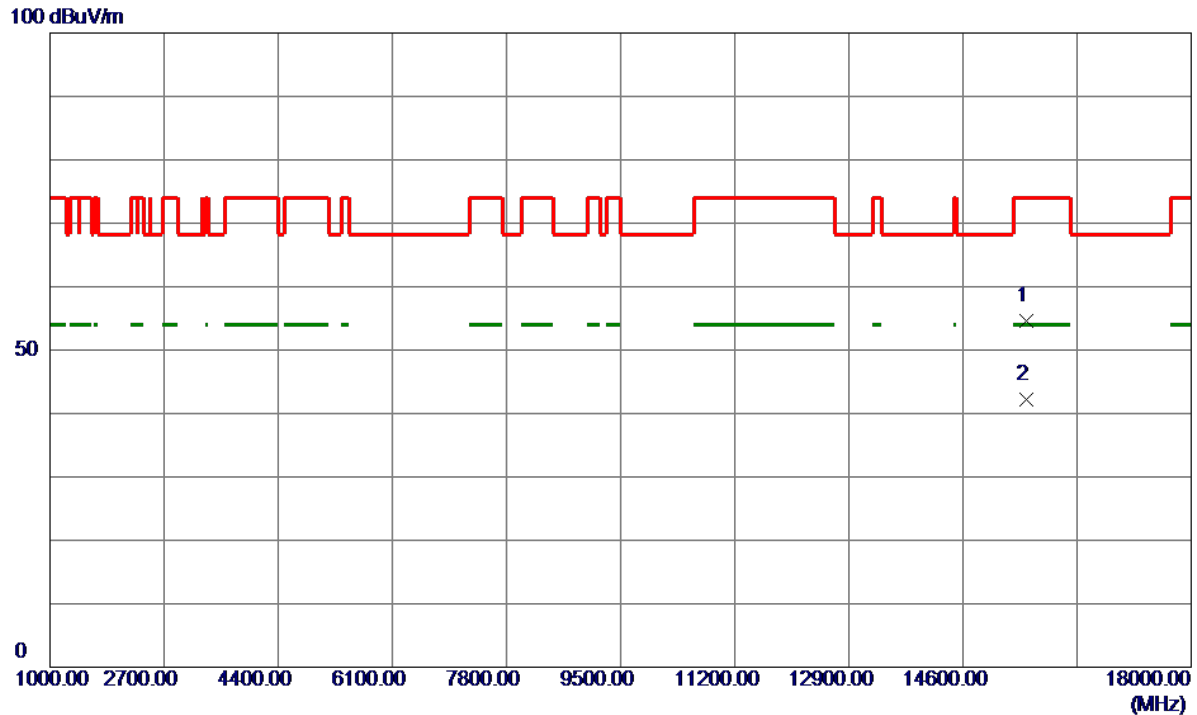


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15535.9600	43.27	11.39	54.66	74.00	-19.34	Peak	
2 *	15539.6000	30.73	11.39	42.12	54.00	-11.88	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT20) Mode 5180 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

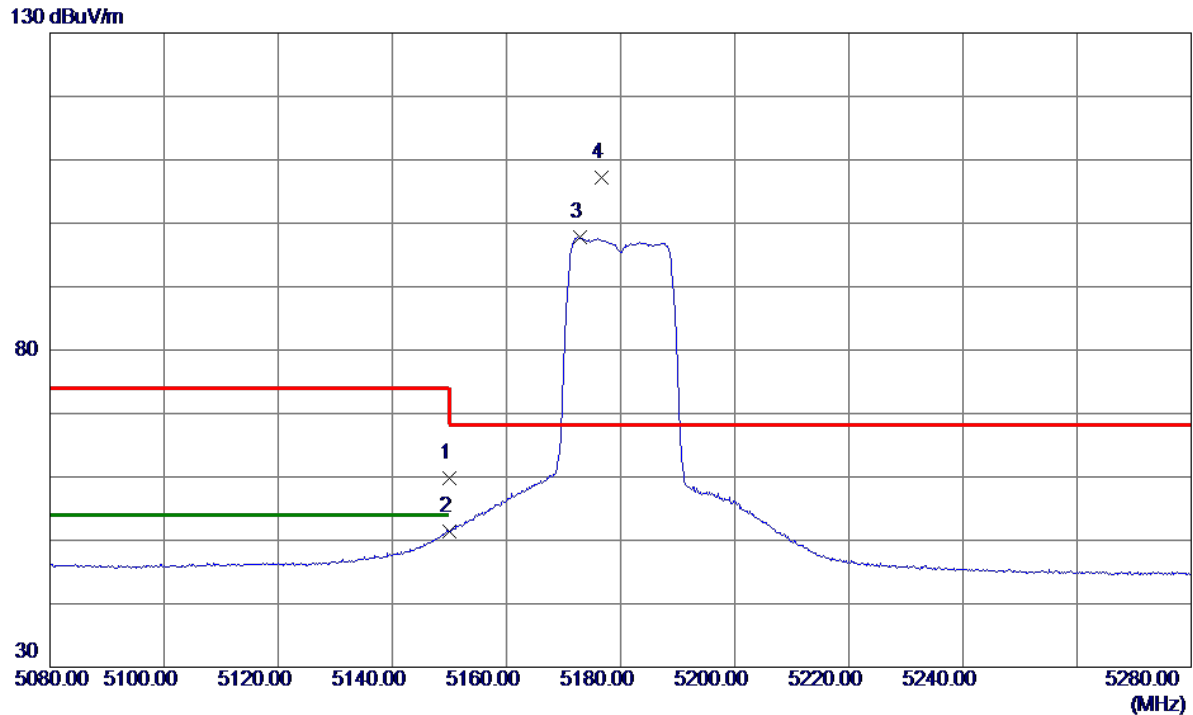


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	43.71	16.07	59.78	74.00	-14.22	Peak	
2	5150.0000	35.27	16.07	51.34	54.00	-2.66	AVG	
3	5172.8000	81.72	16.08	97.80	999.00	-901.20	AVG	No Limit
4 *	5176.6000	91.06	16.08	107.14	68.20	38.94	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT20) Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

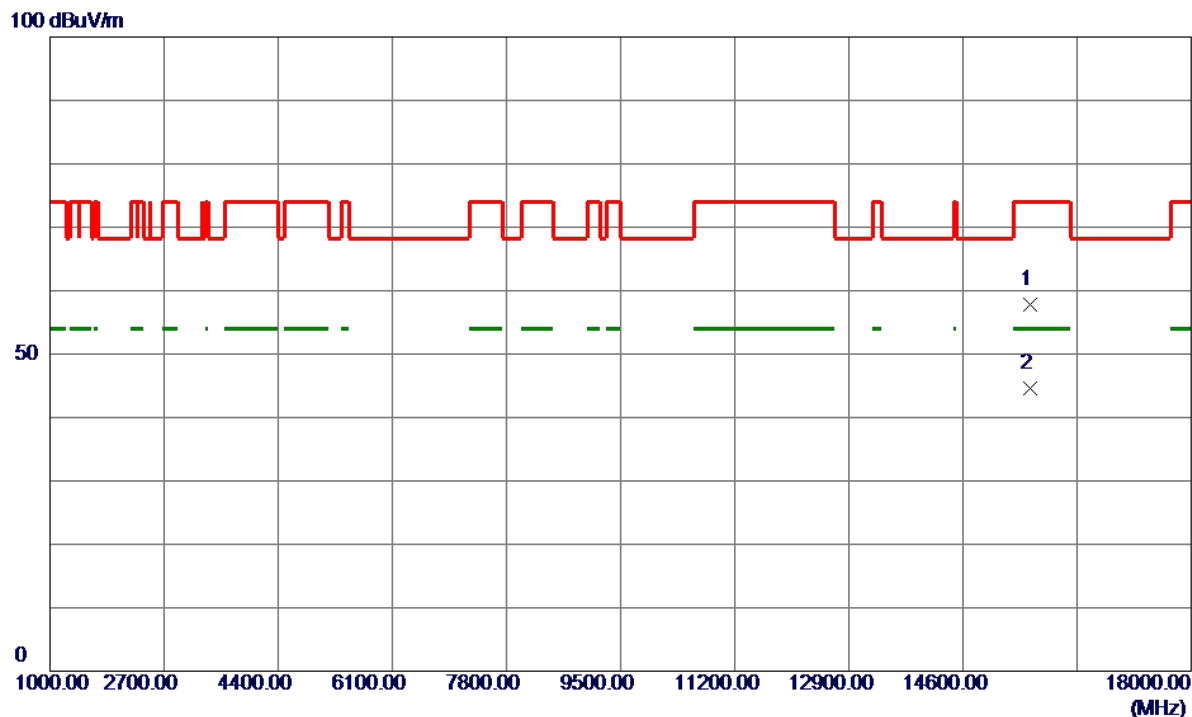


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15599.5600	46.41	11.38	57.79	74.00	-16.21	Peak	
2 *	15600.0800	33.18	11.38	44.56	54.00	-9.44	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT20) Mode 5200 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

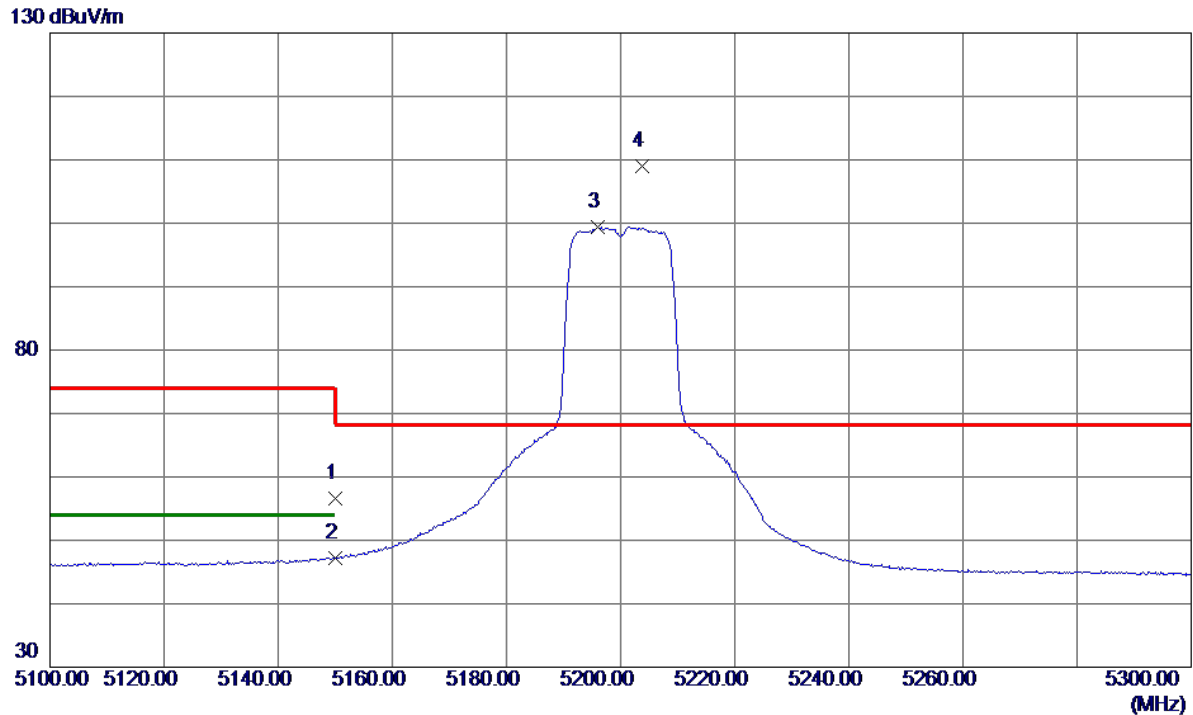


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	40.46	16.07	56.53	74.00	-17.47	Peak	
2	5150.0000	31.06	16.07	47.13	54.00	-6.87	AVG	
3	5196.0000	83.34	16.08	99.42	999.00	-899.58	AVG	No Limit
4 *	5203.8000	92.89	16.09	108.98	68.20	40.78	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT20) Mode 5240 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

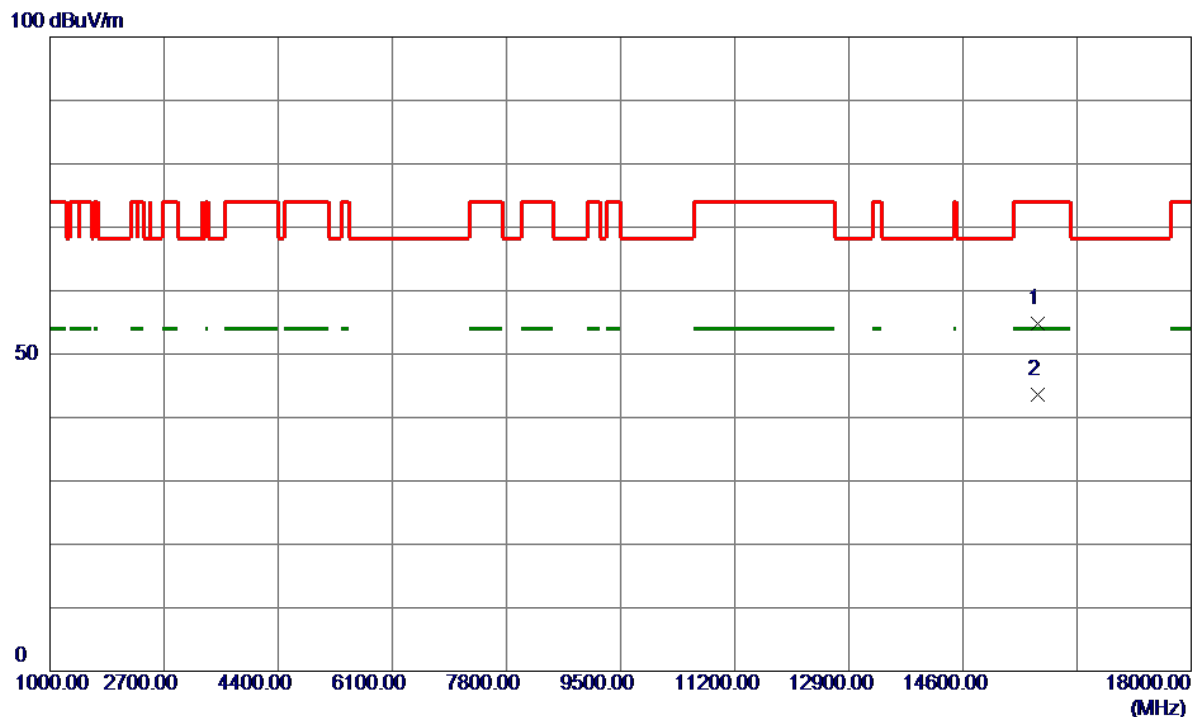


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15710.0400	43.38	11.37	54.75	74.00	-19.25	Peak	
2 *	15719.2800	32.15	11.36	43.51	54.00	-10.49	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT40) Mode 5190 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

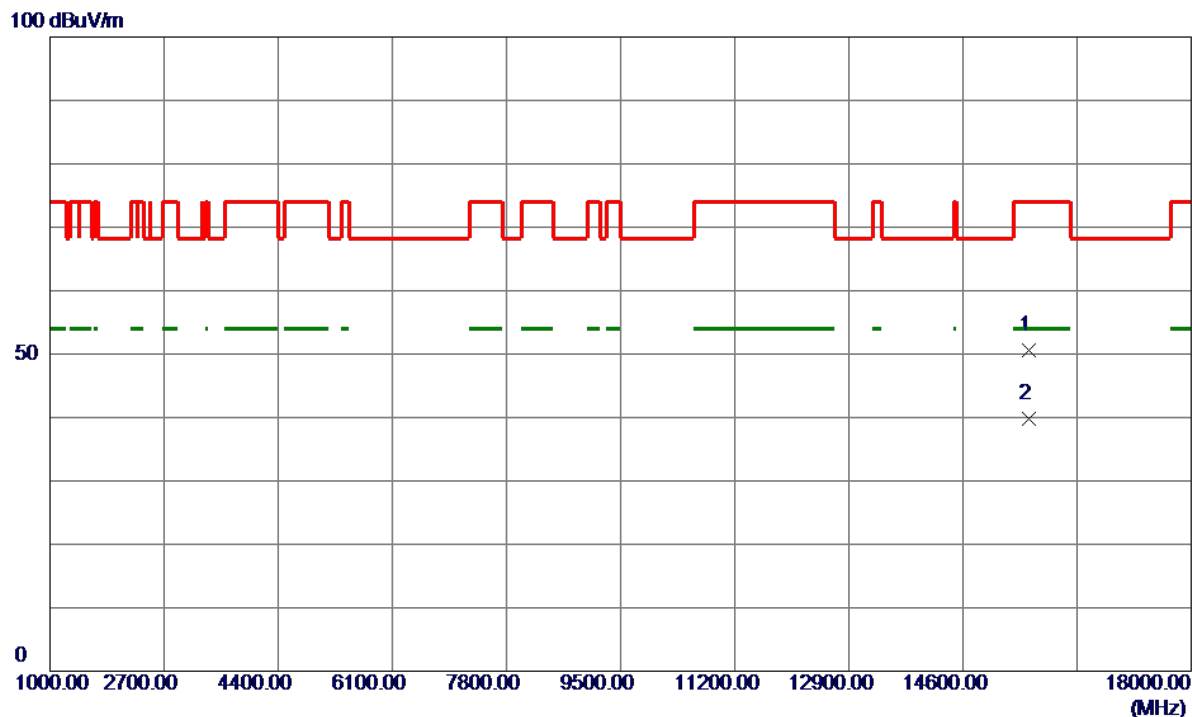


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15578.1900	39.15	11.39	50.54	74.00	-23.46	Peak	
2 *	15579.1800	28.44	11.39	39.83	54.00	-14.17	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT40) Mode 5190 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

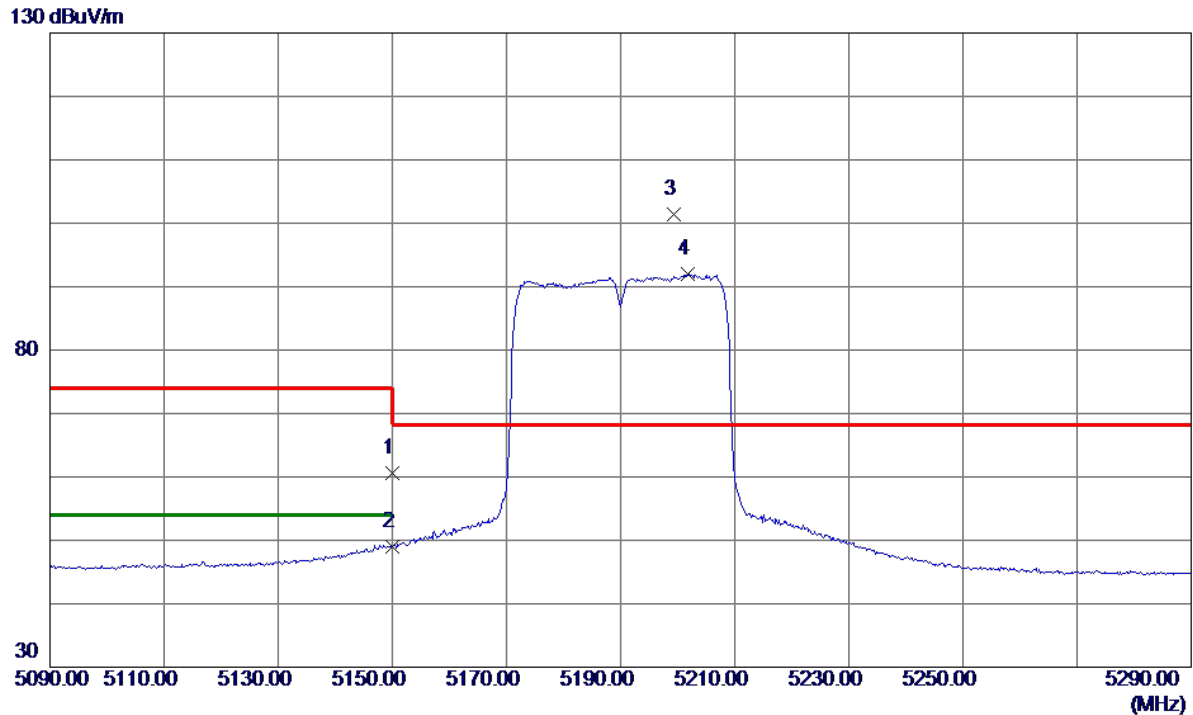


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	44.57	16.07	60.64	74.00	-13.36	Peak	
2	5150.0000	32.96	16.07	49.03	54.00	-4.97	AVG	
3 *	5199.4000	85.28	16.08	101.36	68.20	33.16	Peak	No Limit
4	5201.8000	76.00	16.08	92.08	999.00	-906.92	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT40) Mode 5230 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

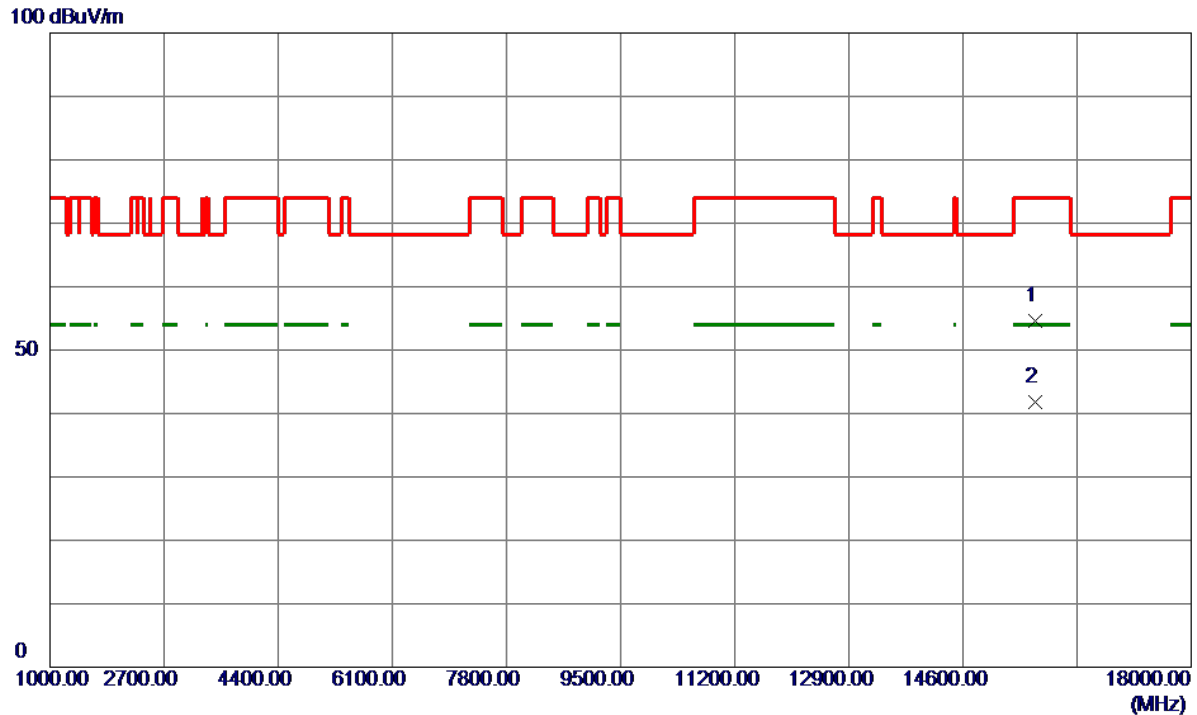


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15677.7600	43.20	11.37	54.57	74.00	-19.43	Peak	
2 *	15681.9900	30.52	11.37	41.89	54.00	-12.11	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX N(HT40) Mode 5230 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

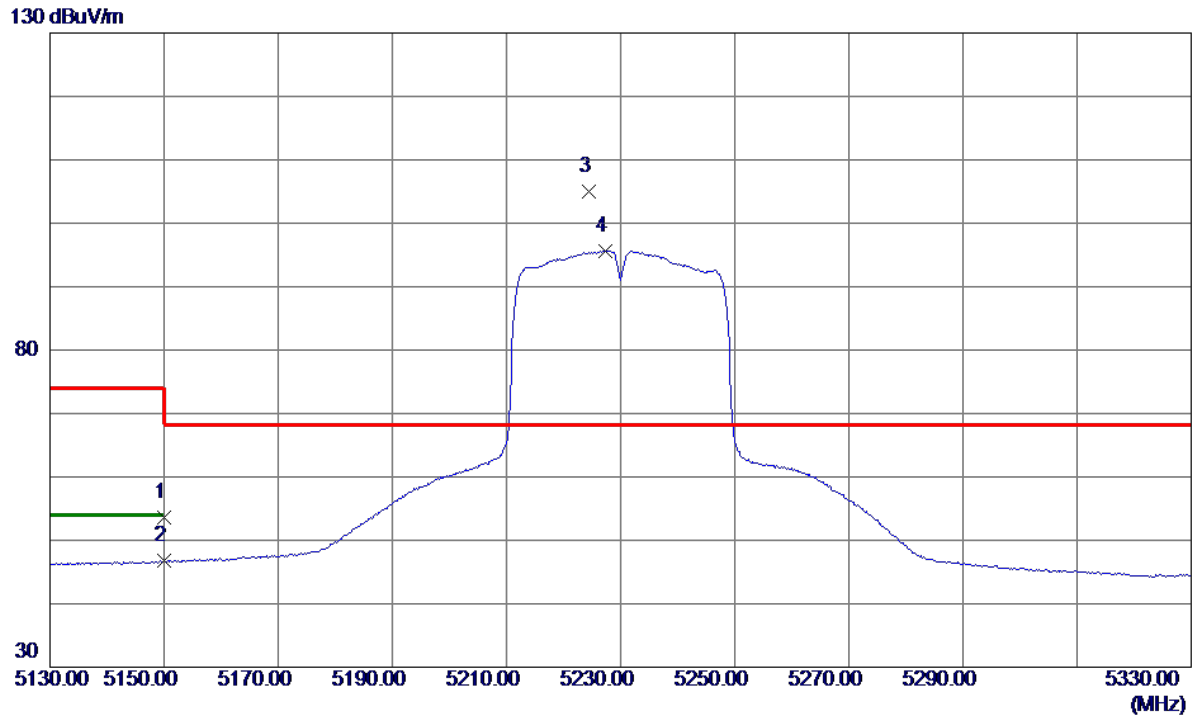


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	37.48	16.07	53.55	74.00	-20.45	Peak	
2	5150.0000	30.68	16.07	46.75	54.00	-7.25	AVG	
3 *	5224.4000	88.87	16.09	104.96	68.20	36.76	Peak	No Limit
4	5227.4000	79.54	16.09	95.63	999.00	-903.37	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

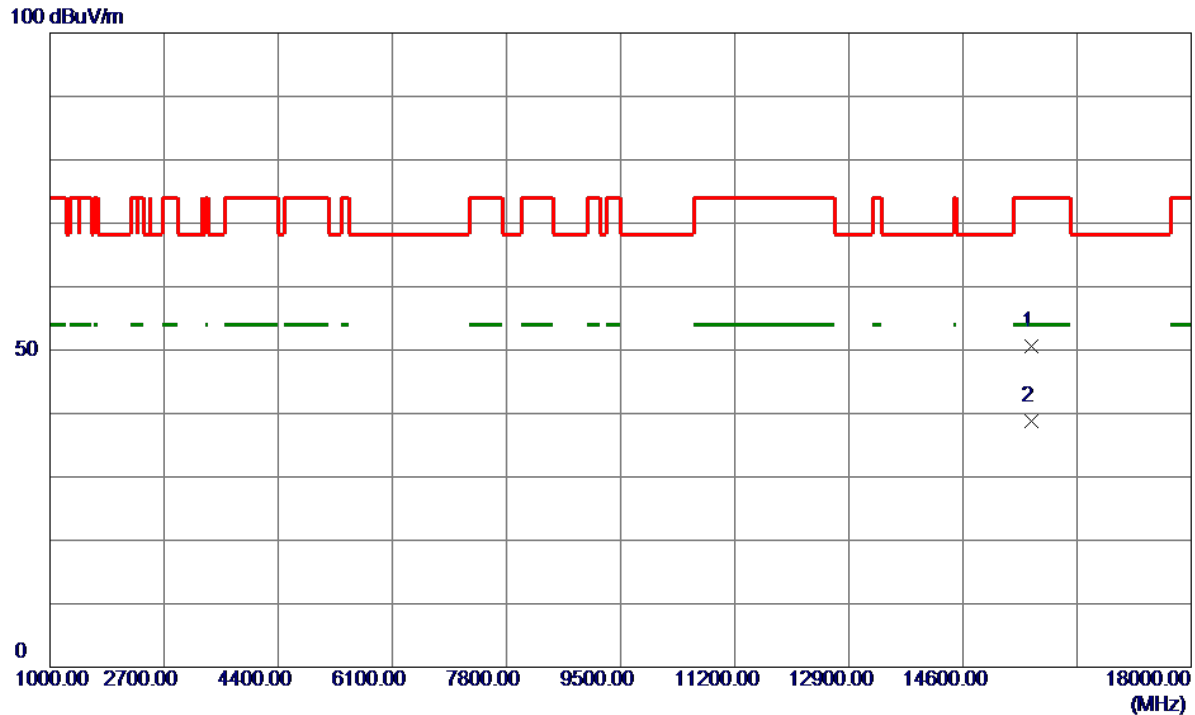


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15618.9600	39.29	11.38	50.67	74.00	-23.33	Peak	
2 *	15620.9400	27.39	11.38	38.77	54.00	-15.23	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX AC(VHT80) Mode 5210 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

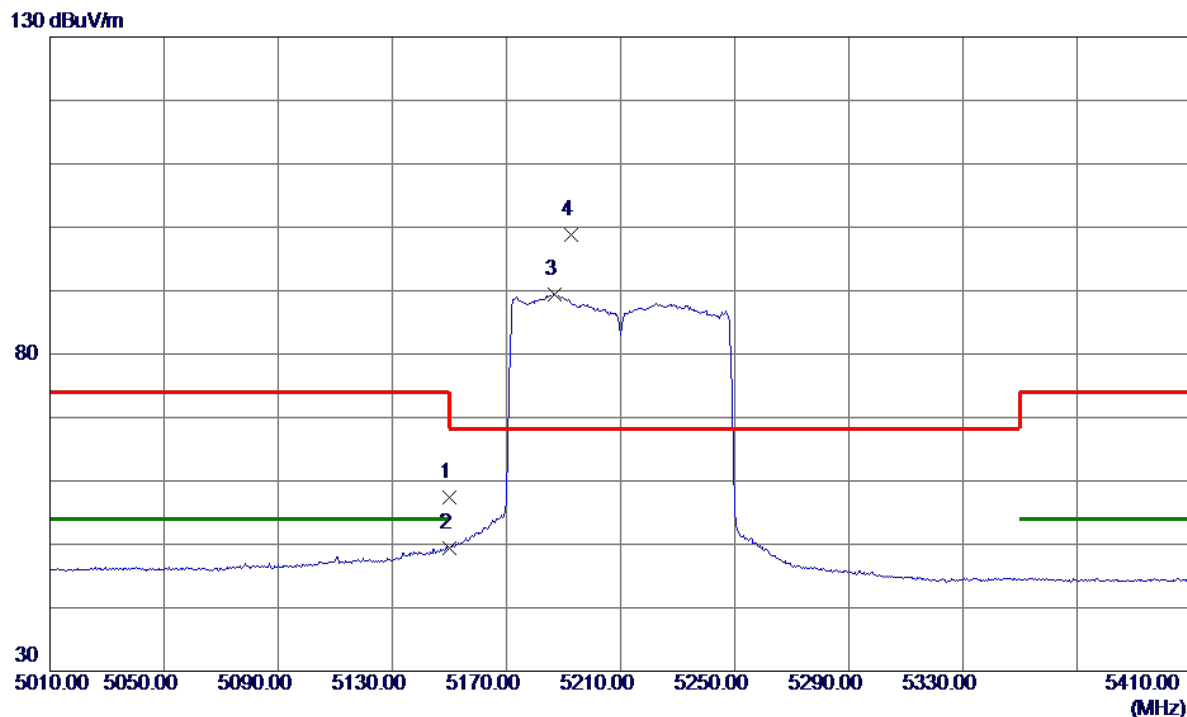


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	41.34	16.07	57.41	74.00	-16.59	Peak	
2	5150.0000	33.37	16.07	49.44	54.00	-4.56	AVG	
3	5186.8000	73.31	16.08	89.39	999.00	-909.61	AVG	No Limit
4 *	5192.8000	82.64	16.08	98.72	68.20	30.52	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5260 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

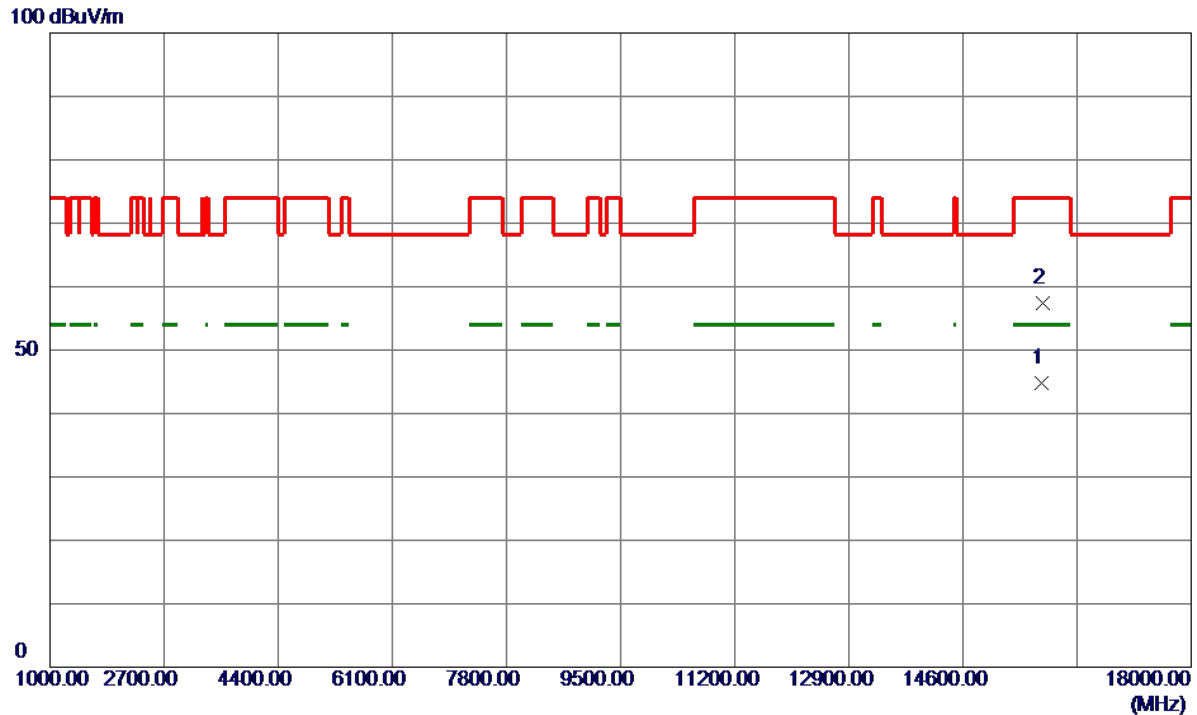


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15776.1000	33.45	11.36	44.81	54.00	-9.19	AVG	
2	15783.3300	46.10	11.35	57.45	74.00	-16.55	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

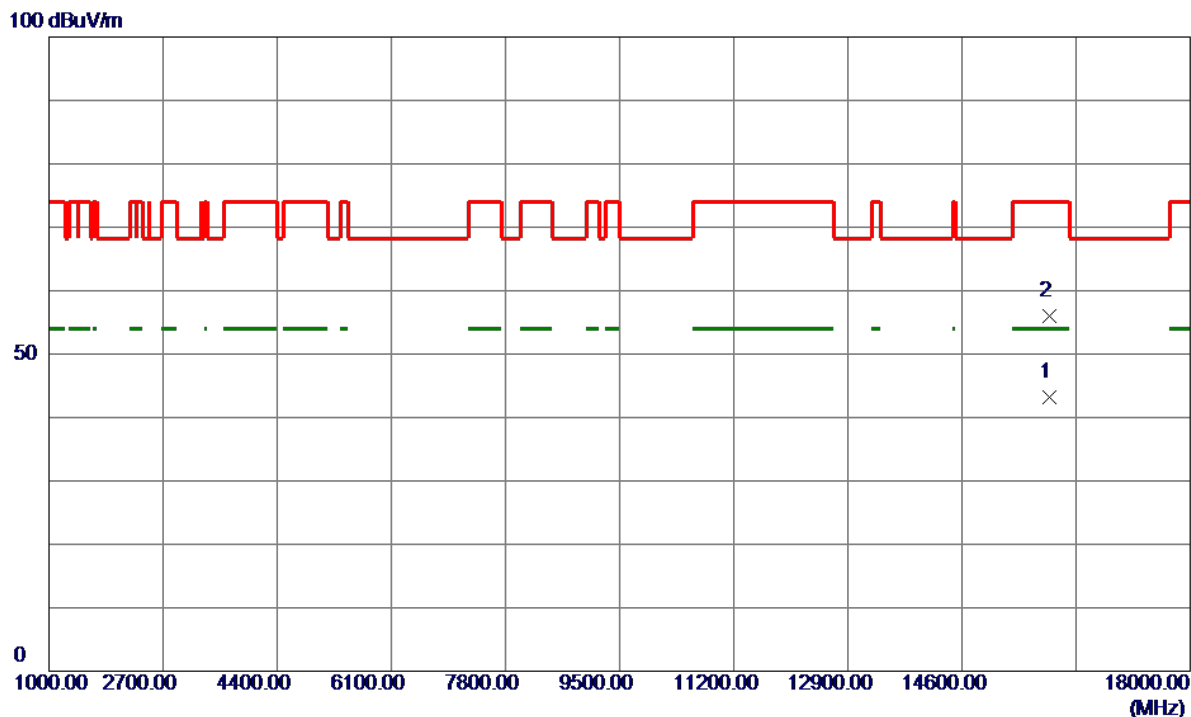


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15899.6700	31.85	11.34	43.19	54.00	-10.81	AVG	
2	15906.6900	44.63	11.33	55.96	74.00	-18.04	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5300 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

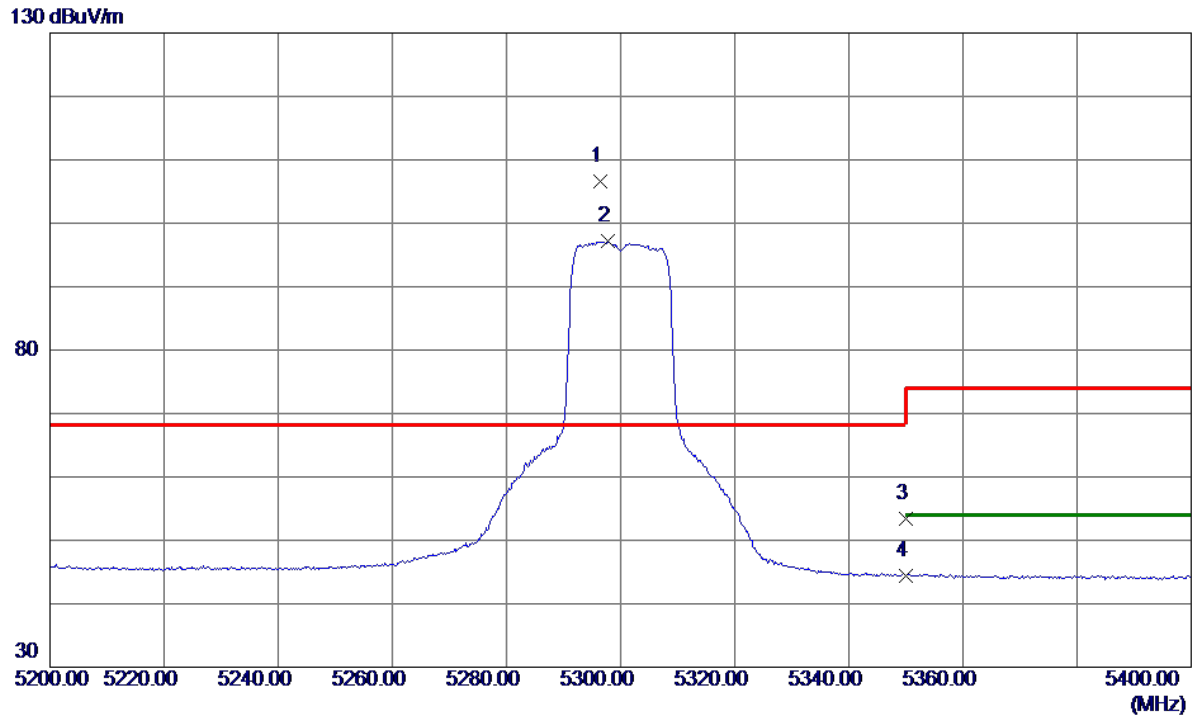


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5296.4000	90.48	16.11	106.59	68.20	38.39	Peak	No Limit
2	5297.8000	81.03	16.12	97.15	999.00	-901.85	AVG	No Limit
3	5350.0000	37.28	16.13	53.41	74.00	-20.59	Peak	
4	5350.0000	28.22	16.13	44.35	54.00	-9.65	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

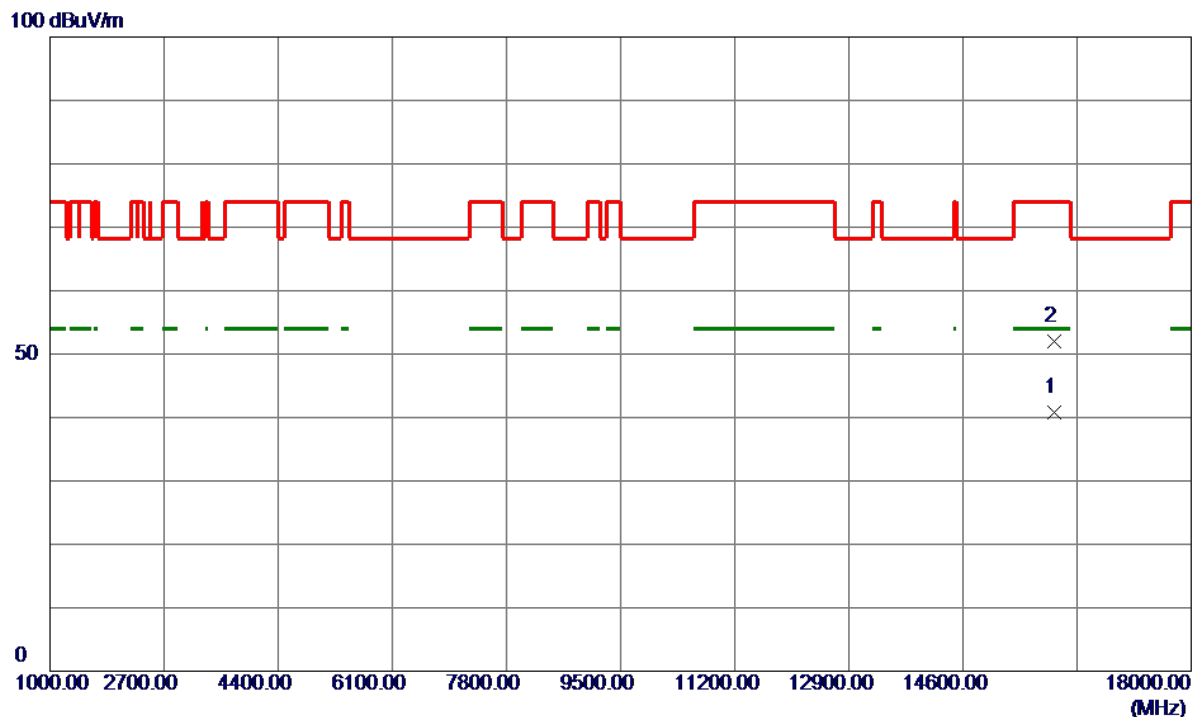


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15960.2100	29.41	11.33	40.74	54.00	-13.26	AVG	
2	15962.8200	40.63	11.33	51.96	74.00	-22.04	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX A Mode 5320 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

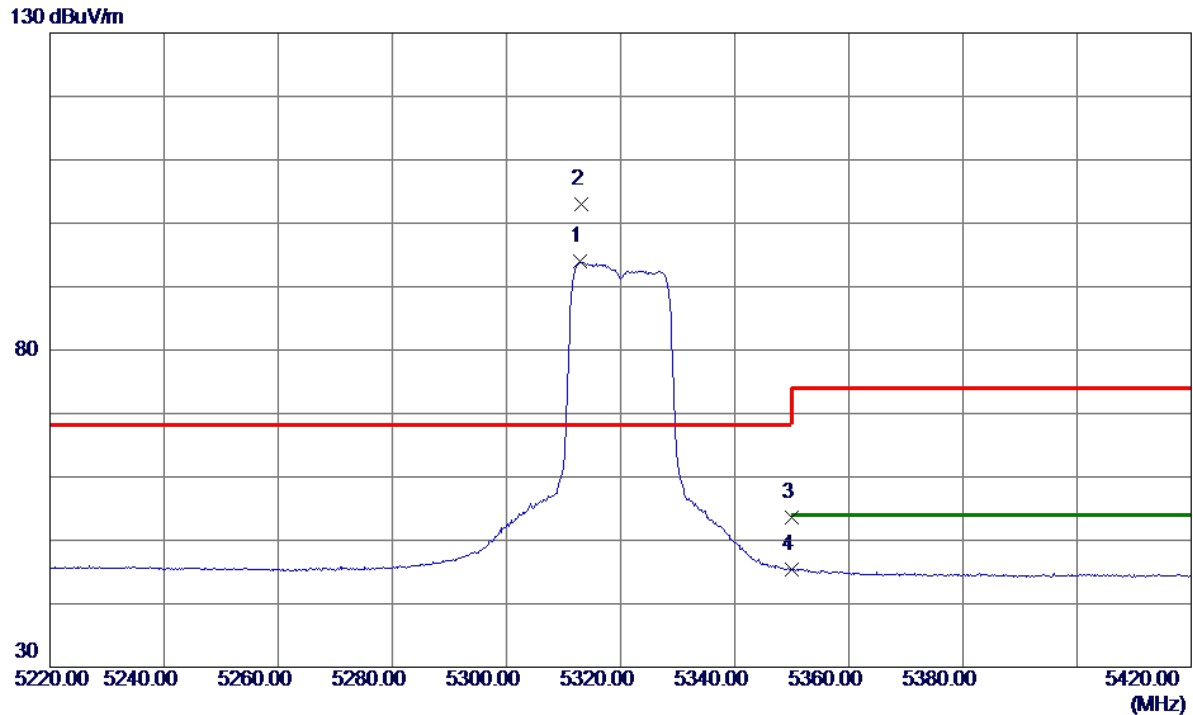


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5312.8000	77.81	16.12	93.93	999.00	-905.07	AVG	No Limit
2 *	5313.2000	86.83	16.12	102.95	68.20	34.75	Peak	No Limit
3	5350.0000	37.46	16.13	53.59	74.00	-20.41	Peak	
4	5350.0000	29.24	16.13	45.37	54.00	-8.63	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX N(HT20) Mode 5260 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

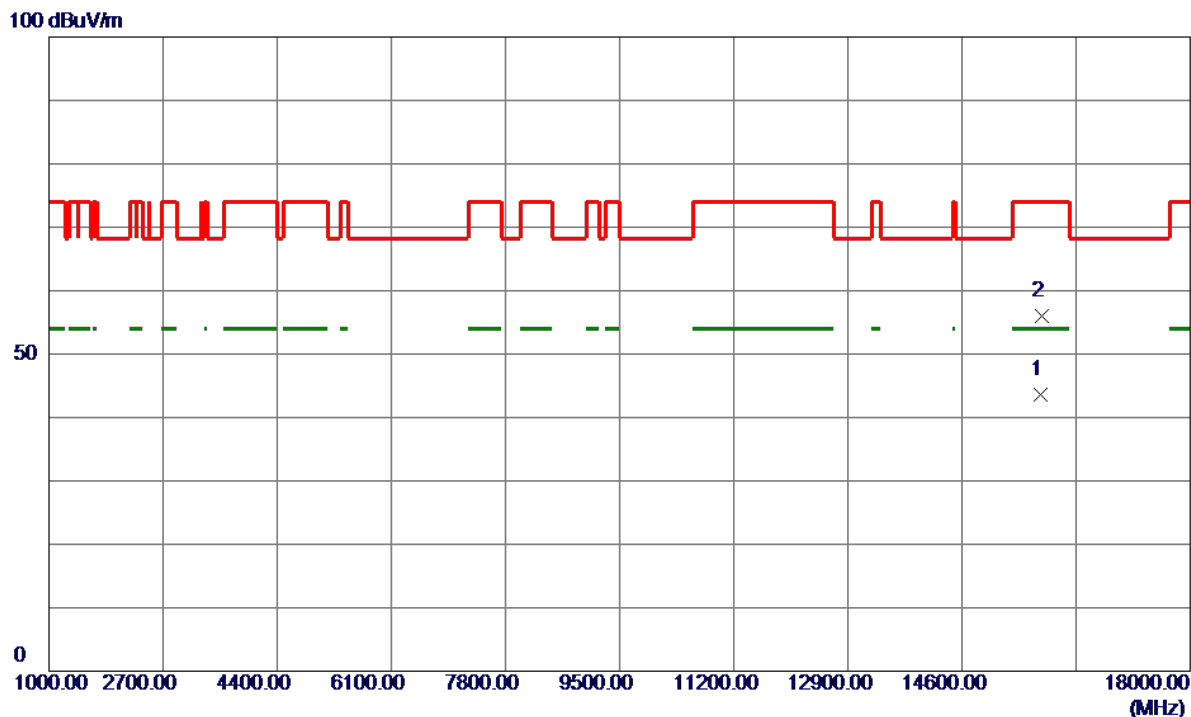


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15776.1200	32.21	11.36	43.57	54.00	-10.43	AVG	
2	15783.0000	44.71	11.35	56.06	74.00	-17.94	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX N(HT20) Mode 5300 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

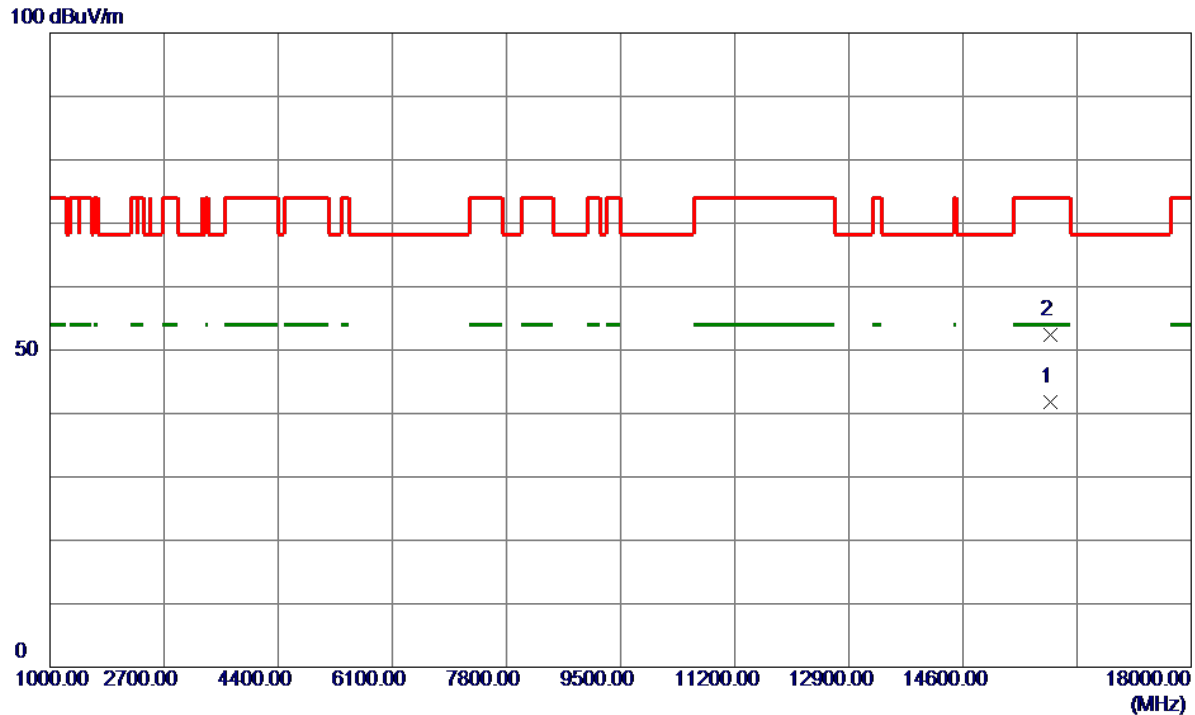


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15896.1200	30.46	11.34	41.80	54.00	-12.20	AVG	
2	15907.3600	41.01	11.33	52.34	74.00	-21.66	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX N(HT20) Mode 5300 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

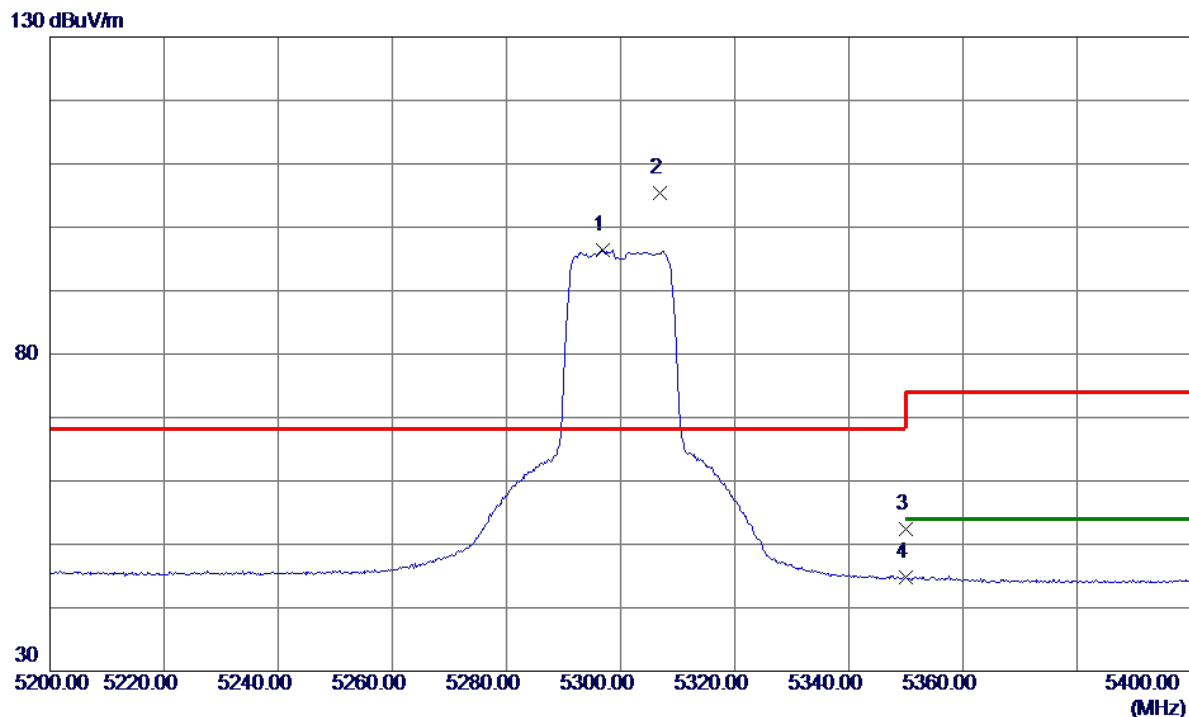


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5296.8000	80.31	16.11	96.42	999.00	-902.58	AVG	No Limit
2 *	5306.8000	89.26	16.12	105.38	68.20	37.18	Peak	No Limit
3	5350.0000	36.28	16.13	52.41	74.00	-21.59	Peak	
4	5350.0000	28.59	16.13	44.72	54.00	-9.28	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX N(HT20) Mode 5320 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

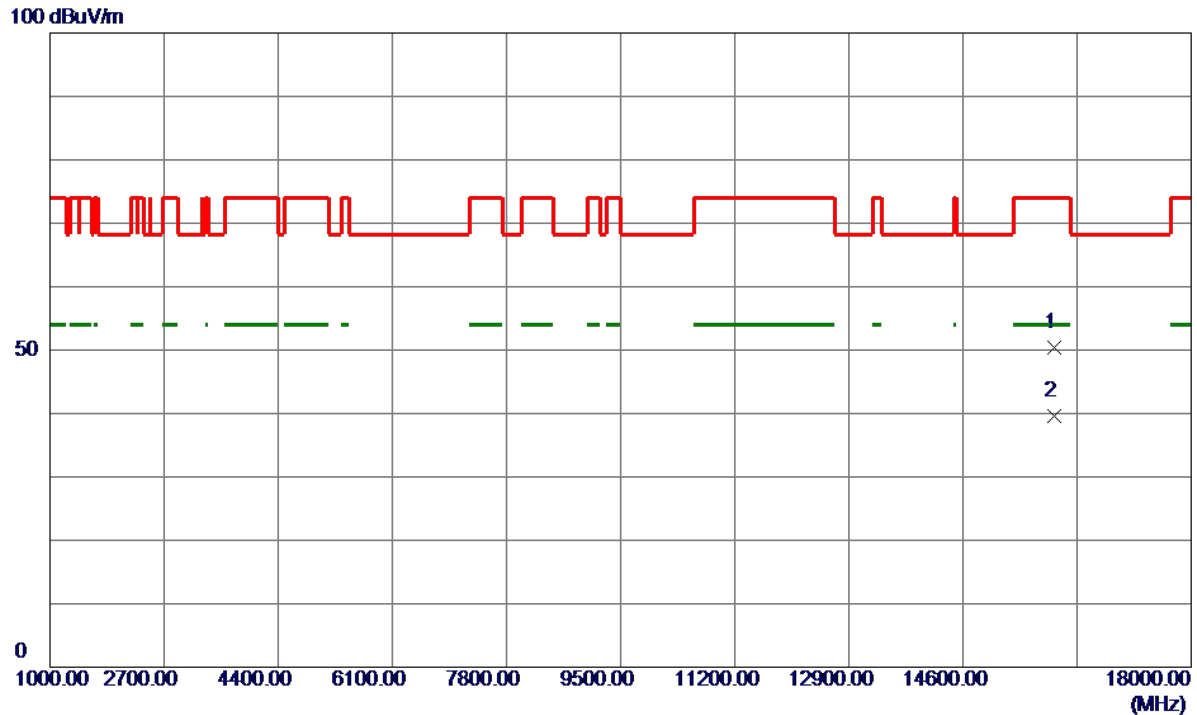


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15959.6000	39.11	11.33	50.44	74.00	-23.56	Peak	
2 *	15961.1200	28.22	11.33	39.55	54.00	-14.45	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX N(HT20) Mode 5320 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

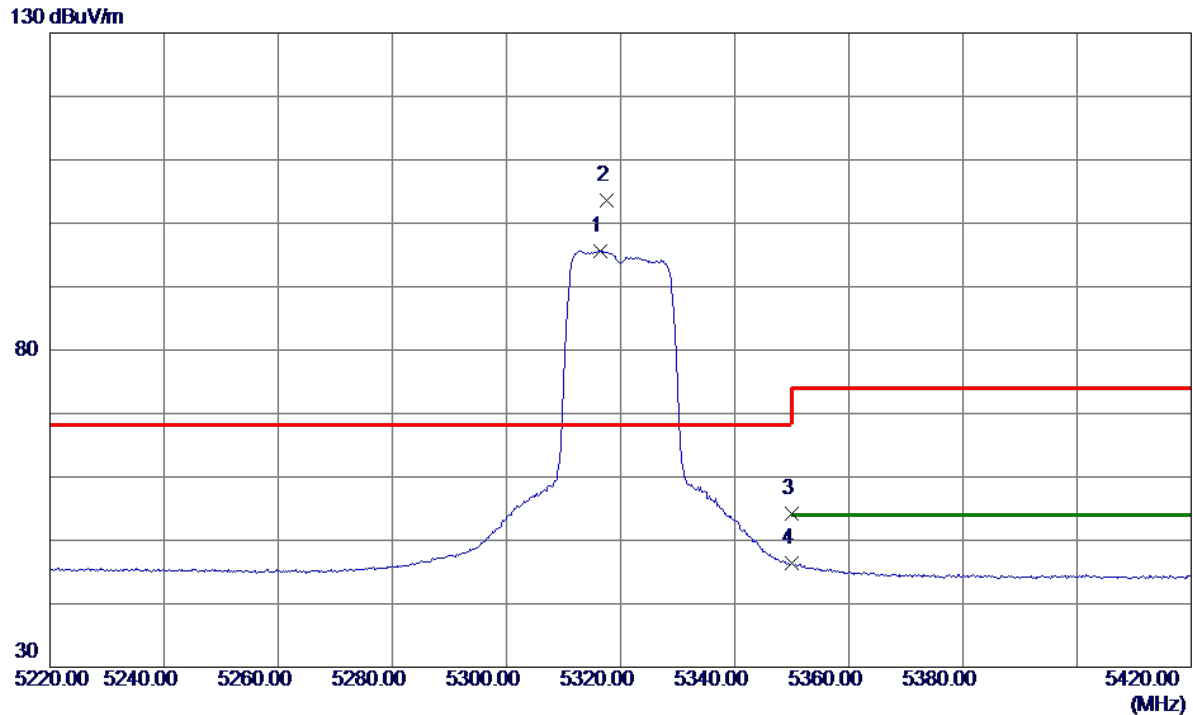


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5316.4000	79.56	16.12	95.68	999.00	-903.32	AVG	No Limit
2 *	5317.6000	87.41	16.12	103.53	68.20	35.33	Peak	No Limit
3	5350.0000	38.05	16.13	54.18	74.00	-19.82	Peak	
4	5350.0000	30.36	16.13	46.49	54.00	-7.51	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX N(HT40) Mode 5270 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

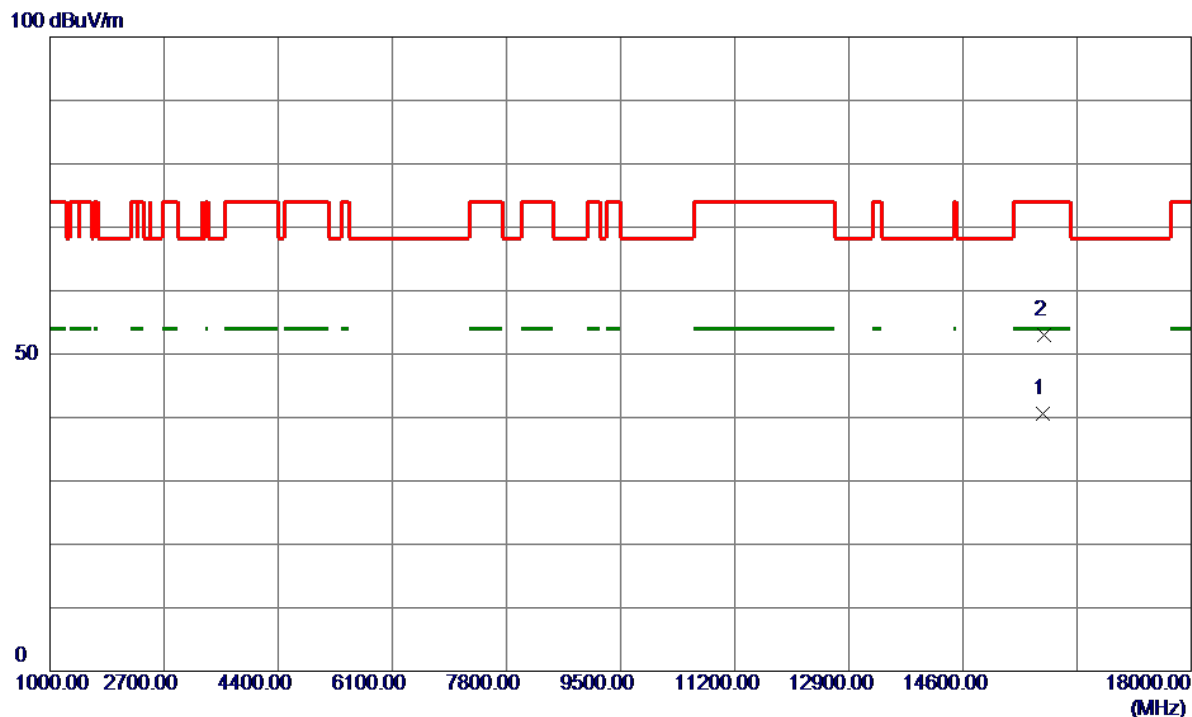


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	15795.7800	29.27	11.35	40.62	54.00	-13.38	AVG	
2	15815.0400	41.66	11.35	53.01	74.00	-20.99	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX N(HT40) Mode 5270 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

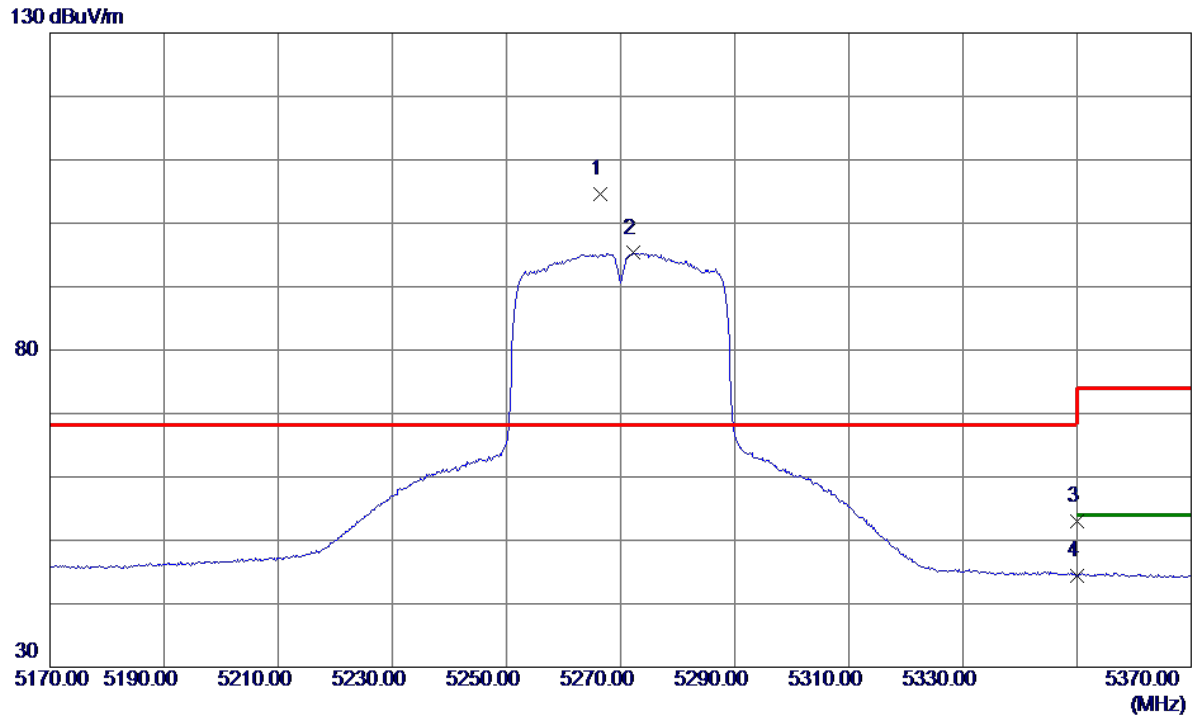


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5266.4000	88.44	16.11	104.55	68.20	36.35	Peak	No Limit
2	5272.2000	79.19	16.11	95.30	999.00	-903.70	AVG	No Limit
3	5350.0000	36.96	16.13	53.09	74.00	-20.91	Peak	
4	5350.0000	28.24	16.13	44.37	54.00	-9.63	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX N(HT40) Mode 5310 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

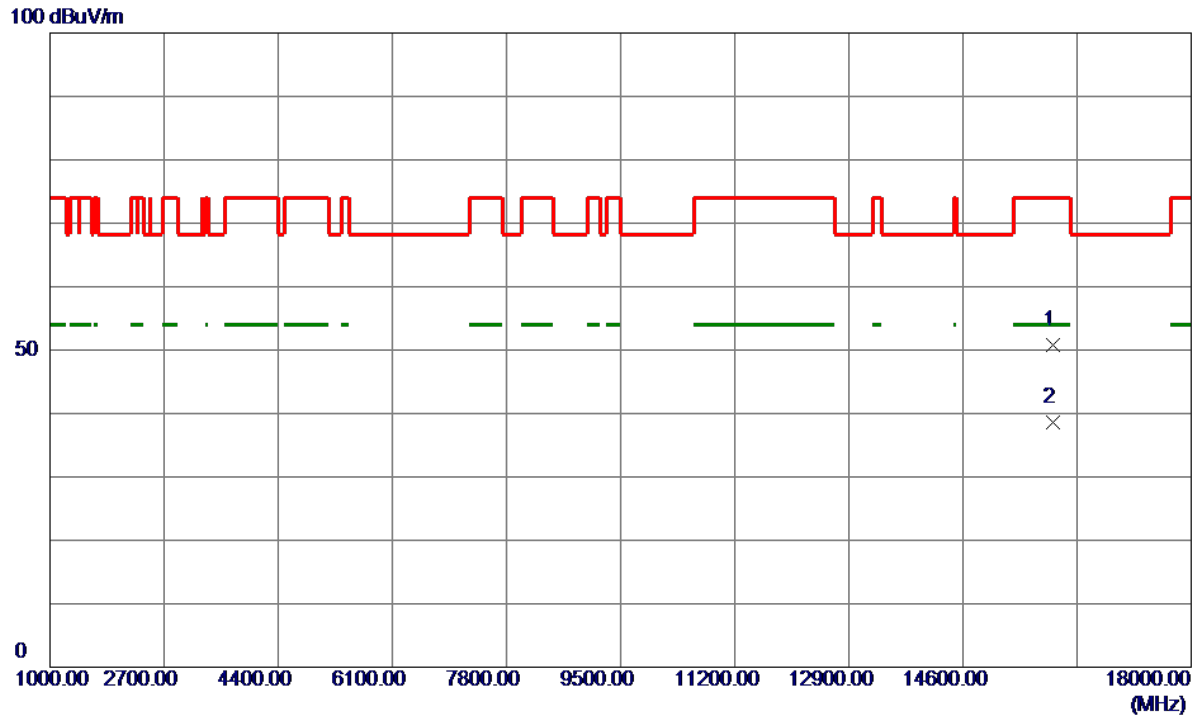


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15932.9400	39.52	11.33	50.85	74.00	-23.15	Peak	
2 *	15934.2600	27.18	11.33	38.51	54.00	-15.49	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX N(HT40) Mode 5310 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

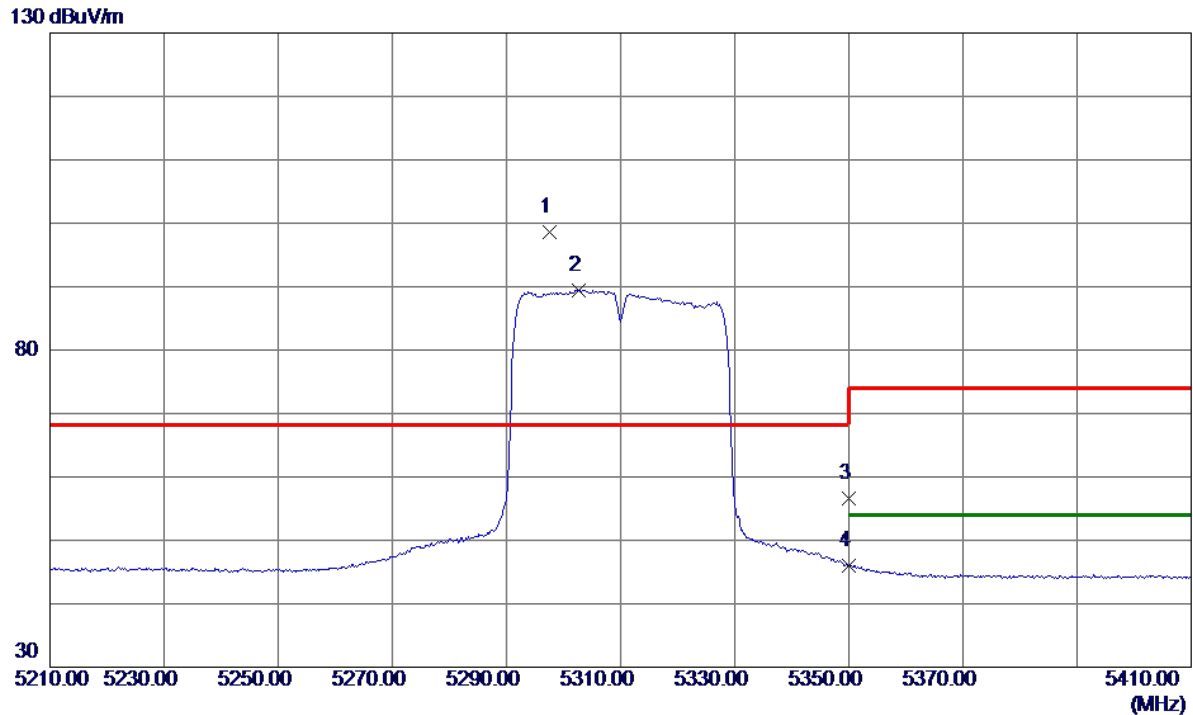


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5297.6000	82.43	16.12	98.55	68.20	30.35	Peak	No Limit
2	5302.6000	73.33	16.12	89.45	999.00	-909.55	AVG	No Limit
3	5350.0000	40.51	16.13	56.64	74.00	-17.36	Peak	
4	5350.0000	29.86	16.13	45.99	54.00	-8.01	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

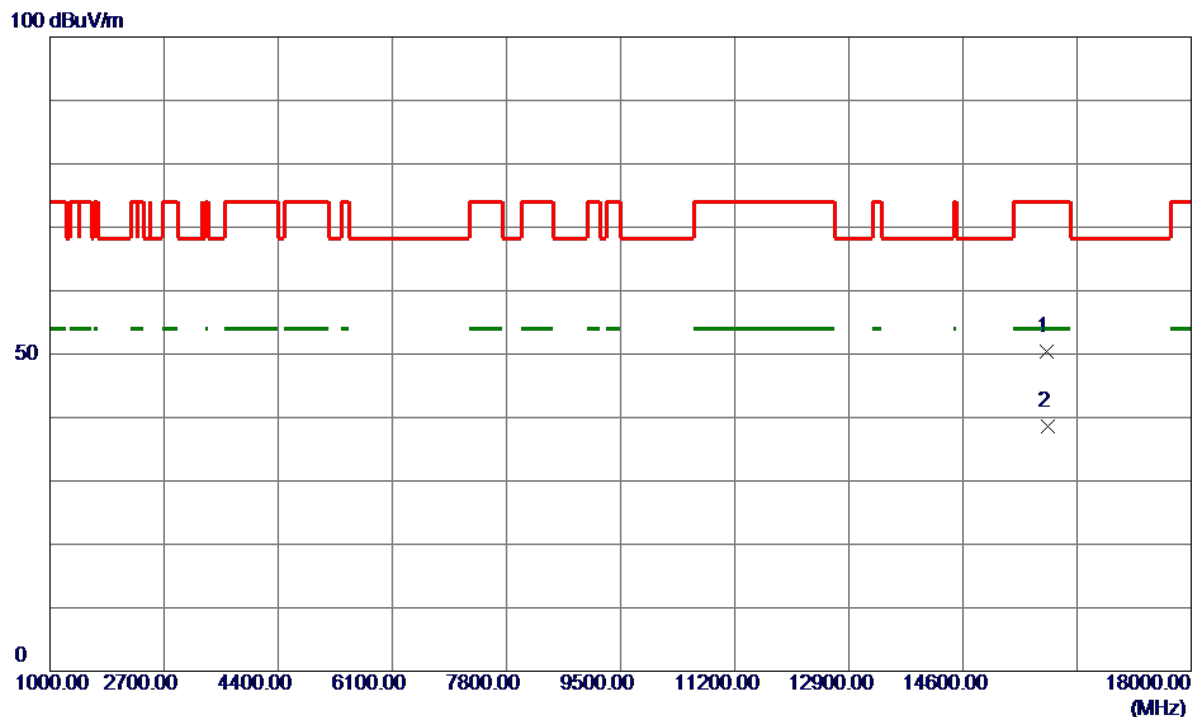


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	15855.6300	38.98	11.34	50.32	74.00	-23.68	Peak	
2 *	15856.6800	27.19	11.34	38.53	54.00	-15.47	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2A_TX AC(VHT80) Mode 5290 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

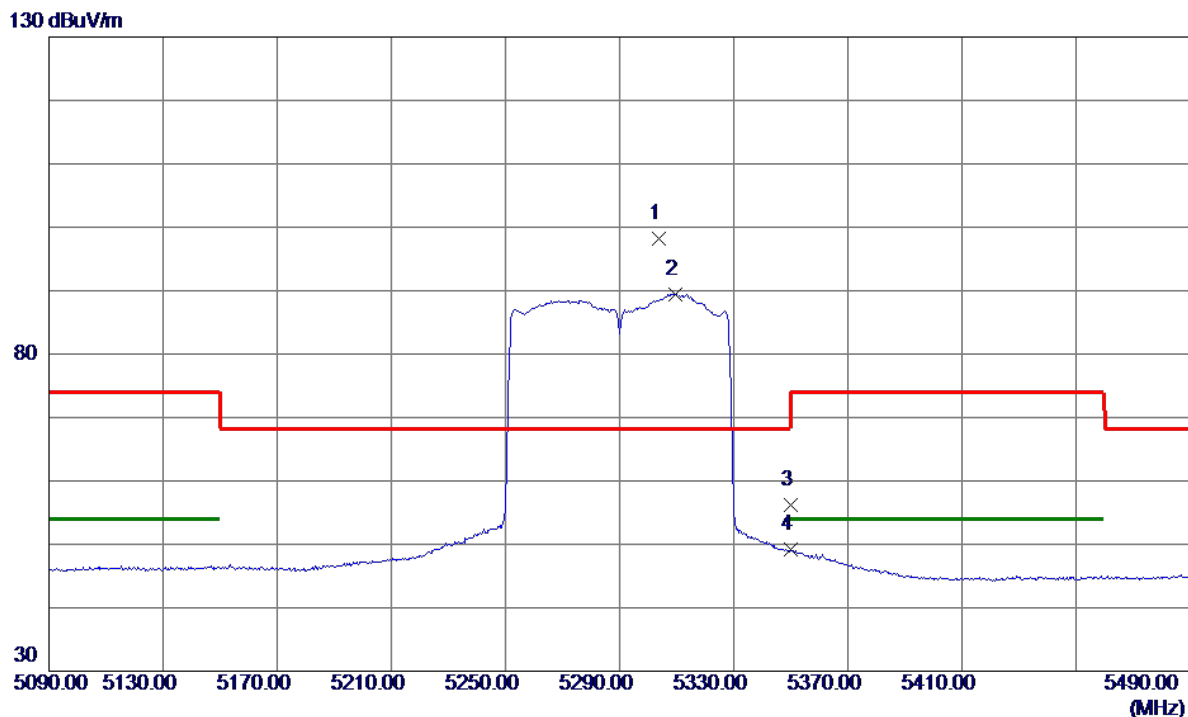


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5303.6000	82.01	16.12	98.13	68.20	29.93	Peak	No Limit
2	5309.6000	73.29	16.12	89.41	999.00	-909.59	AVG	No Limit
3	5350.0000	40.09	16.13	56.22	74.00	-17.78	Peak	
4	5350.0000	33.01	16.13	49.14	54.00	-4.86	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

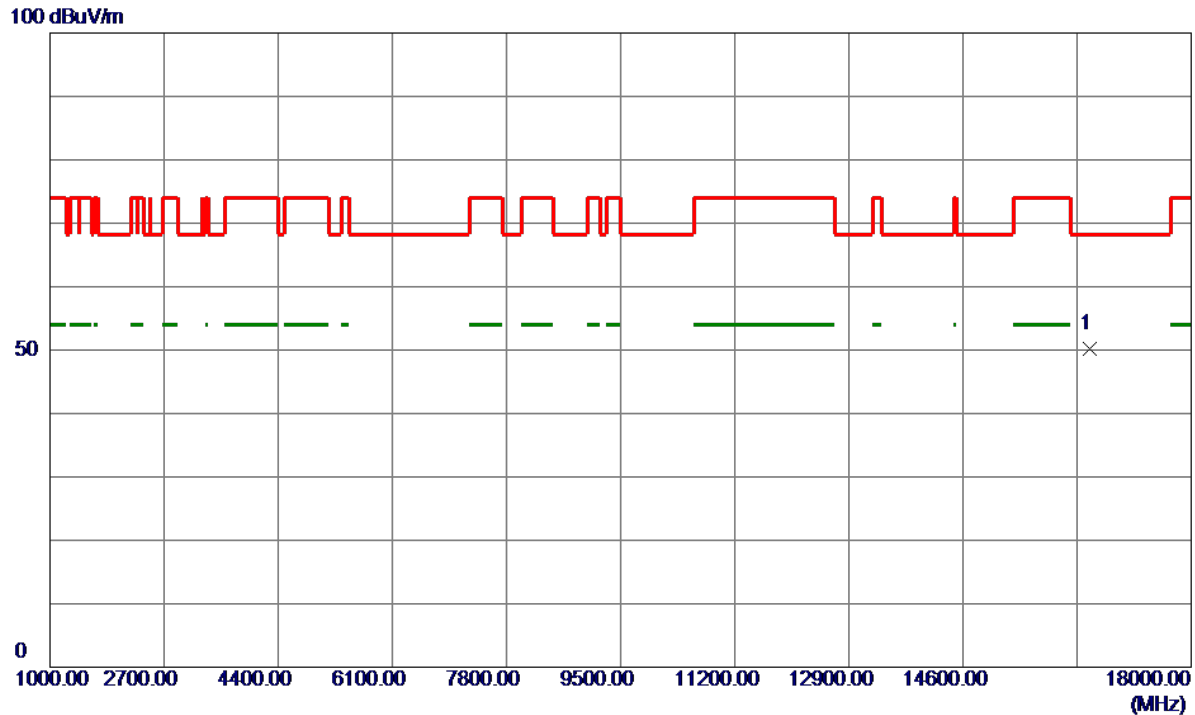


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16491.6300	39.16	11.08	50.24	68.20	-17.96	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5500 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

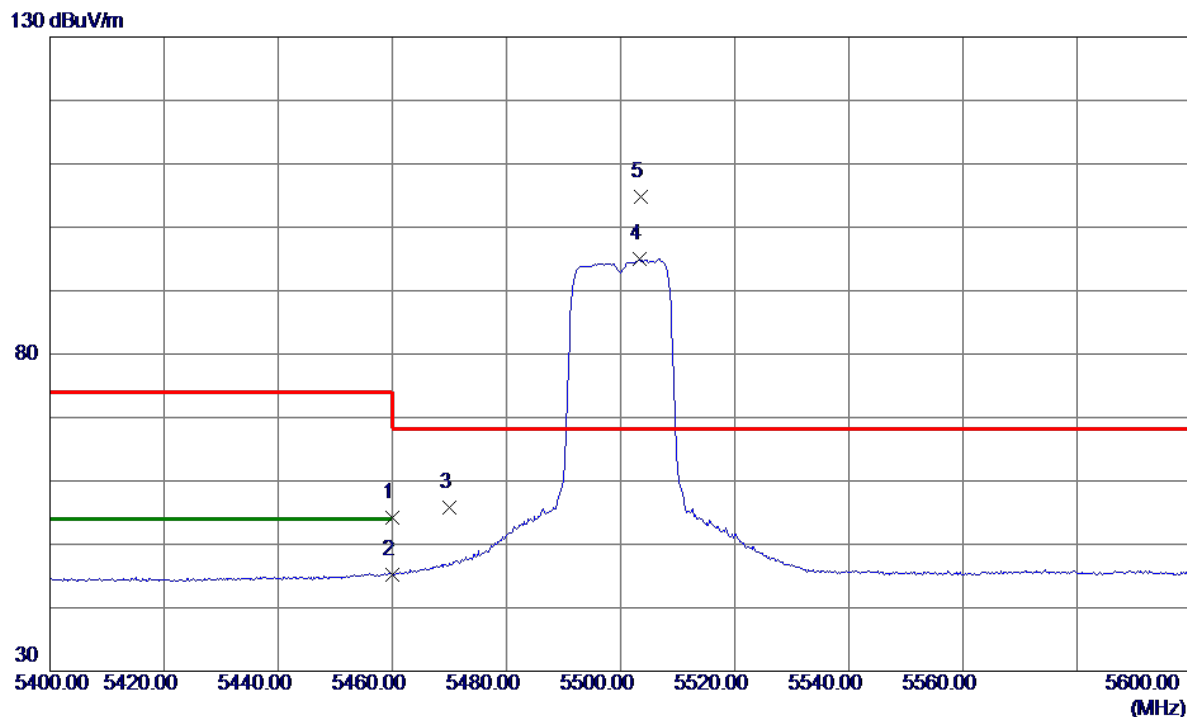


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	38.12	16.17	54.29	74.00	-19.71	Peak	
2	5460.0000	29.06	16.17	45.23	54.00	-8.77	AVG	
3	5470.0000	39.57	16.17	55.74	68.20	-12.46	Peak	
4	5503.4000	78.80	16.19	94.99	999.00	-904.01	AVG	No Limit
5 *	5503.6000	88.59	16.19	104.78	68.20	36.58	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5580 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

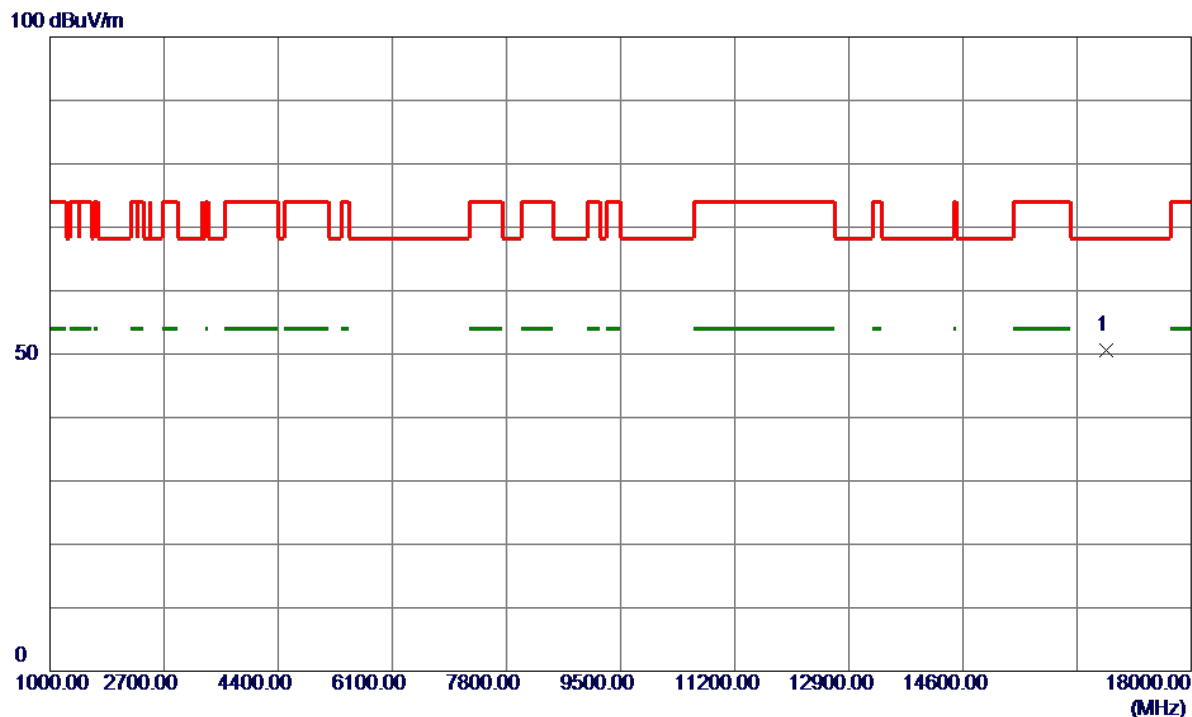


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16725.0600	39.31	11.23	50.54	68.20	-17.66	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------	--------------	----------

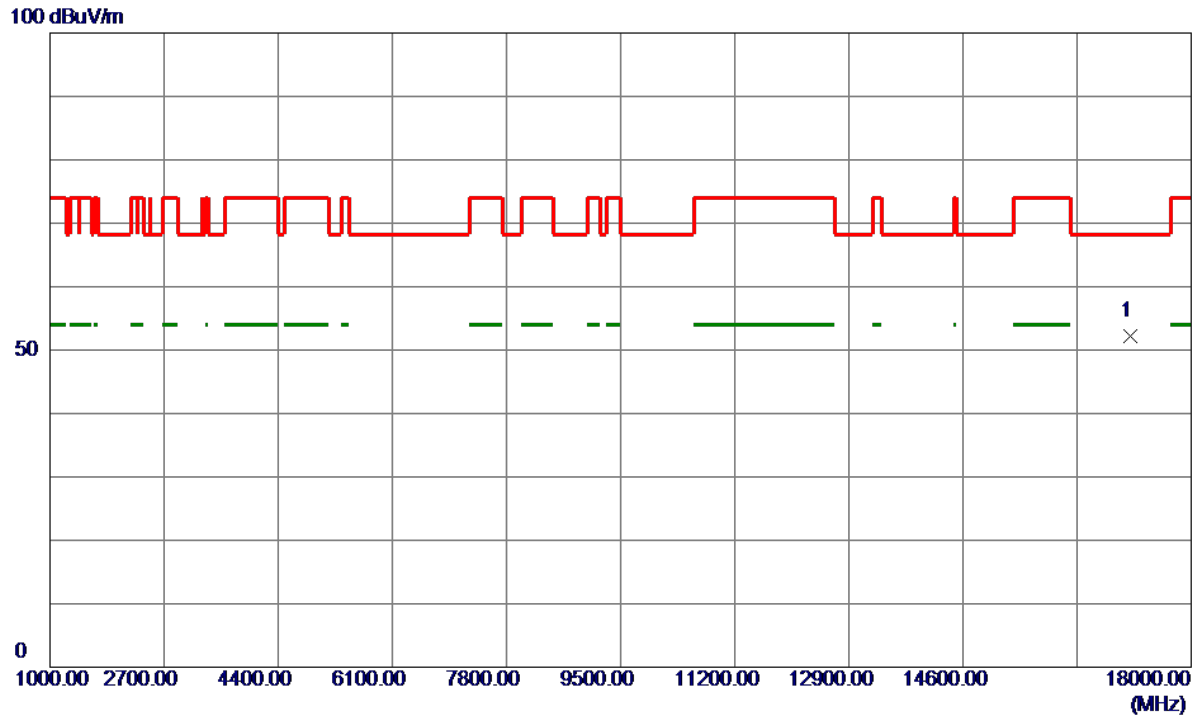


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17088.7600	40.89	11.26	52.15	68.20	-16.05	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX A Mode 5700 MHz	Polarization	Horizontal
-----------	----------------------------	--------------	------------

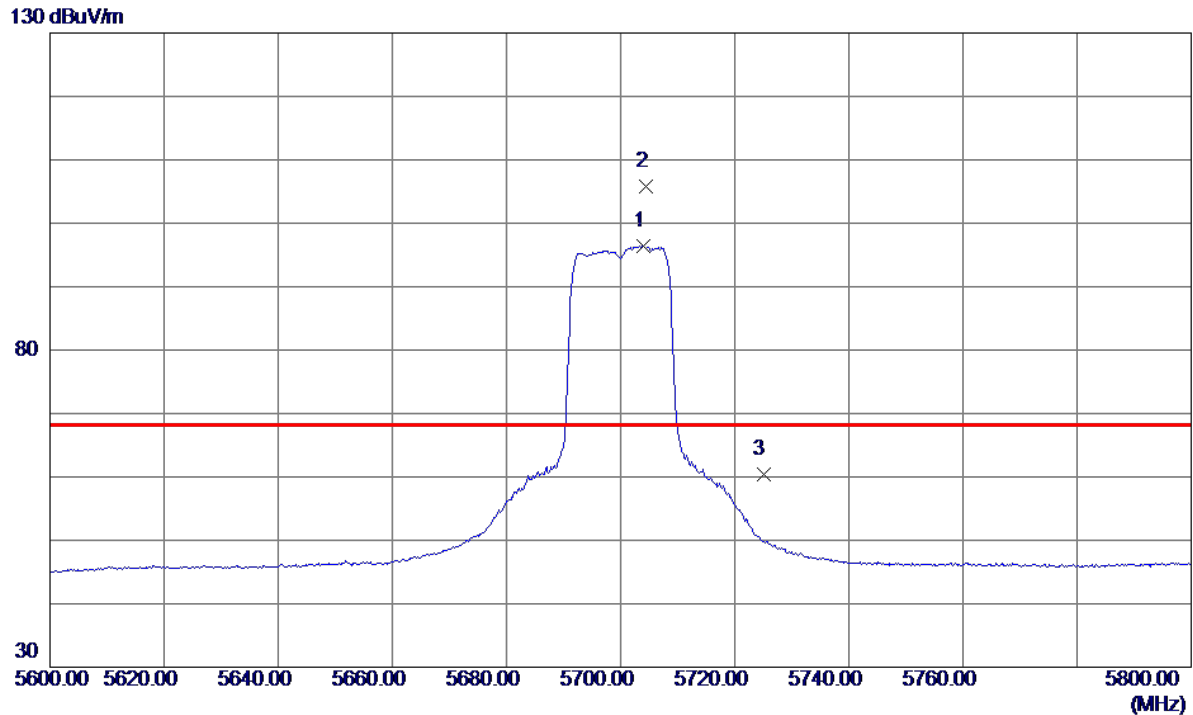


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5704.0000	79.47	16.92	96.39	999.00	-902.61	AVG	No Limit
2 *	5704.4000	88.89	16.92	105.81	68.20	37.61	Peak	No Limit
3	5725.0000	43.35	16.99	60.34	68.20	-7.86	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT20) Mode 5500 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

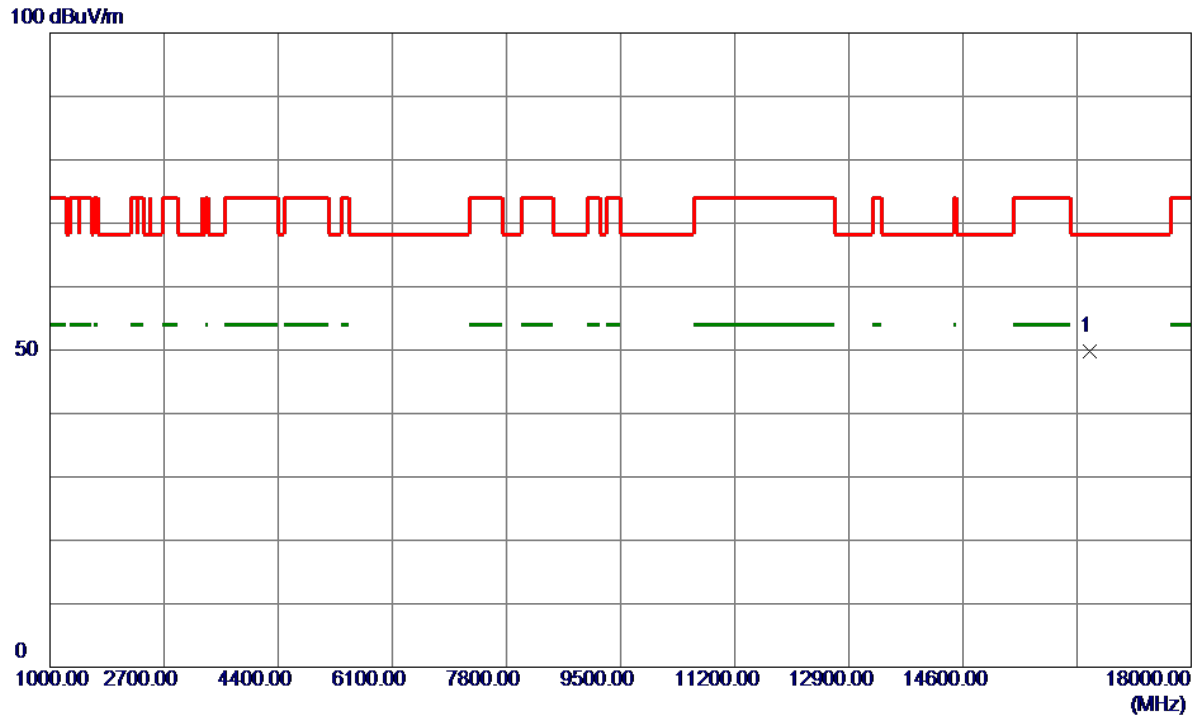


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	16491.9600	38.78	11.08	49.86	68.20	-18.34	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT20) Mode 5500 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

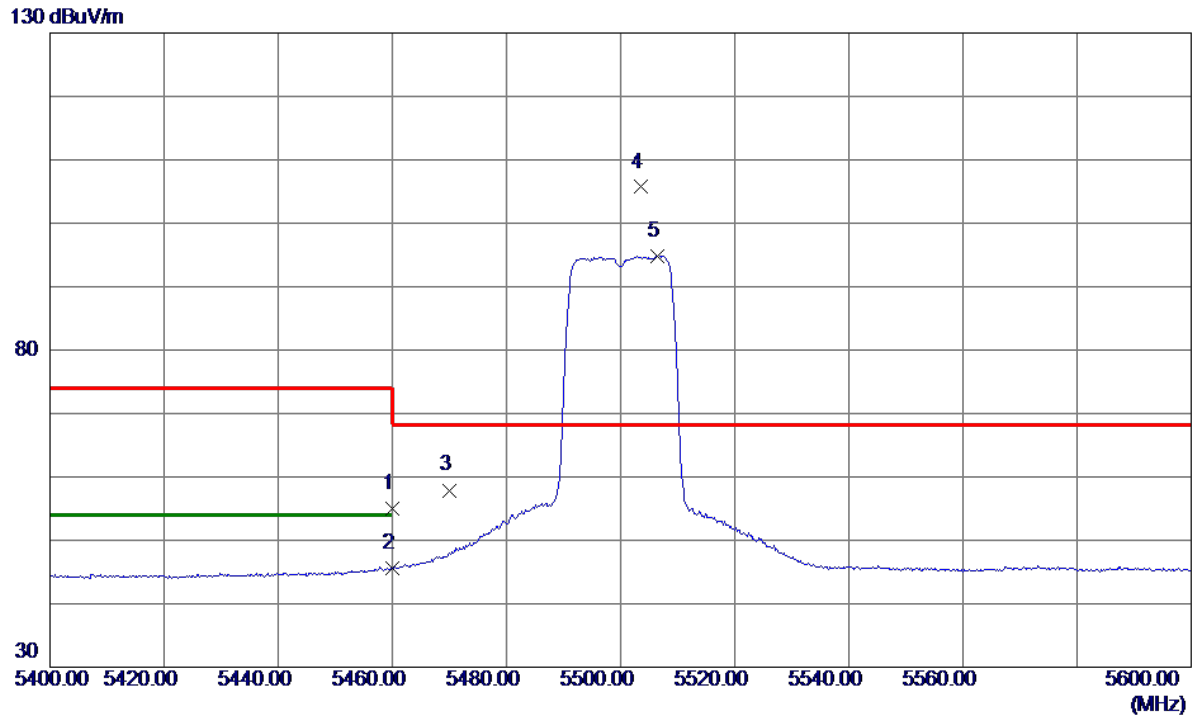


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	38.82	16.17	54.99	74.00	-19.01	Peak	
2	5460.0000	29.48	16.17	45.65	54.00	-8.35	AVG	
3	5470.0000	41.73	16.17	57.90	68.20	-10.30	Peak	
4 *	5503.6000	89.51	16.19	105.70	68.20	37.50	Peak	No Limit
5	5506.4000	78.68	16.20	94.88	999.00	-904.12	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT20) Mode 5580 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

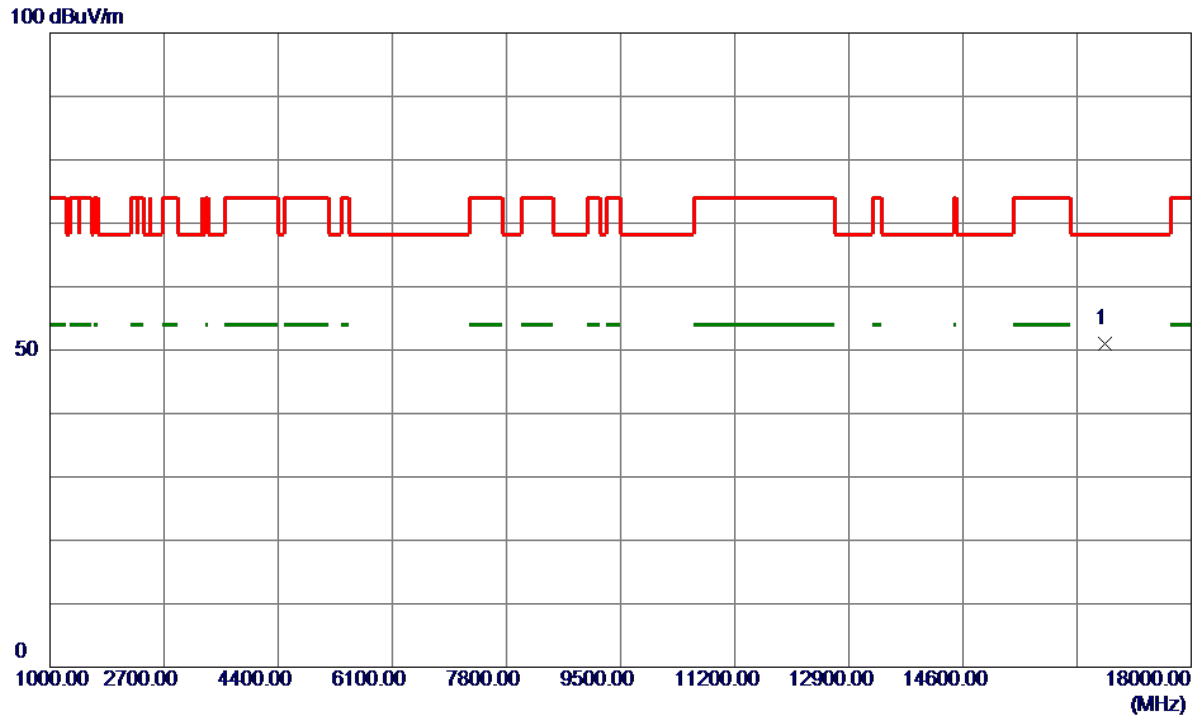


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16723.9200	39.71	11.23	50.94	68.20	-17.26	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT20) Mode 5700 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

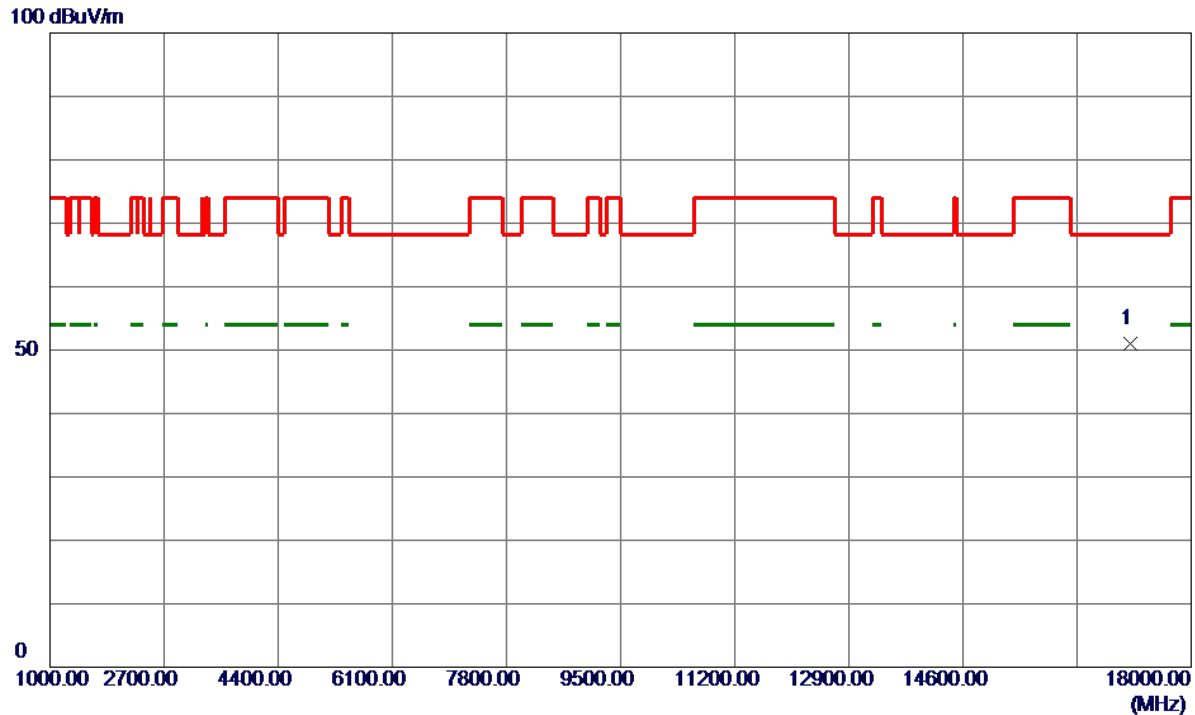


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17087.7200	39.66	11.26	50.92	68.20	-17.28	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT20) Mode 5700 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

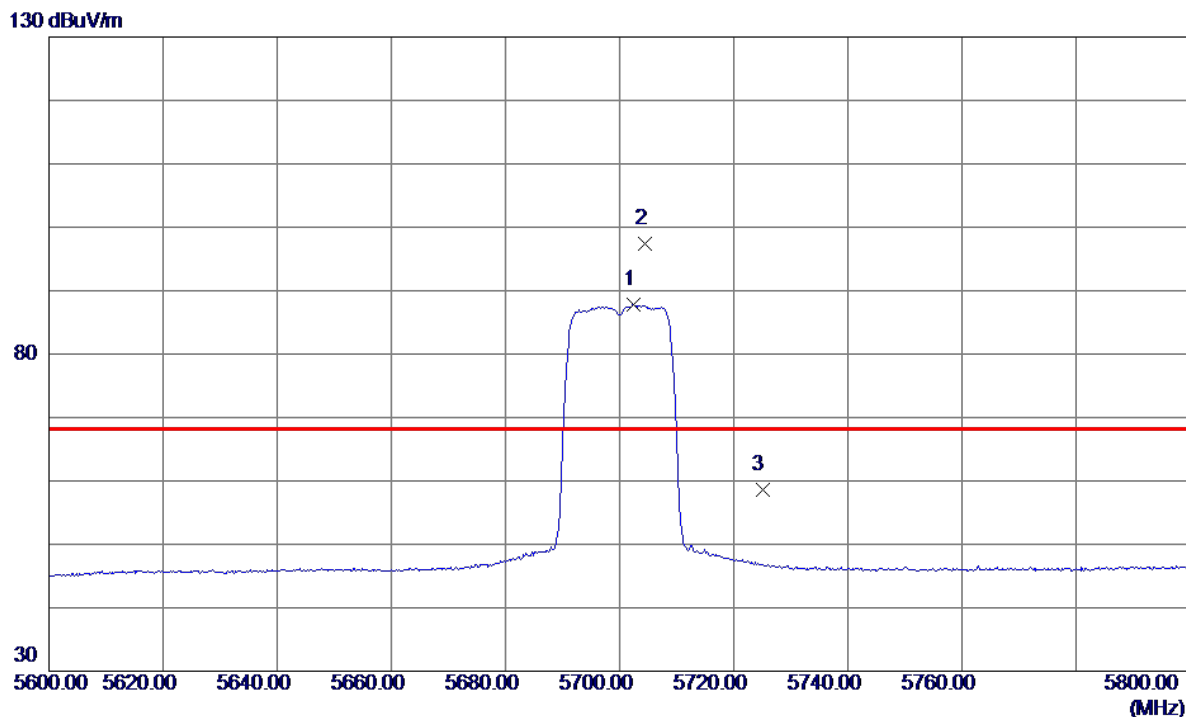


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5702.4000	70.92	16.91	87.83	999.00	-911.17	AVG	No Limit
2 *	5704.4000	80.46	16.92	97.38	68.20	29.18	Peak	No Limit
3	5725.0000	41.69	16.99	58.68	68.20	-9.52	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT40) Mode 5510 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

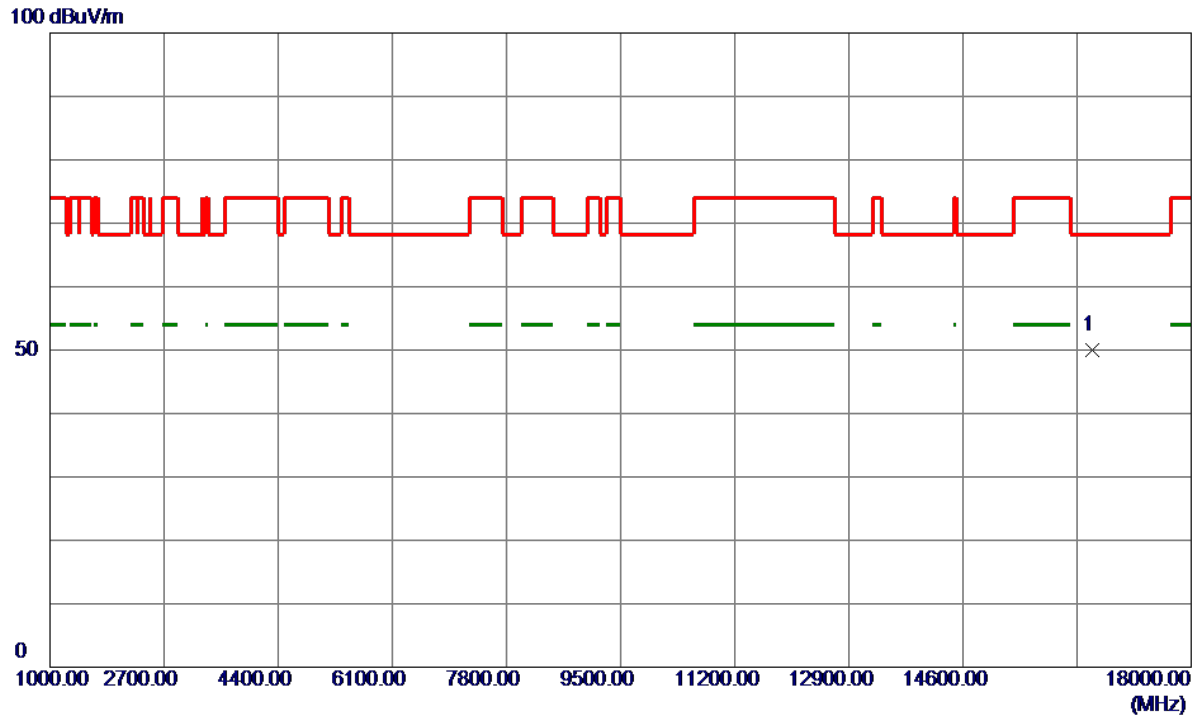


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16524.2700	38.89	11.09	49.98	68.20	-18.22	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT40) Mode 5510 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

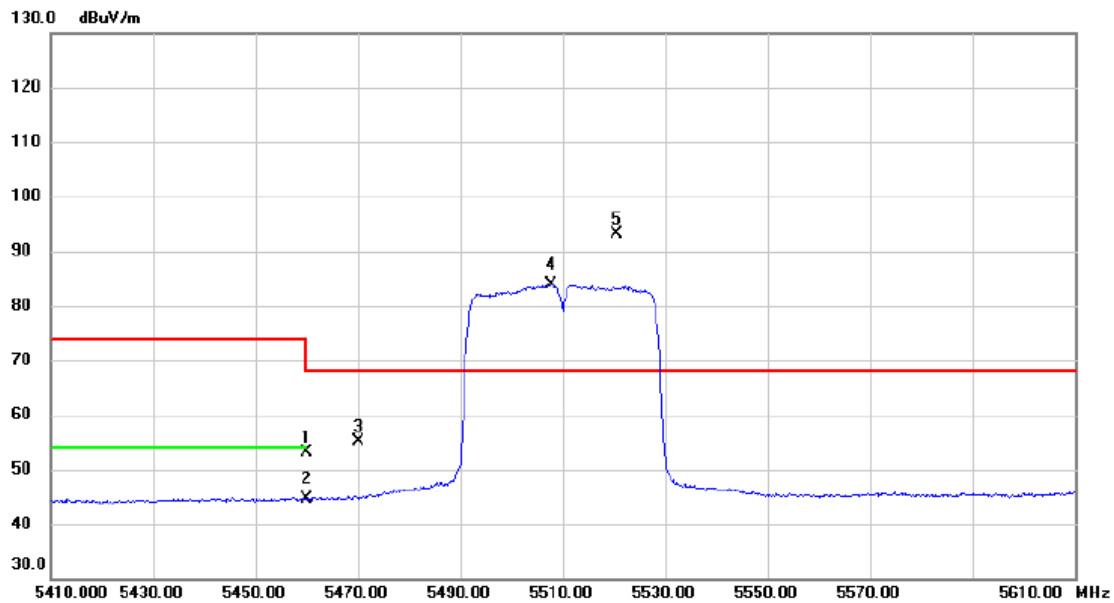


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	37.02	16.16	53.18	74.00	-20.82	peak	
2		5460.000	28.45	16.16	44.61	54.00	-9.39	AVG	
3		5470.000	38.95	16.17	55.12	68.20	-13.08	peak	
4	X	5507.800	67.70	16.21	83.91	68.20	15.71	AVG	No Limit
5	*	5520.600	76.83	16.26	93.09	68.20	24.89	peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT40) Mode 5550 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

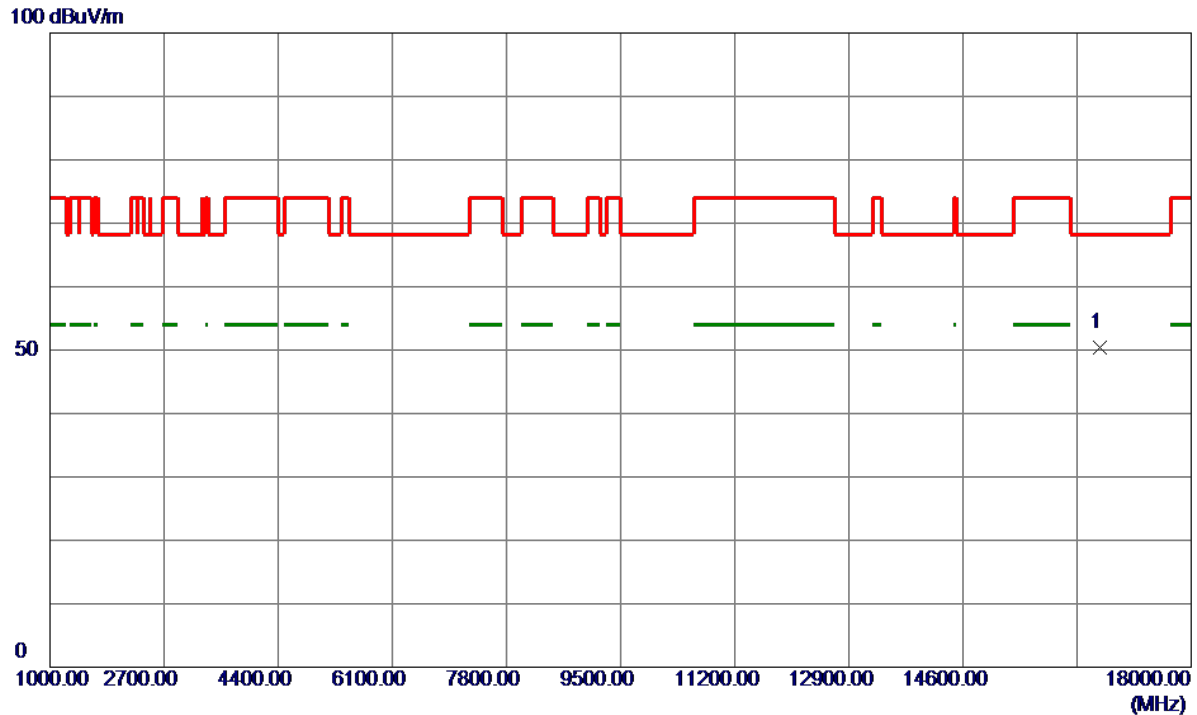


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16641.3000	39.19	11.17	50.36	68.20	-17.84	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT40) Mode 5670 MHz	Polarization	Vertical
-----------	----------------------------------	--------------	----------

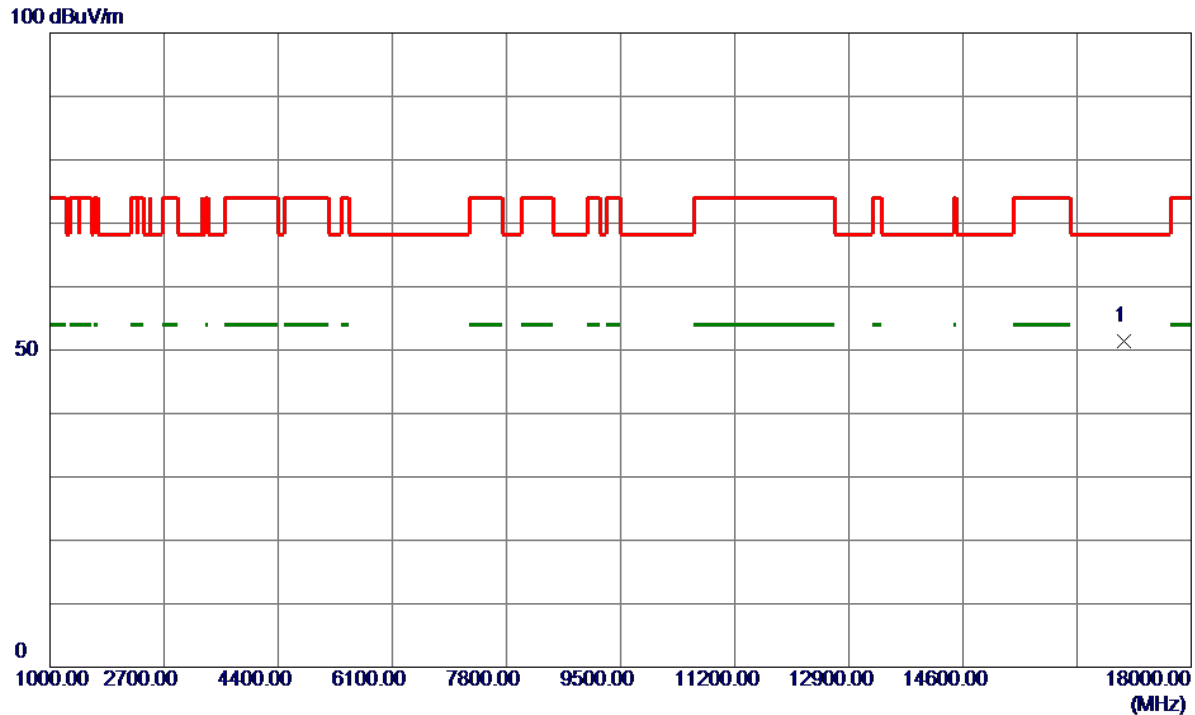


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	16995.9600	40.06	11.42	51.48	68.20	-16.72	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX N(HT40) Mode 5670 MHz	Polarization	Horizontal
-----------	----------------------------------	--------------	------------

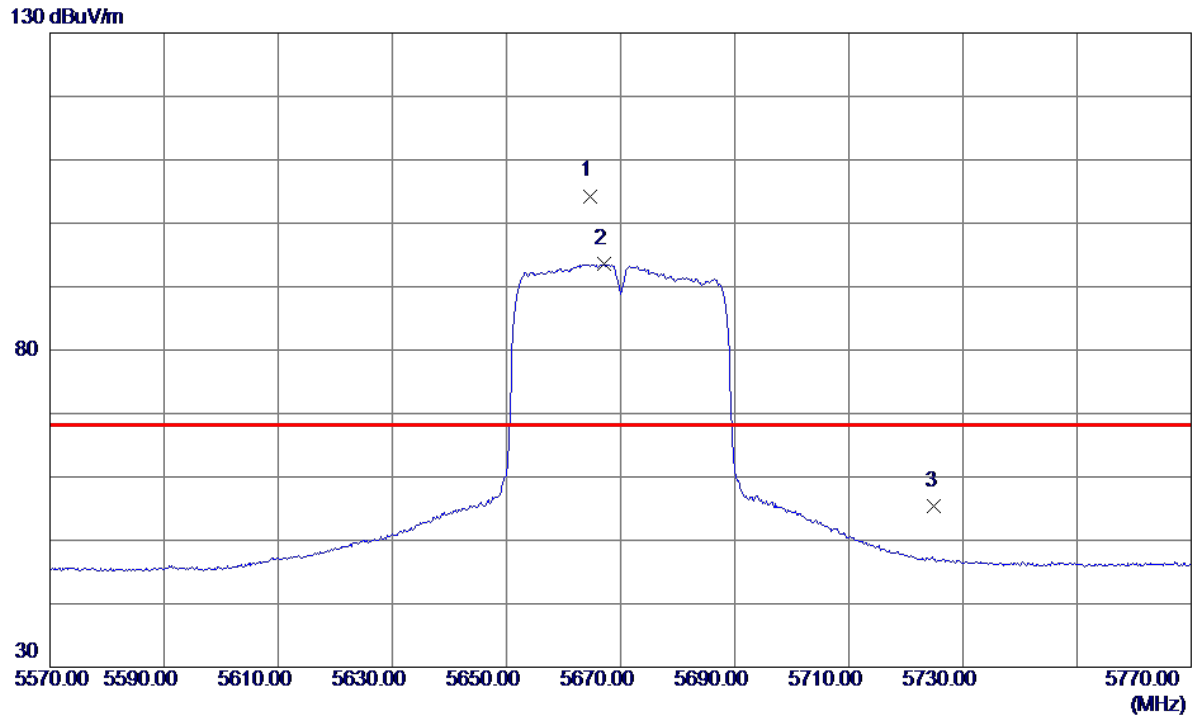


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5664.6000	87.52	16.78	104.30	68.20	36.10	Peak	No Limit
2	5667.2000	76.82	16.79	93.61	999.00	-905.39	AVG	No Limit
3	5725.0000	38.46	16.99	55.45	68.20	-12.75	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

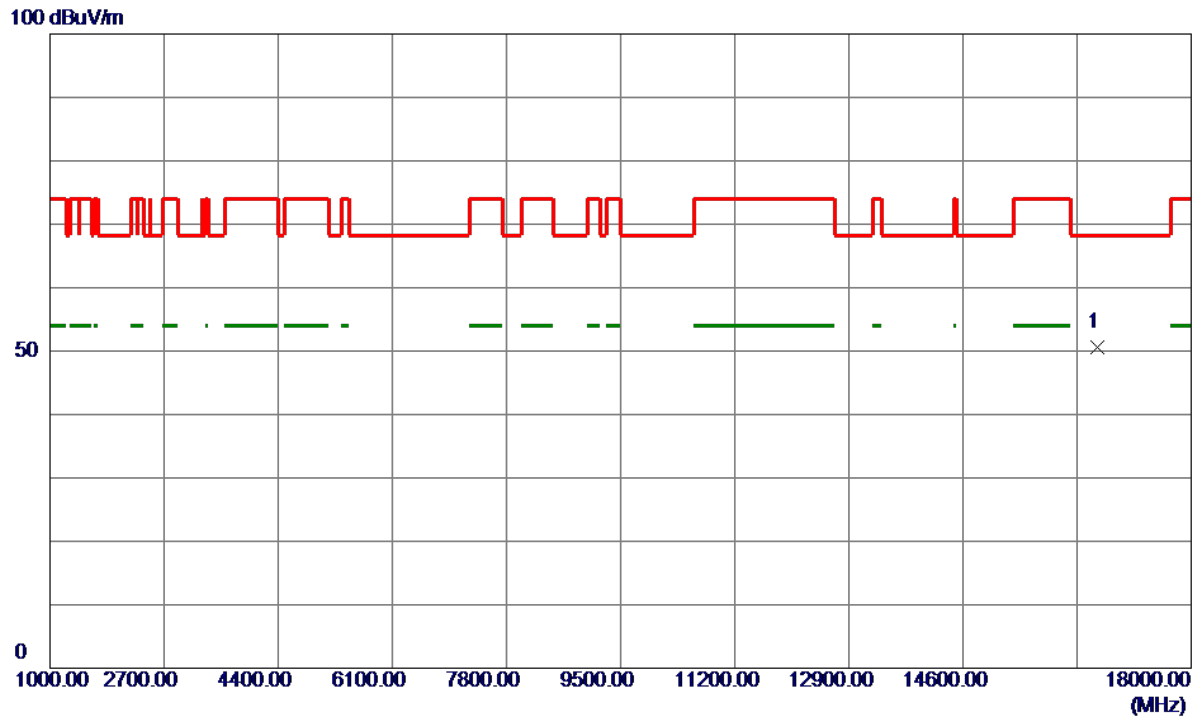

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	16600.2000	39.43	11.14	50.57	68.20	-17.63	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5530 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

130 dBuV/m

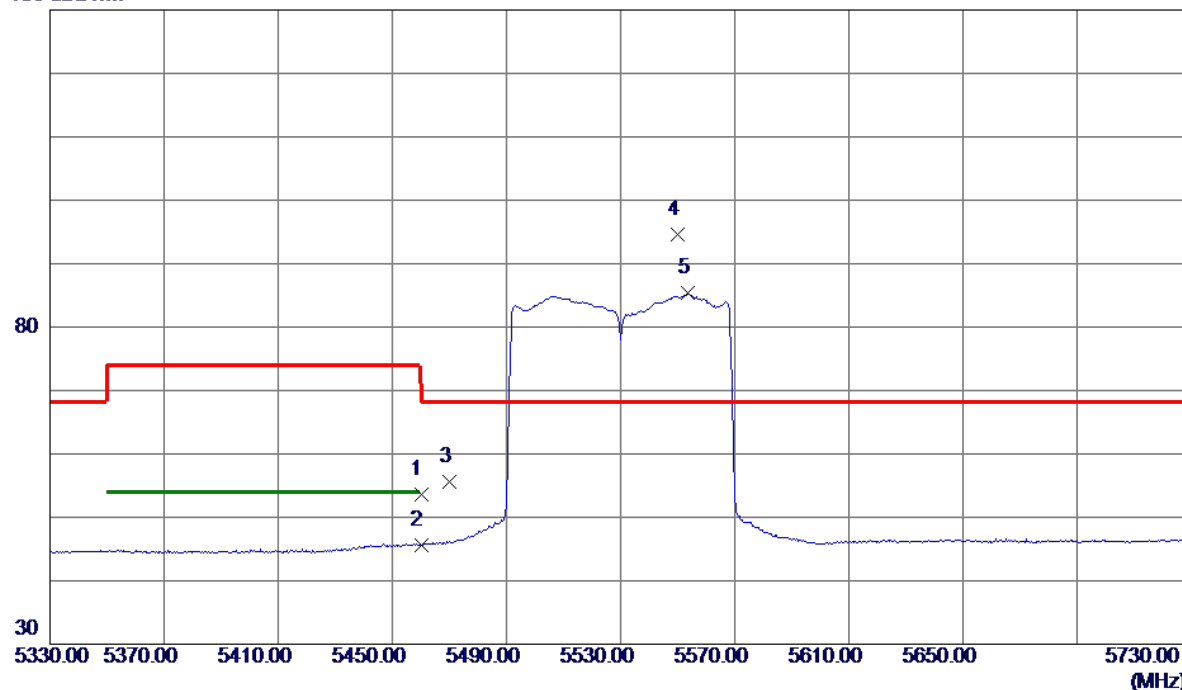


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	37.44	16.17	53.61	74.00	-20.39	Peak	
2	5460.0000	29.51	16.17	45.68	54.00	-8.32	AVG	
3	5470.0000	39.35	16.17	55.52	68.20	-12.68	Peak	
4 *	5550.0000	78.20	16.36	94.56	68.20	26.36	Peak	No Limit
5	5553.6000	68.94	16.37	85.31	999.00	-913.69	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Vertical
-----------	------------------------------------	--------------	----------

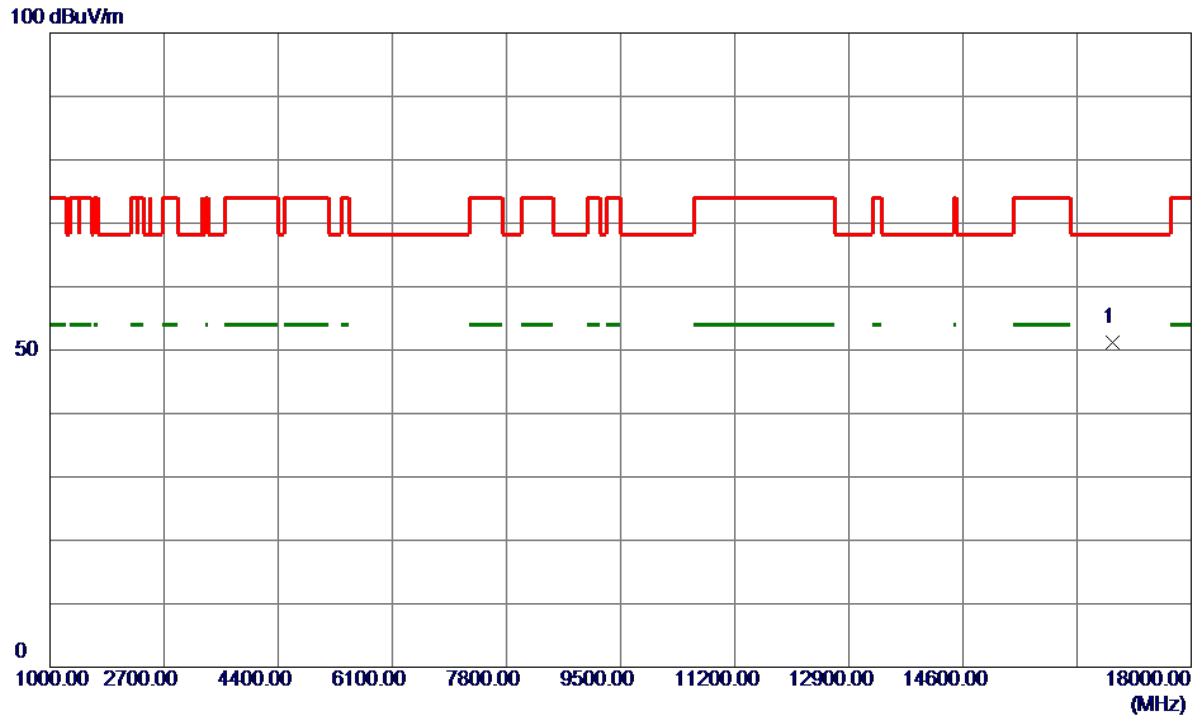


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	16834.8000	39.97	11.31	51.28	68.20	-16.92	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-2C_TX AC(VHT80) Mode 5610 MHz	Polarization	Horizontal
-----------	------------------------------------	--------------	------------

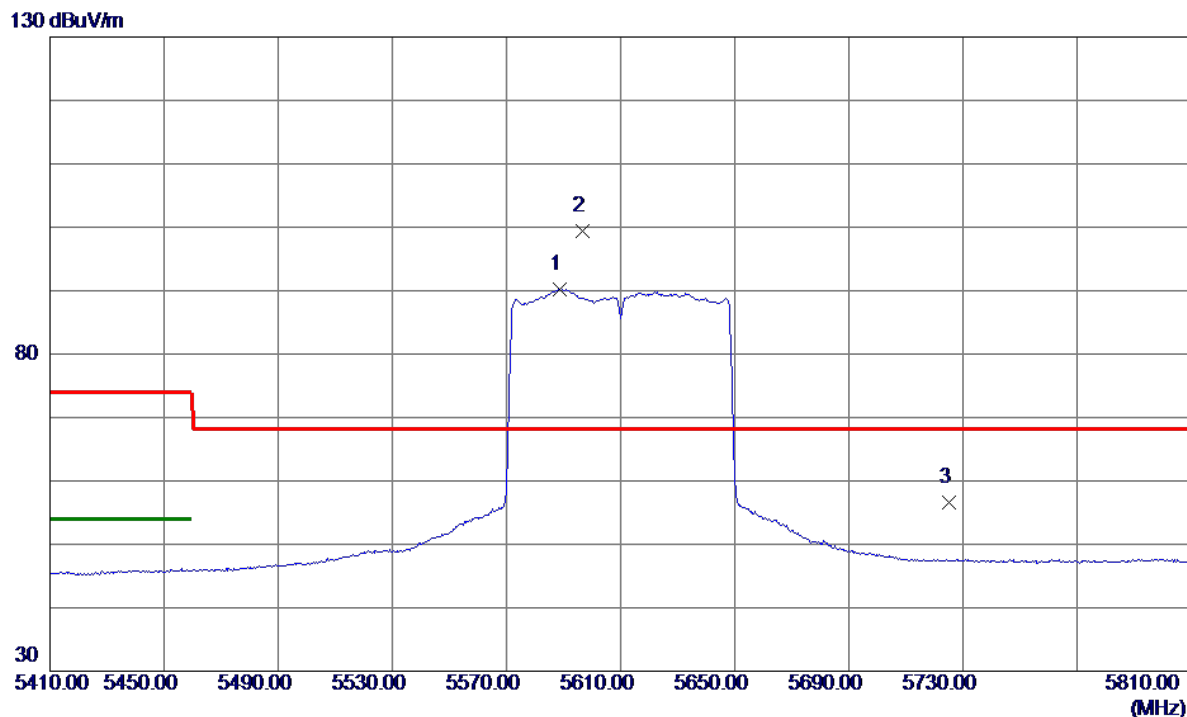


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5588.8000	73.75	16.50	90.25	999.00	-908.75	AVG	No Limit
2 *	5596.8000	82.81	16.53	99.34	68.20	31.14	Peak	No Limit
3	5725.0000	39.62	16.99	56.61	68.20	-11.59	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

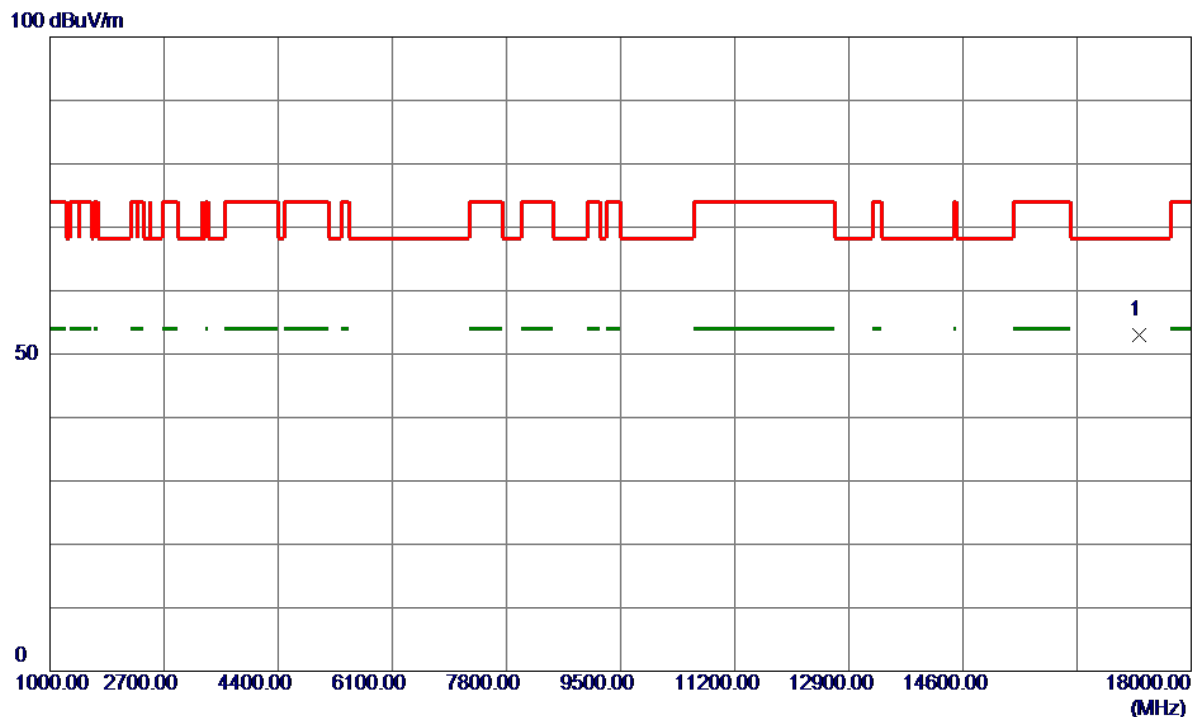


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17231.4400	41.98	11.01	52.99	68.20	-15.21	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

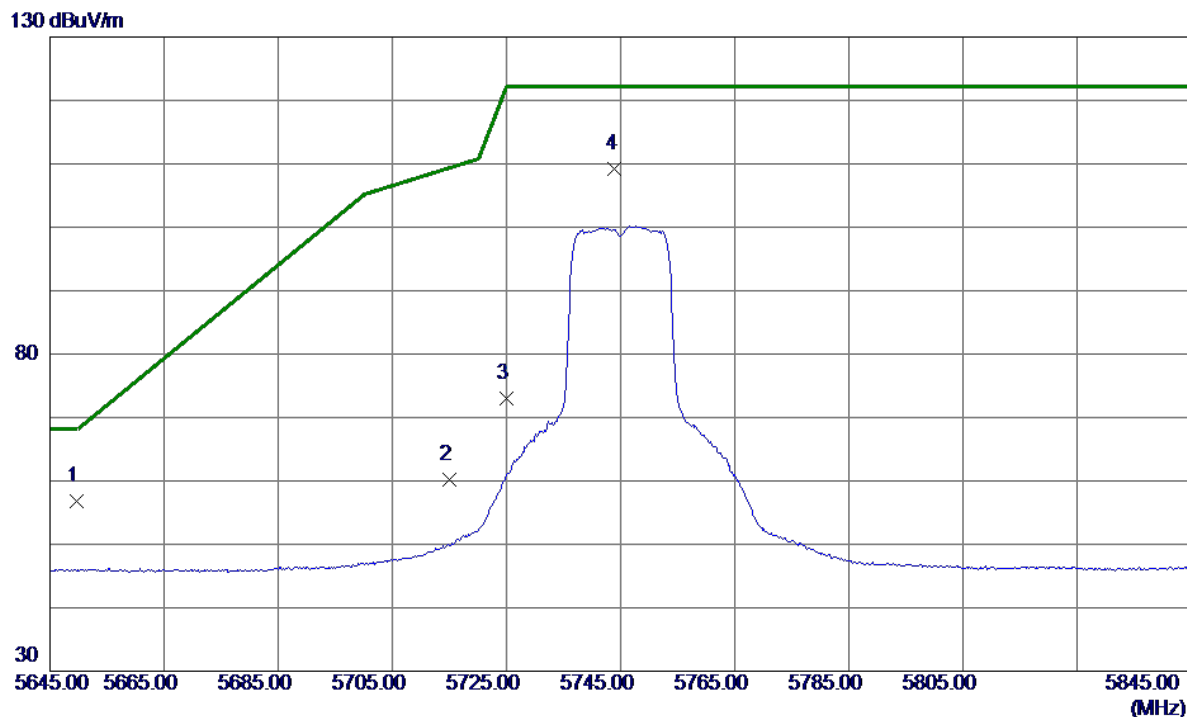


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5649.6000	39.99	16.72	56.71	68.20	-11.49	Peak	
2	5715.0000	43.25	16.96	60.21	109.40	-49.19	Peak	
3	5725.0000	56.00	16.99	72.99	122.20	-49.21	Peak	
4	5744.0000	92.17	17.06	109.23	122.20	-12.97	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

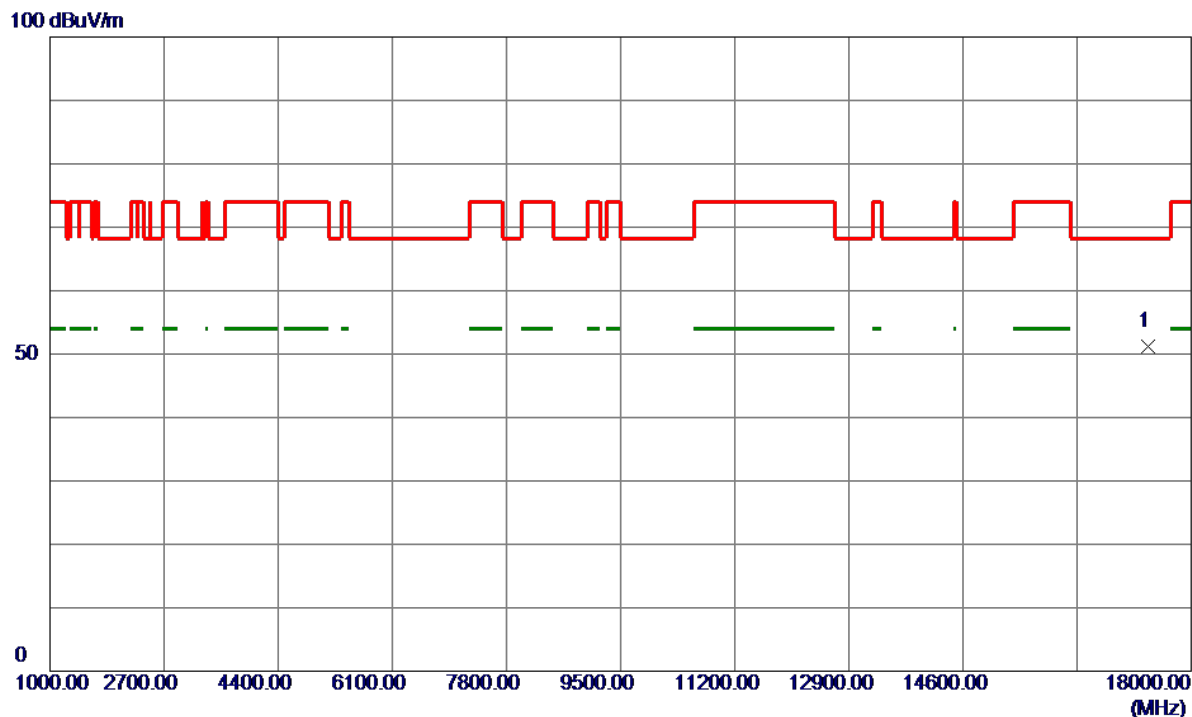


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17357.0000	40.33	10.78	51.11	68.20	-17.09	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

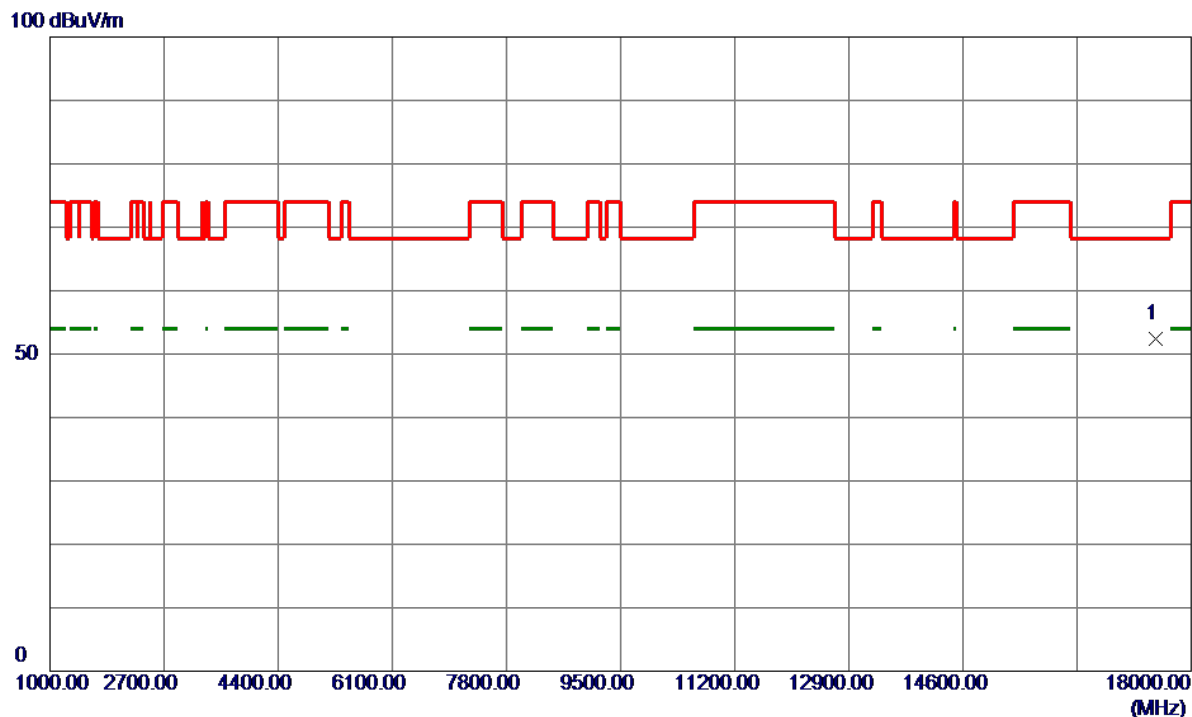


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17476.1199	41.88	10.57	52.45	68.20	-15.75	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX A Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

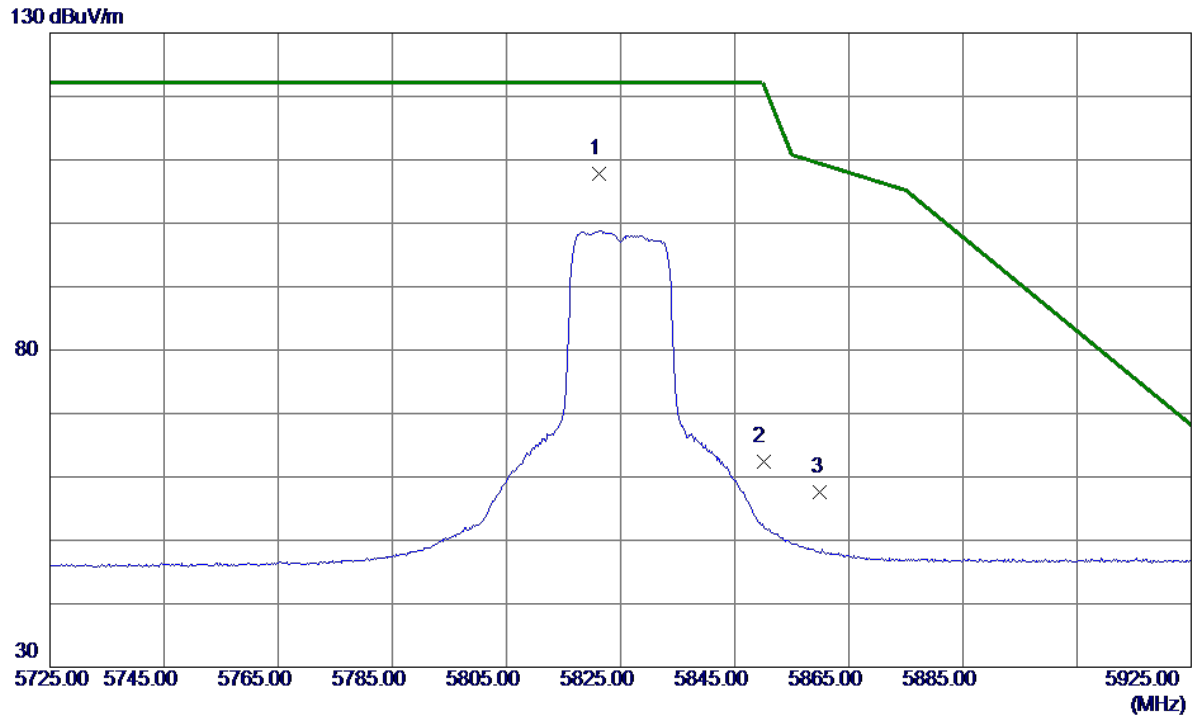


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5821.2000	90.50	17.34	107.84	122.20	-14.36	Peak	No Limit
2	5850.0000	44.94	17.45	62.39	122.20	-59.81	Peak	
3	5860.0000	40.14	17.48	57.62	109.40	-51.78	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5745 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

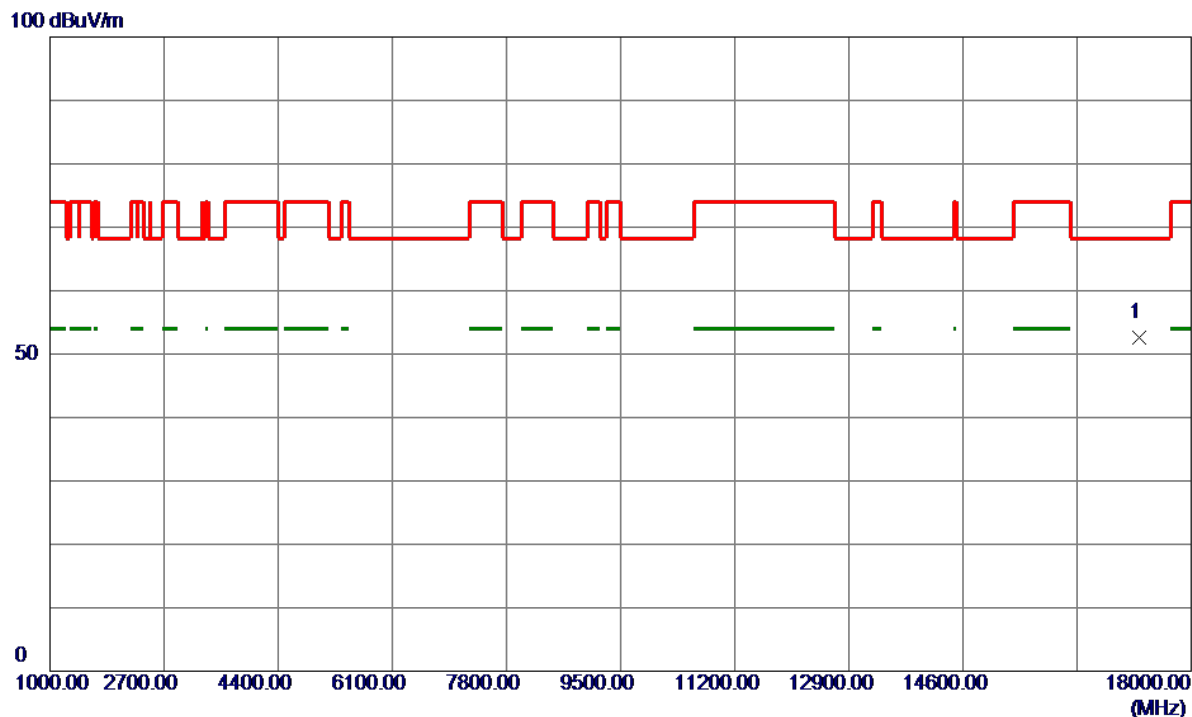


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	17220.8000	41.55	11.02	52.57	68.20	-15.63	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5745 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

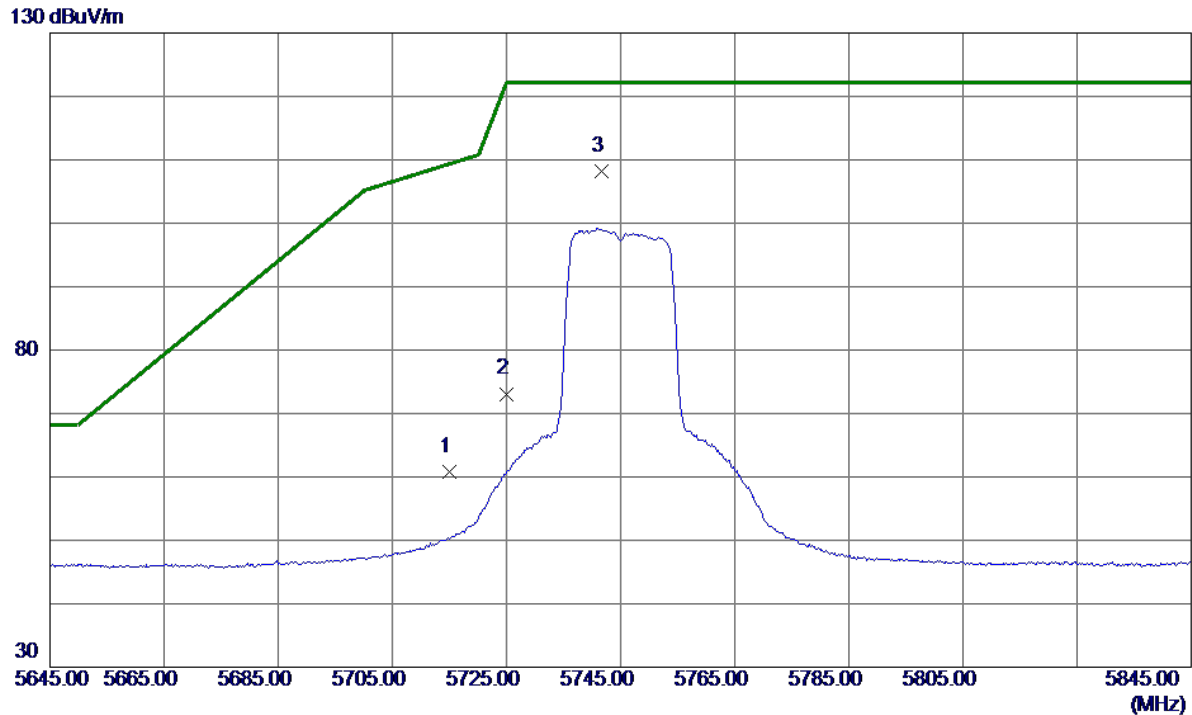


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	43.76	16.96	60.72	109.40	-48.68	Peak	
2	5725.0000	56.11	16.99	73.10	122.20	-49.10	Peak	
3 *	5741.6000	91.20	17.05	108.25	122.20	-13.95	Peak	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5785 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

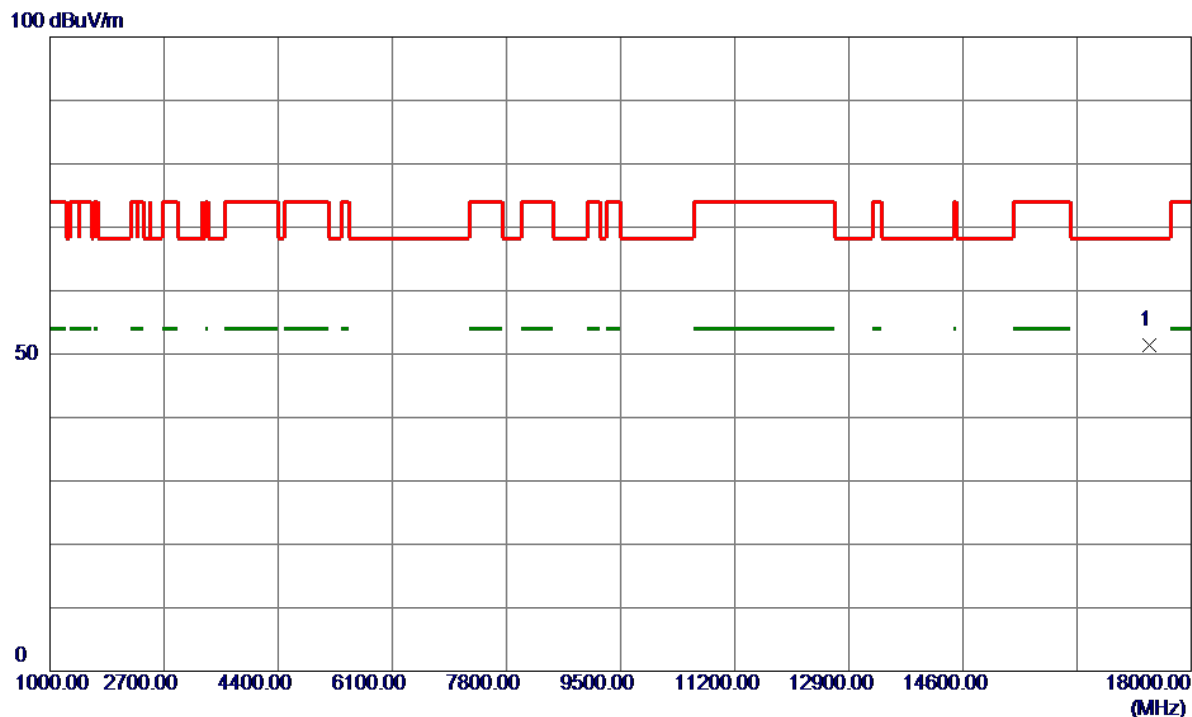


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17374.0800	40.57	10.75	51.32	68.20	-16.88	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5825 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

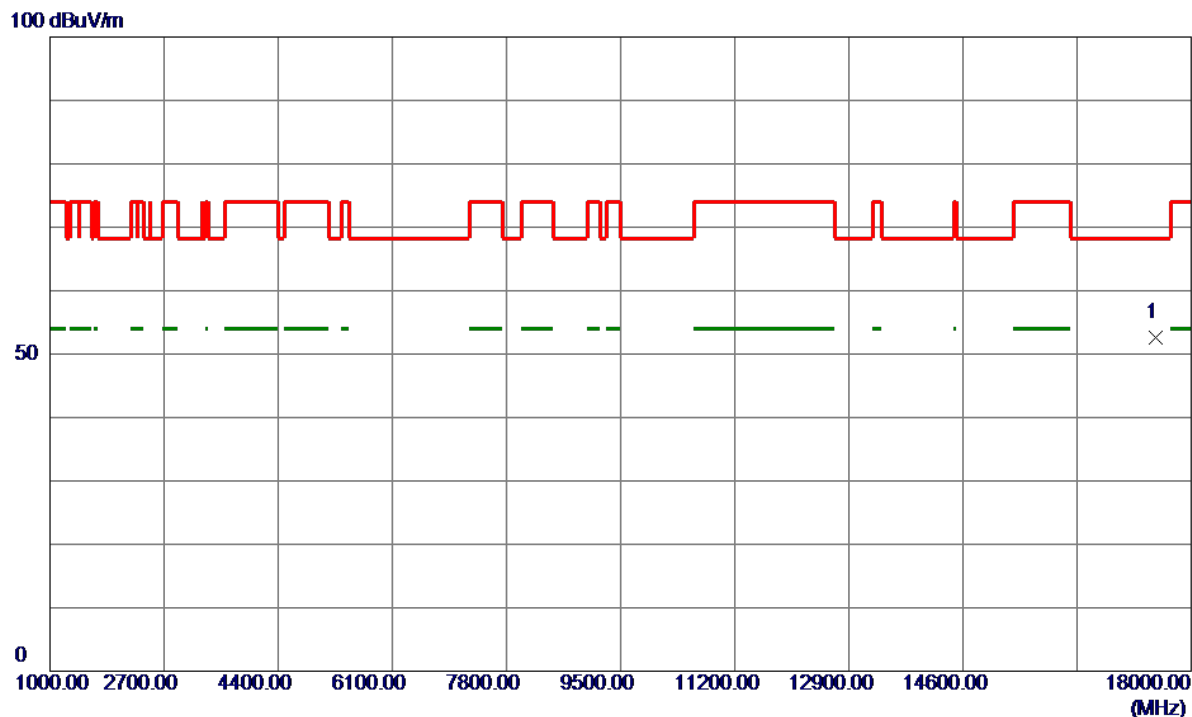


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17476.1700	42.05	10.57	52.62	68.20	-15.58	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT20) Mode 5825 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

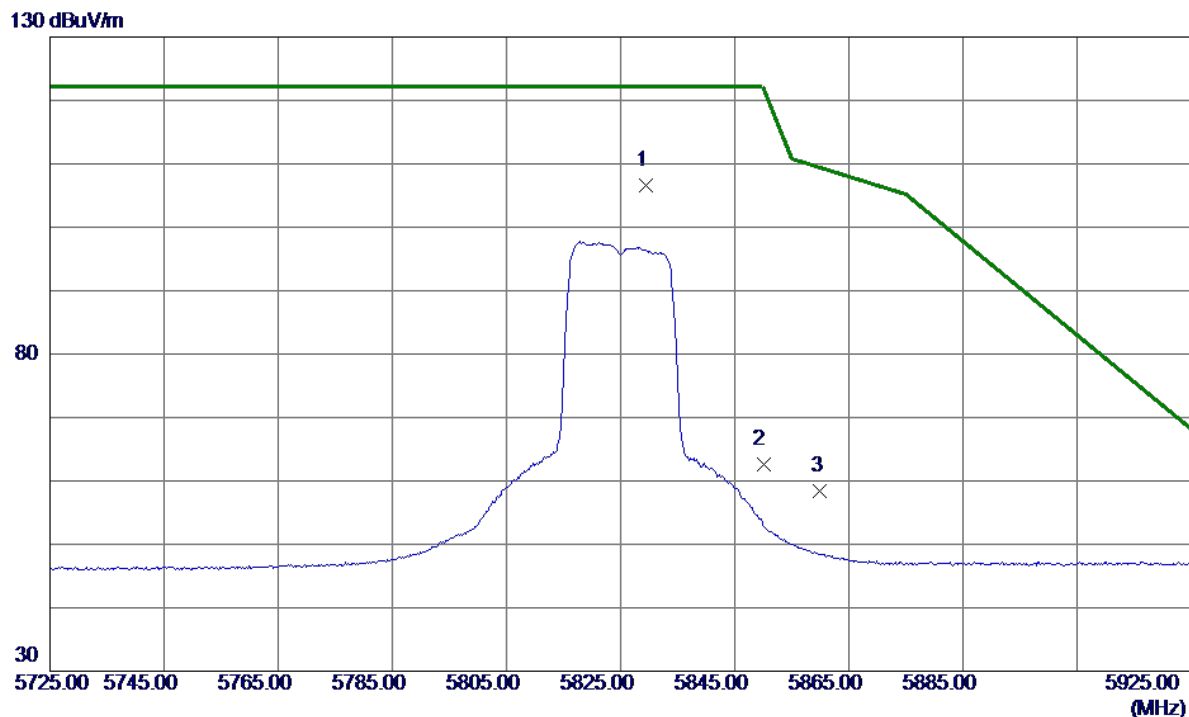


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5829.4000	89.24	17.37	106.61	122.20	-15.59	Peak	No Limit
2	5850.0000	45.13	17.45	62.58	122.20	-59.62	Peak	
3	5860.0000	40.90	17.48	58.38	109.40	-51.02	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5755 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

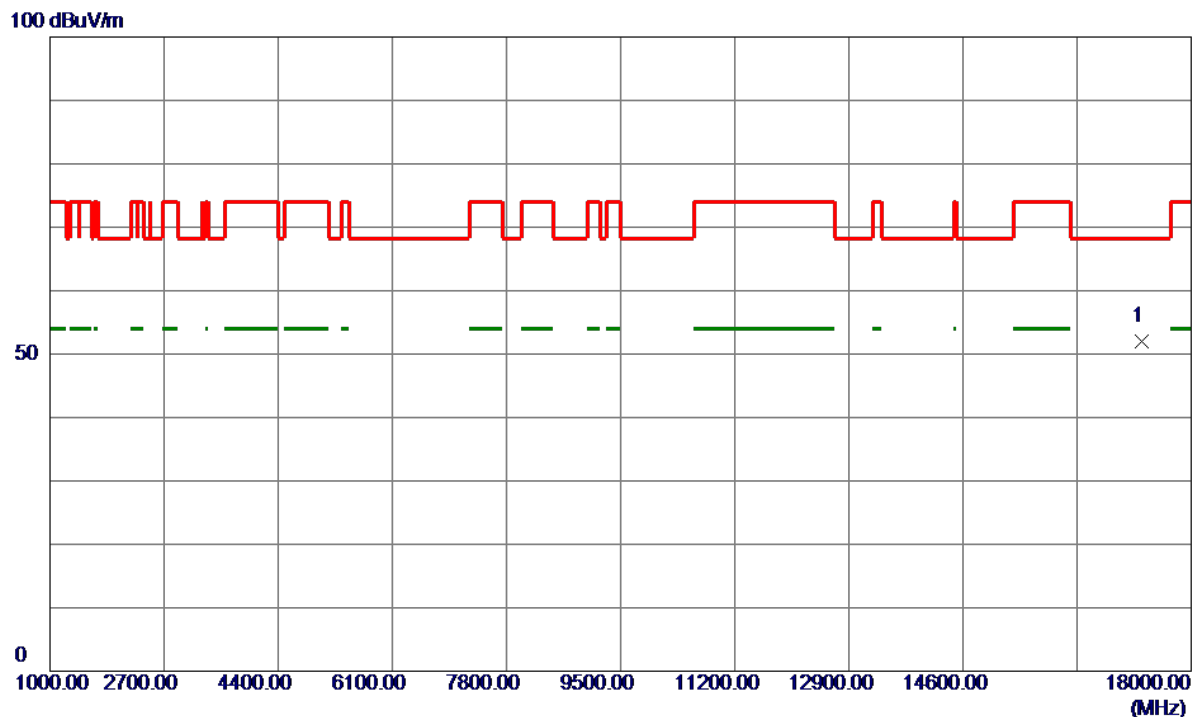


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17257.5600	41.03	10.96	51.99	68.20	-16.21	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5755 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

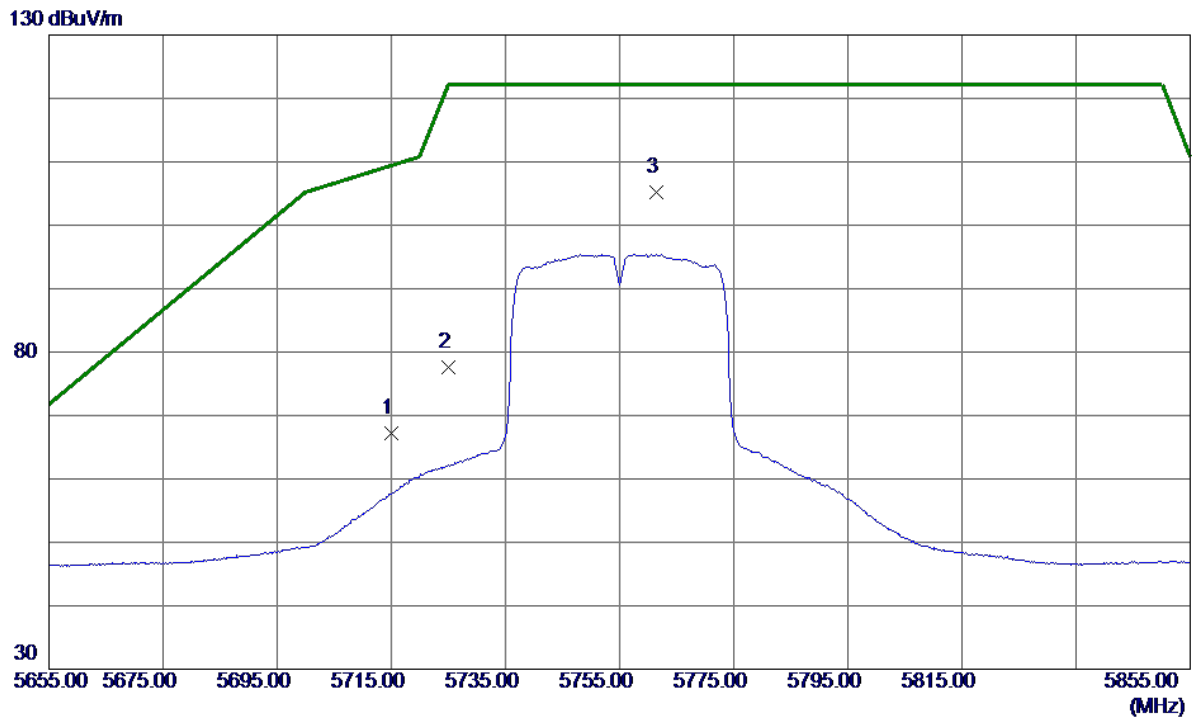


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	50.16	16.96	67.12	109.40	-42.28	Peak	
2	5725.0000	60.57	16.99	77.56	122.20	-44.64	Peak	
3 *	5761.4000	87.98	17.13	105.11	122.20	-17.09	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5795 MHz	Polarization	Vertical
-----------	---------------------------------	--------------	----------

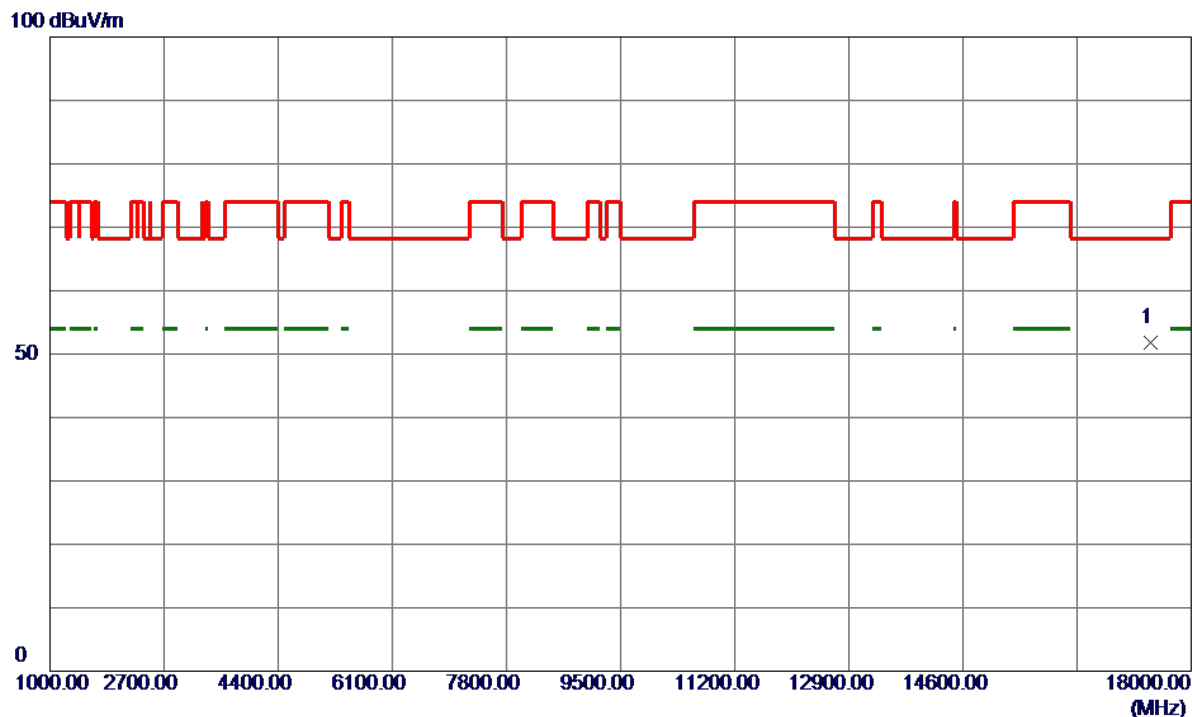


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17387.4300	41.03	10.73	51.76	68.20	-16.44	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX N(HT40) Mode 5795 MHz	Polarization	Horizontal
-----------	---------------------------------	--------------	------------

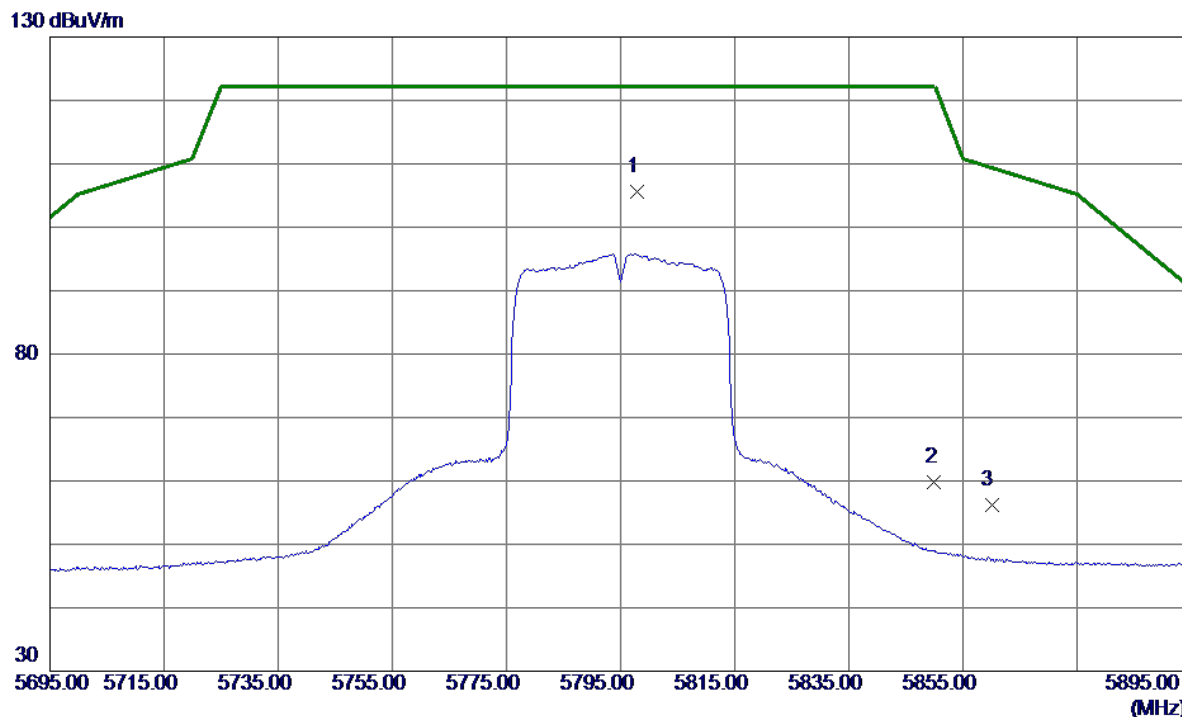


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5797.8000	88.37	17.26	105.63	122.20	-16.57	Peak	No Limit
2	5850.0000	42.36	17.45	59.81	122.20	-62.39	Peak	
3	5860.0000	38.66	17.48	56.14	109.40	-53.26	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Vertical
-----------	-----------------------------------	--------------	----------

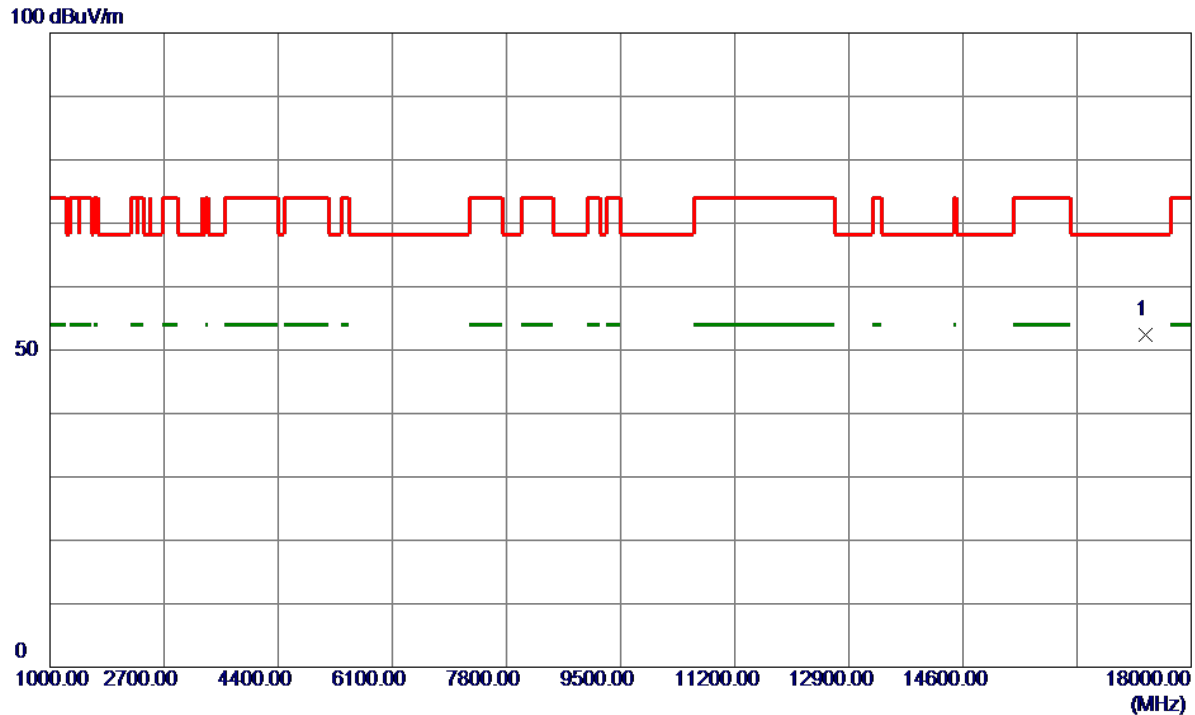


No.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
	MHz	dBuV/m	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1 *	17322.3300	41.62	10.84	52.46	68.20	-15.74	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz	Polarization	Horizontal
-----------	-----------------------------------	--------------	------------

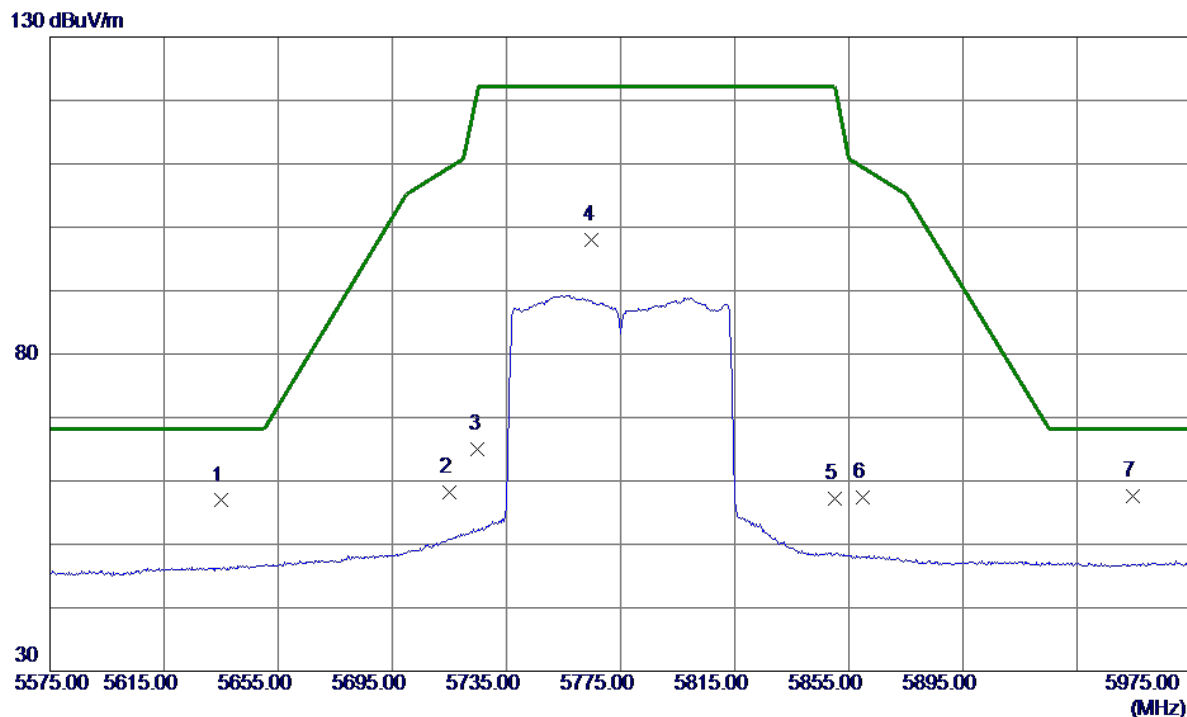

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5635.0000	40.23	16.67	56.90	68.20	-11.30	Peak	
2	5715.0000	41.30	16.96	58.26	109.40	-51.14	Peak	
3	5725.0000	48.03	16.99	65.02	122.20	-57.18	Peak	
4	5765.0000	80.95	17.14	98.09	122.20	-24.11	Peak	No Limit
5	5850.0000	39.66	17.45	57.11	122.20	-65.09	Peak	
6	5860.0000	39.96	17.48	57.44	109.40	-51.96	Peak	
7 *	5954.4000	39.83	17.82	57.65	68.20	-10.55	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

86.9 dBuV/m

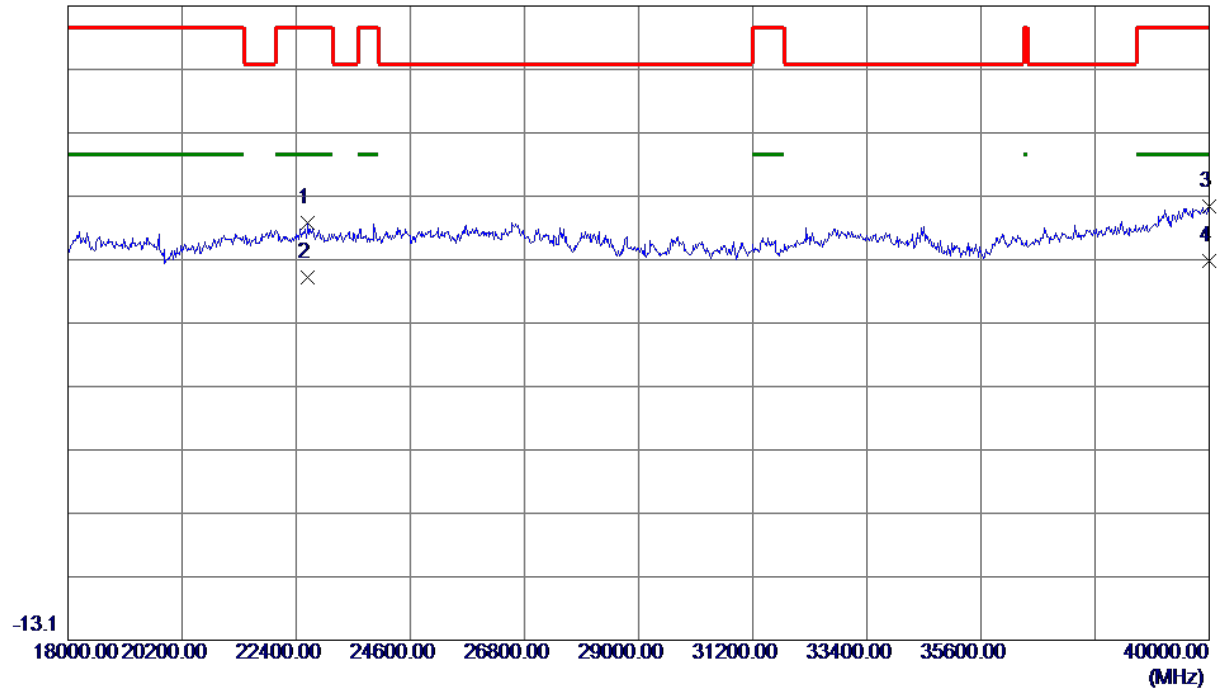

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	22620.0000	47.75	4.94	52.69	83.50	-30.81	Peak	
2	22620.0000	39.16	4.94	44.10	63.50	-19.40	AVG	
3	39989.0000	41.98	13.33	55.31	83.50	-28.19	Peak	
4 *	39989.0000	33.42	13.33	46.75	63.50	-16.75	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Horizontal
-----------	---------------------------	--------------	------------

86.9 dBuV/m

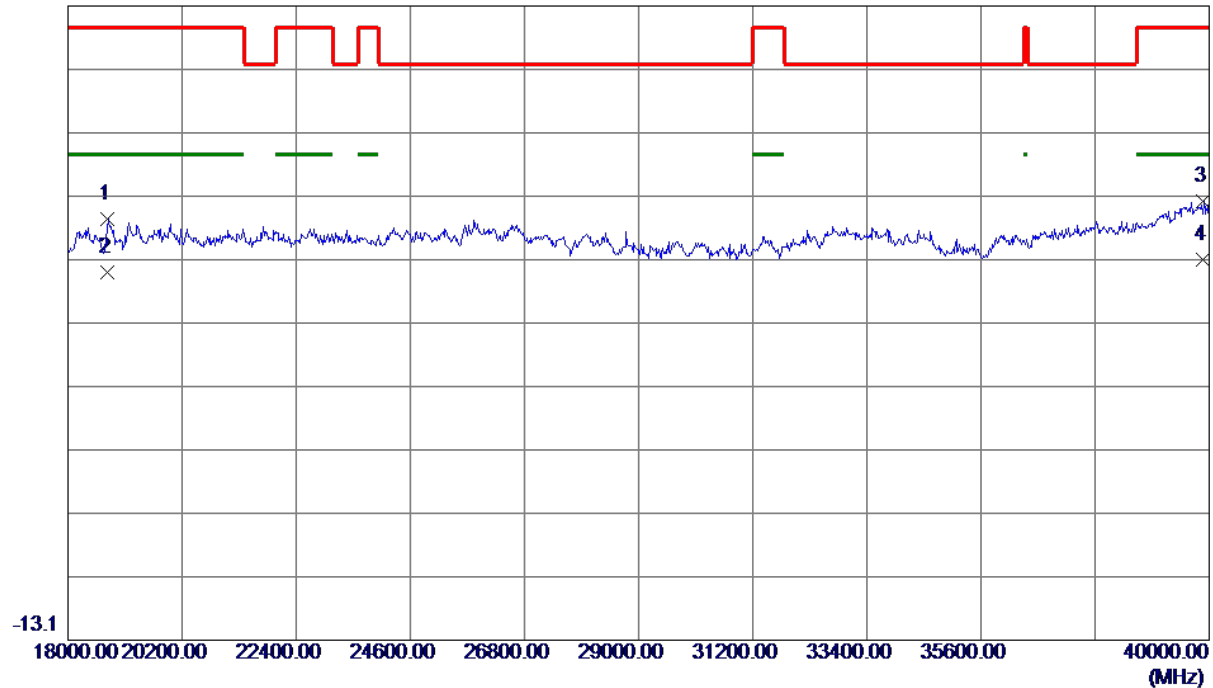

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	18770.0000	50.94	2.38	53.32	83.50	-30.18	Peak	
2	18770.0000	42.51	2.38	44.89	63.50	-18.61	AVG	
3	39890.0000	42.73	13.33	56.06	83.50	-27.44	Peak	
4 *	39890.0000	33.59	13.33	46.92	63.50	-16.58	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

The worst case:

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

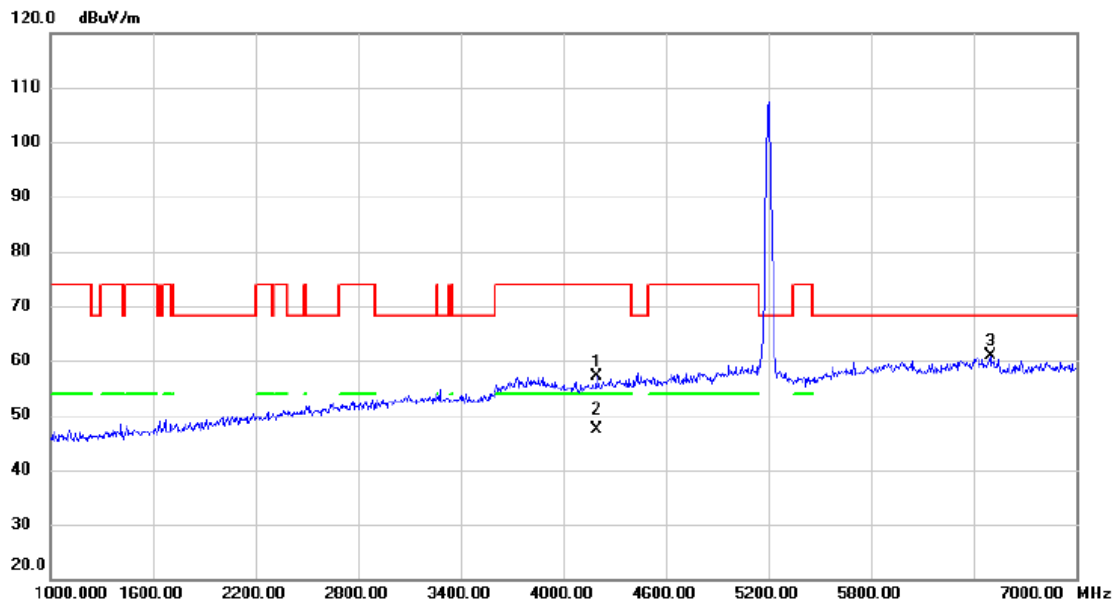


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4192.000	42.92	14.14	57.06	74.00	-16.94	peak	
2	*	4192.000	33.12	14.14	47.26	54.00	-6.74	AVG	
3		6496.000	42.28	18.49	60.77	68.20	-7.43	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	UNII-1_TX A Mode 5200 MHz	Polarization	Vertical
-----------	---------------------------	--------------	----------

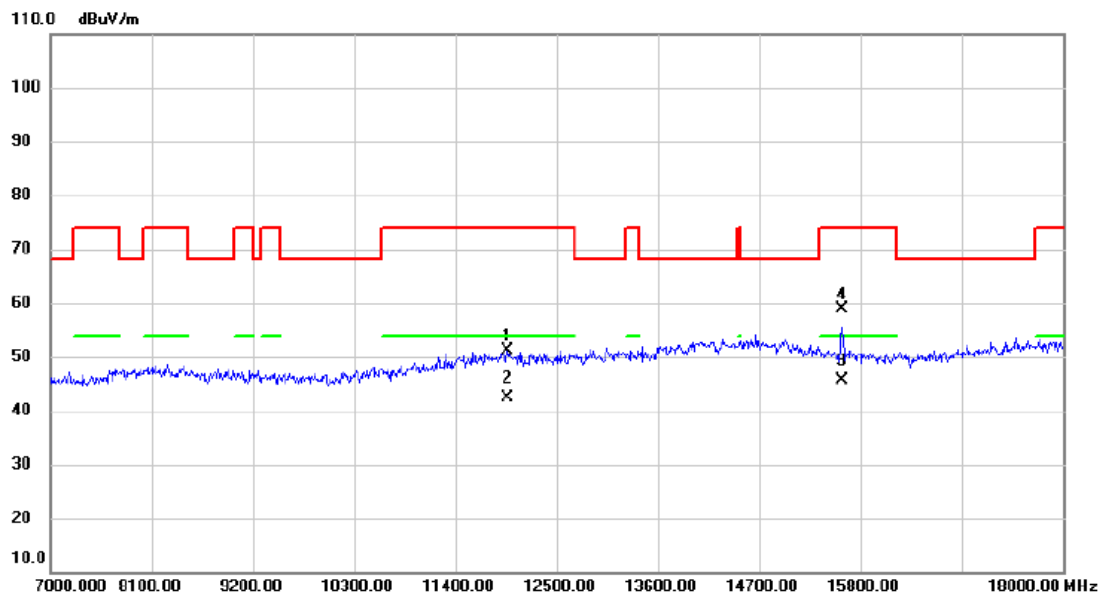

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11961.000	37.65	13.39	51.04	74.00	-22.96	peak	
2		11961.000	28.89	13.39	42.28	54.00	-11.72	AVG	
3	*	15600.960	34.14	11.39	45.53	54.00	-8.47	AVG	
4		15609.090	47.61	11.38	58.99	74.00	-15.01	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.


(2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode	UNII-1_TX A Mode
-----------	------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	33.840	17.400
40	5200	34.680	17.520
48	5240	31.800	17.520

CH36

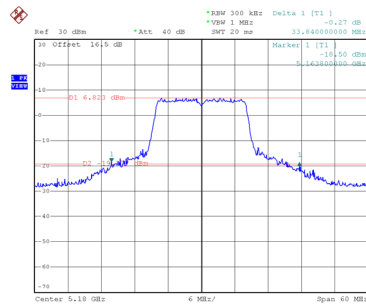


Date: 3.APR.2026 03:02:02

CH40
26 dB Bandwidth

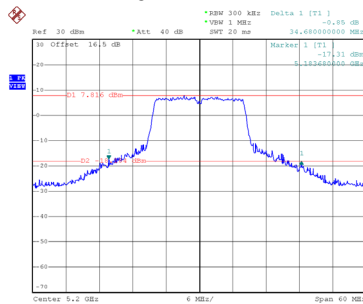


Date: 3.APR.2026 03:07:35

CH48

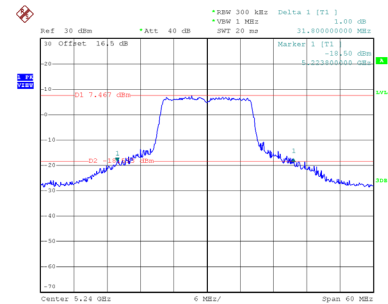


Date: 3.APR.2026 03:12:36


99 % Occupied Bandwidth

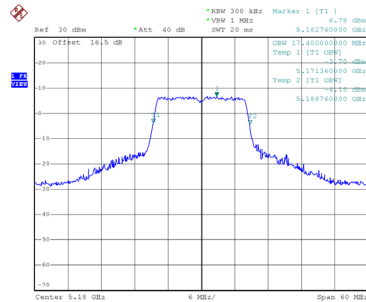

Date: 3.APR.2026 03:02:15

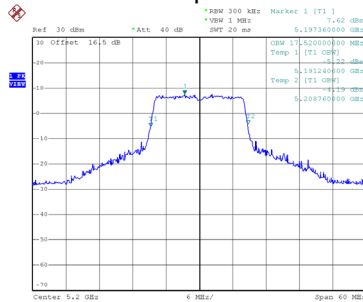

Date: 3.APR.2026 03:07:48

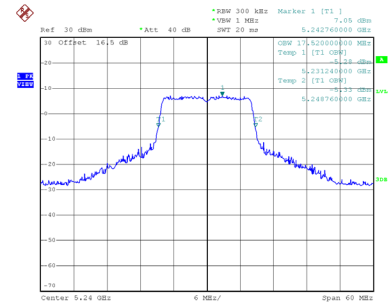


Date: 3.APR.2026 03:12:48

Test Mode	UNII-1_TX N(HT20) Mode
-----------	------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	36.000	18.240
40	5200	33.240	18.240
48	5240	37.560	18.240

CH36

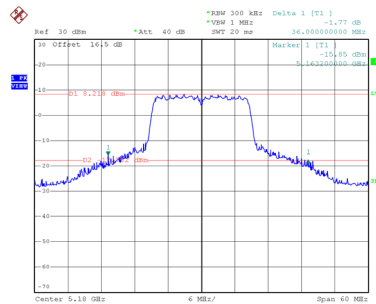


Date: 3.APR.2026 05:04:04

CH40
26 dB Bandwidth

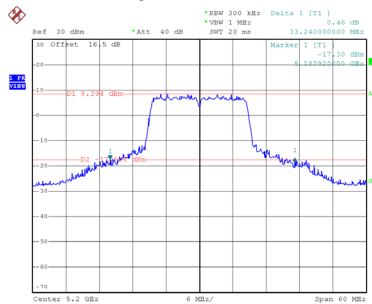


Date: 3.APR.2026 05:08:45

CH48

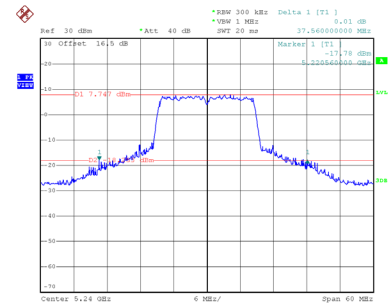


Date: 3.APR.2026 05:12:05


99 % Occupied Bandwidth

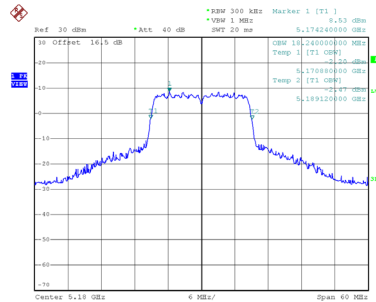

Date: 3.APR.2026 05:04:16

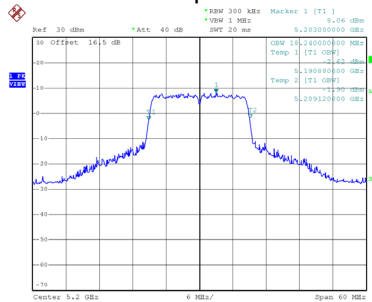

Date: 3.APR.2026 05:08:57

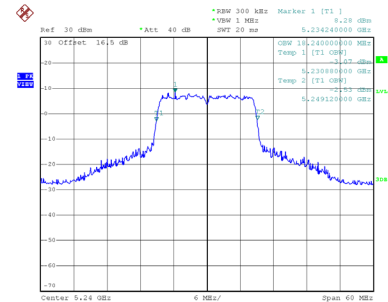


Date: 3.APR.2026 05:12:17

Test Mode	UNII-1_TX N(HT40) Mode
-----------	------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	51.400	37.200
46	5230	47.800	36.800

CH38

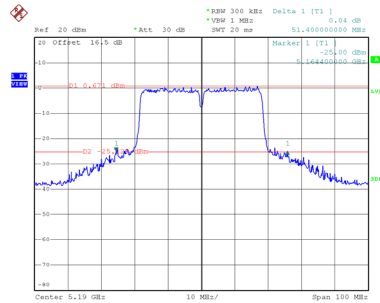


Date: 3.APR.2026 05:54:36

CH46
26 dB Bandwidth

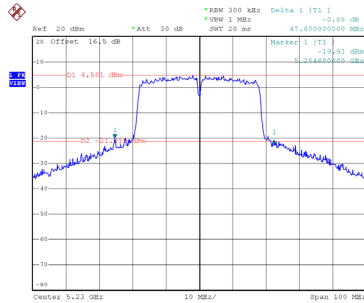


Date: 3.APR.2026 05:55:35

99 % Occupied Bandwidth

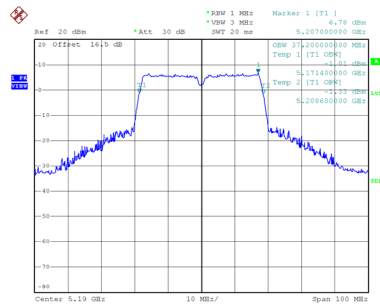

Date: 3.APR.2026 05:54:48

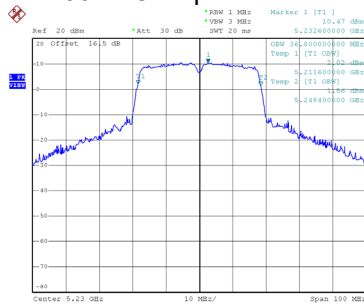


Date: 3.APR.2026 05:55:48

Test Mode	UNII-1_TX AC(VHT80) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	88.400	76.000

CH42 26 dB Bandwidth

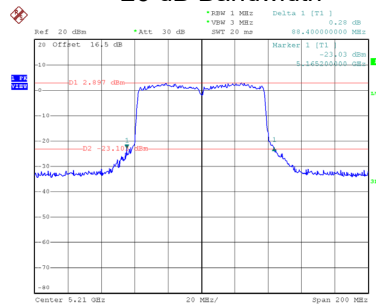

Date: 3.APR.2026 06:32:26

99 % Occupied Bandwidth

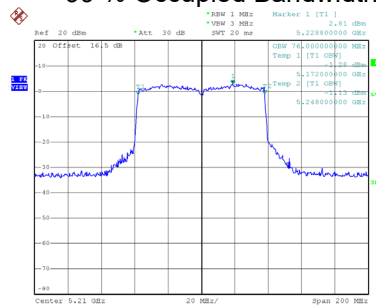


Date: 3.APR.2026 06:32:39

Test Mode UNII-2A_TX A Mode


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
52	5260	32.760	17.520
60	5300	33.720	17.400
64	5320	30.240	17.280

CH52

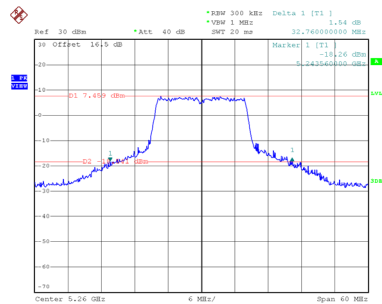


Date: 3.APR.2026 03:14:22

CH60
26 dB Bandwidth

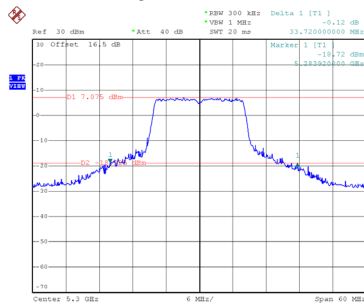


Date: 3.APR.2026 03:19:00

CH64

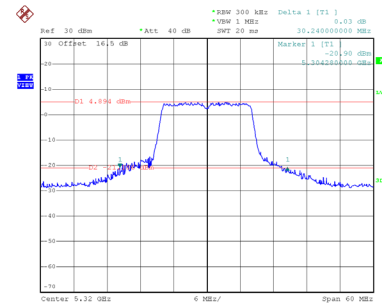


Date: 3.APR.2026 03:23:45


99 % Occupied Bandwidth

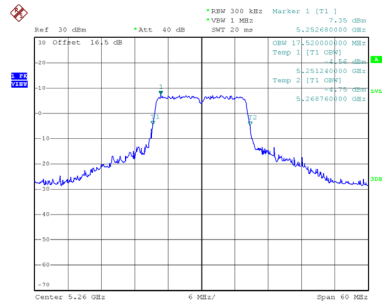

Date: 3.APR.2026 03:14:34

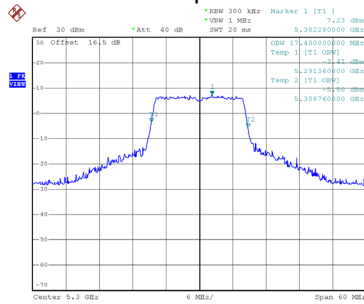

Date: 3.APR.2026 03:19:12

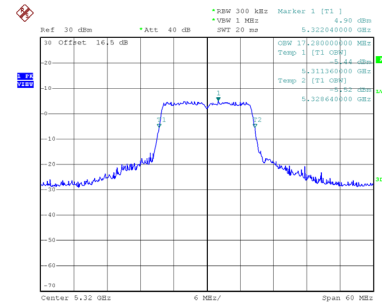

Date: 3.APR.2026 03:23:57