

RF Test Data for 2.4G WiFi (Conducted Measurements)

General Description of EUT	
Product Name:	IP Camera
Test Model:	CB1
Sample ID:	HC-C-202508-0125-01-01#
Environmental Conditions	
Temperature:	25℃
Relative Humidity:	55%
Test Voltage:	DC 5V
Test Engineer:	Gold Zhang
Note: For a more detailed features description, please refer to the report TBR-C-202508-0125-21 The report only show the worst case data.	

Contents


1.Duty Cycle.....	3
2.Maximum Conducted Output Power.....	13
3.-6dB Bandwidth.....	14
4.Occupied Channel Bandwidth.....	24
5.Maximum Power Spectral Density Level.....	34
6.Band Edge.....	44
7.Conducted RF Spurious Emission.....	57
8.Restrict Band.....	76

1.Duty Cycle


Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	ax(VHT20)	2412	Ant1	27.39	5.62	0.26
NVNT	ax(VHT20)	2437	Ant1	27.39	5.62	0.26
NVNT	ax(VHT20)	2462	Ant1	27.29	5.64	0.26
NVNT	ax(VHT40)	2422	Ant1	27.41	5.62	0.26
NVNT	ax(VHT40)	2437	Ant1	27.39	5.62	0.26
NVNT	ax(VHT40)	2452	Ant1	27.39	5.62	0.26
NVNT	b	2412	Ant1	45.14	3.45	0.12
NVNT	b	2437	Ant1	45.51	3.42	0.12
NVNT	b	2462	Ant1	45.51	3.42	0.12
NVNT	g	2412	Ant1	12.11	9.17	0.72
NVNT	g	2437	Ant1	12.2	9.14	0.71
NVNT	g	2462	Ant1	12.2	9.14	0.71
NVNT	n(HT20)	2412	Ant1	33.16	4.79	0.2
NVNT	n(HT20)	2437	Ant1	33.16	4.79	0.2
NVNT	n(HT20)	2462	Ant1	33.18	4.79	0.2
NVNT	n(HT40)	2422	Ant1	32.28	4.91	0.2
NVNT	n(HT40)	2437	Ant1	32.32	4.91	0.2
NVNT	n(HT40)	2452	Ant1	32.28	4.91	0.2

Test Graphs


Duty Cycle NVNT ax(VHT20) 2412MHz Ant1

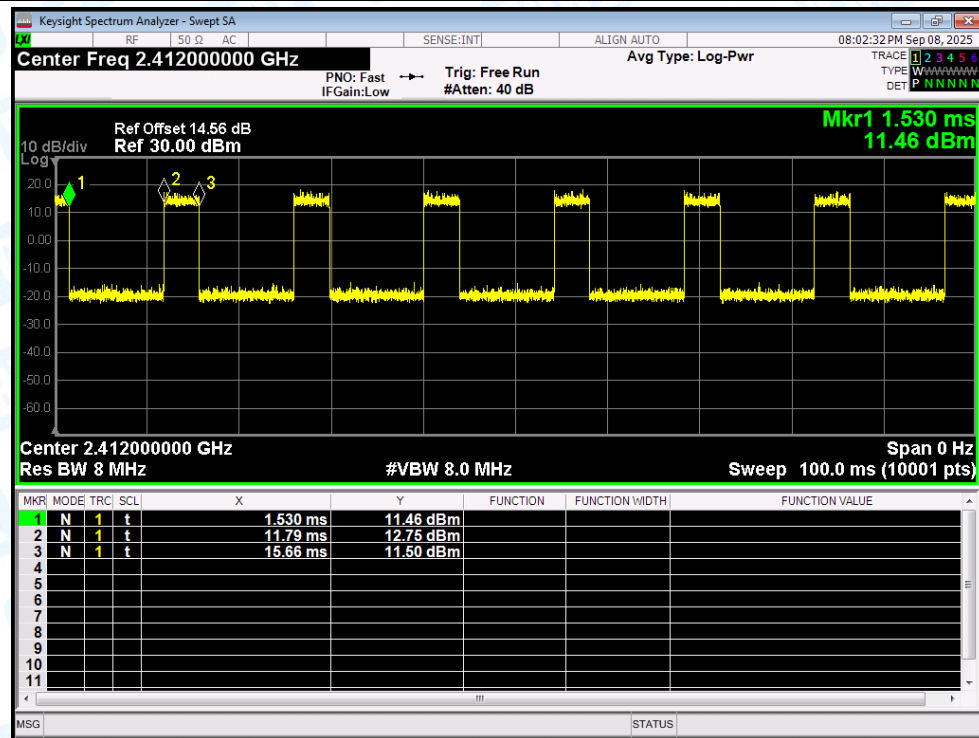


Duty Cycle NVNT ax(VHT20) 2437MHz Ant1

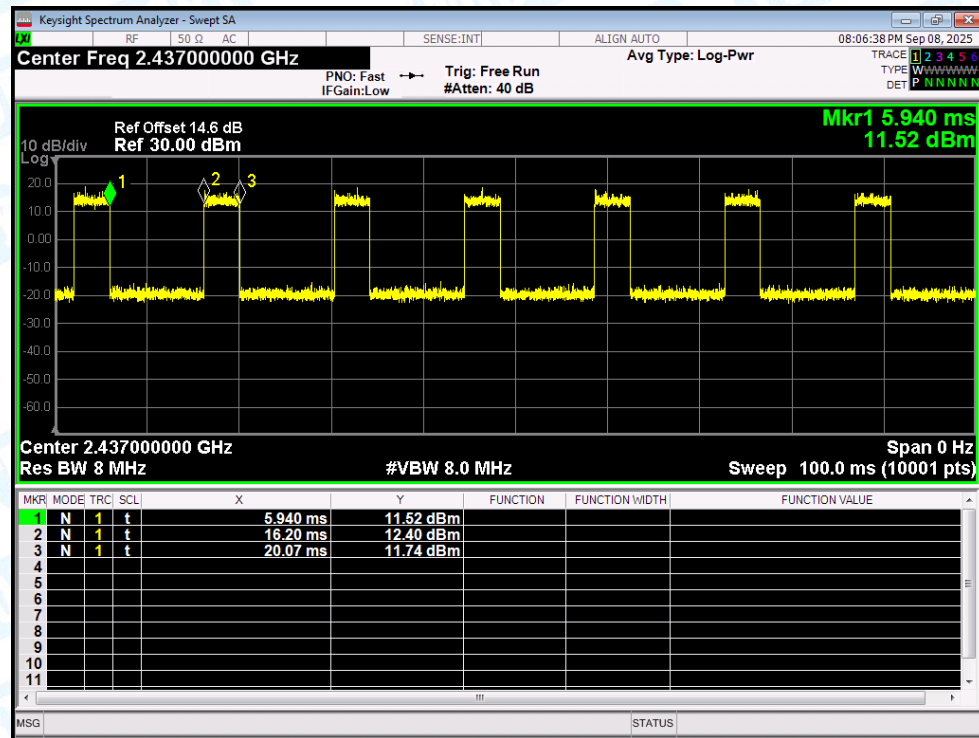


Duty Cycle NVNT ax(VHT20) 2462MHz Ant1

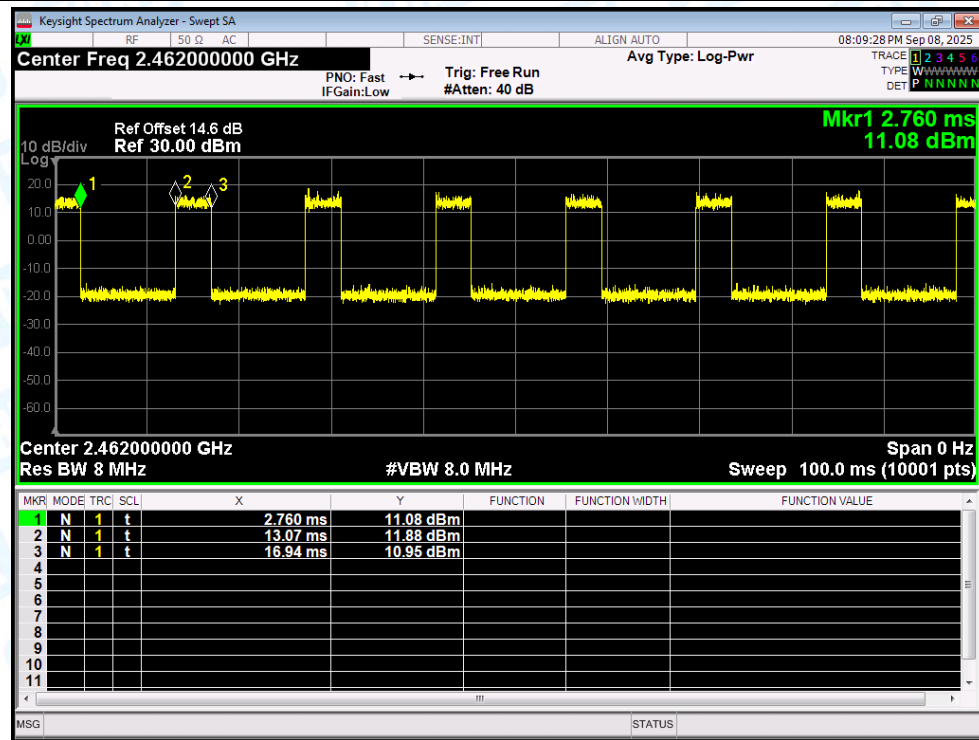


Duty Cycle NVNT ax(VHT40) 2422MHz Ant1

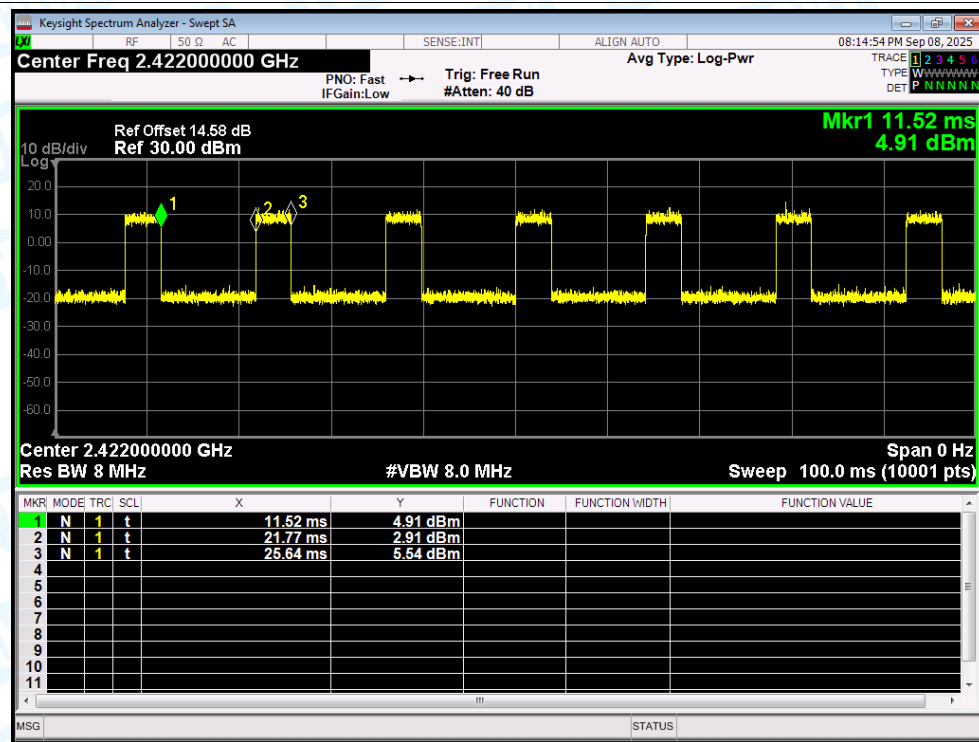


Duty Cycle NVNT ax(VHT40) 2437MHz Ant1

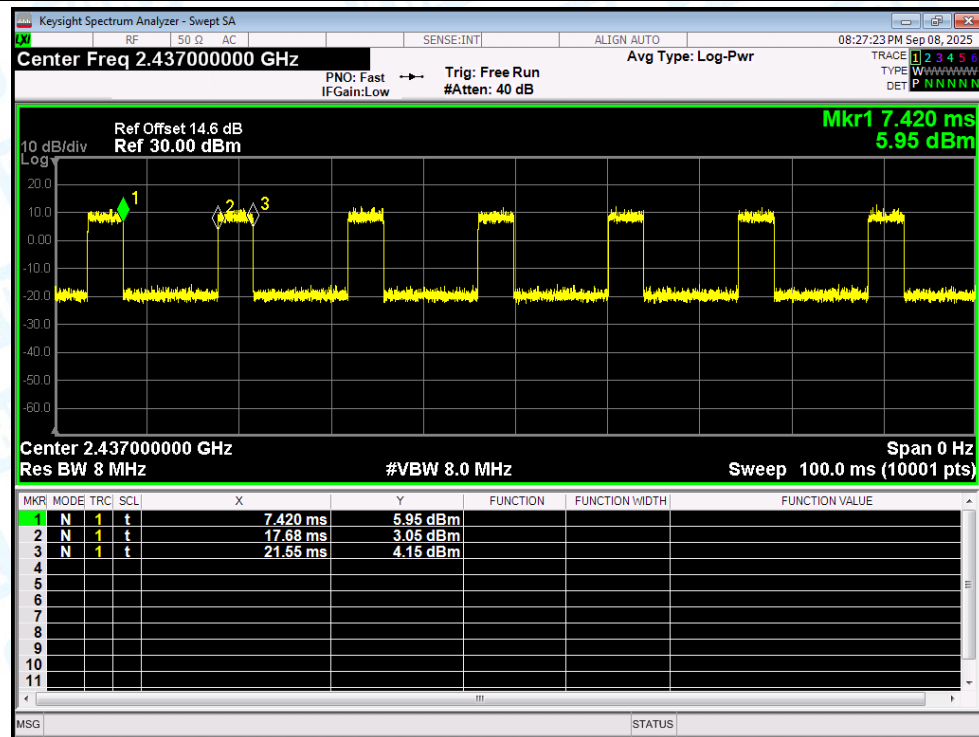


Duty Cycle NVNT ax(VHT40) 2452MHz Ant1

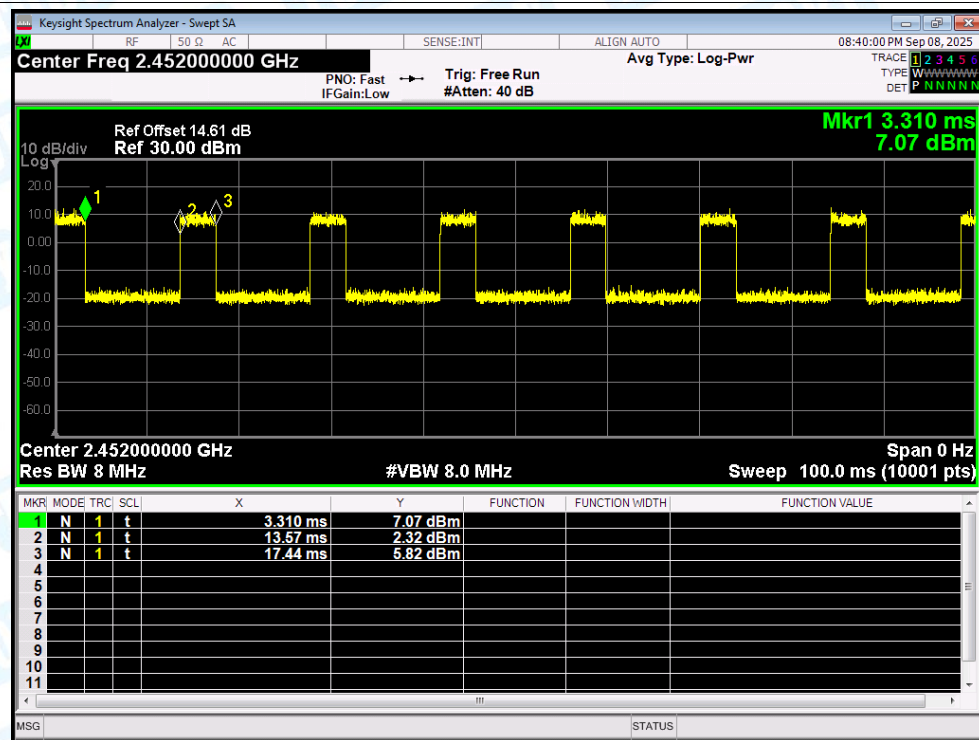


Duty Cycle NVNT b 2412MHz Ant1

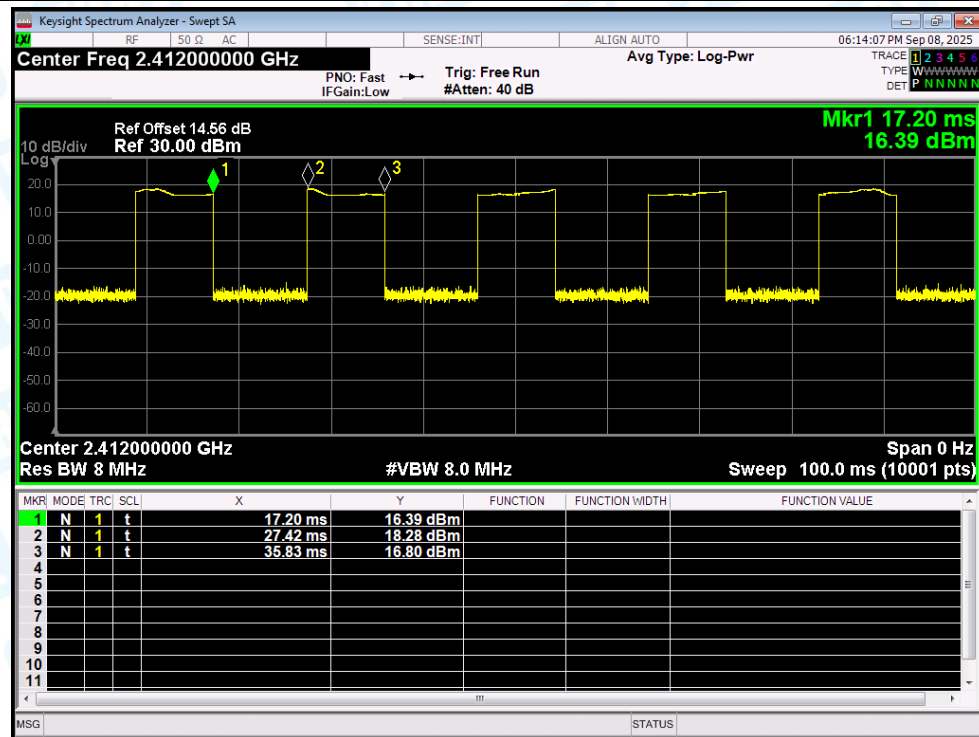


Duty Cycle NVNT b 2437MHz Ant1

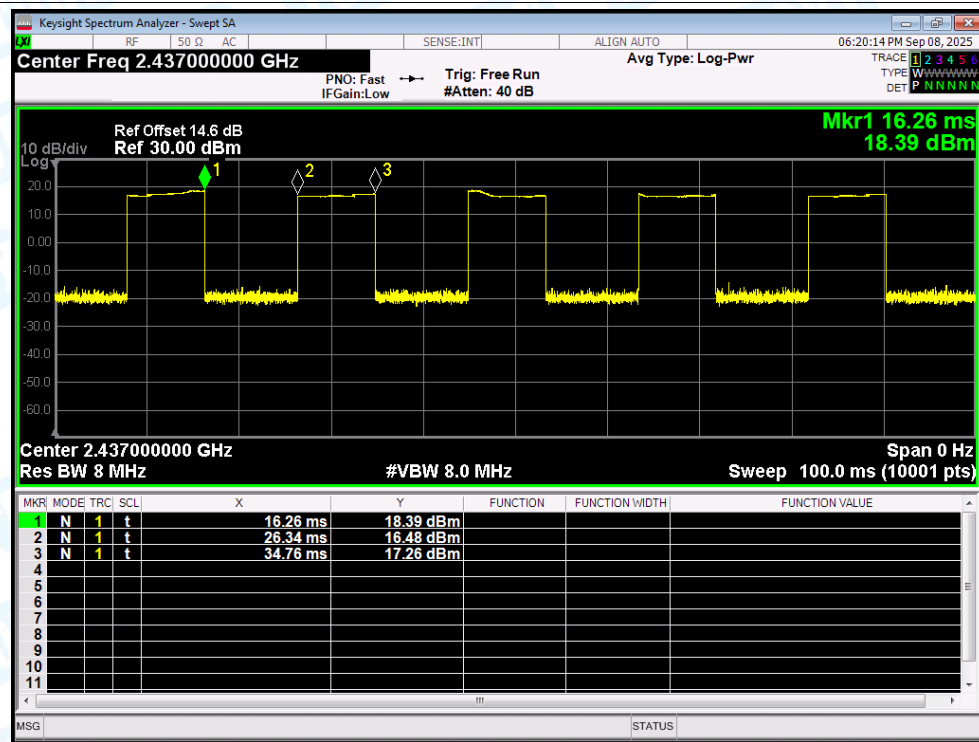


Duty Cycle NVNT b 2462MHz Ant1

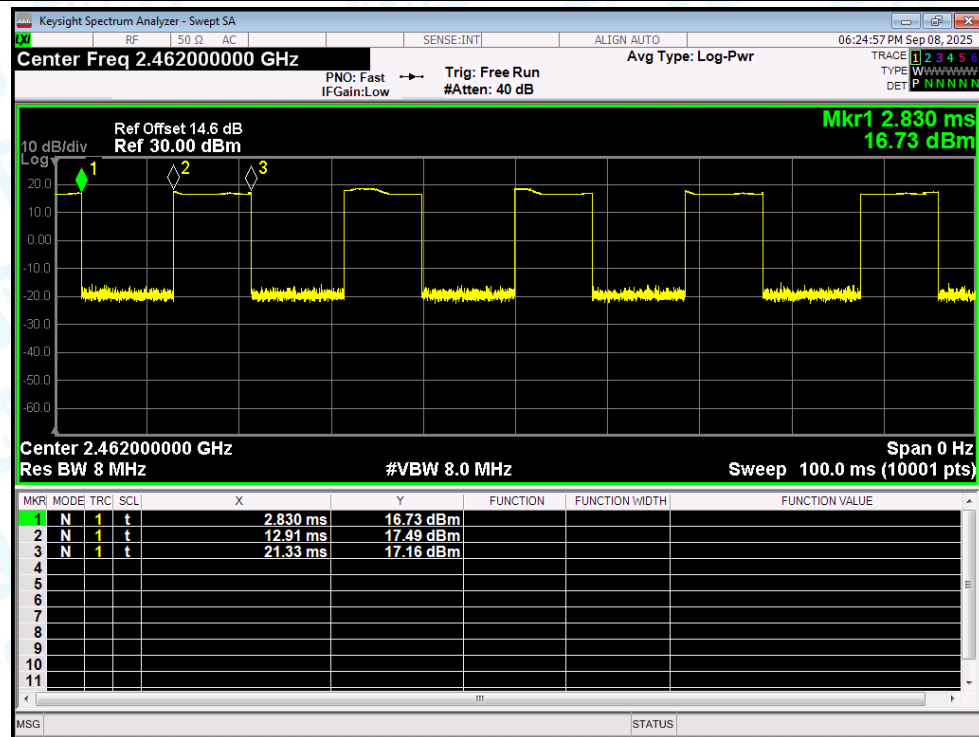


Duty Cycle NVNT g 2412MHz Ant1

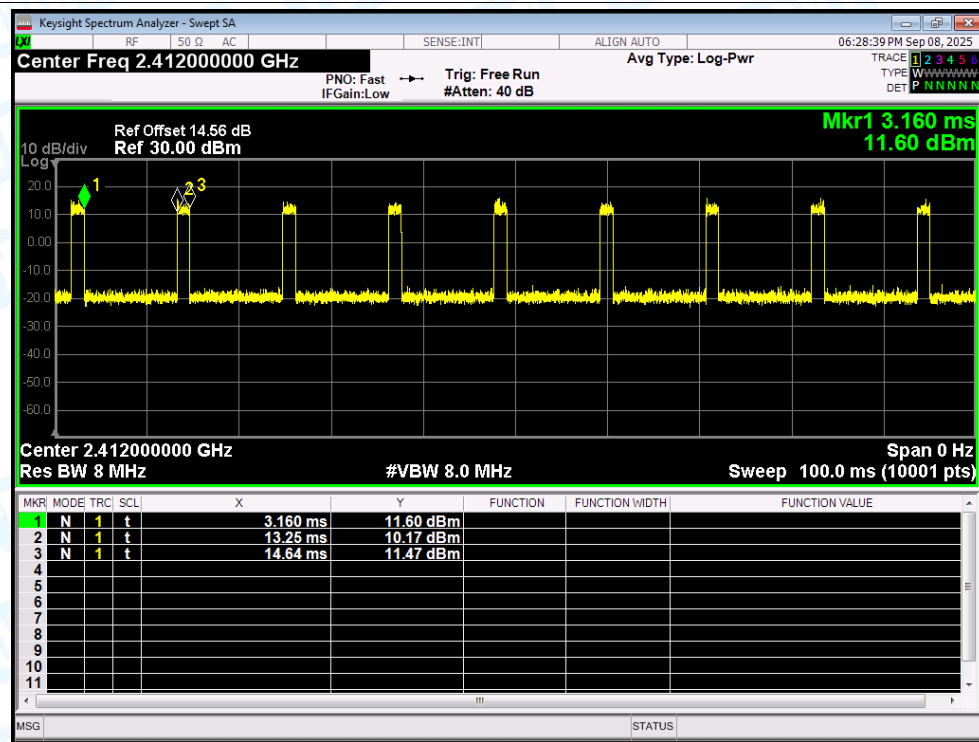


Duty Cycle NVNT g 2437MHz Ant1

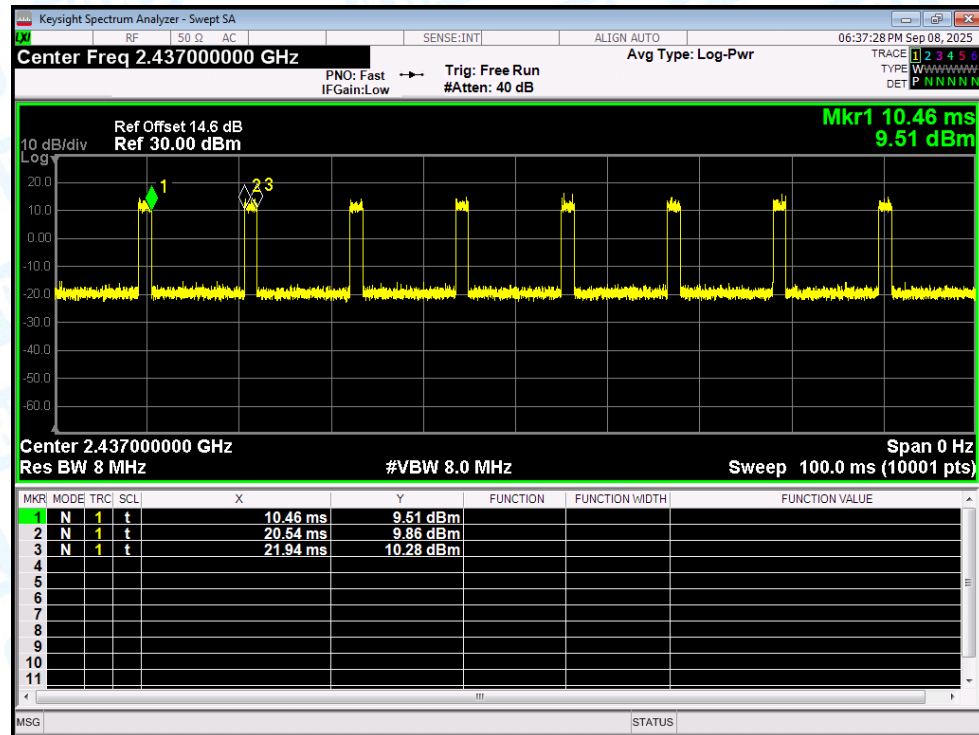


Duty Cycle NVNT g 2462MHz Ant1

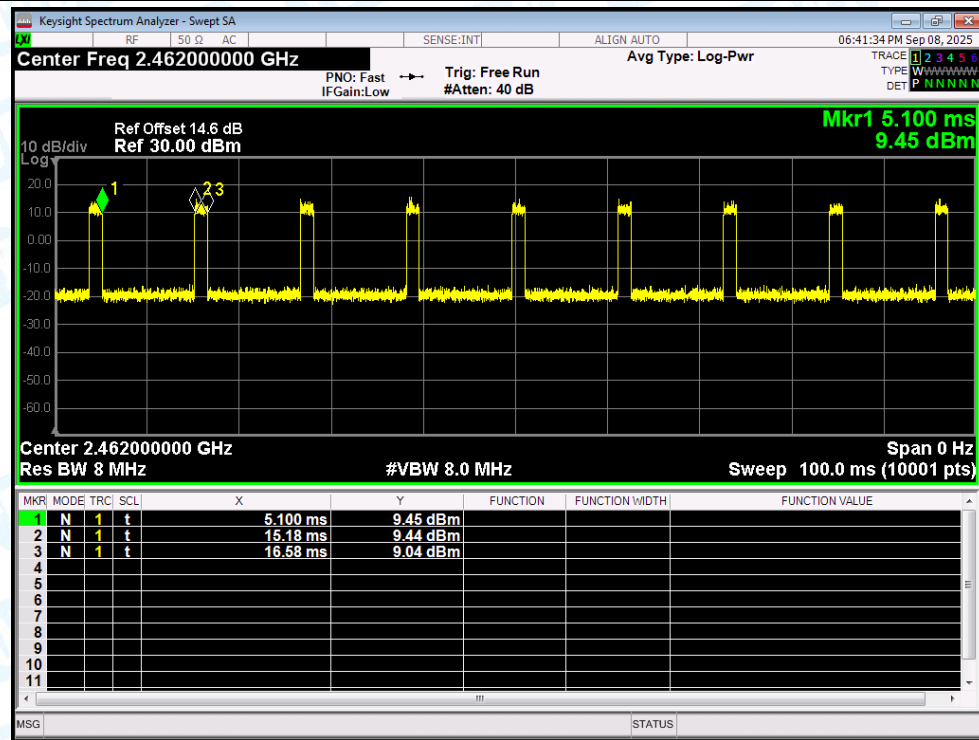


Duty Cycle NVNT n(HT20) 2412MHz Ant1

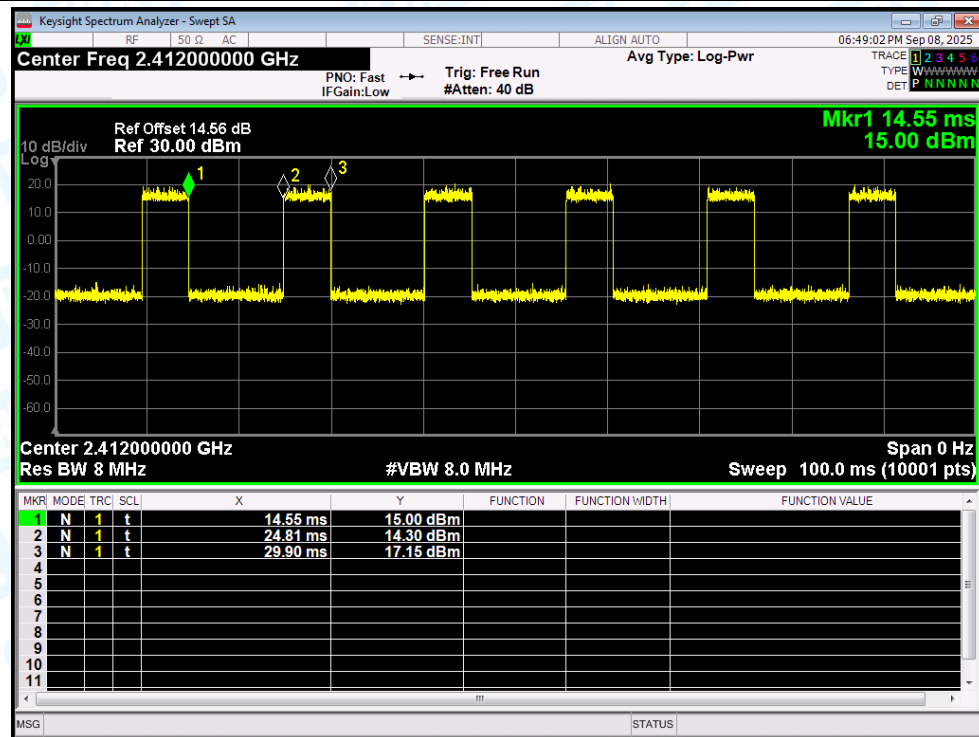


Duty Cycle NVNT n(HT20) 2437MHz Ant1

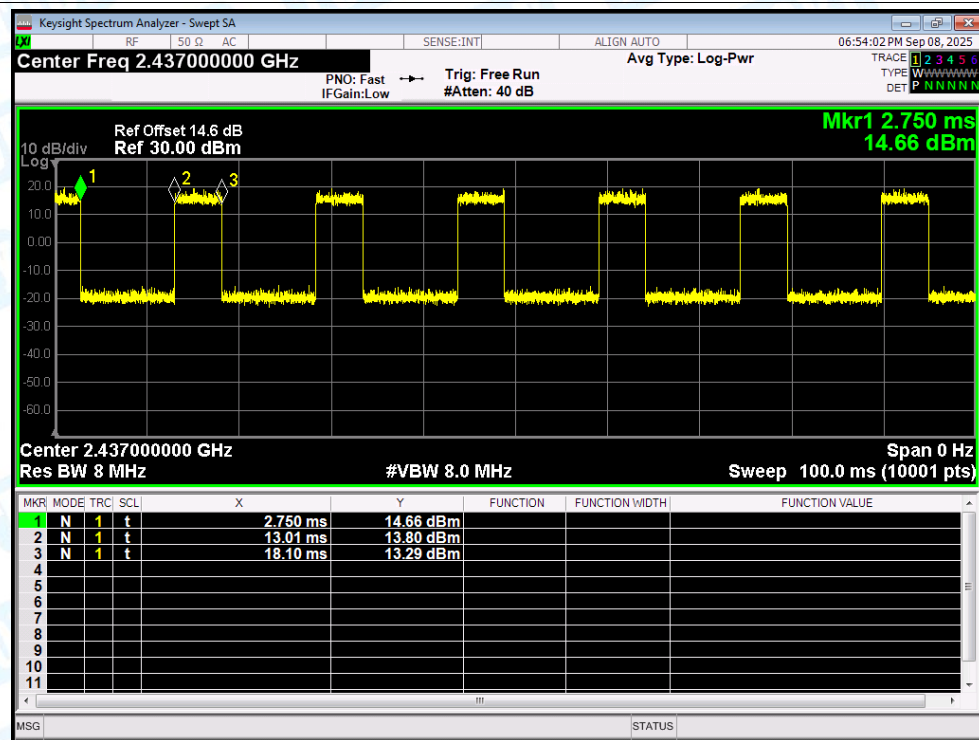


Duty Cycle NVNT n(HT20) 2462MHz Ant1

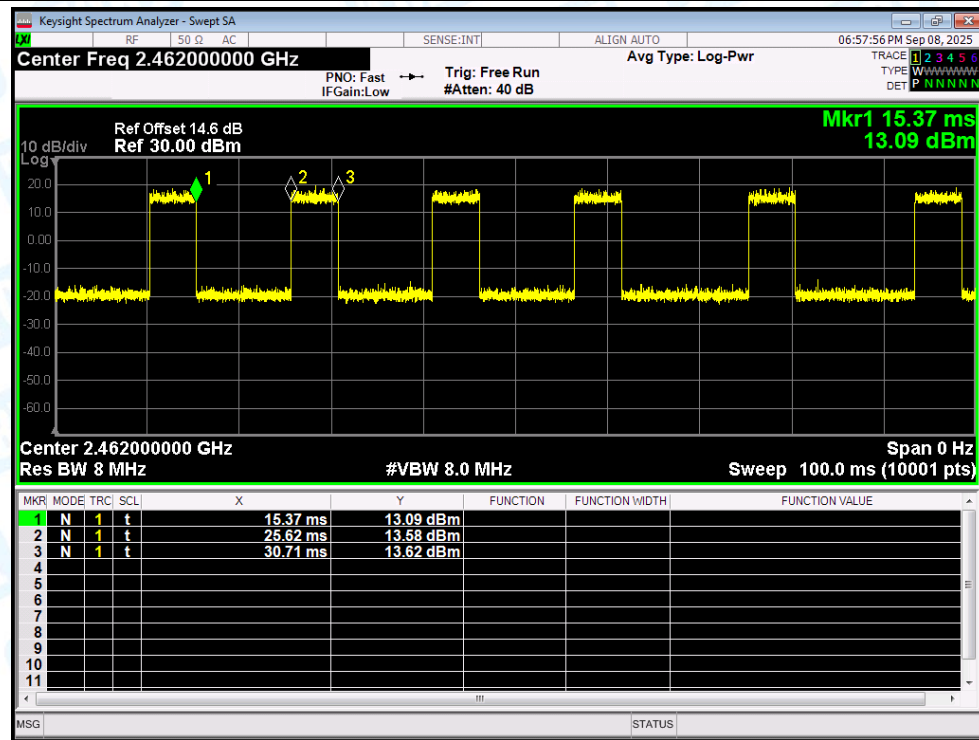


Duty Cycle NVNT n(HT40) 2422MHz Ant1

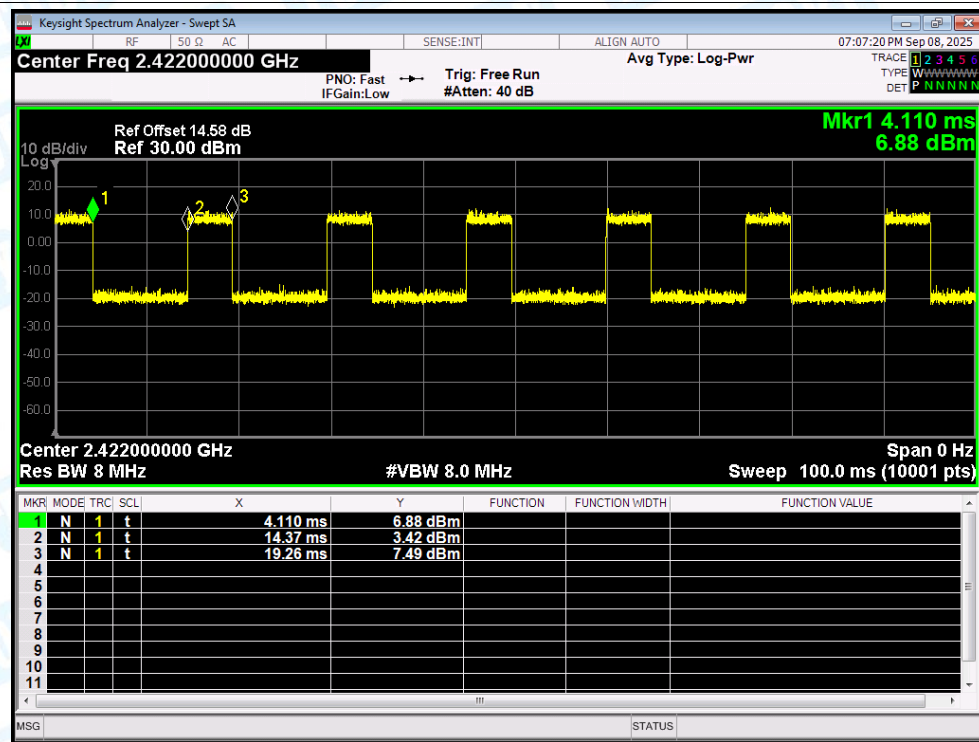

Duty Cycle NVNT n(HT40) 2437MHz Ant1

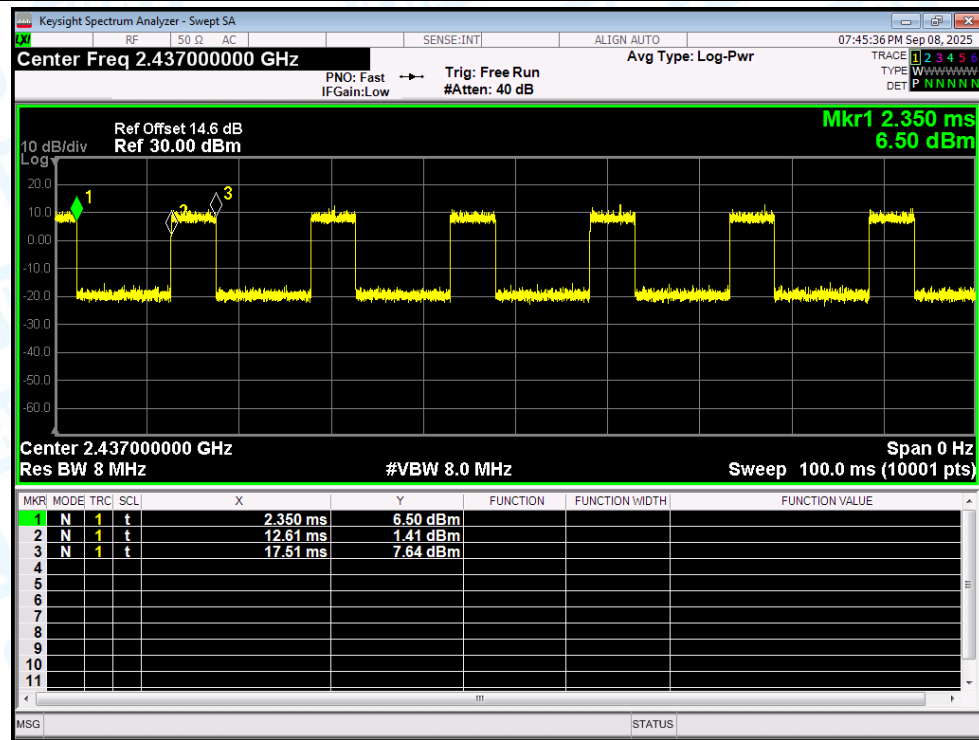

Duty Cycle NVNT n(HT40) 2452MHz Ant1

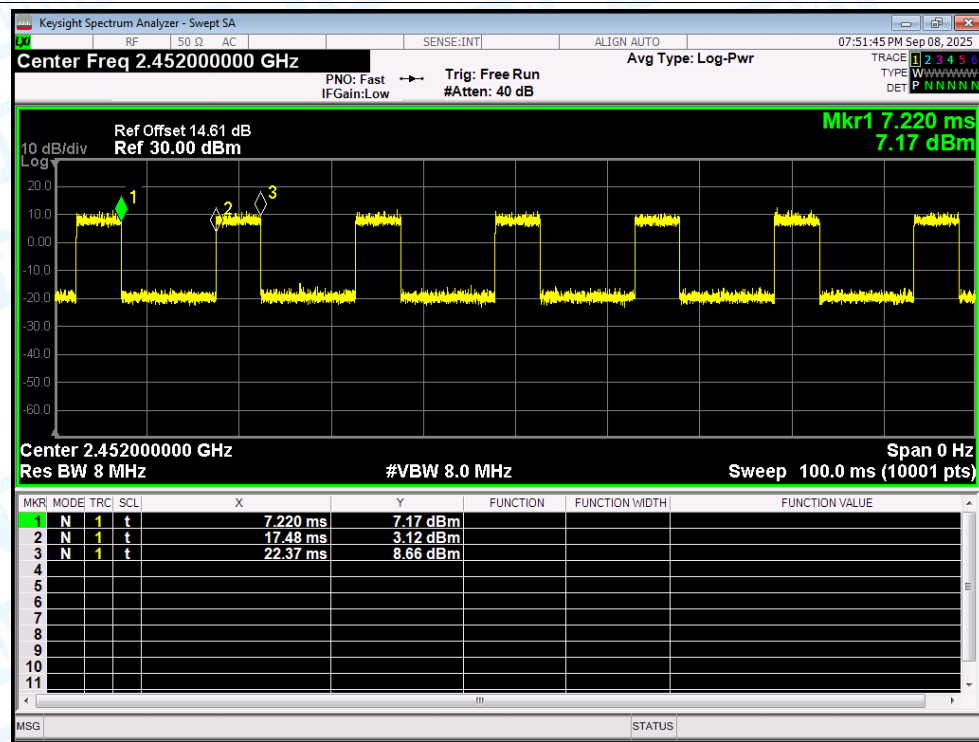

2.Maximum Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	ax(VHT20)	2412	Ant1	9.37	5.62	14.99	30	Pass
NVNT	ax(VHT20)	2437	Ant1	8.96	5.62	14.58	30	Pass
NVNT	ax(VHT20)	2462	Ant1	8.45	5.64	14.09	30	Pass
NVNT	ax(VHT40)	2422	Ant1	6.48	5.62	12.1	30	Pass
NVNT	ax(VHT40)	2437	Ant1	6.2	5.62	11.82	30	Pass
NVNT	ax(VHT40)	2452	Ant1	5.89	5.62	11.51	30	Pass
NVNT	b	2412	Ant1	12.94	3.45	16.39	30	Pass
NVNT	b	2437	Ant1	13.11	3.42	16.53	30	Pass
NVNT	b	2462	Ant1	13.14	3.42	16.56	30	Pass
NVNT	g	2412	Ant1	6.99	9.17	16.16	30	Pass
NVNT	g	2437	Ant1	6.58	9.14	15.72	30	Pass
NVNT	g	2462	Ant1	6.05	9.14	15.19	30	Pass
NVNT	n(HT20)	2412	Ant1	11.22	4.79	16.01	30	Pass
NVNT	n(HT20)	2437	Ant1	10.8	4.79	15.59	30	Pass
NVNT	n(HT20)	2462	Ant1	10.28	4.79	15.07	30	Pass
NVNT	n(HT40)	2422	Ant1	6.5	4.91	11.41	30	Pass
NVNT	n(HT40)	2437	Ant1	6.19	4.91	11.1	30	Pass
NVNT	n(HT40)	2452	Ant1	5.9	4.91	10.81	30	Pass

3.-6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	ax(VHT20)	2412	Ant1	18.69	0.5	Pass
NVNT	ax(VHT20)	2437	Ant1	18.81	0.5	Pass
NVNT	ax(VHT20)	2462	Ant1	18.74	0.5	Pass
NVNT	ax(VHT40)	2422	Ant1	37.36	0.5	Pass
NVNT	ax(VHT40)	2437	Ant1	37.82	0.5	Pass
NVNT	ax(VHT40)	2452	Ant1	37.39	0.5	Pass
NVNT	b	2412	Ant1	9.99	0.5	Pass
NVNT	b	2437	Ant1	10.1	0.5	Pass
NVNT	b	2462	Ant1	10.08	0.5	Pass
NVNT	g	2412	Ant1	15.94	0.5	Pass
NVNT	g	2437	Ant1	16.04	0.5	Pass
NVNT	g	2462	Ant1	16.28	0.5	Pass
NVNT	n(HT20)	2412	Ant1	17.06	0.5	Pass
NVNT	n(HT20)	2437	Ant1	17.42	0.5	Pass
NVNT	n(HT20)	2462	Ant1	17.24	0.5	Pass
NVNT	n(HT40)	2422	Ant1	36.06	0.5	Pass
NVNT	n(HT40)	2437	Ant1	36.05	0.5	Pass
NVNT	n(HT40)	2452	Ant1	36.01	0.5	Pass

Test Graphs


-6dB Bandwidth NVNT ax(VHT20) 2412MHz Ant1

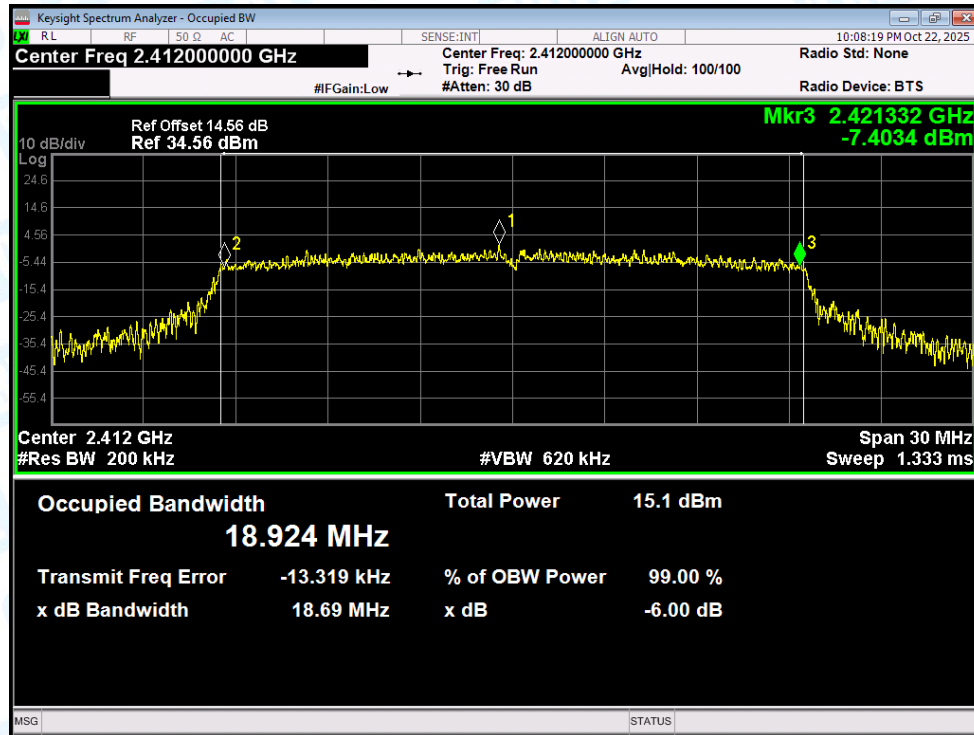


-6dB Bandwidth NVNT ax(VHT20) 2437MHz Ant1

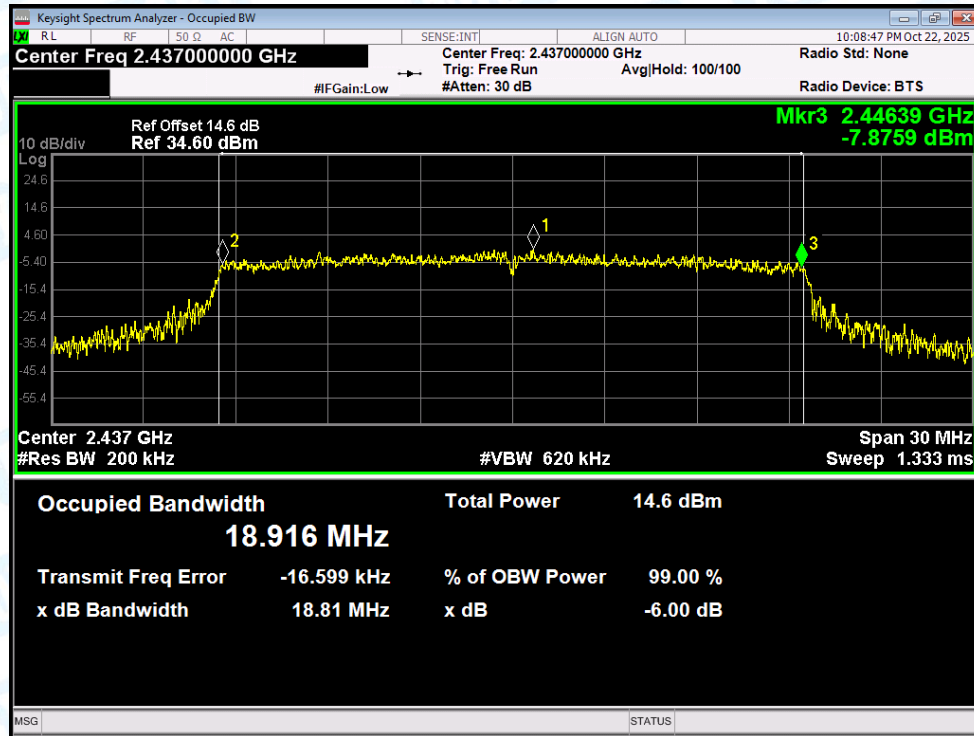


-6dB Bandwidth NVNT ax(VHT20) 2462MHz Ant1

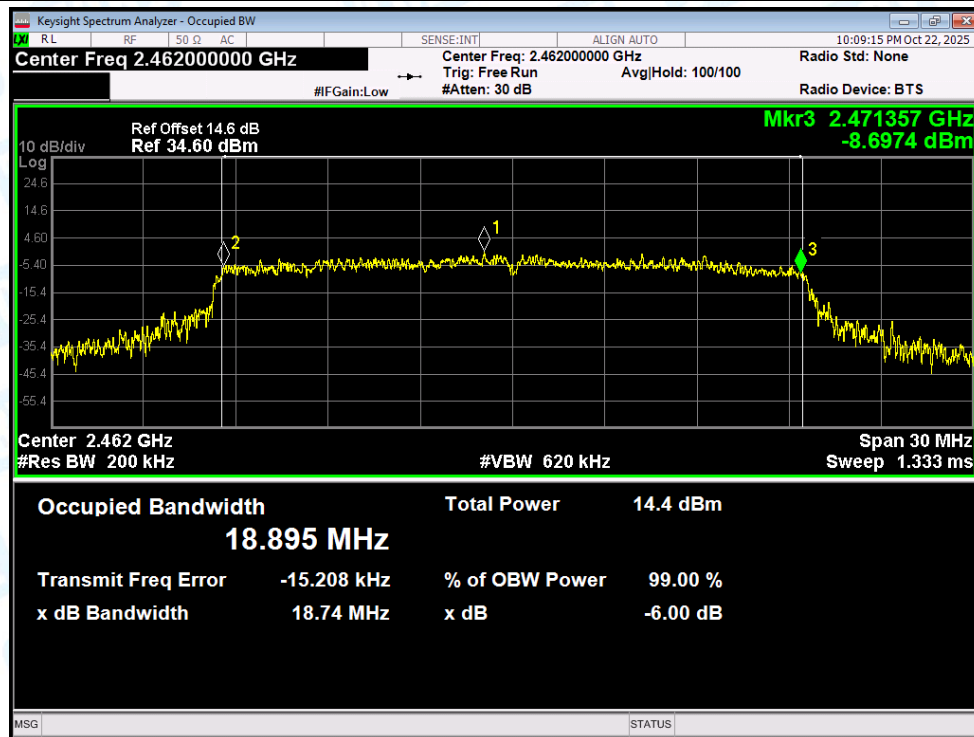


-6dB Bandwidth NVNT ax(VHT40) 2422MHz Ant1

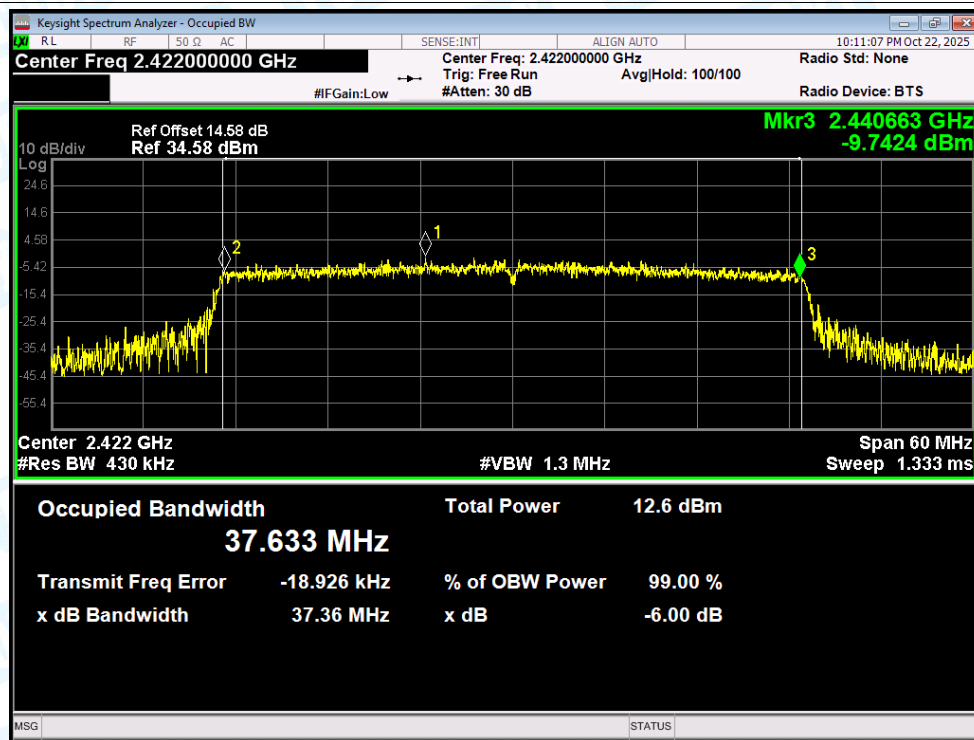


-6dB Bandwidth NVNT ax(VHT40) 2437MHz Ant1

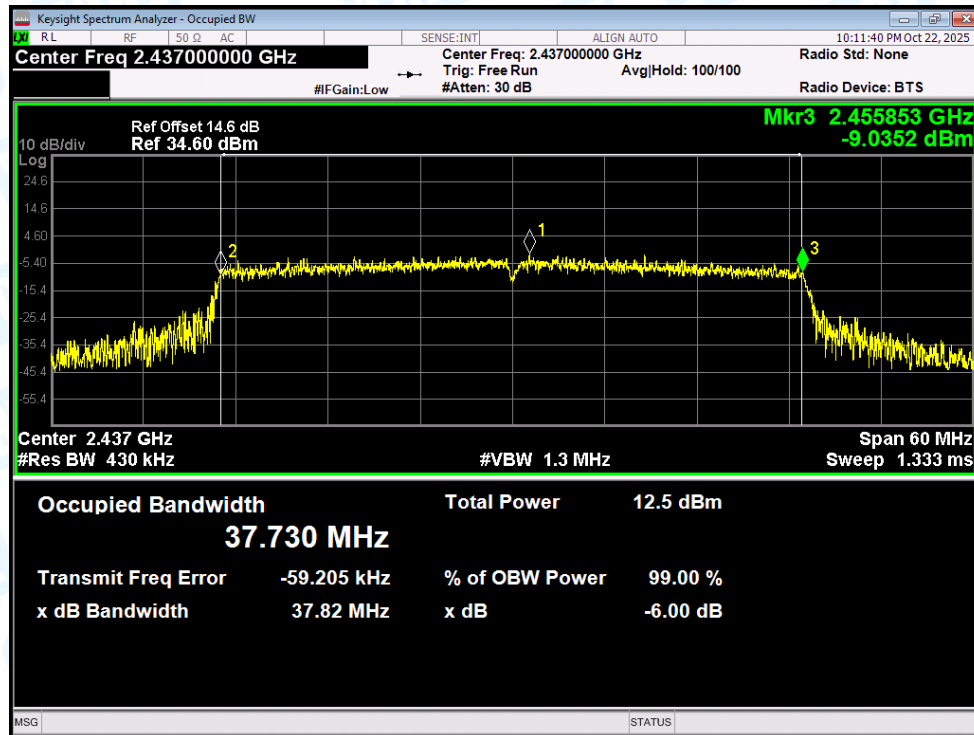


-6dB Bandwidth NVNT ax(VHT40) 2452MHz Ant1

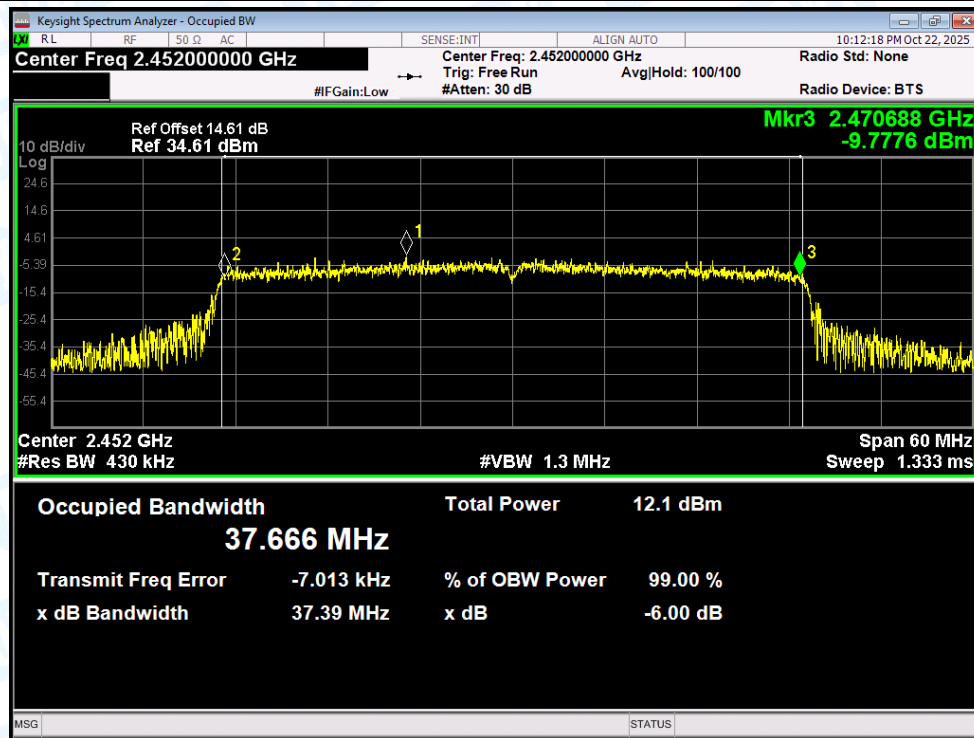


-6dB Bandwidth NVNT b 2412MHz Ant1

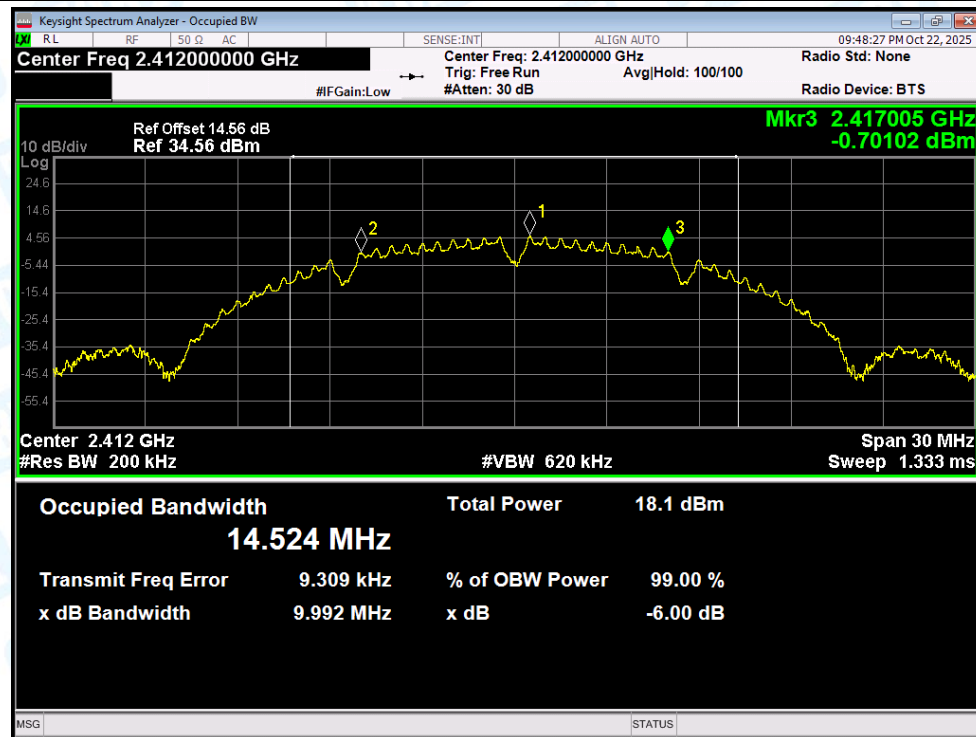


-6dB Bandwidth NVNT b 2437MHz Ant1

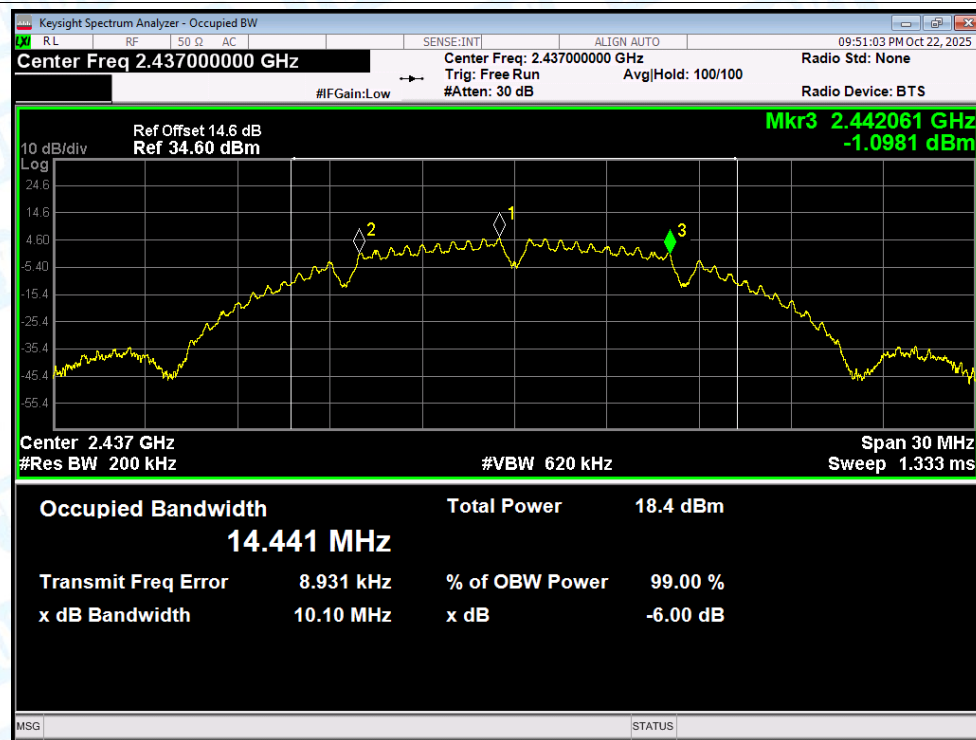


-6dB Bandwidth NVNT b 2462MHz Ant1

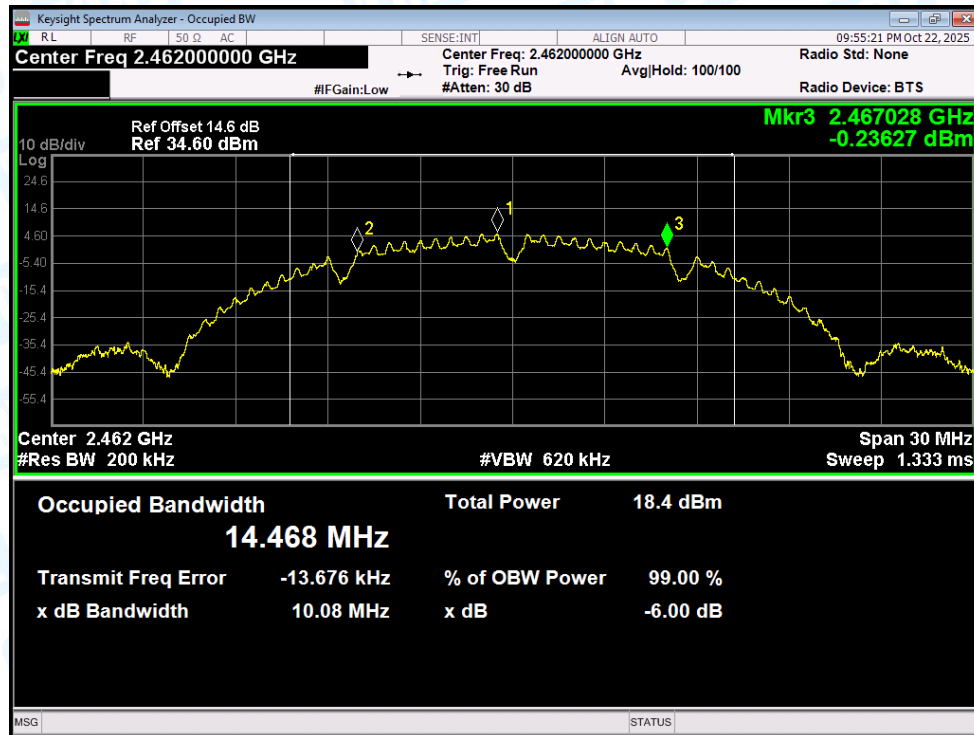


-6dB Bandwidth NVNT g 2412MHz Ant1

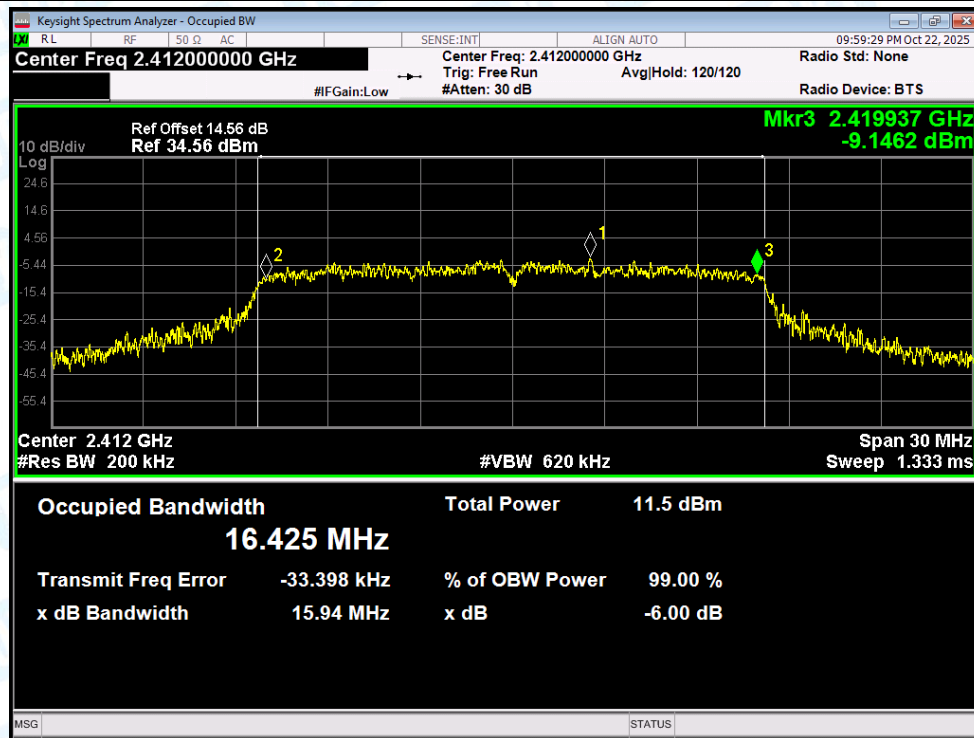


-6dB Bandwidth NVNT g 2437MHz Ant1

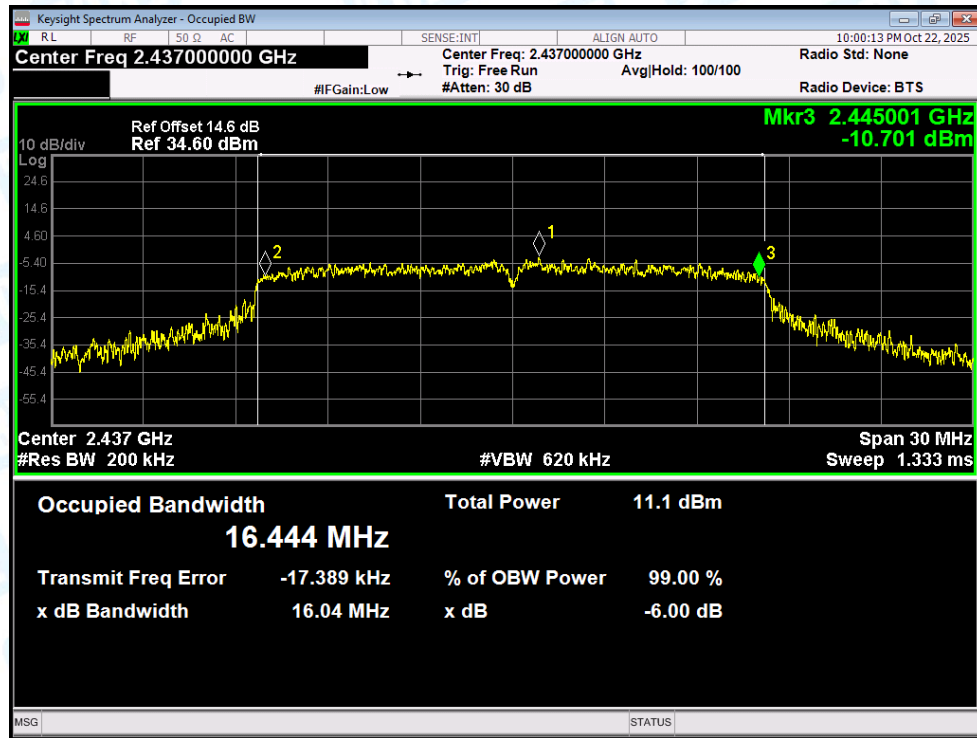


-6dB Bandwidth NVNT g 2462MHz Ant1

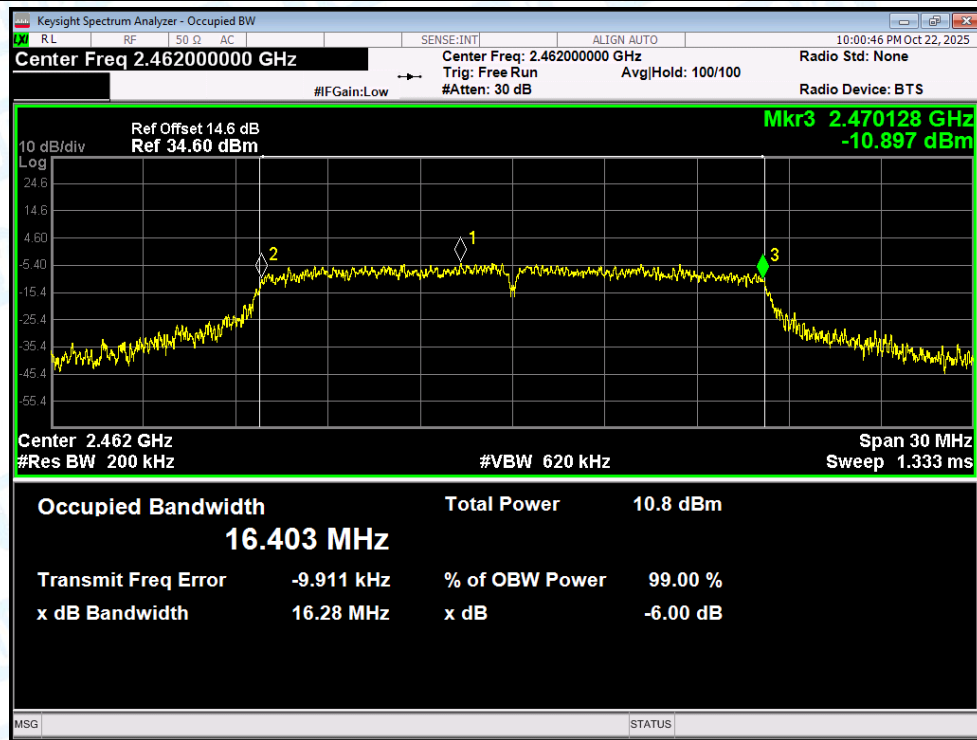


-6dB Bandwidth NVNT n(HT20) 2412MHz Ant1

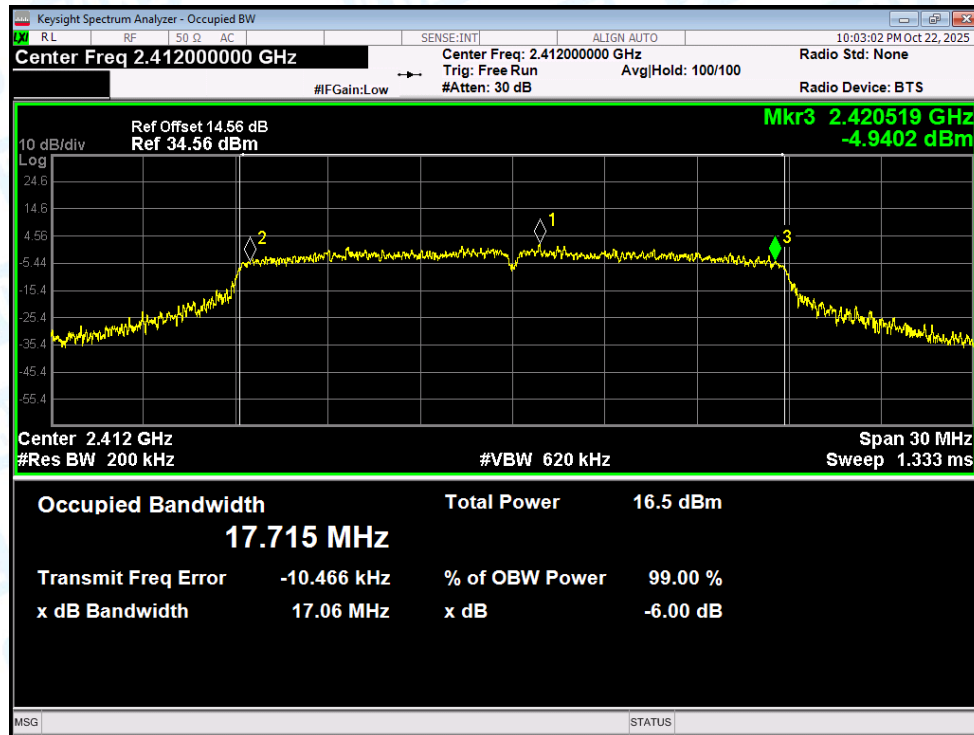


-6dB Bandwidth NVNT n(HT20) 2437MHz Ant1

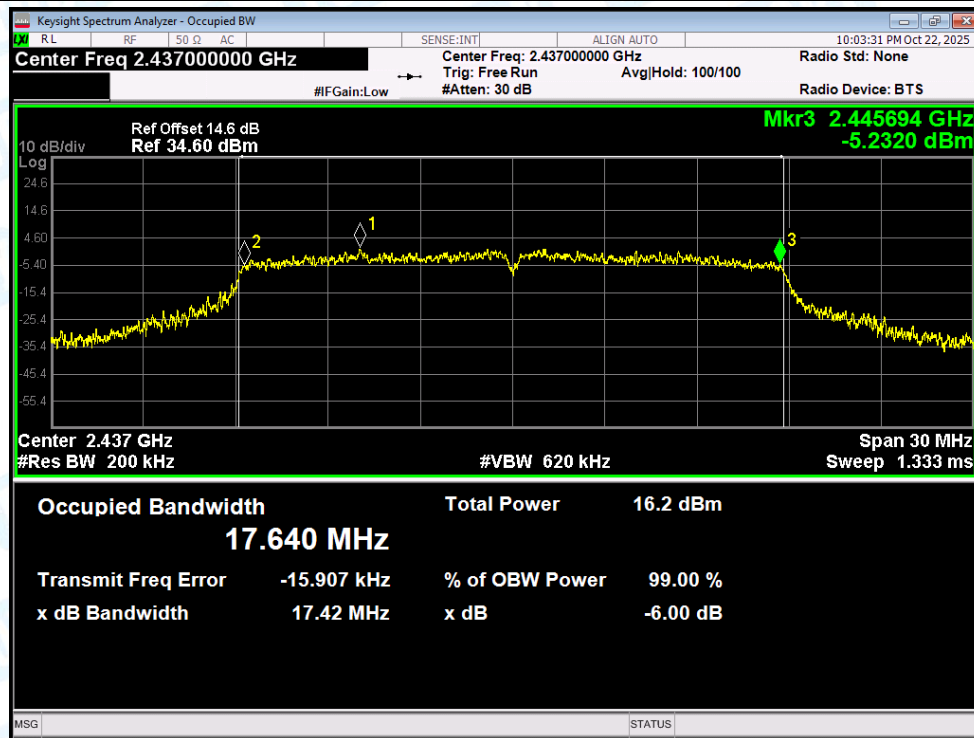


-6dB Bandwidth NVNT n(HT20) 2462MHz Ant1

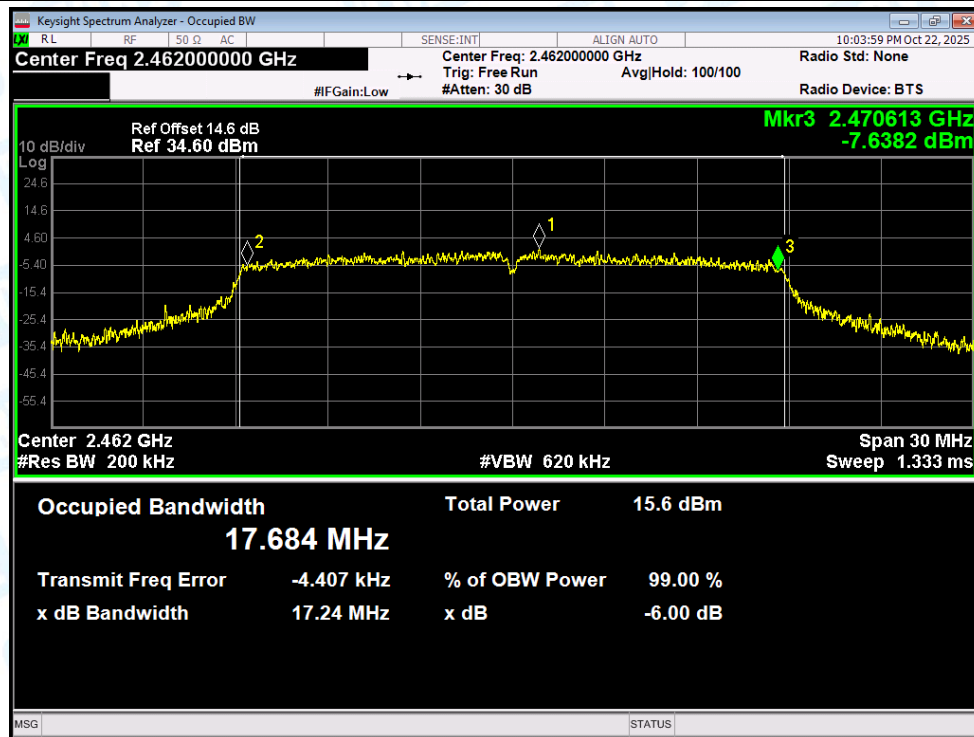


-6dB Bandwidth NVNT n(HT40) 2422MHz Ant1

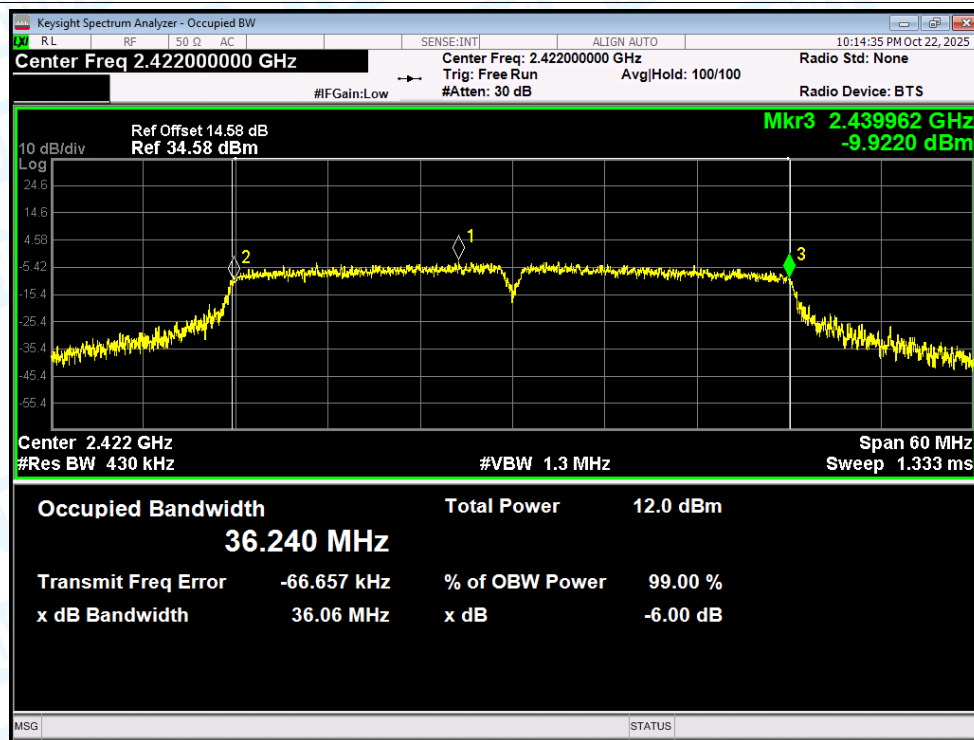

-6dB Bandwidth NVNT n(HT40) 2437MHz Ant1

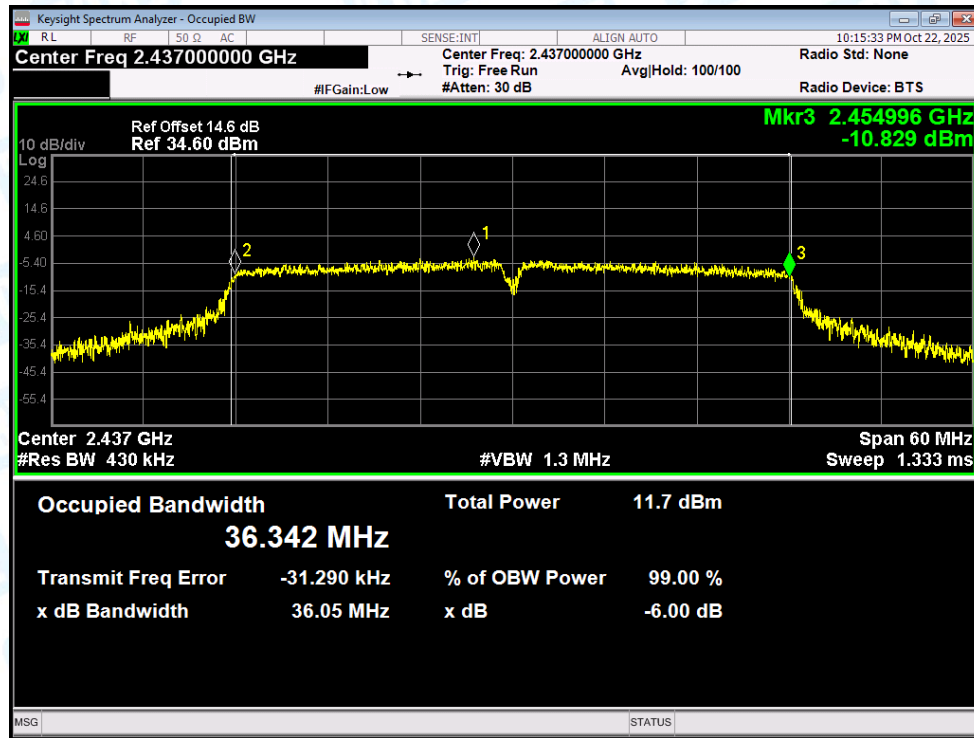

-6dB Bandwidth NVNT n(HT40) 2452MHz Ant1

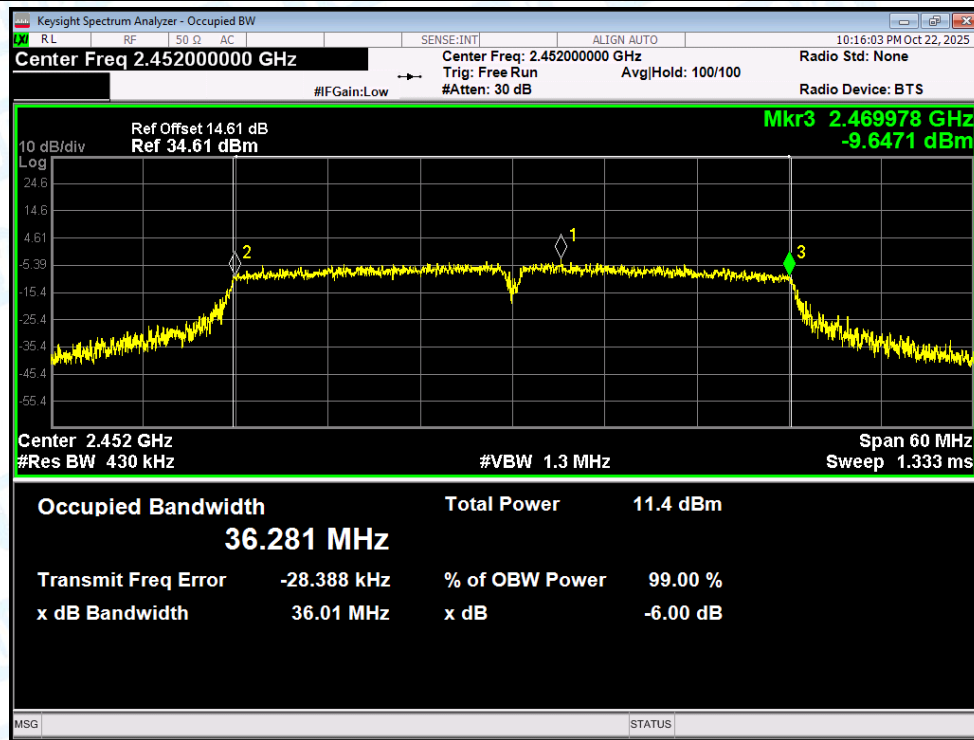


4.Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	ax(VHT20)	2412	Ant1	18.896
NVNT	ax(VHT20)	2437	Ant1	18.946
NVNT	ax(VHT20)	2462	Ant1	18.899
NVNT	ax(VHT40)	2422	Ant1	37.738
NVNT	ax(VHT40)	2437	Ant1	37.703
NVNT	ax(VHT40)	2452	Ant1	37.686
NVNT	b	2412	Ant1	14.491
NVNT	b	2437	Ant1	14.503
NVNT	b	2462	Ant1	14.468
NVNT	g	2412	Ant1	16.476
NVNT	g	2437	Ant1	16.509
NVNT	g	2462	Ant1	16.391
NVNT	n(HT20)	2412	Ant1	17.704
NVNT	n(HT20)	2437	Ant1	17.737
NVNT	n(HT20)	2462	Ant1	17.732
NVNT	n(HT40)	2422	Ant1	36.298
NVNT	n(HT40)	2437	Ant1	36.305
NVNT	n(HT40)	2452	Ant1	36.242

Test Graphs


OBW NVNT ax(VHT20) 2412MHz Ant1

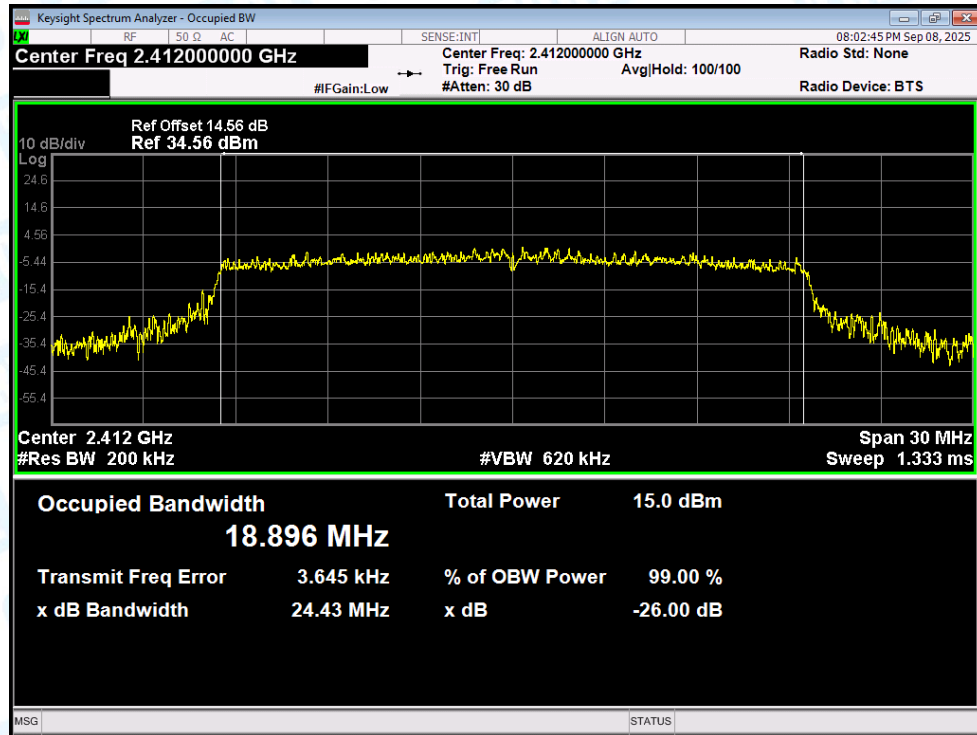


OBW NVNT ax(VHT20) 2437MHz Ant1

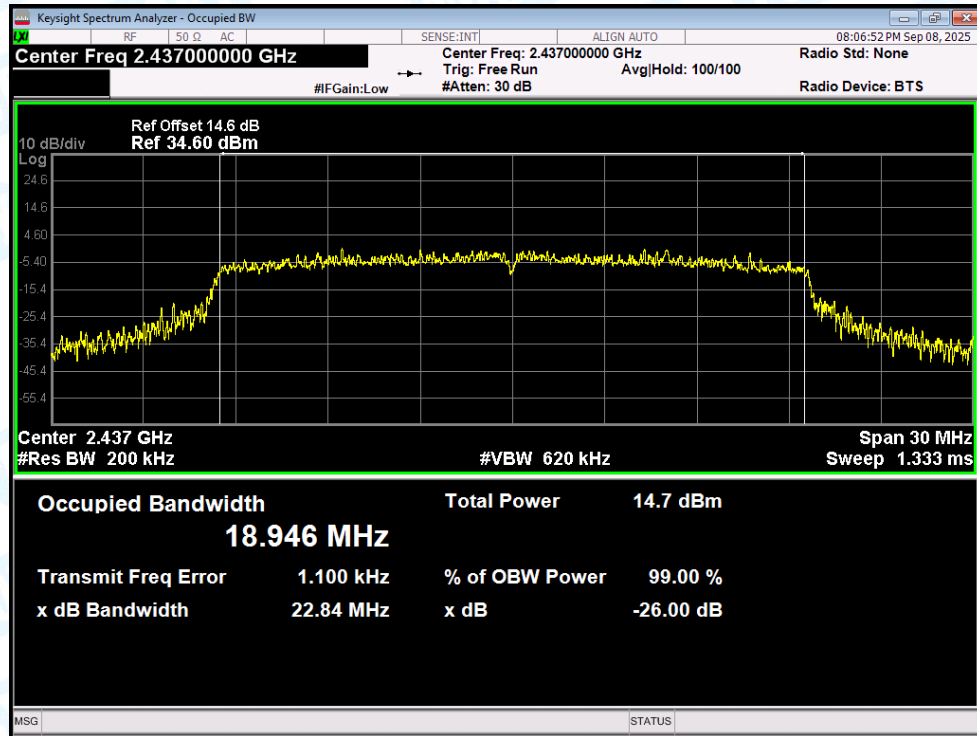


OBW NVNT ax(VHT20) 2462MHz Ant1

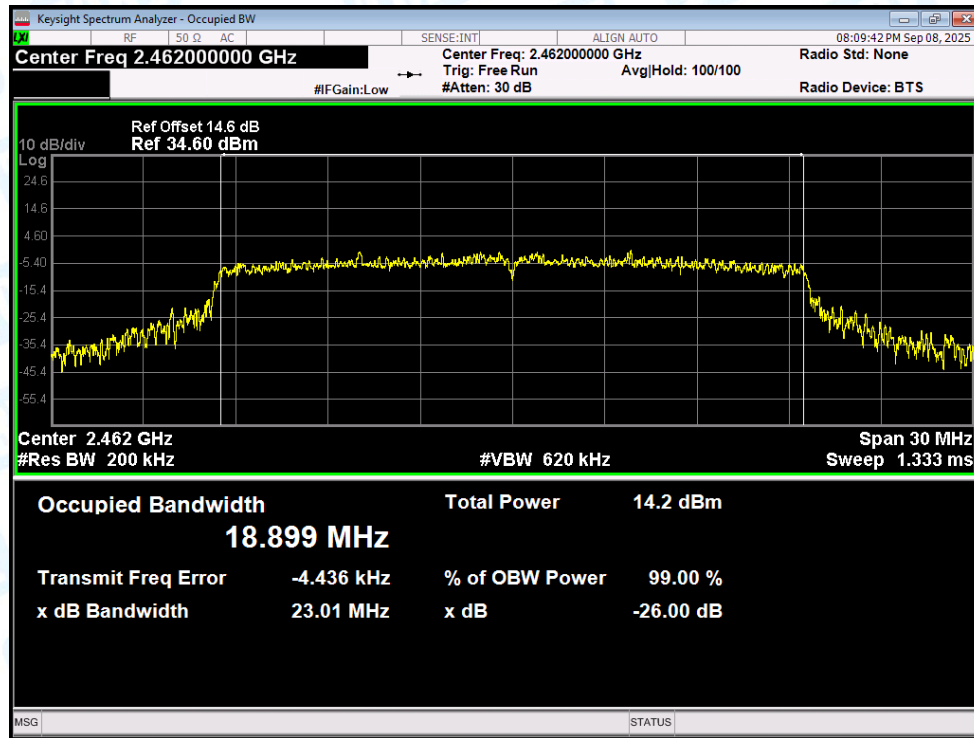


OBW NVNT ax(VHT40) 2422MHz Ant1


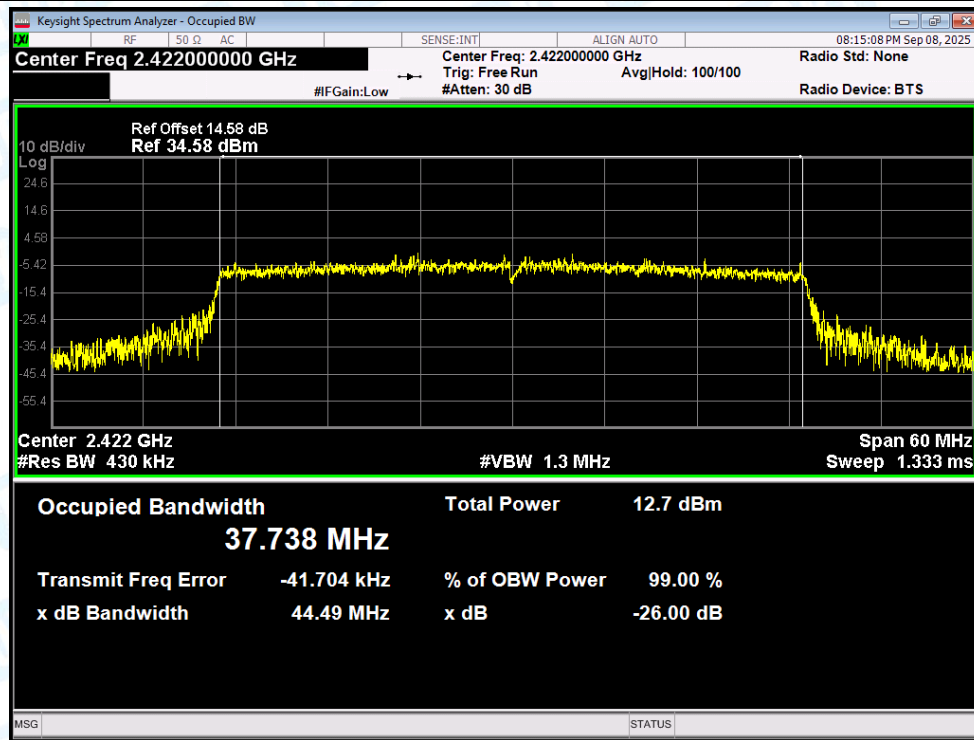


OBW NVNT ax(VHT40) 2437MHz Ant1

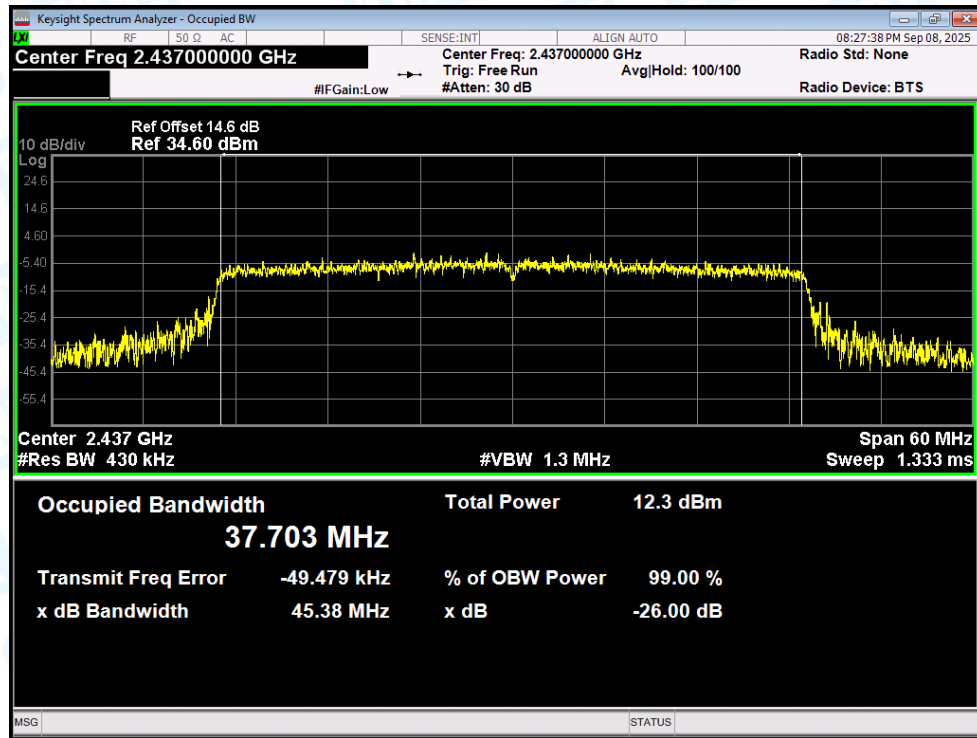


OBW NVNT ax(VHT40) 2452MHz Ant1

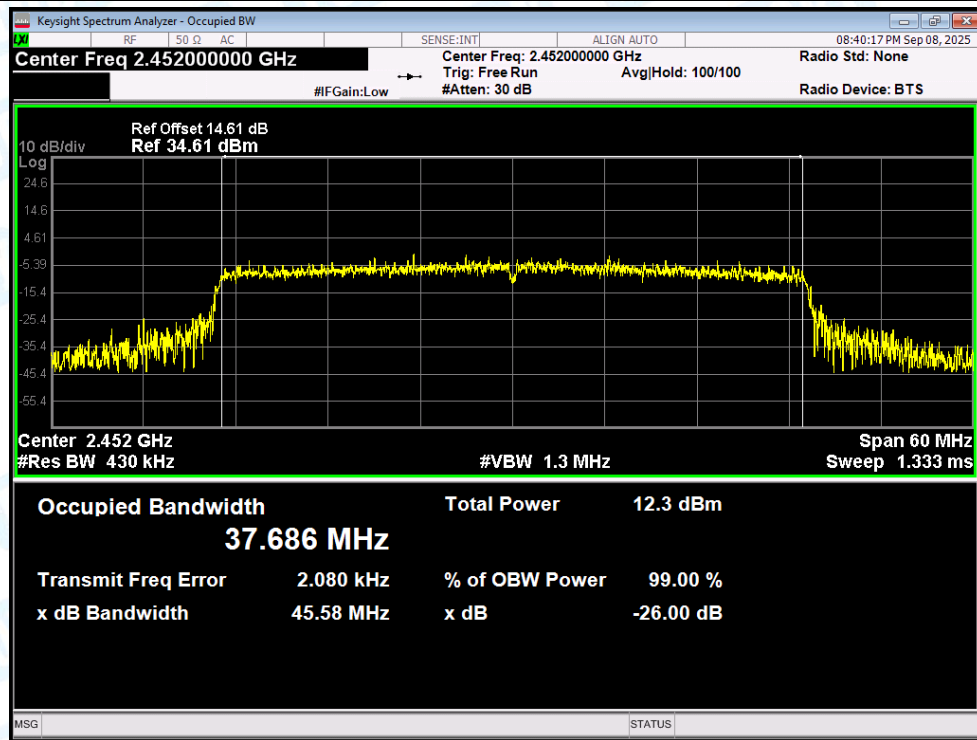


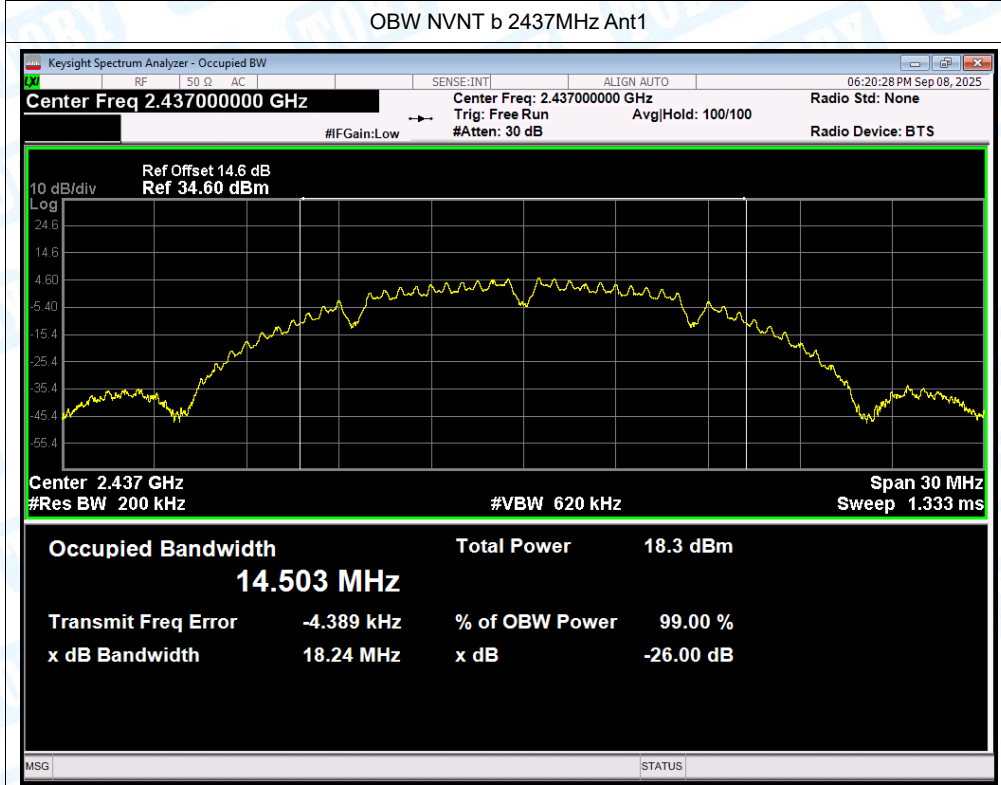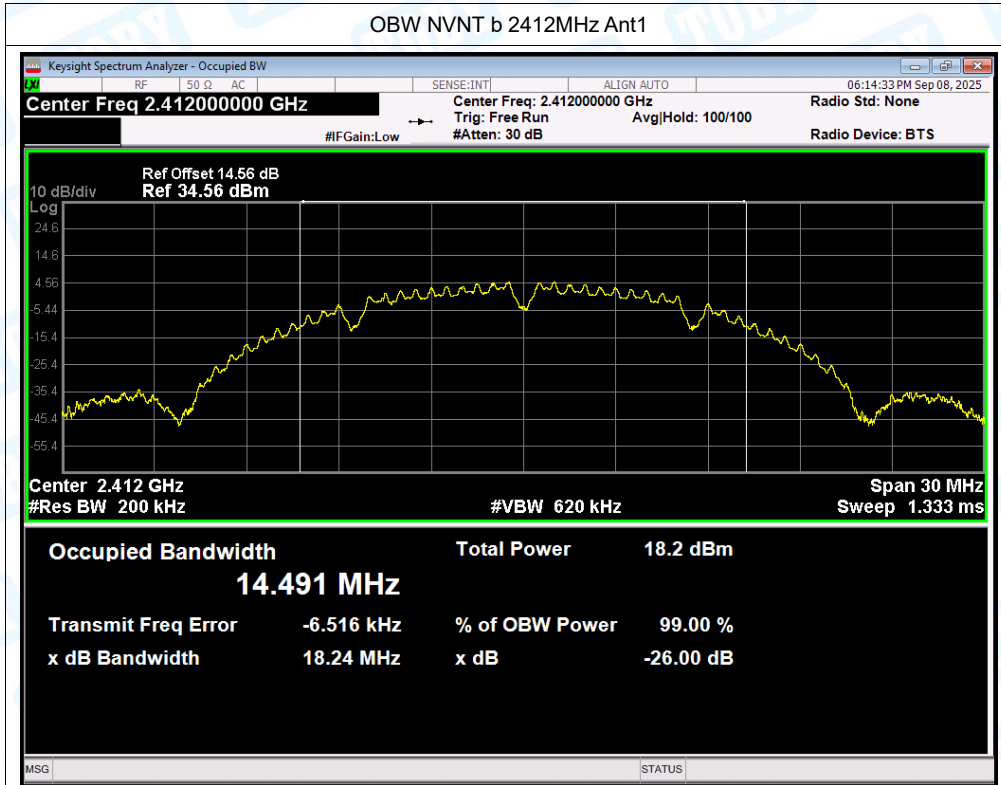


OBW NVNT b 2462MHz Ant1

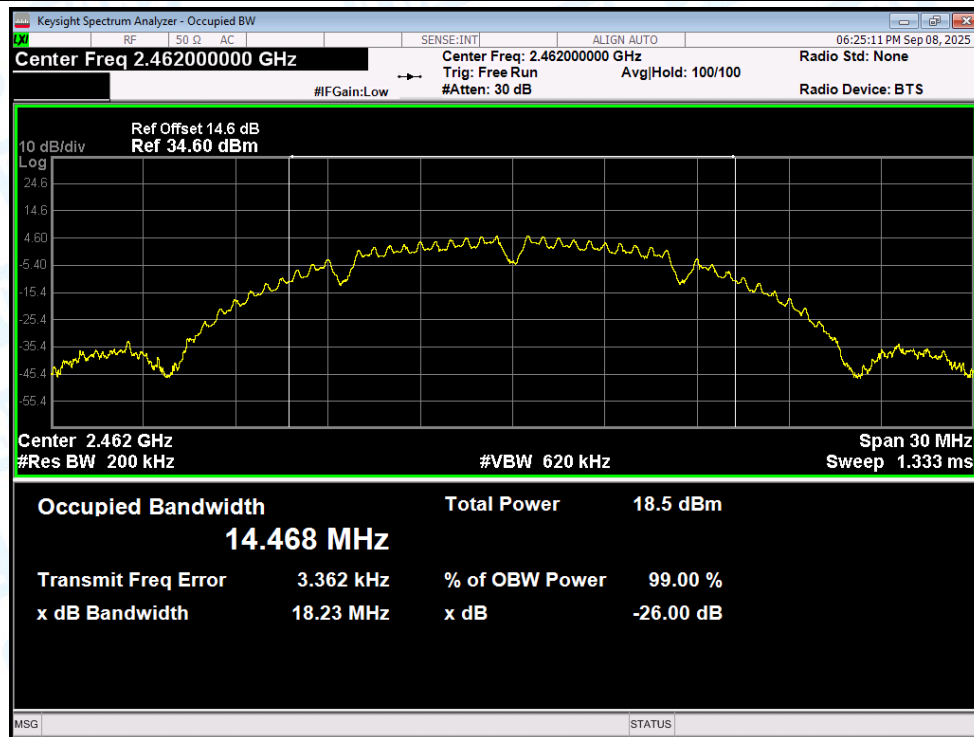


OBW NVNT g 2412MHz Ant1

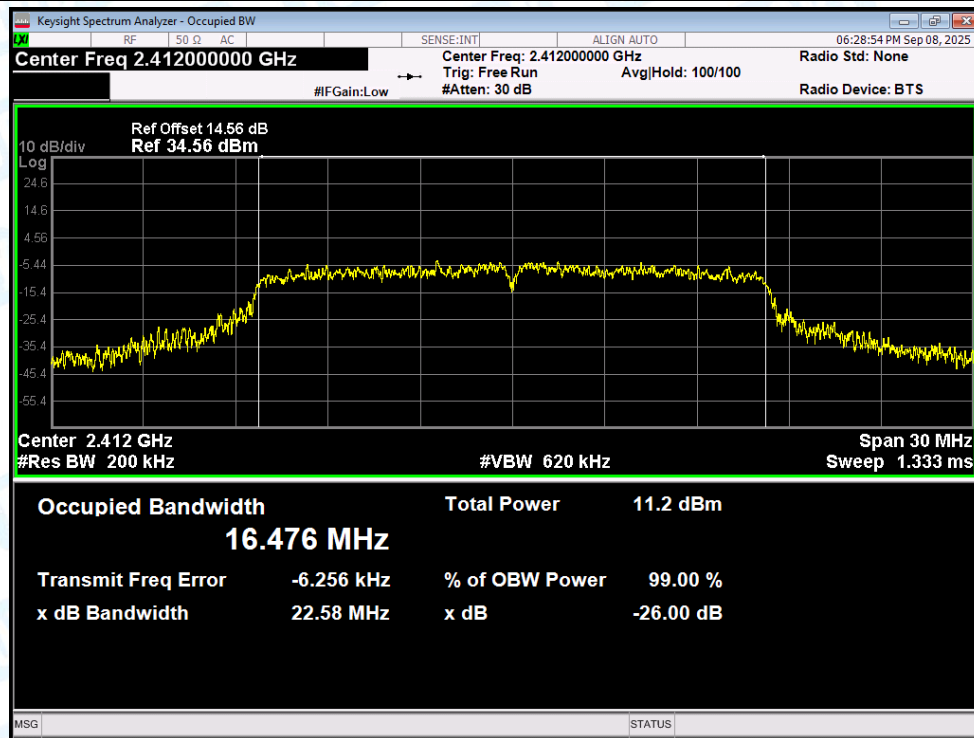


OBW NVNT g 2437MHz Ant1

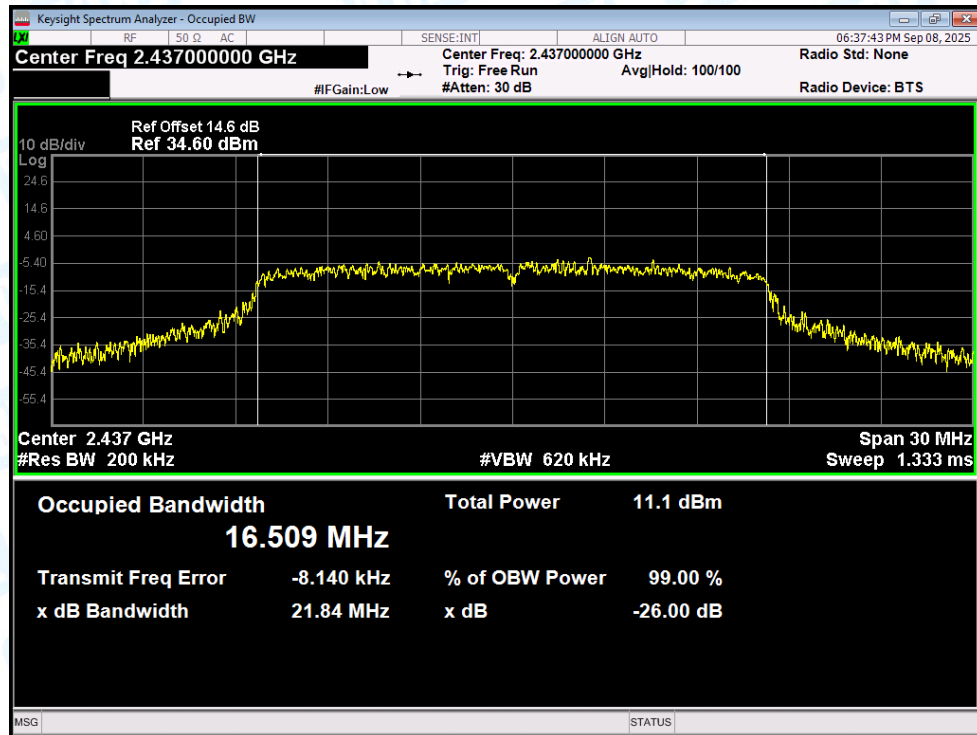


OBW NVNT g 2462MHz Ant1

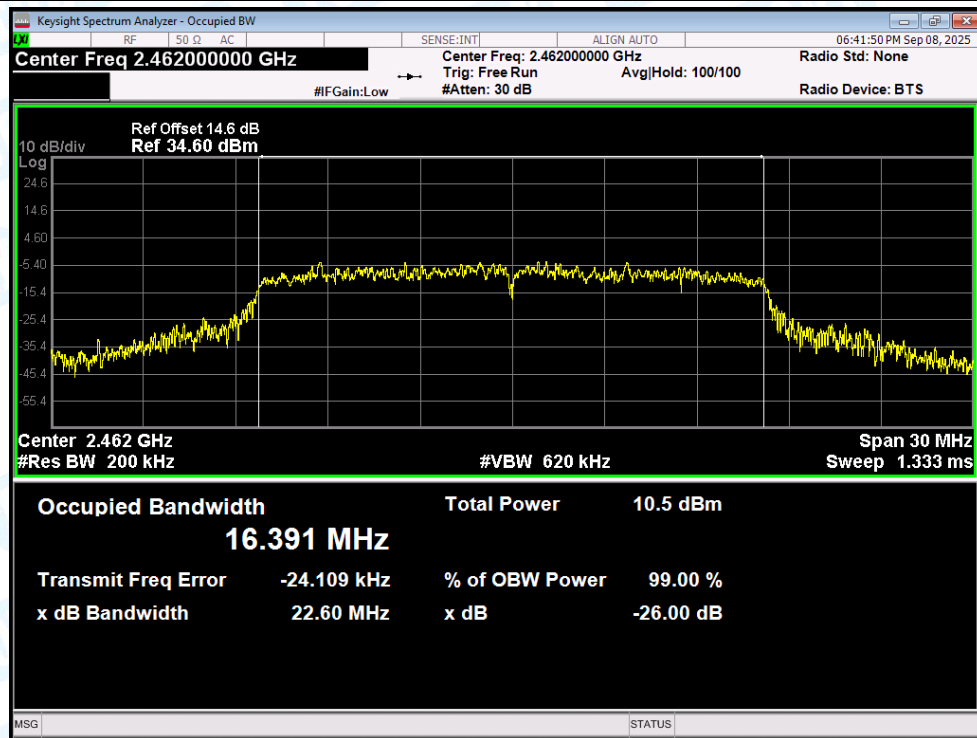


OBW NVNT n(HT20) 2412MHz Ant1

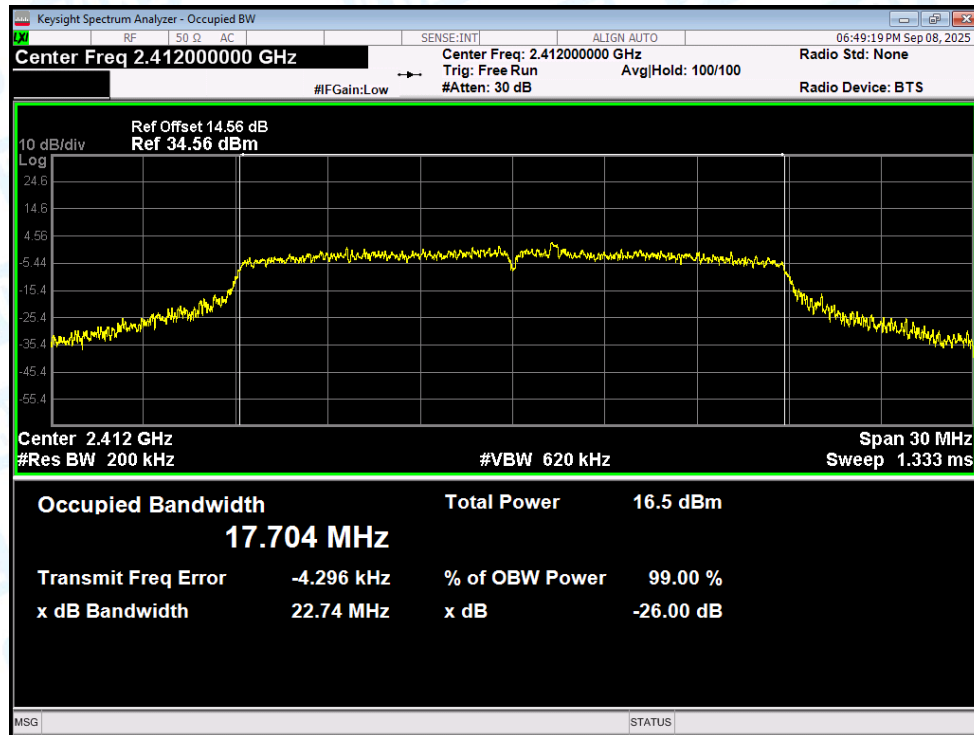


OBW NVNT n(HT20) 2437MHz Ant1

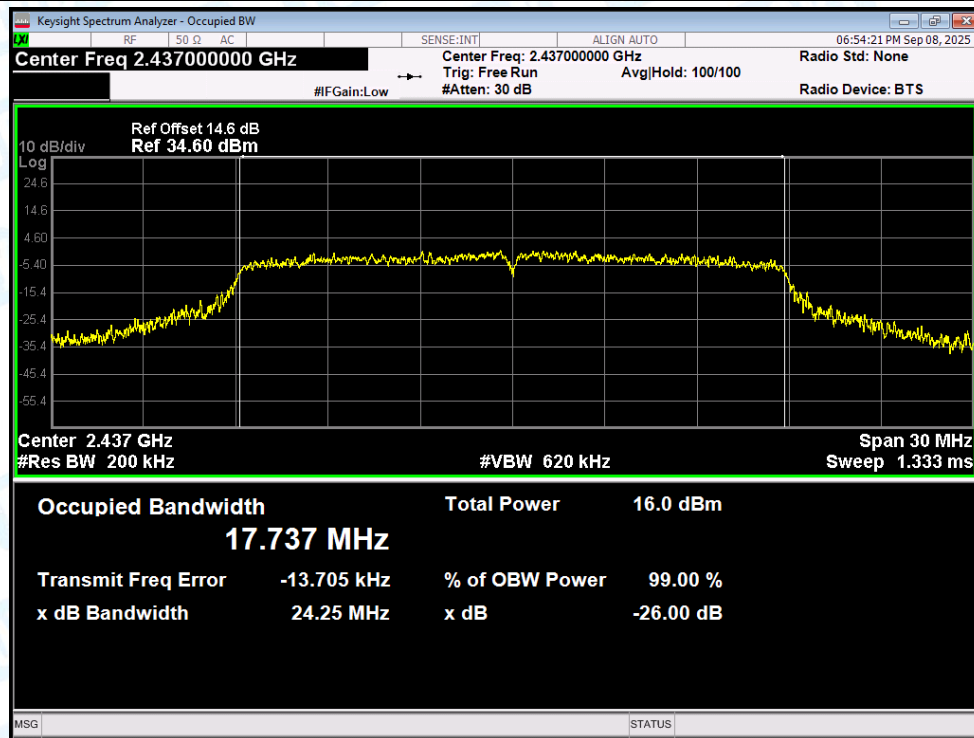


OBW NVNT n(HT20) 2462MHz Ant1

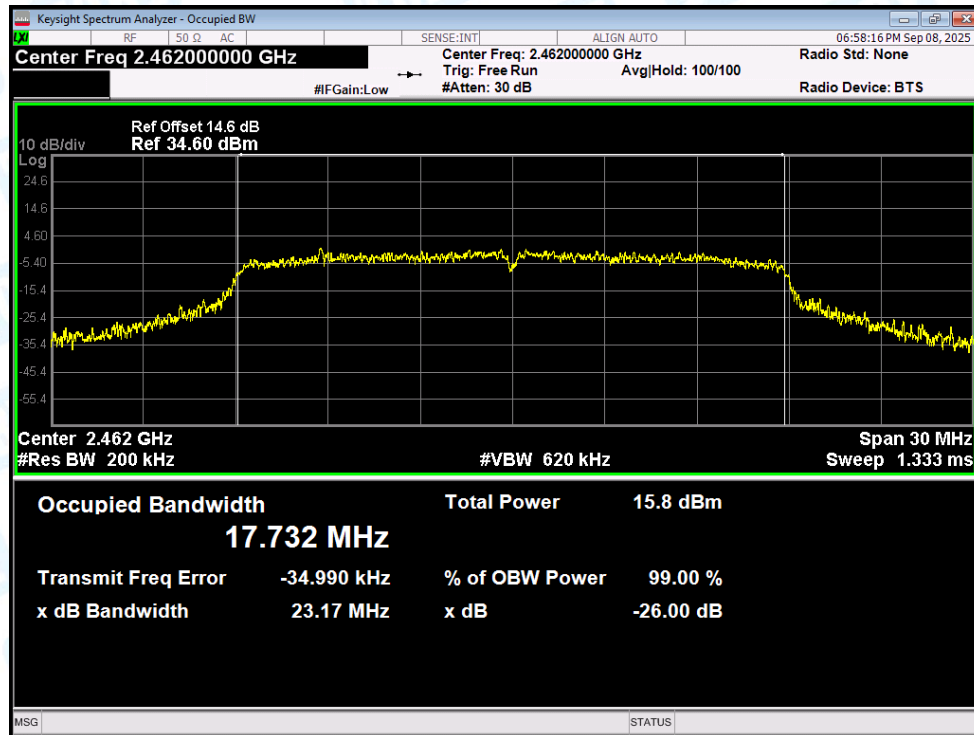


OBW NVNT n(HT40) 2422MHz Ant1

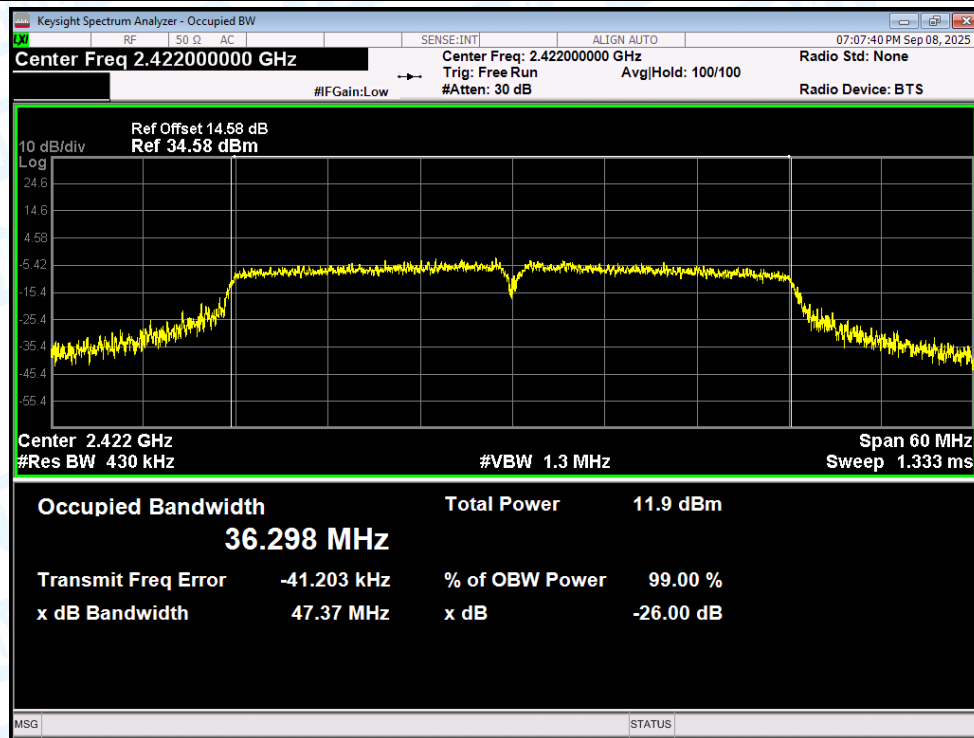

OBW NVNT n(HT40) 2437MHz Ant1

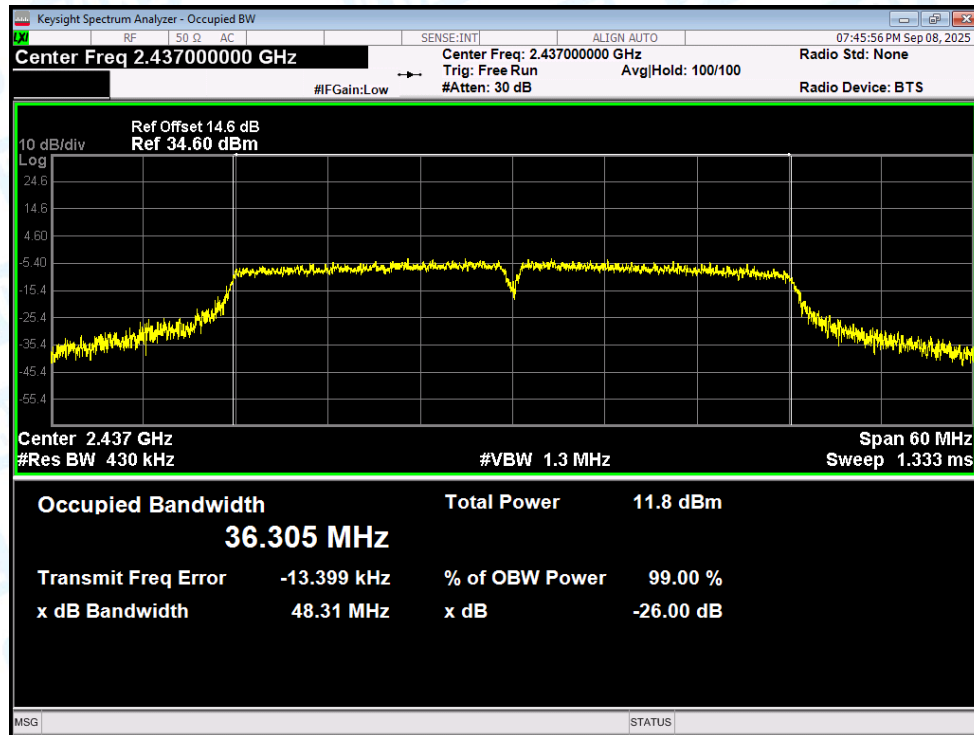

OBW NVNT n(HT40) 2452MHz Ant1

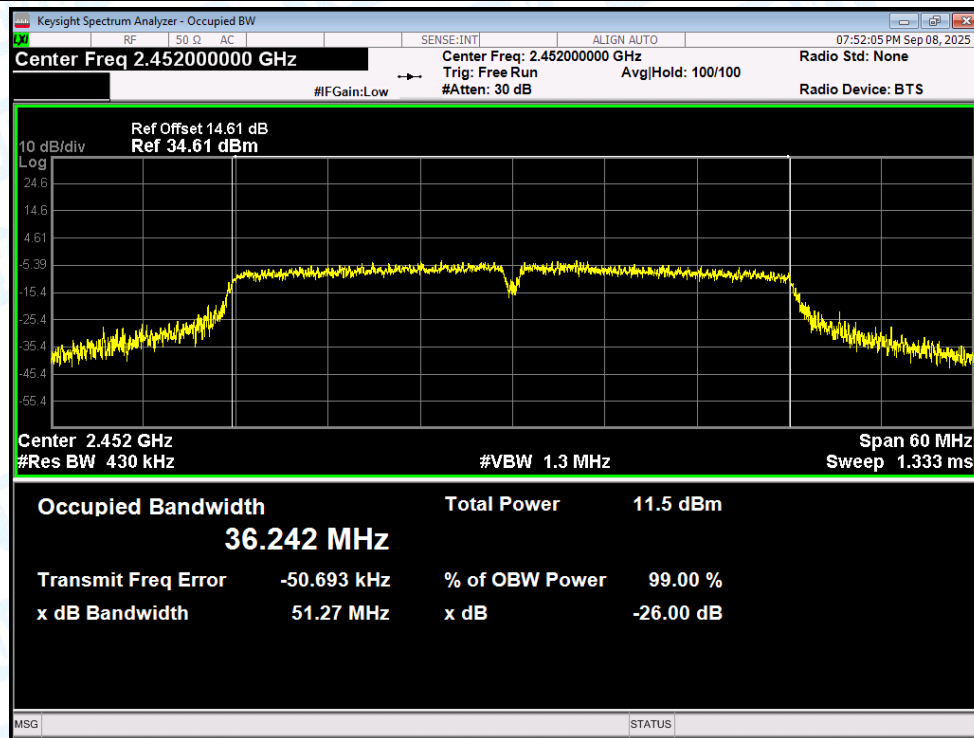


5.Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	ax(VHT20)	2412	Ant1	-28.794	8	Pass
NVNT	ax(VHT20)	2437	Ant1	-29.708	8	Pass
NVNT	ax(VHT20)	2462	Ant1	-29.792	8	Pass
NVNT	ax(VHT40)	2422	Ant1	-36.424	8	Pass
NVNT	ax(VHT40)	2437	Ant1	-37.29	8	Pass
NVNT	ax(VHT40)	2452	Ant1	-37.601	8	Pass
NVNT	b	2412	Ant1	-20	8	Pass
NVNT	b	2437	Ant1	-19.603	8	Pass
NVNT	b	2462	Ant1	-20.192	8	Pass
NVNT	g	2412	Ant1	-33.465	8	Pass
NVNT	g	2437	Ant1	-34.485	8	Pass
NVNT	g	2462	Ant1	-34.705	8	Pass
NVNT	n(HT20)	2412	Ant1	-26.257	8	Pass
NVNT	n(HT20)	2437	Ant1	-26.187	8	Pass
NVNT	n(HT20)	2462	Ant1	-26.994	8	Pass
NVNT	n(HT40)	2422	Ant1	-34.075	8	Pass
NVNT	n(HT40)	2437	Ant1	-35.096	8	Pass
NVNT	n(HT40)	2452	Ant1	-35.673	8	Pass


Note: The duty factor has been compensated into the result.



Test Graphs



PSD NVNT ax(VHT20) 2412MHz Ant1


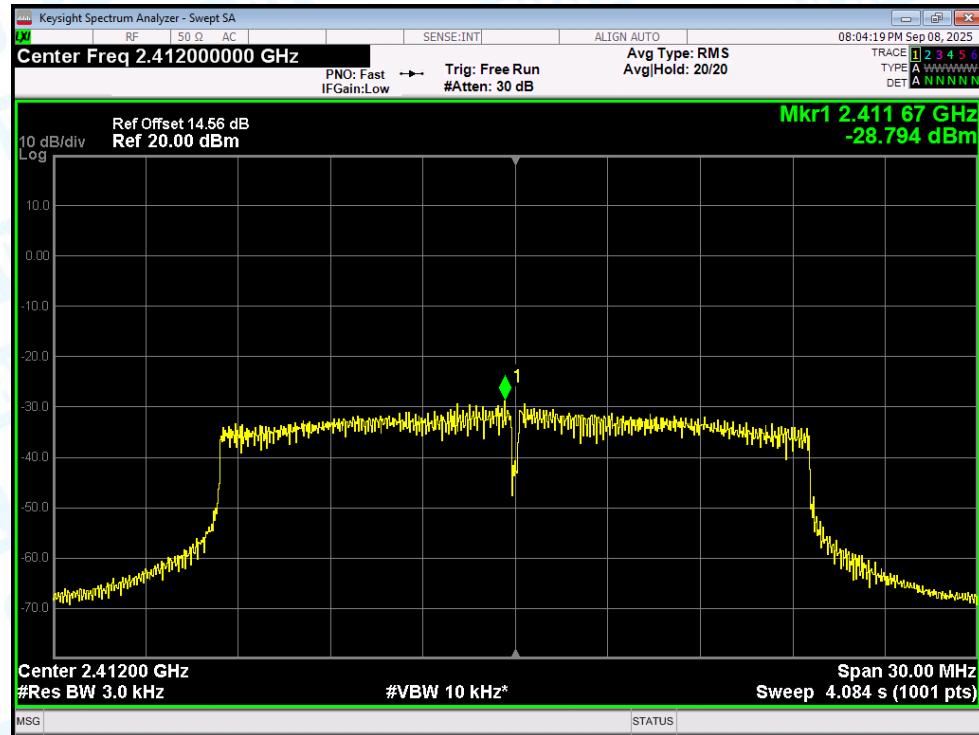




PSD NVNT ax(VHT20) 2437MHz Ant1

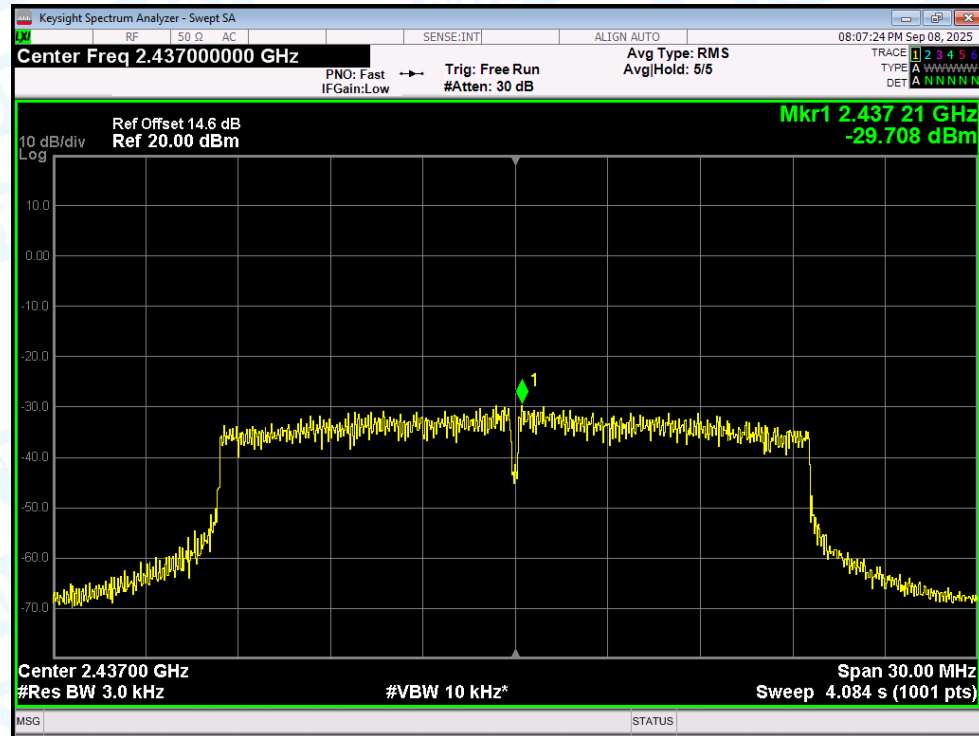

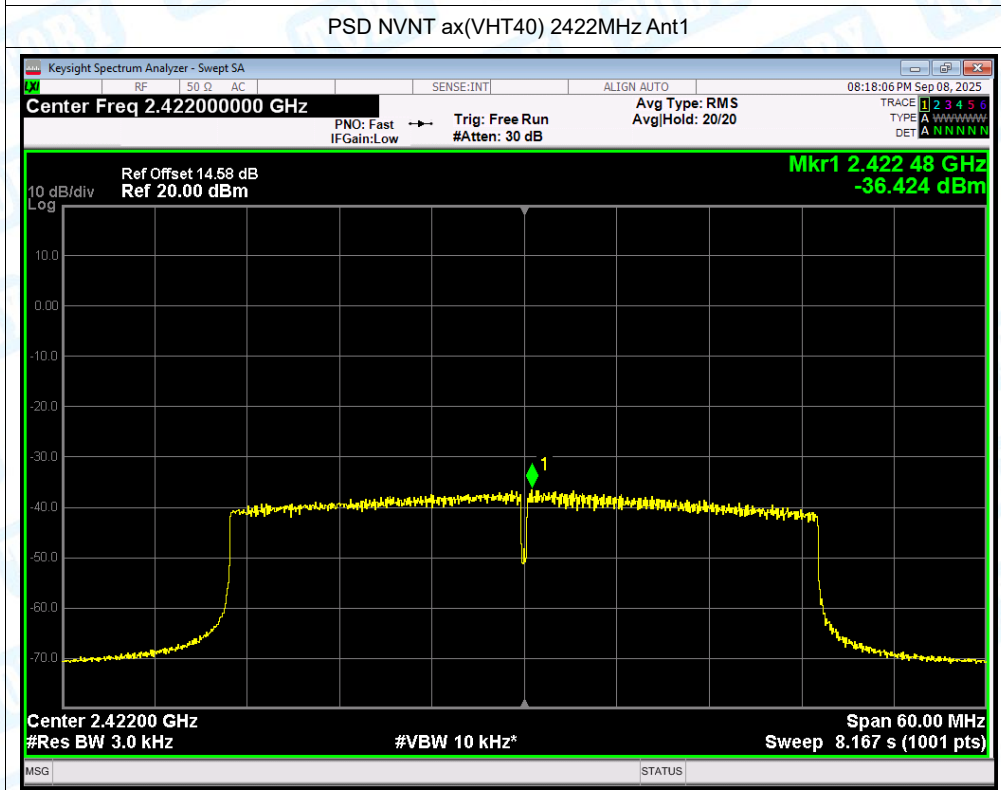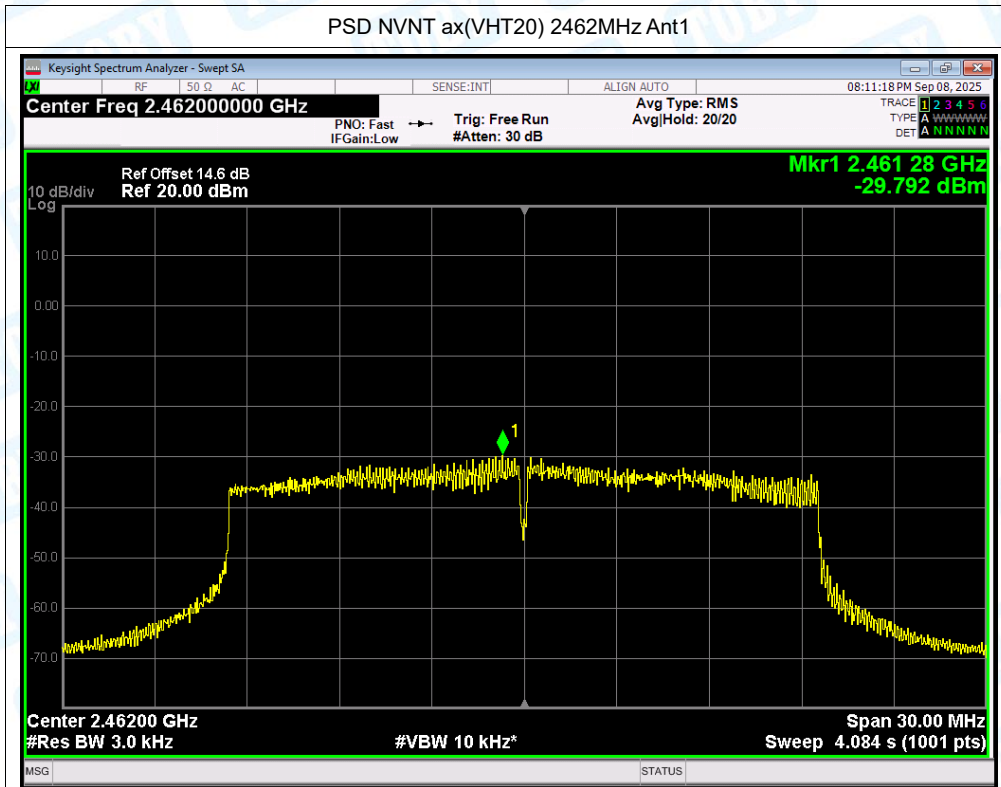


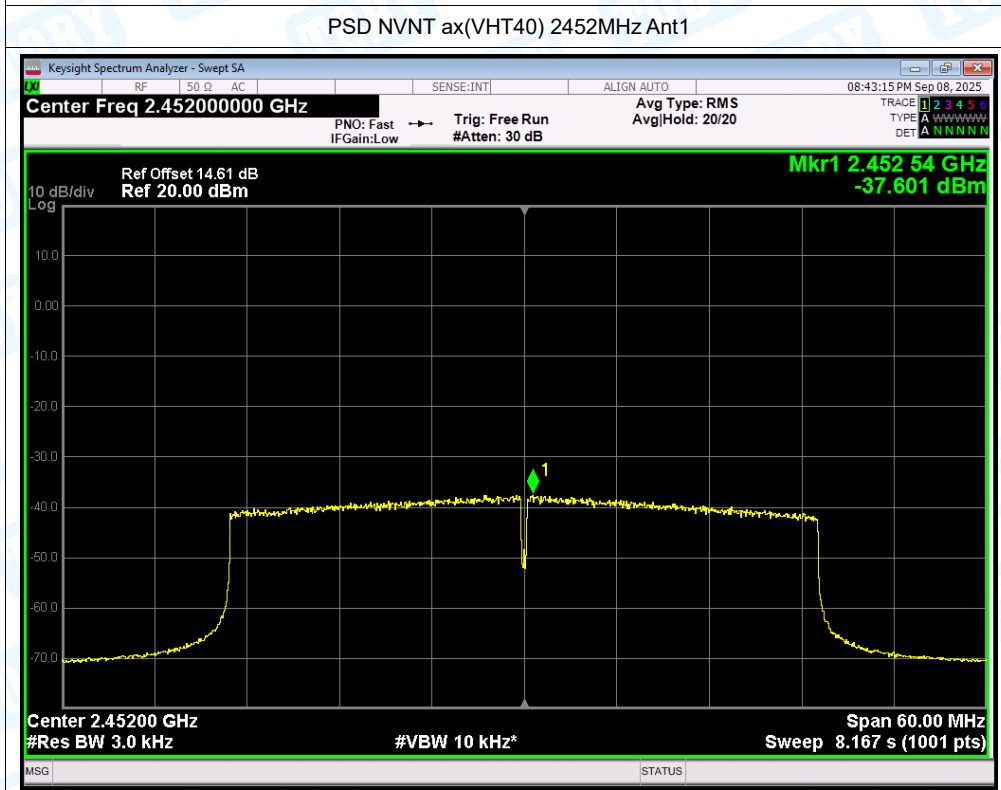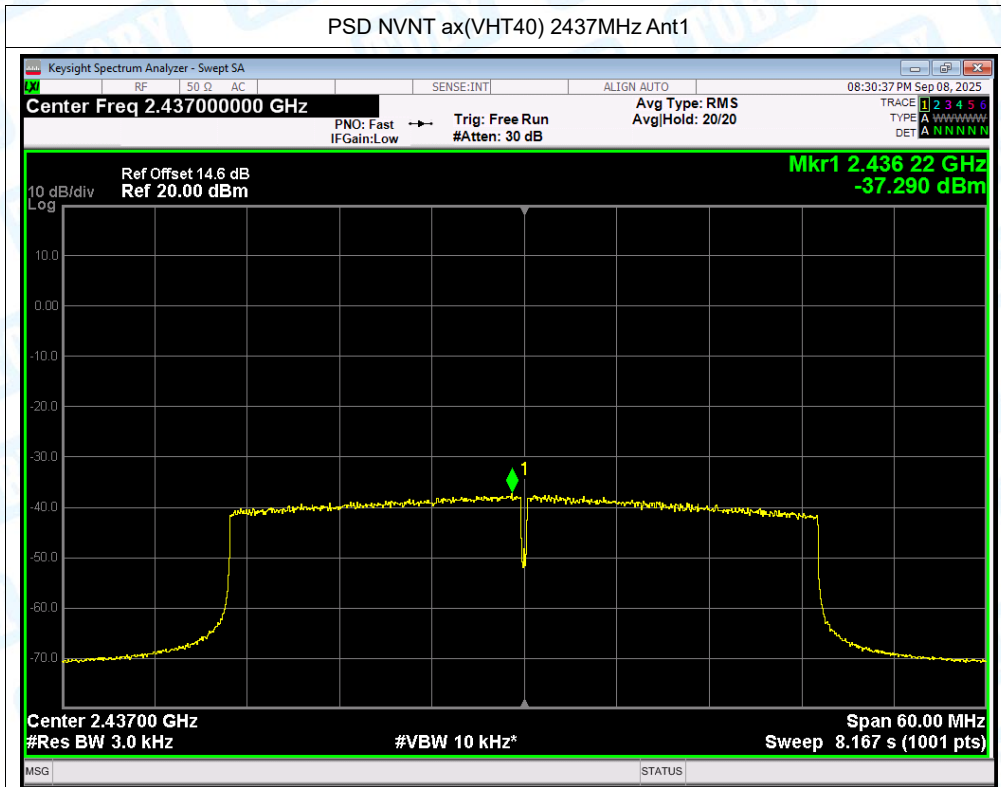

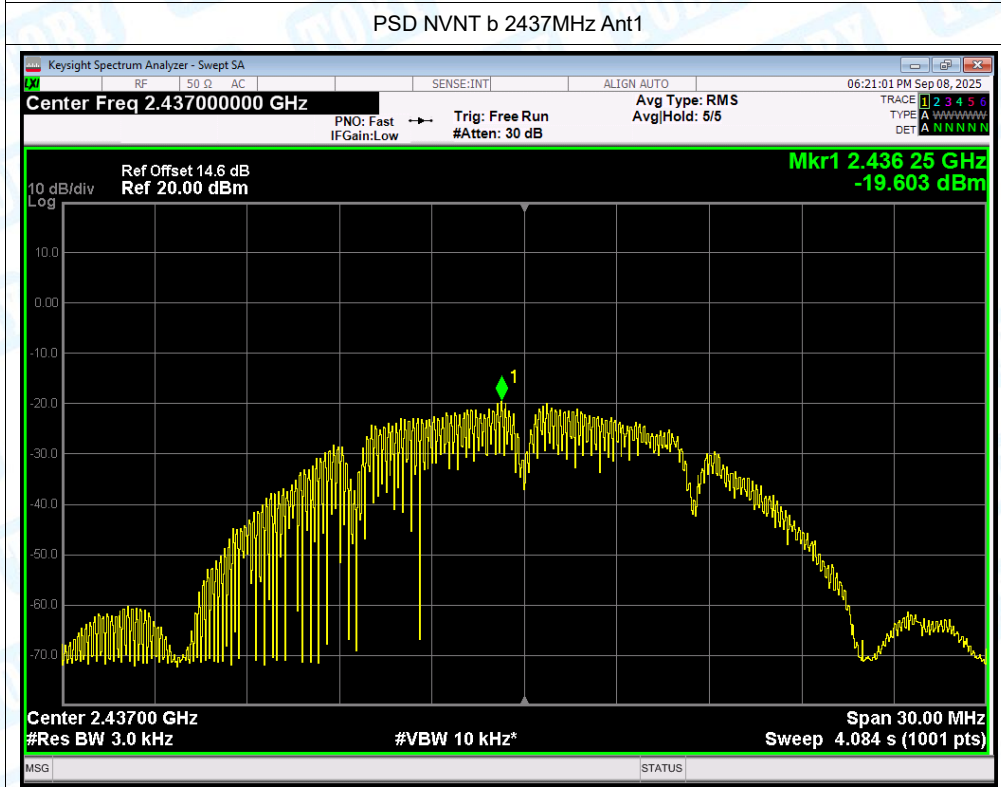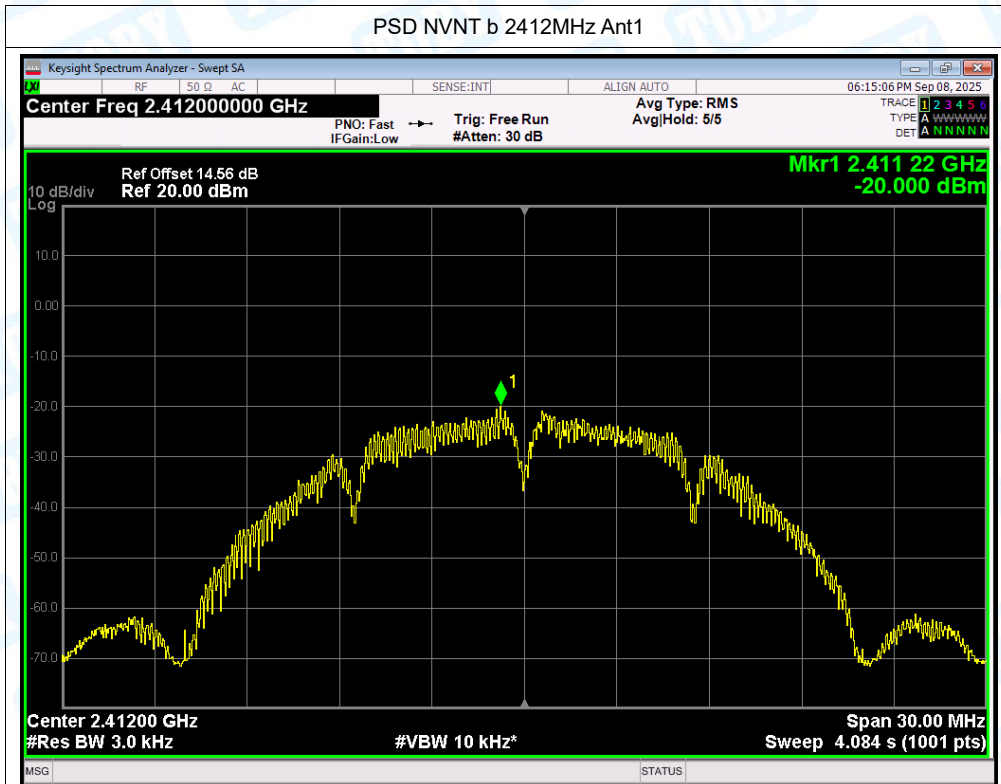


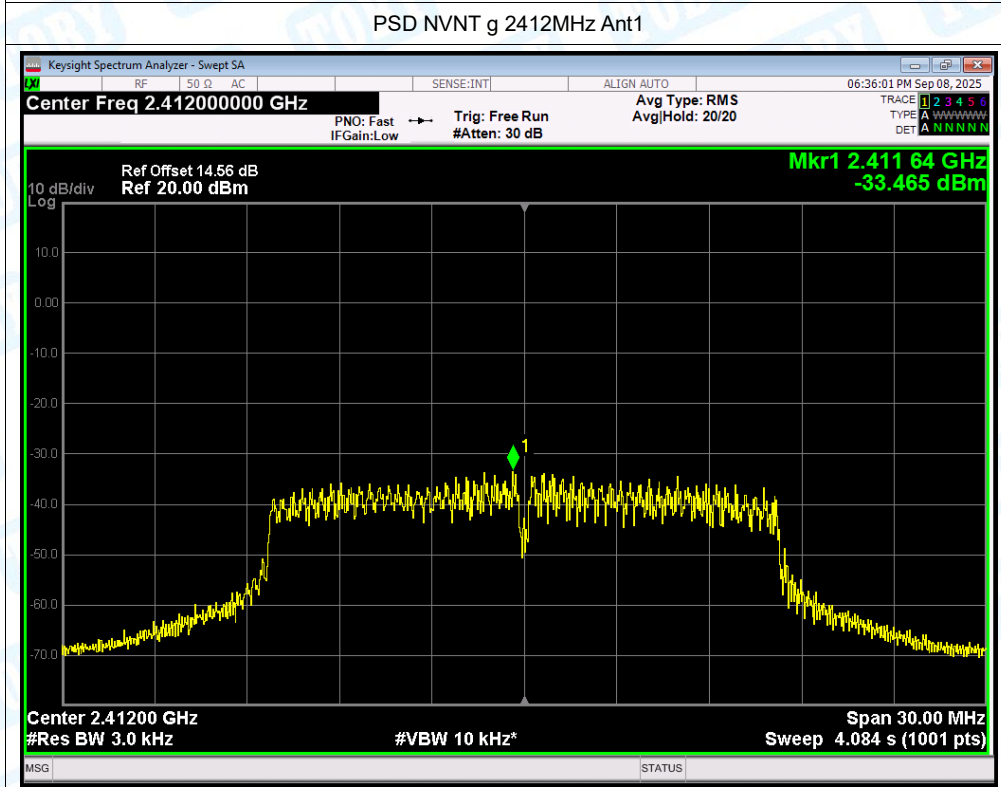
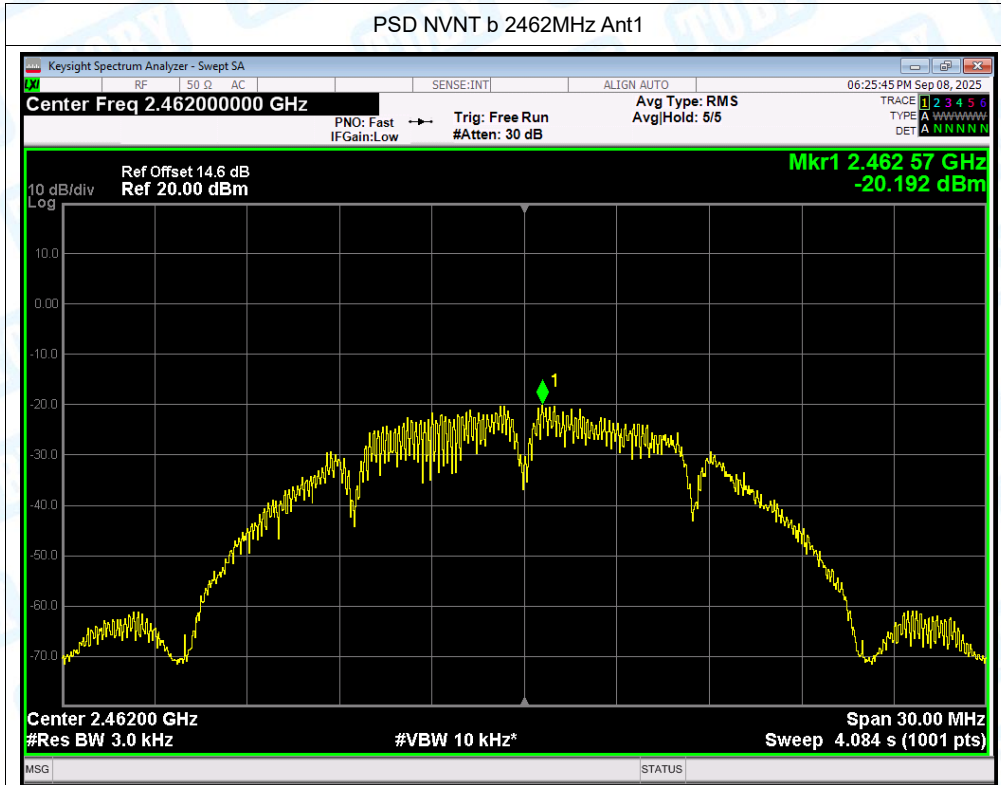




PSD NVNT g 2437MHz Ant1

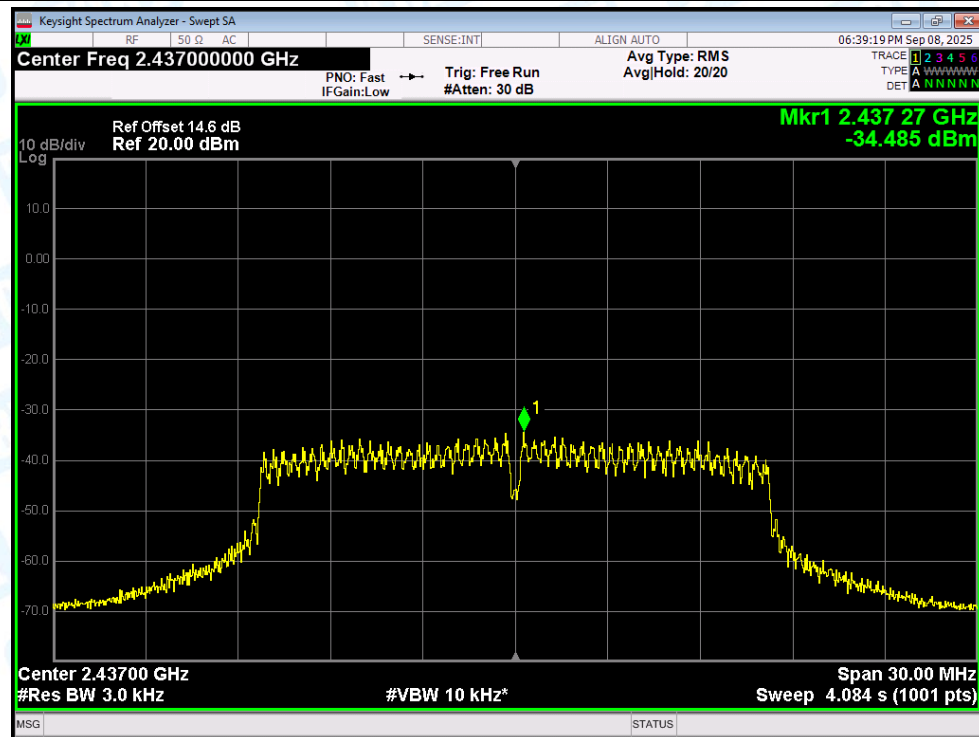


PSD NVNT g 2462MHz Ant1

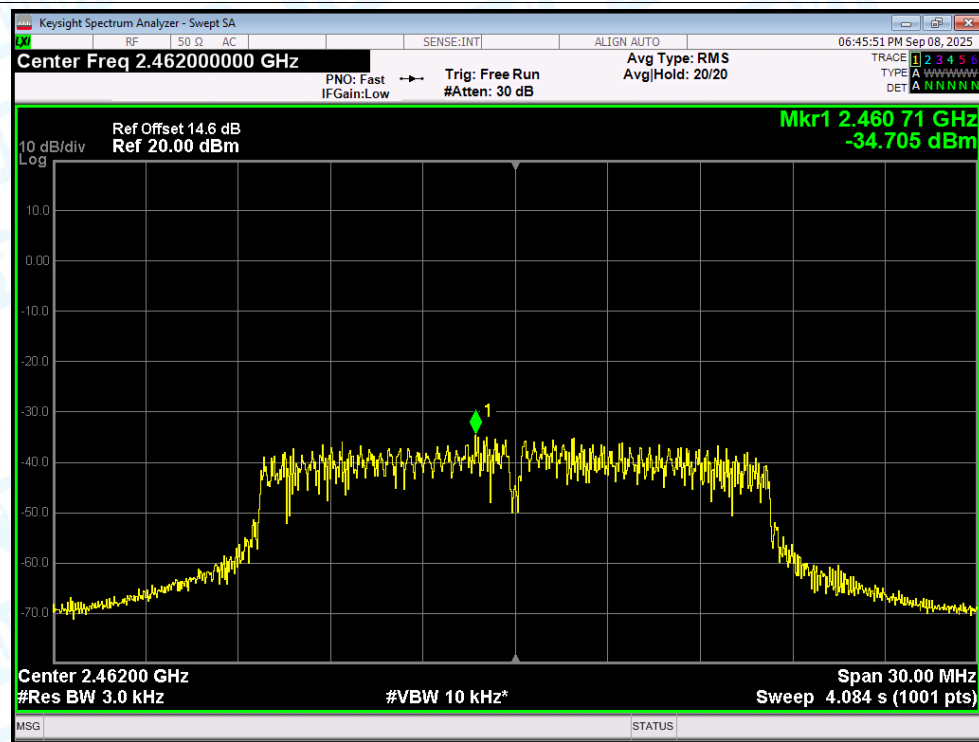

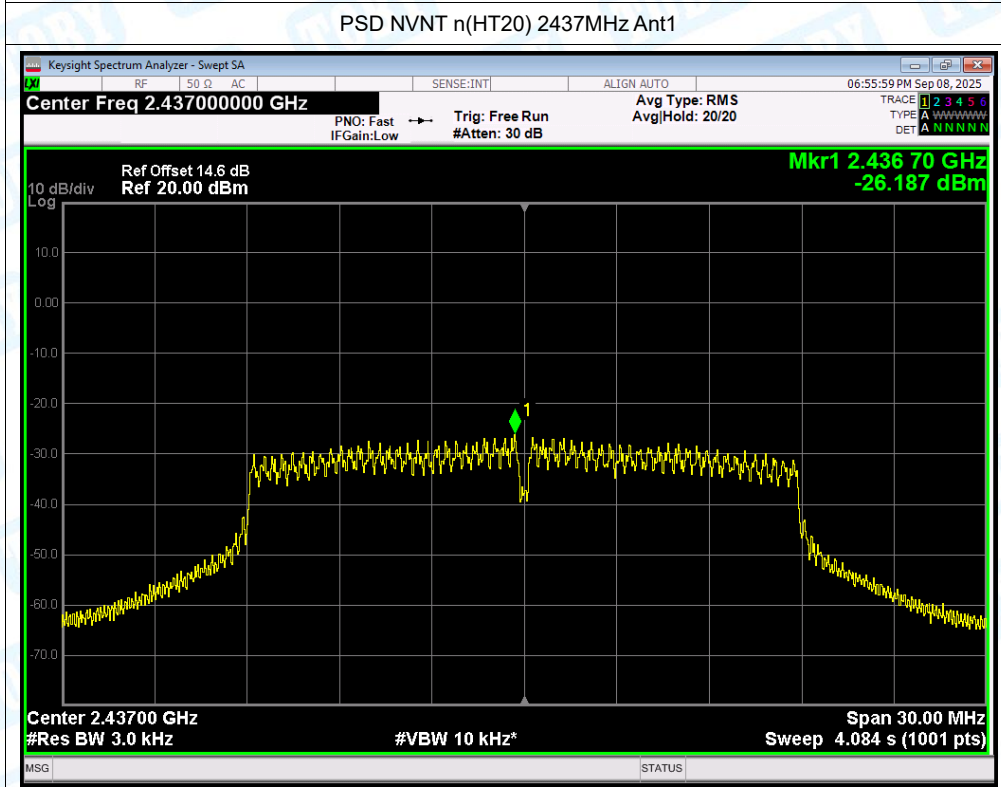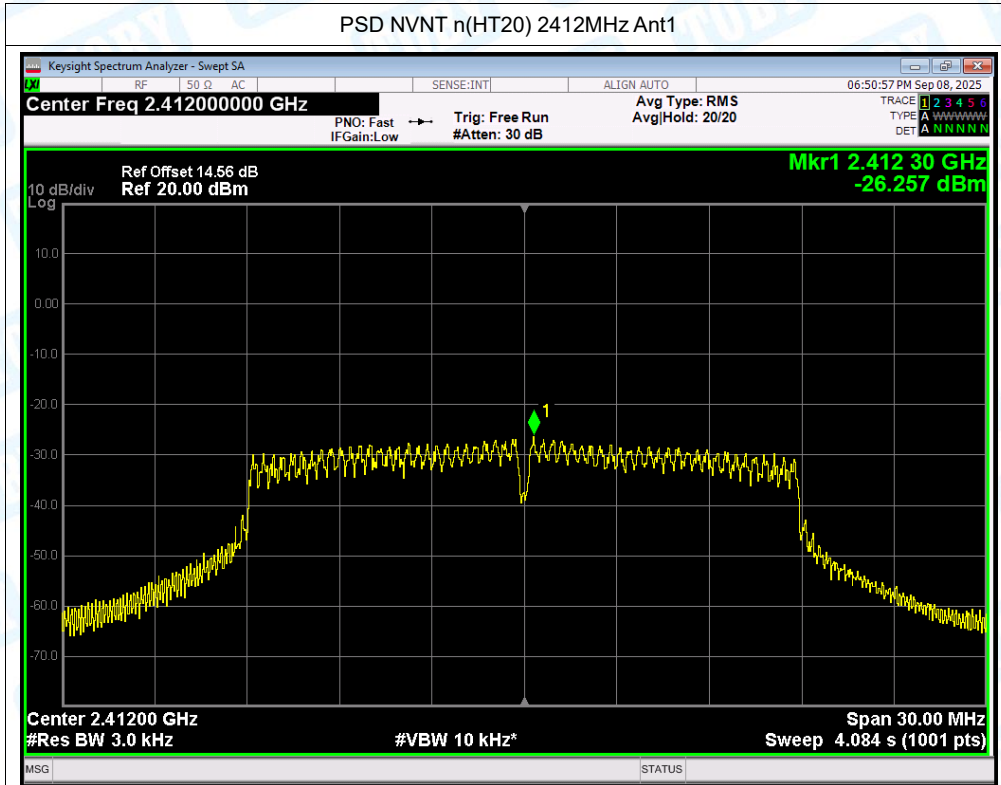


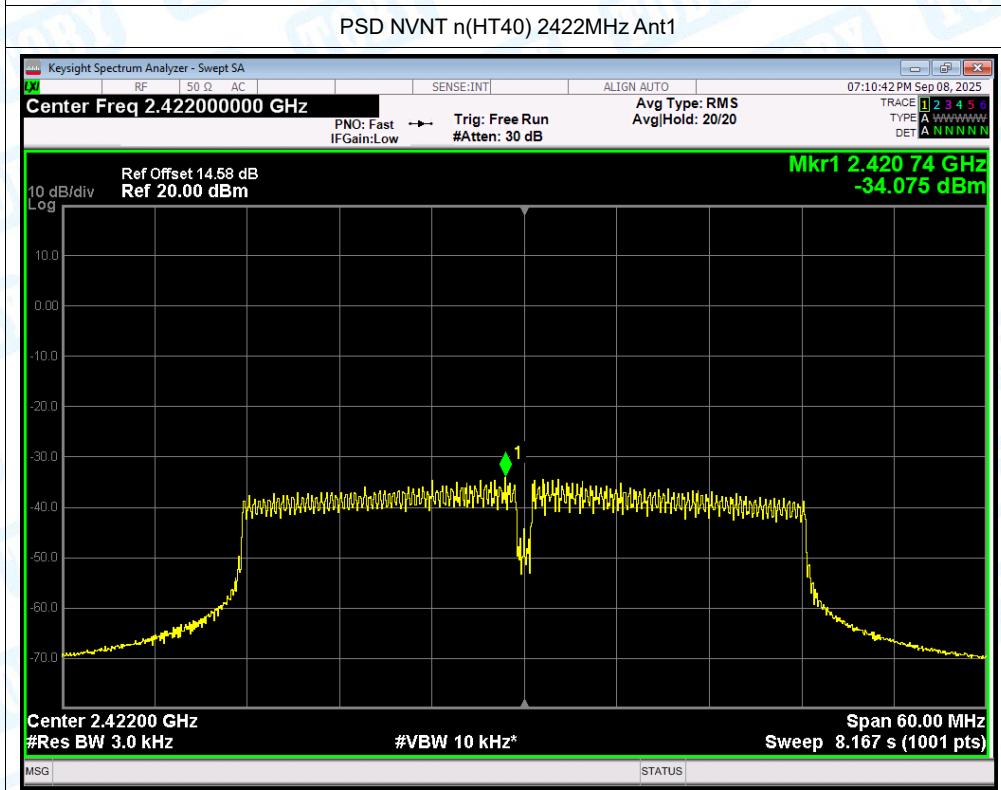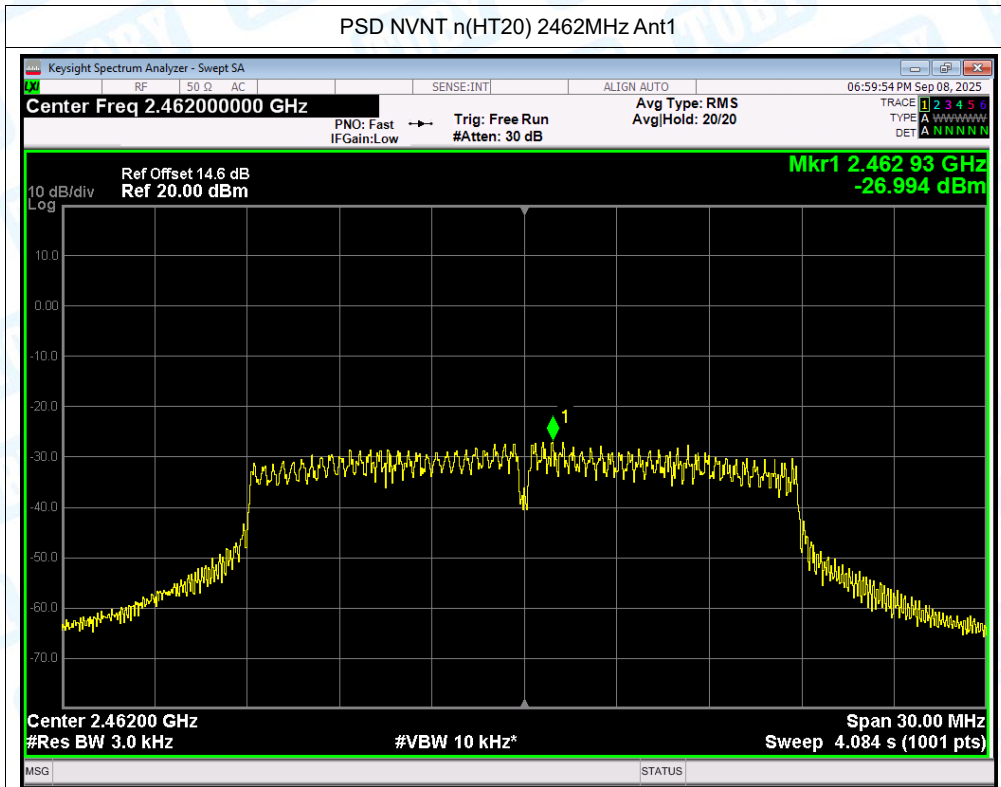

PSD NVNT n(HT40) 2437MHz Ant1

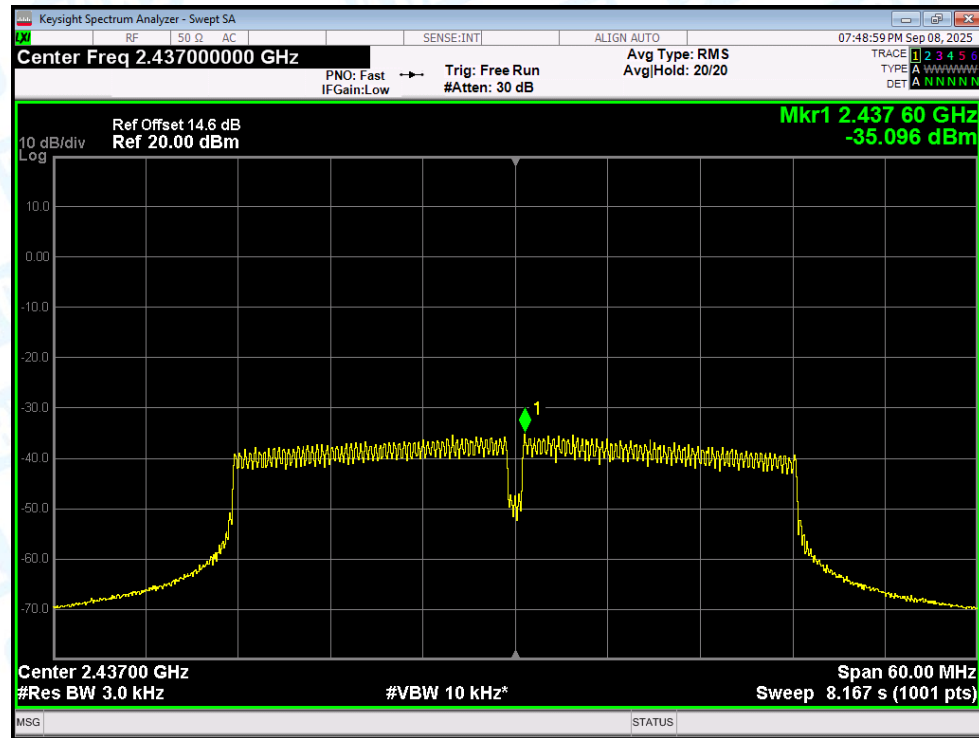

PSD NVNT n(HT40) 2452MHz Ant1

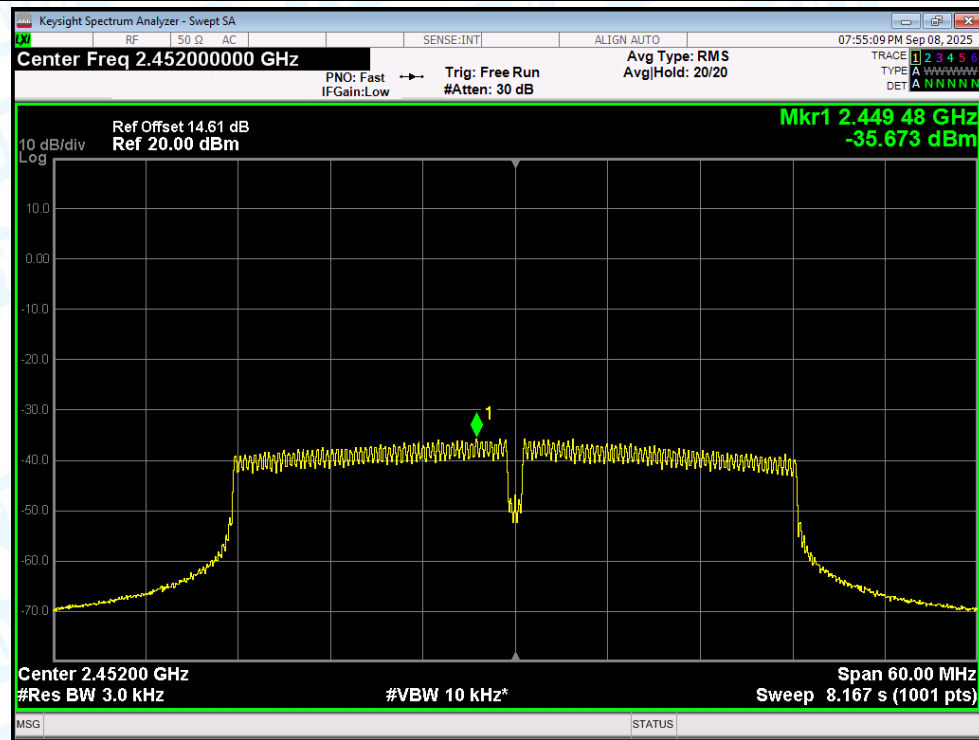


6.Band Edge


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	ax(VHT20)	2412	Ant1	-41.63	-30	Pass
NVNT	ax(VHT20)	2462	Ant1	-41.57	-30	Pass
NVNT	ax(VHT40)	2422	Ant1	-35.7	-30	Pass
NVNT	ax(VHT40)	2452	Ant1	-36.01	-30	Pass
NVNT	b	2412	Ant1	-49.3	-30	Pass
NVNT	b	2462	Ant1	-46.92	-30	Pass
NVNT	g	2412	Ant1	-39.06	-30	Pass
NVNT	g	2462	Ant1	-39.23	-30	Pass
NVNT	n(HT20)	2412	Ant1	-43.82	-30	Pass
NVNT	n(HT20)	2462	Ant1	-44.65	-30	Pass
NVNT	n(HT40)	2422	Ant1	-37.68	-30	Pass
NVNT	n(HT40)	2452	Ant1	-38.01	-30	Pass

Test Graphs


Band Edge NVNT ax(VHT20) 2412MHz Ant1 Ref

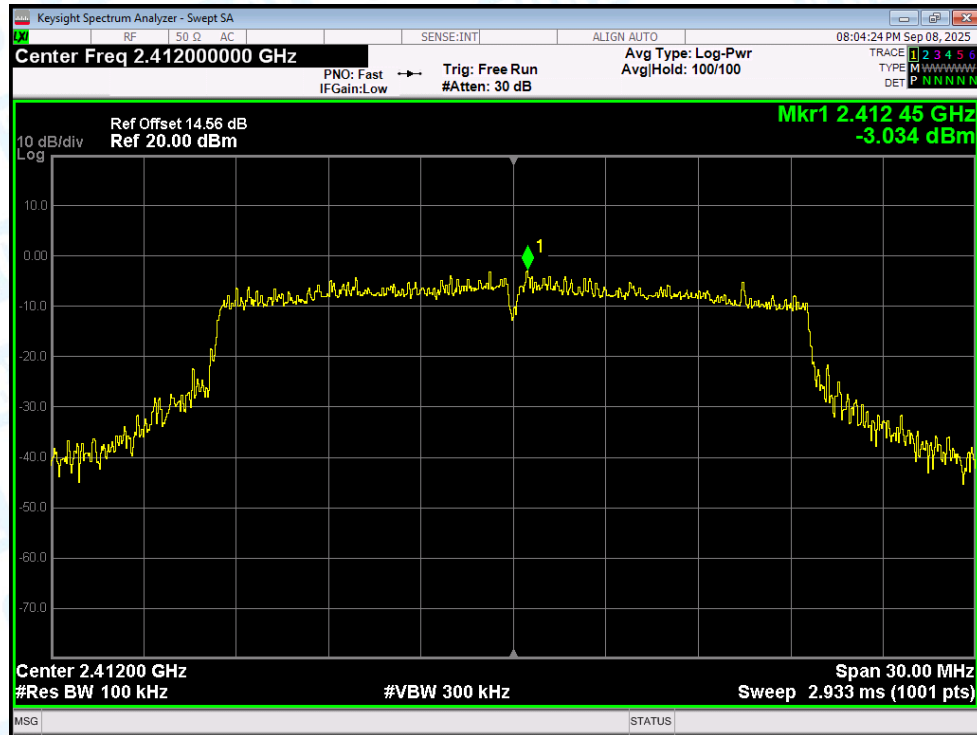


Band Edge NVNT ax(VHT20) 2412MHz Ant1 Emission

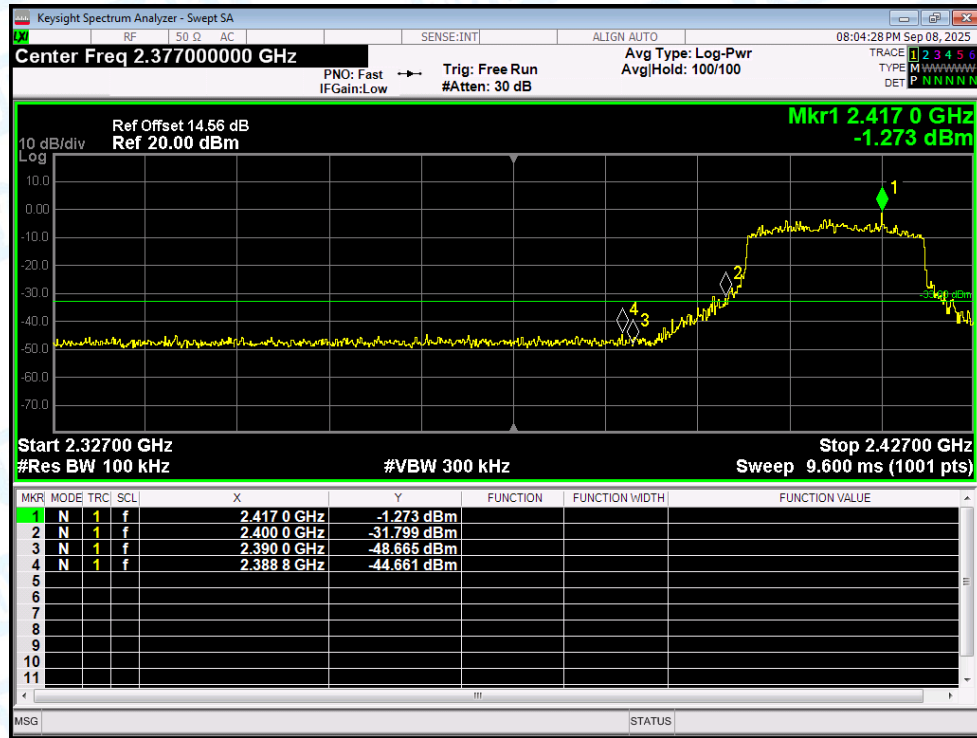


Band Edge NVNT ax(VHT20) 2462MHz Ant1 Ref

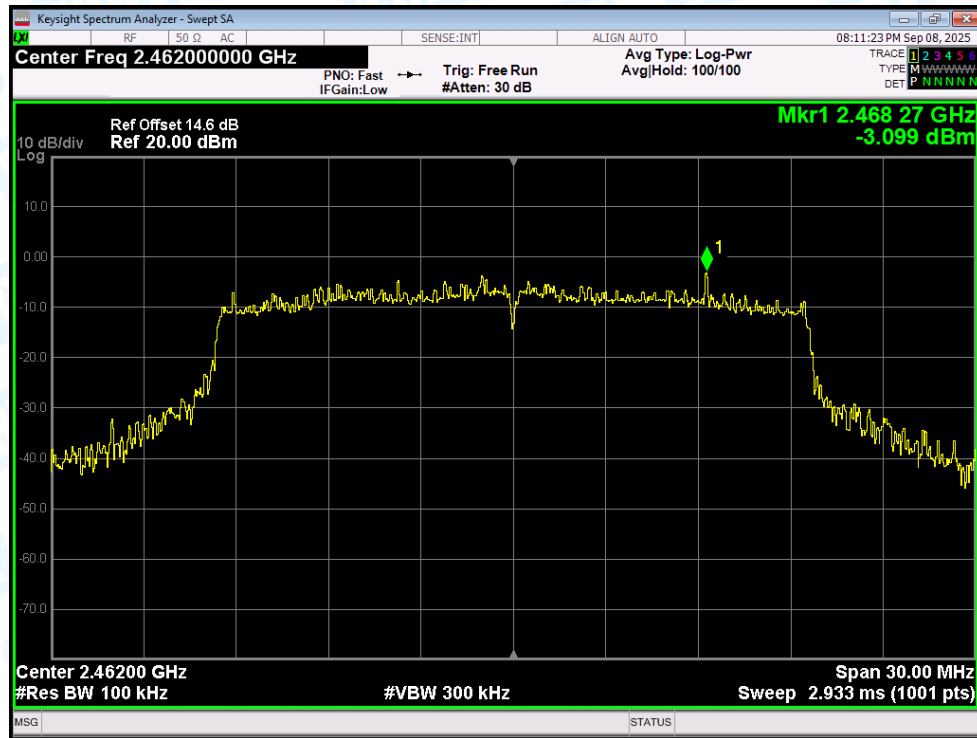


Band Edge NVNT ax(VHT20) 2462MHz Ant1 Emission

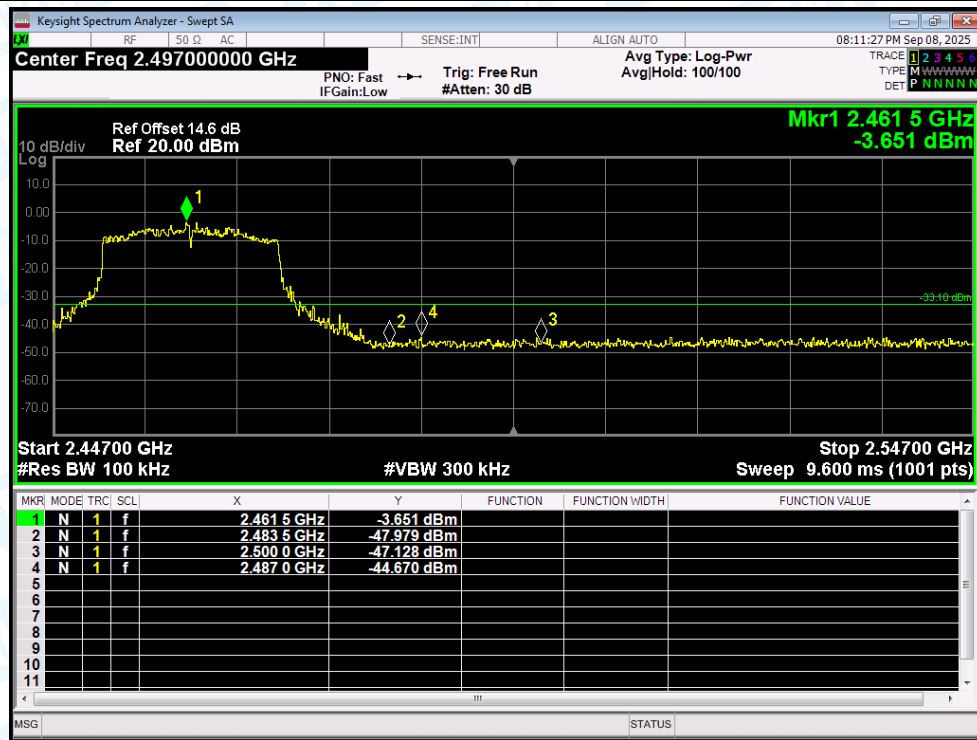


Band Edge NVNT ax(VHT40) 2422MHz Ant1 Ref

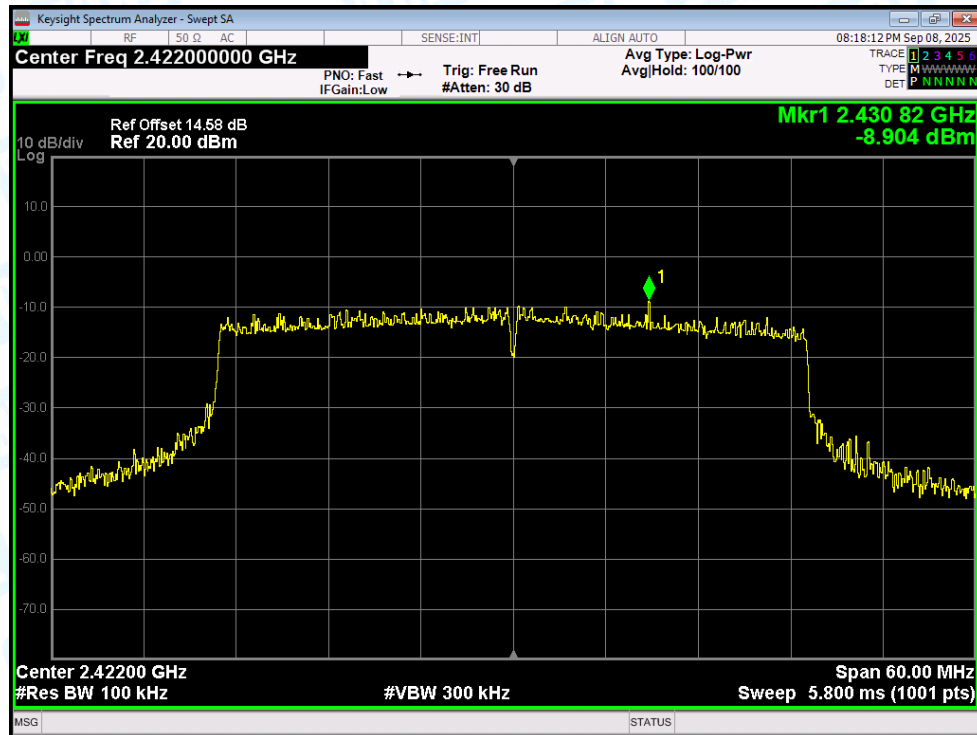


Band Edge NVNT ax(VHT40) 2422MHz Ant1 Emission

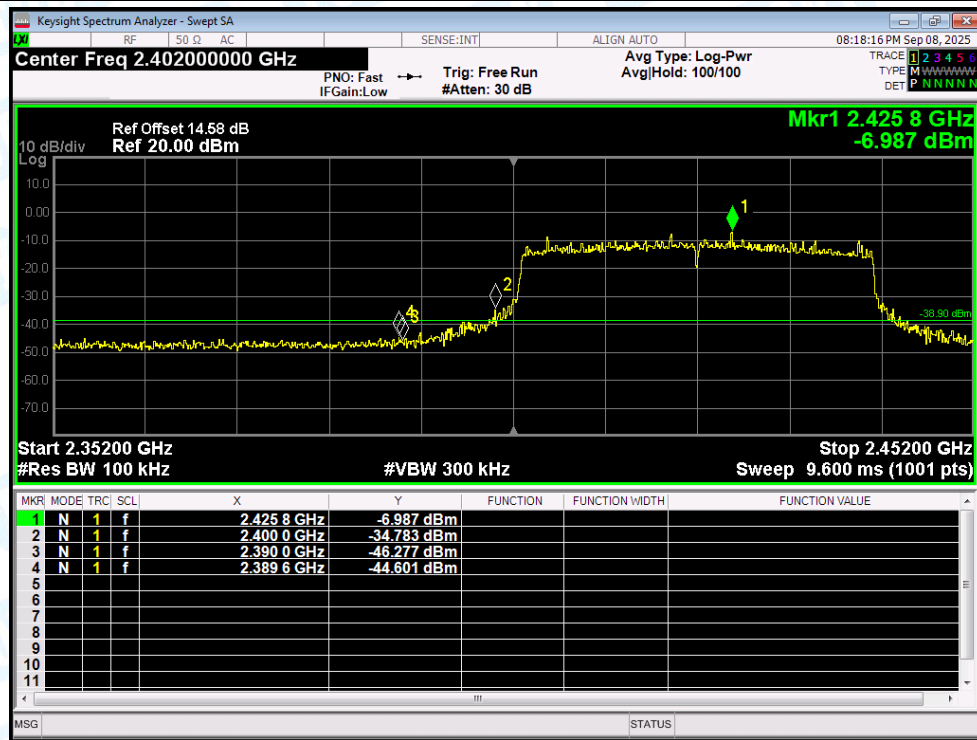


Band Edge NVNT ax(VHT40) 2452MHz Ant1 Ref

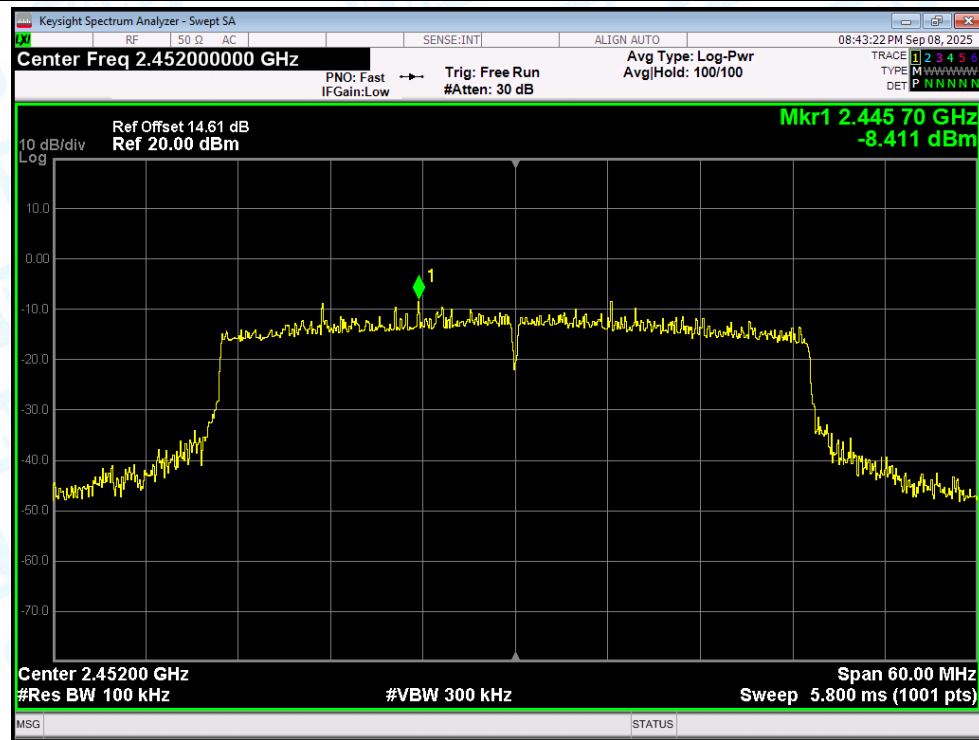


Band Edge NVNT ax(VHT40) 2452MHz Ant1 Emission

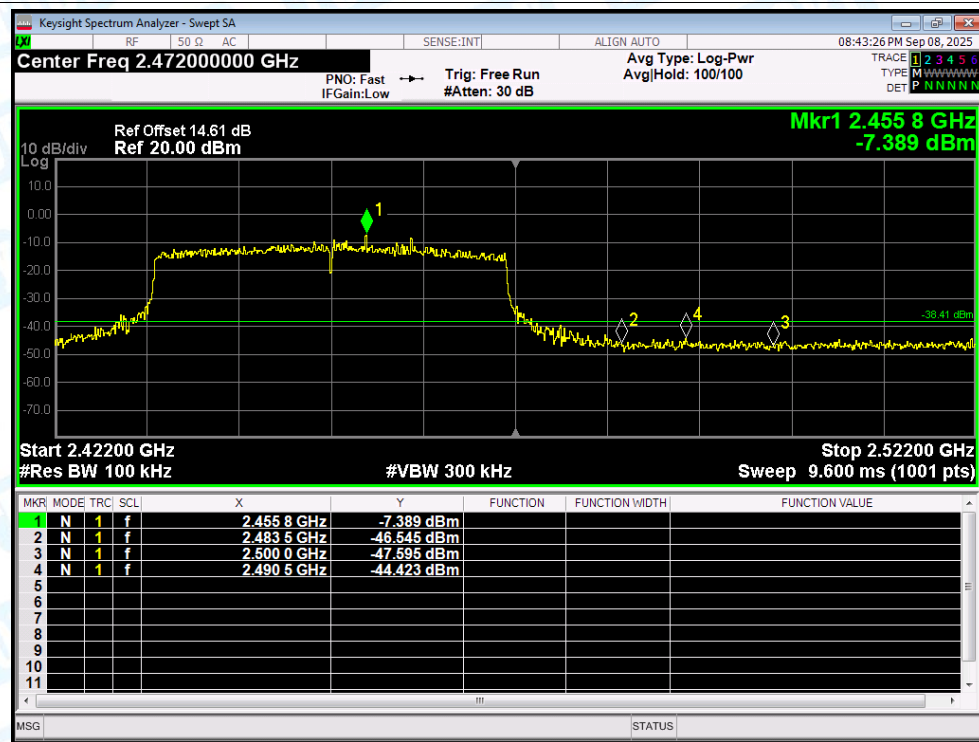


Band Edge NVNT b 2412MHz Ant1 Ref

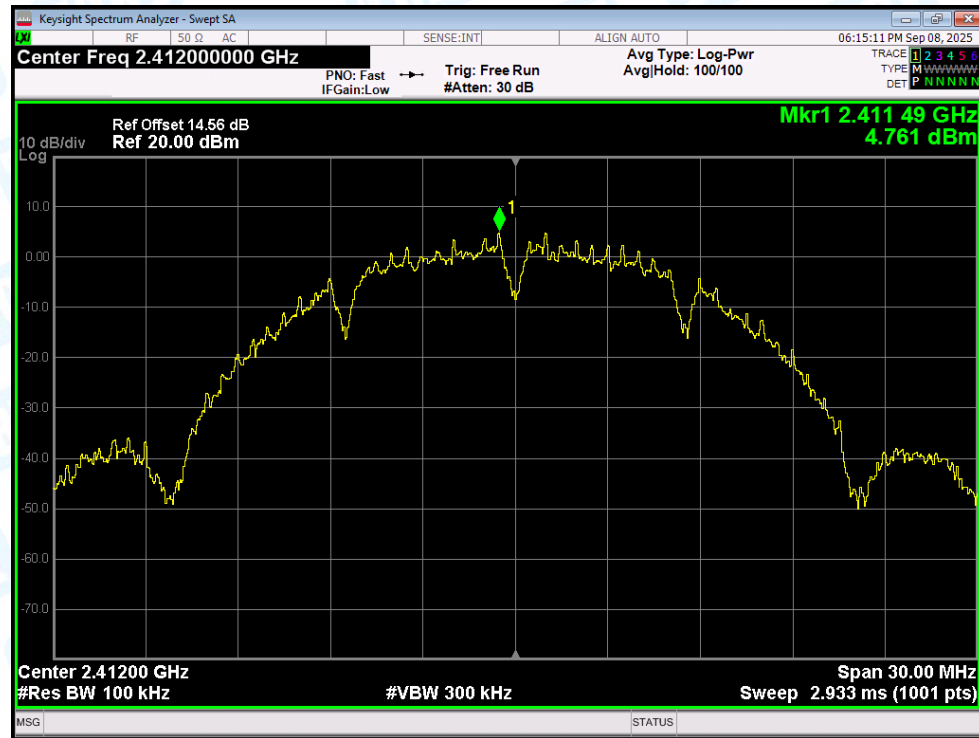


Band Edge NVNT b 2412MHz Ant1 Emission

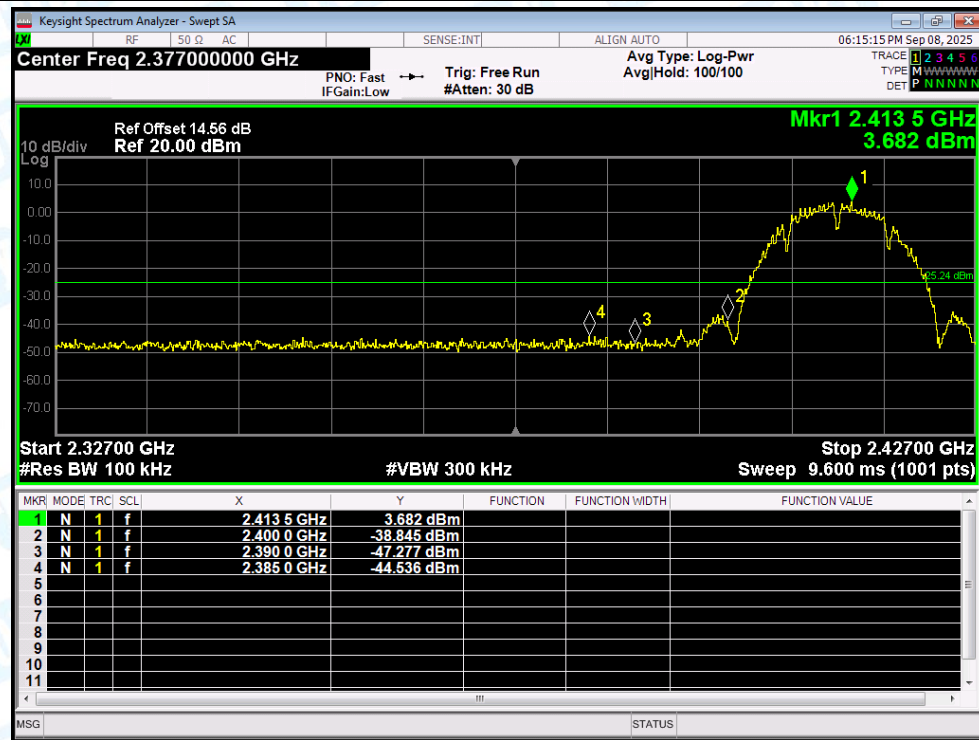


Band Edge NVNT b 2462MHz Ant1 Ref

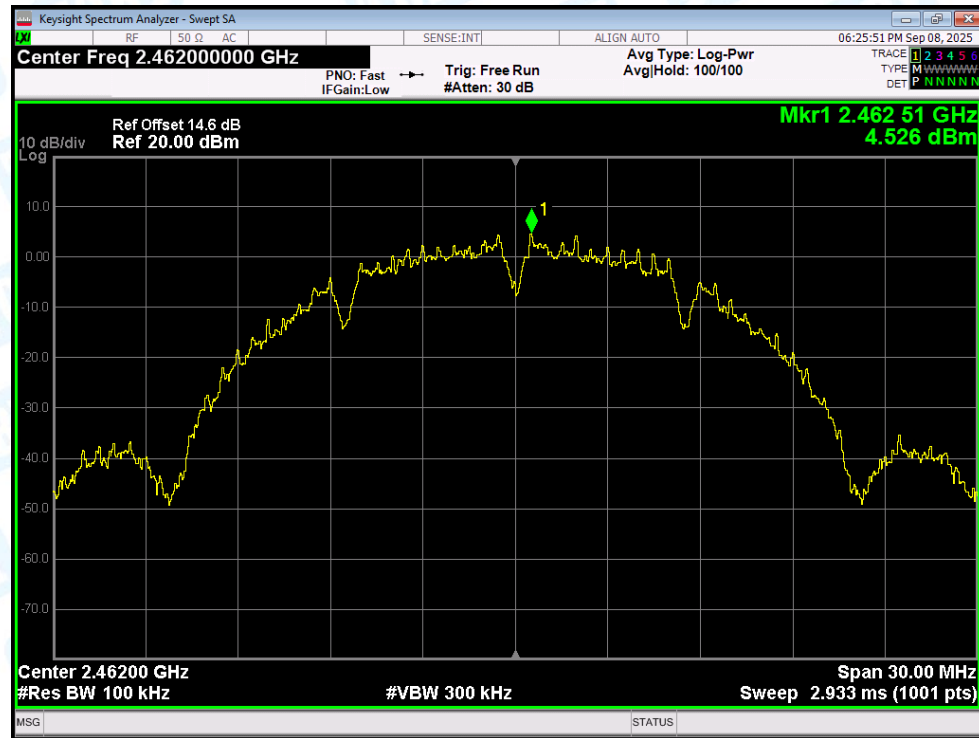


Band Edge NVNT b 2462MHz Ant1 Emission

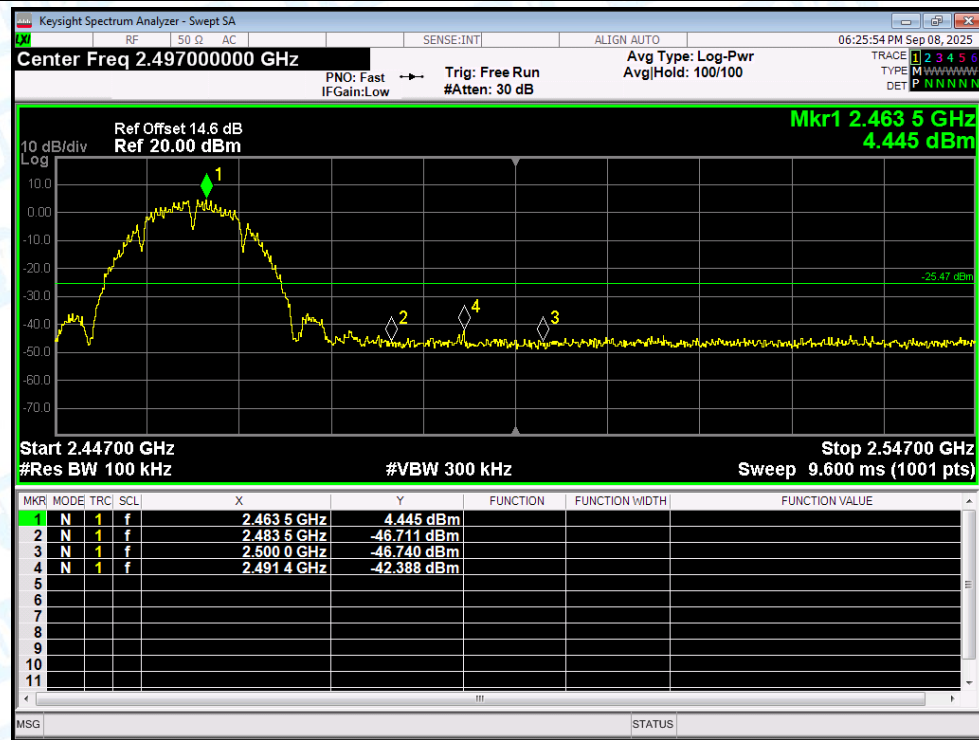


Band Edge NVNT g 2412MHz Ant1 Ref

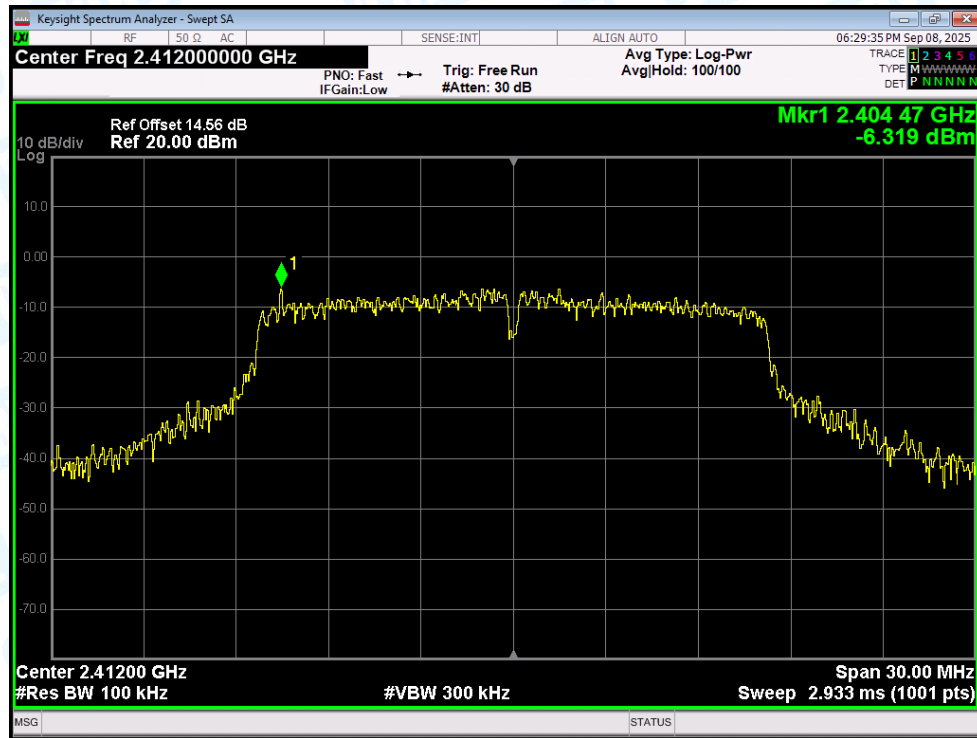


Band Edge NVNT g 2412MHz Ant1 Emission

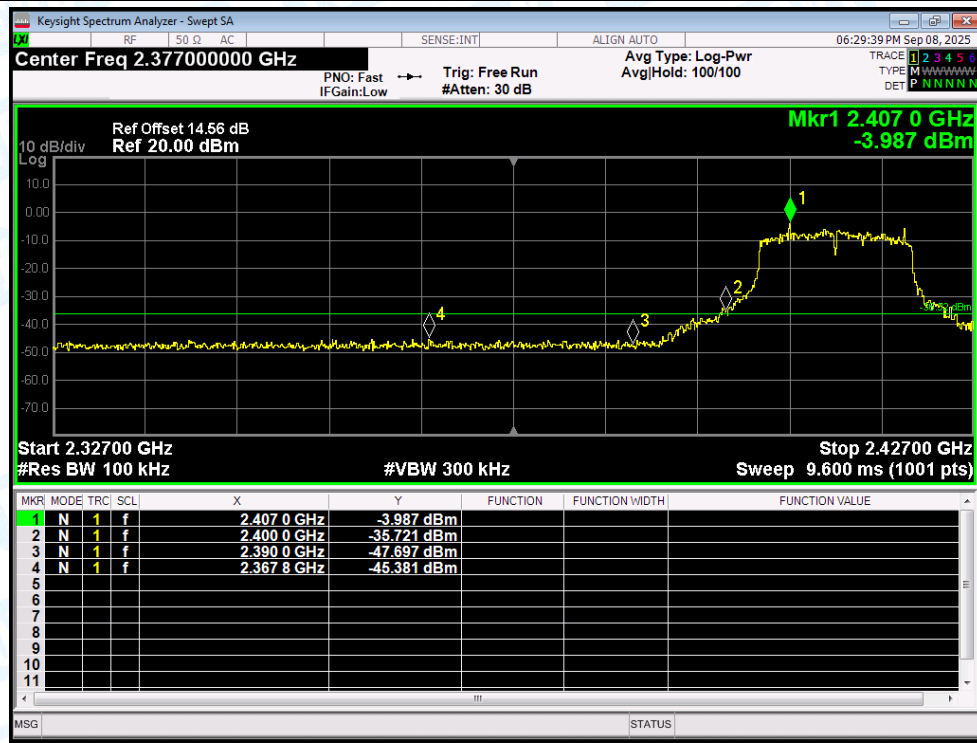


Band Edge NVNT g 2462MHz Ant1 Ref

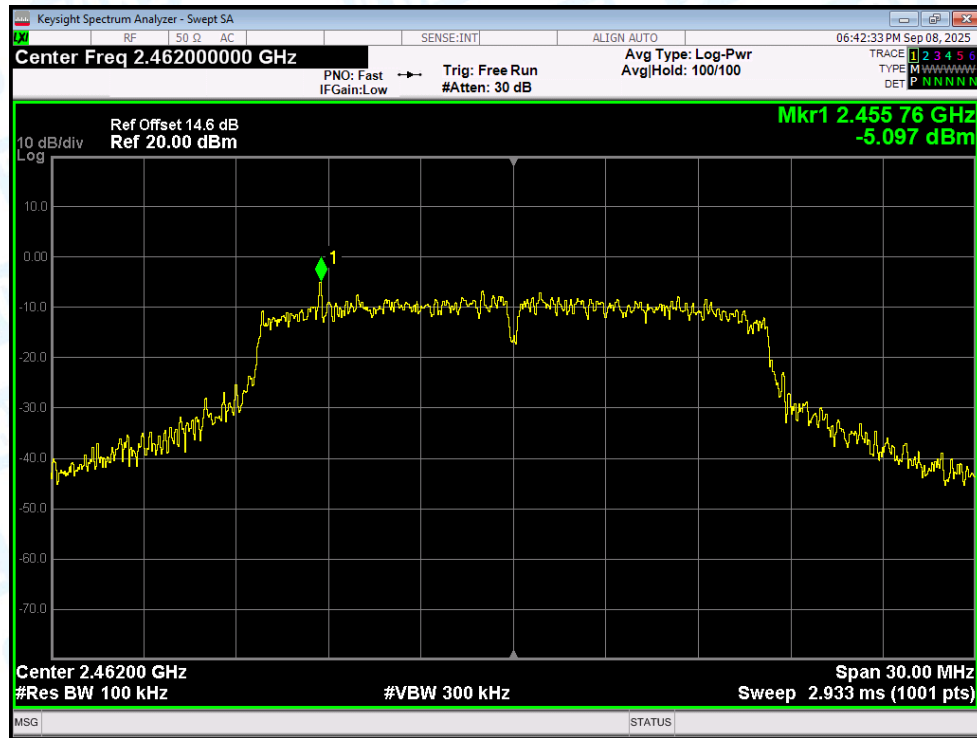


Band Edge NVNT g 2462MHz Ant1 Emission

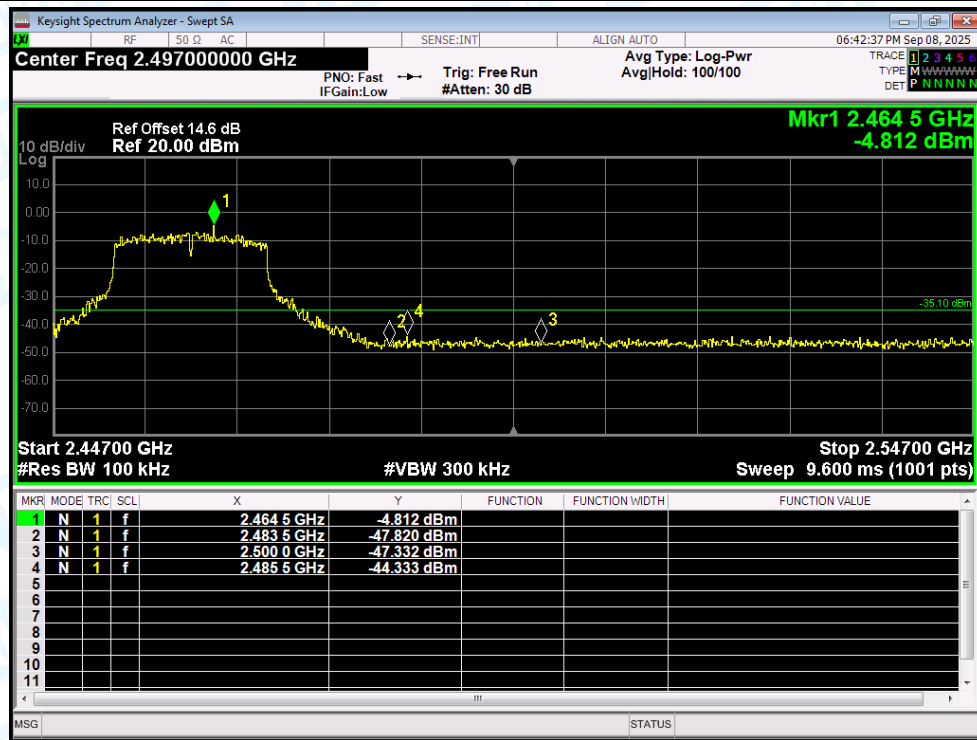


Band Edge NVNT n(HT20) 2412MHz Ant1 Ref

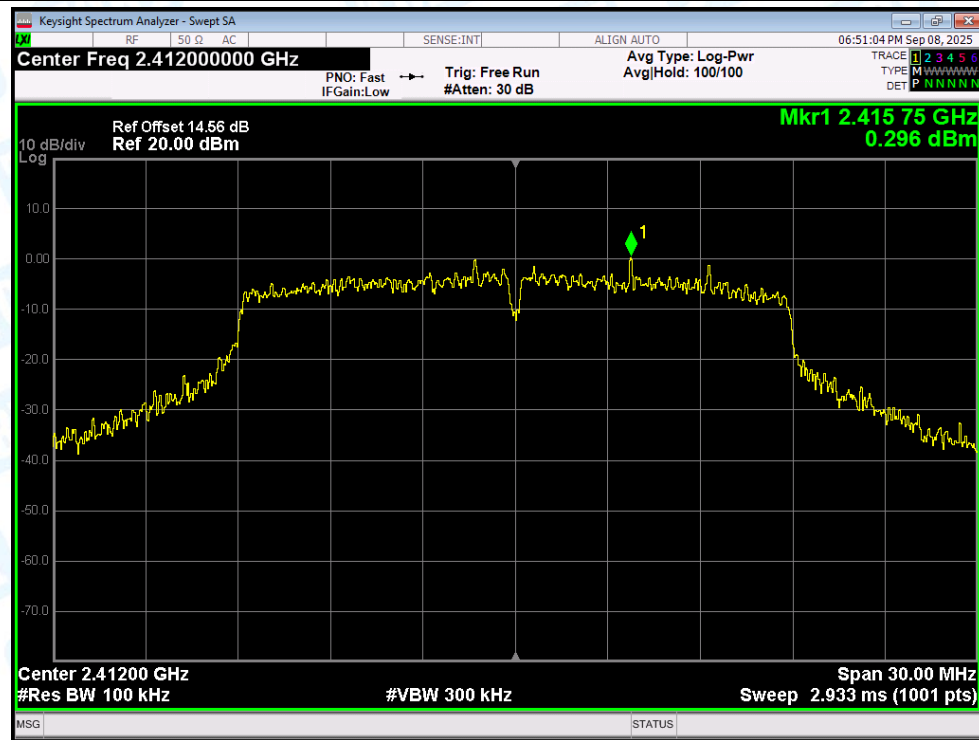


Band Edge NVNT n(HT20) 2412MHz Ant1 Emission

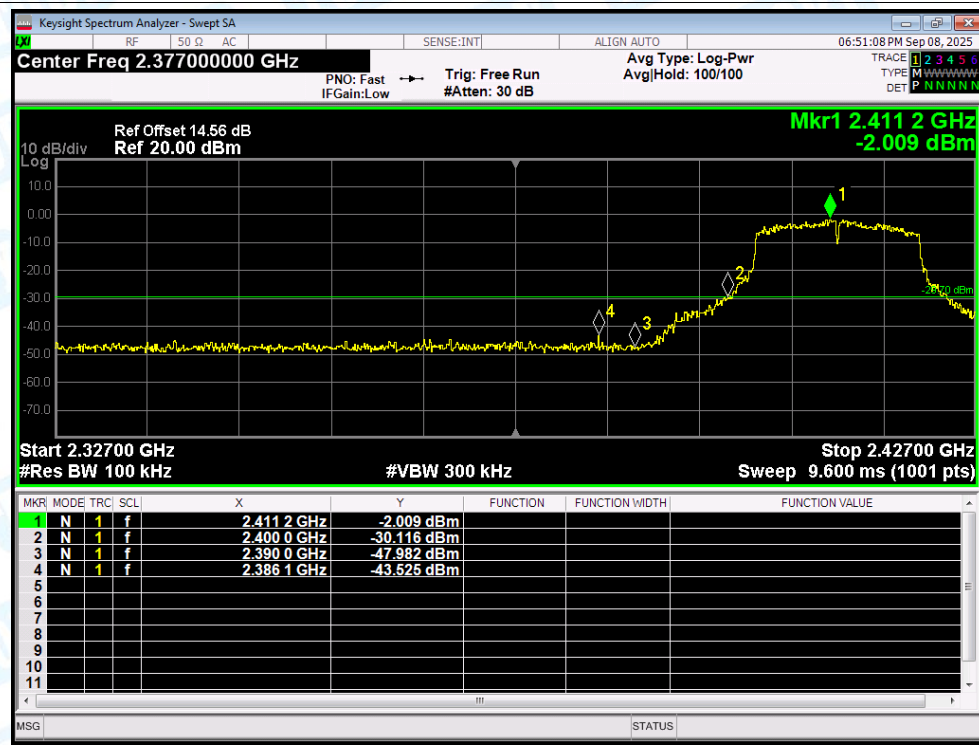


Band Edge NVNT n(HT20) 2462MHz Ant1 Ref

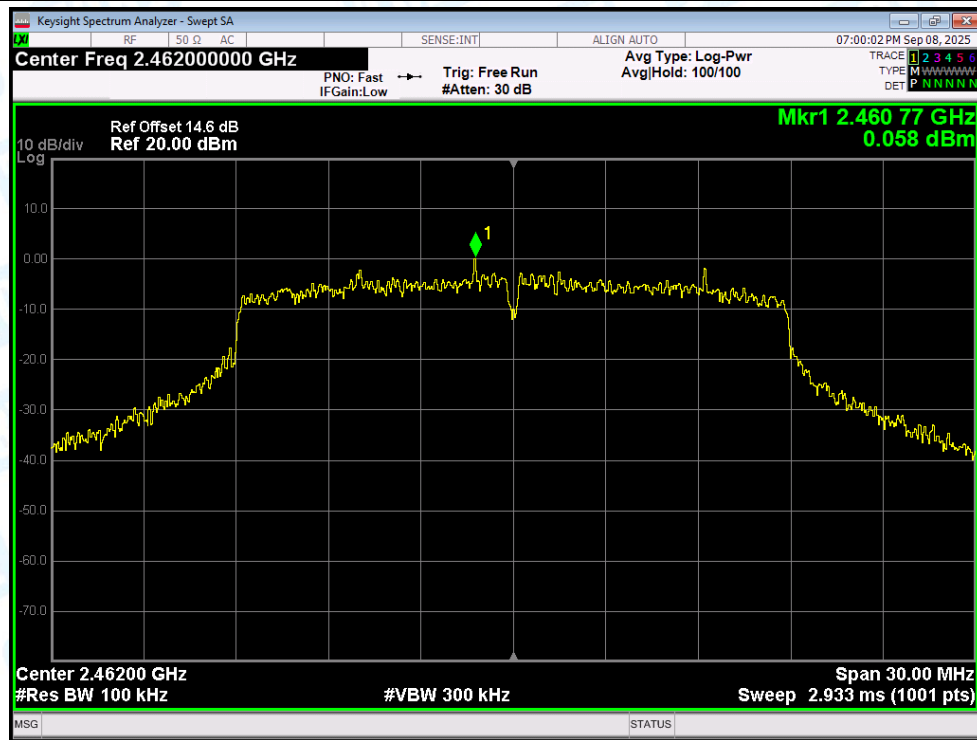


Band Edge NVNT n(HT20) 2462MHz Ant1 Emission

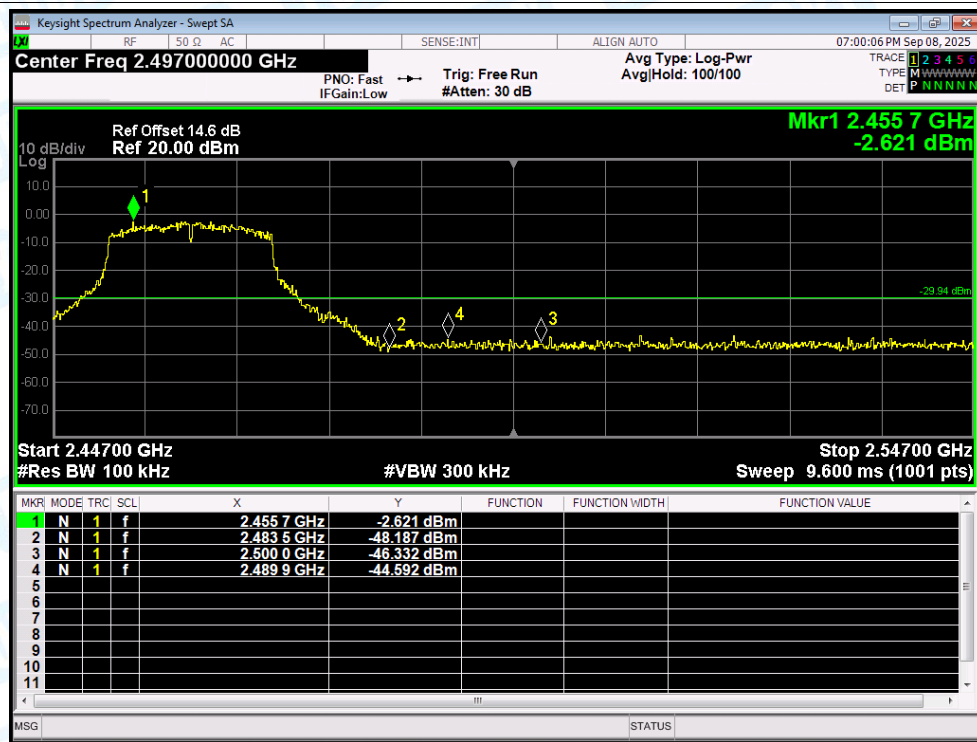


Band Edge NVNT n(HT40) 2422MHz Ant1 Ref

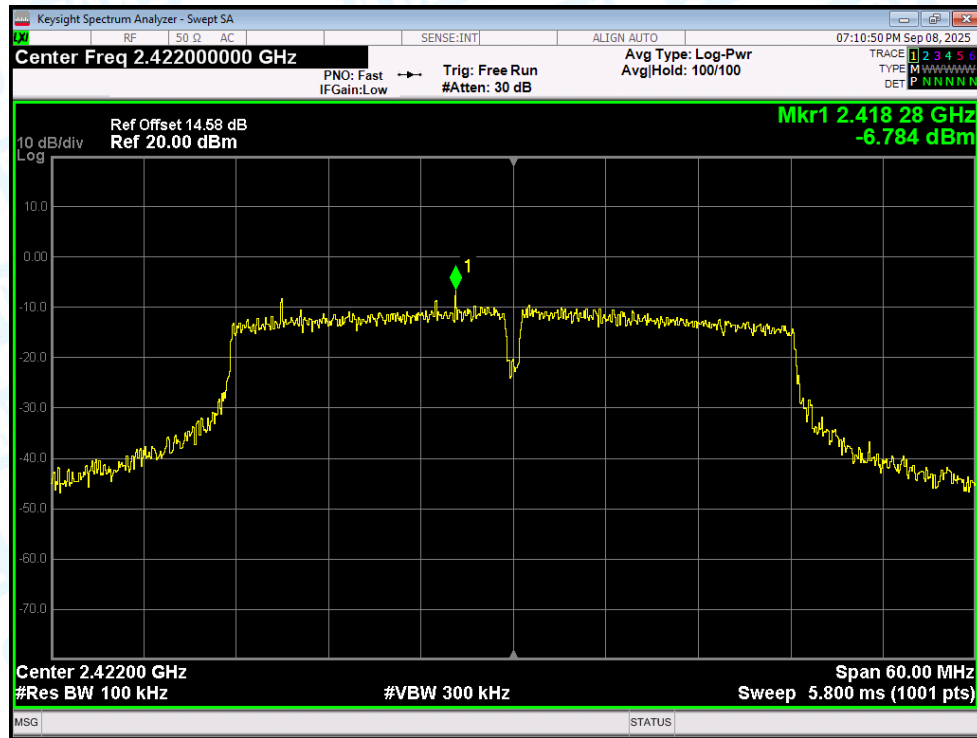


Band Edge NVNT n(HT40) 2422MHz Ant1 Emission

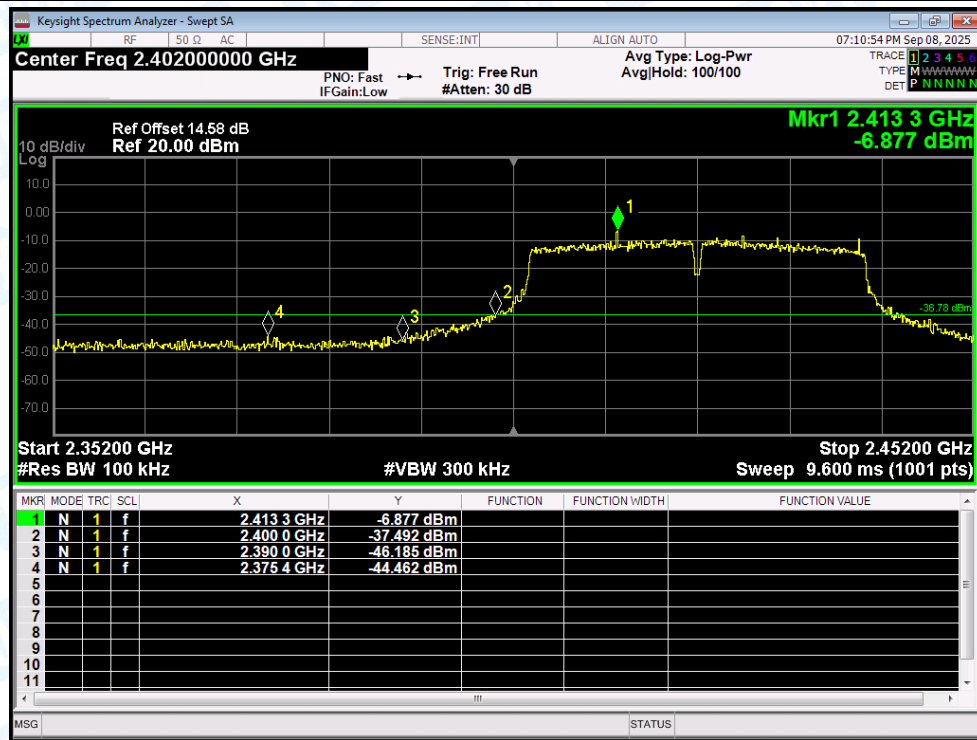

Band Edge NVNT n(HT40) 2452MHz Ant1 Ref

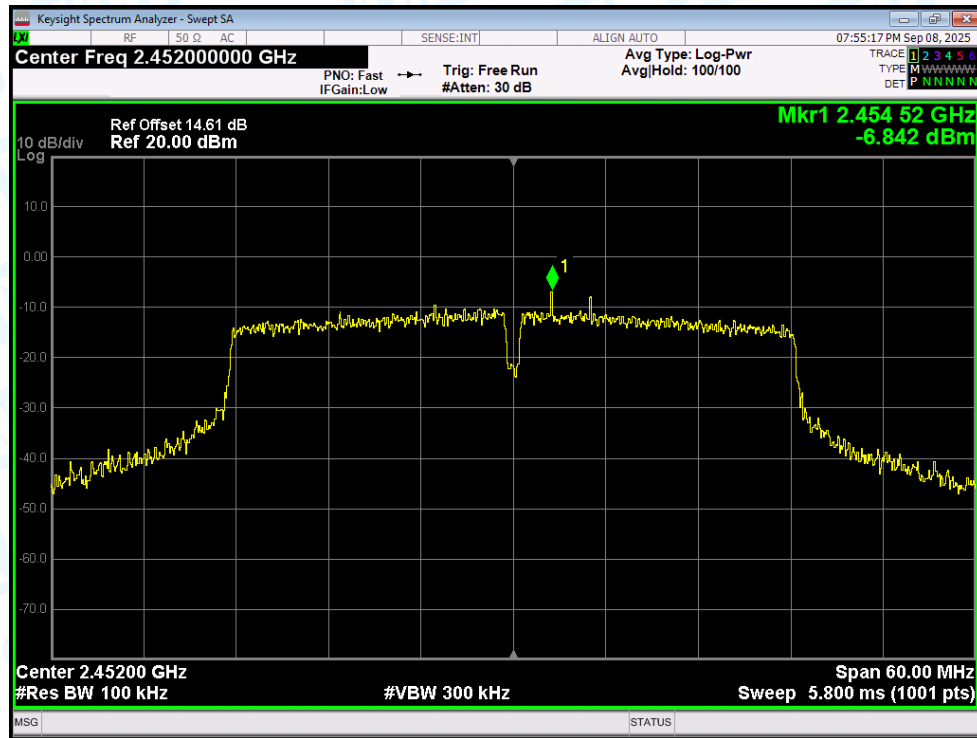

Band Edge NVNT n(HT40) 2452MHz Ant1 Emission

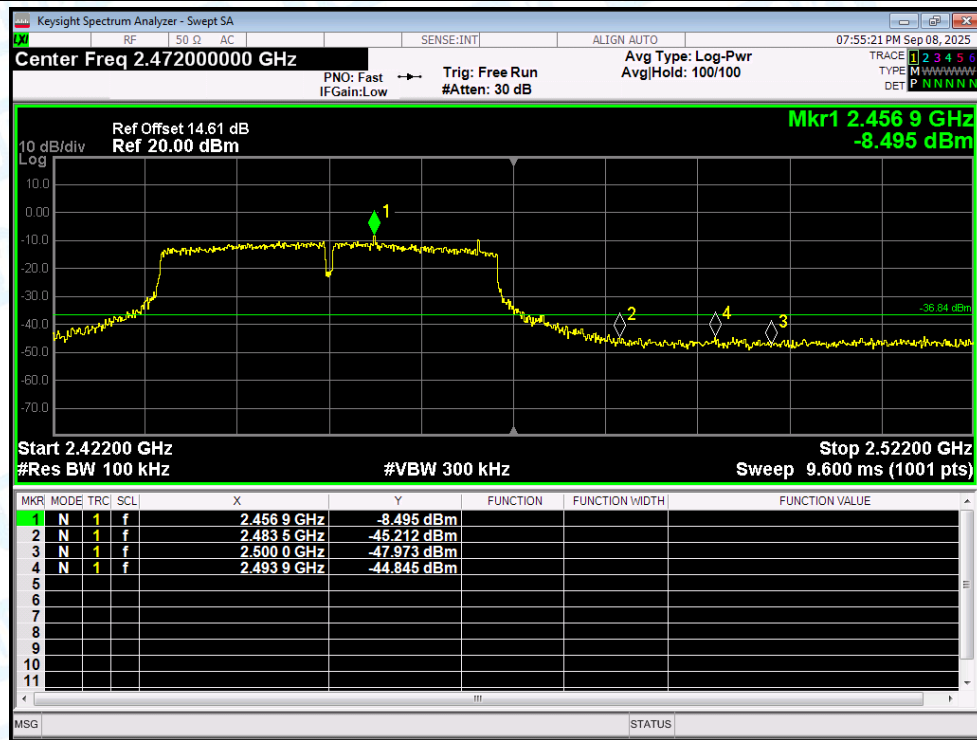


7. Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	ax(VHT20)	2412	Ant1	-40.55	-30	Pass
NVNT	ax(VHT20)	2437	Ant1	-41.06	-30	Pass
NVNT	ax(VHT20)	2462	Ant1	-40.73	-30	Pass
NVNT	ax(VHT40)	2422	Ant1	-34.46	-30	Pass
NVNT	ax(VHT40)	2437	Ant1	-34.49	-30	Pass
NVNT	ax(VHT40)	2452	Ant1	-35.37	-30	Pass
NVNT	b	2412	Ant1	-48.17	-30	Pass
NVNT	b	2437	Ant1	-47.75	-30	Pass
NVNT	b	2462	Ant1	-47.62	-30	Pass
NVNT	g	2412	Ant1	-37.28	-30	Pass
NVNT	g	2437	Ant1	-36.72	-30	Pass
NVNT	g	2462	Ant1	-38.56	-30	Pass
NVNT	n(HT20)	2412	Ant1	-41.14	-30	Pass
NVNT	n(HT20)	2437	Ant1	-41.2	-30	Pass
NVNT	n(HT20)	2462	Ant1	-40.25	-30	Pass
NVNT	n(HT40)	2422	Ant1	-34.53	-30	Pass
NVNT	n(HT40)	2437	Ant1	-36.79	-30	Pass
NVNT	n(HT40)	2452	Ant1	-33.41	-30	Pass

Test Graphs

Tx. Spurious NVNT ax(VHT20) 2412MHz Ant1 Ref

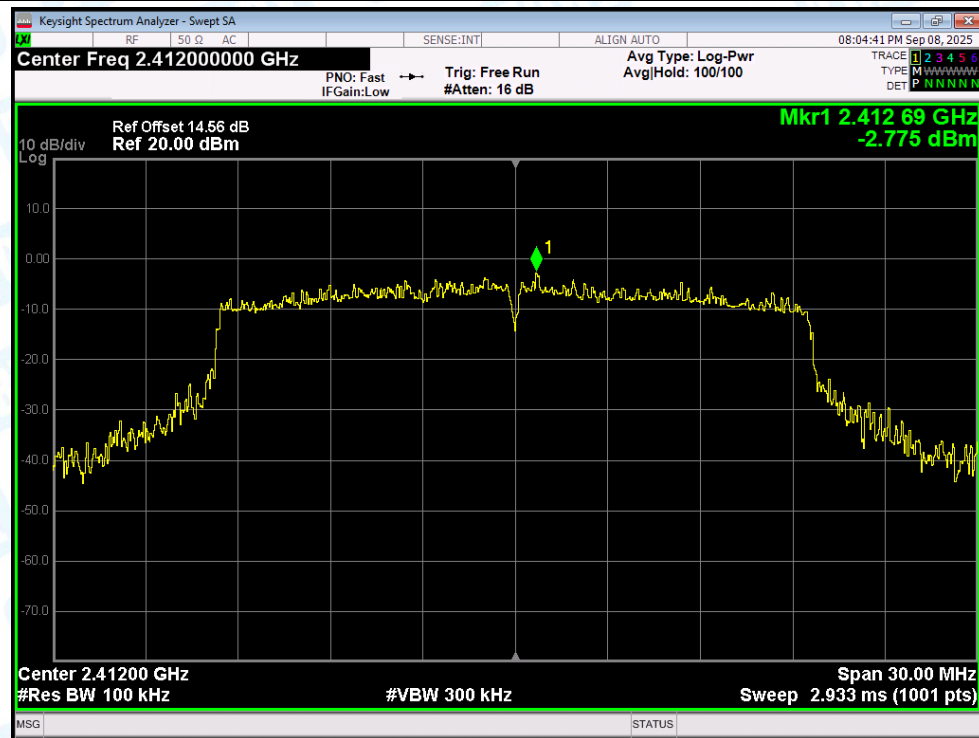


Tx. Spurious NVNT ax(VHT20) 2412MHz Ant1 Emission

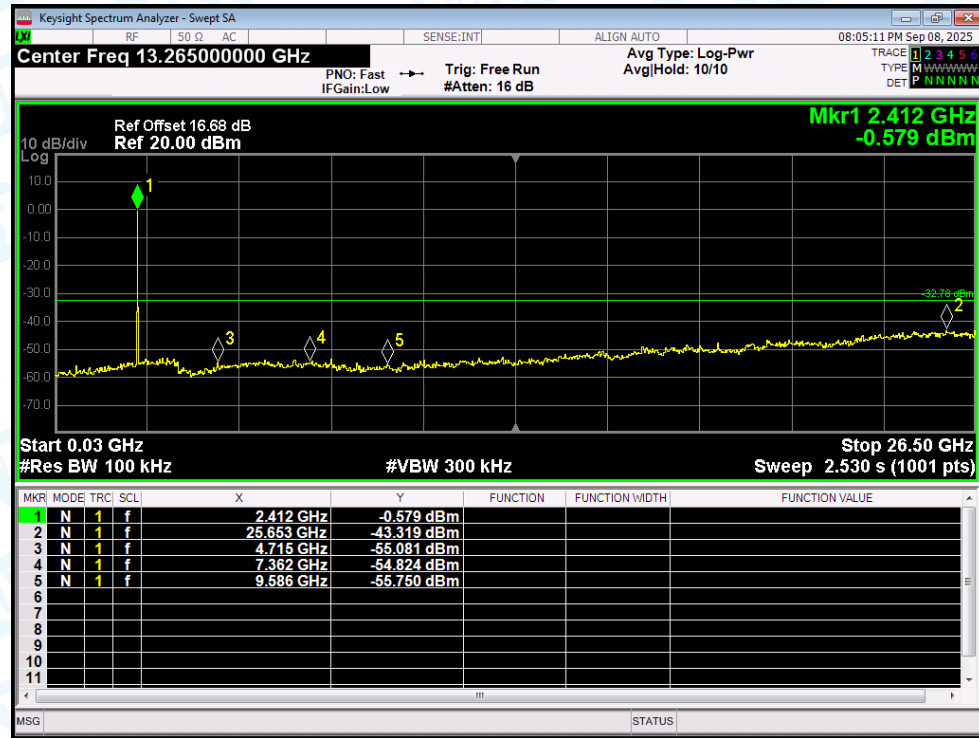


Tx. Spurious NVNT ax(VHT20) 2437MHz Ant1 Ref




Tx. Spurious NVNT ax(VHT20) 2437MHz Ant1 Emission

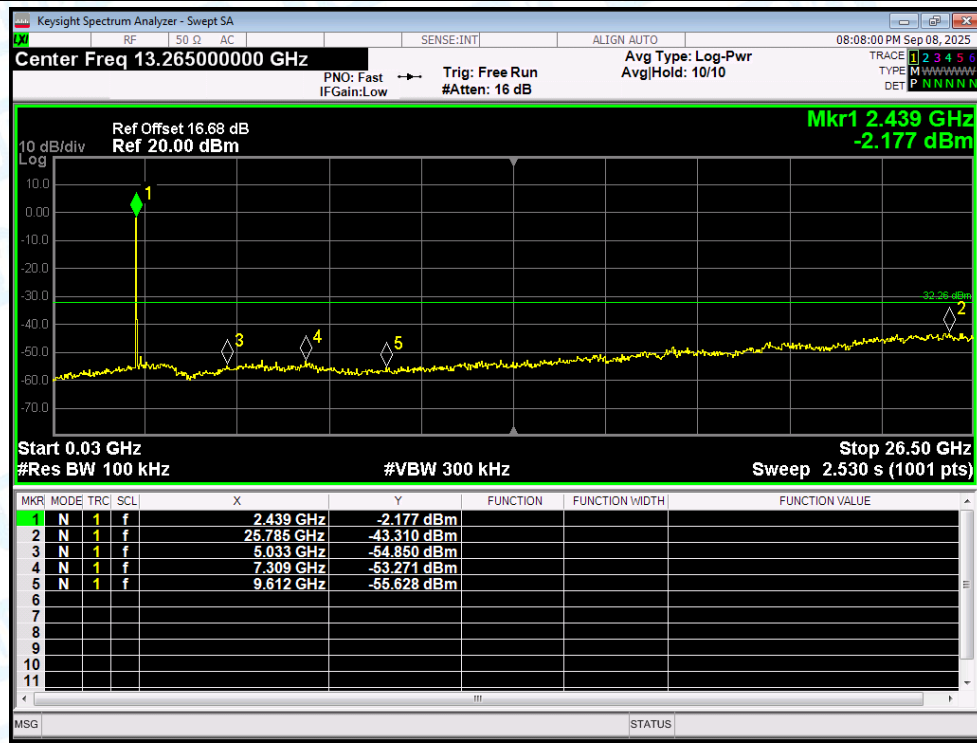


Tx. Spurious NVNT ax(VHT20) 2462MHz Ant1 Ref

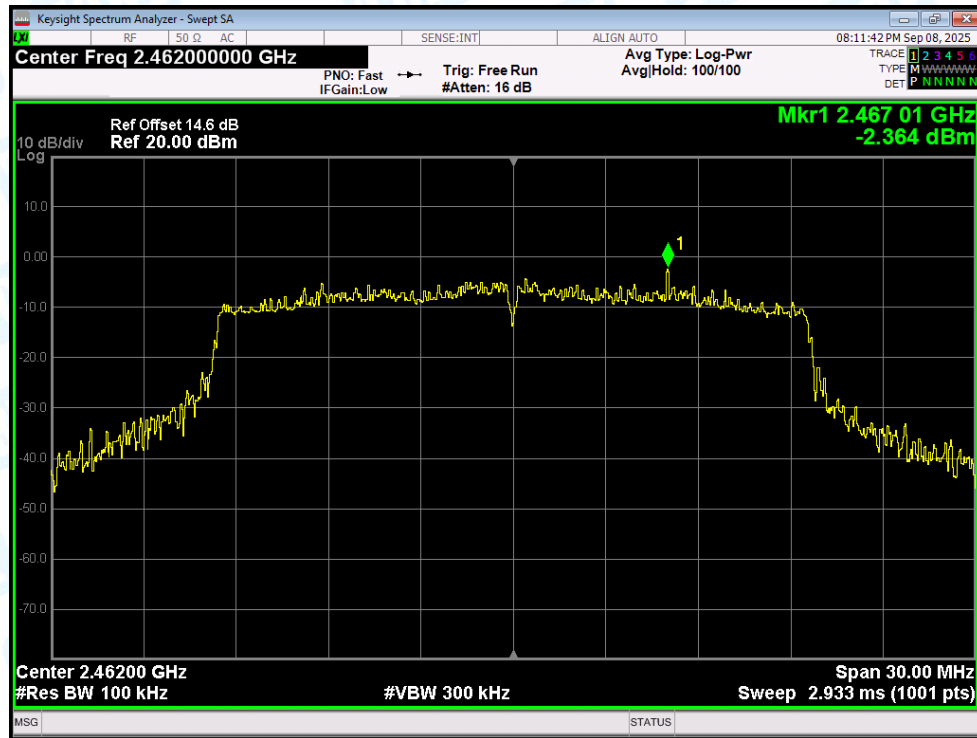


Tx. Spurious NVNT ax(VHT20) 2462MHz Ant1 Emission

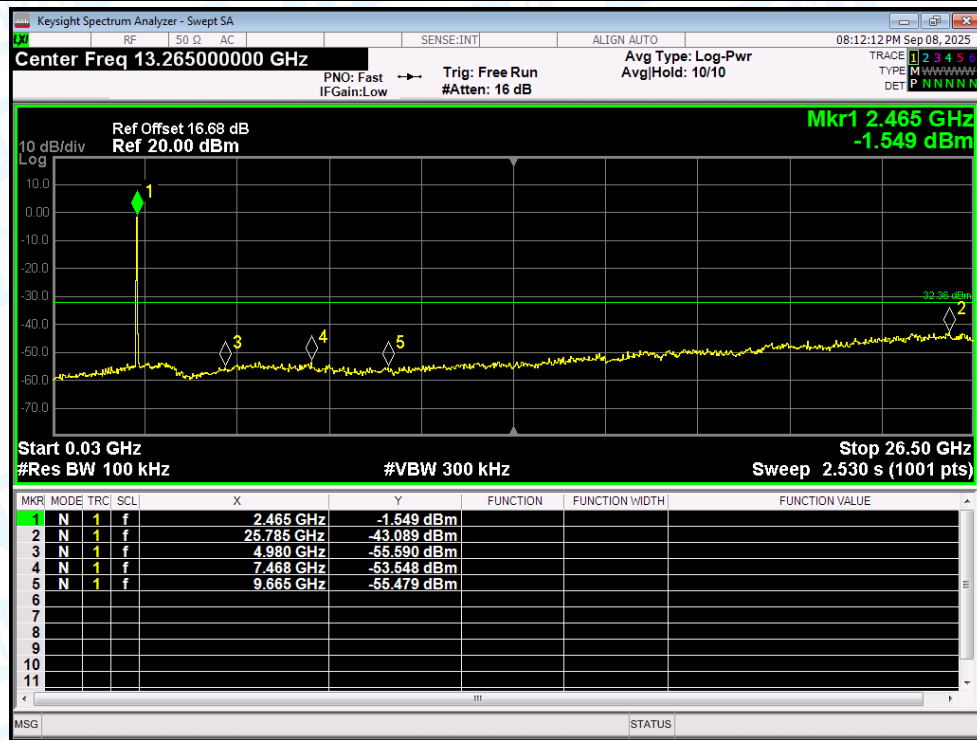


Tx. Spurious NVNT ax(VHT40) 2422MHz Ant1 Ref

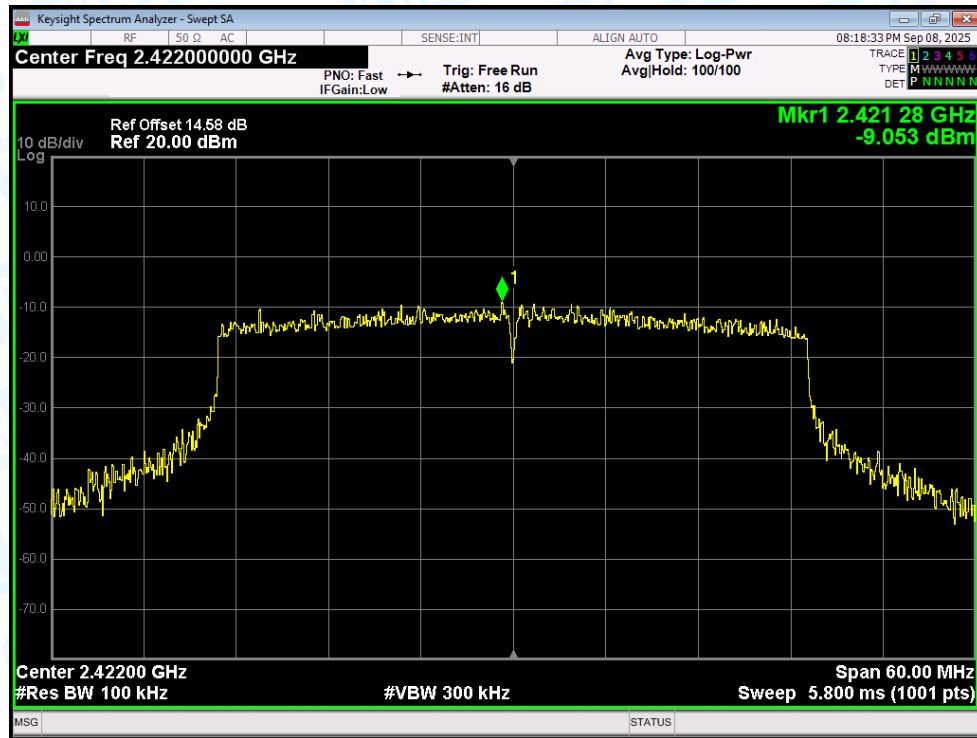


Tx. Spurious NVNT ax(VHT40) 2422MHz Ant1 Emission

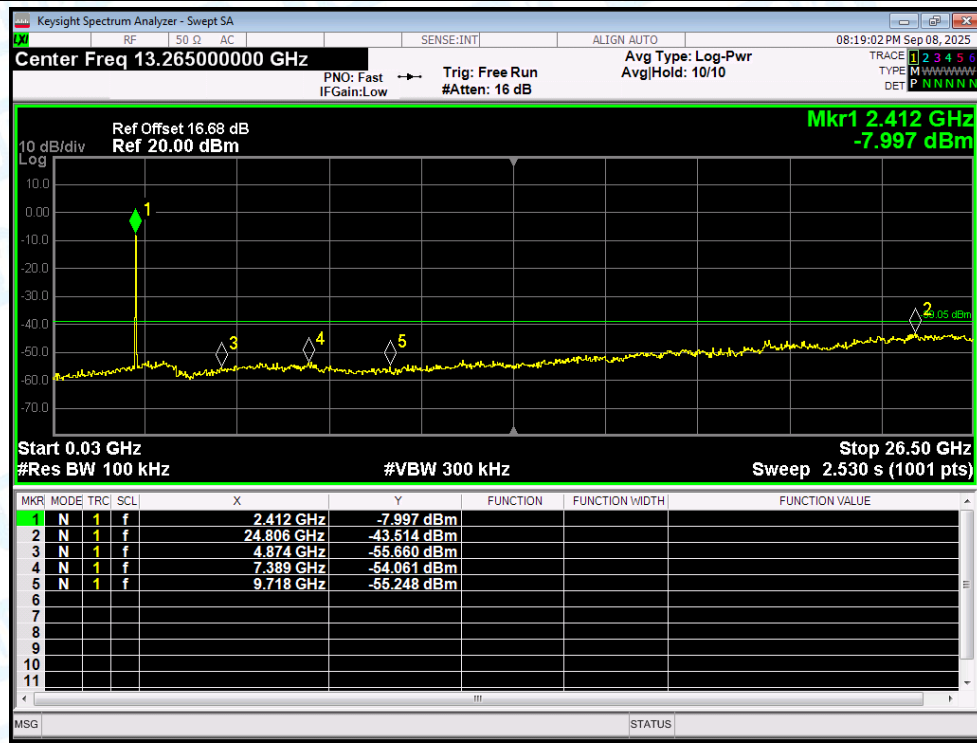


Tx. Spurious NVNT ax(VHT40) 2437MHz Ant1 Ref

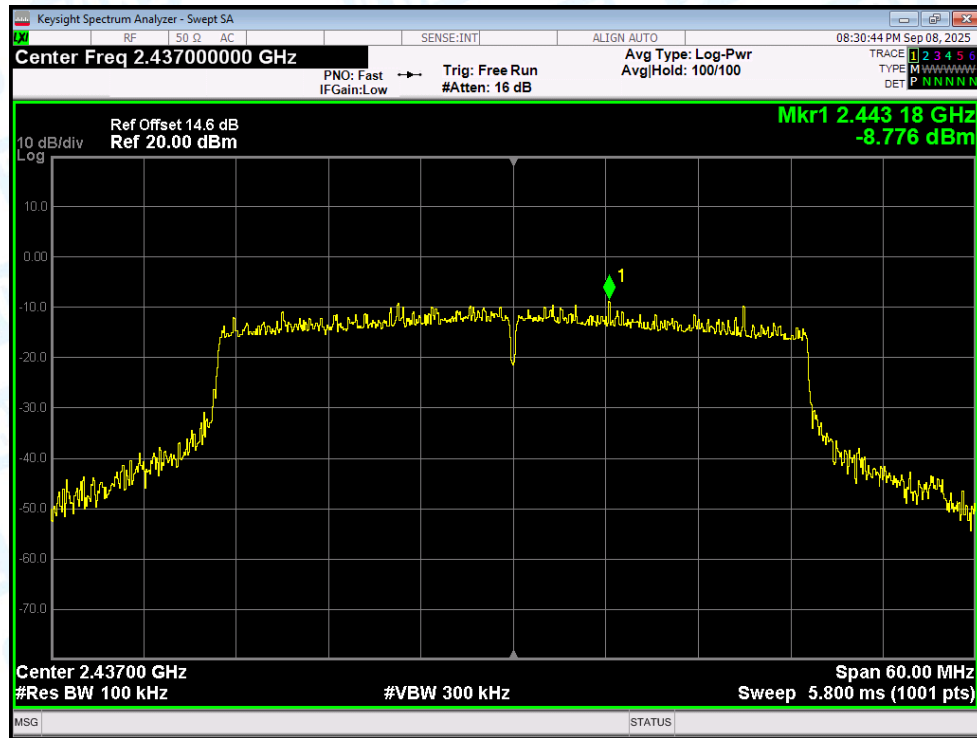


Tx. Spurious NVNT ax(VHT40) 2437MHz Ant1 Emission

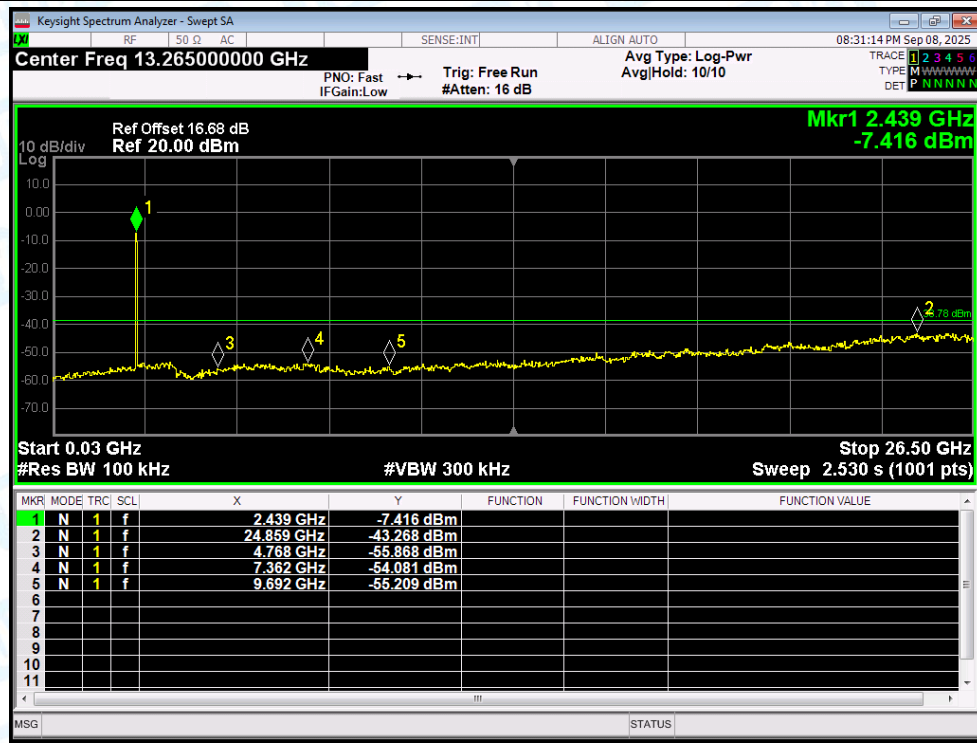


Tx. Spurious NVNT ax(VHT40) 2452MHz Ant1 Ref

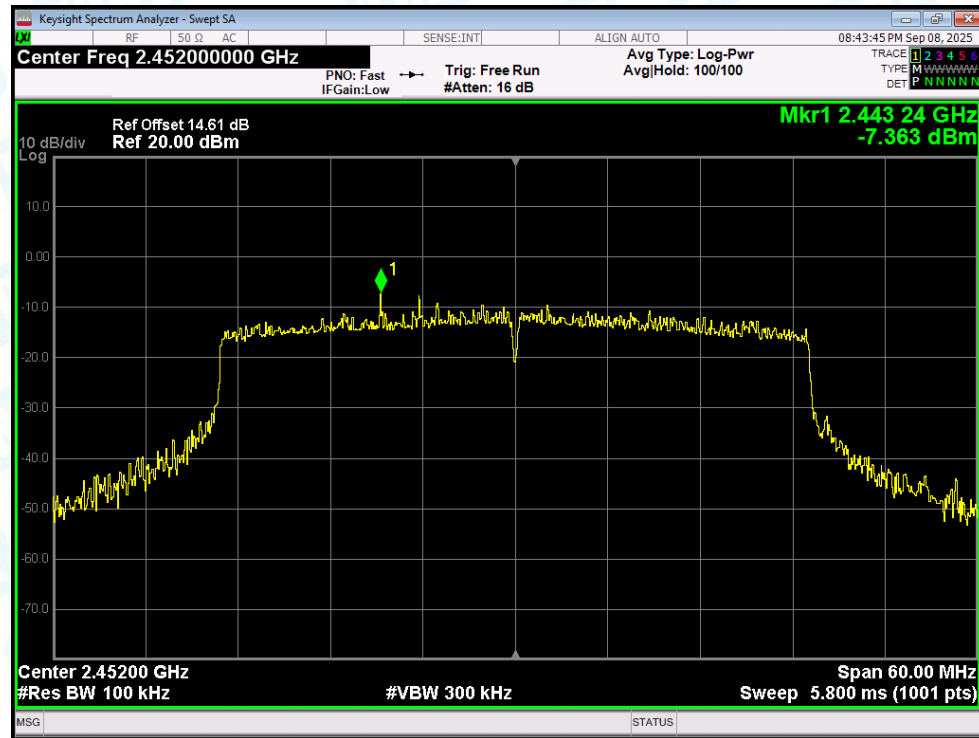


Tx. Spurious NVNT ax(VHT40) 2452MHz Ant1 Emission

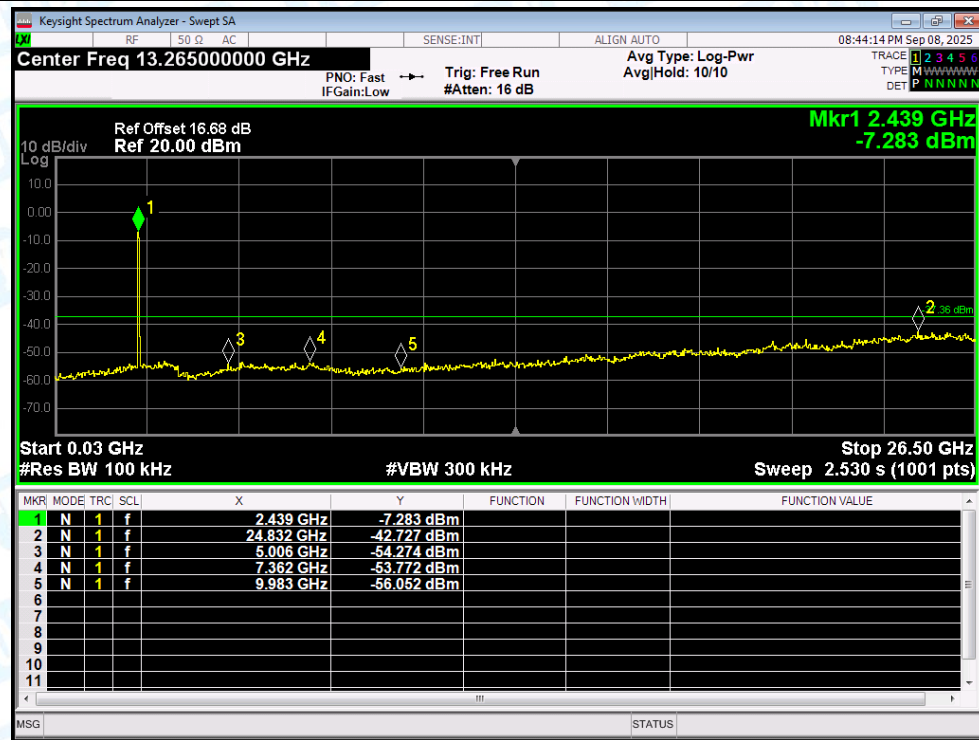


Tx. Spurious NVNT b 2412MHz Ant1 Ref

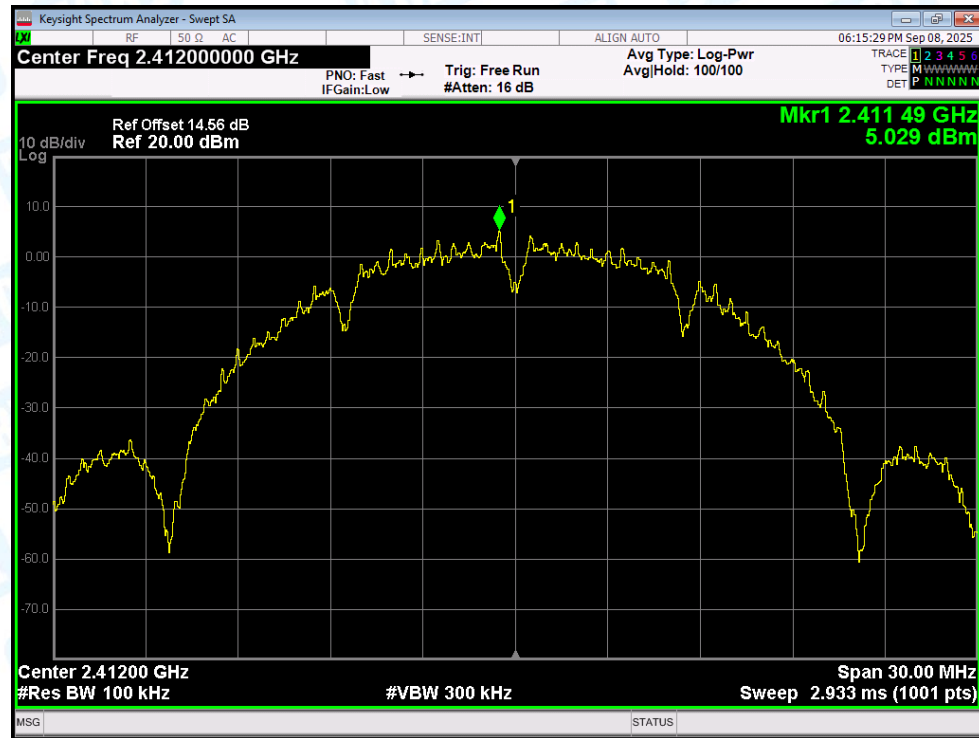


Tx. Spurious NVNT b 2412MHz Ant1 Emission

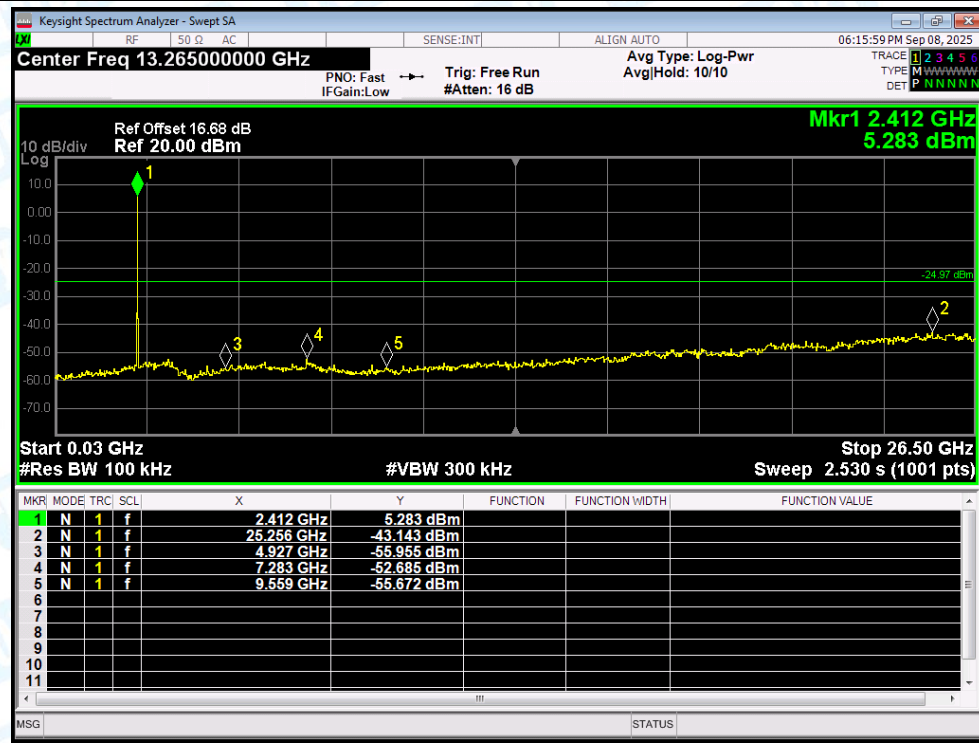


Tx. Spurious NVNT b 2437MHz Ant1 Ref

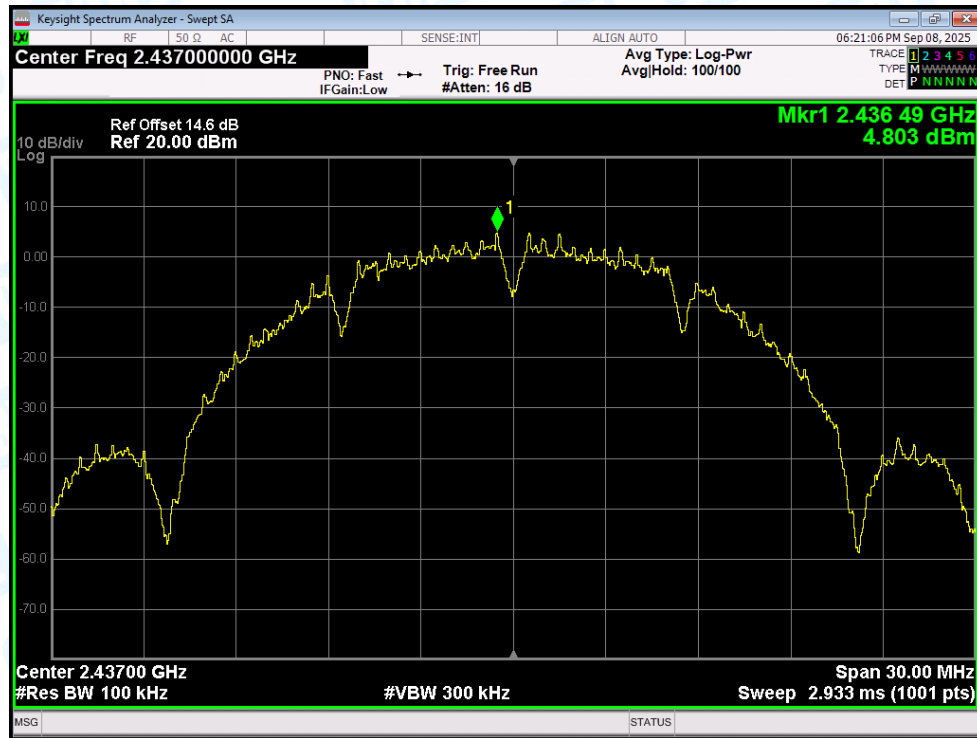


Tx. Spurious NVNT b 2437MHz Ant1 Emission

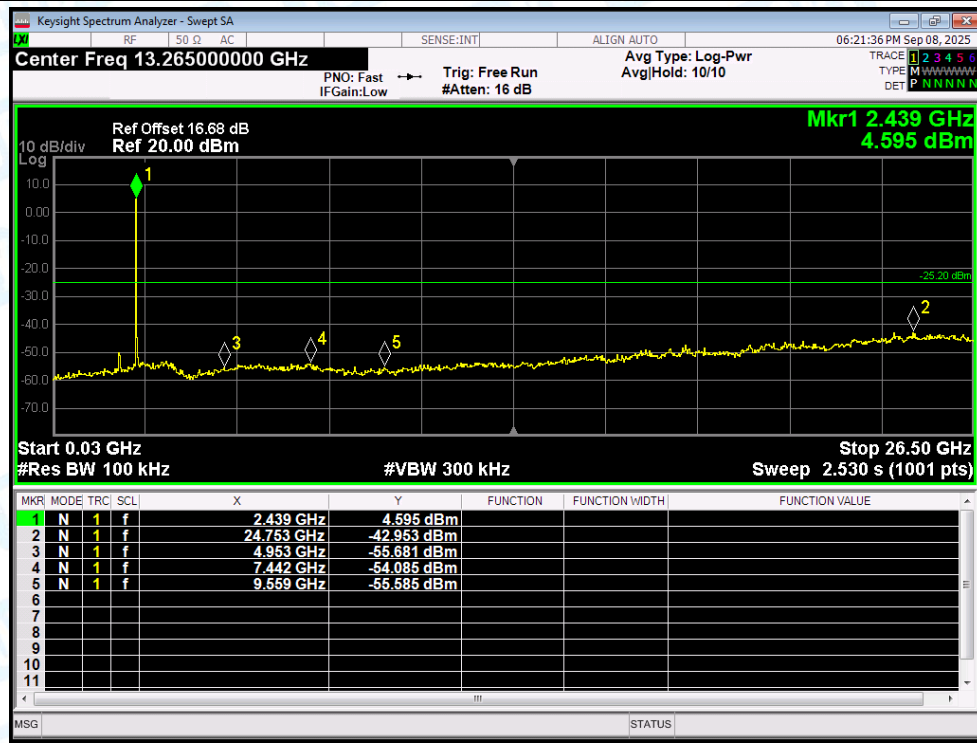


Tx. Spurious NVNT b 2462MHz Ant1 Ref

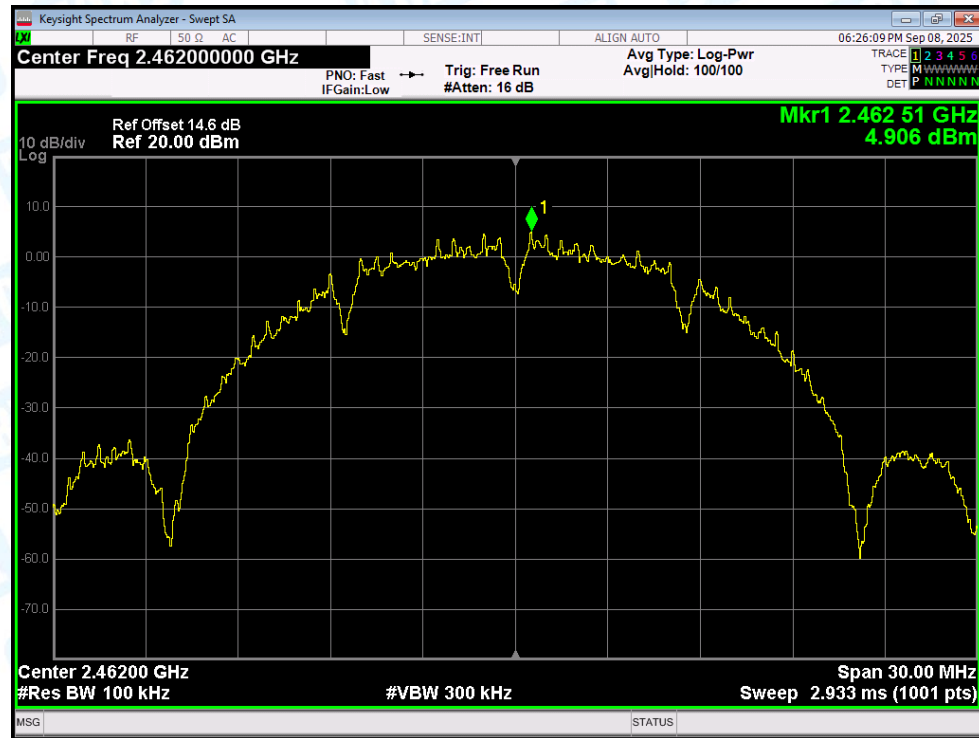


Tx. Spurious NVNT b 2462MHz Ant1 Emission

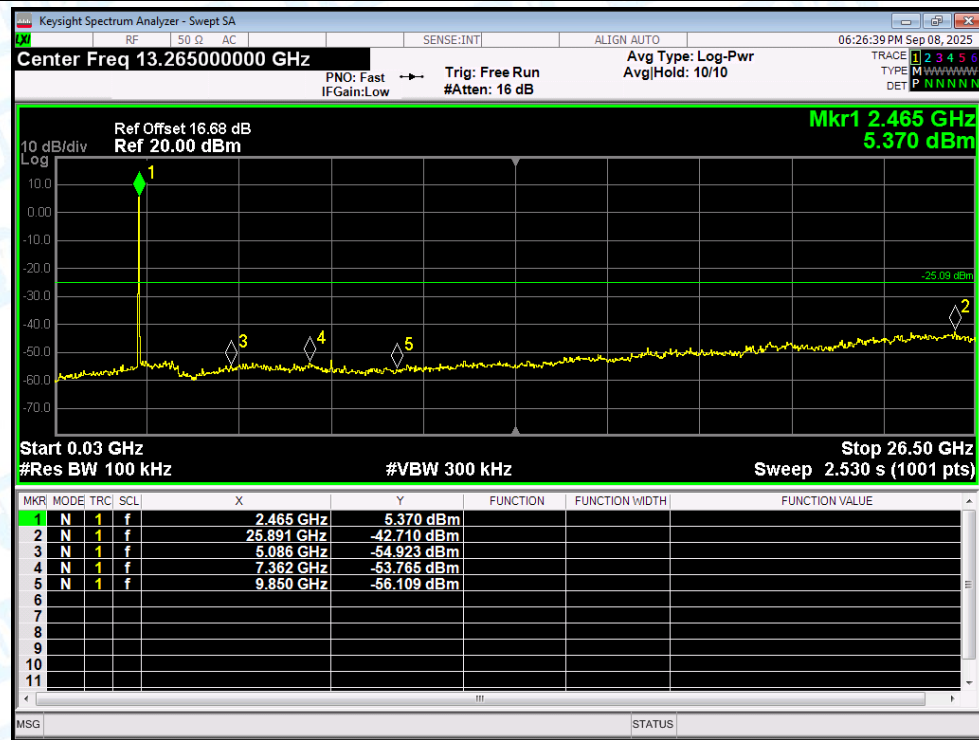


Tx. Spurious NVNT g 2412MHz Ant1 Ref

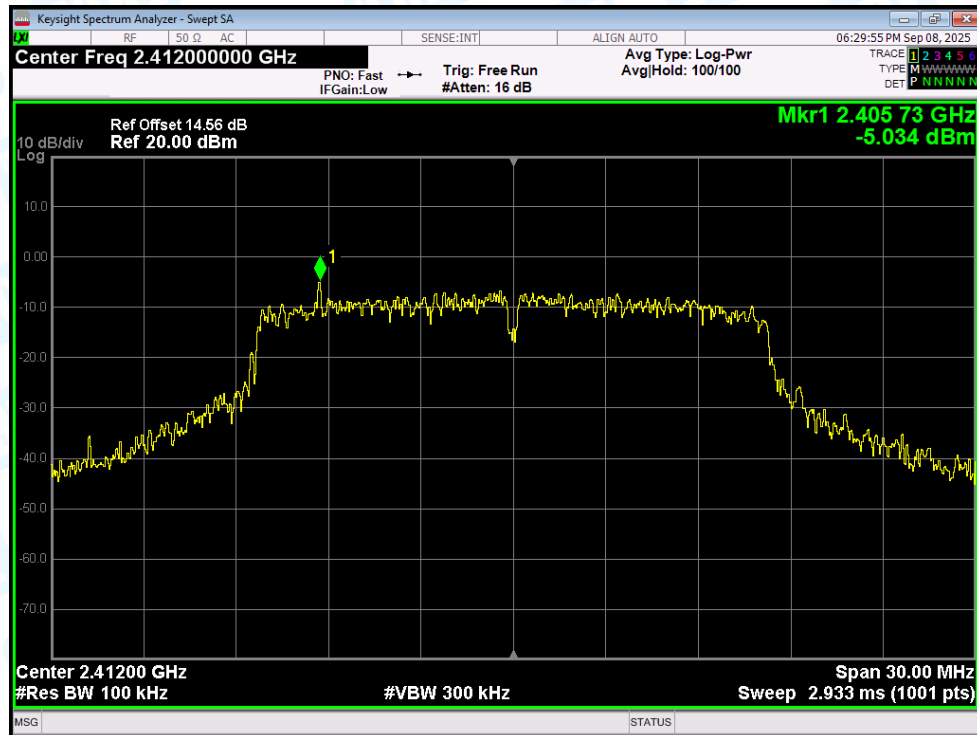


Tx. Spurious NVNT g 2412MHz Ant1 Emission

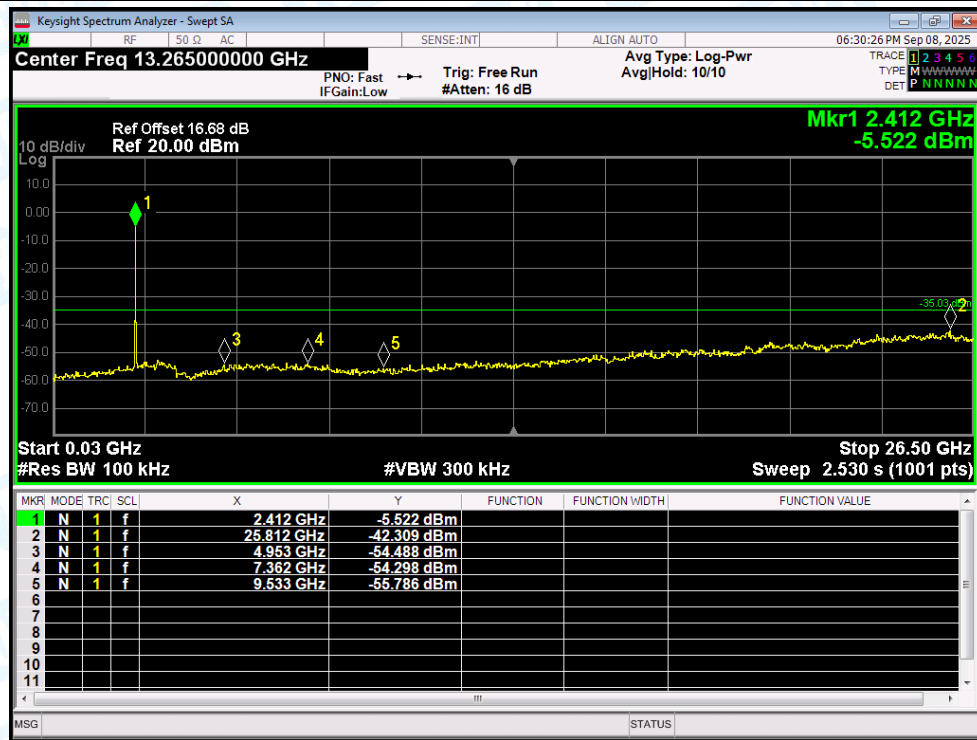


Tx. Spurious NVNT g 2437MHz Ant1 Ref

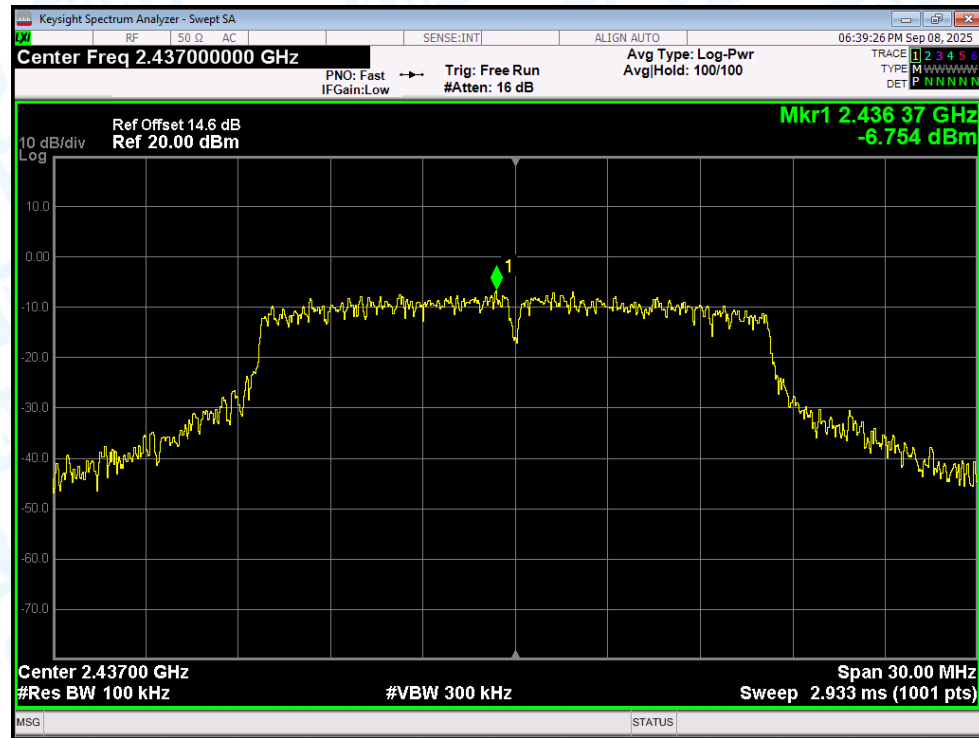


Tx. Spurious NVNT g 2437MHz Ant1 Emission

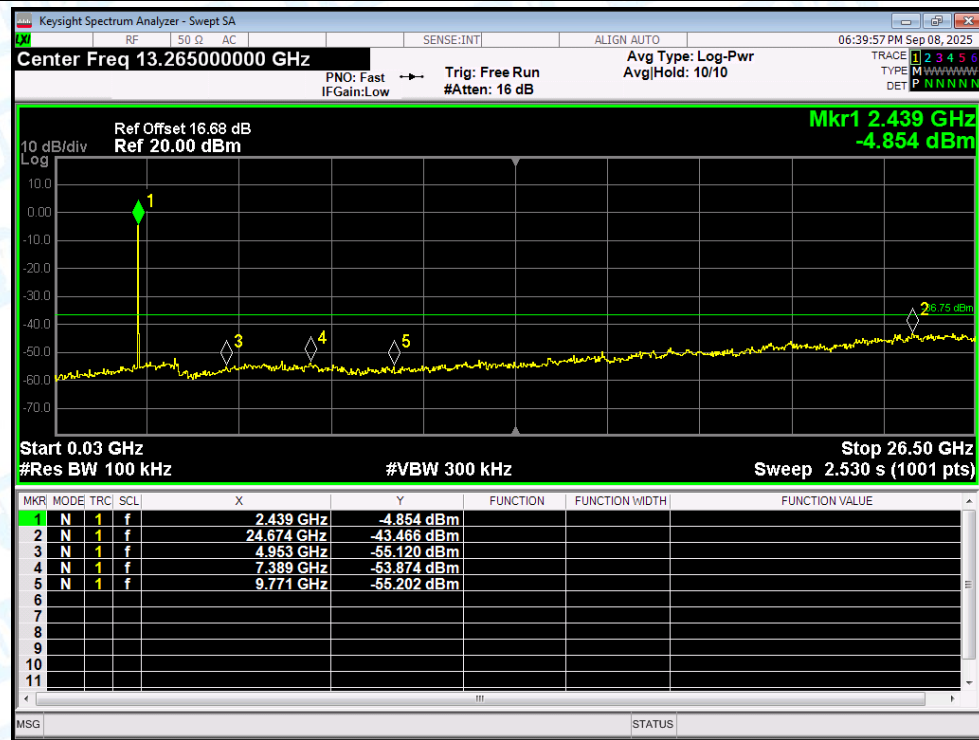


Tx. Spurious NVNT g 2462MHz Ant1 Ref

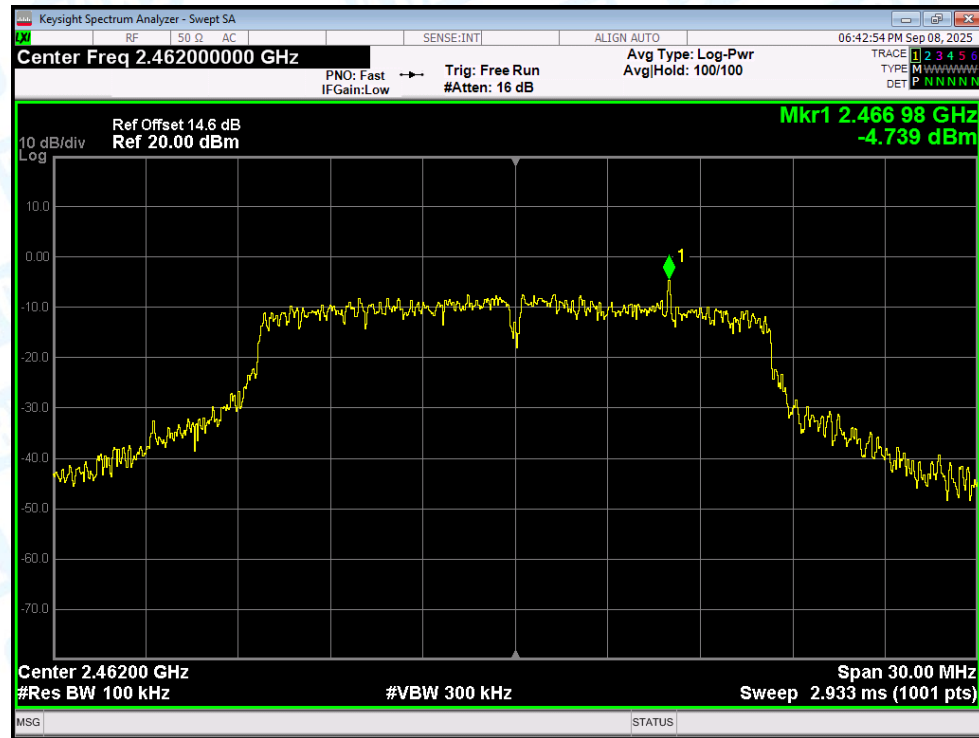


Tx. Spurious NVNT g 2462MHz Ant1 Emission

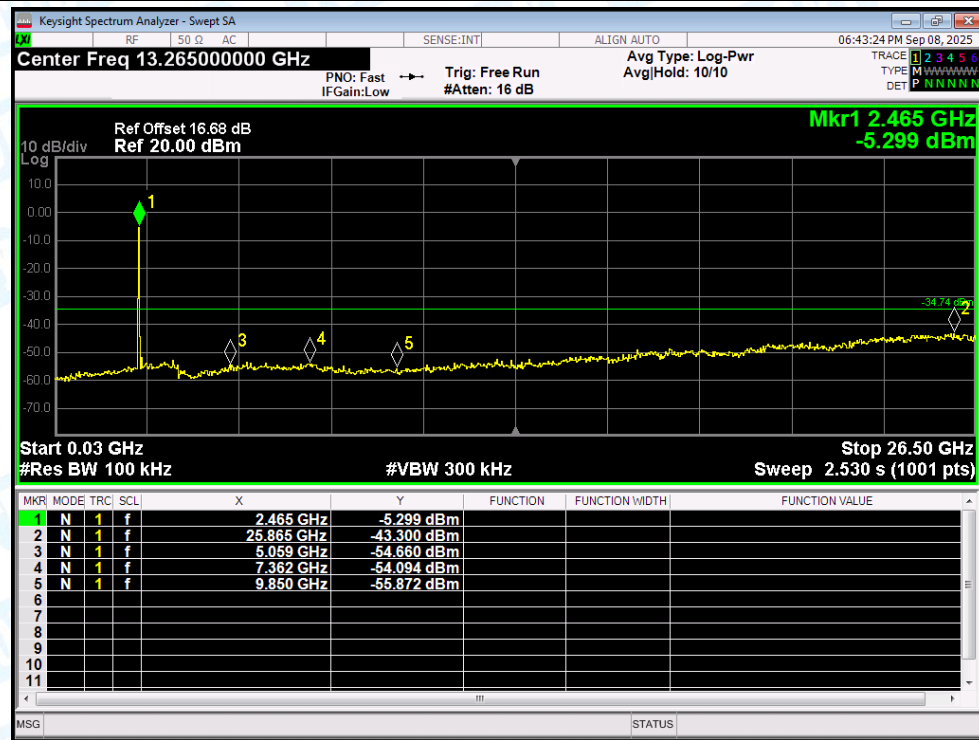


Tx. Spurious NVNT n(HT20) 2412MHz Ant1 Ref

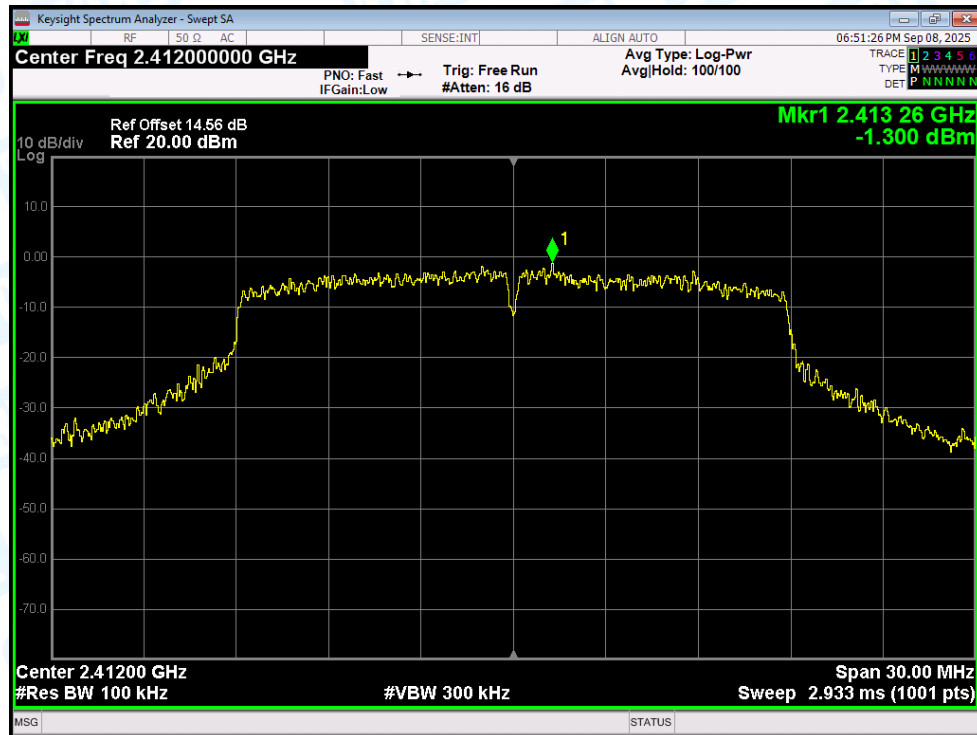


Tx. Spurious NVNT n(HT20) 2412MHz Ant1 Emission

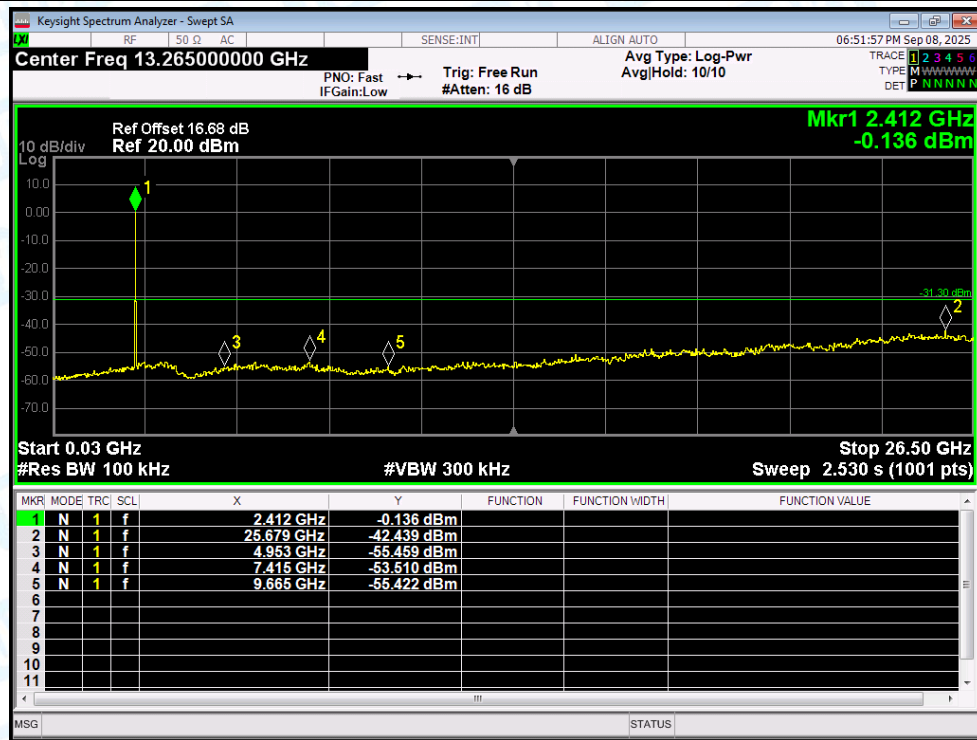


Tx. Spurious NVNT n(HT20) 2437MHz Ant1 Ref

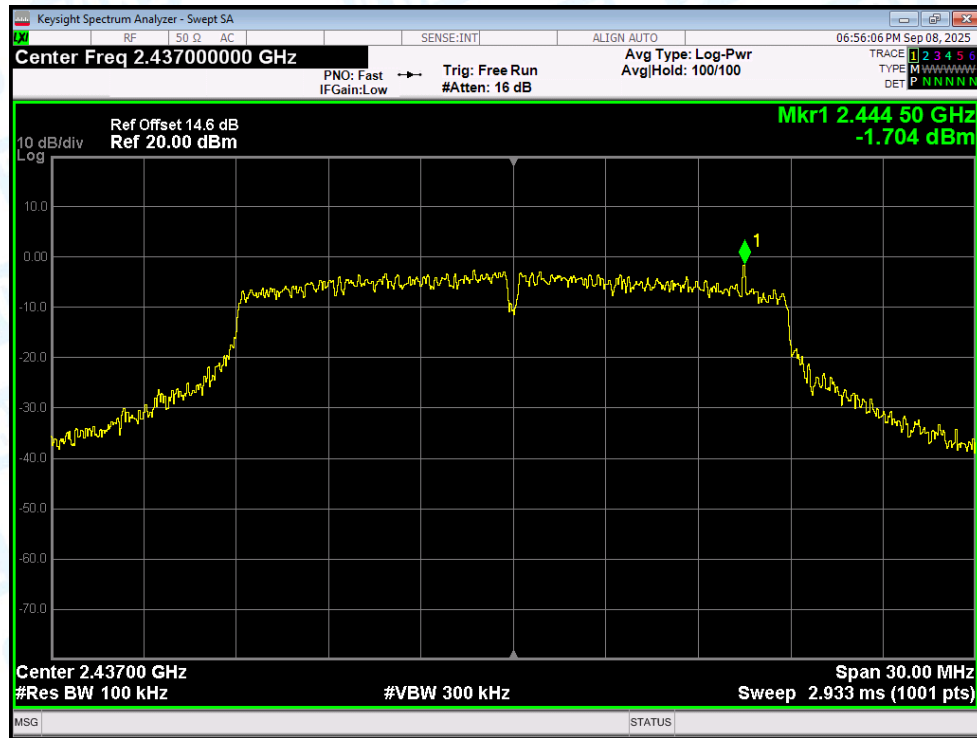


Tx. Spurious NVNT n(HT20) 2437MHz Ant1 Emission

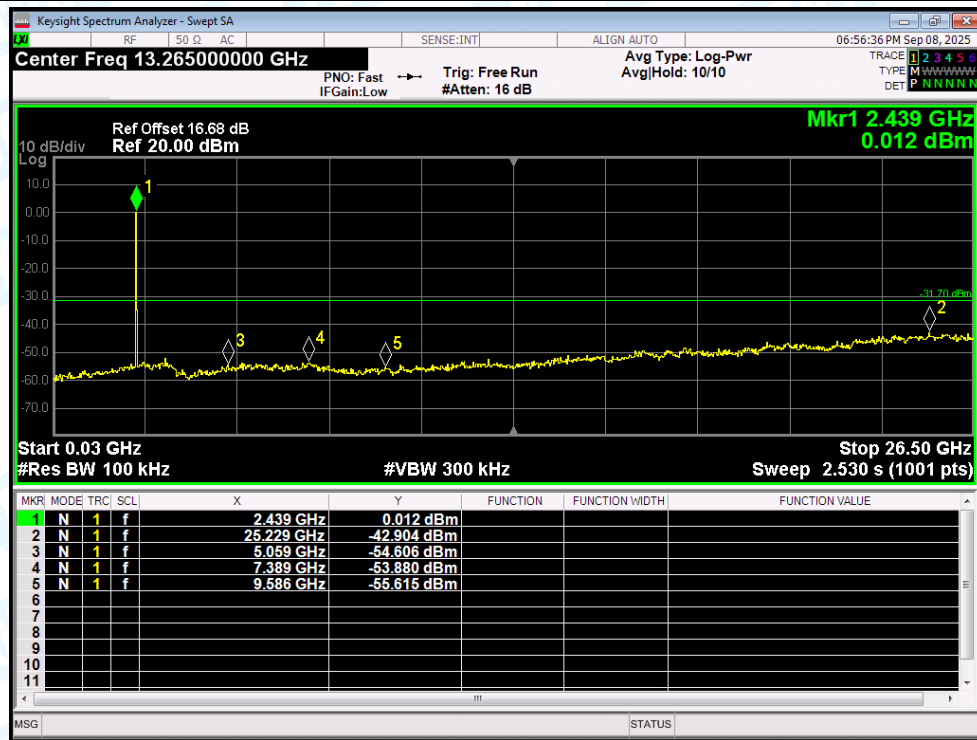


Tx. Spurious NVNT n(HT20) 2462MHz Ant1 Ref

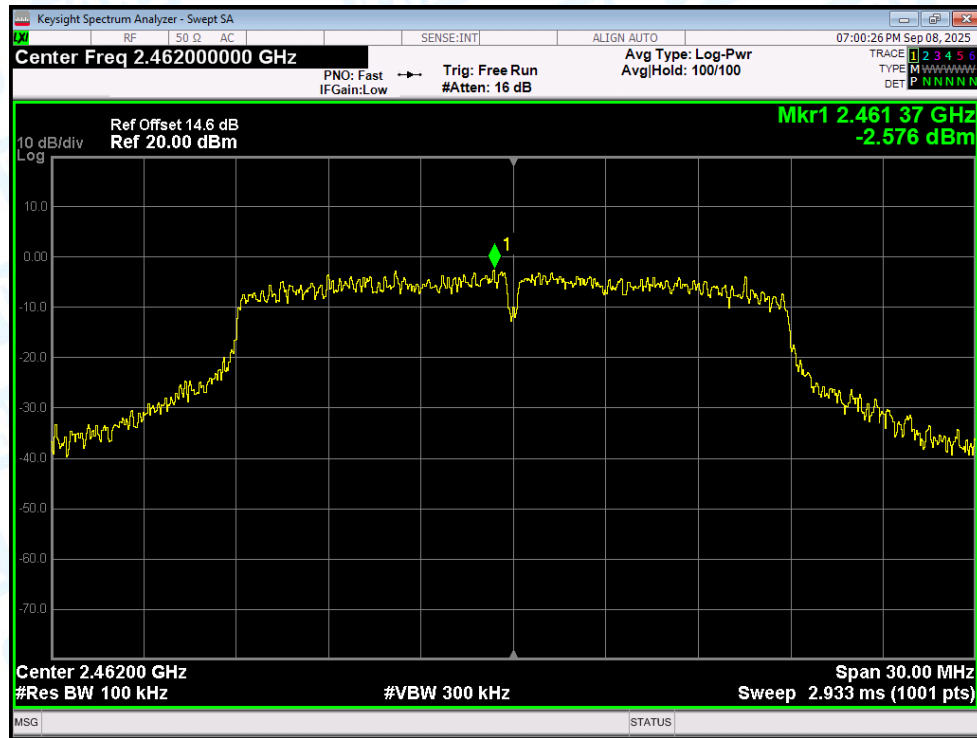

Tx. Spurious NVNT n(HT20) 2462MHz Ant1 Emission

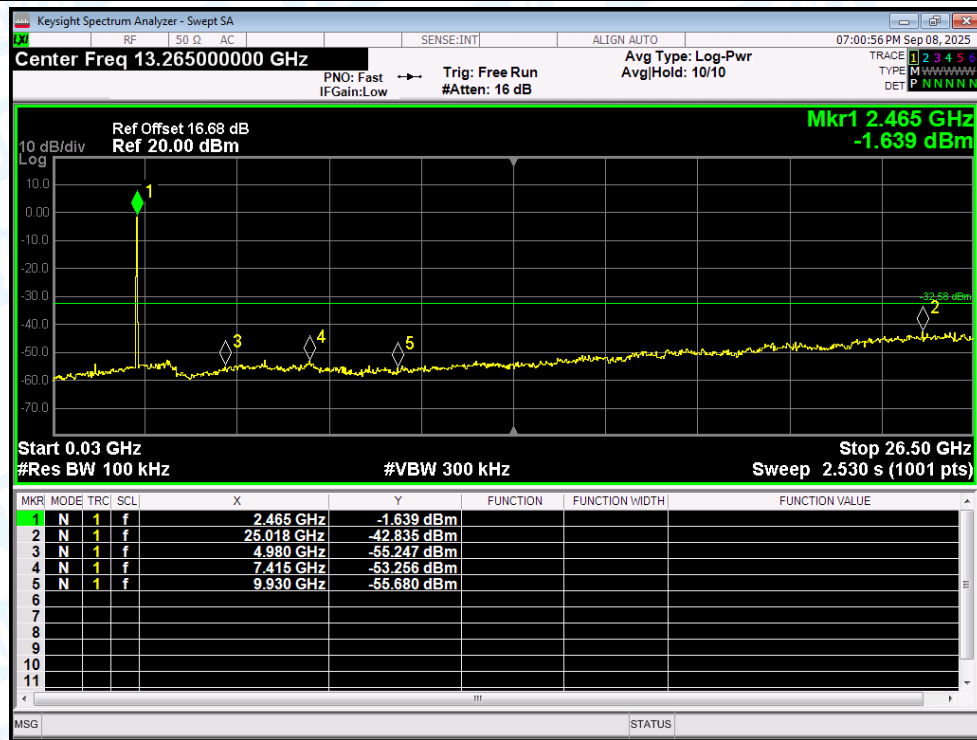

Tx. Spurious NVNT n(HT40) 2422MHz Ant1 Ref

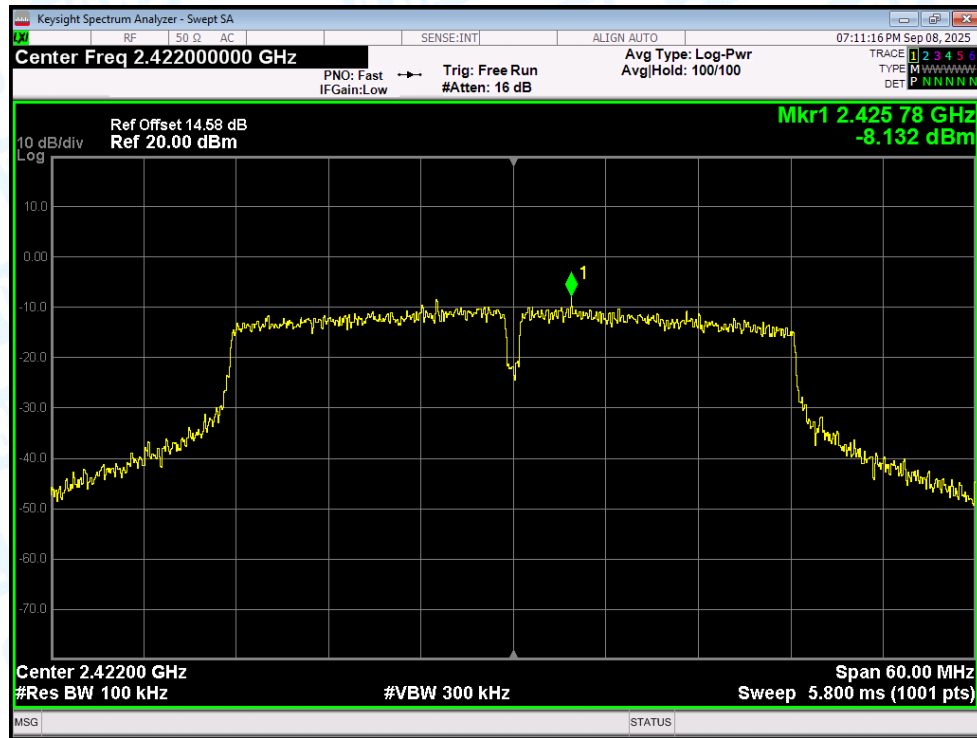

Tx. Spurious NVNT n(HT40) 2422MHz Ant1 Emission

