



Getting to know your device

Front

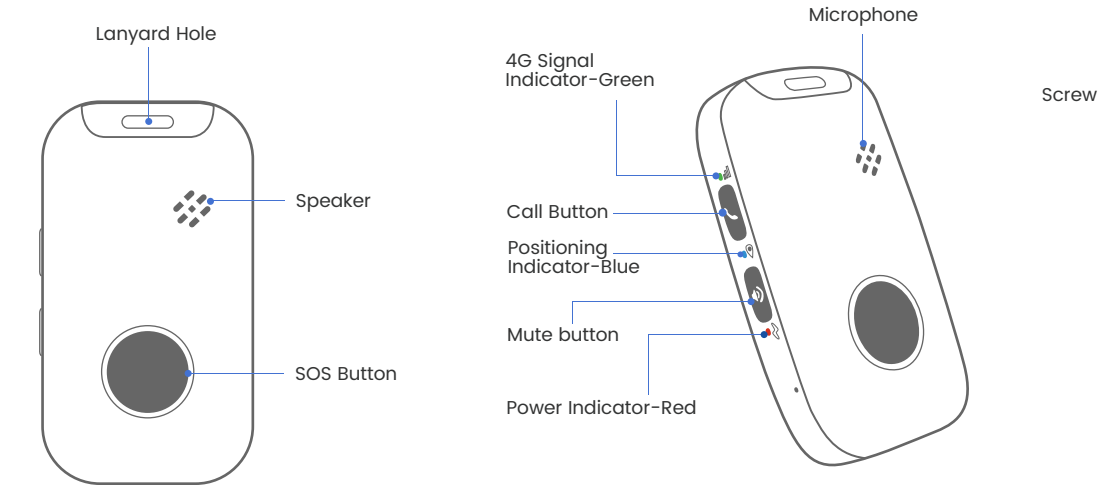


Side

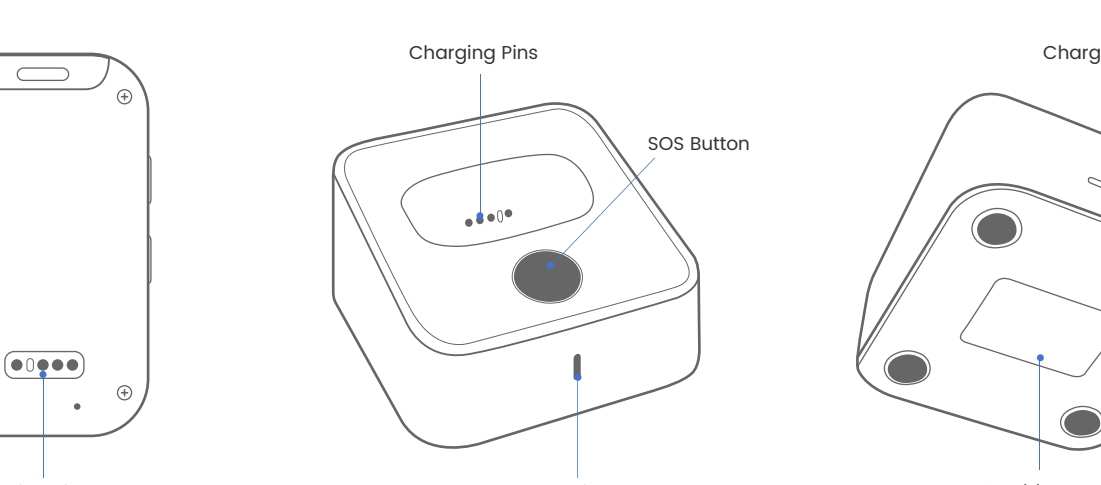


Back



Front

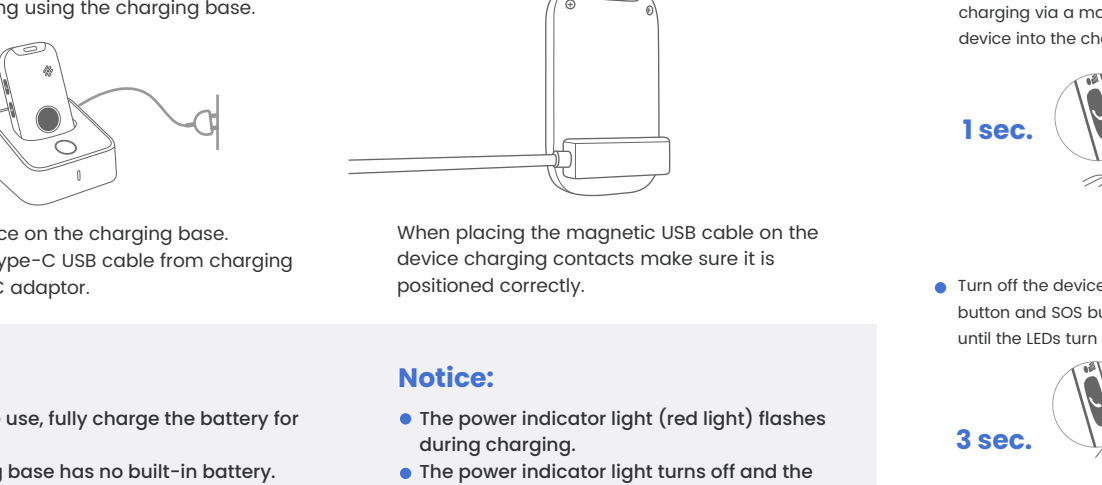

Bottom

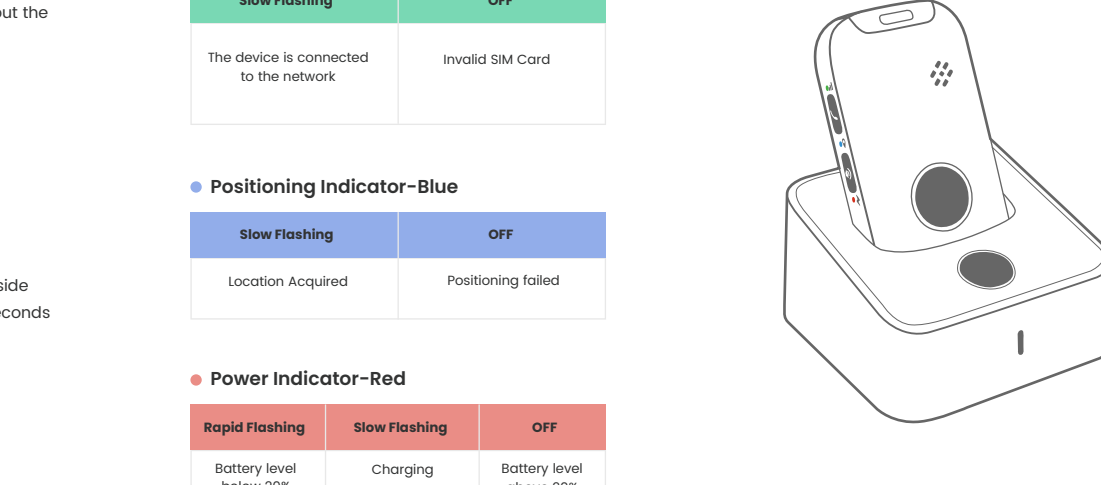

Put the SIM card

01

The SIM card is not included in the package.

02

A Nano SIM card is available from the user's local operator.

03

Unscrew the back cover and remove it.



04

Insert the SIM card and make sure it's activated and in credit.



05

Put the cover back in place and tighten the screws.



TIP:

Before inserting the SIM card, check if it is protected by a PIN code. If it is, use a mobile phone to disable the PIN code.


Notice:

- For first-time use, fully charge the battery for 2-3 hours.
- The charging base has no built-in battery. The white light on the base stays on while charging.

Charge your device

01

Charging using the charging base.



02

Charging with the magnetic USB cable (optional).




Notice:

- The power indicator light (red light) flashes during charging.
- The power indicator light turns off and the SOS button indicator light (white light) remains solid when fully charged.

Switching device ON and OFF


1 sec.

Turn on the device: press the CALL button for 1 second, all the LEDs will flash rapidly. The device can also be turned on automatically by charging via a magnetic USB cable or put the device into the charging base.



3 sec.

Turn off the device: press and hold the side button and SOS button together for 3 seconds until the LEDs turn off.



What do the lights mean?

4G LTE Signal Indicator-Green

Slow Flashing	OFF
The device is connected to the network	Invalid SIM Card

Positioning Indicator-Blue

Slow Flashing	OFF
Location Acquired	Positioning failed

Power Indicator-Red

Rapid Flashing	Slow Flashing	OFF
Battery level below 20%	Charging	Battery level above 20%

FCC Warning

15.19 Labeling requirements. This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.


15.21 Information to user. Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.105 Information to the user. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC RF Radiation Exposure Statement: 1. This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. 2. This equipment complies with RF radiation exposure limits set forth for an uncontrolled environment. 3. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.

Activating an SOS alarm

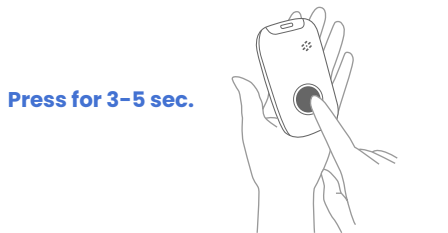

Press for 3–5 sec.

01 When you need help, press the SOS button for 3–5 seconds until you hear a voice prompt, indicating an SOS alarm. This starts the sequence of sending a "help me!" text message to your emergency contact numbers followed by the outgoing calls.

02 If the device fails to connect to the first number, it will call the second number after delay of 10 seconds. In case the second number fails to be connected as well, the system will connect to the third number, etc.

03 Between each call, there will be a 10-second delay, during which time, the user can stop the call sequence or prevent a possible false alarm by pressing the SOS button.

04 Use the side buttons +/– to adjust the sound volume during a call.

TIP:


Please remember to program emergency contact numbers. It is not mandatory for all ten authorized numbers to be set, however, a minimum of one must always be set.

Please be patient during the call sequence. There can be short delays as the alarm calls phones which maybe out of range or delivered to recipients' voicemail.

Activate SOS alarm via Charging Base

Pressing the SOS button for 3–5 seconds on the charging base can trigger the SOS alarm process.

Press for 3–5 sec.

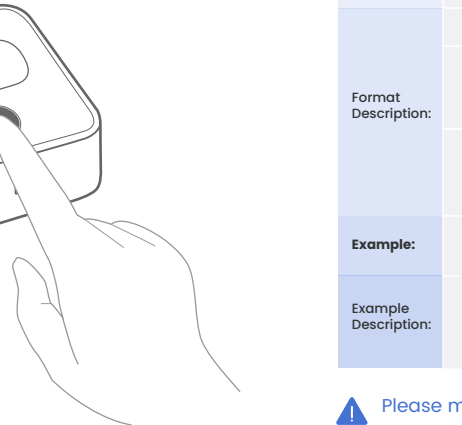

Set contact number via text message

You can set up to **10 contacts**. These are programmed by sending text commands to your alarm. You do not have to use all 10 contact.

SMS command format:	A<Contact No.>,<Send text message yes/no>,<Call yes/no>,<Phone number>
Format Description:	Contact No. Value: 1–10 Text: 0 – Do not receive SMS when there is an alarm 1 – Receive SMS when there is an alarm Call: 0 – Do not receive Call when there is an alarm 1 – Receive Call when there is an alarm
Example:	A1,1,1,012345678
Example Description:	I want to call SOS to number "012345678" in an emergency and send him/her an emergency message.

⚠ Please make sure there are no spaces anywhere in your text message.

Setting the fall detection sensitivity

The device offers 1 to 9 sensitivity levels, with higher numbers indicating greater sensitivity. The default level is set to 5. When the device detects a fall, it will automatically call and send a text message to the contacts.

SMS command format:	FL<ON/OFF>,<Sensitivity level>,<Call Yes/No>
Format Description:	ON/OFF: 0 – Fall down alarm off 1 – Fall down alarm on Sensitivity Level: 1–9 1 – least sensitive 9 – most sensitive Call Yes/No 0 – Do not receive a call when there is an alarm 1 – Receive call when there is an alarm
Example:	FL1,6,1
Example Description:	Turn on fall detection, with a detection sensitivity of level 6. When the device detects a user falling, it will call the SOS contact.

⚠ Please make sure there are no spaces anywhere in your text message.

Setting the fall detection sensitivity

The device offers 1 to 9 sensitivity levels, with higher numbers indicating greater sensitivity. The default level is set to 5. When the device detects a fall, it will automatically call and send a text message to the contacts.

SMS command format:	loc
Format Description:	After send LOC, device will be looking for the signal of Bluetooth, WIFI and GPS, if Bluetooth location is fixed, device will stop searching WIFI and GPS signal.
Description Reply	GPS Loc! Now: Loc Time:01/09/2021 13:59:54 Speed:0km/h Altitude:86.6 Battery:17% www.google.com/~maps?q=22.6537246,114.0005838

⚠ Please make sure there are no spaces anywhere in your text message.

Acquiring Location

To obtain an initial location for the device's features, use it outdoors or near a window with a clear view of the sky. This will help the device connect to the satellites and acquire a location fix. Please note that this may take a few minutes, as environmental factors such as weather, obstructions, or signal interference can affect the connection.

SMS command format:	loc
Format Description:	After send LOC, device will be looking for the signal of Bluetooth, WIFI and GPS, if Bluetooth location is fixed, device will stop searching WIFI and GPS signal.
Description Reply	GPS Loc! Now: Loc Time:01/09/2021 13:59:54 Speed:0km/h Altitude:86.6 Battery:17% www.google.com/~maps?q=22.6537246,114.0005838

⚠ Please make sure there are no spaces anywhere in your text message.

Acquiring Location

To obtain an initial location for the device's features, use it outdoors or near a window with a clear view of the sky. This will help the device connect to the satellites and acquire a location fix. Please note that this may take a few minutes, as environmental factors such as weather, obstructions, or signal interference can affect the connection.

SMS command format:	loc
Format Description:	After send LOC, device will be looking for the signal of Bluetooth, WIFI and GPS, if Bluetooth location is fixed, device will stop searching WIFI and GPS signal.
Description Reply	GPS Loc! Now: Loc Time:01/09/2021 13:59:54 Speed:0km/h Altitude:86.6 Battery:17% www.google.com/~maps?q=22.6537246,114.0005838

⚠ Please make sure there are no spaces anywhere in your text message.

Acquiring Location

To obtain an initial location for the device's features, use it outdoors or near a window with a clear view of the sky. This will help the device connect to the satellites and acquire a location fix. Please note that this may take a few minutes, as environmental factors such as weather, obstructions, or signal interference can affect the connection.

SMS command format:	loc
Format Description:	After send LOC, device will be looking for the signal of Bluetooth, WIFI and GPS, if Bluetooth location is fixed, device will stop searching WIFI and GPS signal.
Description Reply	GPS Loc! Now: Loc Time:01/09/2021 13:59:54 Speed:0km/h Altitude:86.6 Battery:17% www.google.com/~maps?q=22.6537246,114.0005838

⚠ Please make sure there are no spaces anywhere in your text message.

Acquiring Location

To obtain an initial location for the device's features, use it outdoors or near a window with a clear view of the sky. This will help the device connect to the satellites and acquire a location fix. Please note that this may take a few minutes, as environmental factors such as weather, obstructions, or signal interference can affect the connection.

SMS command format:	loc
Format Description:	After send LOC, device will be looking for the signal of Bluetooth, WIFI and GPS, if Bluetooth location is fixed, device will stop searching WIFI and GPS signal.
Description Reply	GPS Loc! Now: Loc Time:01/09/2021 13:59:54 Speed:0km/h Altitude:86.6 Battery:17% www.google.com/~maps?q=22.6537246,114.0005838

⚠ Please make sure there are no spaces anywhere in your text message.


Acquiring Location

To obtain an initial location for the device's features, use it outdoors or near a window with a clear view of the sky. This will help the device connect to the satellites and acquire a location fix. Please note that this may take a few minutes, as environmental factors such as weather, obstructions, or signal interference can affect the connection.

SMS command format:	loc
Format Description:	After send LOC, device will be looking for the signal of Bluetooth, WIFI and GPS, if Bluetooth location is fixed, device will stop searching WIFI and GPS signal.
Description Reply	GPS Loc! Now: Loc Time:01/09/2021 13:59:54 Speed:0km/h Altitude:86.6 Battery:17% www.google.com/~maps?q=22.6537246,114.0005838

⚠ Please make sure there are no spaces anywhere in your text message.

Personal Mobile Alarm Device Quick Start Guide

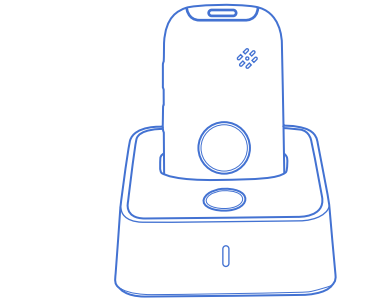


4G
4G LTE

Wi-Fi

Bluetooth

LoRa

Personal Mobile Alarm Device Quick Start Guide

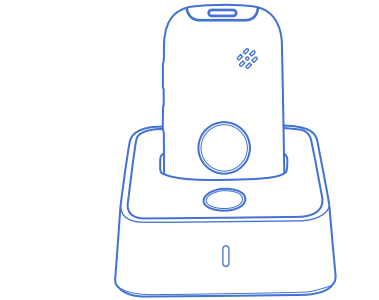

4G
4G LTE

Wi-Fi

Bluetooth

LoRa