





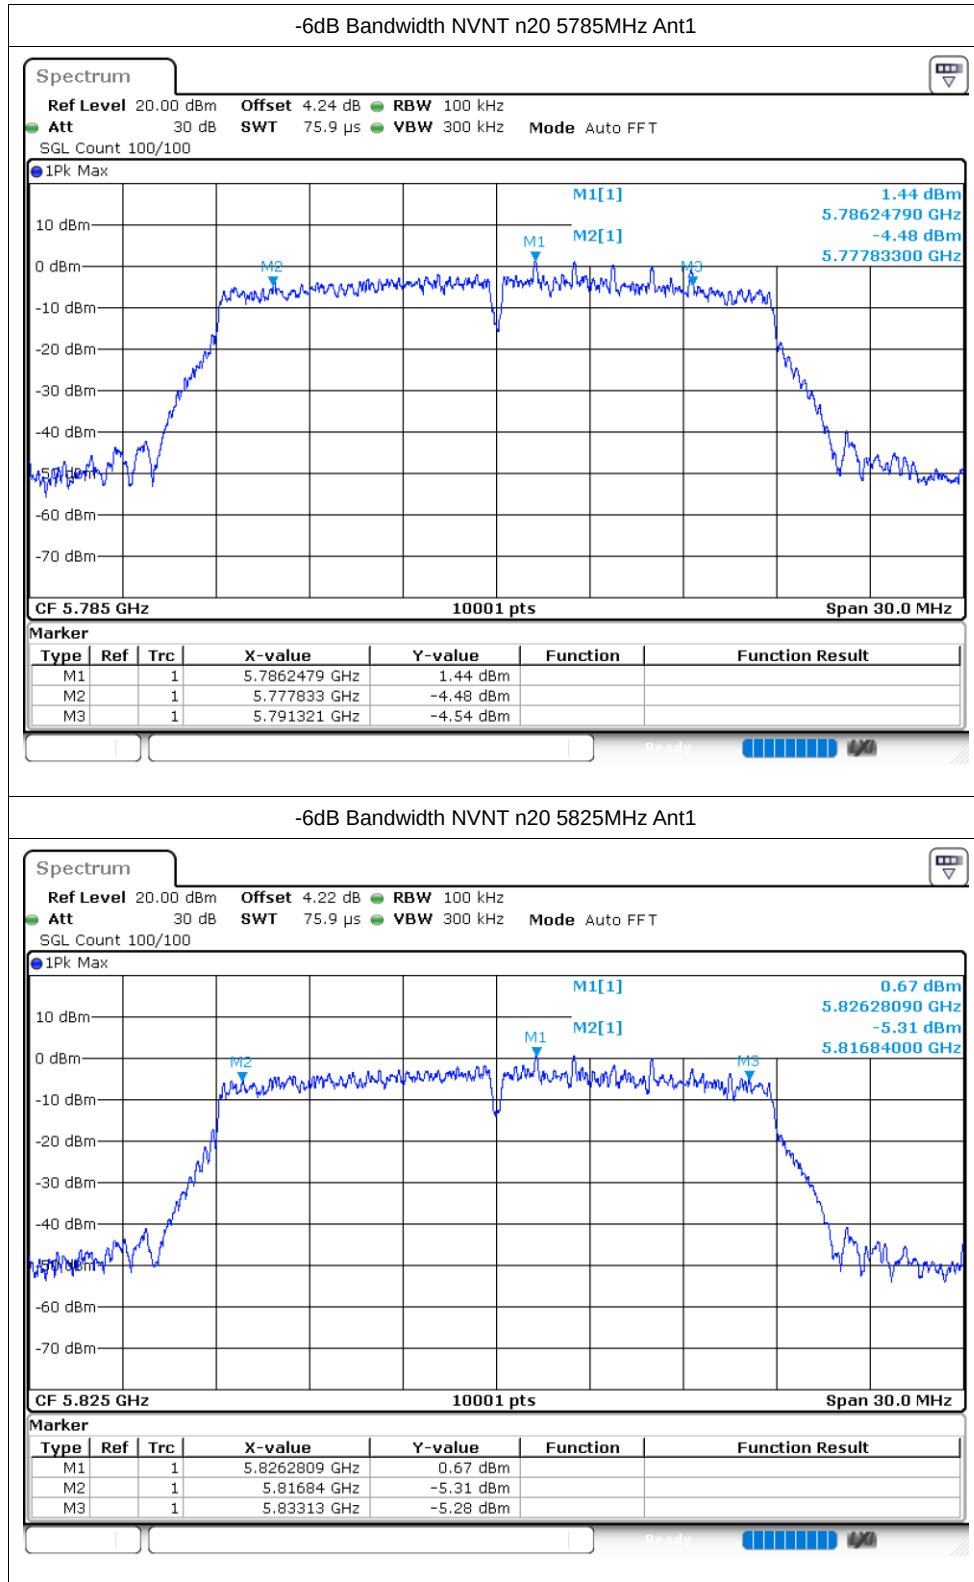

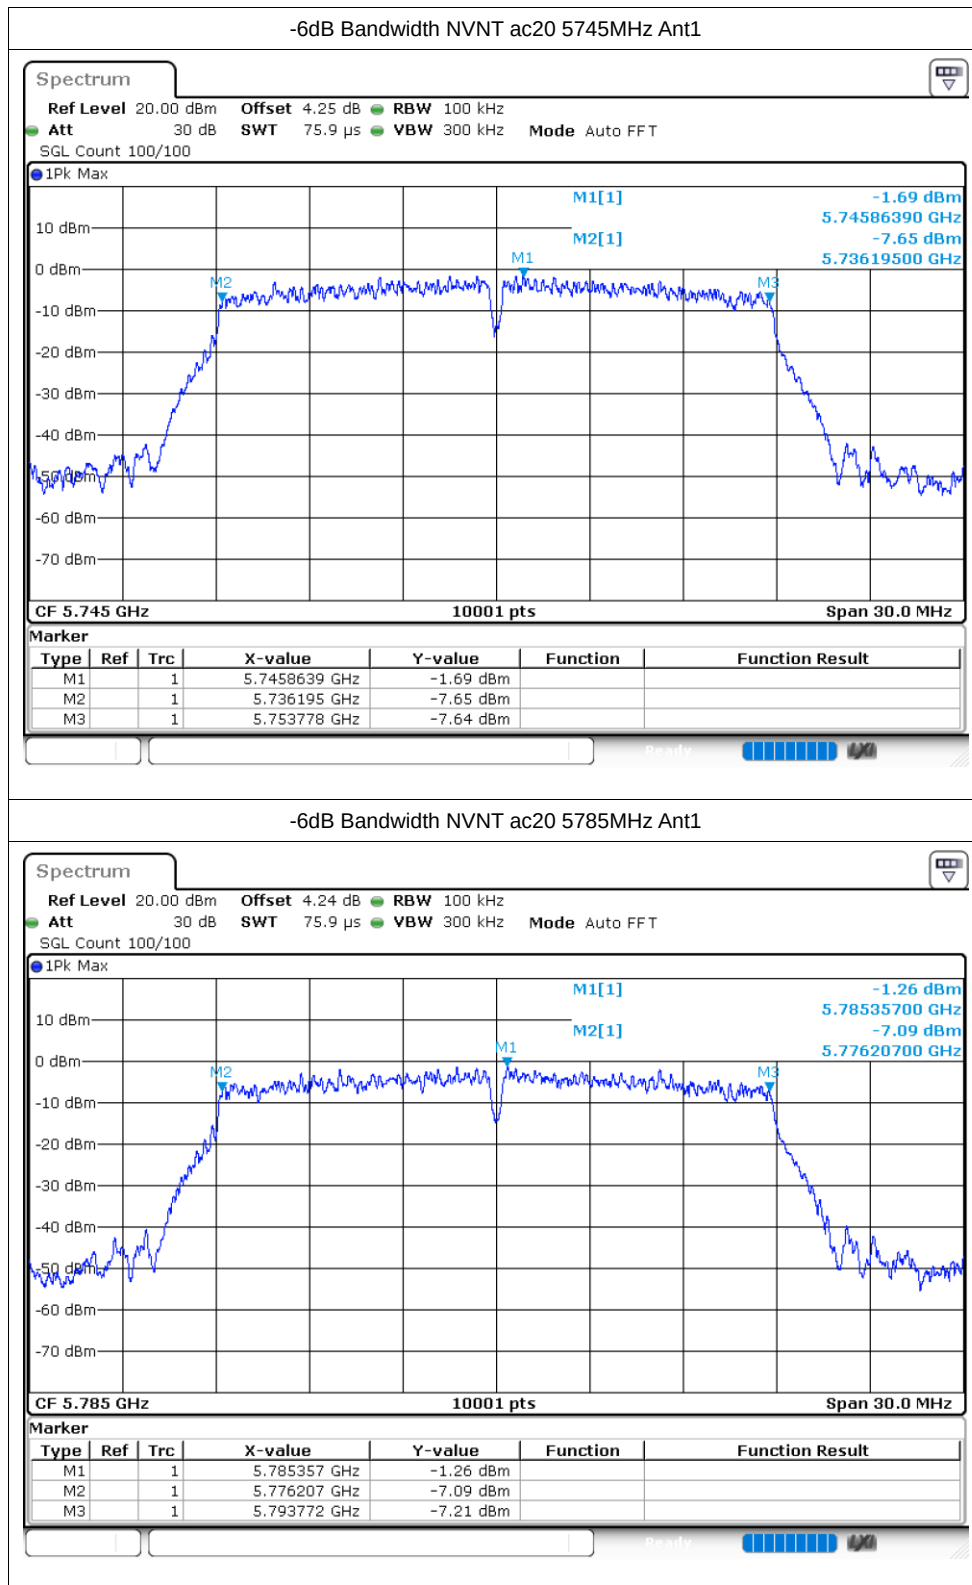

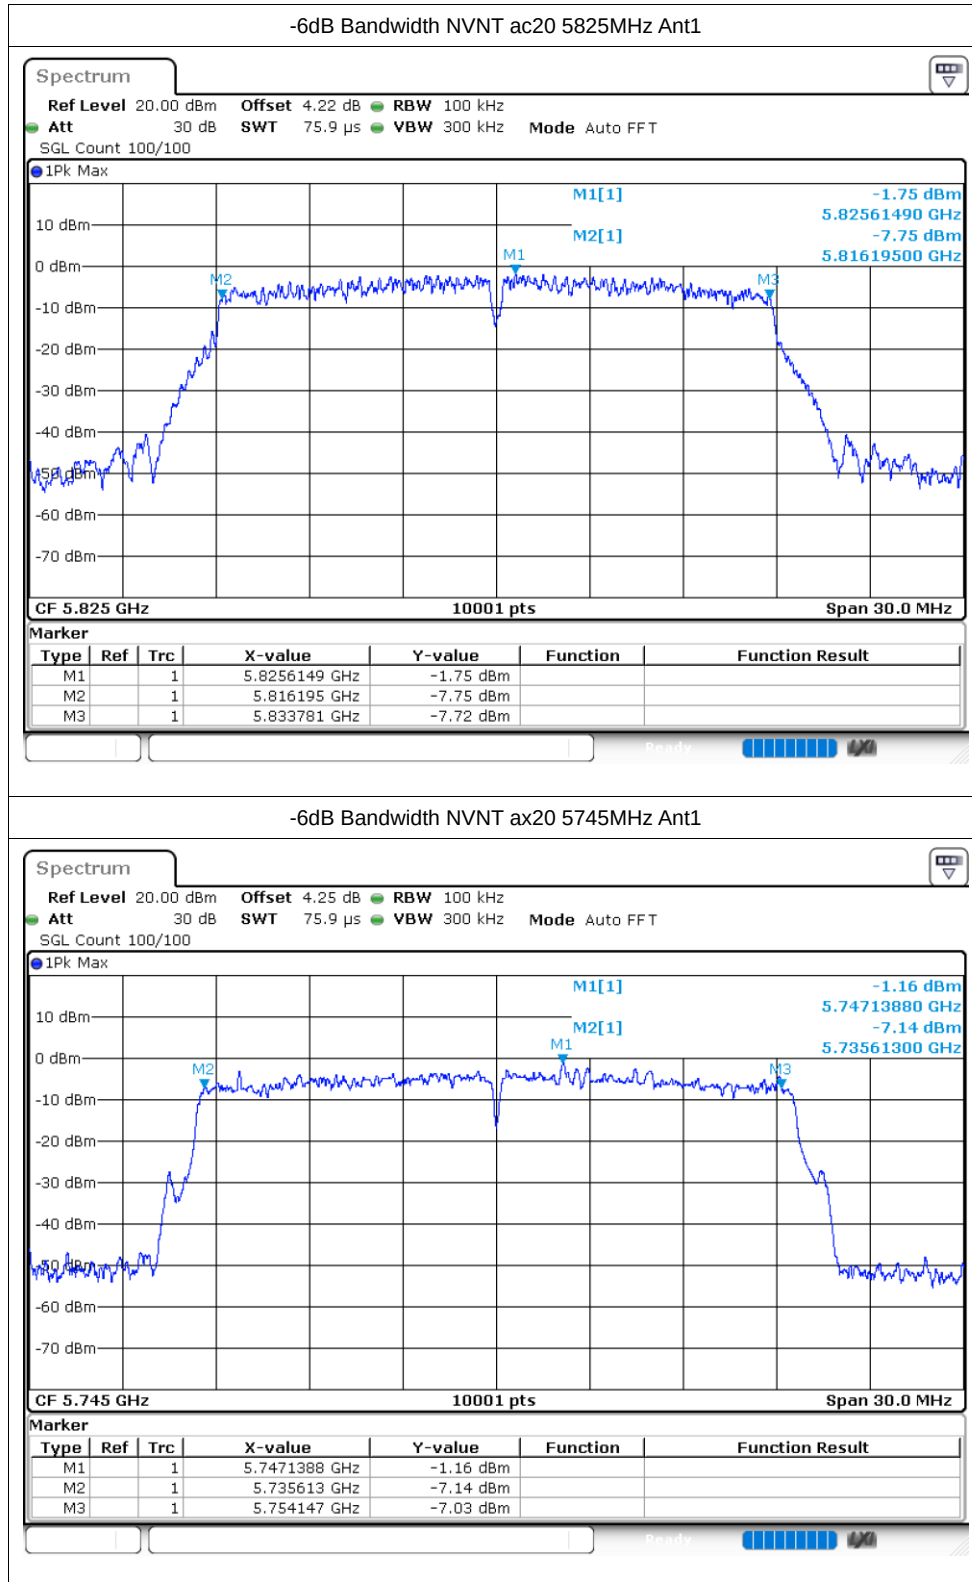

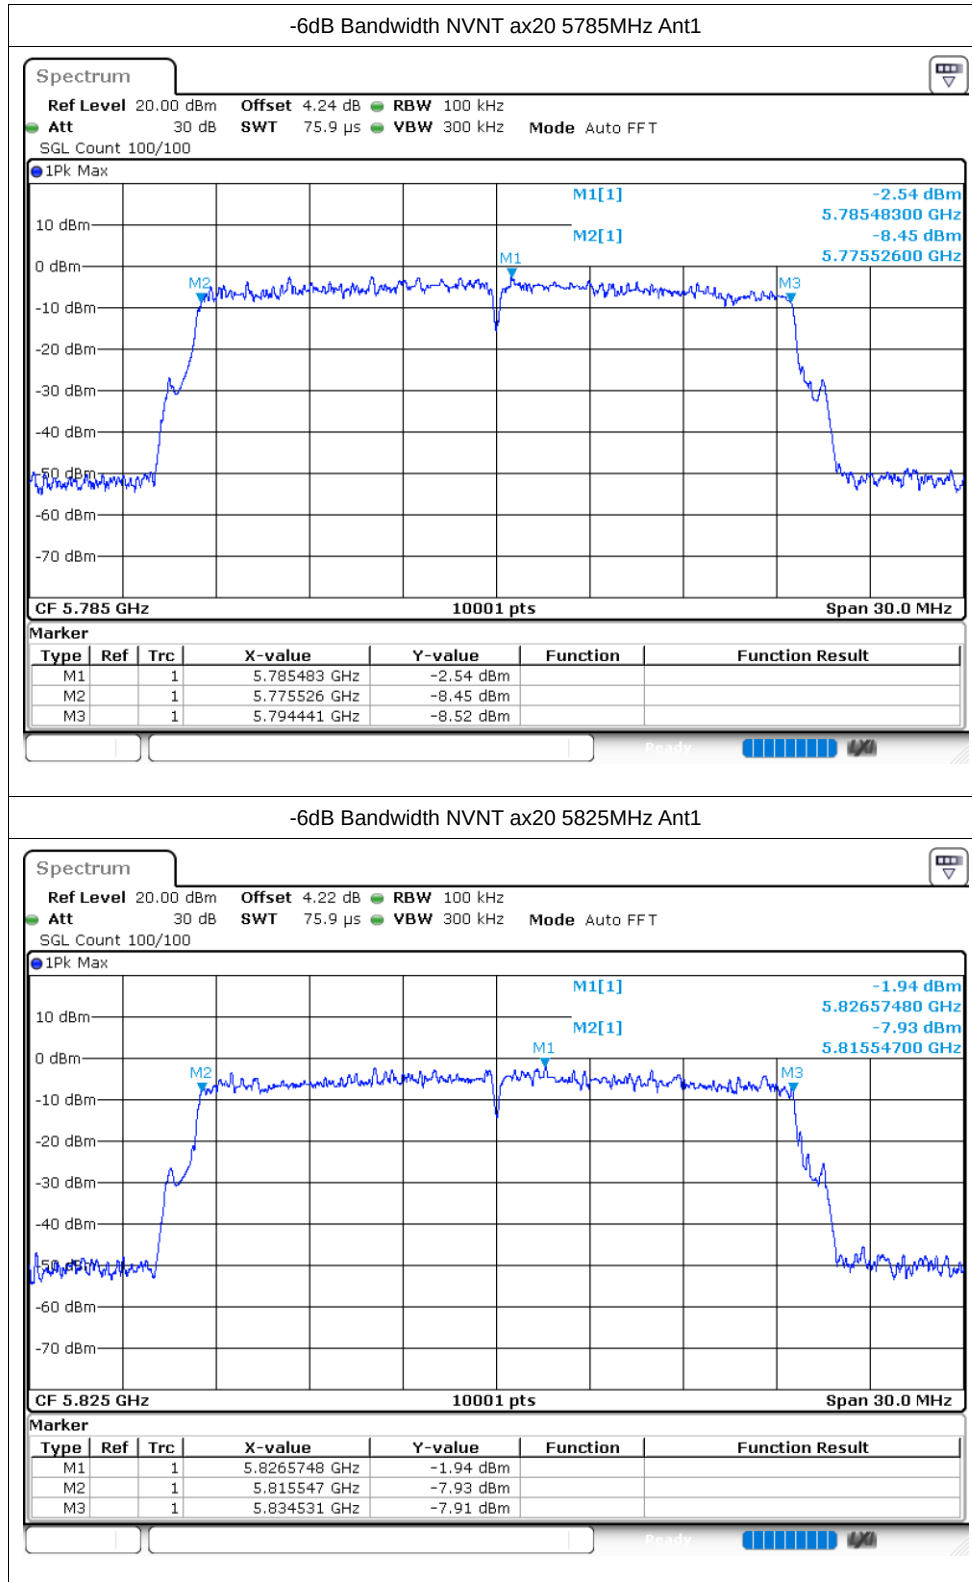


Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	a	5745	Ant1	16.468
NVNT	a	5785	Ant1	16.507
NVNT	a	5825	Ant1	16.525
NVNT	n20	5745	Ant1	17.551
NVNT	n20	5785	Ant1	17.461
NVNT	n20	5825	Ant1	17.56
NVNT	ac20	5745	Ant1	17.542
NVNT	ac20	5785	Ant1	17.572
NVNT	ac20	5825	Ant1	17.698
NVNT	ax20	5745	Ant1	18.814
NVNT	ax20	5785	Ant1	18.739
NVNT	ax20	5825	Ant1	18.787


Test Graphs


OBW NVNT a 5745MHz Ant1

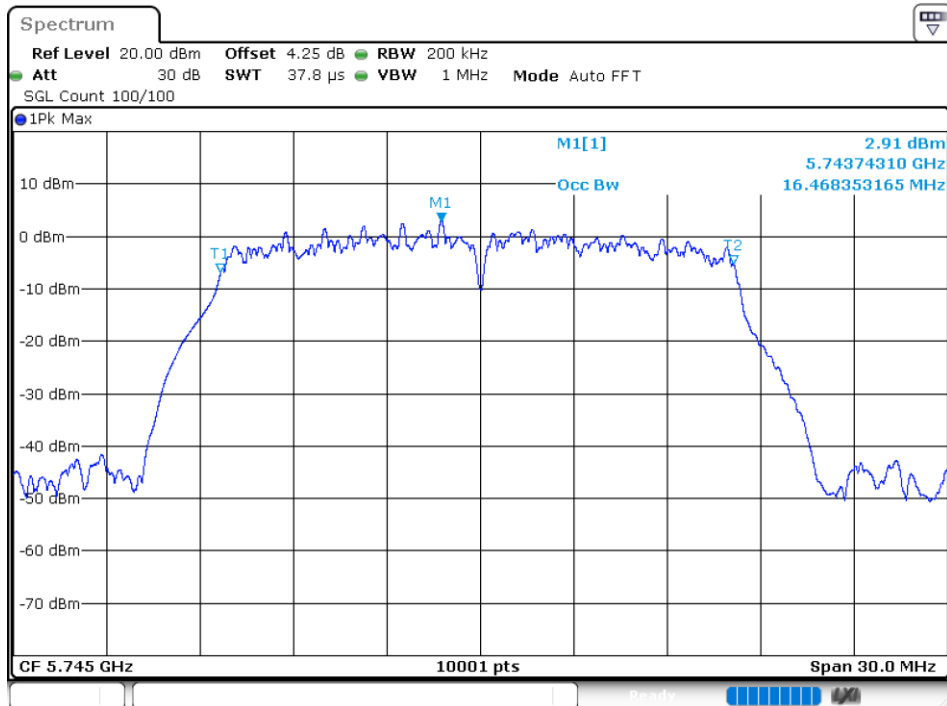



OBW NVNT a 5785MHz Ant1

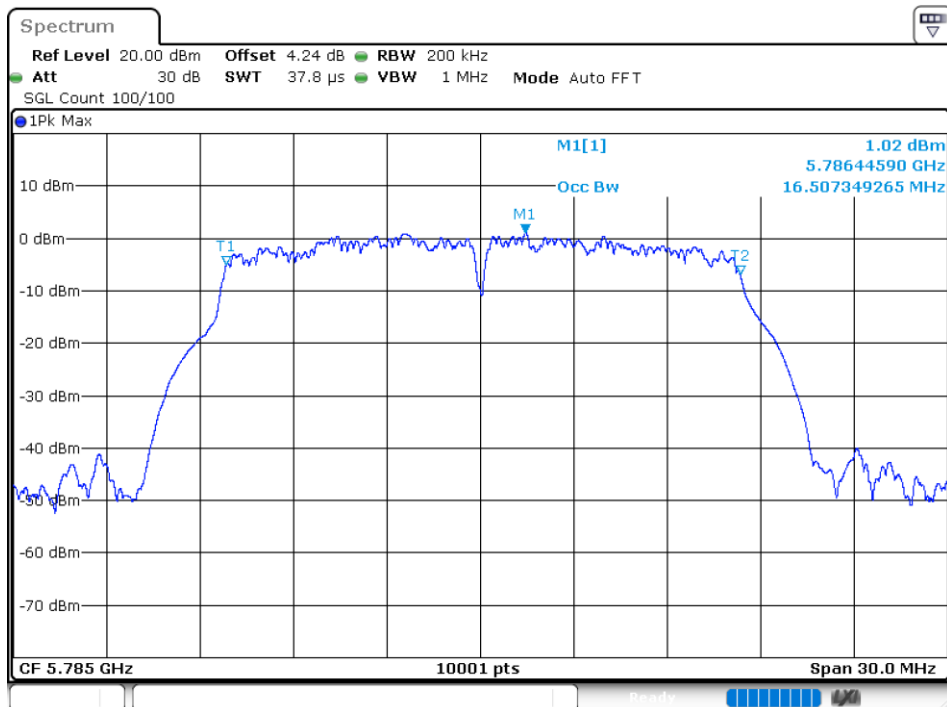


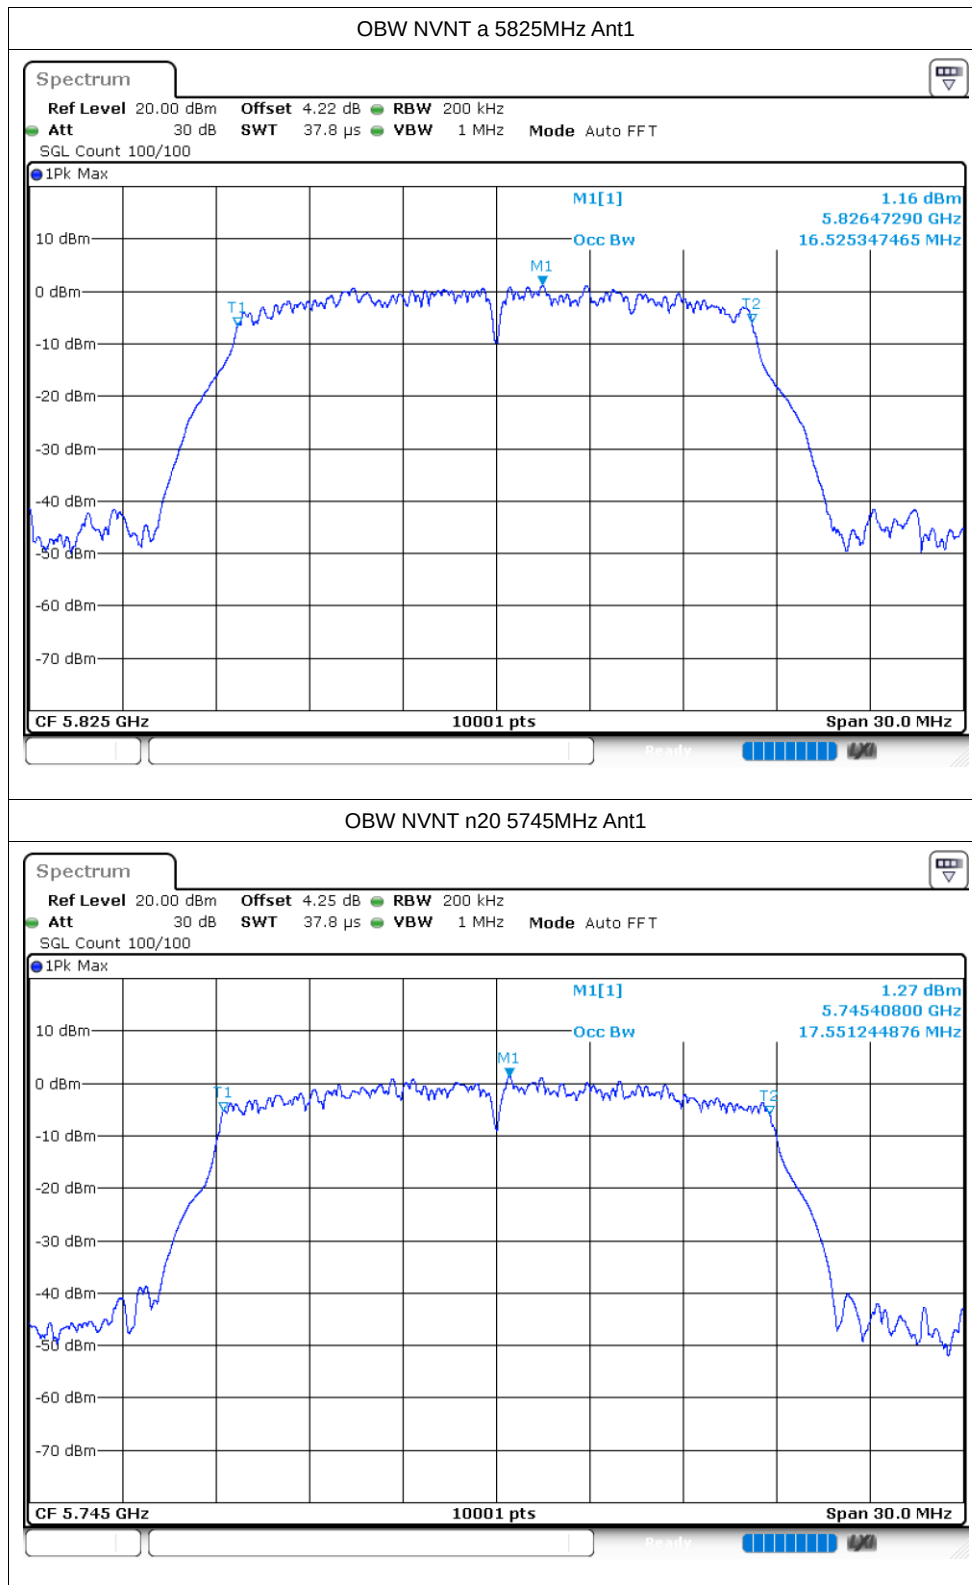

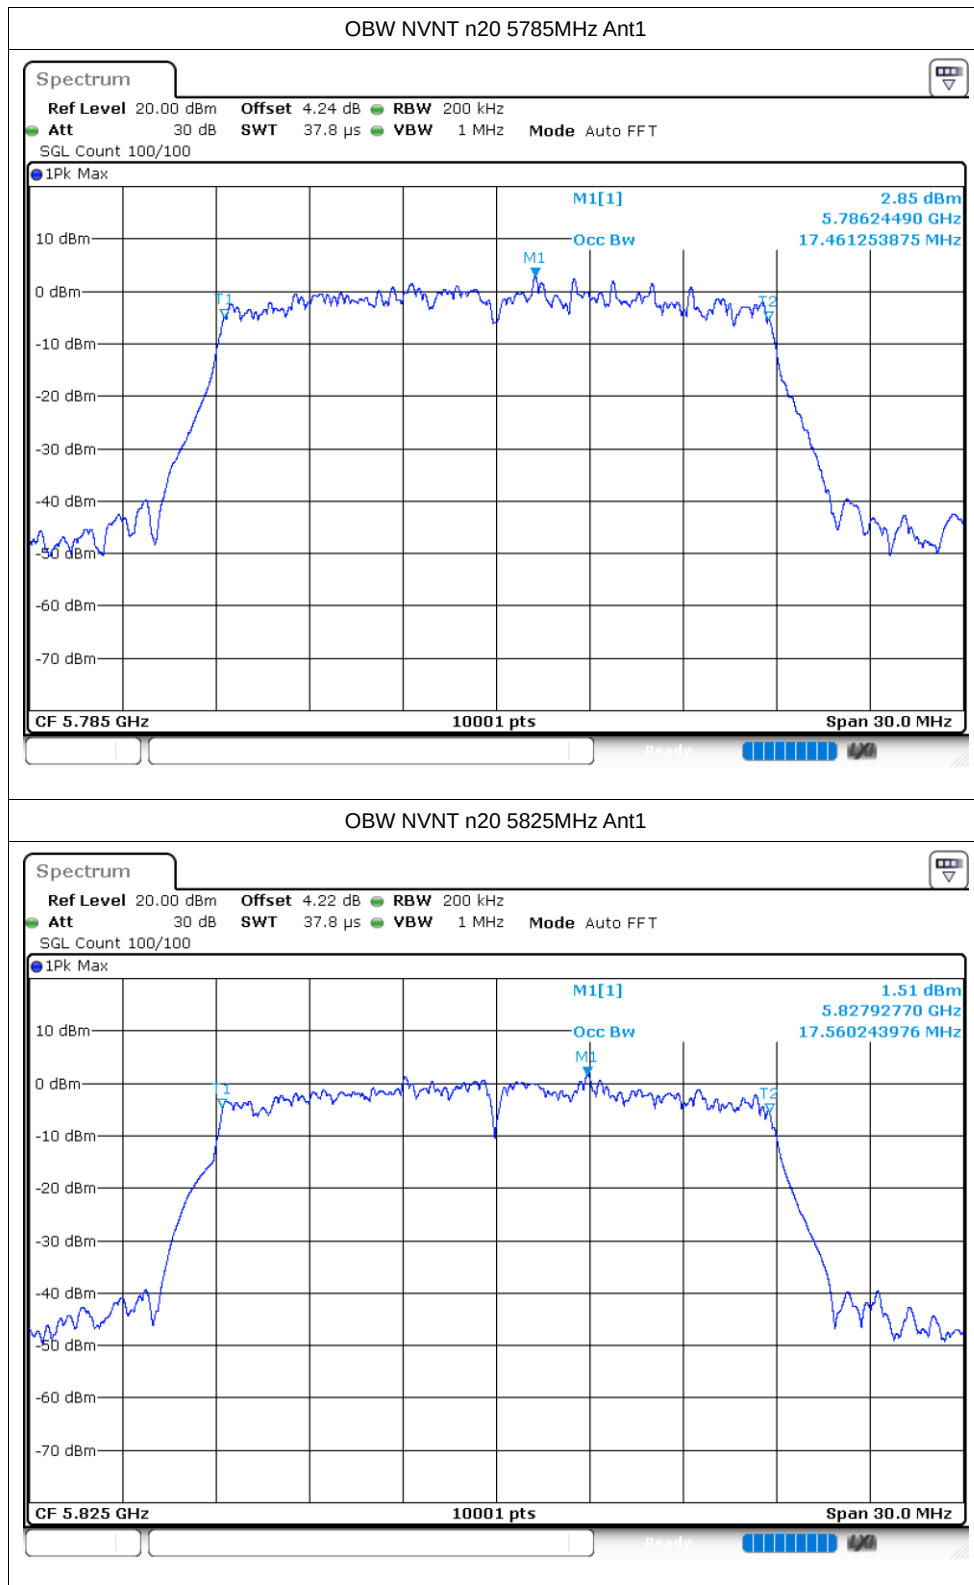

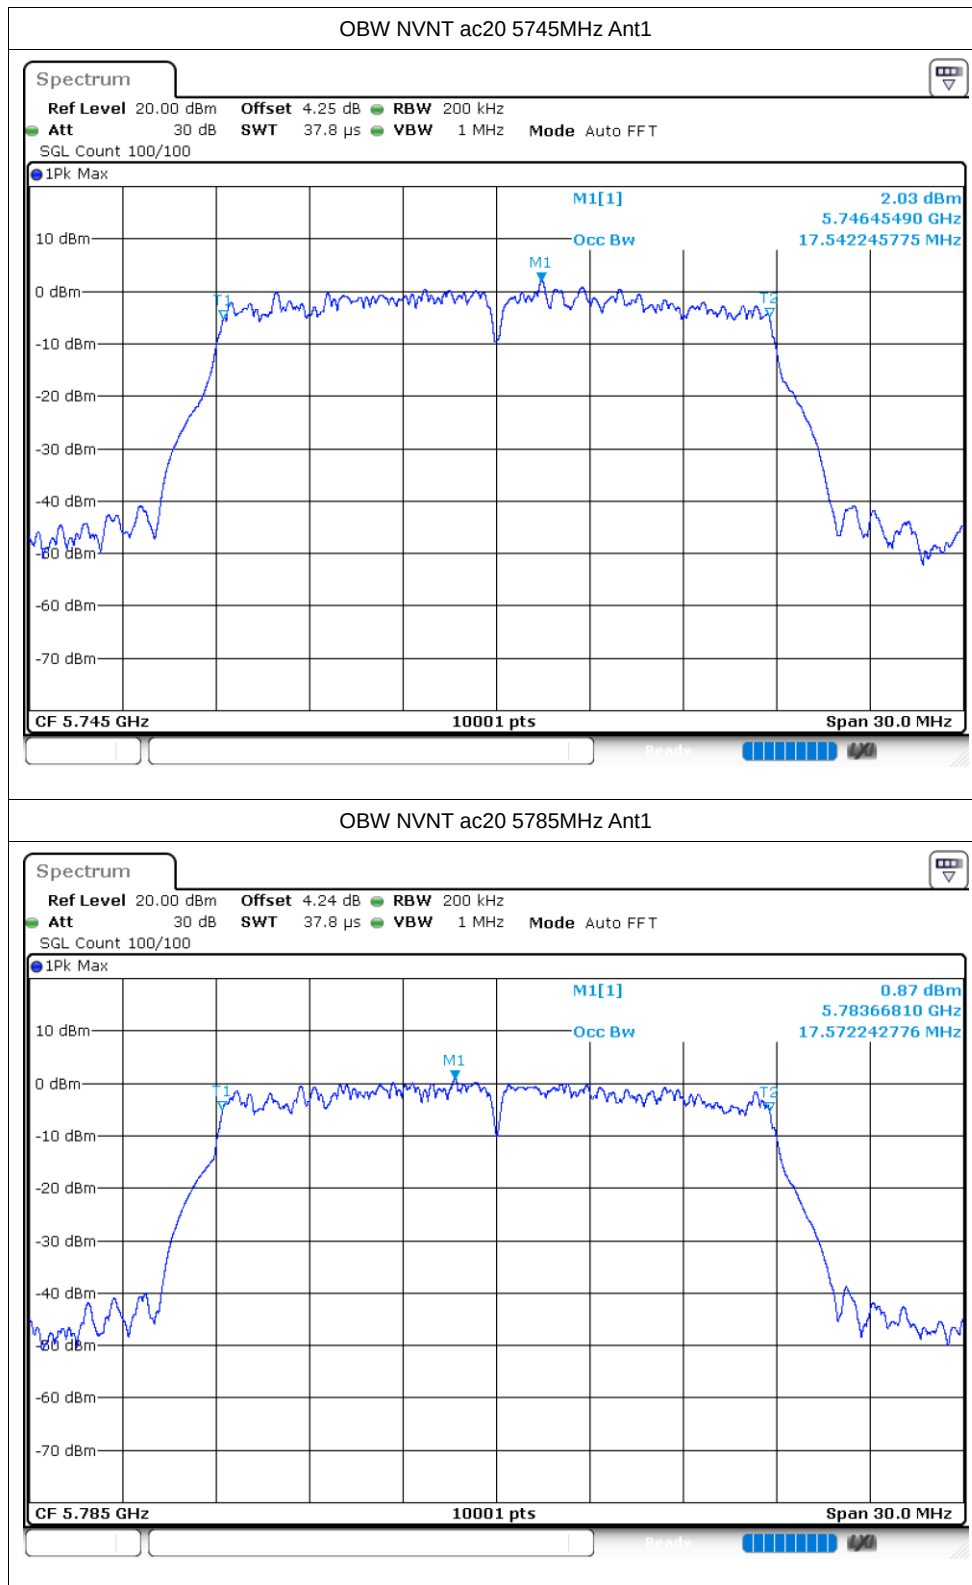

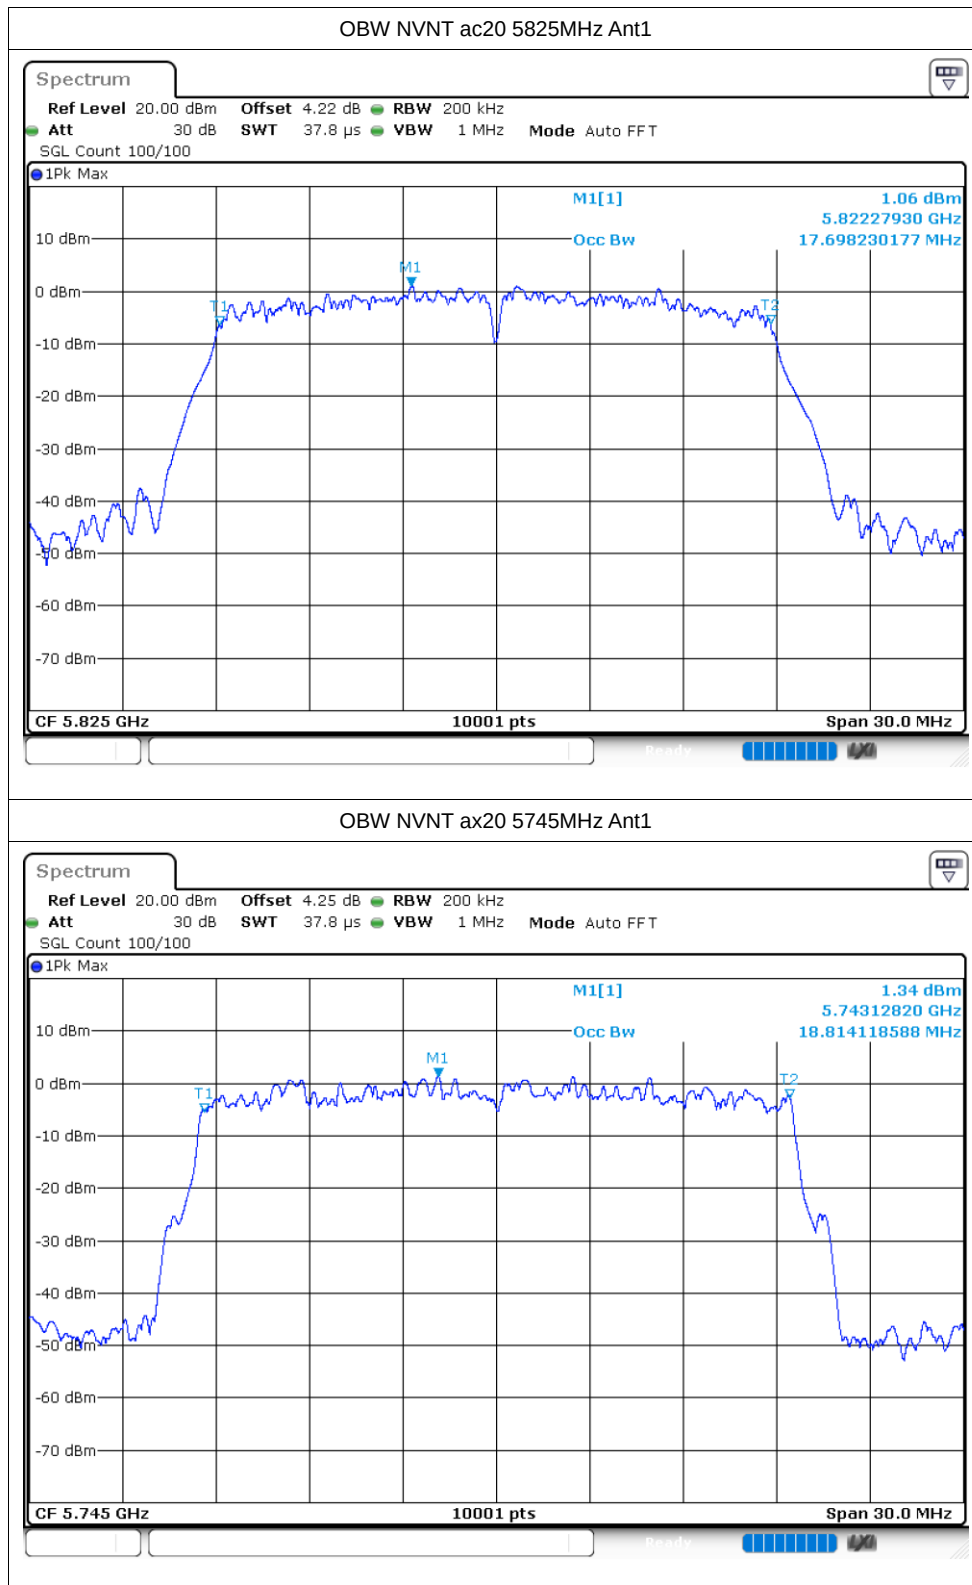

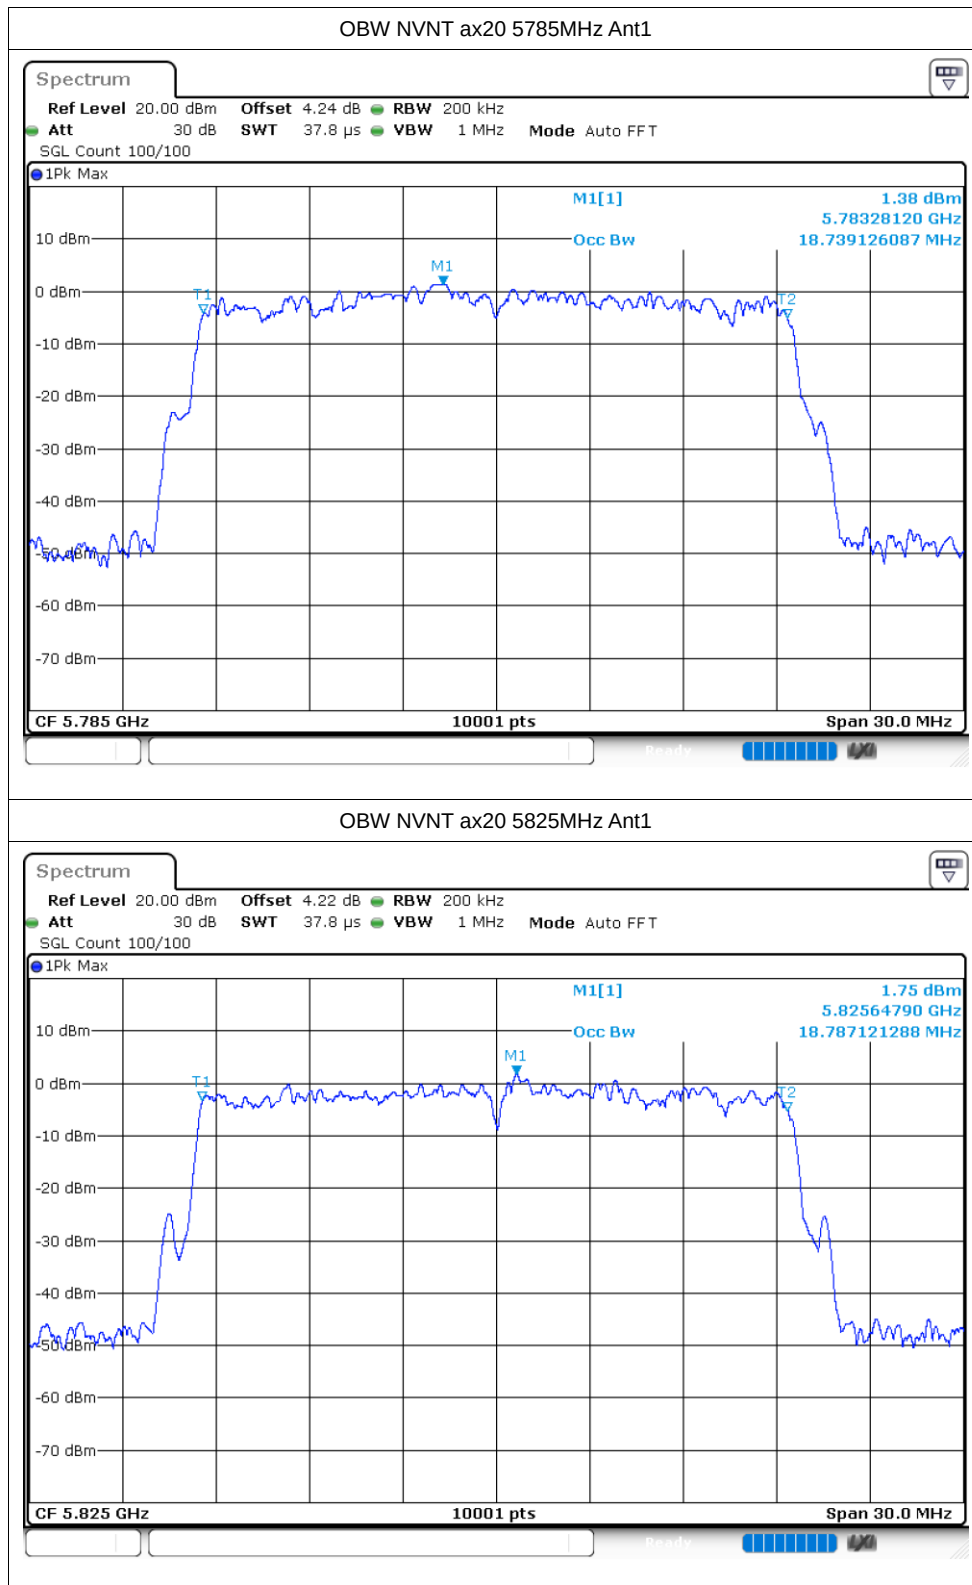


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm)	Duty Factor (dB)	Total PSD (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	Ant1	-17.15	0.15	-17	30	Pass
NVNT	a	5785	Ant1	-9.55	0.15	-9.4	30	Pass
NVNT	a	5825	Ant1	-9.9	0.15	-9.75	30	Pass
NVNT	n20	5745	Ant1	-12.99	0.08	-12.91	30	Pass
NVNT	n20	5785	Ant1	-3.99	0.08	-3.91	30	Pass
NVNT	n20	5825	Ant1	-3.46	0.08	-3.38	30	Pass
NVNT	ac20	5745	Ant1	-4.44	0.08	-4.36	30	Pass
NVNT	ac20	5785	Ant1	-4	0.08	-3.92	30	Pass
NVNT	ac20	5825	Ant1	-3.72	0.08	-3.64	30	Pass
NVNT	ax20	5745	Ant1	-4.73	0.11	-4.62	30	Pass
NVNT	ax20	5785	Ant1	-4.14	0.11	-4.03	30	Pass
NVNT	ax20	5825	Ant1	-3.91	0.11	-3.8	30	Pass

Test Graphs

PSD NVNT a 5745MHz Ant1

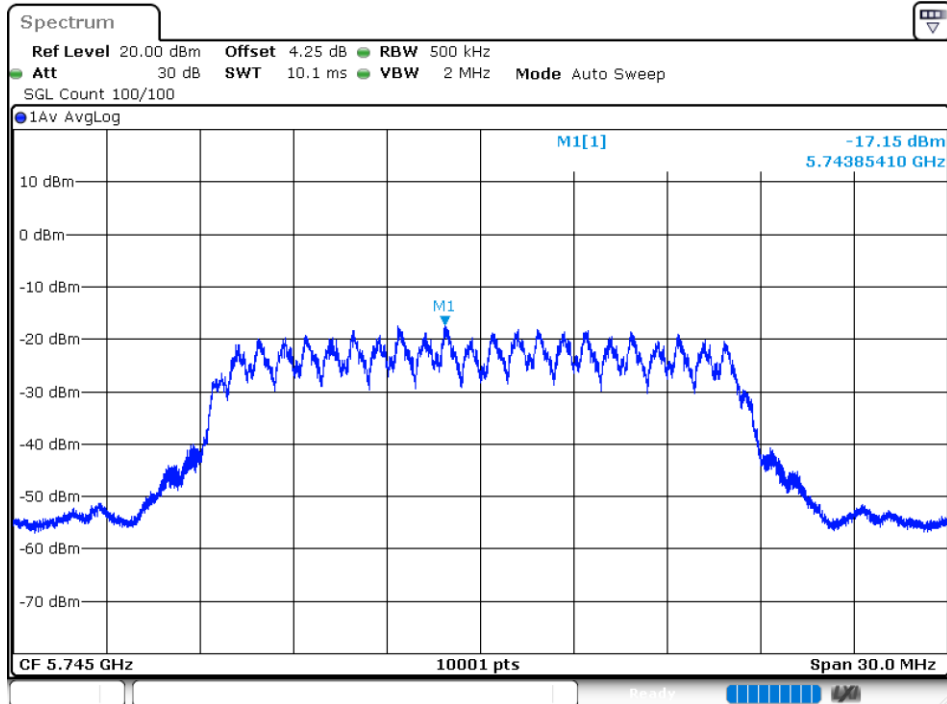

PSD NVNT a 5785MHz Ant1

