

TEST REPORT

Report No.: BCTC2605837120-3E

Applicant: MICRO COMPUTER (HK) TECH LIMITED


Product Name: Mini PC

Test Model: 895D7-5060

Tested Date: 2026-06-02 to 2026-08-10

Issued Date: 2026-08-11

Shenzhen BCTC Technology Co., Ltd.



FCC ID: 2A49R-895D7

Product Name: Mini PC

Trademark: N/A

Model/Type Reference: 895D7-5060
D7** (Where *="0-9","A-Z","-"and spaces)

Prepared For: MICRO COMPUTER (HK) TECH LIMITED

Address: RM 18, 28/F, Shui On Centre, 6-8 Harbour Road, Waterfront, Wan Chai, HK

Manufacturer: MICRO COMPUTER (HK) TECH LIMITED

Address: RM 18, 28/F, Shui On Centre, 6-8 Harbour Road, Waterfront, Wan Chai, HK

Prepared By: Shenzhen BCTC Technology Co., Ltd.

Address: Room 101M, Unit 1, Building1, Pengyuan, No.18, Lilang Road, Shanglilang, Nanwan Subdistrict, Longgang District, Shenzhen, Guangdong, China.

Sample Received Date: 2026-06-02

Sample Tested Date: 2026-06-02 to 2026-08-10


Report No.: BCTC2605837120-3E

Test Standards: 47 CFR Part 15 Subpart C (clause 15.247)
ANSI C63.10-2020

Test Results: PASS


Remark: This is WIFI-2.4GHz band radio test report.

Prepared by :



Louis Zeng

Reviewer by :



Mike Zheng

Approved by:




Sewen Guo

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Technology Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

Table of Content

Test Report Declaration	Page
1. Version	5
2. Test Summary	6
3. Measurement Uncertainty	7
4. Product Information and Test Setup	8
4.1 Product Information	8
4.2 Test Setup Configuration	9
4.3 Support Equipment	9
4.4 Channel List	10
4.5 Test Mode	10
4.6 Table Of Parameters Of Text Software Setting	11
4.7 Antenna	11
5. Test Facility And Test Instrument Used	12
5.1 Test Facility	12
5.2 Test Instrument Used	12
6. Conducted Emissions	14
6.1 Block Diagram Of Test Setup	14
6.2 Limit	14
6.3 Test procedure	14
6.4 EUT operating Conditions	14
6.5 Test Result	15
7. Radiated Emissions	17
7.1 Block Diagram Of Test Setup	17
7.2 Limit	18
7.3 Test procedure	19
7.4 EUT Operating Conditions	20
7.5 Test Result	20
8. Radiated Band Emission Measurement and Restricted Bands Of Operation	31
8.1 Block Diagram Of Test Setup	31
8.2 Limit	31
8.3 Test procedure	32
8.4 EUT Operating Conditions	32
8.5 Test Result	33
9. Power Spectral Density Test	37
9.1 Block Diagram Of Test Setup	37
9.2 Limit	37
9.3 Test procedure	37
9.4 EUT Operating Conditions	37
9.5 Test Result	38
10. -6dB Bandwidth Test	64
10.1 Block Diagram Of Test Setup	64
10.2 Limit	64
10.3 Test procedure	64
10.4 EUT Operating Conditions	64
10.5 Test Result	65

11. Peak Output Power Test	90
11.1 Block Diagram Of Test Setup.....	90
11.2 Limit	90
11.3 Test Procedure	90
11.4 EUT Operating Conditions	90
11.5 Test Result.....	91
12. 100 kHz Bandwidth Of Frequency Band Edge	93
12.1 Block Diagram Of Test Setup.....	93
12.2 Limit	93
12.3 Test Procedure	93
12.4 EUT Operating Conditions	93
12.5 Test Result.....	94
13. Duty Cycle Of Test Signal	174
13.1 Standard Requirement.....	174
13.2 Formula.....	174
13.3 Test Procedure	174
13.4 Test Result.....	175
14. Antenna Requirement	201
14.1 Limit	201
14.2 Test Result.....	201
15. EUT Test Setup Photographs.....	202

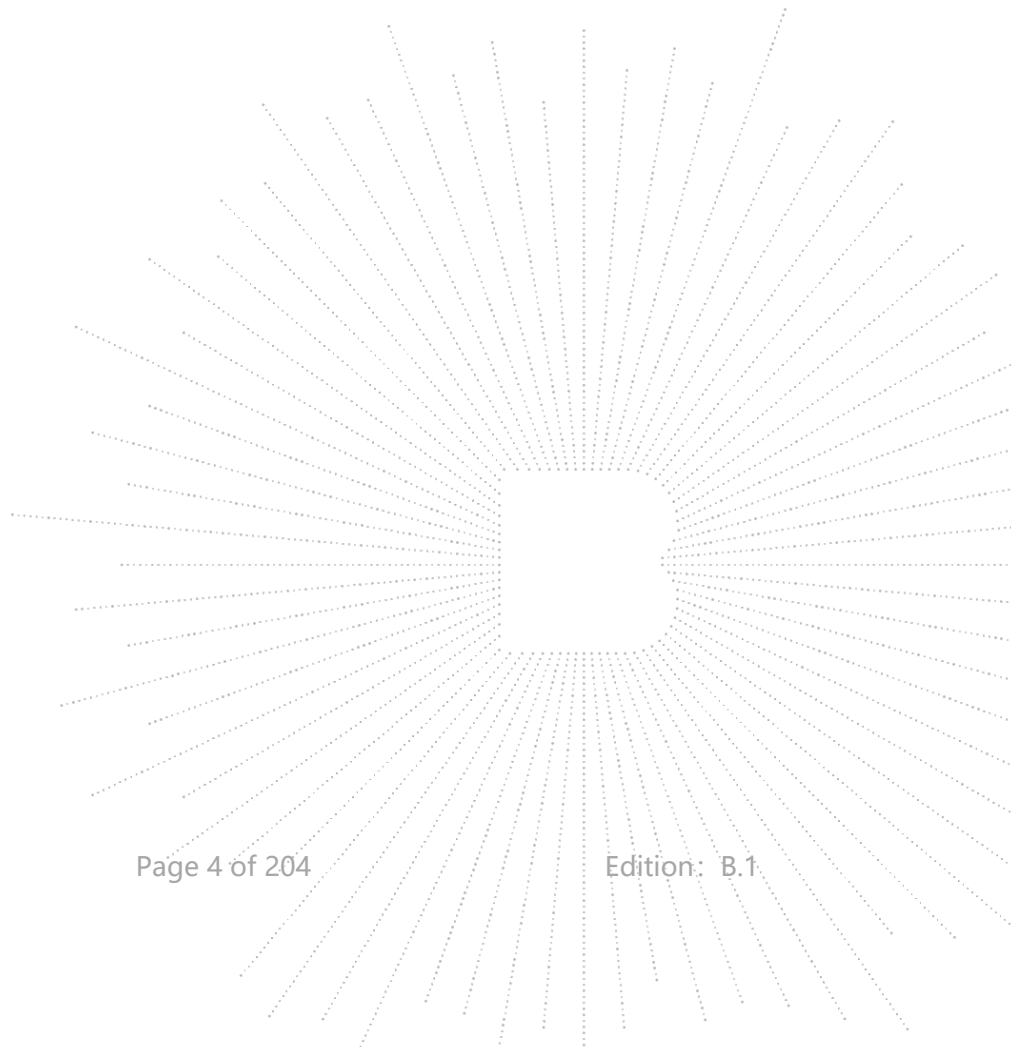

1. Version

Report No.	Issue Date	Description	Approved
BCTC2605837120-3E	2026-08-11	Original	Valid

2. Test Summary

The Product has been tested according to the following specifications:

No.	Test Parameter	Clause No.	Results
1	Conducted Emission	15.207	PASS*
2	6dB Bandwidth	15.247 (a)(2)	PASS*
3	Peak Output Power	15.247 (b)(3)	PASS*
4	Radiated Spurious Emission	15.247 (d)	PASS*
5	Power Spectral Density	15.247 (e)	PASS*
6	Restricted Band of Operation	15.205	PASS*
7	Band Edge (Out of Band Emissions)	15.247 (d)	PASS*
8	Antenna Requirement	15.203	PASS

NOTE1: N/A (Not Applicable)

NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.

Note 3: "*" indicates that the test results are determined base on 47 CFR Part 15 Subpart C (clause 15.247). And the test results are took into account measurement uncertainty(see section 3 for measurement uncertainty information)

3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2:2011/AMD2:2018. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Uncertainty
1	3m chamber Radiated spurious emission(9kHz-30MHz)	U=3.7dB
2	3m chamber Radiated spurious emission(30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission(1GHz-18GHz)	U=5.5dB
4	3m chamber Radiated spurious emission(18GHz-40GHz)	U=5.0dB
5	Conducted Emission(150kHz-30MHz)	U=3.0dB
6	Power Spectral Density	U=3.46dB
7	Peak Power	U=0.31dB
8	Occupied Bandwidth/Frequency Range	U=3.46%
9	Conducted output power uncertainty	U=0.55dB
10	Frequency Error	U= 53.50 Hz
11	Frequency Drift	U=0.64 KHz
12	Temperature	U= 0.59 °C
13	Humidity	U= 5.3 %

4. Product Information and Test Setup


4.1 Product Information

Model/Type Ref.	895D7-5060 ***D7***** (Where *="0-9", "A-Z", "-" and spaces)
Model differences:	All models are identical except for the model name, the test model is 895D7-5060.
Hardware Version:	N/A
Software Version:	N/A
IEEE 802.11 WLAN Mode Supported	802.11b 802.11g 802.11n/ax/be(20MHz channel bandwidth) 802.11n/ax/be(40MHz channel bandwidth)
Operation Frequency:	802.11b/g/n 20/ax 20/be 20MHz:2412~2462 MHz 802.11n 40/ax 40/be 40MHz:2422~2452 MHz
Type of Modulation:	DSSS/OFDM/OFDMA
Number Of Channel:	11 channels for 802.11b/g/ n(HT20)/ax(HE20)/be(EHT20); 7 Channels for 802.11n(HT40)/ax(HE40)/be(EHT40);
Antenna installation:	External antenna*2
Antenna Gain:	1.09 dBi
	Remark: ☒ The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. The laboratory assumes no responsibility for its authenticity. ☐ The antenna gain of the product is provided by the customer, and the test data is affected by the customer information. The laboratory assumes no responsibility for its authenticity.
Ratings:	AC 100-240V 6.3A 47-63Hz

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP Photographs for the actual connections between Product and support equipment.

Conducted Emission/Radiated Spurious Emission

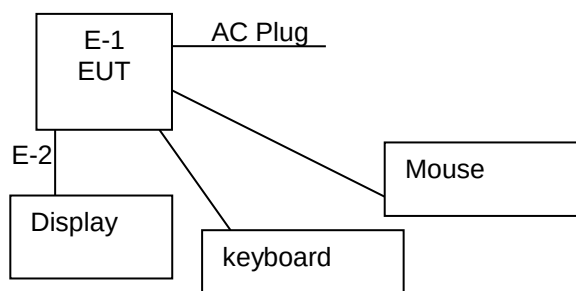

4.3 Support Equipment

No.	Device Type	Brand	Model	Series No.	Note
E-1	Keyboard	Logitech	M-U0026	---	---
E-2	HDMI Cable	Belkin	HDMI2.0	---	---
E-3	Mouse	Logitech	YU0036	---	---
E-4	Display	ChangHong	55DBK	---	---

Item	Shielded Type	Ferrite Core	Length	Note
C-1	Power cord	N/A	N/A	N/A

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

Channel List for 802.11b/g/n(20)/ax(20)/be(20)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	02	2417	03	2422
04	2427	05	2432	06	2437
07	2442	08	2447	09	2452
10	2457	11	2462		

Channel List for 802.11n(40)/ax(40)/be(40)					
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
03	2422	04	2427	05	2432
06	2437	07	2442	08	2447
09	2452				

RU type

Bandwidth	20MHz BW	40MHz BW
RU Type	242-tone RU	484-tone RU

Note: The product is only compatible with Su.

4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

For All Mode	Description	Modulation Type
Mode 1	CH 01	802.11b
Mode 2	CH 06	
Mode 3	CH 11	
Mode 4	CH 01	802.11g
Mode 5	CH 06	
Mode 6	CH 11	
Mode 7	CH 01	802.11n 20/ax 20/be 20
Mode 8	CH 06	
Mode 9	CH 11	
Mode 10	CH 03	802.11n 40/ax 40/be 40
Mode 11	CH 06	
Mode 12	CH 09	
Mode 13	Link mode (Conducted emission and Radiated emission)	

Notes:

1. The measurements are performed at the highest, middle, lowest available channels.
2. The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

RF Function	Mode Or Modulation type	Power Class	Software For Testing
WIFI 2.4G	802.11b	10	MTK_MT7925
	802.11g	10	
	802.11n20/ax20/be20	10	
	802.11n40/ax40/be40	10	

4.7 Antenna

Table for Internal antenna

Ant.	Brand	Model Name	Antenna Type	Gain (dBi)	NOTE
A	N/A	N/A	External antenna	1.09	N/A
B	N/A	N/A	External antenna	1.09	N/A

EUT has two External antennas with The maximum gain GANT of Antenna A is 1.09 dBi, and that of Antenna B is 1.09dBi, CDD device with one spatial streams, also can operat with one spatial streams according to KDB662911 D01 v02r01,
Directional gain= GANT + Array Gain, where Array Gain is as follows.

1)For power spectral density(PSD) measurements,
Array Gain= $10\log(NANT/NSS)$ dB= $10\log(2/1)$ =3.01dB,
So the directional gain for PSD is 4.1 dBi

2)For power measurements,
The Array gain=0 dB for $NANT \leq 4$,
So the directional gain for Power measurements is 1.09 dBi

5. Test Facility And Test Instrument Used

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Technology Co., Ltd.

Address: Room 101M, Unit 1, Building1, Pengyuan, No.18, Lilang Road, Shanglilang, Nanwan Subdistrict, Longgang District, Shenzhen, Guangdong, China.

The site and apparatus are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-1:2019 other equivalent standards.

FCC Test Firm Registration Number: 754702

ANAB certificate registration number is: CN3479

5.2 Test Instrument Used

Conducted emissions Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Receiver	R&S	ESCI	101421	2025.08.30	2026.08.29
AMN	SCHWHRZBECK	NSLK8128	05152	2026.01.22	2027.01.21
AMN	SCHWHRZBECK	NSLK8127	8127739	2025.09.16	2026.09.15
Pulse Limiter	SCHWHRZBECK	VTSD 9561-F-N	00547	2025.08.30	2026.08.29
Temperature & Humidity	Wetest	HTC-1	/	2025.09.01	2026.08.31
Software	EZ-EMC	Ver.EMC-CON 3A1	/	/	/


Radiated disturbance 2#					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Shielded room	ChengYu	9*6*6	/	2023.09.25	2026.09.24
Loop Antenna	Schwarzbeck	FMZB1519B	00014	2026.01.05	2027.01.04
Broadband antenna	SCHWHRZBECK	VULB9168	01620	2025.08.29	2026.08.28
Horn antenna(1 GHz -18GHz)	SCHWARZBECK	BBHA 9120 D	2792	2025.08.29	2026.08.28
Horn antenna (18 GHz -40GHz)	SCHWARZBECK	BBHA9170	00822	2025.12.29	2026.12.28
Receiver	R&S	ESR	1316	2025.08.30	2026.08.29
Spectrum Analyzer	R&S	FSV40	101328	2026.01.22	2027.01.21
Amplifier	SCHWHRZBECK	BBV9744	568	2025.08.30	2026.08.29
Amplifier	EMC INSTRUMENTS	EMC0518A45SE E	EMT-SZ2 233	2025.08.30	2026.08.29

	CORPORATION				
Amplifier (18GHz-40GHz)	MITEQ	TTA1840-35-HG	2034381	2026.05.09	2027.05.08
RF cable 3# (9kHz-6GHz)	Yunyi	10M	/	2025.08.30	2026.08.29
RF cable 9# (9kHz-1GHz)	Yunyi	2M	/	2025.10.28	2026.10.27
RF cable 5# (1GHz-18GHz)	SKET	9M	18038626	2025.08.30	2026.08.29
RF cable 6# (1GHz-18GHz)	SKET	5M	#10	2025.09.05	2026.09.04
RF cable 10# (18GHz-40GHz)	/	2M	2M	2026.05.09	2027.05.08
RF cable 11# (18GHz-40GHz)	/	2.5M	2.5M	2026.05.09	2027.05.08
Temperature & Humidity	Wetest	HTC-1	/	2025.09.05	2026.09.04
Software	EZ-EMC	Ver.FA-03A2	/	/	/

RF Conducted Test					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Spectrum Analyzer	Keysight	N9020A	MY51287403	2025.08.30	2026.08.29
Signal Generator	Keysight	N5182A	MY50144088	2025.08.30	2026.08.29
Power Sensor	Keysight	U2001	MY51250006	2025.10.28	2026.10.27
Temperature & Humidity	Wetest	HTC-1	/	2025.09.01	2026.08.31
Communication test set	R&S	CMW500	157483	2025.08.30	2026.08.29
Radio frequency control box	MWRFTest	MW100-RFCB	\	\	\
Software	MWRFTest	MTS 8310	V 3.0.0.0	\	\
D.C. Power Supply	Elektro-Automatik GmbH & Co.KG	D-41747 Viersen	6230316	2025.09.30	2026.08.29
Temperature and humidity test chamber	Auchno	OJN-9606-408 L	19120183	2025.07.09	2026.07.08
				2026.07.07	2027.07.06

6. Conducted Emissions

6.1 Block Diagram Of Test Setup

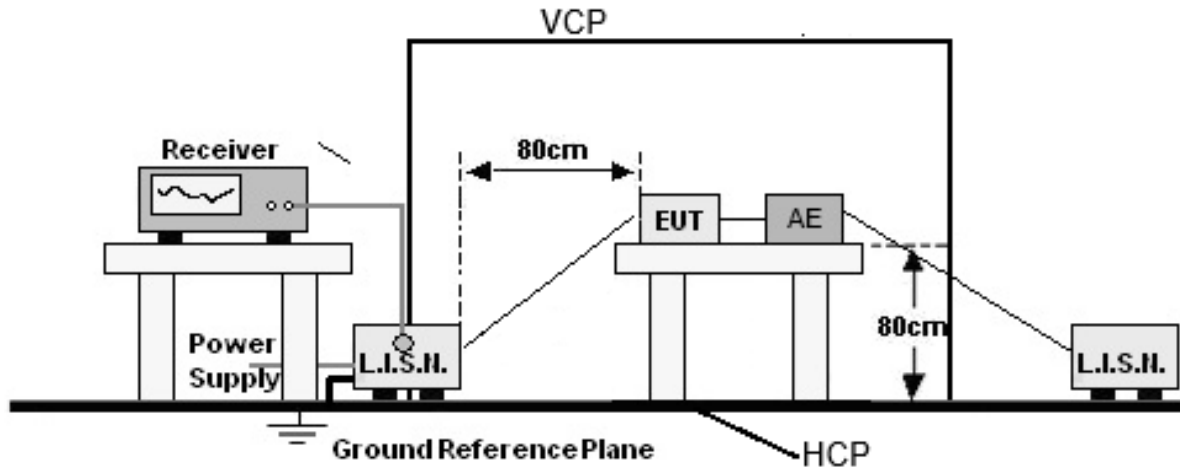

6.2 Limit

Frequency (MHz)	Limit (dBuV)	
	Quas-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

Notes:

- *Decreasing linearly with logarithm of frequency.
- The lower limit shall apply at the transition frequencies.

6.3 Test procedure

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

6.5 Test Result

Temperature:	26.3 °C	Relative Humidity:	53 %
Pressure:	101KPa	Test Voltage :	AC 120V/60Hz
Test Mode:	Mode 13	Polarization :	L

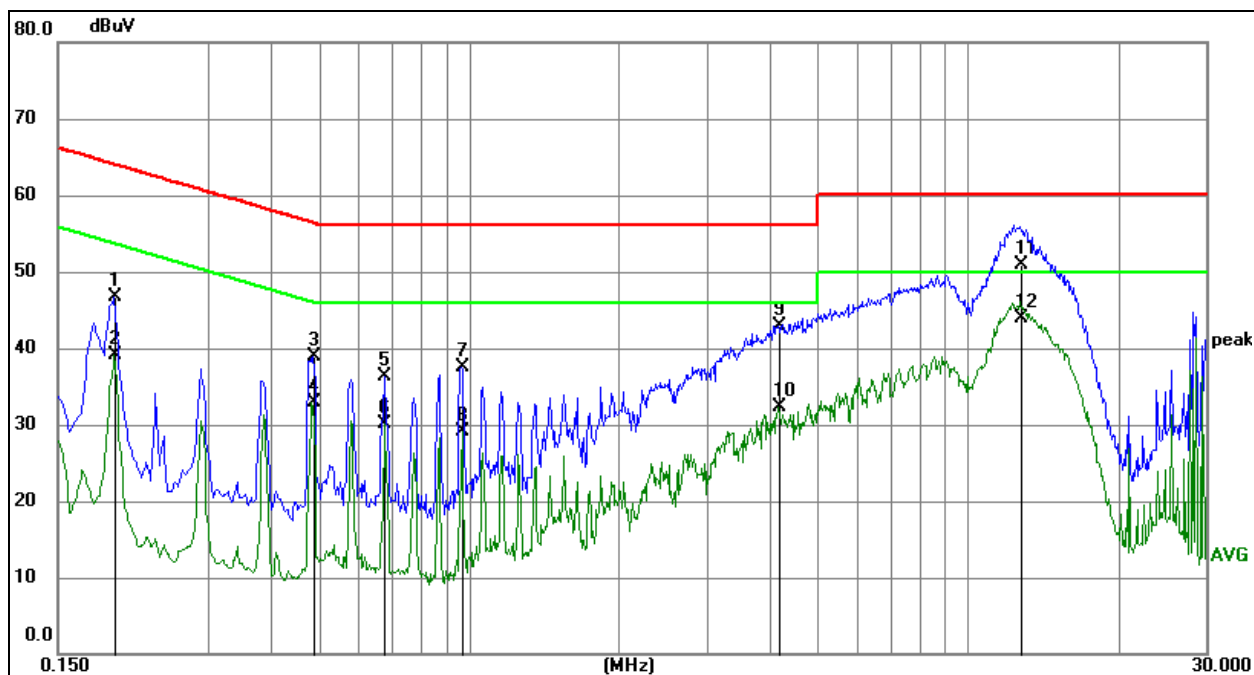


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = LISN factor + Cable Loss+ Limiter (10dB).
3. Margin = (Reading+ Factor)–Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1949	36.12	10.50	46.62	63.83	-17.21	QP	P
2	0.1949	28.68	10.50	39.18	53.83	-14.65	AVG	P
3	0.4875	28.38	10.52	38.90	56.21	-17.31	QP	P
4	0.4875	22.34	10.52	32.86	46.21	-13.35	AVG	P
5	0.6765	25.80	10.53	36.33	56.00	-19.67	QP	P
6	0.6765	19.58	10.53	30.11	46.00	-15.89	AVG	P
7	0.9645	26.89	10.53	37.42	56.00	-18.58	QP	P
8	0.9645	18.58	10.53	29.11	46.00	-16.89	AVG	P
9	4.1774	32.31	10.68	42.99	56.00	-13.01	QP	P
10	4.1774	21.58	10.68	32.26	46.00	-13.74	AVG	P
11	12.7185	39.65	11.35	51.00	60.00	-9.00	QP	P
12 *	12.7185	32.55	11.35	43.90	50.00	-6.10	AVG	P

* Indicates the worst data.

Temperature:	26.3 °C	Relative Humidity:	53 %
Pressure:	101KPa	Test Voltage :	AC 120V/60Hz
Test Mode:	Mode 13	Polarization :	N

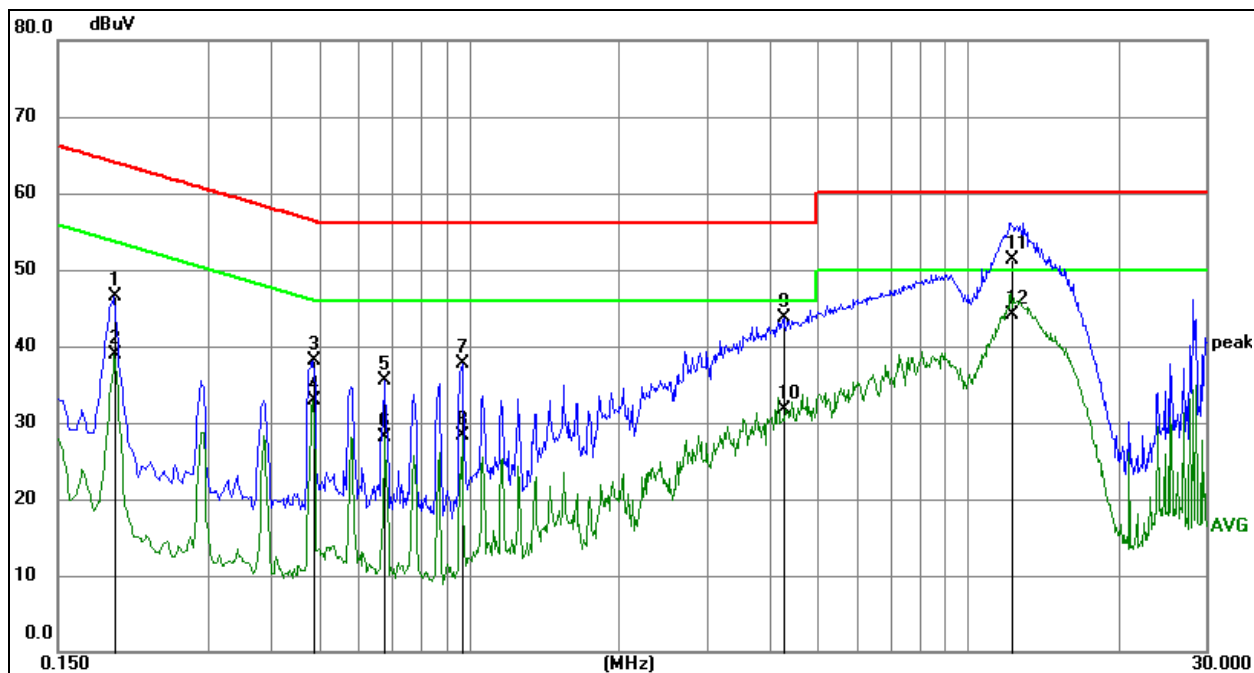

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = LISN factor + Cable Loss+ Limiter (10dB).
3. Margin = (Reading+ Factor)–Limit


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1949	35.91	10.50	46.41	63.83	-17.42	QP	P
2	0.1949	28.31	10.50	38.81	53.83	-15.02	AVG	P
3	0.4875	27.51	10.52	38.03	56.21	-18.18	QP	P
4	0.4875	22.40	10.52	32.92	46.21	-13.29	AVG	P
5	0.6765	25.00	10.53	35.53	56.00	-20.47	QP	P
6	0.6765	17.63	10.53	28.16	46.00	-17.84	AVG	P
7	0.9690	27.19	10.53	37.72	56.00	-18.28	QP	P
8	0.9690	17.80	10.53	28.33	46.00	-17.67	AVG	P
9	4.2765	32.93	10.69	43.62	56.00	-12.38	QP	P
10	4.2765	20.96	10.69	31.65	46.00	-14.35	AVG	P
11	12.2010	39.99	11.31	51.30	60.00	-8.70	QP	P
12 *	12.2010	32.79	11.31	44.10	50.00	-5.90	AVG	P

* Indicates the worst data.


7. Radiated Emissions

7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

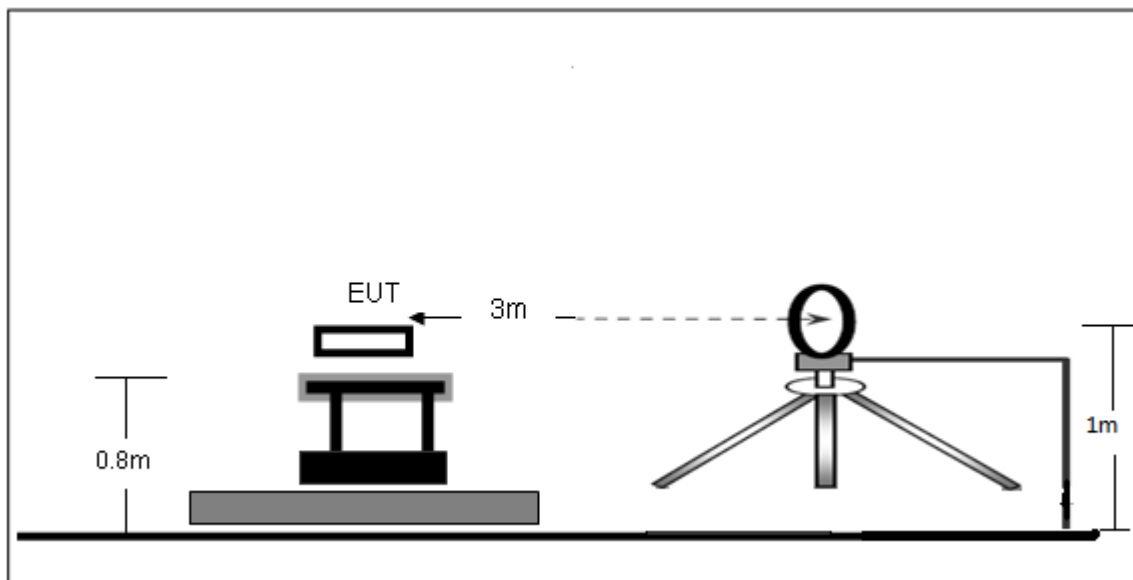

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

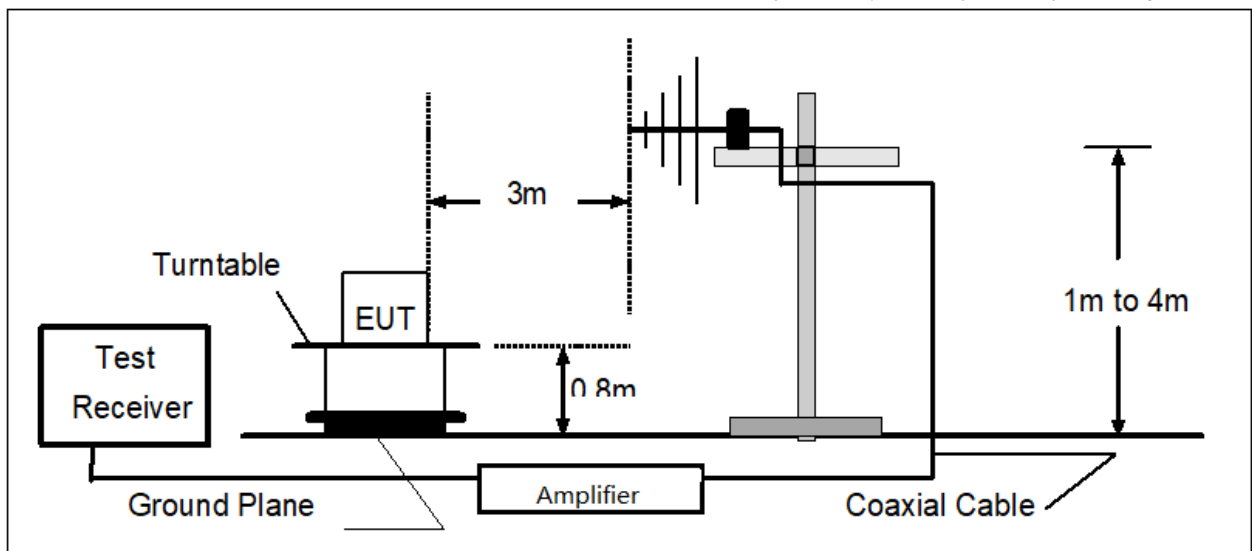

(C) Radiated Emission Test-Up Frequency Above 1GHz

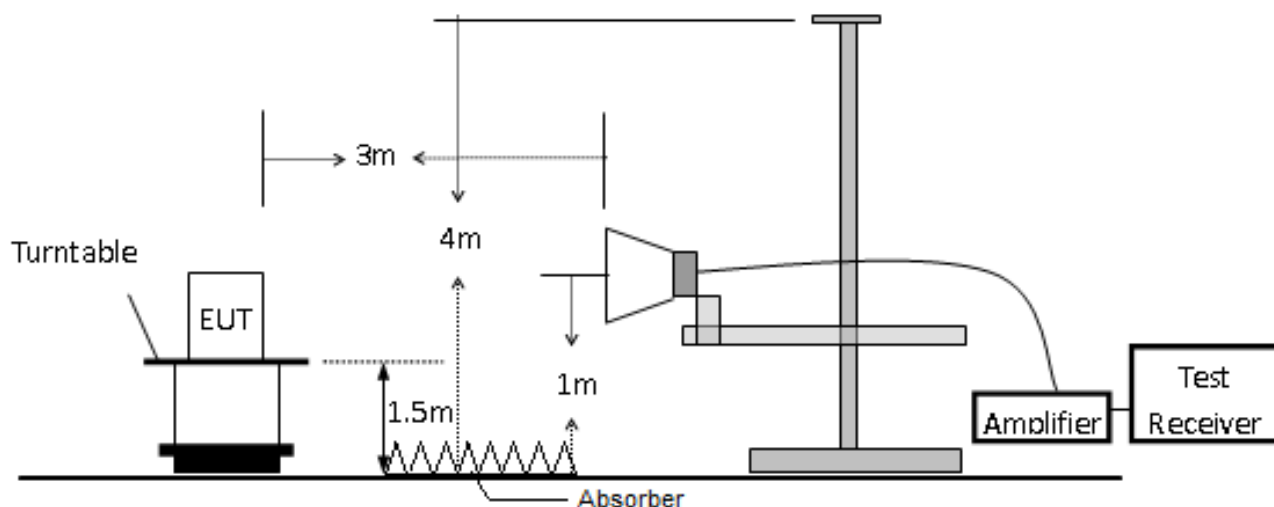

7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequency (MHz)	Field Strength uV/m	Distance (m)	Field Strength Limit at 3m Distance	
			uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log(2400/F(\text{kHz})) + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log(24000/F(\text{kHz})) + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log(30) + 40$
30 ~ 88	100	3	100	$20\log(100)$
88 ~ 216	150	3	150	$20\log(150)$
216 ~ 960	200	3	200	$20\log(200)$
Above 960	500	3	500	$20\log(500)$

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Frequency Range Of Radiated Measurement

(a) For an intentional radiator the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator operates at or above 95 GHz: To the third harmonic of the highest fundamental frequency or to 750 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (5) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a) (1) through (4) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this section, whichever is the higher frequency range of investigation.

7.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
9kHz~150kHz	RBW 200Hz for QP
150kHz~30MHz	RBW 9kHz for QP
30MHz~1000MHz	RBW 120kHz for QP

Spectrum Parameter	Setting
1-25GHz	RBW 1 MHz /VBW 1 MHz for Peak, RBW 1 MHz / VBW 10Hz for Average

Below 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- a. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middlest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

7.5 Test Result

Below 30MHz

Temperature:	24.6 °C	Relative Humidity:	58 %
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 13	Polarization:	---

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS


Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

Temperature:	24.6 °C	Relative Humidity:	58 %
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 13	Polarization :	Horizontal

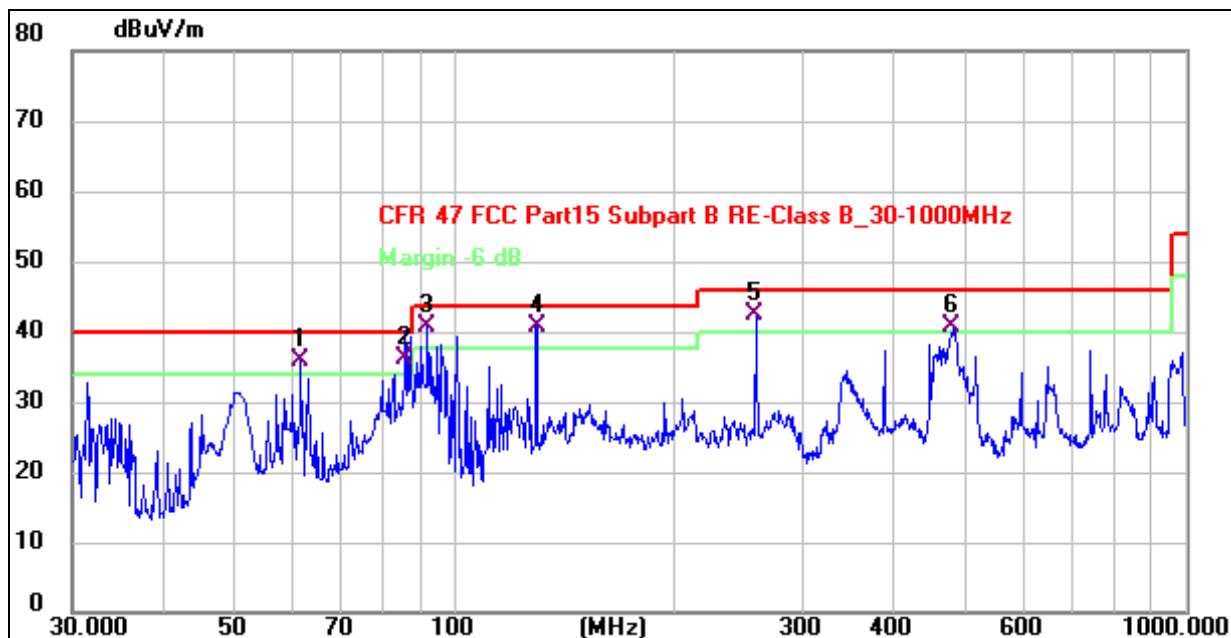

Remark:


Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Margin = (Reading + Factor) – Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1 !	61.5043	48.14	-12.23	35.91	40.00	-4.09	QP	200	0	P
2 !	85.5177	50.87	-14.86	36.01	40.00	-3.99	QP	200	0	P
3 *	91.5163	55.43	-14.61	40.82	43.50	-2.68	QP	200	0	P
4 !	129.1050	52.23	-11.62	40.61	43.50	-2.89	QP	200	0	P
5 !	258.1151	54.50	-12.07	42.43	46.00	-3.57	QP	200	0	P
6 !	480.0224	47.02	-6.20	40.82	46.00	-5.18	QP	200	0	P

* Indicates the worst data.

Temperature:	24.6 °C	Relative Humidity:	58 %
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz
Test Mode:	Mode 13	Polarization :	Vertical

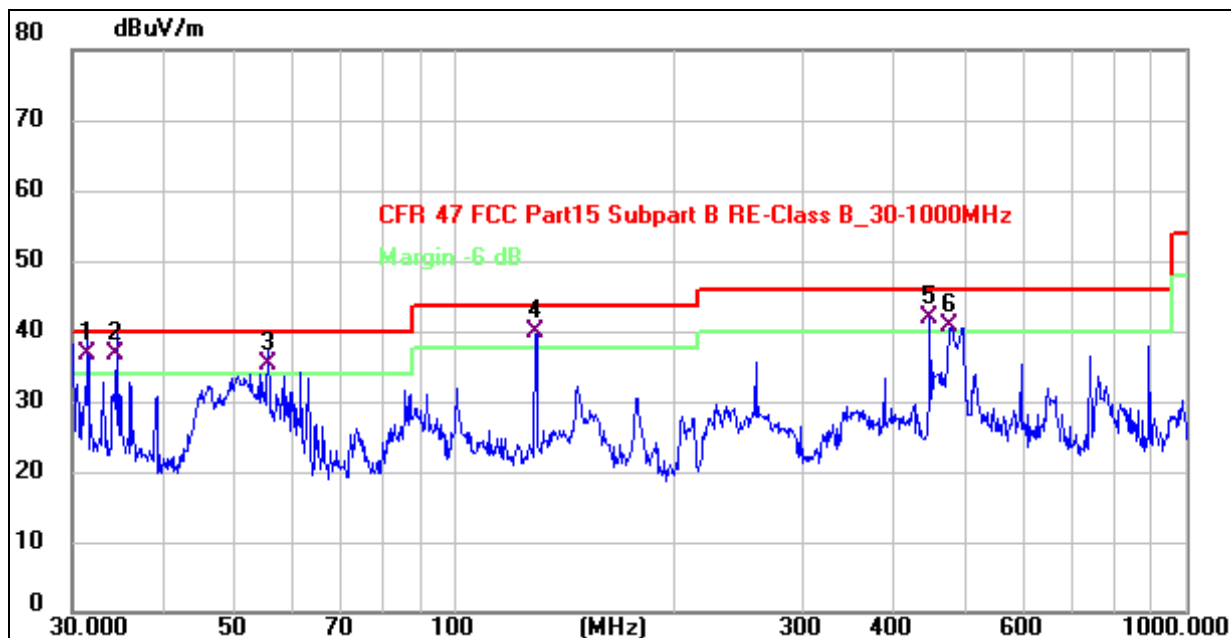

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Margin = (Reading + Factor) – Limit

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1 *	31.4948	48.30	-11.57	36.73	40.00	-3.27	QP	100	360	P
2 !	34.4649	48.18	-11.58	36.60	40.00	-3.40	QP	100	360	P
3 !	55.4665	46.28	-11.05	35.23	40.00	-4.77	QP	100	360	P
4 !	129.1202	51.54	-11.61	39.93	43.50	-3.57	QP	100	360	P
5 !	445.0075	48.76	-6.88	41.88	46.00	-4.12	QP	100	360	P
6 !	475.5547	46.72	-5.99	40.73	46.00	-5.27	QP	100	360	P

* Indicates the worst data.

Between 1GHz – 25GHz

802.11b

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	69.80	-9.32	60.48	74.00	-13.52	PK
V	4824.00	60.49	-9.32	51.17	54.00	-2.83	AV
V	7236.00	59.97	-3.49	56.48	74.00	-17.52	PK
V	7236.00	48.98	-3.49	45.49	54.00	-8.51	AV
H	4824.00	67.21	-9.32	57.89	74.00	-16.11	PK
H	4824.00	57.17	-9.32	47.85	54.00	-6.15	AV
H	7236.00	58.93	-3.49	55.44	74.00	-18.56	PK
H	7236.00	51.20	-3.49	47.71	54.00	-6.29	AV
Middle channel:2437MHz							
V	4874.00	65.89	-8.86	57.03	74.00	-16.97	PK
V	4874.00	57.67	-8.86	48.81	54.00	-5.19	AV
V	7311.00	56.93	-3.27	53.66	74.00	-20.34	PK
V	7311.00	48.26	-3.27	44.99	54.00	-9.01	AV
H	4874.00	63.58	-8.86	54.72	74.00	-19.28	PK
H	4874.00	54.50	-8.86	45.64	54.00	-8.36	AV
H	7311.00	55.57	-3.27	52.30	74.00	-21.70	PK
H	7311.00	47.63	-3.27	44.36	54.00	-9.64	AV
High channel:2462MHz							
V	4924.00	67.56	-8.72	58.84	74.00	-15.16	PK
V	4924.00	58.69	-8.72	49.97	54.00	-4.03	AV
V	7386.00	59.22	-3.74	55.48	74.00	-18.52	PK
V	7386.00	48.24	-3.74	44.50	54.00	-9.50	AV
H	4924.00	65.70	-8.72	56.98	74.00	-17.02	PK
H	4924.00	54.97	-8.72	46.25	54.00	-7.75	AV
H	7386.00	56.31	-3.74	52.57	74.00	-21.43	PK
H	7386.00	47.91	-3.74	44.17	54.00	-9.83	AV

Remark:

- 1.Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Emission Level - Limit
2. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. The worst case is Antenna A.

802.11g

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	67.78	-9.32	58.46	74.00	-15.54	PK
V	4824.00	56.98	-9.32	47.66	54.00	-6.34	AV
V	7236.00	57.71	-3.49	54.22	74.00	-19.78	PK
V	7236.00	47.51	-3.49	44.02	54.00	-9.98	AV
H	4824.00	63.00	-9.32	53.68	74.00	-20.32	PK
H	4824.00	53.30	-9.32	43.98	54.00	-10.02	AV
H	7236.00	56.17	-3.49	52.68	74.00	-21.32	PK
H	7236.00	48.00	-3.49	44.51	54.00	-9.49	AV
Middle channel:2437MHz							
V	4874.00	65.61	-8.86	56.75	74.00	-17.25	PK
V	4874.00	56.86	-8.86	48.00	54.00	-6.00	AV
V	7311.00	55.44	-3.27	52.17	74.00	-21.83	PK
V	7311.00	46.52	-3.27	43.25	54.00	-10.75	AV
H	4874.00	60.71	-8.86	51.85	74.00	-22.15	PK
H	4874.00	50.54	-8.86	41.68	54.00	-12.32	AV
H	7311.00	52.50	-3.27	49.23	74.00	-24.77	PK
H	7311.00	43.80	-3.27	40.53	54.00	-13.47	AV
High channel:2462MHz							
V	4924.00	68.12	-8.72	59.40	74.00	-14.60	PK
V	4924.00	60.01	-8.72	51.29	54.00	-2.71	AV
V	7386.00	60.23	-3.74	56.49	74.00	-17.51	PK
V	7386.00	50.53	-3.74	46.79	54.00	-7.21	AV
H	4924.00	66.08	-8.72	57.36	74.00	-16.64	PK
H	4924.00	55.63	-8.72	46.91	54.00	-7.09	AV
H	7386.00	57.38	-3.74	53.64	74.00	-20.36	PK
H	7386.00	49.00	-3.74	45.26	54.00	-8.74	AV

Remark:

1. Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over= Emission Level - Limit
2. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. The worst case is Antenna A.

802.11n20

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	68.98	-9.32	59.66	74.00	-14.34	PK
V	4824.00	60.85	-9.32	51.53	54.00	-2.47	AV
V	7236.00	59.17	-3.49	55.68	74.00	-18.32	PK
V	7236.00	49.81	-3.49	46.32	54.00	-7.68	AV
H	4824.00	65.96	-9.32	56.64	74.00	-17.36	PK
H	4824.00	55.90	-9.32	46.58	54.00	-7.42	AV
H	7236.00	58.08	-3.49	54.59	74.00	-19.41	PK
H	7236.00	50.39	-3.49	46.90	54.00	-7.10	AV
Middle channel:2437MHz							
V	4874.00	66.27	-8.86	57.41	74.00	-16.59	PK
V	4874.00	58.95	-8.86	50.09	54.00	-3.91	AV
V	7311.00	55.97	-3.27	52.70	74.00	-21.30	PK
V	7311.00	46.08	-3.27	42.81	54.00	-11.19	AV
H	4874.00	64.36	-8.86	55.50	74.00	-18.50	PK
H	4874.00	53.84	-8.86	44.98	54.00	-9.02	AV
H	7311.00	54.83	-3.27	51.56	74.00	-22.44	PK
H	7311.00	46.03	-3.27	42.76	54.00	-11.24	AV
High channel:2462MHz							
V	4924.00	68.40	-8.72	59.68	74.00	-14.32	PK
V	4924.00	58.77	-8.72	50.05	54.00	-3.95	AV
V	7386.00	60.24	-3.74	56.50	74.00	-17.50	PK
V	7386.00	50.58	-3.74	46.84	54.00	-7.16	AV
H	4924.00	66.42	-8.72	57.70	74.00	-16.30	PK
H	4924.00	56.98	-8.72	48.26	54.00	-5.74	AV
H	7386.00	58.92	-3.74	55.18	74.00	-18.82	PK
H	7386.00	50.20	-3.74	46.46	54.00	-7.54	AV

Remark:

1. Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over= Emission Level - Limit
2. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. The worst case is MIMO.

802.11n40

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2422MHz							
V	4844.00	68.78	-9.02	59.76	74.00	-14.24	PK
V	4844.00	60.07	-9.02	51.05	54.00	-2.95	AV
V	7266.00	61.32	-3.19	58.13	74.00	-15.87	PK
V	7266.00	52.17	-3.19	48.98	54.00	-5.02	AV
H	4844.00	64.42	-9.02	55.40	74.00	-18.60	PK
H	4844.00	54.58	-9.02	45.56	54.00	-8.44	AV
H	7266.00	60.17	-3.19	56.98	74.00	-17.02	PK
H	7266.00	51.80	-3.19	48.61	54.00	-5.39	AV
Middle channel:2437MHz							
V	4874.00	66.64	-8.86	57.78	74.00	-16.22	PK
V	4874.00	57.86	-8.86	49.00	54.00	-5.00	AV
V	7311.00	56.08	-3.27	52.81	74.00	-21.19	PK
V	7311.00	47.01	-3.27	43.74	54.00	-10.26	AV
H	4874.00	65.05	-8.86	56.19	74.00	-17.81	PK
H	4874.00	55.27	-8.86	46.41	54.00	-7.59	AV
H	7311.00	54.82	-3.27	51.55	74.00	-22.45	PK
H	7311.00	47.38	-3.27	44.11	54.00	-9.89	AV
High channel:2452MHz							
V	4904.00	67.81	-8.77	59.04	74.00	-14.96	PK
V	4904.00	58.94	-8.77	50.17	54.00	-3.83	AV
V	7356.00	60.88	-3.71	57.17	74.00	-16.83	PK
V	7356.00	50.44	-3.71	46.73	54.00	-7.27	AV
H	4904.00	66.73	-8.77	57.96	74.00	-16.04	PK
H	4904.00	55.98	-8.77	47.21	54.00	-6.79	AV
H	7356.00	59.81	-3.71	56.10	74.00	-17.90	PK
H	7356.00	51.51	-3.71	47.80	54.00	-6.20	AV

Remark:

1. Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over= Emission Level - Limit
2. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. The worst case is MIMO.

802.11ax20

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	68.77	-9.32	59.45	74.00	-14.55	PK
V	4824.00	58.95	-9.32	49.63	54.00	-4.37	AV
V	7236.00	59.07	-3.49	55.58	74.00	-18.42	PK
V	7236.00	49.50	-3.49	46.01	54.00	-7.99	AV
H	4824.00	66.03	-9.32	56.71	74.00	-17.29	PK
H	4824.00	56.50	-9.32	47.18	54.00	-6.82	AV
H	7236.00	56.49	-3.49	53.00	74.00	-21.00	PK
H	7236.00	48.38	-3.49	44.89	54.00	-9.11	AV
Middle channel:2437MHz							
V	4874.00	65.76	-8.86	56.90	74.00	-17.10	PK
V	4874.00	59.30	-8.86	50.44	54.00	-3.56	AV
V	7311.00	56.16	-3.27	52.89	74.00	-21.11	PK
V	7311.00	47.92	-3.27	44.65	54.00	-9.35	AV
H	4874.00	64.38	-8.86	55.52	74.00	-18.48	PK
H	4874.00	54.18	-8.86	45.32	54.00	-8.68	AV
H	7311.00	53.99	-3.27	50.72	74.00	-23.28	PK
H	7311.00	46.11	-3.27	42.84	54.00	-11.16	AV
High channel:2462MHz							
V	4924.00	67.19	-8.72	58.47	74.00	-15.53	PK
V	4924.00	56.89	-8.72	48.17	54.00	-5.83	AV
V	7386.00	61.02	-3.74	57.28	74.00	-16.72	PK
V	7386.00	51.65	-3.74	47.91	54.00	-6.09	AV
H	4924.00	64.78	-8.72	56.06	74.00	-17.94	PK
H	4924.00	54.09	-8.72	45.37	54.00	-8.63	AV
H	7386.00	58.78	-3.74	55.04	74.00	-18.96	PK
H	7386.00	50.44	-3.74	46.70	54.00	-7.30	AV

Remark:

1.Emission Level = Meter Reading + Factor,

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Over= Emission Level - Limit

2. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4. The worst case is MIMO.

802.11ax40

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2422MHz							
V	4844.00	67.96	-9.02	58.94	74.00	-15.06	PK
V	4844.00	58.44	-9.02	49.42	54.00	-4.58	AV
V	7266.00	59.49	-3.19	56.30	74.00	-17.70	PK
V	7266.00	49.12	-3.19	45.93	54.00	-8.07	AV
H	4844.00	65.61	-9.02	56.59	74.00	-17.41	PK
H	4844.00	56.03	-9.02	47.01	54.00	-6.99	AV
H	7266.00	56.65	-3.19	53.46	74.00	-20.54	PK
H	7266.00	49.25	-3.19	46.06	54.00	-7.94	AV
Middle channel:2437MHz							
V	4874.00	66.80	-8.86	57.94	74.00	-16.06	PK
V	4874.00	60.10	-8.86	51.24	54.00	-2.76	AV
V	7311.00	59.06	-3.27	55.79	74.00	-18.21	PK
V	7311.00	50.66	-3.27	47.39	54.00	-6.61	AV
H	4874.00	65.35	-8.86	56.49	74.00	-17.51	PK
H	4874.00	55.21	-8.86	46.35	54.00	-7.65	AV
H	7311.00	57.71	-3.27	54.44	74.00	-19.56	PK
H	7311.00	49.03	-3.27	45.76	54.00	-8.24	AV
High channel:2452MHz							
V	4904.00	68.54	-8.77	59.77	74.00	-14.23	PK
V	4904.00	59.16	-8.77	50.39	54.00	-3.61	AV
V	7356.00	61.12	-3.71	57.41	74.00	-16.59	PK
V	7356.00	50.70	-3.71	46.99	54.00	-7.01	AV
H	4904.00	66.18	-8.77	57.41	74.00	-16.59	PK
H	4904.00	56.62	-8.77	47.85	54.00	-6.15	AV
H	7356.00	59.18	-3.71	55.47	74.00	-18.53	PK
H	7356.00	50.27	-3.71	46.56	54.00	-7.44	AV

Remark:

1. Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over= Emission Level - Limit
2. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. The worst case is MIMO.

802.11be20

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2412MHz							
V	4824.00	69.03	-9.32	59.71	74.00	-14.29	PK
V	4824.00	59.27	-9.32	49.95	54.00	-4.05	AV
V	7236.00	58.30	-3.49	54.81	74.00	-19.19	PK
V	7236.00	47.44	-3.49	43.95	54.00	-10.05	AV
H	4824.00	66.60	-9.32	57.28	74.00	-16.72	PK
H	4824.00	57.07	-9.32	47.75	54.00	-6.25	AV
H	7236.00	55.90	-3.49	52.41	74.00	-21.59	PK
H	7236.00	47.87	-3.49	44.38	54.00	-9.62	AV
Middle channel:2437MHz							
V	4874.00	65.39	-8.86	56.53	74.00	-17.47	PK
V	4874.00	57.68	-8.86	48.82	54.00	-5.18	AV
V	7311.00	57.69	-3.27	54.42	74.00	-19.58	PK
V	7311.00	48.64	-3.27	45.37	54.00	-8.63	AV
H	4874.00	63.21	-8.86	54.35	74.00	-19.65	PK
H	4874.00	52.74	-8.86	43.88	54.00	-10.12	AV
H	7311.00	55.48	-3.27	52.21	74.00	-21.79	PK
H	7311.00	46.92	-3.27	43.65	54.00	-10.35	AV
High channel:2462MHz							
V	4924.00	67.89	-8.72	59.17	74.00	-14.83	PK
V	4924.00	59.71	-8.72	50.99	54.00	-3.01	AV
V	7386.00	61.76	-3.74	58.02	74.00	-15.98	PK
V	7386.00	51.71	-3.74	47.97	54.00	-6.03	AV
H	4924.00	65.33	-8.72	56.61	74.00	-17.39	PK
H	4924.00	55.01	-8.72	46.29	54.00	-7.71	AV
H	7386.00	60.52	-3.74	56.78	74.00	-17.22	PK
H	7386.00	52.21	-3.74	48.47	54.00	-5.53	AV

Remark:

1. Emission Level = Meter Reading + Factor,

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Over= Emission Level - Limit

2. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB

3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

4. The worst case is MIMO.

802.11be40

Polar (H/V)	Frequency	Reading Level	Correct Factor	Measure- ment	Limits	Over	Detector Type
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dBuV/ m)	(dB)	
Low channel:2422MHz							
V	4844.00	67.48	-9.02	58.46	74.00	-15.54	PK
V	4844.00	57.07	-9.02	48.05	54.00	-5.95	AV
V	7266.00	56.90	-3.19	53.71	74.00	-20.29	PK
V	7266.00	47.83	-3.19	44.64	54.00	-9.36	AV
H	4844.00	66.38	-9.02	57.36	74.00	-16.64	PK
H	4844.00	56.71	-9.02	47.69	54.00	-6.31	AV
H	7266.00	55.26	-3.19	52.07	74.00	-21.93	PK
H	7266.00	46.65	-3.19	43.46	54.00	-10.54	AV
Middle channel:2437MHz							
V	4874.00	65.24	-8.86	56.38	74.00	-17.62	PK
V	4874.00	56.51	-8.86	47.65	54.00	-6.35	AV
V	7311.00	55.58	-3.27	52.31	74.00	-21.69	PK
V	7311.00	46.95	-3.27	43.68	54.00	-10.32	AV
H	4874.00	63.25	-8.86	54.39	74.00	-19.61	PK
H	4874.00	52.81	-8.86	43.95	54.00	-10.05	AV
H	7311.00	53.40	-3.27	50.13	74.00	-23.87	PK
H	7311.00	45.54	-3.27	42.27	54.00	-11.73	AV
High channel:2452MHz							
V	4904.00	66.41	-8.77	57.64	74.00	-16.36	PK
V	4904.00	57.59	-8.77	48.82	54.00	-5.18	AV
V	7356.00	59.76	-3.71	56.05	74.00	-17.95	PK
V	7356.00	48.79	-3.71	45.08	54.00	-8.92	AV
H	4904.00	64.85	-8.77	56.08	74.00	-17.92	PK
H	4904.00	53.97	-8.77	45.20	54.00	-8.80	AV
H	7356.00	57.04	-3.71	53.33	74.00	-20.67	PK
H	7356.00	48.96	-3.71	45.25	54.00	-8.75	AV


Remark:

1. Emission Level = Meter Reading + Factor,
Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Over= Emission Level - Limit
2. In restricted bands of operation, The spurious emissions below the permissible value more than 20dB
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
4. The worst case is MIMO.

8. Radiated Band Emission Measurement and Restricted Bands Of Operation

8.1 Block Diagram Of Test Setup

Radiated Emission Test-Up Frequency Above 1GHz

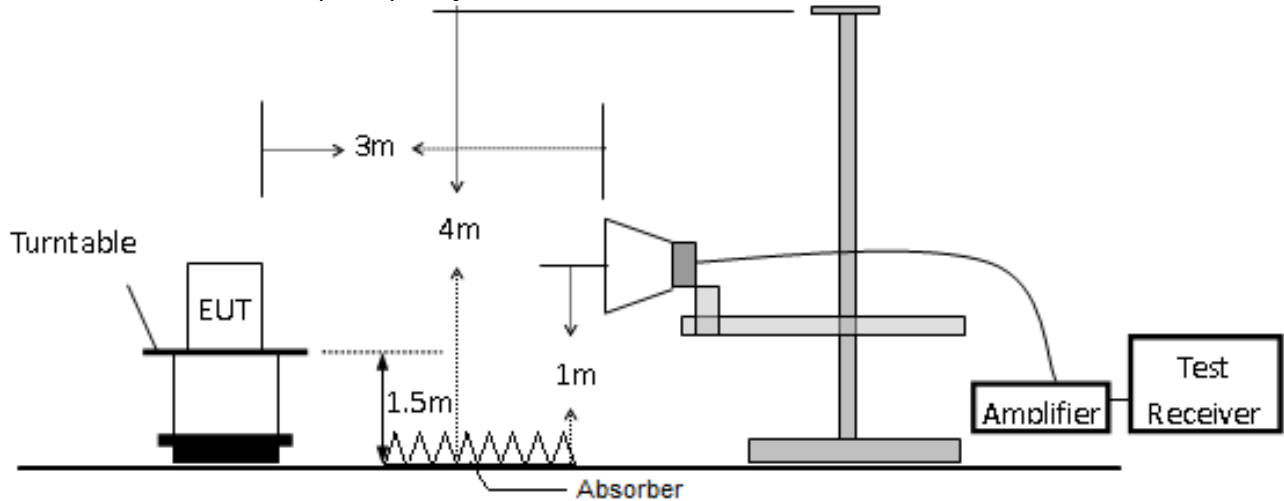

8.2 Limit

FCC Part15 C Section 15.209 and 15.205

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Limits Of Radiated Emission Measurement (Above 1000MHz)

Frequency (MHz)	Limit (dBuV/m) (at 3M)	
	Peak	Average
Above 1000	74	54

Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3)Emission level (dBuV/m)=20log Emission level (uV/m).

8.3 Test procedure

Receiver Parameter	Setting
Attenuation	Auto
Start Frequency	2300MHz
Stop Frequency	2520
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Above 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- g. Test the EUT in the lowest channel, the middlest channel, the Highest channel.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

8.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

8.5 Test Result

Test mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure-ment (dBuV/m)	Limits (dBuV/m)		Result
					PK	PK	AV	
802.11b	Low Channel 2412MHz							
	H	2390.00	71.18	-17.27	53.91	74.00	54.00	PASS
	H	2400.00	62.74	-17.27	45.47	74.00	54.00	PASS
	V	2390.00	77.42	-17.23	60.19	74.00	54.00	PASS
	V	2400.00	68.47	-17.23	51.24	74.00	54.00	PASS
	High Channel 2462MHz							
	H	2483.50	70.14	-16.91	53.23	74.00	54.00	PASS
	H	2500.00	59.66	-16.91	42.75	74.00	54.00	PASS
	V	2483.50	76.81	-16.71	60.10	74.00	54.00	PASS
	V	2500.00	67.37	-16.71	50.66	74.00	54.00	PASS
802.11g	Low Channel 2412MHz							
	H	2390.00	71.23	-17.27	53.96	74.00	54.00	PASS
	H	2400.00	61.75	-17.27	44.48	74.00	54.00	PASS
	V	2390.00	77.59	-17.23	60.36	74.00	54.00	PASS
	V	2400.00	68.41	-17.23	51.18	74.00	54.00	PASS
	High Channel 2462MHz							
	H	2483.50	72.01	-16.91	55.10	74.00	54.00	PASS
	H	2500.00	63.45	-16.91	46.54	74.00	54.00	PASS
	V	2483.50	76.06	-16.71	59.35	74.00	54.00	PASS
	V	2500.00	66.81	-16.71	50.10	74.00	54.00	PASS
Remark:								
1. Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Emission Level – Limit								
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.								
3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB								
4.The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.								
5. The worst case is Antenna A.								


Test mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)		Result
					PK	PK	AV	
802.11n20	Low Channel 2412MHz							
	H	2390.00	71.61	-17.27	54.34	74.00	54.00	PASS
	H	2400.00	62.41	-17.27	45.14	74.00	54.00	PASS
	V	2390.00	77.52	-17.23	60.29	74.00	54.00	PASS
	V	2400.00	67.21	-17.23	49.98	74.00	54.00	PASS
	High Channel 2462MHz							
	H	2483.50	71.94	-16.91	55.03	74.00	54.00	PASS
	H	2500.00	63.68	-16.91	46.77	74.00	54.00	PASS
	V	2483.50	76.74	-16.71	60.03	74.00	54.00	PASS
	V	2500.00	66.75	-16.71	50.04	74.00	54.00	PASS
802.11n40	Low Channel 2422MHz							
	H	2390.00	70.73	-17.27	53.46	74.00	54.00	PASS
	H	2400.00	62.41	-17.27	45.14	74.00	54.00	PASS
	V	2390.00	76.85	-17.23	59.62	74.00	54.00	PASS
	V	2400.00	67.74	-17.23	50.51	74.00	54.00	PASS
	High Channel 2452MHz							
	H	2483.50	71.27	-16.91	54.36	74.00	54.00	PASS
	H	2500.00	60.79	-16.91	43.88	74.00	54.00	PASS
	V	2483.50	77.33	-16.71	60.62	74.00	54.00	PASS
	V	2500.00	66.53	-16.71	49.82	74.00	54.00	PASS
Remark:								
1. Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Emission Level – Limit								
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.								
3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB								
4.The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.								
5. The worst case is MIMO.								

Test mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)		Result
					PK	PK	AV	
802.11ax20	Low Channel 2412MHz							
	H	2390.00	72.96	-17.27	55.69	74.00	54.00	PASS
	H	2400.00	63.60	-17.27	46.33	74.00	54.00	PASS
	V	2390.00	76.68	-17.23	59.45	74.00	54.00	PASS
	V	2400.00	66.57	-17.23	49.34	74.00	54.00	PASS
	High Channel 2462MHz							
	H	2483.50	70.68	-16.91	53.77	74.00	54.00	PASS
	H	2500.00	60.00	-16.91	43.09	74.00	54.00	PASS
	V	2483.50	78.22	-16.71	61.51	74.00	54.00	PASS
	V	2500.00	69.03	-16.71	52.32	74.00	54.00	PASS
802.11ax40	Low Channel 2422MHz							
	H	2390.00	72.01	-17.27	54.74	74.00	54.00	PASS
	H	2400.00	61.20	-17.27	43.93	74.00	54.00	PASS
	V	2390.00	78.83	-17.23	61.60	74.00	54.00	PASS
	V	2400.00	68.98	-17.23	51.75	74.00	54.00	PASS
	High Channel 2452MHz							
	H	2483.50	70.05	-16.91	53.14	74.00	54.00	PASS
	H	2500.00	59.34	-16.91	42.43	74.00	54.00	PASS
	V	2483.50	78.69	-16.71	61.98	74.00	54.00	PASS
	V	2500.00	69.79	-16.71	53.08	74.00	54.00	PASS
Remark:								
1. Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Emission Level – Limit								
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.								
3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB								
4.The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.								
5. The worst case is MIMO.								

Test mode	Polar (H/V)	Frequency (MHz)	Reading Level (dBuV/m)	Correct Factor (dB)	Measure- ment (dBuV/m)	Limits (dBuV/m)		Result
					PK	PK	AV	
802.11be20	Low Channel 2412MHz							
	H	2390.00	72.48	-17.27	55.21	74.00	54.00	PASS
	H	2400.00	63.45	-17.27	46.18	74.00	54.00	PASS
	V	2390.00	78.38	-17.23	61.15	74.00	54.00	PASS
	V	2400.00	68.33	-17.23	51.10	74.00	54.00	PASS
	High Channel 2462MHz							
	H	2483.50	71.22	-16.91	54.31	74.00	54.00	PASS
	H	2500.00	62.16	-16.91	45.25	74.00	54.00	PASS
	V	2483.50	77.40	-16.71	60.69	74.00	54.00	PASS
	V	2500.00	67.32	-16.71	50.61	74.00	54.00	PASS
802.11be40	Low Channel 2422MHz							
	H	2390.00	70.25	-17.27	52.98	74.00	54.00	PASS
	H	2400.00	59.63	-17.27	42.36	74.00	54.00	PASS
	V	2390.00	77.26	-17.23	60.03	74.00	54.00	PASS
	V	2400.00	67.82	-17.23	50.59	74.00	54.00	PASS
	High Channel 2452MHz							
	H	2483.50	70.20	-16.91	53.29	74.00	54.00	PASS
	H	2500.00	61.65	-16.91	44.74	74.00	54.00	PASS
	V	2483.50	77.14	-16.71	60.43	74.00	54.00	PASS
	V	2500.00	68.67	-16.71	51.96	74.00	54.00	PASS
Remark:								
1. Emission Level = Meter Reading + Factor, Factor = Antenna Factor + Cable Loss – Pre-amplifier. Over= Emission Level – Limit								
2. If the PK measured levels comply with average limit, then the average level were deemed to comply with average limit.								
3 In restricted bands of operation, The spurious emissions below the permissible value more than 20dB								
4.The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.								
5. The worst case is MIMO.								

9. Power Spectral Density Test

9.1 Block Diagram Of Test Setup

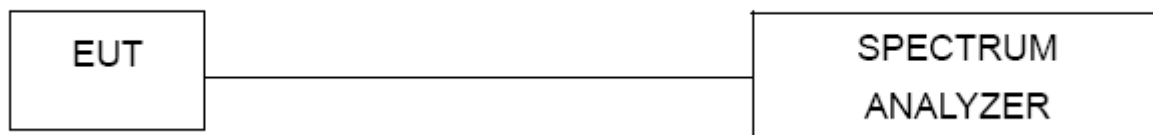

9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

Limits Of Radiated Emission Measurement (Above 1000MHz)

9.3 Test procedure

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: 3 kHz
4. Set the VBW $\geq 3 \times$ RBW.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

9.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss

9.5 Test Result


Temperature:	26℃	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz



Test Mode	Frequency	Ant A Power Spectral Density (dBm/3kHz)	Ant B Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
TX b Mode	2412 MHz	-10.81	-10.32	8	PASS
	2437 MHz	-10.21	-10.41	8	PASS
	2462 MHz	-10.21	-10.1	8	PASS
TX g Mode	2412 MHz	-16.94	-16.31	8	PASS
	2437 MHz	-16.48	-16.39	8	PASS
	2462 MHz	-17.07	-17.2	8	PASS
TX n Mode(20M)	2412 MHz	-18	-17.8	8	PASS
	2437 MHz	-17.98	-17.63	8	PASS
	2462 MHz	-16.85	-18.08	8	PASS
TX n Mode(40M)	2422 MHz	-22.25	-22.63	8	PASS
	2437 MHz	-21.4	-22.28	8	PASS
	2452 MHz	-22.07	-21.66	8	PASS
TX ax Mode(20M)	2412 MHz	-20.1	-20.97	8	PASS
	2437 MHz	-19.2	-19.51	8	PASS
	2462 MHz	-19.49	-20.45	8	PASS
TX ax Mode(40M)	2422 MHz	-23.72	-23.76	8	PASS
	2437 MHz	-22.85	-23.26	8	PASS
	2452 MHz	-24.67	-24.16	8	PASS
TX be Mode(20M)	2412 MHz	-15.25	-15.11	8	PASS
	2437 MHz	-14.63	-13.93	8	PASS
	2462 MHz	-15.8	-14.94	8	PASS
TX be Mode(40M)	2422 MHz	-20.18	-18.68	8	PASS
	2437 MHz	-19.45	-17.56	8	PASS
	2452 MHz	-17.72	-18.51	8	PASS



MIMO



Test Mode	Frequency	Power Spectral Density(dBm/3kHz)	Limit (dBm/3kHz)	Result
TX n Mode(20M)	2412 MHz	-14.89	8	PASS
	2437 MHz	-14.79	8	PASS
	2462 MHz	-14.41	8	PASS
TX n Mode(40M)	2422 MHz	-19.43	8	PASS
	2437 MHz	-18.81	8	PASS
	2452 MHz	-18.85	8	PASS
TX ax Mode(20M)	2412 MHz	-17.50	8	PASS
	2437 MHz	-16.34	8	PASS
	2462 MHz	-16.93	8	PASS
TX ax Mode(40M)	2422 MHz	-20.73	8	PASS
	2437 MHz	-20.04	8	PASS
	2452 MHz	-21.40	8	PASS
TX be Mode(20M)	2412 MHz	-12.17	8	PASS
	2437 MHz	-11.26	8	PASS
	2462 MHz	-12.34	8	PASS
TX be Mode(40M)	2422 MHz	-16.36	8	PASS
	2437 MHz	-15.39	8	PASS
	2452 MHz	-15.09	8	PASS



Ant A:


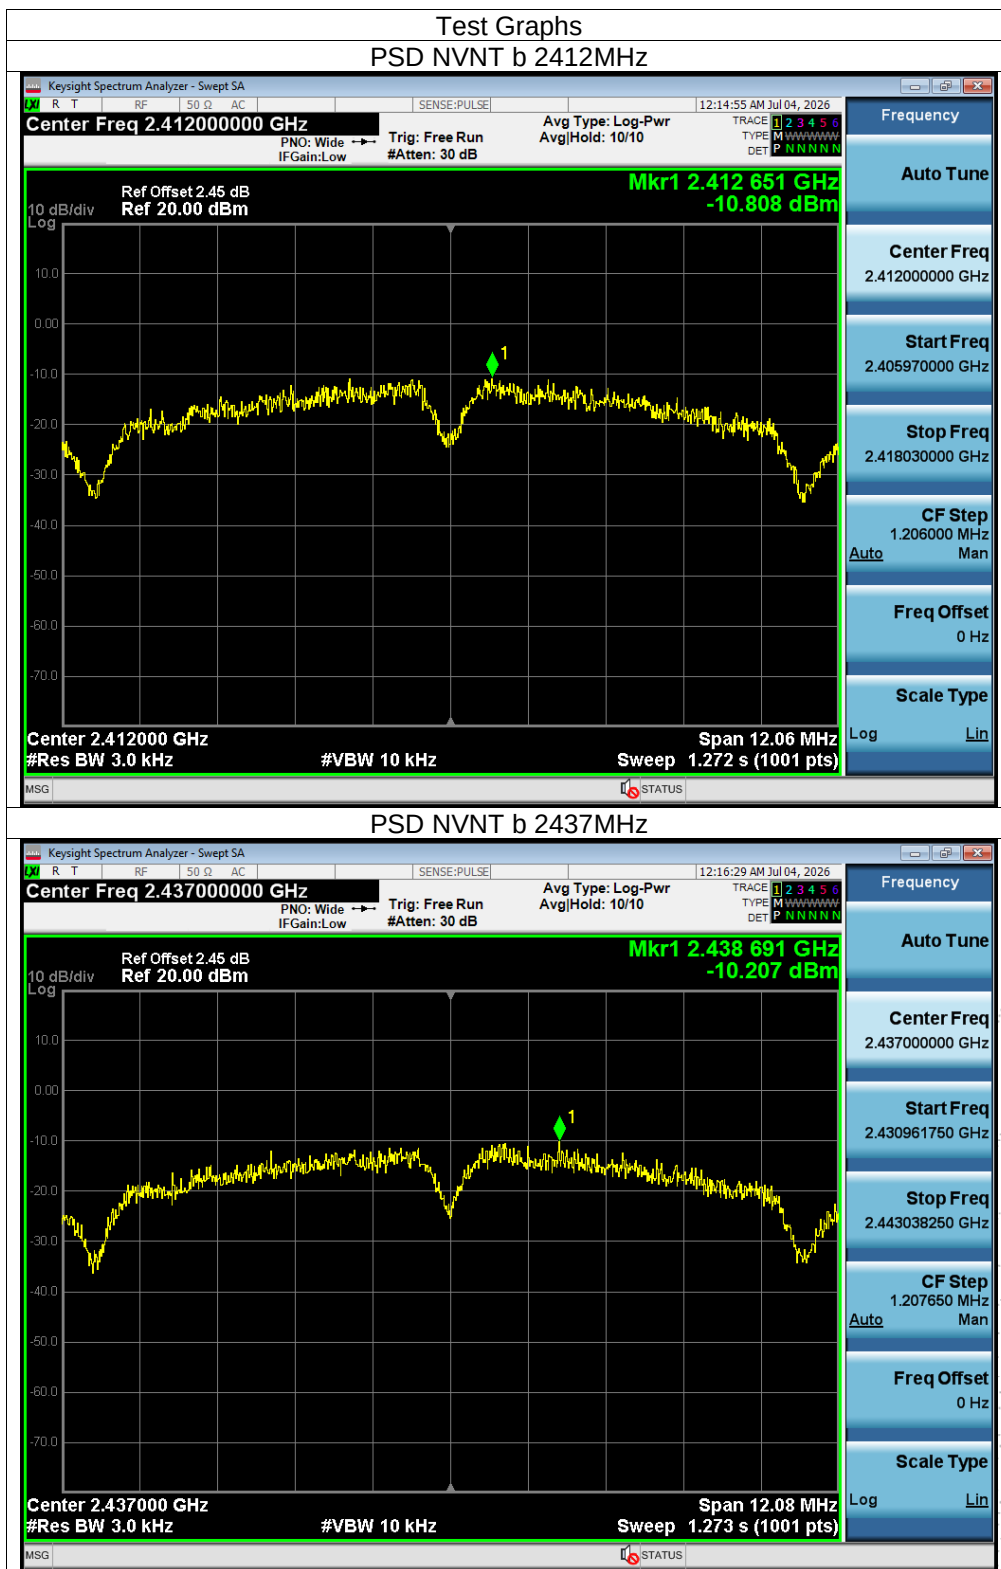


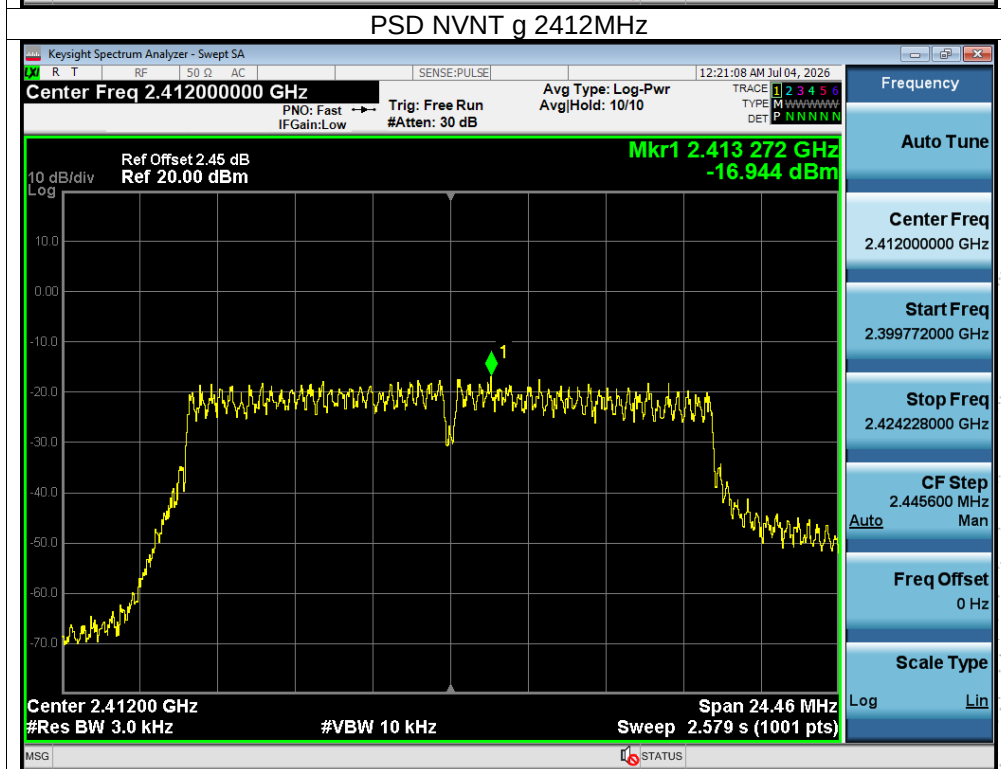
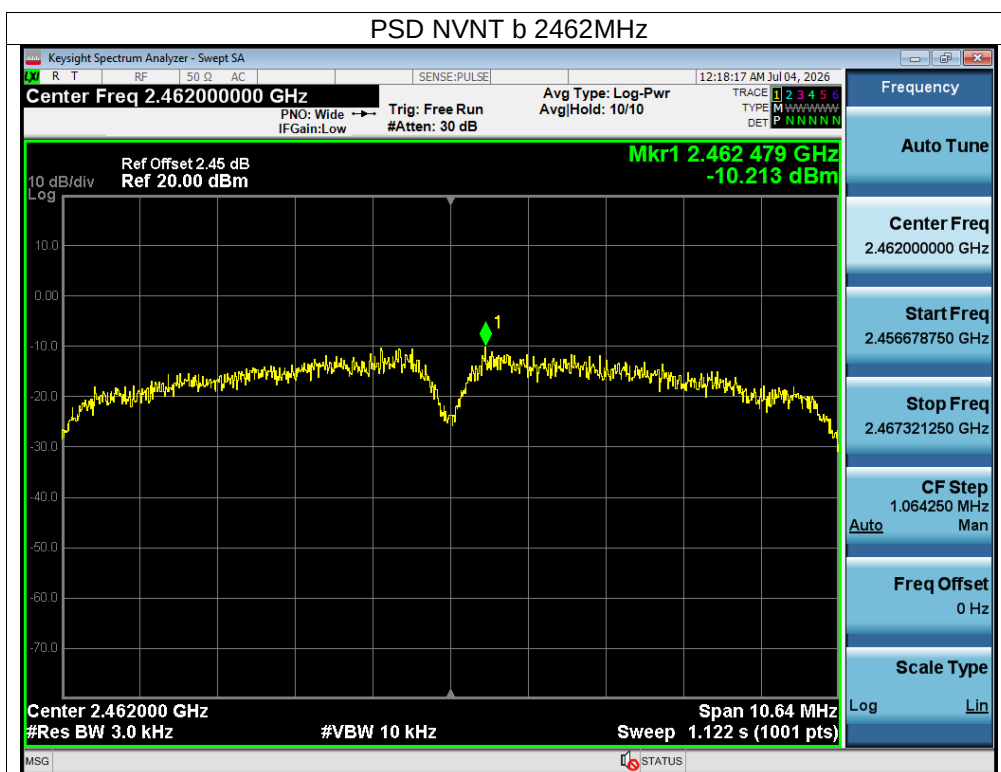


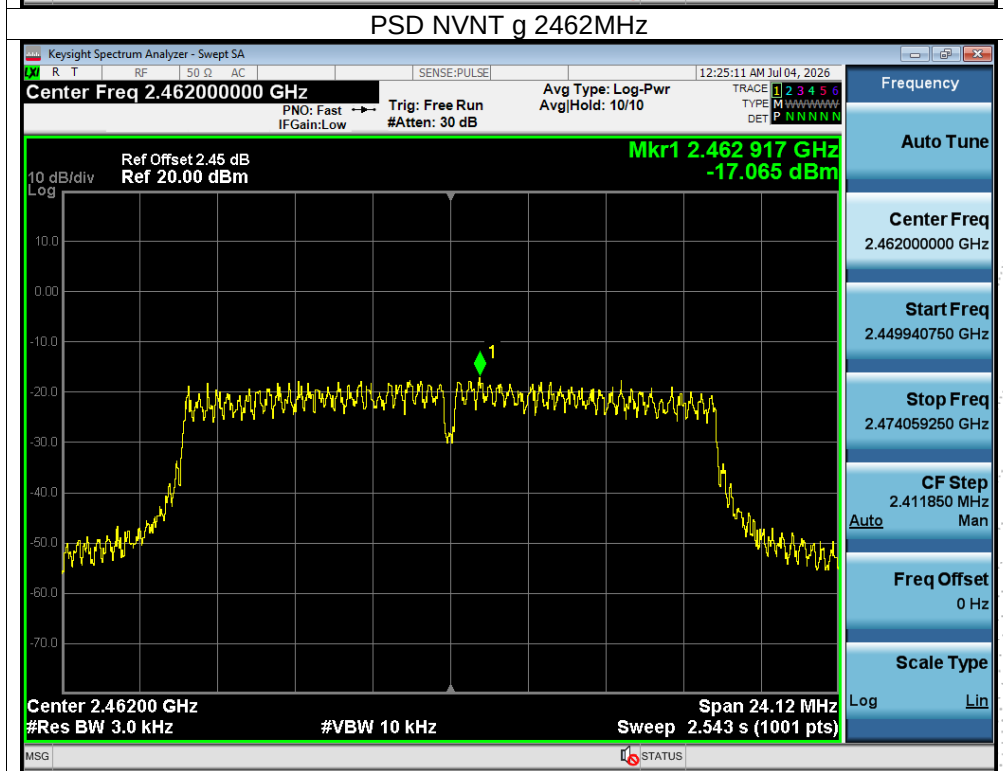
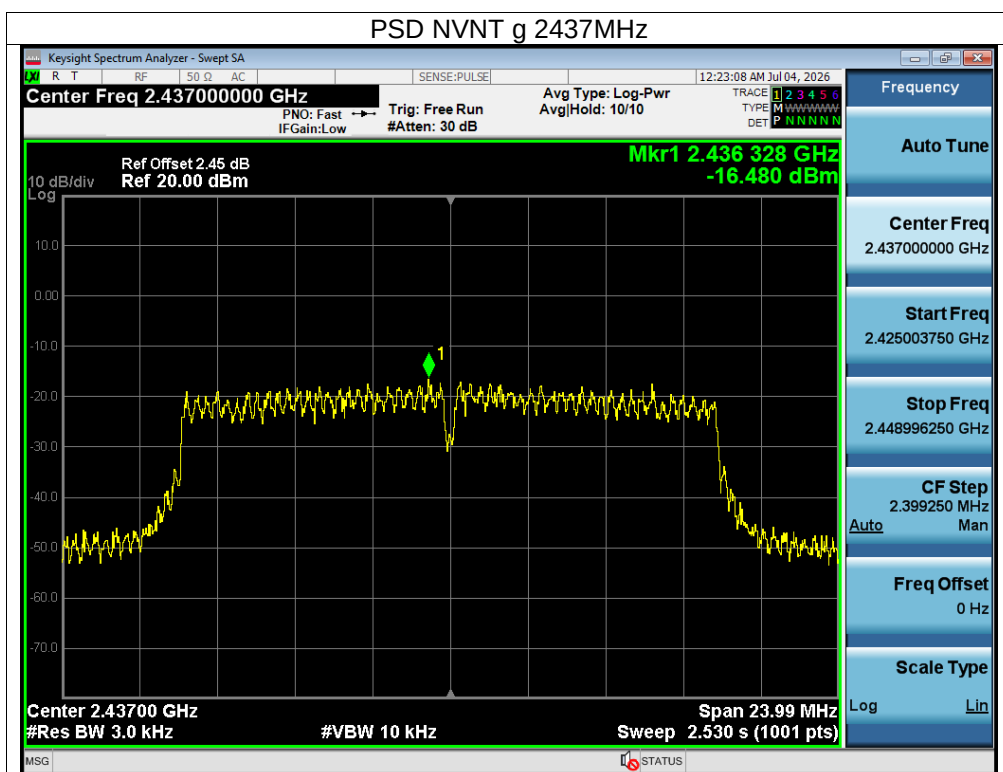


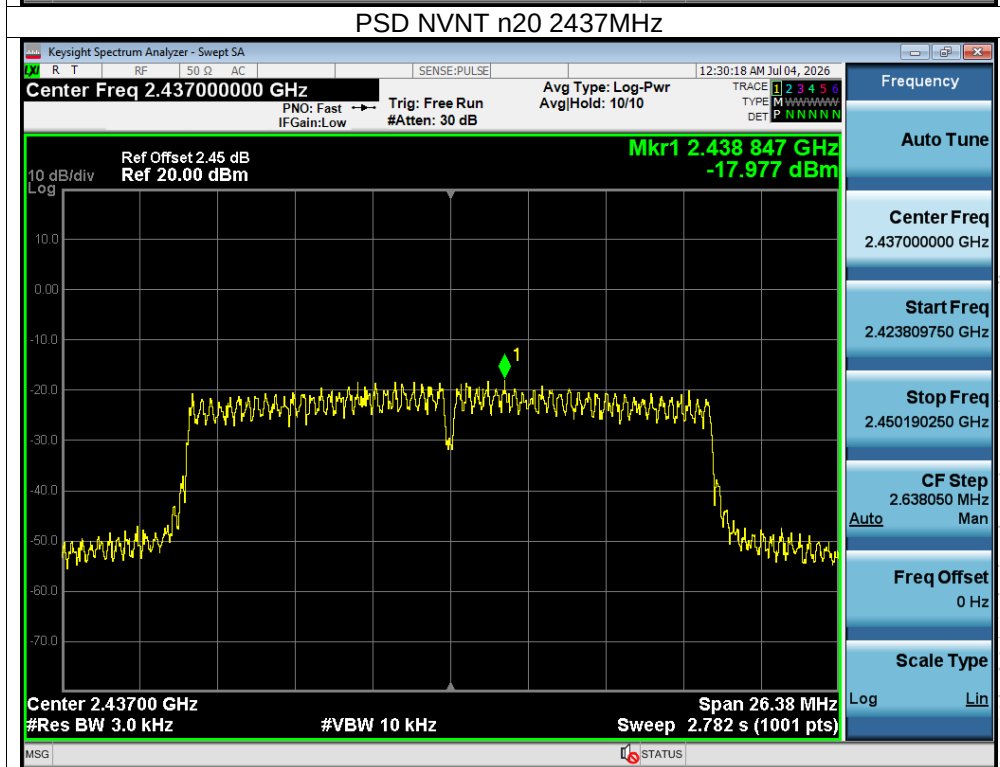
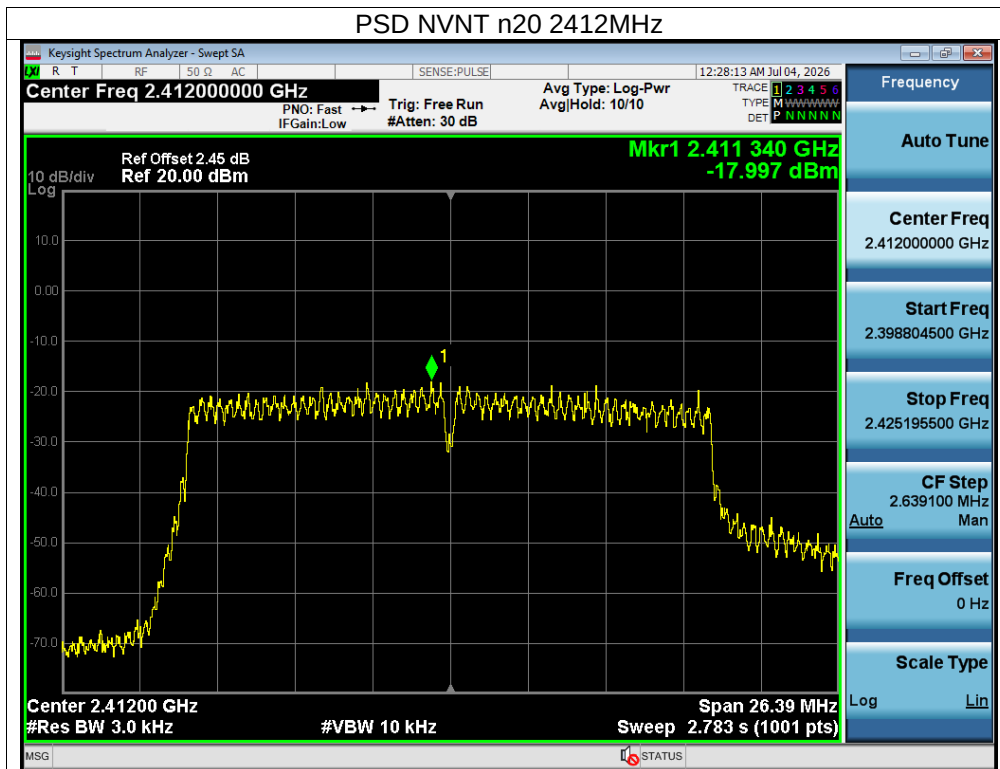


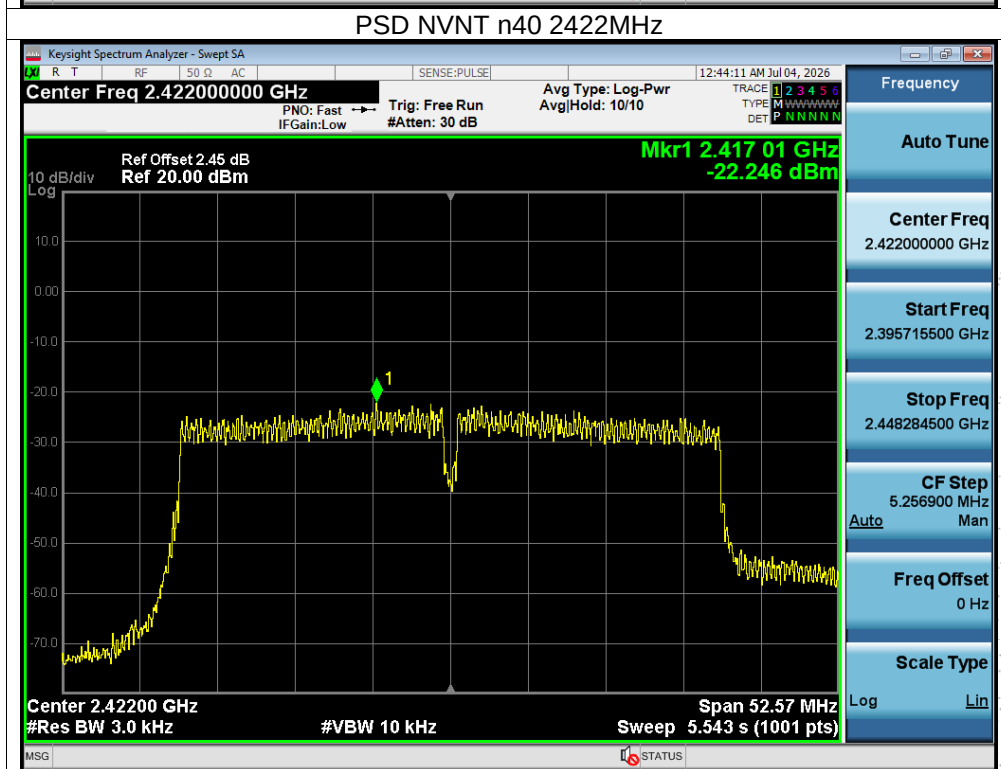
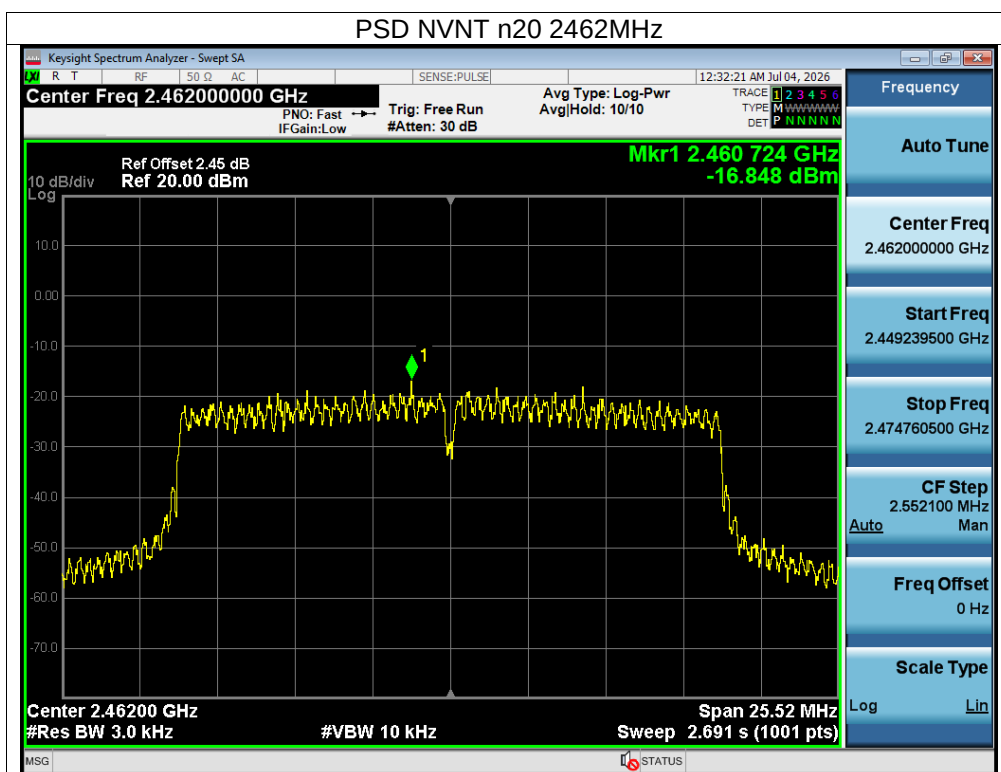


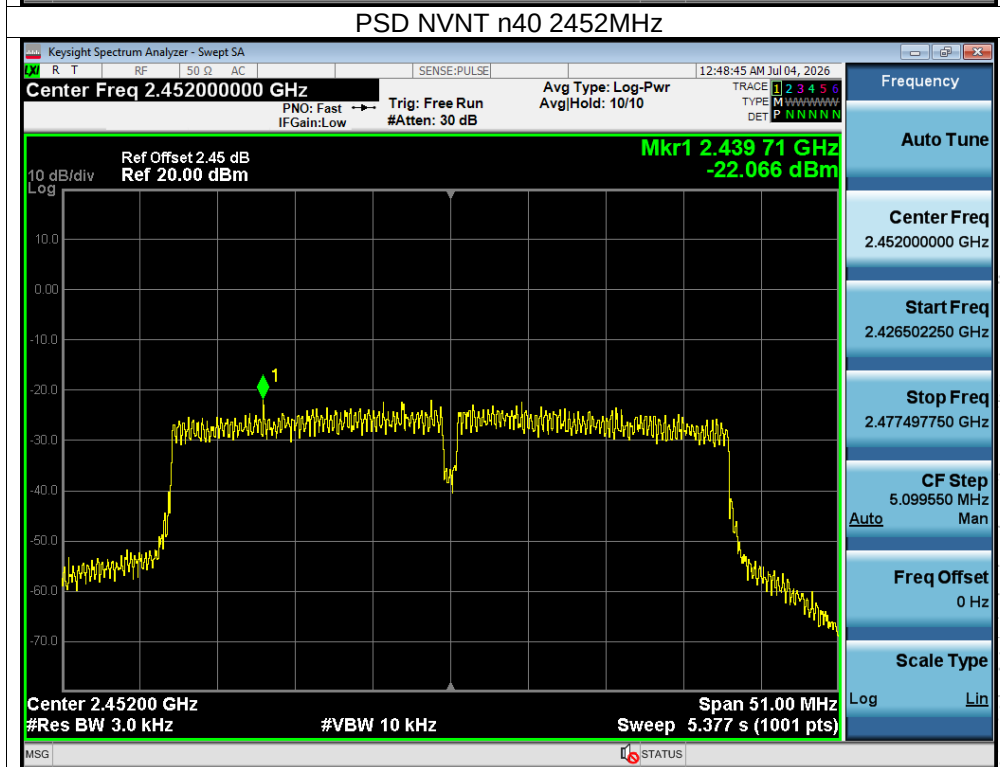
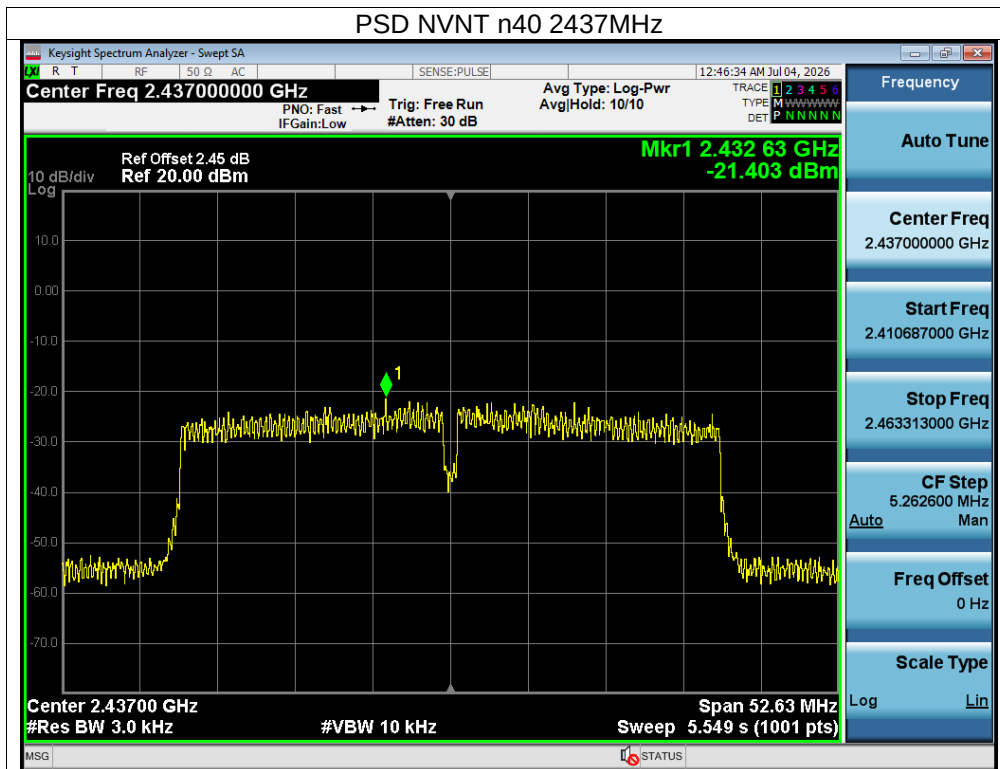


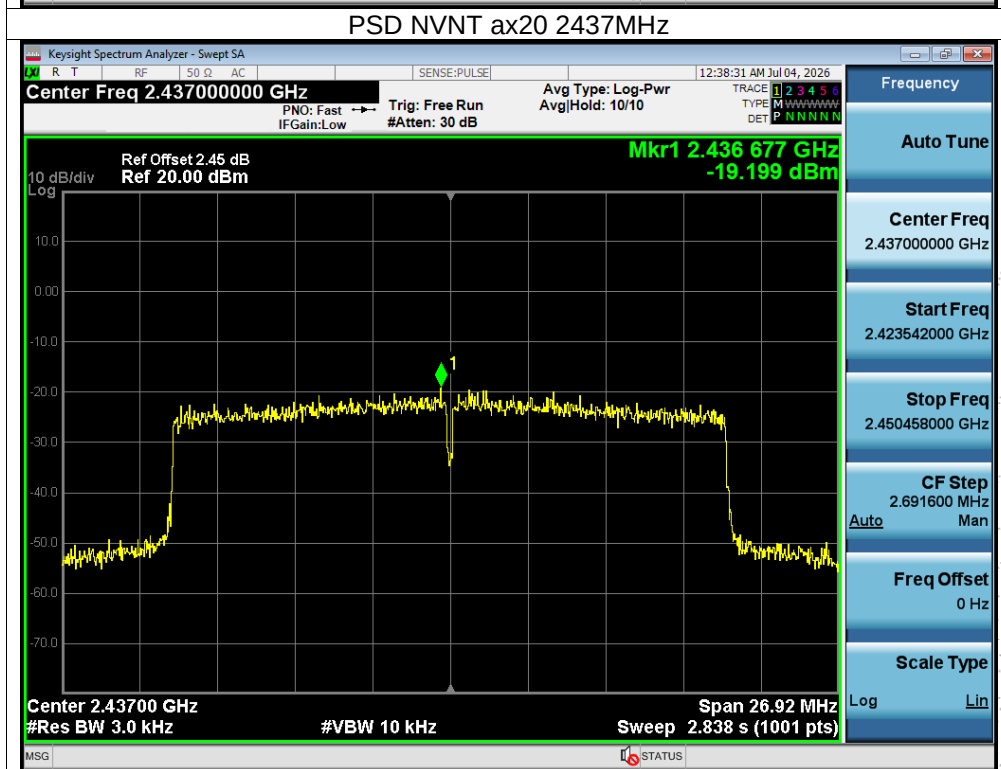
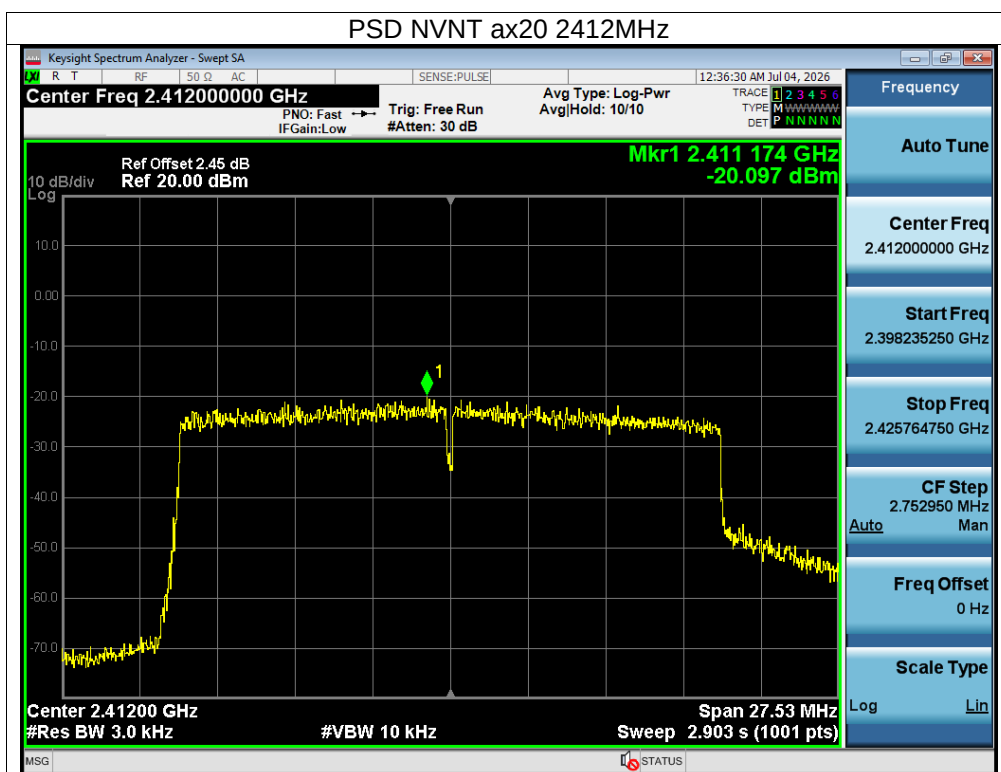


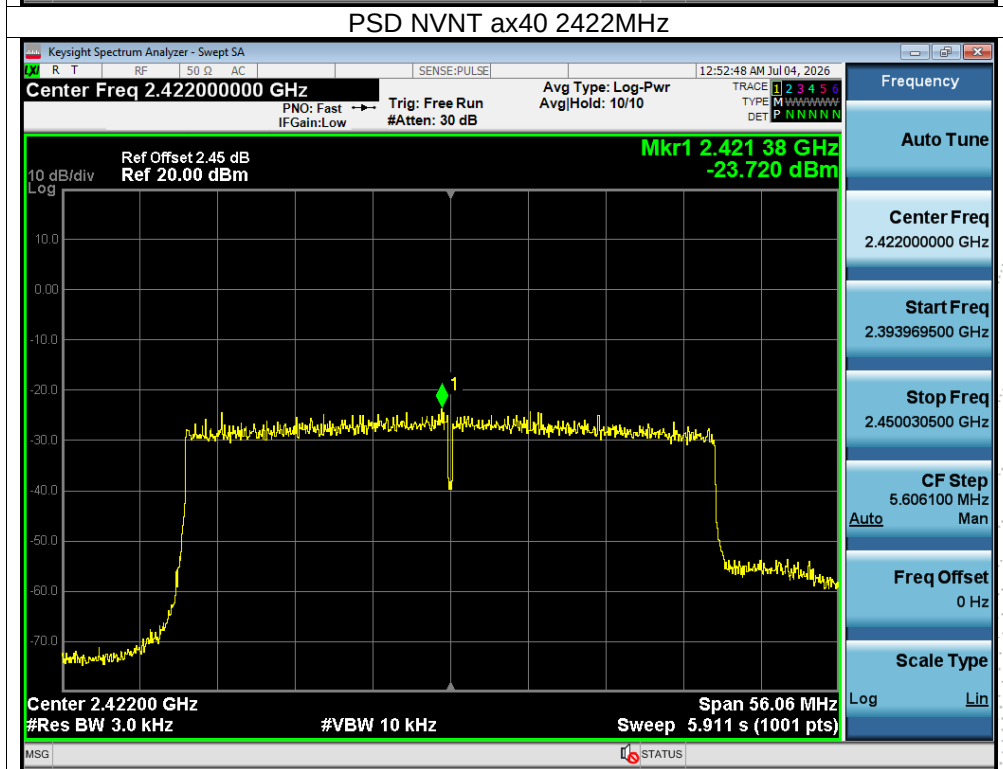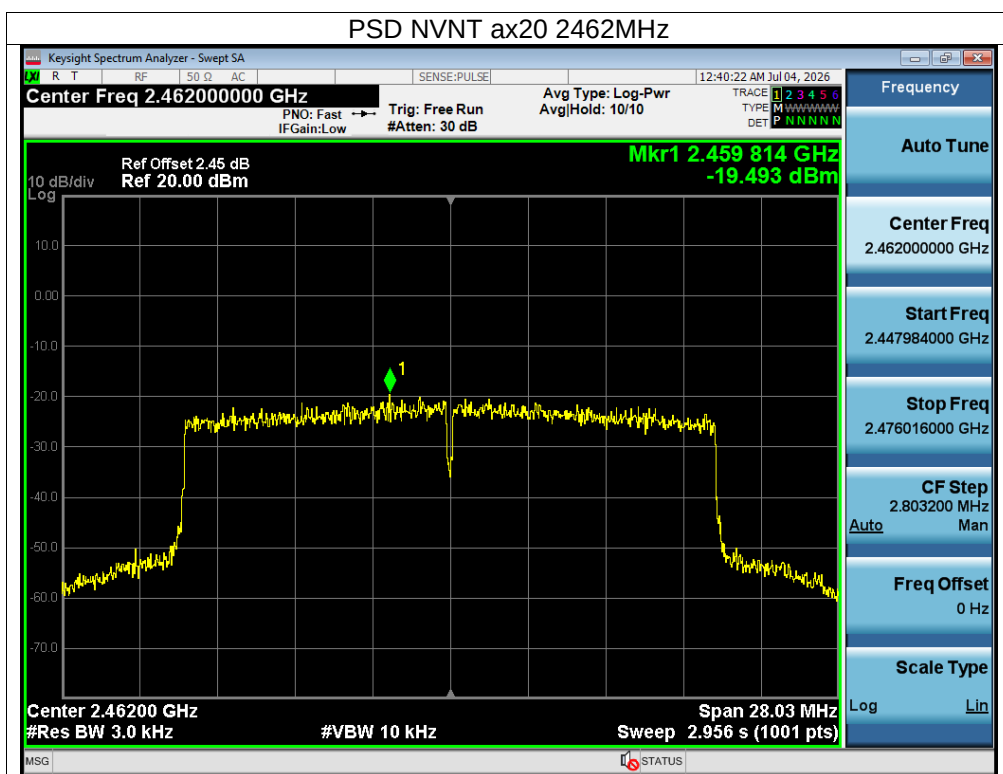

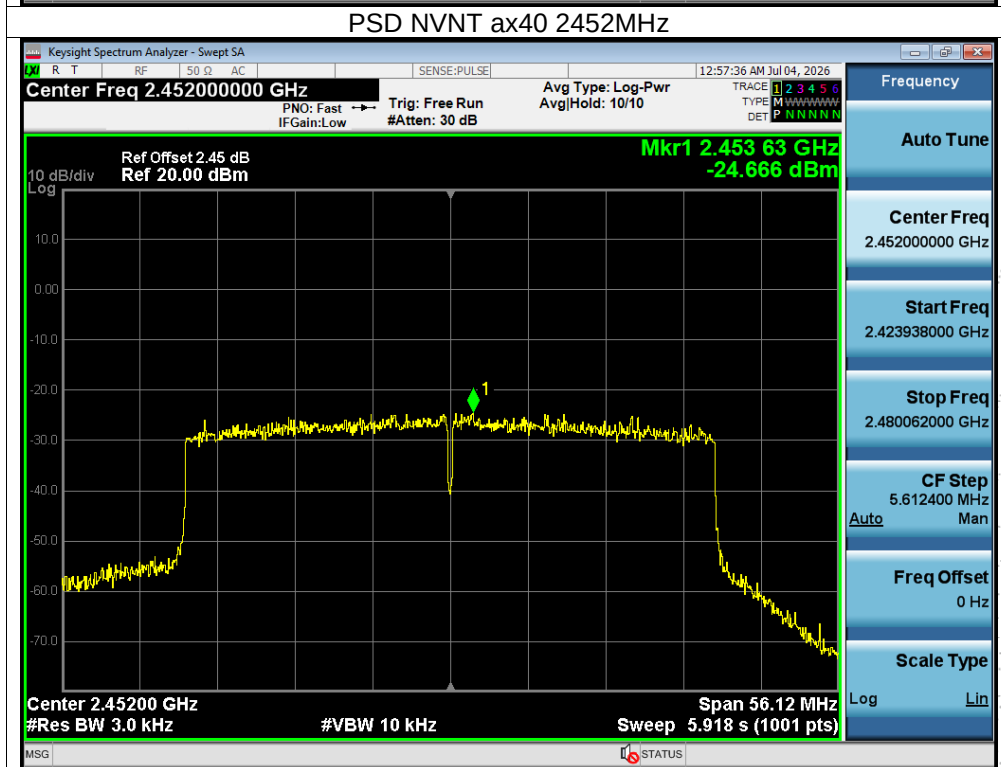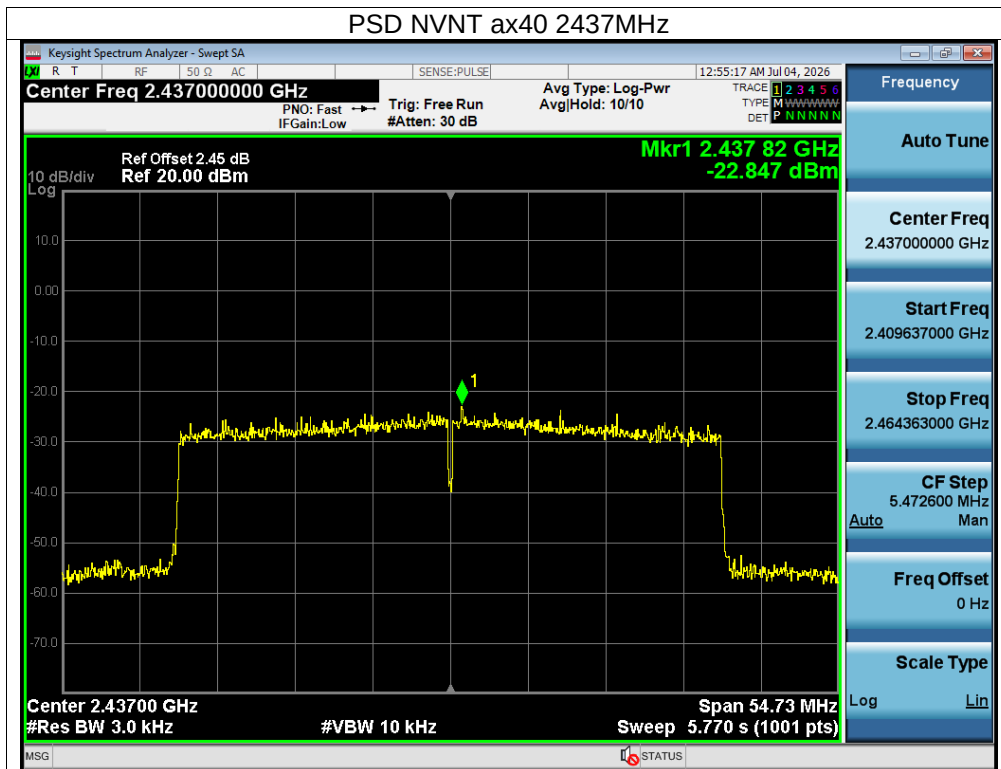

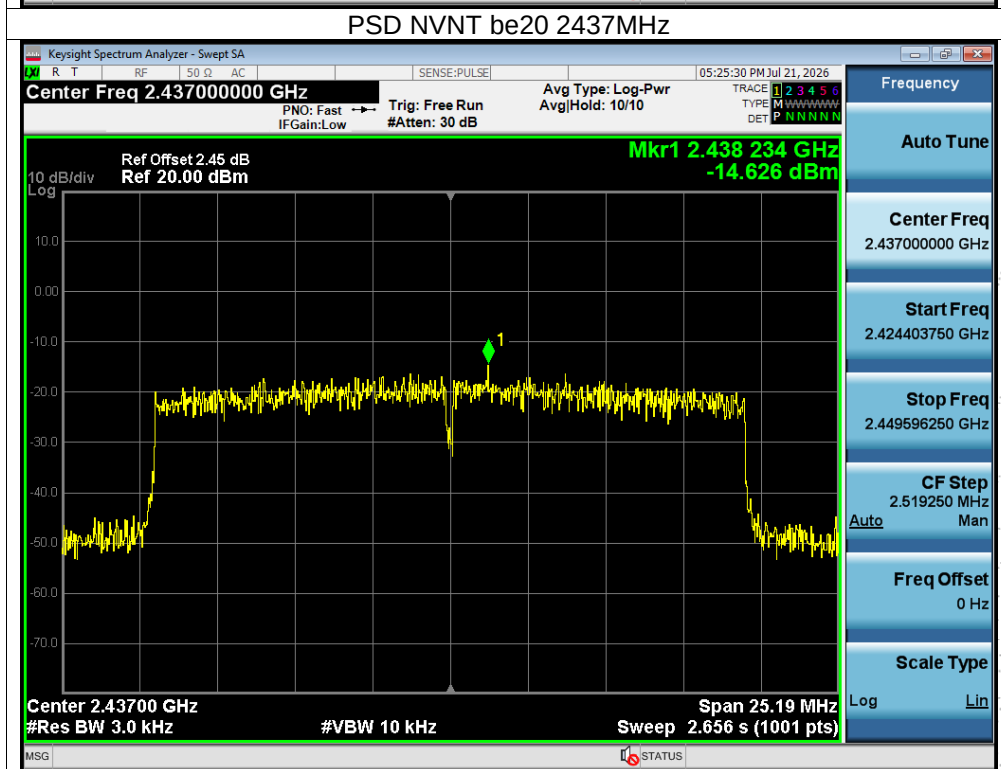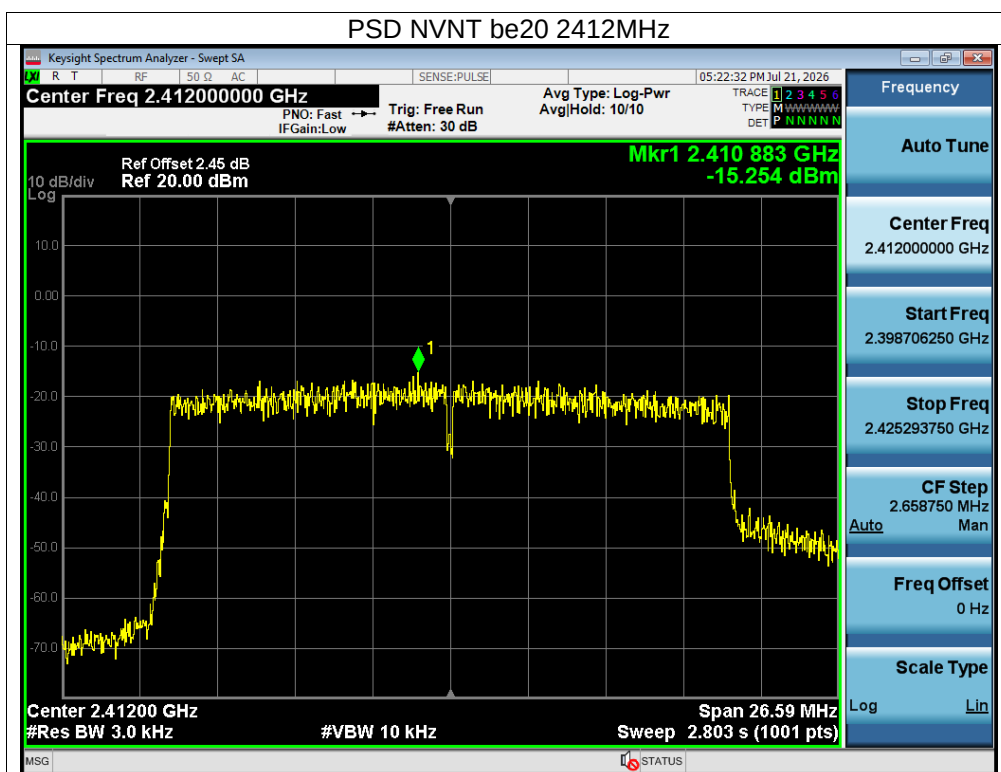

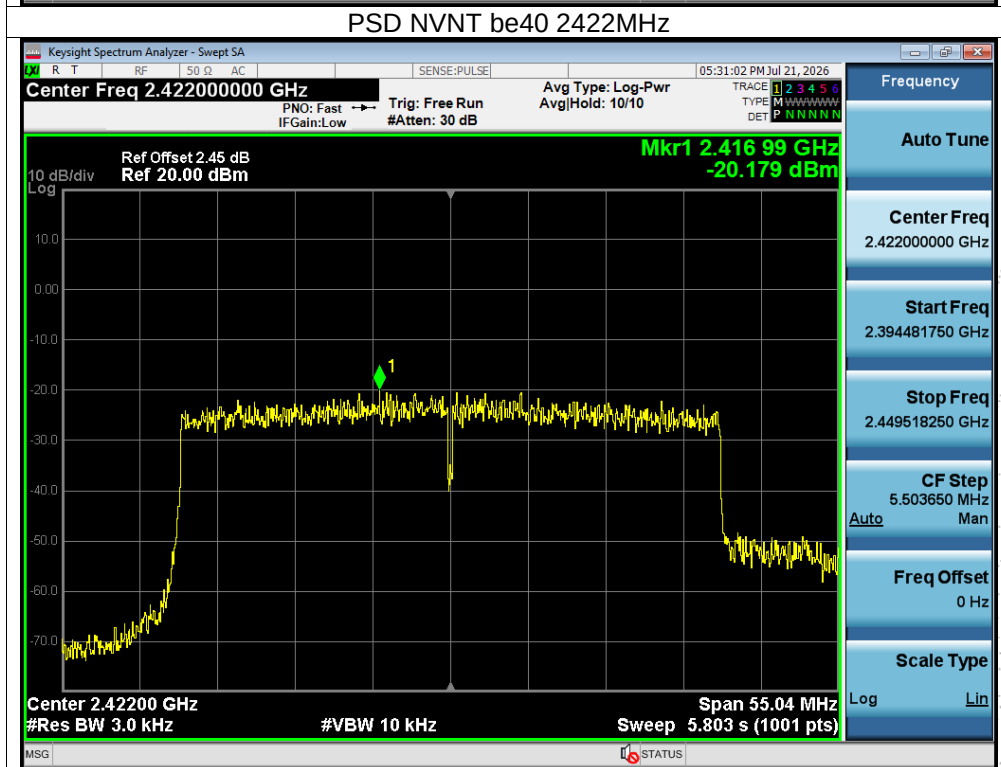
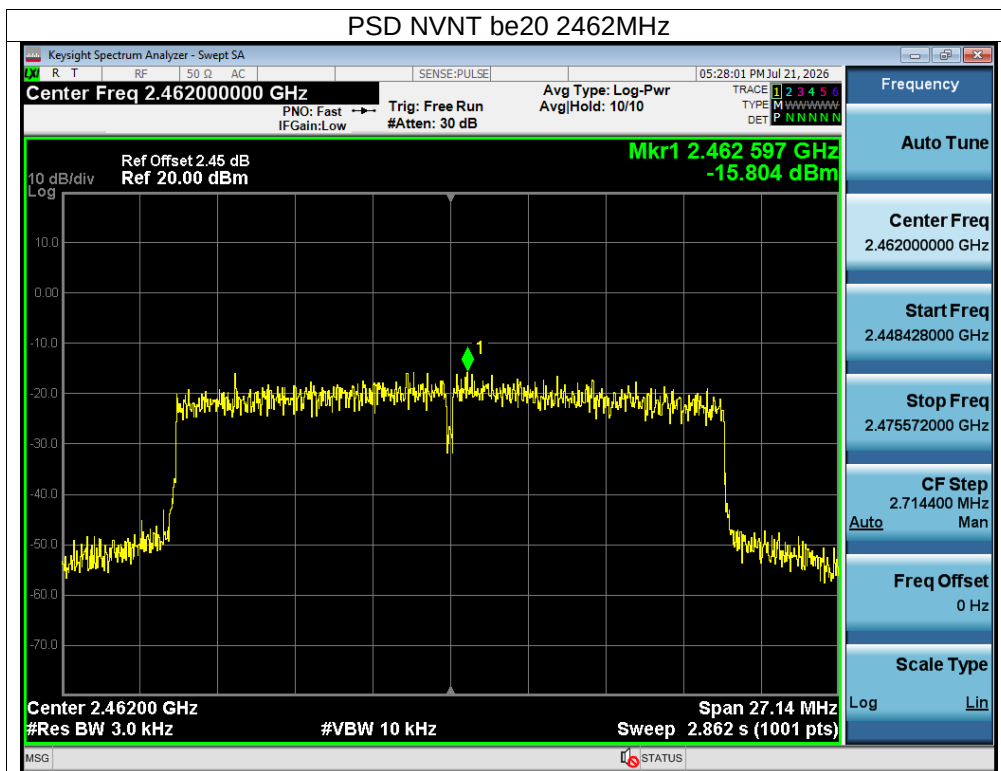


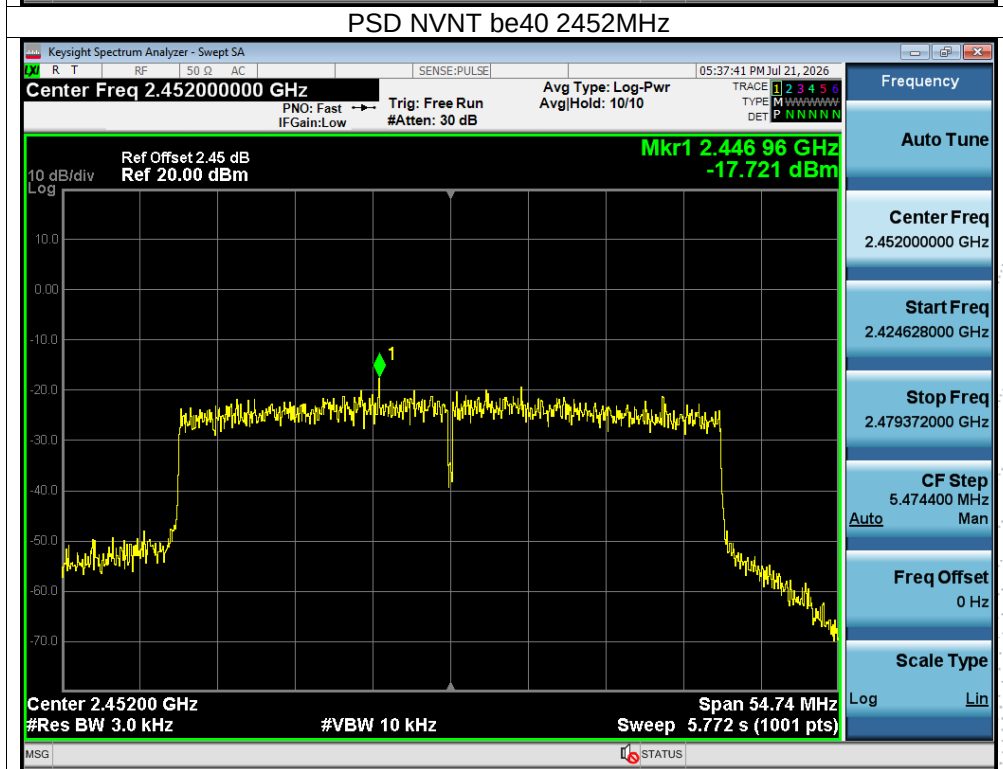
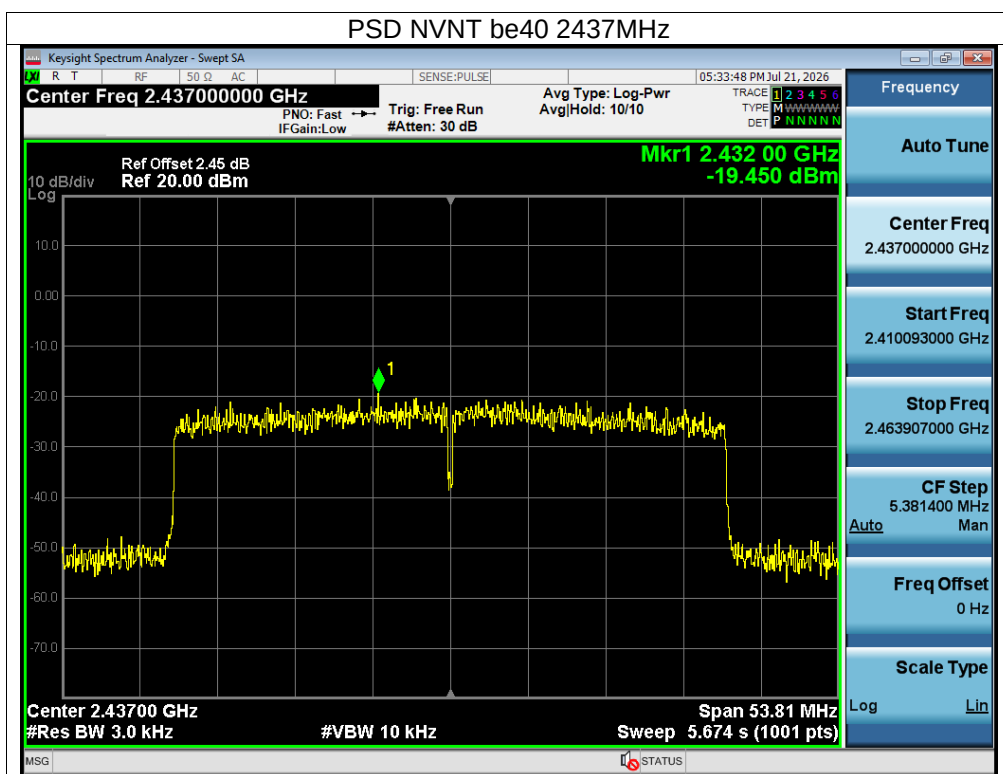








Ant B:





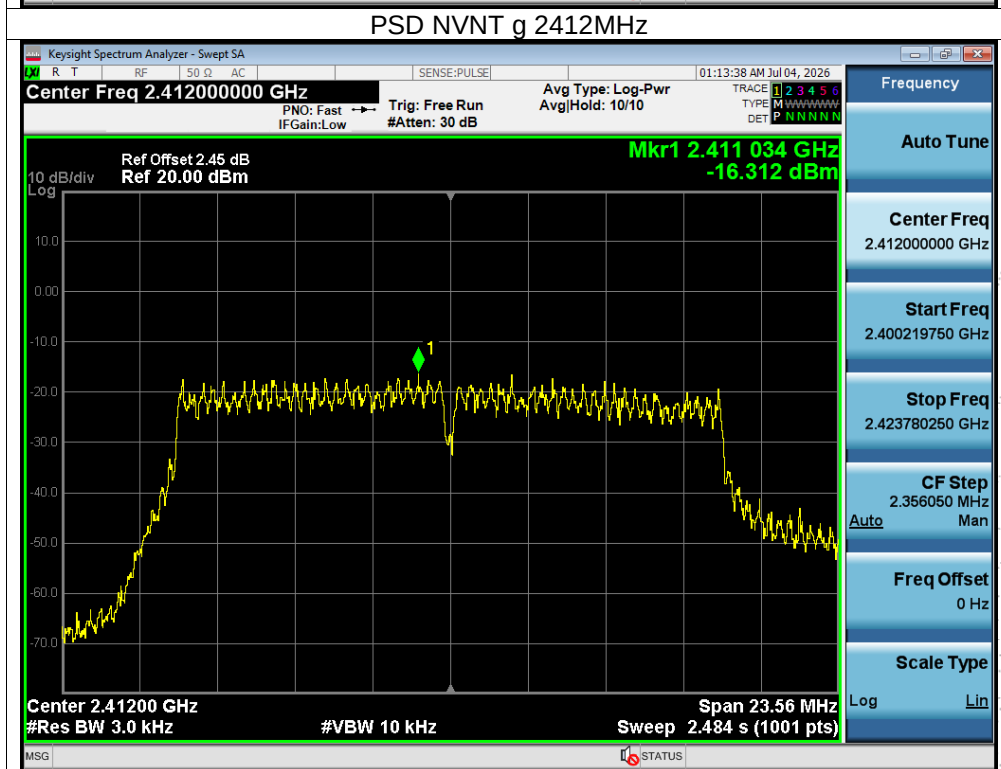
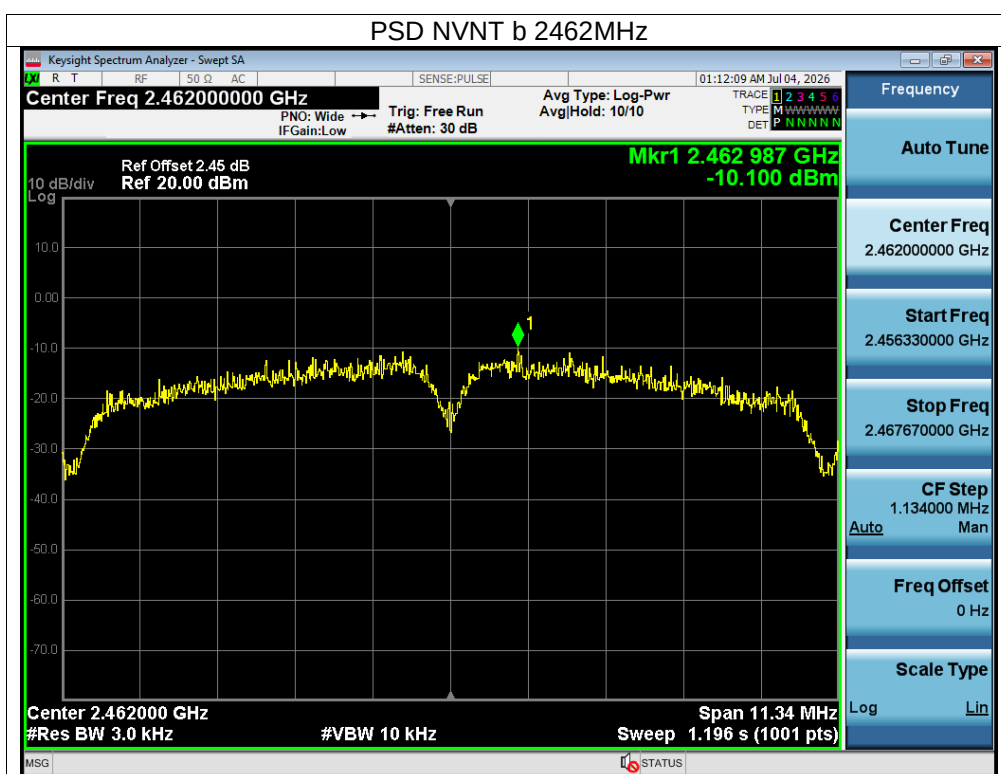


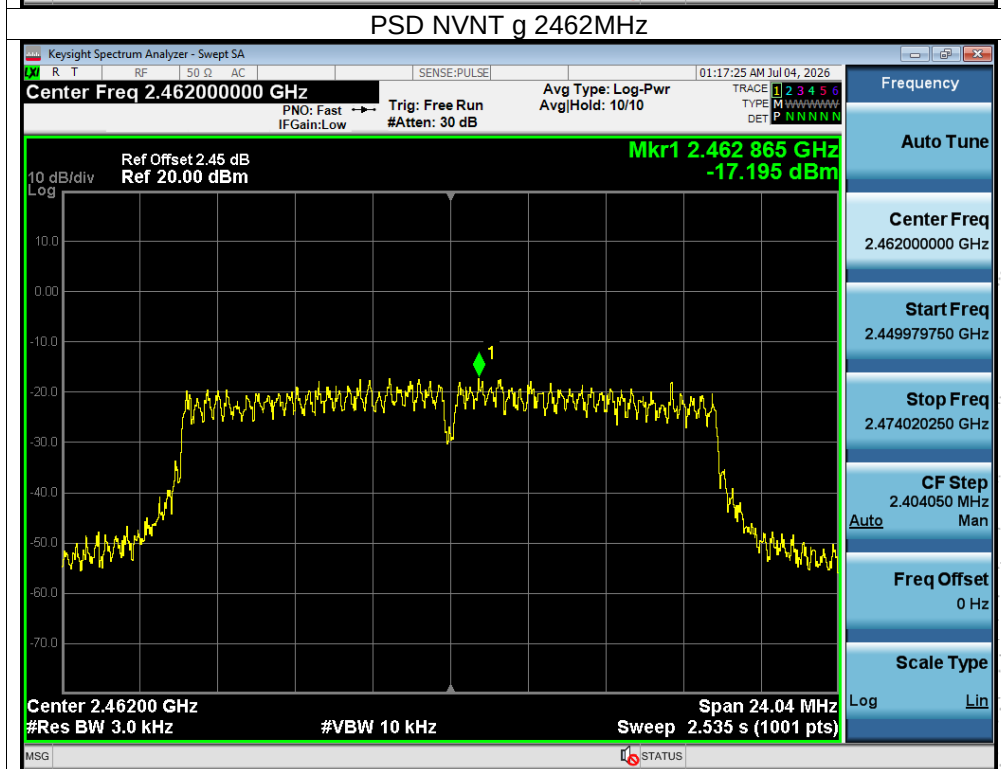
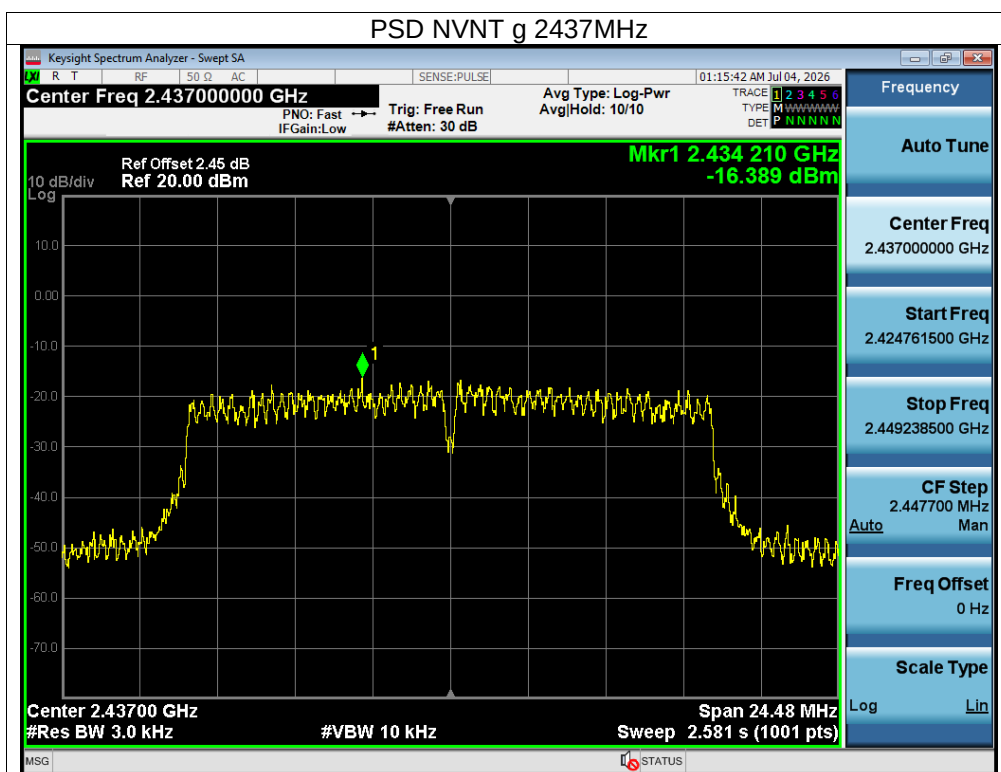


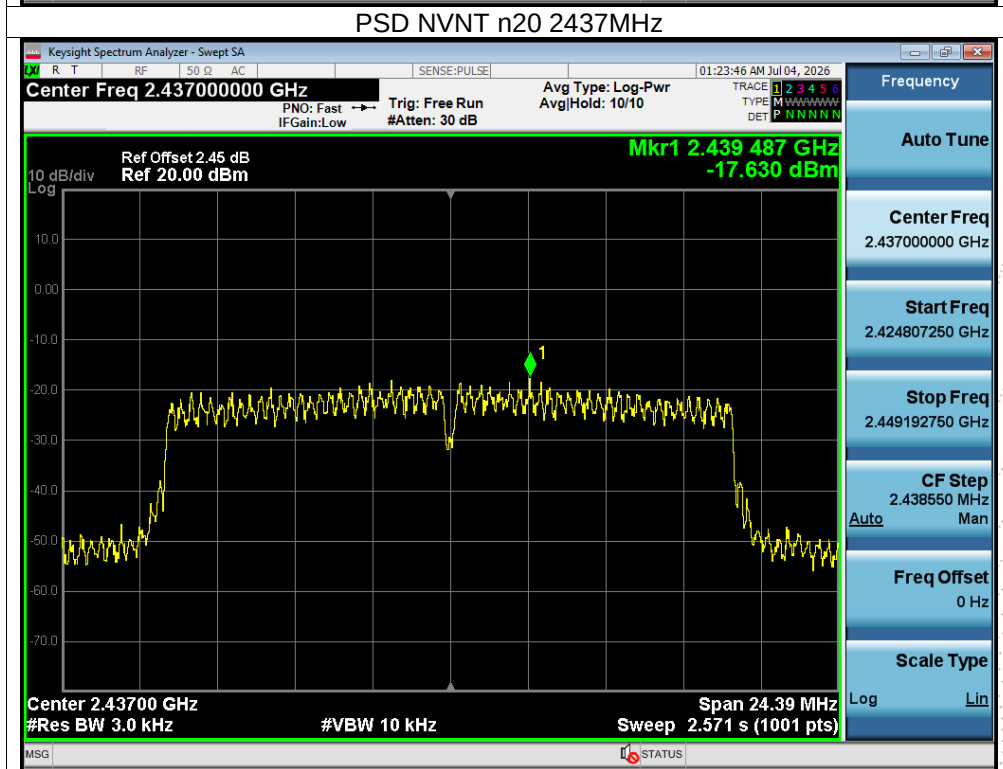
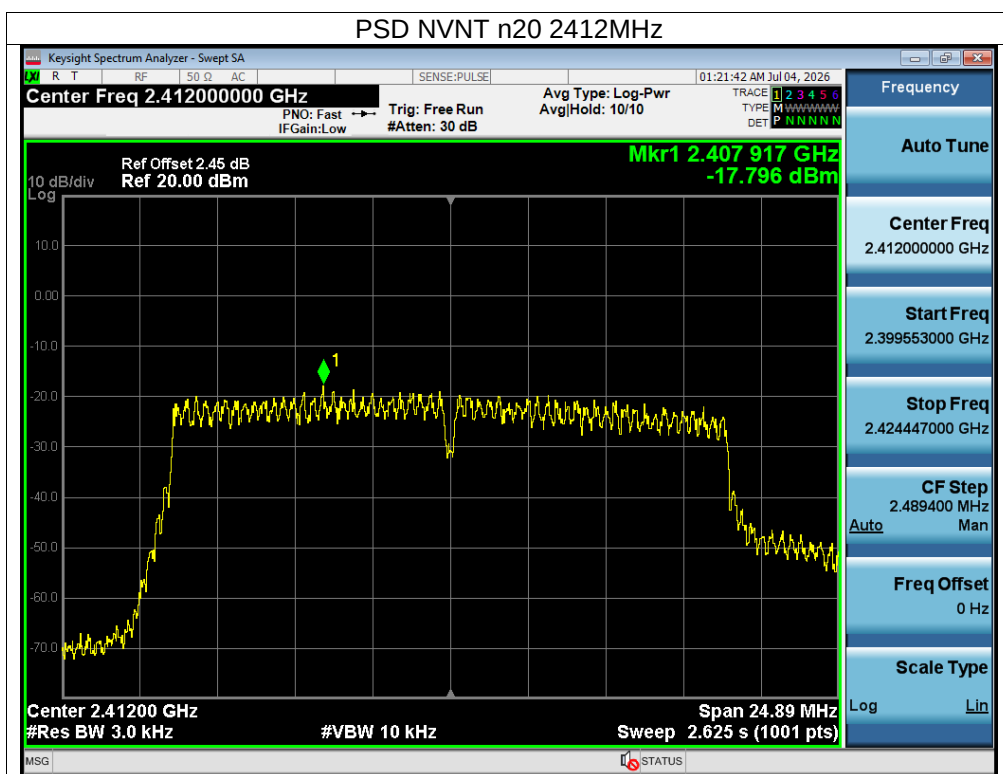


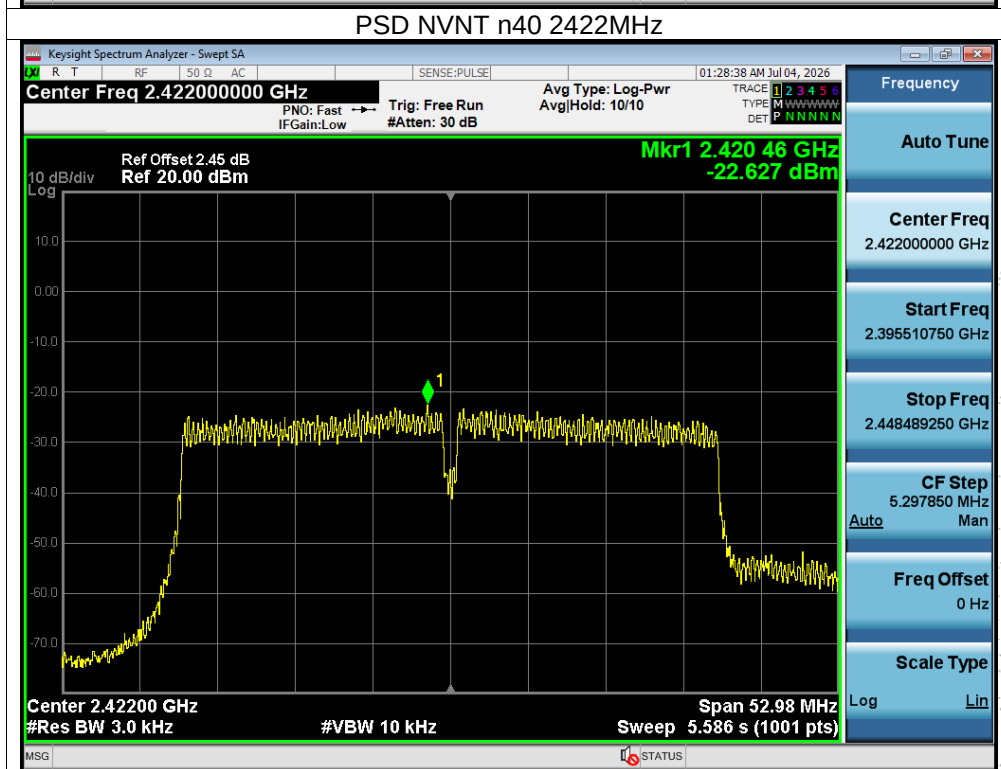
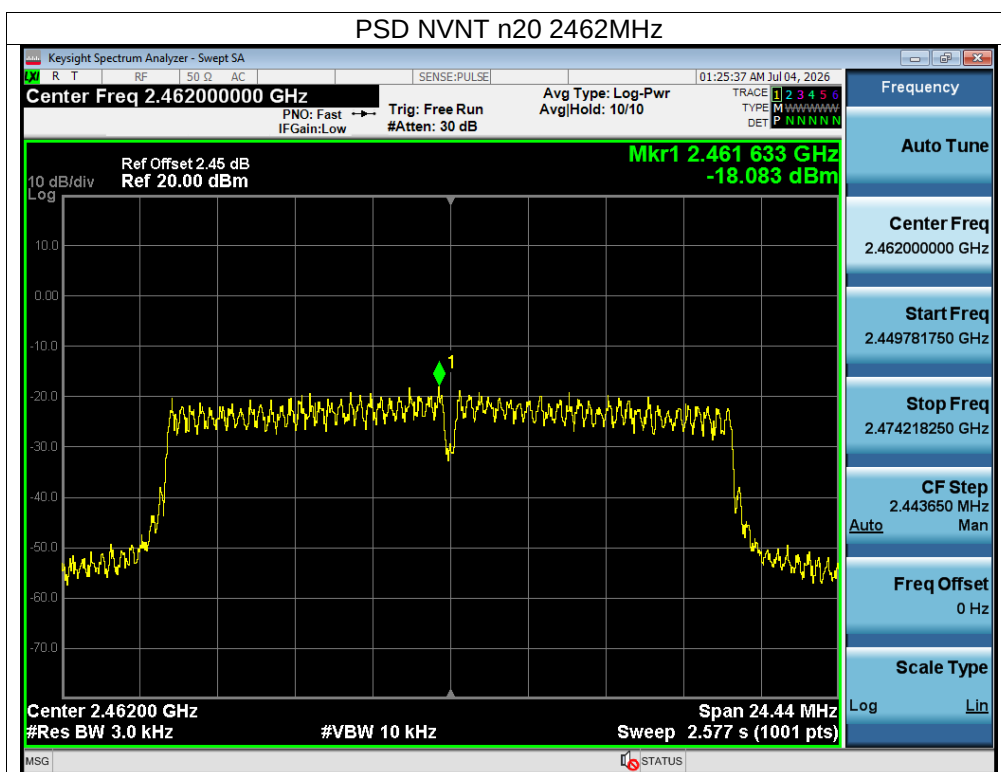


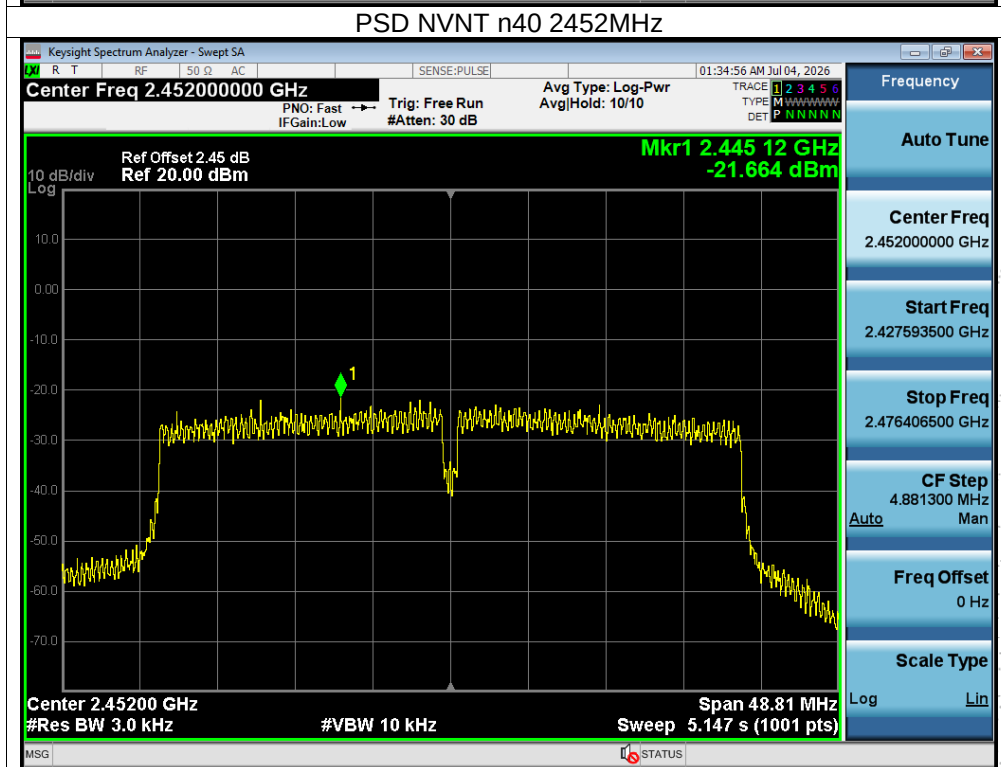
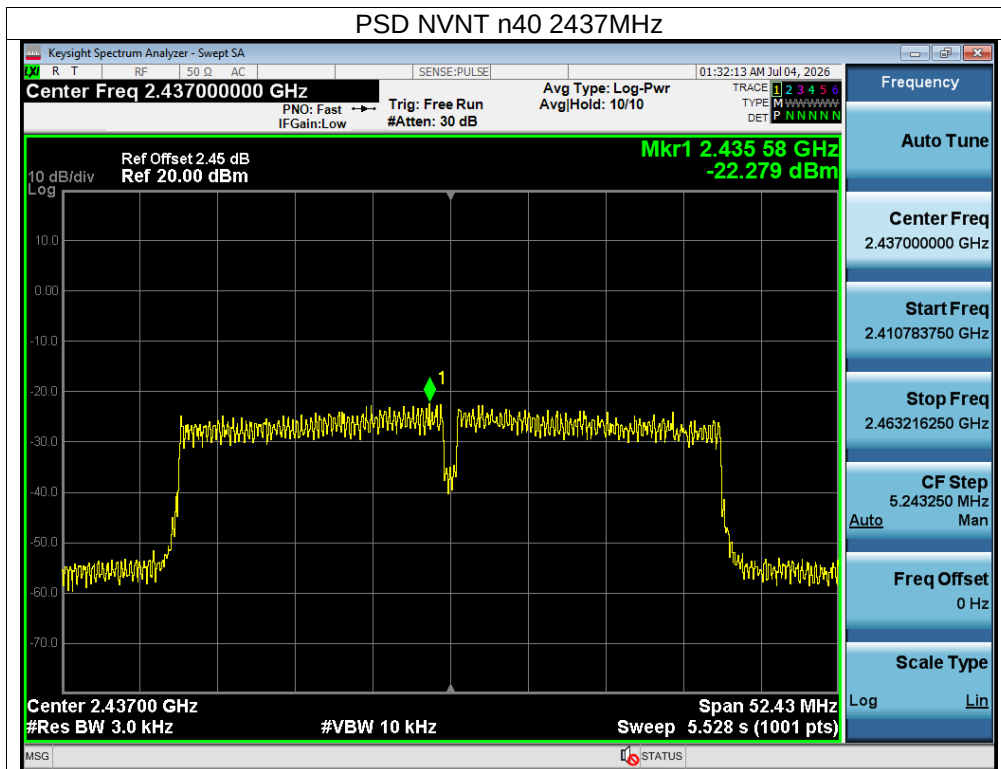


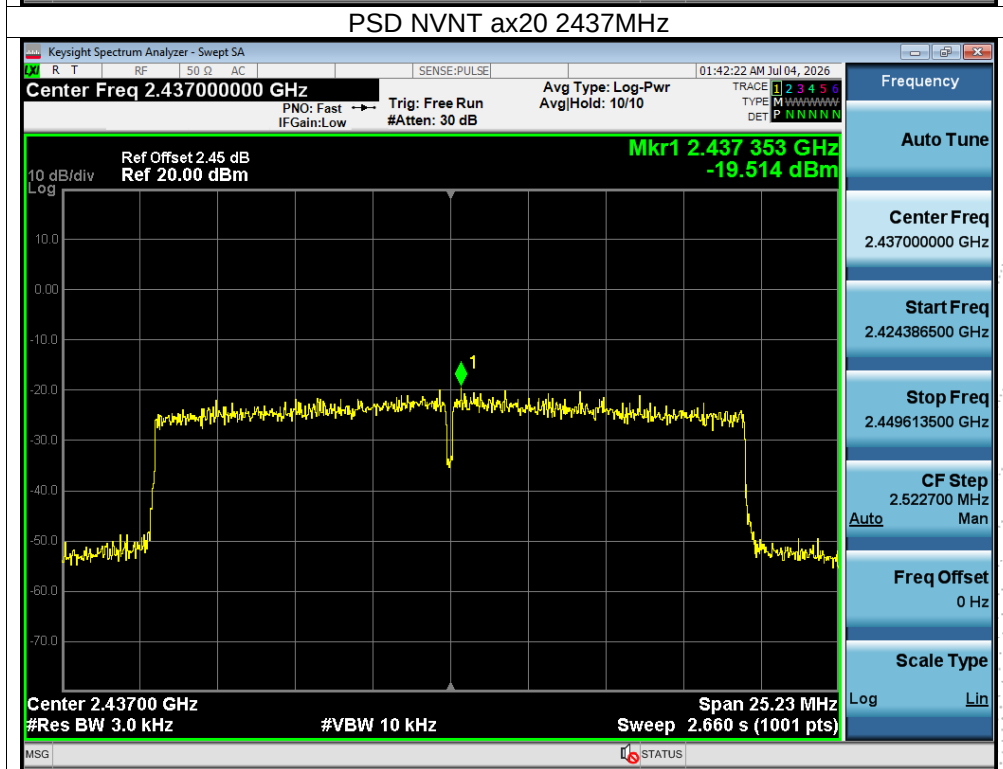
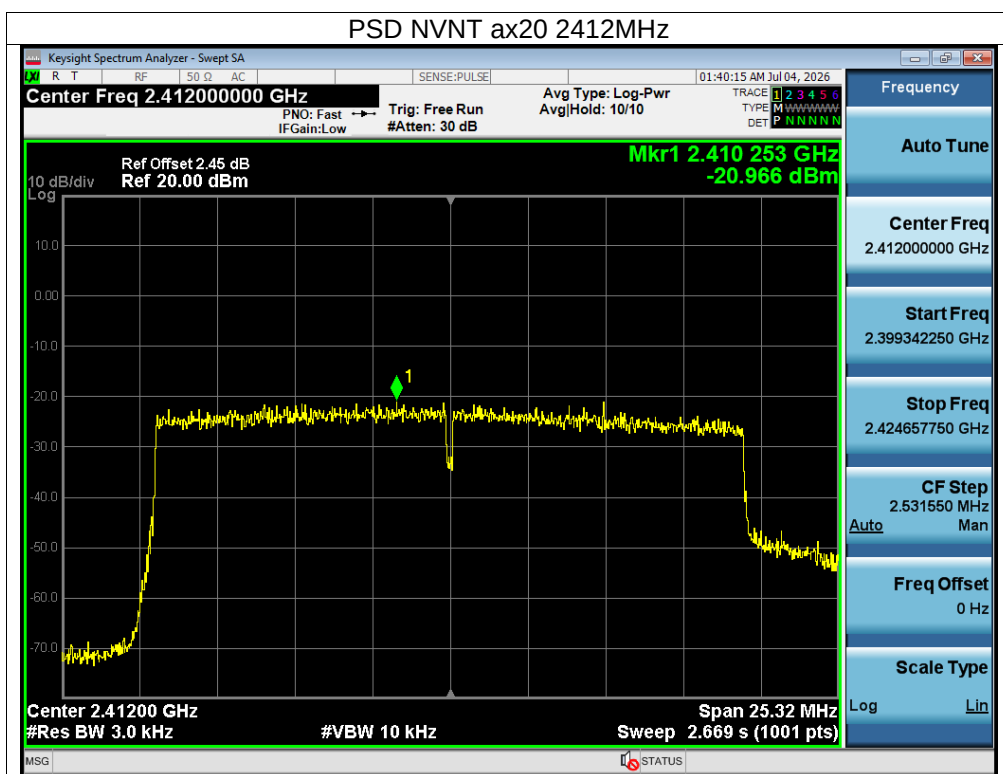


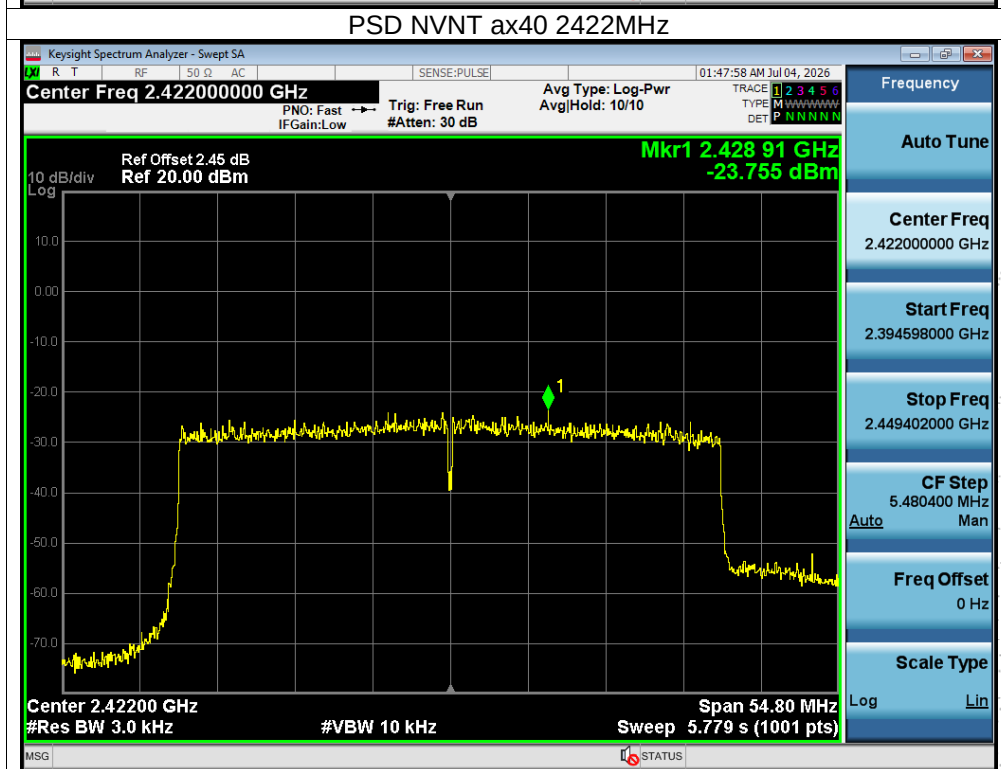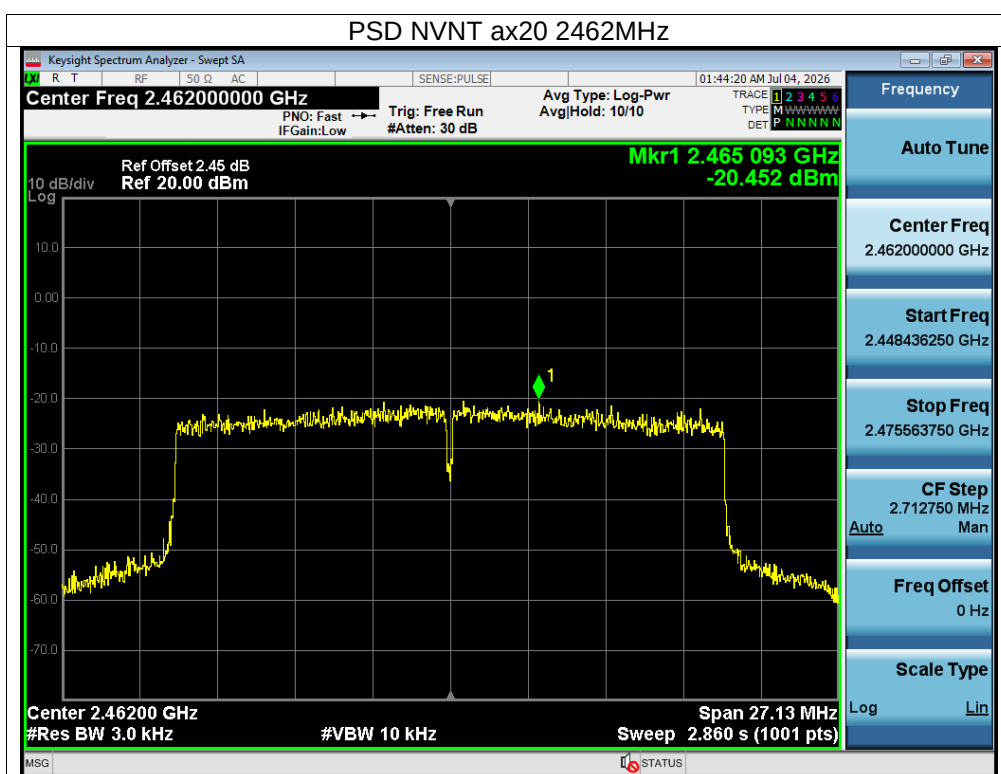

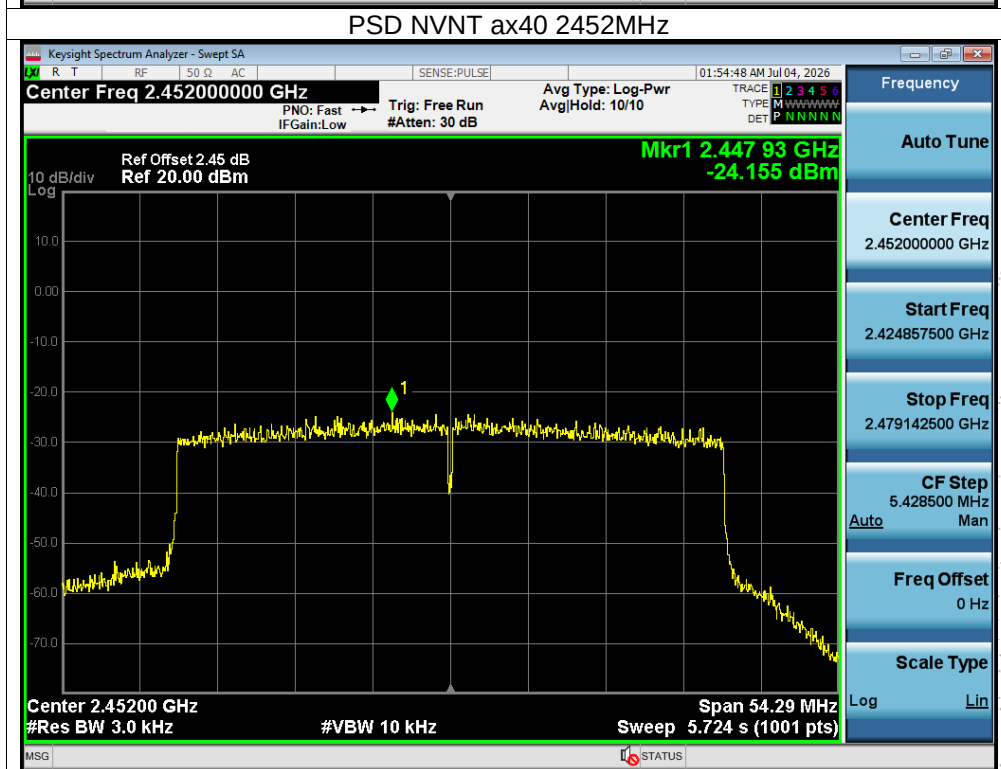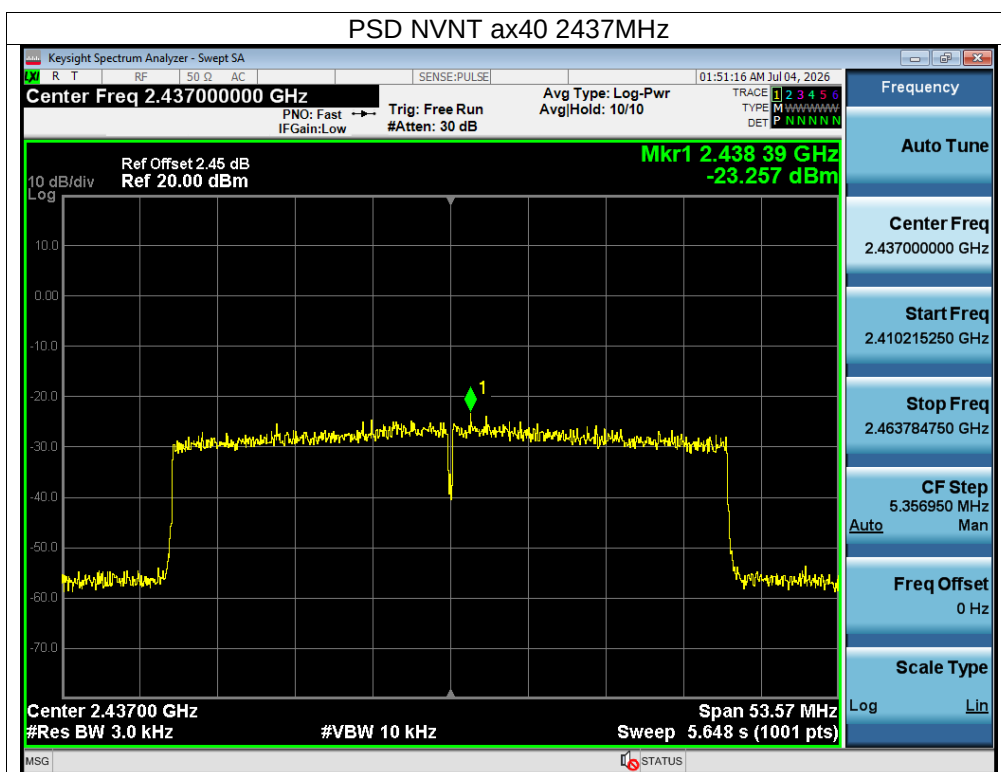

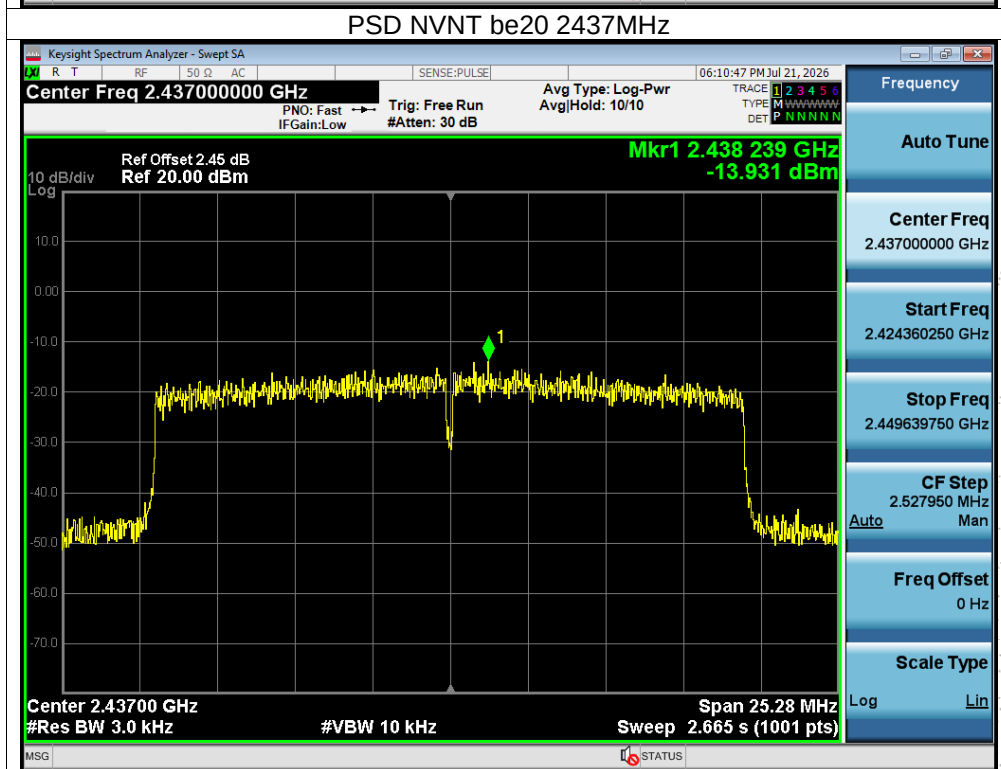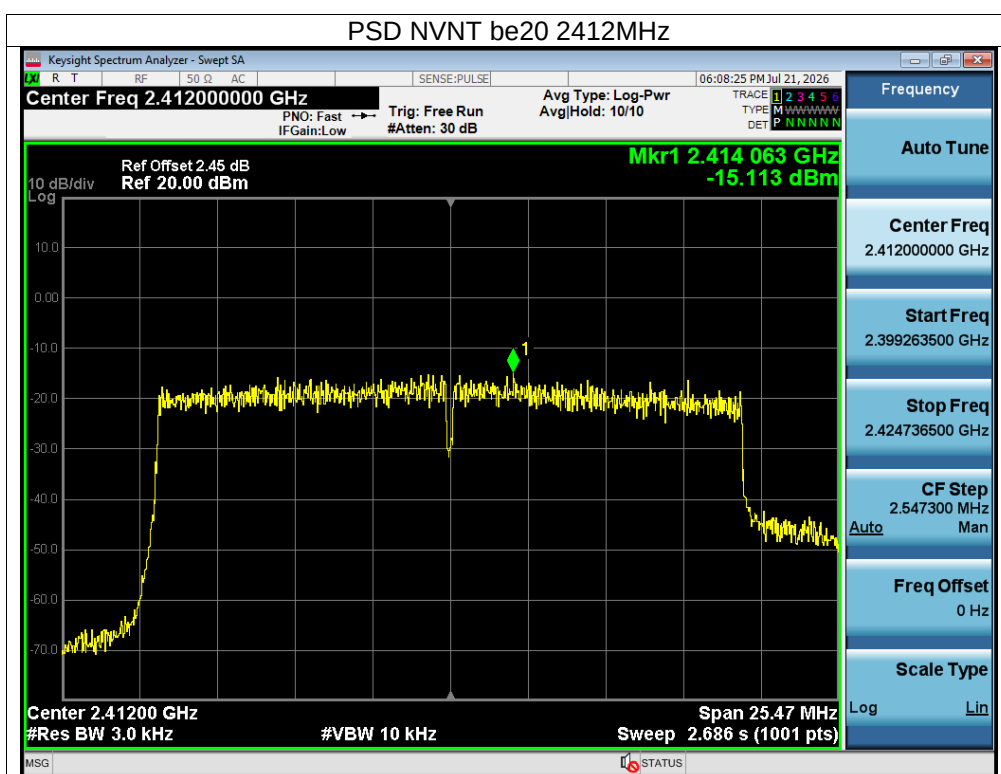


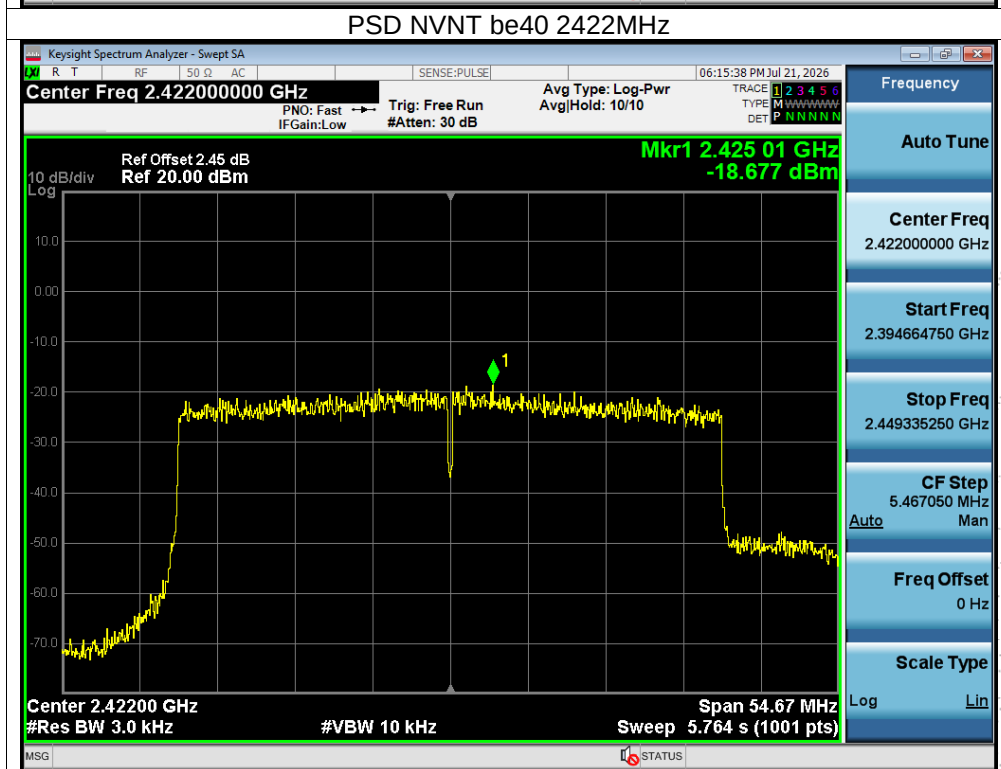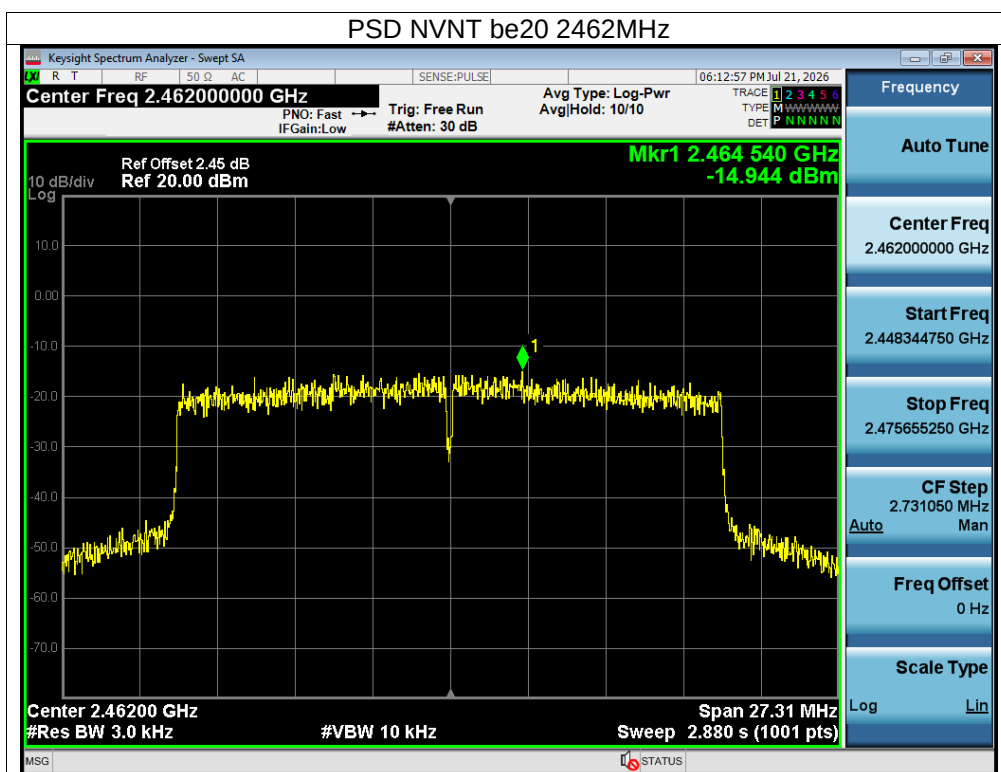

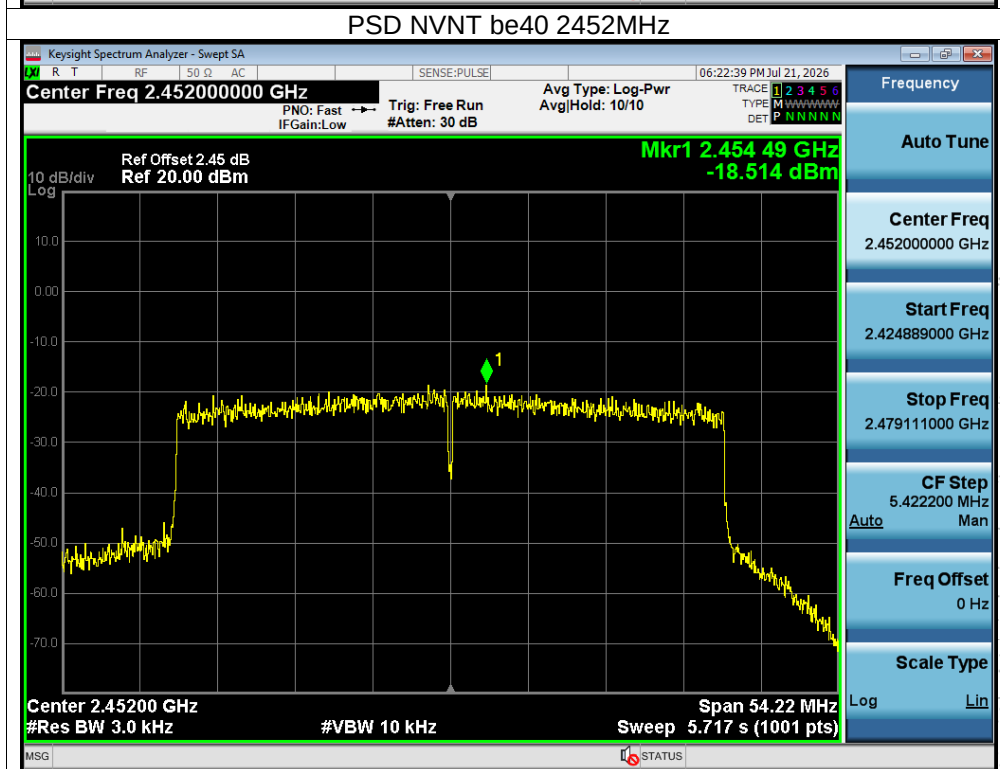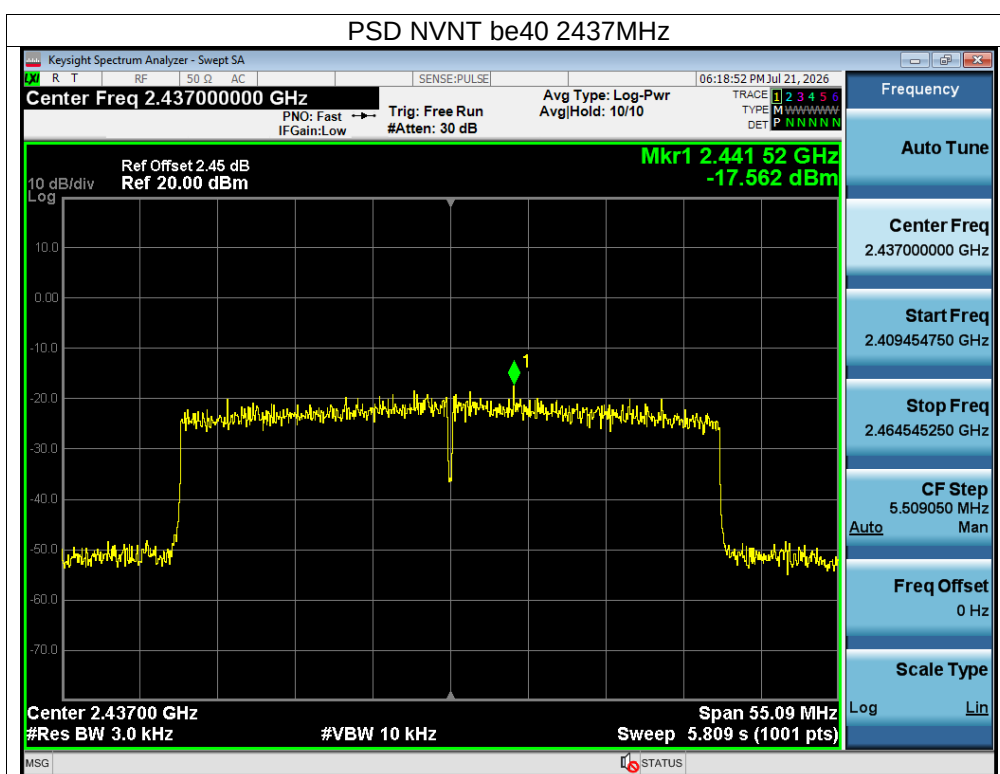

10. -6dB Bandwidth Test

10.1 Block Diagram Of Test Setup

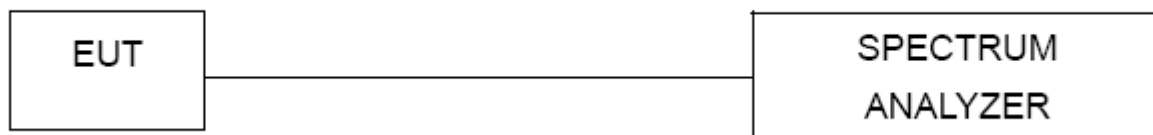

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (-6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 EUT Operating Conditions

The EUT tested system was configured as the statements of 4.6 Unless otherwise a special operating condition is specified in the follows during the testing.

Note: Power Spectral Density(dBm)=Reading+Cable Loss


10.5 Test Result

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101KPa	Test Voltage:	AC 120V/60Hz

Test Mode	Frequency (MHz)	Ant A -6dB bandwidth (MHz)	Ant B -6dB bandwidth (MHz)	Limit (kHz)	Result
TX b Mode	2412	8.04	8.041	500	Pass
	2437	8.051	8.081	500	Pass
	2462	7.095	7.56	500	Pass
TX g Mode	2412	16.304	15.707	500	Pass
	2437	15.995	16.318	500	Pass
	2462	16.079	16.027	500	Pass
TX n Mode(20M)	2412	17.594	16.596	500	Pass
	2437	17.587	16.257	500	Pass
	2462	17.014	16.291	500	Pass
TX n Mode(40M)	2422	35.046	35.319	500	Pass
	2437	35.084	34.955	500	Pass
	2452	33.997	32.542	500	Pass
TX ax Mode(20M)	2412	18.353	16.877	500	Pass
	2437	17.944	16.818	500	Pass
	2462	18.688	18.085	500	Pass
TX ax Mode(40M)	2422	37.374	36.536	500	Pass
	2437	36.484	35.713	500	Pass
	2452	37.416	36.19	500	Pass
TX be Mode(20M)	2412	17.725	16.982	500	Pass
	2437	16.795	16.853	500	Pass
	2462	18.096	18.207	500	Pass
TX be Mode(40M)	2422	36.691	36.447	500	Pass
	2437	35.876	36.727	500	Pass
	2452	36.496	36.148	500	Pass

Test Graphs

-6dB Bandwidth NVNT b 2412MHz

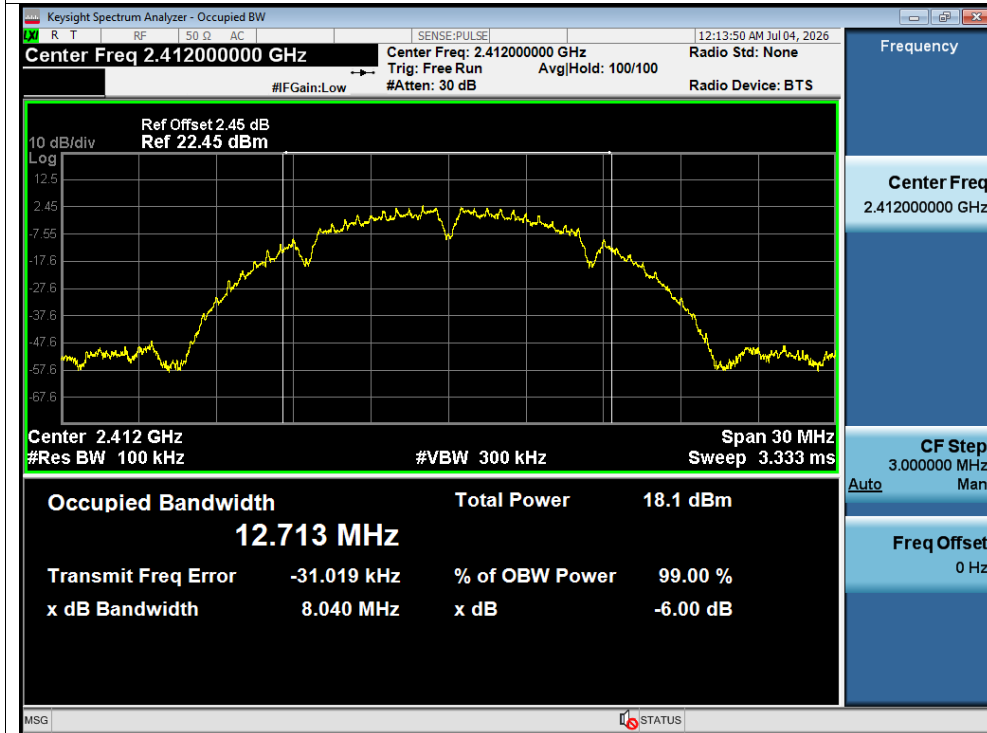

-6dB Bandwidth NVNT b 2437MHz



