

# TEST REPORT

Report No.: BCTC2605837120-4E

---

Applicant: MICRO COMPUTER (HK) TECH LIMITED

---

Product Name: Mini PC

---

Test Model: 895D7-5060

---


Tested Date: 2026-06-02 to 2026-08-10

---

Issued Date: 2026-08-11

---


**Shenzhen BCTC Technology Co., Ltd.**



## FCC ID: 2A49R-895D7

Product Name: Mini PC  
Trademark: N/A  
Model/Type Reference: 895D7-5060  
\*\*\*D7\*\*\*\*\* (Where \*="0-9","A-Z","-"and spaces)  
Prepared For: MICRO COMPUTER (HK) TECH LIMITED  
Address: RM 18, 28/F, Shui On Centre, 6-8 Harbour Road, Waterfront, Wan Chai, HK  
Manufacturer: MICRO COMPUTER (HK) TECH LIMITED  
Address: RM 18, 28/F, Shui On Centre, 6-8 Harbour Road, Waterfront, Wan Chai, HK  
Prepared By: Shenzhen BCTC Technology Co., Ltd.  
Address: Room 101M, Unit 1, Building1, Pengyuan, No.18, Lilang Road, Shanglilang, Nanwan Subdistrict, Longgang District, Shenzhen, Guangdong, China.  
Sample Received Date: 2026-06-02  
Sample Tested Date: 2026-06-02 to 2026-08-10  
Report No.: BCTC2605837120-4E  
Test Standards: 47 CFR Part 15 Subpart E (clause 15.407)  
ANSI C63.10:2020  
Test Results: PASS  
Remark: This is WIFI 5 GHz band radio test report.

Prepared by :



Louis Zeng

Reviewer by :



Mike Zheng

Approved by:



Sewen Guo

The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen BCTC Technology Co., Ltd, this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client.

## Table Of Content

| Test Report Declaration                                | Page |
|--------------------------------------------------------|------|
| 1. Version .....                                       | 5    |
| 2. Test Summary .....                                  | 6    |
| 3. Measurement Uncertainty .....                       | 7    |
| 4. Product Information And Test Setup .....            | 8    |
| 4.1 Product Information .....                          | 8    |
| 4.2 Test Setup Configuration .....                     | 9    |
| 4.3 Support Equipment .....                            | 9    |
| 4.4 Channel List .....                                 | 10   |
| 4.5 Test Mode .....                                    | 11   |
| 4.6 Table Of Parameters Of Text Software Setting ..... | 11   |
| 4.7 Antenna .....                                      | 11   |
| 5. Test Facility And Test Instrument Used .....        | 13   |
| 5.1 Test Facility .....                                | 13   |
| 5.2 Test Instrument Used .....                         | 13   |
| 6. Conducted Emissions .....                           | 15   |
| 6.1 Block Diagram Of Test Setup .....                  | 15   |
| 6.2 Limit .....                                        | 15   |
| 6.3 Test procedure .....                               | 15   |
| 6.4 EUT operating Conditions .....                     | 15   |
| 6.5 Test Result .....                                  | 16   |
| 7. Radiated Emissions .....                            | 18   |
| 7.1 Block Diagram Of Test Setup .....                  | 18   |
| 7.2 Limit .....                                        | 19   |
| 7.3 Test Procedure .....                               | 20   |
| 7.4 EUT Operating Conditions .....                     | 21   |
| 7.5 Test Result .....                                  | 21   |
| 8. Power Spectral Density Test .....                   | 73   |
| 8.1 Block Diagram Of Test Setup .....                  | 73   |
| 8.2 Limit .....                                        | 73   |
| 8.3 Test Procedure .....                               | 74   |
| 8.4 EUT Operating Conditions .....                     | 74   |
| 8.5 Test Result .....                                  | 75   |
| 9. 26dB & 6dB & 99% Emission Bandwidth .....           | 133  |
| 9.1 Block Diagram Of Test Setup .....                  | 133  |
| 9.2 Limit .....                                        | 133  |
| 9.3 Test Procedure .....                               | 134  |
| 9.4 EUT Operating Conditions .....                     | 134  |
| 9.5 Test Result .....                                  | 135  |
| 10. Maximum Conducted Output Power .....               | 247  |
| 10.1 Block Diagram Of Test Setup .....                 | 247  |
| 10.2 Limit .....                                       | 247  |
| 10.3 Test Procedure .....                              | 247  |
| 10.4 EUT Operating Conditions .....                    | 248  |

|      |                                      |     |
|------|--------------------------------------|-----|
| 10.5 | Test Result.....                     | 249 |
| 11.  | Out Of Band Emissions .....          | 253 |
| 11.1 | Block Diagram Of Test Setup.....     | 253 |
| 11.2 | Limit .....                          | 253 |
| 11.3 | Test Procedure .....                 | 253 |
| 11.4 | EUT Operating Conditions .....       | 253 |
| 11.5 | Test Result.....                     | 254 |
| 12.  | Spurious RF Conducted Emissions..... | 302 |
| 12.1 | Block Diagram Of Test Setup.....     | 302 |
| 12.2 | Limit .....                          | 302 |
| 12.3 | Test Procedure .....                 | 302 |
| 12.4 | Test Result.....                     | 302 |
| 13.  | Frequency Stability Measurement..... | 357 |
| 13.1 | Block Diagram Of Test Setup.....     | 357 |
| 13.2 | Limit .....                          | 357 |
| 13.3 | Test Procedure .....                 | 357 |
| 13.4 | Test Result.....                     | 358 |
| 14.  | Duty Cycle Of Test Signal .....      | 370 |
| 14.1 | Standard Requirement .....           | 370 |
| 14.2 | Formula.....                         | 370 |
| 14.3 | Test Procedure .....                 | 370 |
| 14.4 | Test Result.....                     | 371 |
| 15.  | Antenna Requirement .....            | 379 |
| 15.1 | Limit .....                          | 379 |
| 15.2 | Test Result.....                     | 379 |
| 16.  | EUT Test Setup Photographs.....      | 380 |

(Note: N/A Means Not Applicable)

**1. Version**

| Report No.        | Issue Date | Description | Approved |
|-------------------|------------|-------------|----------|
| BCTC2605837120-4E | 2026-08-11 | Original    | Valid    |

## 2. Test Summary

The Product has been tested according to the following specifications:

| No. | Test Parameter                          | Clause No.              | Results |
|-----|-----------------------------------------|-------------------------|---------|
| 1   | Spurious Radiated Emissions             | 15.209(a)<br>15.407 (b) | PASS*   |
| 2   | Conducted Emission                      | 15.207                  | PASS*   |
| 3   | 26 dB and 99% Emission Bandwidth        | 15.407 a<br>15.1049     | PASS*   |
| 4   | Minimum 6 dB bandwidth                  | 15.407(e)               | PASS*   |
| 5   | Maximum Conducted Output Power          | 15.407 a                | PASS*   |
| 6   | Band Edge                               | 15.407 b                | PASS*   |
| 7   | Power Spectral Density                  | 15.407 a                | PASS*   |
| 8   | Spurious Emissions at Antenna Terminals | 15.407 b                | PASS*   |
| 9   | Antenna Requirement                     | 15.203                  | PASS    |

NOTE1: N/A (Not Applicable)

NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.

Note 3: "\*" indicates that the test results are determined base on 47 CFR Part 15 Subpart E (clause 15.407). And the test results are took into account measurement uncertainty(see section 3 for measurement uncertainty information)

### 3. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2:2011/AMD2:2018. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| No. | Item                                               | Uncertainty |
|-----|----------------------------------------------------|-------------|
| 1   | 3m chamber Radiated spurious emission(9kHz-30MHz)  | U=3.7dB     |
| 2   | 3m chamber Radiated spurious emission(30MHz-1GHz)  | U=4.8dB     |
| 3   | 3m chamber Radiated spurious emission(1GHz-18GHz)  | U=5.5dB     |
| 4   | 3m chamber Radiated spurious emission(18GHz-40GHz) | U=5.0dB     |
| 5   | Conducted Emission(150kHz-30MHz)                   | U=3.0dB     |
| 6   | Power Spectral Density                             | U=3.46dB    |
| 7   | Peak Power                                         | U=0.31dB    |
| 8   | Occupied Bandwidth/Frequency Range                 | U=3.46%     |
| 9   | Conducted output power uncertainty                 | U=0.55dB    |
| 10  | Frequency Error                                    | U= 53.50 Hz |
| 11  | Frequency Drift                                    | U=0.64 KHz  |
| 12  | Temperature                                        | U= 0.59 °C  |
| 13  | Humidity                                           | U= 5.3 %    |

#### 4. Product Information And Test Setup


##### 4.1 Product Information

|                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                    |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------|
| Model/Type reference:            | 895D7-5060<br>***D7***** (Where*="0-9","A-Z","-"and spaces)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                    |
| Model differences:               | All models are identical except for the model name, the test model is 895D7-5060.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                    |
| Device type:                     | Client                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                    |
| TPC Function:                    | <input type="checkbox"/> Applicable                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <input checked="" type="checkbox"/> Not Applicable |
| Hardware Version:                | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                    |
| Software Version:                | N/A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |                                                    |
| IEEE 802.11 WLAN Mode Supported: | <input checked="" type="checkbox"/> 802.11a<br><input checked="" type="checkbox"/> 802.11n(20MHz channel bandwidth)<br><input checked="" type="checkbox"/> 802.11n(40MHz channel bandwidth)<br><input checked="" type="checkbox"/> 802.11ac(20MHz channel bandwidth)<br><input checked="" type="checkbox"/> 802.11ac(40MHz channel bandwidth)<br><input checked="" type="checkbox"/> 802.11ac(80MHz channel bandwidth)<br><input checked="" type="checkbox"/> 802.11ax(20MHz channel bandwidth)<br><input checked="" type="checkbox"/> 802.11ax(40MHz channel bandwidth)<br><input checked="" type="checkbox"/> 802.11ax(80MHz channel bandwidth)<br><input checked="" type="checkbox"/> 802.11be(20MHz channel bandwidth)<br><input checked="" type="checkbox"/> 802.11be(40MHz channel bandwidth)<br><input checked="" type="checkbox"/> 802.11be(80MHz channel bandwidth) |                                                    |
| Operation Frequency:             | 5180-5240MHz for 802.11a/n(HT20)/ac(VHT20) /ax(HE20)/be(EHT20);<br>5190-5230MHz for 802.11n(HT40)/ac(VHT40) /ax(HE40)/be(EHT40);<br>5210MHz for 802.11ac(VHT80) /ax(HE80)/be(EHT80);<br>5260-5320MHz for 802.11 a/n(HT20)/ac(VHT20) /ax(HE20)/be(EHT20);<br>5270-5310MHz for 802.11 n(HT40)/ac(VHT40) /ax(HE40)/be(EHT40);<br>5290MHz for 802.11ac(VHT80) /ax(HE80)/be(EHT80);<br>5500-5700MHz for 802.11 a/n(HT20)/ac(VHT20) /ax(HE20)/be(EHT20);<br>5510-5670MHz for 802.11 n(HT40)/ac(VHT40) /ax(HE40)/be(EHT40)<br>5530MHz for 802.11ac(VHT80) /ax(HE80)/be(EHT80);<br>5745-5825 MHz for 802.11 a/n(HT20)/ac(VHT20) /ax(HE20)/be(EHT20);<br>5755-5795 MHz for 802.11 n(HT40)/ac(VHT40) /ax(HE40)/be(EHT40);<br>5775MHz for 802.11ac(VHT80) /ax(HE80)/be(EHT80);                                                                                                          |                                                    |
| Type of Modulation:              | <input checked="" type="checkbox"/> OFDM with BPSK/QPSK/16QAM/64QAM for 802.11a/n<br><input checked="" type="checkbox"/> OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11ac<br><input checked="" type="checkbox"/> OFDMA with 1024QAM for 802.11ax/be                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                    |
| Antenna installation:            | External antenna                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                    |
| Antenna Gain:                    | 1.95 dBi<br>Remark:<br><input checked="" type="checkbox"/> The antenna gain of the product comes from the antenna report provided by the customer, and the test data is affected by the customer information. The laboratory assumes no responsibility for its authenticity.<br><input type="checkbox"/> The antenna gain of the product is provided by the customer, and the test data is affected by the customer information. The laboratory assumes no responsibility for its authenticity.                                                                                                                                                                                                                                                                                                                                                                              |                                                    |
| Ratings:                         | AC 100-240V 6.3A 47-63Hz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                    |

## 4.2 Test Setup Configuration

See test photographs attached in *EUT TEST SETUP PHOTOGRAPHS* for the actual connections between Product and support equipment.

Conducted Emission/Radiated Spurious Emission

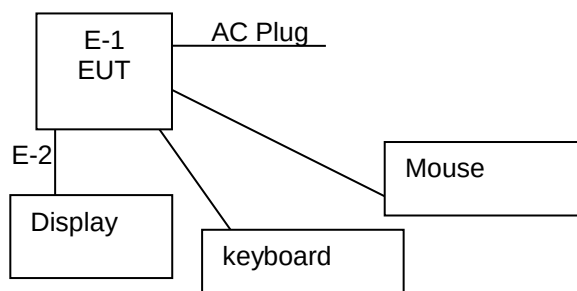

## 4.3 Support Equipment

| No. | Device Type | Brand     | Model   | Series No. | Note |
|-----|-------------|-----------|---------|------------|------|
| E-1 | Keyboard    | Logitech  | M-U0026 | ---        | ---  |
| E-2 | HDMI Cable  | Belkin    | HDMI2.0 | ---        | ---  |
| E-3 | Mouse       | Logitech  | YU0036  | ---        | ---  |
| E-4 | Display     | ChangHong | 55DBK   | ---        | ---  |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
| C-1  | Power cord    | N/A          | N/A    | N/A  |

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

#### 4.4 Channel List

| (U-NII-1) 5180MHz-5240MHz  |         |                 |         |                 |
|----------------------------|---------|-----------------|---------|-----------------|
| Bandwidth                  | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 20MHz                      | 36      | 5180            | 40      | 5200            |
|                            | 44      | 5220            | 48      | 5240            |
| 40MHz                      | 38      | 5190            | 46      | 5230            |
| 80MHz                      | 42      | 5210            |         |                 |
| (U-NII-2A) 5260MHz-5320MHz |         |                 |         |                 |
| Bandwidth                  | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 20MHz                      | 52      | 5260            | 56      | 5280            |
|                            | 60      | 5300            | 64      | 5320            |
| 40MHz                      | 54      | 5270            | 62      | 5310            |
| 80MHz                      | 58      | 5290            |         |                 |
| Bandwidth                  | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 20MHz                      | 100     | 5500            | 105     | 5520            |
|                            | 108     | 5540            | 112     | 5560            |
|                            | 116     | 5580            | 132     | 5660            |
|                            | 136     | 5680            | 140     | 5700            |
| 40MHz                      | 102     | 5510            | 110     | 5550            |
|                            | 134     | 5670            |         |                 |
| 80MHz                      | 106     | 5530            |         |                 |
| (U-NII-3) 5745MHz-5825MHz  |         |                 |         |                 |
| Bandwidth                  | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 20MHz                      | 149     | 5745            | 153     | 5765            |
|                            | 157     | 5785            | 161     | 5805            |
|                            | 165     | 5825            |         |                 |
| 40MHz                      | 151     | 5755            | 159     | 5795            |
| 80MHz                      | 155     | 5775            |         |                 |

#### RU type

| Bandwidth | 20MHz BW    | 40MHz BW    | 80MHz BW    |
|-----------|-------------|-------------|-------------|
| RU Type   | 242-tone RU | 484-tone RU | 996-tone RU |

Note: The product is only compatible with Su.

#### 4.5 Test Mode

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

| Pretest Mode | Description                                                                                                                                                                                          |
|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Mode 1       | 802.11a / n/ ac/ ax / be 20 CH36/ CH40/ CH 48<br>802.11a / n/ ac/ ax/ be 20 CH52/ CH56/ CH 64<br>802.11a / n/ ac/ ax / be 20 CH100/ CH116/ CH 140<br>802.11a /n/ ac/ ax / be 20 CH149/ CH157/ CH 165 |
| Mode 2       | 802.11n/ ac/ ax / be 40 CH38/ CH 46<br>802.11n/ ac/ ax / be 40 CH54/ CH 62<br>802.11n/ ac/ ax / be 40 CH102/ CH 110/CH134<br>802.11n/ ac/ ax / be 40 CH 151 / CH 159                                 |
| Mode 3       | 802.11 ac / ax / be 80 CH42<br>802.11 ac / ax / be 80 CH58<br>802.11 ac / ax / be 80 CH106<br>802.11 ac / ax / be 80 CH155                                                                           |
| Mode 4       | Transmit mode                                                                                                                                                                                        |

Note:

1. The measurements are performed at the highest, middle, lowest available channels.
2. The measurements are performed at all Bit Rate of Transmitter, the worst data was reported

#### 4.6 Table Of Parameters Of Text Software Setting

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

| RF Function | Mode Or Modulation type   | Power Class | Software For Testing |
|-------------|---------------------------|-------------|----------------------|
| WIFI 5G     | 802.11a                   | 10          | MTK_MT7925           |
|             | 802.11n20/ac20/ax20/be 20 | 10          |                      |
|             | 802.11n40/ac40/ax40/be 40 | 10          |                      |
|             | 802.11ac80/ax80/be80      | 10          |                      |

#### 4.7 Antenna

Table for Internal antenna

| Ant. | Brand | Model Name | Antenna Type     | Gain (dBi) | NOTE |
|------|-------|------------|------------------|------------|------|
| A    | N/A   | N/A        | External antenna | 1.95       | N/A  |
| B    | N/A   | N/A        | External antenna | 1.95       | N/A  |

EUT has two External antennas with The maximum gain GANT of Antenna A is 1.95 dBi, and that of Antenna B is 1.95dBi, CDD device with one spatial streams, also can operat with one spatial streams according to KDB662911 D01 v02r01,  
Directional gain= GANT + Array Gain, where Array Gain is as follows.

1)For power spectral density(PSD) measurements,  
Array Gain= $10\log(NANT/NSS)$ dB= $10\log(2/1)$ =3.01dB,  
So the directional gain for PSD is 4.96 dBi

2)For power measurements,  
The Array gain=0 dB for  $NANT \leq 4$ ,  
So the directional gain for Power measurements is 1.95 dBi

## 5. Test Facility And Test Instrument Used

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at Shenzhen BCTC Technology Co., Ltd.

Address: Room 101M, Unit 1, Building1, Pengyuan, No.18, Lilang Road, Shanglilang, Nanwan Subdistrict, Longgang District, Shenzhen, Guangdong, China.

The site and apparatus are constructed in conformance with the requirements of ANSI C63.4a-2017 and CISPR 16-1-1:2019 other equivalent standards.

FCC Test Firm Registration Number: 754702

ANAB certificate registration number is: CN3479

### 5.2 Test Instrument Used

| Conducted emissions Test |              |                 |         |            |            |
|--------------------------|--------------|-----------------|---------|------------|------------|
| Equipment                | Manufacturer | Model#          | Serial# | Last Cal.  | Next Cal.  |
| Receiver                 | R&S          | ESCI            | 101421  | 2025.08.30 | 2026.08.29 |
| AMN                      | SCHWHRZBECK  | NSLK8128        | 05152   | 2026.01.22 | 2027.01.21 |
| AMN                      | SCHWHRZBECK  | NSLK8127        | 8127739 | 2025.09.16 | 2026.09.15 |
| Pulse Limiter            | SCHWHRZBECK  | VTSD 9561-F-N   | 00547   | 2025.08.30 | 2026.08.29 |
| Temperature & Humidity   | Wetest       | HTC-1           | /       | 2025.09.01 | 2026.08.31 |
| Software                 | EZ-EMC       | Ver.EMC-CON 3A1 | /       | /          | /          |


| Radiated disturbance 2#       |                 |                |             |            |            |
|-------------------------------|-----------------|----------------|-------------|------------|------------|
| Equipment                     | Manufacturer    | Model#         | Serial#     | Last Cal.  | Next Cal.  |
| Shielded room                 | ChengYu         | 9*6*6          | /           | 2023.09.25 | 2026.09.24 |
| Loop Antenna                  | Schwarzbeck     | FMZB1519B      | 00014       | 2026.01.05 | 2027.01.04 |
| Broadband antenna             | SCHWHRZBECK     | VULB9168       | 01620       | 2025.08.29 | 2026.08.28 |
| Horn antenna( 1 GHz -18GHz)   | SCHWARZBECK     | BBHA 9120 D    | 2792        | 2025.08.29 | 2026.08.28 |
| Horn antenna ( 18 GHz -40GHz) | SCHWARZBECK     | BBHA9170       | 00822       | 2025.12.29 | 2026.12.28 |
| Receiver                      | R&S             | ESR            | 1316        | 2025.08.30 | 2026.08.29 |
| Spectrum Analyzer             | R&S             | FSV40          | 101328      | 2026.01.22 | 2027.01.21 |
| Amplifier                     | SCHWHRZBECK     | BBV9744        | 568         | 2025.08.30 | 2026.08.29 |
| Amplifier                     | EMC INSTRUMENTS | EMC0518A45SE E | EMT-SZ2 233 | 2025.08.30 | 2026.08.29 |

|                               | CORPORATION |               |          |            |            |
|-------------------------------|-------------|---------------|----------|------------|------------|
| Amplifier<br>(18GHz-40GHz)    | MITEQ       | TTA1840-35-HG | 2034381  | 2026.05.09 | 2027.05.08 |
| RF cable 3#<br>(9kHz-6GHz)    | Yunyi       | 10M           | /        | 2025.08.30 | 2026.08.29 |
| RF cable 9#<br>(9kHz-1GHz)    | Yunyi       | 2M            | /        | 2025.10.28 | 2026.10.27 |
| RF cable 5#<br>(1GHz-18GHz)   | SKET        | 9M            | 18038626 | 2025.08.30 | 2026.08.29 |
| RF cable 6#<br>(1GHz-18GHz)   | SKET        | 5M            | #10      | 2025.09.05 | 2026.09.04 |
| RF cable 10#<br>(18GHz-40GHz) | /           | 2M            | 2M       | 2026.05.09 | 2027.05.08 |
| RF cable 11#<br>(18GHz-40GHz) | /           | 2.5M          | 2.5M     | 2026.05.09 | 2027.05.08 |
| Temperature & Humidity        | Wetest      | HTC-1         | /        | 2025.09.05 | 2026.09.04 |
| Software                      | EZ-EMC      | Ver.FA-03A2   | /        | /          | /          |

| RF Conducted Test                     |                                |                 |            |            |            |
|---------------------------------------|--------------------------------|-----------------|------------|------------|------------|
| Equipment                             | Manufacturer                   | Model#          | Serial#    | Last Cal.  | Next Cal.  |
| Spectrum Analyzer                     | Keysight                       | N9020A          | MY51287403 | 2025.08.30 | 2026.08.29 |
| Signal Generator                      | Keysight                       | N5182A          | MY50144088 | 2025.08.30 | 2026.08.29 |
| Power Sensor                          | Keysight                       | U2001           | MY51250006 | 2025.10.28 | 2026.10.27 |
| Temperature & Humidity                | Wetest                         | HTC-1           | /          | 2025.09.01 | 2026.08.31 |
| Communication test set                | R&S                            | CMW500          | 157483     | 2025.08.30 | 2026.08.29 |
| Radio frequency control box           | MWRFtest                       | MW100-RFCB      | \          | \          | \          |
| Software                              | MWRFtest                       | MTS 8310        | V 3.0.0.0  | \          | \          |
| D.C. Power Supply                     | Elektro-Automatik GmbH & Co.KG | D-41747 Viersen | 6230316    | 2025.09.30 | 2026.08.29 |
| Temperature and humidity test chamber | Auchno                         | OJN-9606-408 L  | 19120183   | 2025.07.09 | 2026.07.08 |
|                                       |                                |                 |            | 2026.07.07 | 2027.07.06 |

## 6. Conducted Emissions

### 6.1 Block Diagram Of Test Setup

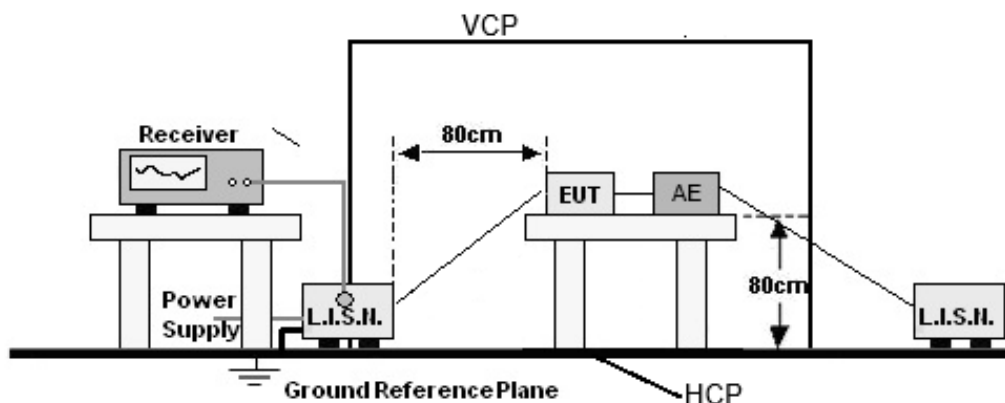

### 6.2 Limit

| Frequency (MHz) | Limit (dBuV) |           |
|-----------------|--------------|-----------|
|                 | Quas-peak    | Average   |
| 0.15 -0.5       | 66 - 56 *    | 56 - 46 * |
| 0.50 -5.0       | 56.00        | 46.00     |
| 5.0 -30.0       | 60.00        | 50.00     |

Notes:

- \*Decreasing linearly with logarithm of frequency.
- The lower limit shall apply at the transition frequencies.

### 6.3 Test procedure

| Receiver Parameters | Setting  |
|---------------------|----------|
| Attenuation         | 10 dB    |
| Start Frequency     | 0.15 MHz |
| Stop Frequency      | 30 MHz   |
| IF Bandwidth        | 9 kHz    |


- The Product was placed on a nonconductive table 0.8 m above the horizontal ground reference plane, and 0.4 m from the vertical ground reference plane, and connected to the main through Line Impedance Stability Network (L.I.S.N).
- The RBW of the receiver was set at 9 kHz in 150 kHz ~ 30MHz with Peak and AVG detector in Max Hold mode. Run the receiver's pre-scan to record the maximum disturbance generated from Product in all power lines in the full band.
- For each frequency whose maximum record was higher or close to limit, measure its QP and AVG values and record.

### 6.4 EUT operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 6.5 Test Result

|              |         |                    |             |
|--------------|---------|--------------------|-------------|
| Temperature: | 26.3 °C | Relative Humidity: | 53 %        |
| Pressure:    | 101KPa  | Test Voltage:      | AC120V/60Hz |
| Test Mode:   | Mode 3  | Polarization :     | L           |

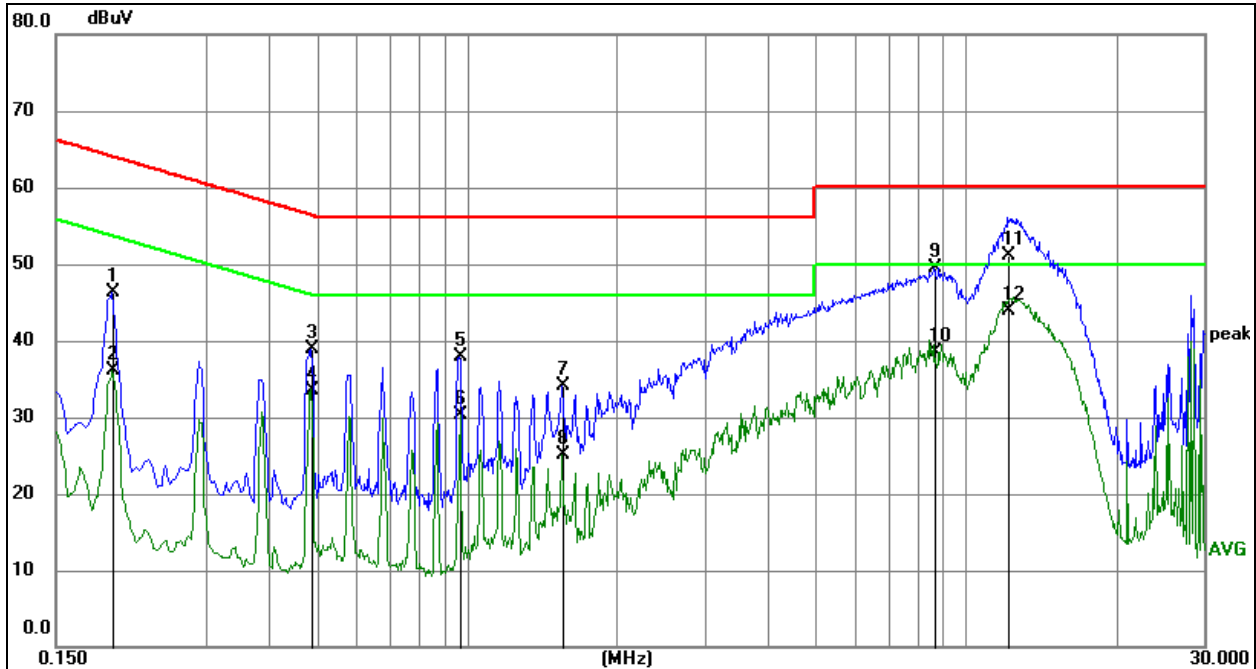


Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = LISN factor + Cable Loss+ Limiter (10dB).
3. Margin = (Reading+ Factor )–Limit

| No.  | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F |
|------|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|
| 1    | 0.1949          | 35.86          | 10.50       | 46.36        | 63.83        | -17.47      | QP       | P   |
| 2    | 0.1949          | 25.58          | 10.50       | 36.08        | 53.83        | -17.75      | AVG      | P   |
| 3    | 0.4875          | 28.39          | 10.52       | 38.91        | 56.21        | -17.30      | QP       | P   |
| 4    | 0.4875          | 23.08          | 10.52       | 33.60        | 46.21        | -12.61      | AVG      | P   |
| 5    | 0.9645          | 27.31          | 10.53       | 37.84        | 56.00        | -18.16      | QP       | P   |
| 6    | 0.9645          | 19.76          | 10.53       | 30.29        | 46.00        | -15.71      | AVG      | P   |
| 7    | 1.5540          | 23.55          | 10.55       | 34.10        | 56.00        | -21.90      | QP       | P   |
| 8    | 1.5540          | 14.56          | 10.55       | 25.11        | 46.00        | -20.89      | AVG      | P   |
| 9    | 8.6820          | 38.41          | 11.11       | 49.52        | 60.00        | -10.48      | QP       | P   |
| 10   | 8.6820          | 27.37          | 11.11       | 38.48        | 50.00        | -11.52      | AVG      | P   |
| 11   | 12.1875         | 39.89          | 11.31       | 51.20        | 60.00        | -8.80       | QP       | P   |
| 12 * | 12.1875         | 32.69          | 11.31       | 44.00        | 50.00        | -6.00       | AVG      | P   |

\* Indicates the worst data.

|              |         |                    |             |
|--------------|---------|--------------------|-------------|
| Temperature: | 26.3 °C | Relative Humidity: | 53 %        |
| Pressure:    | 101KPa  | Test Voltage:      | AC120V/60Hz |
| Test Mode:   | Mode 3  | Polarization :     | N           |

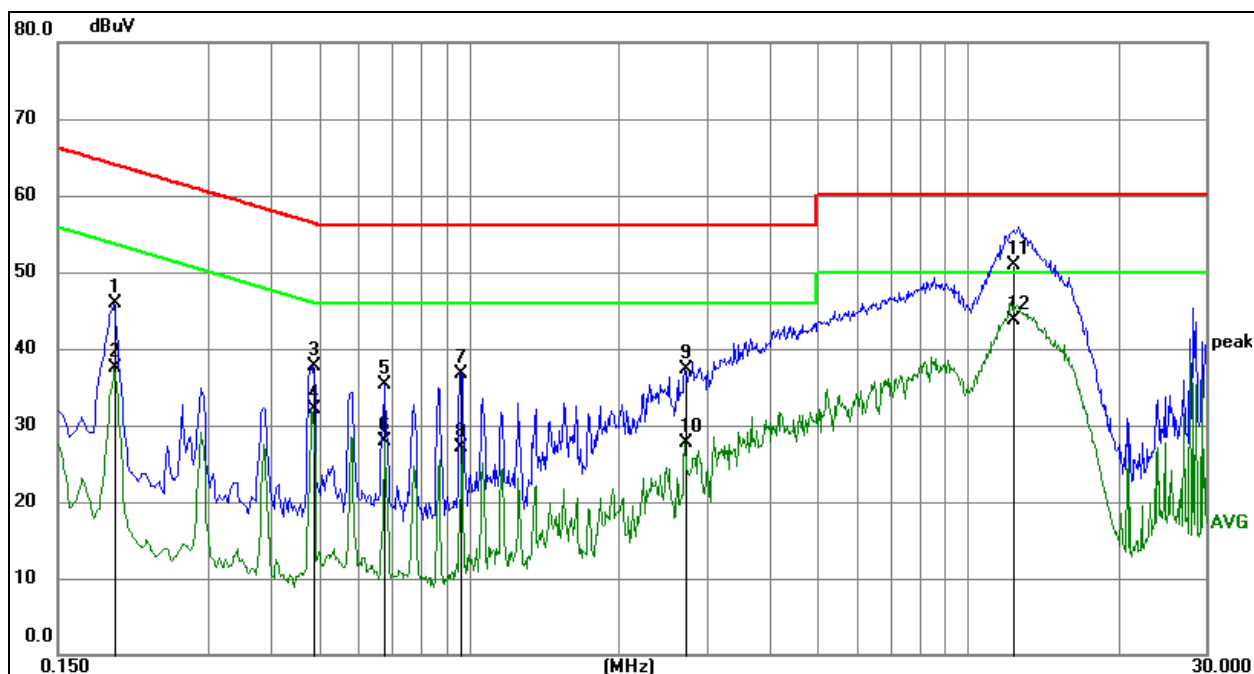

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = LISN factor + Cable Loss+ Limiter (10dB).
3. Margin = (Reading+ Factor )-Limit


| No.  | Frequency (MHz) | Reading (dBuV) | Factor (dB) | Level (dBuV) | Limit (dBuV) | Margin (dB) | Detector | P/F |
|------|-----------------|----------------|-------------|--------------|--------------|-------------|----------|-----|
| 1    | 0.1949          | 35.38          | 10.50       | 45.88        | 63.83        | -17.95      | QP       | P   |
| 2    | 0.1949          | 27.08          | 10.50       | 37.58        | 53.83        | -16.25      | AVG      | P   |
| 3    | 0.4875          | 27.22          | 10.52       | 37.74        | 56.21        | -18.47      | QP       | P   |
| 4    | 0.4875          | 21.64          | 10.52       | 32.16        | 46.21        | -14.05      | AVG      | P   |
| 5    | 0.6765          | 24.85          | 10.53       | 35.38        | 56.00        | -20.62      | QP       | P   |
| 6    | 0.6765          | 17.29          | 10.53       | 27.82        | 46.00        | -18.18      | AVG      | P   |
| 7    | 0.9600          | 26.27          | 10.53       | 36.80        | 56.00        | -19.20      | QP       | P   |
| 8    | 0.9600          | 16.57          | 10.53       | 27.10        | 46.00        | -18.90      | AVG      | P   |
| 9    | 2.7150          | 26.73          | 10.55       | 37.28        | 56.00        | -18.72      | QP       | P   |
| 10   | 2.7150          | 17.08          | 10.55       | 27.63        | 46.00        | -18.37      | AVG      | P   |
| 11   | 12.2865         | 39.69          | 11.31       | 51.00        | 60.00        | -9.00       | QP       | P   |
| 12 * | 12.2865         | 32.39          | 11.31       | 43.70        | 50.00        | -6.30       | AVG      | P   |

\* Indicates the worst data.


## 7. Radiated Emissions

### 7.1 Block Diagram Of Test Setup


(A) Radiated Emission Test-Up Frequency Below 30MHz

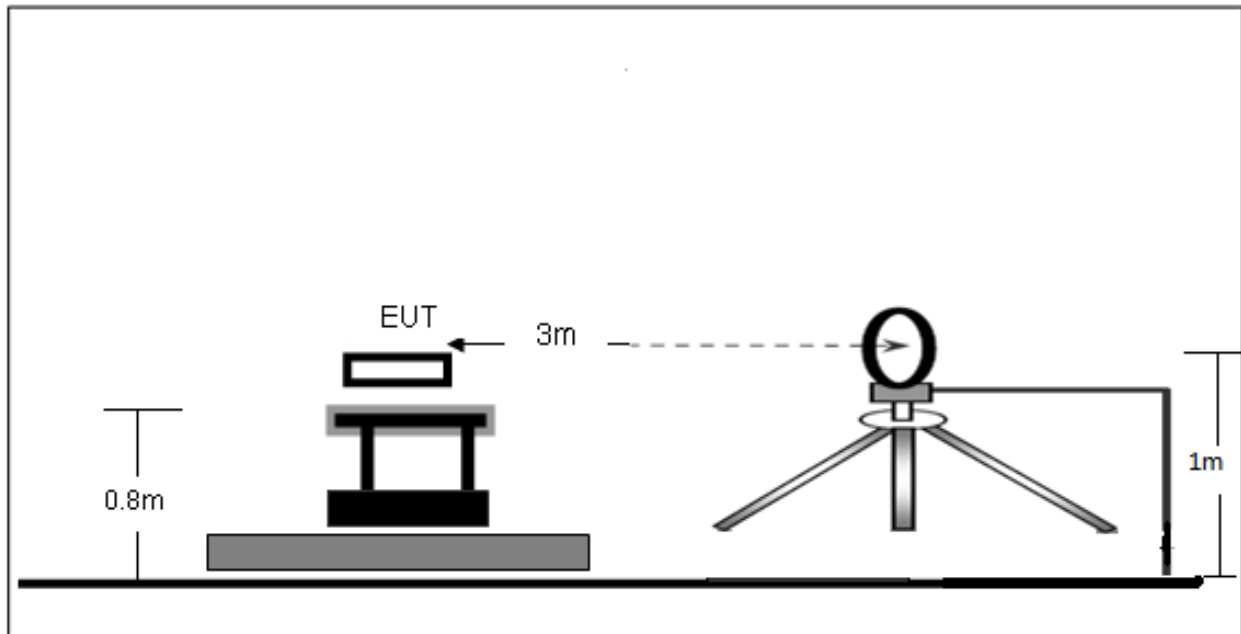

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

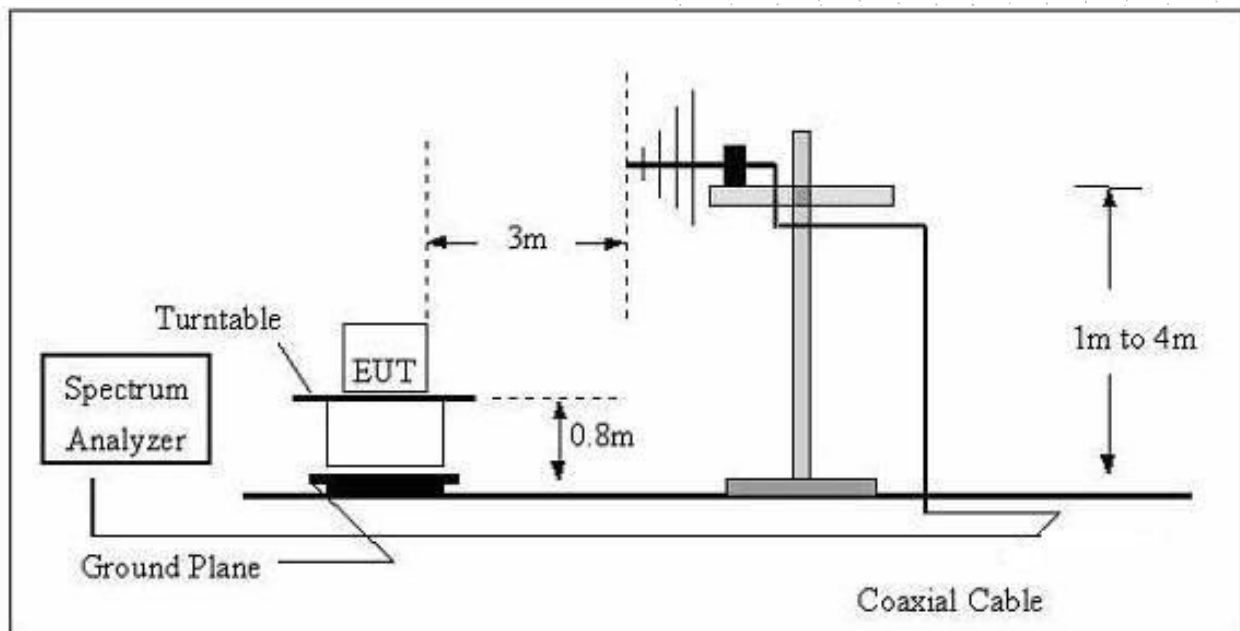

(C) Radiated Emission Test-Up Frequency Above 1GHz

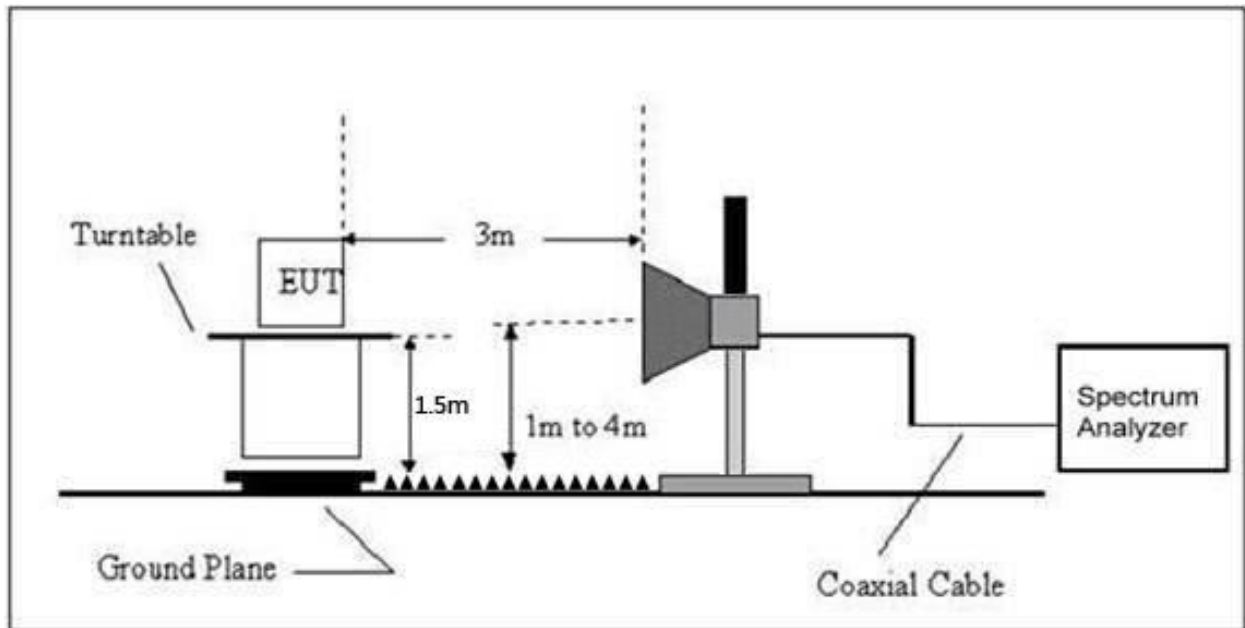

## 7.2 Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

| Frequency<br>(MHz) | Field Strength<br>uV/m | Distance<br>(m) | Field Strength Limit at 3m Distance |                                       |
|--------------------|------------------------|-----------------|-------------------------------------|---------------------------------------|
|                    |                        |                 | uV/m                                | dBuV/m                                |
| 0.009 ~ 0.490      | $2400/F(\text{kHz})$   | 300             | $10000 * 2400/F(\text{kHz})$        | $20\log^{(2400/F(\text{kHz}))} + 80$  |
| 0.490 ~ 1.705      | $24000/F(\text{kHz})$  | 30              | $100 * 24000/F(\text{kHz})$         | $20\log^{(24000/F(\text{kHz}))} + 40$ |
| 1.705 ~ 30         | 30                     | 30              | $100 * 30$                          | $20\log^{(30)} + 40$                  |
| 30 ~ 88            | 100                    | 3               | 100                                 | $20\log^{(100)}$                      |
| 88 ~ 216           | 150                    | 3               | 150                                 | $20\log^{(150)}$                      |
| 216 ~ 960          | 200                    | 3               | 200                                 | $20\log^{(200)}$                      |
| Above 960          | 500                    | 3               | 500                                 | $20\log^{(500)}$                      |

### Limits Of Radiated Emission Measurement (Above 1000MHz)

| Frequency (MHz) | Limit (dBuV/m) (at 3M) |         |
|-----------------|------------------------|---------|
|                 | Peak                   | Average |
| Above 1000      | 74                     | 54      |

#### Notes:

- (1)The limit for radiated test was performed according to FCC PART 15C.
- (2)The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

### 7.3 Test Procedure

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10-2013. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205.

It must be performed with the highest gain of each type of antenna proposed for use with the EUT.

Use the following spectrum analyzer settings:

| Spectrum Parameter                    | Setting                                          |
|---------------------------------------|--------------------------------------------------|
| Attenuation                           | Auto                                             |
| Start Frequency                       | 1000 MHz                                         |
| Stop Frequency                        | 10th carrier harmonic                            |
| RB / VB (emission in restricted band) | 1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average |

| Receiver Parameter     | Setting                          |
|------------------------|----------------------------------|
| Attenuation            | Auto                             |
| Start ~ Stop Frequency | 9kHz~150kHz / RB 200Hz for QP    |
| Start ~ Stop Frequency | 150kHz~30MHz / RB 9kHz for QP    |
| Start ~ Stop Frequency | 30MHz~1000MHz / RB 120kHz for QP |

- The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. For frequencies above 1GHz, any suitable measuring distance may be used.
- The EUT was placed on the top of a rotating table 0.8 m for below 1GHz and 1.5m for above 1GHz the ground at a 3 meter. The table was rotated 360 degrees to determine the position of the highest radiation.
- The height of the equipment or of the substitution antenna shall be 0.8 m for below 1GHz and 1.5m for above 1GHz; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and then no additional QP Mode measurement performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested

and performed pretest to three orthogonal axis. The worst case emissions were reported

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

| Frequency Band (MHz) | Function | Resolution bandwidth | Video Bandwidth |
|----------------------|----------|----------------------|-----------------|
| 30 to 1000           | QP       | 120 kHz              | 300 kHz         |
| Above 1000           | Peak     | 1 MHz                | 1 MHz           |
|                      | Average  | 1 MHz                | 10 Hz           |

Note: for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where  $RBWCF [dB] = 10 \cdot \lg(100 [kHz] / \text{narrower RBW} [kHz])$ . , the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

## 7.4 EUT Operating Conditions

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

## 7.5 Test Result

Below 30MHz

|              |         |                    |             |
|--------------|---------|--------------------|-------------|
| Temperature: | 24.6 °C | Relative Humidity: | 58 %        |
| Pressure:    | 101 kPa | Test Voltage :     | AC120V/60Hz |
| Test Mode:   | Mode 3  | Polarization:      | --          |

| Freq. (MHz) | Reading (dBuV/m) | Limit (dBuV/m) | Margin (dB) | State P/F |
|-------------|------------------|----------------|-------------|-----------|
| --          | --               | --             | --          | PASS      |
| --          | --               | --             | --          | PASS      |

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance}) (dB)$ ;

Limit line = specific limits(dBuV) + distance extrapolation factor.

Between 30MHz – 1GHz

|              |         |                    |             |
|--------------|---------|--------------------|-------------|
| Temperature: | 24.6 °C | Relative Humidity: | 58 %        |
| Pressure:    | 101KPa  | Test Voltage:      | AC120V/60Hz |
| Test Mode:   | Mode 3  | Polarization :     | Horizontal  |

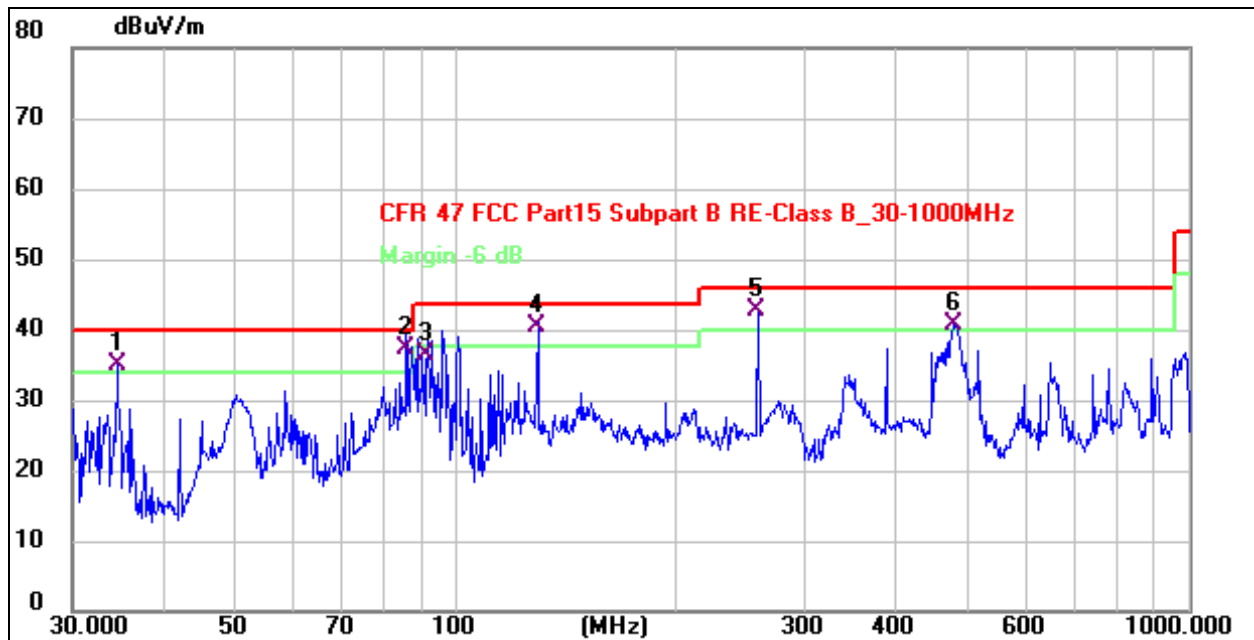


Remark:  
Factor = Antenna Factor + Cable Loss – Pre-amplifier.  
Margin = (Reading + Factor) – Limit

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|
| 1 ! | 34.4729         | 46.45          | -11.58        | 34.87          | 40.00          | -5.13       | QP       | 200         | 360            | P   |
| 2 * | 85.5777         | 52.09          | -14.88        | 37.21          | 40.00          | -2.79       | QP       | 200         | 360            | P   |
| 3   | 91.4521         | 50.98          | -14.64        | 36.34          | 43.50          | -7.16       | QP       | 200         | 360            | P   |
| 4 ! | 129.1353        | 51.90          | -11.60        | 40.30          | 43.50          | -3.20       | QP       | 200         | 360            | P   |
| 5 ! | 258.2057        | 54.69          | -12.07        | 42.62          | 46.00          | -3.38       | QP       | 200         | 360            | P   |
| 6 ! | 478.3421        | 46.95          | -6.12         | 40.83          | 46.00          | -5.17       | QP       | 200         | 360            | P   |

\* Indicates the worst data.

|              |         |                    |             |
|--------------|---------|--------------------|-------------|
| Temperature: | 24.6 °C | Relative Humidity: | 58 %        |
| Pressure:    | 101KPa  | Test Voltage:      | AC120V/60Hz |
| Test Mode:   | Mode 3  | Polarization :     | Vertical    |

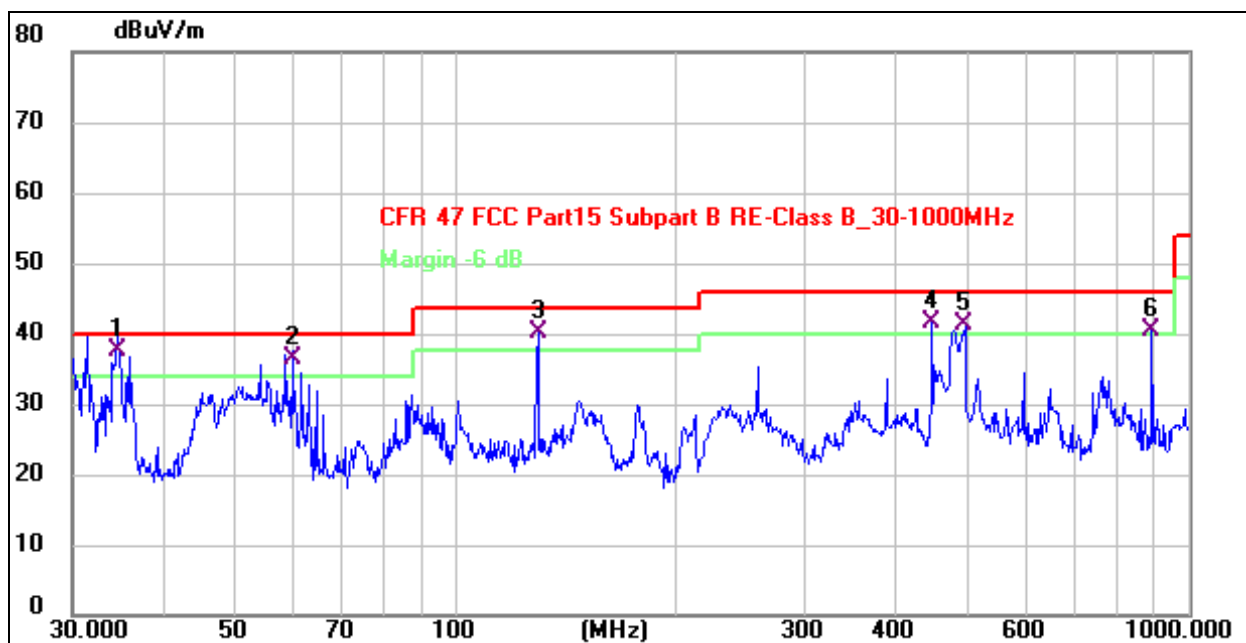

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Margin = (Reading + Factor) – Limit

| No. | Frequency (MHz) | Reading (dBuV) | Factor (dB/m) | Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) | Detector | Height (cm) | Azimuth (deg.) | P/F |
|-----|-----------------|----------------|---------------|----------------|----------------|-------------|----------|-------------|----------------|-----|
| 1 * | 34.5011         | 49.19          | -11.59        | 37.60          | 40.00          | -2.40       | QP       | 100         | 0              | P   |
| 2 ! | 59.9849         | 48.31          | -11.82        | 36.49          | 40.00          | -3.51       | QP       | 100         | 0              | P   |
| 3 ! | 129.0900        | 51.84          | -11.63        | 40.21          | 43.50          | -3.29       | QP       | 100         | 0              | P   |
| 4 ! | 445.0075        | 48.49          | -6.88         | 41.61          | 46.00          | -4.39       | QP       | 100         | 0              | P   |
| 5 ! | 495.1235        | 46.67          | -5.40         | 41.27          | 46.00          | -4.73       | QP       | 100         | 0              | P   |
| 6 ! | 890.1033        | 39.88          | 0.61          | 40.49          | 46.00          | -5.51       | QP       | 100         | 0              | P   |

\* Indicates the worst data.

|            |                    |
|------------|--------------------|
| Test Mode: | TX(5.1G) - 802.11a |
|------------|--------------------|

| Polar                              | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|------------------------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)                              | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| Low Channel (5180 MHz)-Above 1G    |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4434.02        | 74.19            | -10.51            | 63.68            | 68.20    | -4.52  | PK               |
| Vertical                           | 4434.02        | 59.02            | -10.51            | 48.51            | 54.00    | -5.49  | AV               |
| Vertical                           | 10360.14       | 60.74            | -0.72             | 60.02            | 68.20    | -8.18  | PK               |
| Vertical                           | 10360.14       | 49.68            | -0.72             | 48.96            | 54.00    | -5.04  | AV               |
| Vertical                           | 15540.12       | 60.71            | 2.59              | 63.30            | 74.00    | -10.70 | PK               |
| Vertical                           | 15540.12       | 49.44            | 2.59              | 52.03            | 54.00    | -1.97  | AV               |
| Horizontal                         | 4434.07        | 72.49            | -10.51            | 61.98            | 68.20    | -6.22  | PK               |
| Horizontal                         | 4434.07        | 59.40            | -10.51            | 48.89            | 54.00    | -5.11  | AV               |
| Horizontal                         | 10360.15       | 62.64            | -0.72             | 61.92            | 68.20    | -6.28  | PK               |
| Horizontal                         | 10360.15       | 49.64            | -0.72             | 48.92            | 54.00    | -5.08  | AV               |
| Horizontal                         | 15540.18       | 64.60            | 2.59              | 67.19            | 74.00    | -6.81  | PK               |
| Horizontal                         | 15540.18       | 49.73            | 2.59              | 52.32            | 54.00    | -1.68  | AV               |
| middle Channel (5200 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4592.03        | 70.72            | -10.20            | 60.52            | 74.00    | -13.48 | PK               |
| Vertical                           | 4592.03        | 59.14            | -10.20            | 48.94            | 54.00    | -5.06  | AV               |
| Vertical                           | 10400.17       | 62.07            | -0.67             | 61.40            | 68.20    | -6.80  | PK               |
| Vertical                           | 10400.17       | 49.48            | -0.67             | 48.81            | 54.00    | -5.19  | AV               |
| Vertical                           | 15600.18       | 61.46            | 2.67              | 64.13            | 74.00    | -9.87  | PK               |
| Vertical                           | 15600.18       | 49.44            | 2.67              | 52.11            | 54.00    | -1.89  | AV               |
| Horizontal                         | 4592.05        | 74.26            | -10.20            | 64.06            | 74.00    | -9.94  | PK               |
| Horizontal                         | 4592.05        | 59.74            | -10.20            | 49.54            | 54.00    | -4.46  | AV               |
| Horizontal                         | 10400.12       | 64.84            | -0.67             | 64.17            | 68.20    | -4.03  | PK               |
| Horizontal                         | 10400.12       | 49.39            | -0.67             | 48.72            | 54.00    | -5.28  | AV               |
| Horizontal                         | 15600.12       | 61.08            | 2.67              | 63.75            | 74.00    | -10.25 | PK               |
| Horizontal                         | 15600.12       | 49.99            | 2.67              | 52.66            | 54.00    | -1.34  | AV               |
| High Channel (5240 MHz)-Above 1G   |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4739.01        | 72.38            | -9.45             | 62.93            | 74.00    | -11.07 | PK               |
| Vertical                           | 4739.01        | 59.63            | -9.45             | 50.18            | 54.00    | -3.82  | AV               |
| Vertical                           | 10480.05       | 61.71            | -0.64             | 61.07            | 68.20    | -7.13  | PK               |
| Vertical                           | 10480.05       | 49.11            | -0.64             | 48.47            | 54.00    | -5.53  | AV               |
| Vertical                           | 15720.18       | 64.47            | 2.33              | 66.80            | 74.00    | -7.20  | PK               |
| Vertical                           | 15720.18       | 49.97            | 2.33              | 52.30            | 54.00    | -1.70  | AV               |
| Horizontal                         | 4739.13        | 71.04            | -9.45             | 61.59            | 74.00    | -12.41 | PK               |
| Horizontal                         | 4739.13        | 59.47            | -9.45             | 50.02            | 54.00    | -3.98  | AV               |
| Horizontal                         | 10480.10       | 62.91            | -0.64             | 62.27            | 68.20    | -5.93  | PK               |
| Horizontal                         | 10480.10       | 49.49            | -0.64             | 48.85            | 54.00    | -5.15  | AV               |
| Horizontal                         | 15720.12       | 64.16            | 2.33              | 66.49            | 74.00    | -7.51  | PK               |
| Horizontal                         | 15720.12       | 49.53            | 2.33              | 51.86            | 54.00    | -2.14  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor – Limits

The worst case is Antenna A

|            |                         |
|------------|-------------------------|
| Test Mode: | TX(5.1G) - 802.11n-HT20 |
|------------|-------------------------|

| Polar                              | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|------------------------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)                              | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| Low Channel (5180 MHz)-Above 1G    |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4434.19        | 74.17            | -10.51            | 63.66            | 68.20    | -4.54  | PK               |
| Vertical                           | 4434.19        | 59.92            | -10.51            | 49.41            | 54.00    | -4.59  | AV               |
| Vertical                           | 10360.19       | 60.85            | -0.72             | 60.13            | 68.20    | -8.07  | PK               |
| Vertical                           | 10360.19       | 49.45            | -0.72             | 48.73            | 54.00    | -5.27  | AV               |
| Vertical                           | 15540.14       | 60.79            | 2.59              | 63.38            | 74.00    | -10.62 | PK               |
| Vertical                           | 15540.14       | 49.72            | 2.59              | 52.31            | 54.00    | -1.69  | AV               |
| Horizontal                         | 4434.04        | 71.33            | -10.51            | 60.82            | 68.20    | -7.38  | PK               |
| Horizontal                         | 4434.04        | 59.70            | -10.51            | 49.19            | 54.00    | -4.81  | AV               |
| Horizontal                         | 10360.20       | 64.54            | -0.72             | 63.82            | 68.20    | -4.38  | PK               |
| Horizontal                         | 10360.20       | 49.25            | -0.72             | 48.53            | 54.00    | -5.47  | AV               |
| Horizontal                         | 15540.14       | 60.38            | 2.59              | 62.97            | 74.00    | -11.03 | PK               |
| Horizontal                         | 15540.14       | 49.32            | 2.59              | 51.91            | 54.00    | -2.09  | AV               |
| middle Channel (5200 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4592.15        | 74.23            | -10.20            | 64.03            | 74.00    | -9.97  | PK               |
| Vertical                           | 4592.15        | 59.19            | -10.20            | 48.99            | 54.00    | -5.01  | AV               |
| Vertical                           | 10400.06       | 60.35            | -0.67             | 59.68            | 68.20    | -8.52  | PK               |
| Vertical                           | 10400.06       | 49.72            | -0.67             | 49.05            | 54.00    | -4.95  | AV               |
| Vertical                           | 15600.01       | 62.44            | 2.67              | 65.11            | 74.00    | -8.89  | PK               |
| Vertical                           | 15600.01       | 49.43            | 2.67              | 52.10            | 54.00    | -1.90  | AV               |
| Horizontal                         | 4592.09        | 73.51            | -10.20            | 63.31            | 74.00    | -10.69 | PK               |
| Horizontal                         | 4592.09        | 59.85            | -10.20            | 49.65            | 54.00    | -4.35  | AV               |
| Horizontal                         | 10400.15       | 60.64            | -0.67             | 59.97            | 68.20    | -8.23  | PK               |
| Horizontal                         | 10400.15       | 49.17            | -0.67             | 48.50            | 54.00    | -5.50  | AV               |
| Horizontal                         | 15600.10       | 63.83            | 2.67              | 66.50            | 74.00    | -7.50  | PK               |
| Horizontal                         | 15600.10       | 49.99            | 2.67              | 52.66            | 54.00    | -1.34  | AV               |
| High Channel (5240 MHz)-Above 1G   |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4739.15        | 70.52            | -9.45             | 61.07            | 74.00    | -12.93 | PK               |
| Vertical                           | 4739.15        | 59.18            | -9.45             | 49.73            | 54.00    | -4.27  | AV               |
| Vertical                           | 10480.04       | 62.40            | -0.64             | 61.76            | 68.20    | -6.44  | PK               |
| Vertical                           | 10480.04       | 49.36            | -0.64             | 48.72            | 54.00    | -5.28  | AV               |
| Vertical                           | 15720.06       | 62.94            | 2.33              | 65.27            | 74.00    | -8.73  | PK               |
| Vertical                           | 15720.06       | 49.75            | 2.33              | 52.08            | 54.00    | -1.92  | AV               |
| Horizontal                         | 4739.19        | 71.93            | -9.45             | 62.48            | 74.00    | -11.52 | PK               |
| Horizontal                         | 4739.19        | 59.65            | -9.45             | 50.20            | 54.00    | -3.80  | AV               |
| Horizontal                         | 10480.15       | 62.19            | -0.64             | 61.55            | 68.20    | -6.65  | PK               |
| Horizontal                         | 10480.15       | 49.49            | -0.64             | 48.85            | 54.00    | -5.15  | AV               |
| Horizontal                         | 15720.18       | 64.96            | 2.33              | 67.29            | 74.00    | -6.71  | PK               |
| Horizontal                         | 15720.18       | 49.94            | 2.33              | 52.27            | 54.00    | -1.73  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.  
The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
Emission level (dBuV/m) = 20 log Emission level (uV/m).  
Correct Factor =Antenna Factor + Cable Loss - Preamp Factor  
Over = Reading Level + Correct Factor – Limits  
Test Mode is MIMO Mode.

|            |                         |
|------------|-------------------------|
| Test Mode: | TX(5.1G) - 802.11n-HT40 |
|------------|-------------------------|

| Polar<br>(H/V)                   | Fre-<br>quency<br>(MHz) | Reading<br>Level<br>(dBuV/m) | Correct<br>Factor<br>(dB) | Measure-<br>ment<br>(dBuV/m) | Limits<br>(dBuV/m) | Over<br>(dB) | Detector<br>Type |
|----------------------------------|-------------------------|------------------------------|---------------------------|------------------------------|--------------------|--------------|------------------|
| Low Channel (5190 MHz)-Above 1G  |                         |                              |                           |                              |                    |              |                  |
| Vertical                         | 4434.09                 | 72.01                        | -10.52                    | 61.49                        | 68.20              | -6.71        | PK               |
| Vertical                         | 4434.09                 | 59.22                        | -10.52                    | 48.70                        | 54.00              | -5.30        | AV               |
| Vertical                         | 10380.10                | 60.86                        | -0.70                     | 60.16                        | 68.20              | -8.04        | PK               |
| Vertical                         | 10380.10                | 49.97                        | -0.70                     | 49.27                        | 54.00              | -4.73        | AV               |
| Vertical                         | 15570.09                | 63.05                        | 2.39                      | 65.44                        | 74.00              | -8.56        | PK               |
| Vertical                         | 15570.09                | 49.54                        | 2.39                      | 51.93                        | 54.00              | -2.07        | AV               |
| Horizontal                       | 4434.10                 | 74.54                        | -10.52                    | 64.02                        | 74.00              | -9.98        | PK               |
| Horizontal                       | 4434.10                 | 59.77                        | -10.52                    | 49.25                        | 54.00              | -4.75        | AV               |
| Horizontal                       | 10380.12                | 63.77                        | -0.70                     | 63.07                        | 68.20              | -5.13        | PK               |
| Horizontal                       | 10380.12                | 49.53                        | -0.70                     | 48.83                        | 54.00              | -5.17        | AV               |
| Horizontal                       | 15570.10                | 62.16                        | 2.39                      | 64.55                        | 74.00              | -9.45        | PK               |
| Horizontal                       | 15570.10                | 49.76                        | 2.39                      | 52.15                        | 54.00              | -1.85        | AV               |
| High Channel (5230 MHz)-Above 1G |                         |                              |                           |                              |                    |              |                  |
| Vertical                         | 4739.10                 | 72.18                        | -9.45                     | 62.73                        | 68.20              | -5.47        | PK               |
| Vertical                         | 4739.10                 | 59.21                        | -9.45                     | 49.76                        | 54.00              | -4.24        | AV               |
| Vertical                         | 10460.17                | 60.71                        | -0.65                     | 60.06                        | 68.20              | -8.14        | PK               |
| Vertical                         | 10460.17                | 49.18                        | -0.65                     | 48.53                        | 54.00              | -5.47        | AV               |
| Vertical                         | 15690.04                | 62.61                        | 2.33                      | 64.94                        | 74.00              | -9.06        | PK               |
| Vertical                         | 15690.04                | 49.39                        | 2.33                      | 51.72                        | 54.00              | -2.28        | AV               |
| Horizontal                       | 4739.07                 | 73.50                        | -9.45                     | 64.05                        | 68.20              | -4.15        | PK               |
| Horizontal                       | 4739.07                 | 59.06                        | -9.45                     | 49.61                        | 54.00              | -4.39        | AV               |
| Horizontal                       | 10460.13                | 63.17                        | -0.65                     | 62.52                        | 68.20              | -5.68        | PK               |
| Horizontal                       | 10460.13                | 49.34                        | -0.65                     | 48.69                        | 54.00              | -5.31        | AV               |
| Horizontal                       | 15690.02                | 60.49                        | 2.33                      | 62.82                        | 74.00              | -11.18       | PK               |
| Horizontal                       | 15690.02                | 49.84                        | 2.33                      | 52.17                        | 54.00              | -1.83        | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.  
The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
Emission level (dBuV/m) = 20 log Emission level (uV/m).  
Correct Factor =Antenna Factor + Cable Loss - Preamp Factor  
Over = Reading Level + Correct Factor - Limits  
Test Mode is MIMO Mode.

|            |                           |
|------------|---------------------------|
| Test Mode: | TX(5.1G) - 802.11ac-VHT20 |
|------------|---------------------------|

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5180 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4434.18   | 73.53         | -10.51         | 63.02       | 68.20    | -5.18  | Pk            |
| Vertical                           | 4434.18   | 59.41         | -10.51         | 48.90       | 54.00    | -5.10  | AV            |
| Vertical                           | 10360.00  | 60.69         | -0.72          | 59.97       | 68.20    | -8.23  | Pk            |
| Vertical                           | 10360.00  | 49.42         | -0.72          | 48.70       | 54.00    | -5.30  | AV            |
| Vertical                           | 15540.10  | 60.02         | 2.59           | 62.61       | 74.00    | -11.39 | Pk            |
| Vertical                           | 15540.10  | 49.47         | 2.59           | 52.06       | 54.00    | -1.94  | AV            |
| Horizontal                         | 4434.15   | 70.86         | -10.51         | 60.35       | 68.20    | -7.85  | Pk            |
| Horizontal                         | 4434.15   | 59.37         | -10.51         | 48.86       | 54.00    | -5.14  | AV            |
| Horizontal                         | 10360.01  | 64.28         | -0.72          | 63.56       | 68.20    | -4.64  | Pk            |
| Horizontal                         | 10360.01  | 49.52         | -0.72          | 48.80       | 54.00    | -5.20  | AV            |
| Horizontal                         | 15540.06  | 63.05         | 2.59           | 65.64       | 74.00    | -8.36  | Pk            |
| Horizontal                         | 15540.06  | 49.86         | 2.59           | 52.45       | 54.00    | -1.55  | AV            |
| middle Channel (5200 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4592.01   | 73.45         | -10.20         | 63.25       | 74.00    | -10.75 | Pk            |
| Vertical                           | 4592.01   | 60.00         | -10.20         | 49.80       | 54.00    | -4.20  | AV            |
| Vertical                           | 10400.19  | 63.60         | -0.67          | 62.93       | 68.20    | -5.27  | Pk            |
| Vertical                           | 10400.19  | 49.93         | -0.67          | 49.26       | 54.00    | -4.74  | AV            |
| Vertical                           | 15600.11  | 64.49         | 2.67           | 67.16       | 74.00    | -6.84  | Pk            |
| Vertical                           | 15600.11  | 49.82         | 2.67           | 52.49       | 54.00    | -1.51  | AV            |
| Horizontal                         | 4592.15   | 72.98         | -10.20         | 62.78       | 74.00    | -11.22 | Pk            |
| Horizontal                         | 4592.15   | 59.73         | -10.20         | 49.53       | 54.00    | -4.47  | AV            |
| Horizontal                         | 10400.19  | 62.92         | -0.67          | 62.25       | 68.20    | -5.95  | Pk            |
| Horizontal                         | 10400.19  | 49.63         | -0.67          | 48.96       | 54.00    | -5.04  | AV            |
| Horizontal                         | 15600.10  | 60.17         | 2.67           | 62.84       | 74.00    | -11.16 | Pk            |
| Horizontal                         | 15600.10  | 49.43         | 2.67           | 52.10       | 54.00    | -1.90  | AV            |
| High Channel (5240 MHz)-Above 1G   |           |               |                |             |          |        |               |
| Vertical                           | 4739.14   | 73.10         | -9.45          | 63.65       | 74.00    | -10.35 | Pk            |
| Vertical                           | 4739.14   | 59.60         | -9.45          | 50.15       | 54.00    | -3.85  | AV            |
| Vertical                           | 10480.08  | 61.64         | -0.64          | 61.00       | 68.20    | -7.20  | Pk            |
| Vertical                           | 10480.08  | 49.05         | -0.64          | 48.41       | 54.00    | -5.59  | AV            |
| Vertical                           | 15720.11  | 61.14         | 2.33           | 63.47       | 74.00    | -10.53 | Pk            |
| Vertical                           | 15720.11  | 49.63         | 2.33           | 51.96       | 54.00    | -2.04  | AV            |
| Horizontal                         | 4739.18   | 72.68         | -9.45          | 63.23       | 74.00    | -10.77 | Pk            |
| Horizontal                         | 4739.18   | 59.81         | -9.45          | 50.36       | 54.00    | -3.64  | AV            |
| Horizontal                         | 10480.18  | 63.63         | -0.64          | 62.99       | 68.20    | -5.21  | Pk            |
| Horizontal                         | 10480.18  | 49.73         | -0.64          | 49.09       | 54.00    | -4.91  | AV            |
| Horizontal                         | 15720.14  | 63.26         | 2.33           | 65.59       | 74.00    | -8.41  | Pk            |
| Horizontal                         | 15720.14  | 49.27         | 2.33           | 51.60       | 54.00    | -2.40  | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor = Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor - Limits

Test Mode is MIMO Mode.

|            |                           |
|------------|---------------------------|
| Test Mode: | TX(5.1G) - 802.11ac-VHT40 |
|------------|---------------------------|

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5190 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4434.18   | 74.52         | -10.52         | 64.00       | 68.20    | -4.20  | Pk            |
| Vertical                           | 4434.18   | 59.29         | -10.52         | 48.77       | 54.00    | -5.23  | AV            |
| Vertical                           | 10380.07  | 60.81         | -0.70          | 60.11       | 68.20    | -8.09  | Pk            |
| Vertical                           | 10380.07  | 49.88         | -0.70          | 49.18       | 54.00    | -4.82  | AV            |
| Vertical                           | 15570.13  | 60.39         | 2.39           | 62.78       | 74.00    | -11.22 | Pk            |
| Vertical                           | 15570.13  | 49.20         | 2.39           | 51.59       | 54.00    | -2.41  | AV            |
| Horizontal                         | 4434.07   | 72.51         | -10.52         | 61.99       | 74.00    | -12.01 | Pk            |
| Horizontal                         | 4434.07   | 59.12         | -10.52         | 48.60       | 54.00    | -5.40  | AV            |
| Horizontal                         | 10380.19  | 62.04         | -0.70          | 61.34       | 68.20    | -6.86  | Pk            |
| Horizontal                         | 10380.19  | 49.85         | -0.70          | 49.15       | 54.00    | -4.85  | AV            |
| Horizontal                         | 15570.15  | 64.00         | 2.39           | 66.39       | 74.00    | -7.61  | Pk            |
| Horizontal                         | 15570.15  | 49.94         | 2.39           | 52.33       | 54.00    | -1.67  | AV            |
| middle Channel (5230 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4739.07   | 71.35         | -9.45          | 61.90       | 68.20    | -6.30  | Pk            |
| Vertical                           | 4739.07   | 59.91         | -9.45          | 50.46       | 54.00    | -3.54  | AV            |
| Vertical                           | 10460.14  | 60.66         | -0.65          | 60.01       | 68.20    | -8.19  | Pk            |
| Vertical                           | 10460.14  | 49.71         | -0.65          | 49.06       | 54.00    | -4.94  | AV            |
| Vertical                           | 15690.13  | 62.79         | 2.33           | 65.12       | 74.00    | -8.88  | Pk            |
| Vertical                           | 15690.13  | 49.19         | 2.33           | 51.52       | 54.00    | -2.48  | AV            |
| Horizontal                         | 4739.14   | 74.45         | -9.45          | 65.00       | 68.20    | -3.20  | Pk            |
| Horizontal                         | 4739.14   | 59.52         | -9.45          | 50.07       | 54.00    | -3.93  | AV            |
| Horizontal                         | 10460.05  | 60.64         | -0.65          | 59.99       | 68.20    | -8.21  | Pk            |
| Horizontal                         | 10460.05  | 49.17         | -0.65          | 48.52       | 54.00    | -5.48  | AV            |
| Horizontal                         | 15690.14  | 63.28         | 2.33           | 65.61       | 74.00    | -8.39  | Pk            |
| Horizontal                         | 15690.14  | 49.59         | 2.33           | 51.92       | 54.00    | -2.08  | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor – Limits

Test Mode is MIMO Mode.

|            |                           |
|------------|---------------------------|
| Test Mode: | TX(5.1G) - 802.11ac-VHT80 |
|------------|---------------------------|

| Polar               | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over  | Detector Type |
|---------------------|-----------|---------------|----------------|-------------|----------|-------|---------------|
| (H/V)               | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)  |               |
| (5210 MHz)-Above 1G |           |               |                |             |          |       |               |
| Vertical            | 4434.07   | 71.23         | -10.51         | 60.72       | 68.20    | -7.48 | Pk            |
| Vertical            | 4434.07   | 59.86         | -10.51         | 49.35       | 54.00    | -4.65 | AV            |
| Vertical            | 10420.03  | 61.73         | -0.66          | 61.07       | 68.20    | -7.13 | Pk            |
| Vertical            | 10420.03  | 49.88         | -0.66          | 49.22       | 54.00    | -4.78 | AV            |
| Vertical            | 15630.14  | 64.67         | 2.55           | 67.22       | 74.00    | -6.78 | Pk            |
| Vertical            | 15630.14  | 49.94         | 2.55           | 52.49       | 54.00    | -1.51 | AV            |
| Horizontal          | 4434.15   | 72.02         | -10.51         | 61.51       | 68.20    | -6.69 | Pk            |
| Horizontal          | 4434.15   | 59.48         | -10.51         | 48.97       | 54.00    | -5.03 | AV            |
| Horizontal          | 10420.18  | 63.97         | -0.66          | 63.31       | 68.20    | -4.89 | Pk            |
| Horizontal          | 10420.18  | 49.89         | -0.66          | 49.23       | 54.00    | -4.77 | AV            |
| Horizontal          | 15630.04  | 62.30         | 2.55           | 64.85       | 74.00    | -9.15 | Pk            |
| Horizontal          | 15630.04  | 49.12         | 2.55           | 51.67       | 54.00    | -2.33 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor – Limits

Test Mode is MIMO Mode.

Test Mode is MIMO Mode.

|            |                           |
|------------|---------------------------|
| Test Mode: | TX(5.1G) - 802.11ax- HE20 |
|------------|---------------------------|

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5180 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4434.18   | 71.54         | -10.51         | 61.03       | 68.20    | -7.17  | Pk            |
| Vertical                           | 4434.18   | 59.75         | -10.51         | 49.24       | 54.00    | -4.76  | AV            |
| Vertical                           | 10360.02  | 60.30         | -0.72          | 59.58       | 68.20    | -8.62  | Pk            |
| Vertical                           | 10360.02  | 49.41         | -0.72          | 48.69       | 54.00    | -5.31  | AV            |
| Vertical                           | 15540.11  | 64.24         | 2.59           | 66.83       | 74.00    | -7.17  | Pk            |
| Vertical                           | 15540.11  | 49.09         | 2.59           | 51.68       | 54.00    | -2.32  | AV            |
| Horizontal                         | 4434.01   | 71.90         | -10.51         | 61.39       | 68.20    | -6.81  | Pk            |
| Horizontal                         | 4434.01   | 59.21         | -10.51         | 48.70       | 54.00    | -5.30  | AV            |
| Horizontal                         | 10360.06  | 60.35         | -0.72          | 59.63       | 68.20    | -8.57  | Pk            |
| Horizontal                         | 10360.06  | 49.69         | -0.72          | 48.97       | 54.00    | -5.03  | AV            |
| Horizontal                         | 15540.02  | 60.13         | 2.59           | 62.72       | 74.00    | -11.28 | Pk            |
| Horizontal                         | 15540.02  | 49.31         | 2.59           | 51.90       | 54.00    | -2.10  | AV            |
| middle Channel (5200 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4592.18   | 71.31         | -10.20         | 61.11       | 74.00    | -12.89 | Pk            |
| Vertical                           | 4592.18   | 59.94         | -10.20         | 49.74       | 54.00    | -4.26  | AV            |
| Vertical                           | 10400.12  | 62.45         | -0.67          | 61.78       | 68.20    | -6.42  | Pk            |
| Vertical                           | 10400.12  | 49.56         | -0.67          | 48.89       | 54.00    | -5.11  | AV            |
| Vertical                           | 15600.18  | 62.86         | 2.67           | 65.53       | 74.00    | -8.47  | Pk            |
| Vertical                           | 15600.18  | 49.11         | 2.67           | 51.78       | 54.00    | -2.22  | AV            |
| Horizontal                         | 4592.04   | 71.24         | -10.20         | 61.04       | 74.00    | -12.96 | Pk            |
| Horizontal                         | 4592.04   | 59.37         | -10.20         | 49.17       | 54.00    | -4.83  | AV            |
| Horizontal                         | 10400.00  | 61.16         | -0.67          | 60.49       | 68.20    | -7.71  | Pk            |
| Horizontal                         | 10400.00  | 49.67         | -0.67          | 49.00       | 54.00    | -5.00  | AV            |
| Horizontal                         | 15600.02  | 64.80         | 2.67           | 67.47       | 74.00    | -6.53  | Pk            |
| Horizontal                         | 15600.02  | 49.10         | 2.67           | 51.77       | 54.00    | -2.23  | AV            |
| High Channel (5240 MHz)-Above 1G   |           |               |                |             |          |        |               |
| Vertical                           | 4739.02   | 74.63         | -9.45          | 65.18       | 74.00    | -8.82  | Pk            |
| Vertical                           | 4739.02   | 59.13         | -9.45          | 49.68       | 54.00    | -4.32  | AV            |
| Vertical                           | 10480.01  | 60.34         | -0.64          | 59.70       | 68.20    | -8.50  | Pk            |
| Vertical                           | 10480.01  | 49.73         | -0.64          | 49.09       | 54.00    | -4.91  | AV            |
| Vertical                           | 15720.01  | 62.46         | 2.33           | 64.79       | 74.00    | -9.21  | Pk            |
| Vertical                           | 15720.01  | 49.71         | 2.33           | 52.04       | 54.00    | -1.96  | AV            |
| Horizontal                         | 4739.07   | 72.87         | -9.45          | 63.42       | 74.00    | -10.58 | Pk            |
| Horizontal                         | 4739.07   | 59.72         | -9.45          | 50.27       | 54.00    | -3.73  | AV            |
| Horizontal                         | 10480.11  | 61.97         | -0.64          | 61.33       | 68.20    | -6.87  | Pk            |
| Horizontal                         | 10480.11  | 49.88         | -0.64          | 49.24       | 54.00    | -4.76  | AV            |
| Horizontal                         | 15720.06  | 62.53         | 2.33           | 64.86       | 74.00    | -9.14  | Pk            |
| Horizontal                         | 15720.06  | 49.06         | 2.33           | 51.39       | 54.00    | -2.61  | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor – Limits

|            |                            |
|------------|----------------------------|
| Test Mode: | TX(5.1G) - 802.11 ax- HE40 |
|------------|----------------------------|

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5190 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4434.14   | 74.65         | -10.52         | 64.13       | 68.20    | -4.07  | Pk            |
| Vertical                           | 4434.14   | 59.64         | -10.52         | 49.12       | 54.00    | -4.88  | AV            |
| Vertical                           | 10380.18  | 60.14         | -0.70          | 59.44       | 68.20    | -8.76  | Pk            |
| Vertical                           | 10380.18  | 49.51         | -0.70          | 48.81       | 54.00    | -5.19  | AV            |
| Vertical                           | 15570.14  | 60.99         | 2.39           | 63.38       | 74.00    | -10.62 | Pk            |
| Vertical                           | 15570.14  | 49.18         | 2.39           | 51.57       | 54.00    | -2.43  | AV            |
| Horizontal                         | 4434.09   | 73.54         | -10.52         | 63.02       | 74.00    | -10.98 | Pk            |
| Horizontal                         | 4434.09   | 59.33         | -10.52         | 48.81       | 54.00    | -5.19  | AV            |
| Horizontal                         | 10380.16  | 63.83         | -0.70          | 63.13       | 68.20    | -5.07  | Pk            |
| Horizontal                         | 10380.16  | 49.09         | -0.70          | 48.39       | 54.00    | -5.61  | AV            |
| Horizontal                         | 15570.03  | 63.56         | 2.39           | 65.95       | 74.00    | -8.05  | Pk            |
| Horizontal                         | 15570.03  | 49.37         | 2.39           | 51.76       | 54.00    | -2.24  | AV            |
| middle Channel (5230 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4739.04   | 72.25         | -9.45          | 62.80       | 68.20    | -5.40  | Pk            |
| Vertical                           | 4739.04   | 59.68         | -9.45          | 50.23       | 54.00    | -3.77  | AV            |
| Vertical                           | 10460.04  | 60.89         | -0.65          | 60.24       | 68.20    | -7.96  | Pk            |
| Vertical                           | 10460.04  | 49.86         | -0.65          | 49.21       | 54.00    | -4.79  | AV            |
| Vertical                           | 15690.09  | 62.84         | 2.33           | 65.17       | 74.00    | -8.83  | Pk            |
| Vertical                           | 15690.09  | 49.25         | 2.33           | 51.58       | 54.00    | -2.42  | AV            |
| Horizontal                         | 4739.16   | 70.93         | -9.45          | 61.48       | 68.20    | -6.72  | Pk            |
| Horizontal                         | 4739.16   | 59.34         | -9.45          | 49.89       | 54.00    | -4.11  | AV            |
| Horizontal                         | 10460.04  | 63.87         | -0.65          | 63.22       | 68.20    | -4.98  | Pk            |
| Horizontal                         | 10460.04  | 49.23         | -0.65          | 48.58       | 54.00    | -5.42  | AV            |
| Horizontal                         | 15690.11  | 61.08         | 2.33           | 63.41       | 74.00    | -10.59 | Pk            |
| Horizontal                         | 15690.11  | 49.73         | 2.33           | 52.06       | 54.00    | -1.94  | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor - Limits

Test Mode is MIMO Mode.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX(5.1G) - 802.11ax-HE80 |
|------------|--------------------------|

| Polar               | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over  | Detector Type |
|---------------------|-----------|---------------|----------------|-------------|----------|-------|---------------|
| (H/V)               | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)  |               |
| (5210 MHz)-Above 1G |           |               |                |             |          |       |               |
| Vertical            | 4434.19   | 73.58         | -10.51         | 63.07       | 68.20    | -5.13 | Pk            |
| Vertical            | 4434.19   | 59.97         | -10.51         | 49.46       | 54.00    | -4.54 | AV            |
| Vertical            | 10420.08  | 63.37         | -0.66          | 62.71       | 68.20    | -5.49 | Pk            |
| Vertical            | 10420.08  | 49.42         | -0.66          | 48.76       | 54.00    | -5.24 | AV            |
| Vertical            | 15630.12  | 61.53         | 2.55           | 64.08       | 74.00    | -9.92 | Pk            |
| Vertical            | 15630.12  | 49.62         | 2.55           | 52.17       | 54.00    | -1.83 | AV            |
| Horizontal          | 4434.14   | 73.31         | -10.51         | 62.80       | 68.20    | -5.40 | Pk            |
| Horizontal          | 4434.14   | 59.68         | -10.51         | 49.17       | 54.00    | -4.83 | AV            |
| Horizontal          | 10420.15  | 60.13         | -0.66          | 59.47       | 68.20    | -8.73 | Pk            |
| Horizontal          | 10420.15  | 49.27         | -0.66          | 48.61       | 54.00    | -5.39 | AV            |
| Horizontal          | 15630.09  | 64.31         | 2.55           | 66.86       | 74.00    | -7.14 | Pk            |
| Horizontal          | 15630.09  | 49.55         | 2.55           | 52.10       | 54.00    | -1.90 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor – Limits

Test Mode is MIMO Mode.

Test Mode is MIMO Mode.

|            |                            |
|------------|----------------------------|
| Test Mode: | TX(5.1G) - 802.11be- EHT20 |
|------------|----------------------------|

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5180 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4434.13   | 73.43         | -10.51         | 62.92       | 68.20    | -5.28  | Pk            |
| Vertical                           | 4434.13   | 59.05         | -10.51         | 48.54       | 54.00    | -5.46  | AV            |
| Vertical                           | 10360.15  | 63.94         | -0.72          | 63.22       | 68.20    | -4.98  | Pk            |
| Vertical                           | 10360.15  | 49.38         | -0.72          | 48.66       | 54.00    | -5.34  | AV            |
| Vertical                           | 15540.11  | 62.11         | 2.59           | 64.70       | 74.00    | -9.30  | Pk            |
| Vertical                           | 15540.11  | 49.12         | 2.59           | 51.71       | 54.00    | -2.29  | AV            |
| Horizontal                         | 4434.04   | 74.61         | -10.51         | 64.10       | 68.20    | -4.10  | Pk            |
| Horizontal                         | 4434.04   | 59.18         | -10.51         | 48.67       | 54.00    | -5.33  | AV            |
| Horizontal                         | 10360.12  | 63.35         | -0.72          | 62.63       | 68.20    | -5.57  | Pk            |
| Horizontal                         | 10360.12  | 49.65         | -0.72          | 48.93       | 54.00    | -5.07  | AV            |
| Horizontal                         | 15540.16  | 61.41         | 2.59           | 64.00       | 74.00    | -10.00 | Pk            |
| Horizontal                         | 15540.16  | 49.01         | 2.59           | 51.60       | 54.00    | -2.40  | AV            |
| middle Channel (5200 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4592.14   | 70.71         | -10.20         | 60.51       | 74.00    | -13.49 | Pk            |
| Vertical                           | 4592.14   | 59.59         | -10.20         | 49.39       | 54.00    | -4.61  | AV            |
| Vertical                           | 10400.16  | 61.70         | -0.67          | 61.03       | 68.20    | -7.17  | Pk            |
| Vertical                           | 10400.16  | 49.60         | -0.67          | 48.93       | 54.00    | -5.07  | AV            |
| Vertical                           | 15600.05  | 61.38         | 2.67           | 64.05       | 74.00    | -9.95  | Pk            |
| Vertical                           | 15600.05  | 49.79         | 2.67           | 52.46       | 54.00    | -1.54  | AV            |
| Horizontal                         | 4592.09   | 74.31         | -10.20         | 64.11       | 74.00    | -9.89  | Pk            |
| Horizontal                         | 4592.09   | 59.79         | -10.20         | 49.59       | 54.00    | -4.41  | AV            |
| Horizontal                         | 10400.06  | 62.53         | -0.67          | 61.86       | 68.20    | -6.34  | Pk            |
| Horizontal                         | 10400.06  | 49.93         | -0.67          | 49.26       | 54.00    | -4.74  | AV            |
| Horizontal                         | 15600.08  | 62.09         | 2.67           | 64.76       | 74.00    | -9.24  | Pk            |
| Horizontal                         | 15600.08  | 49.58         | 2.67           | 52.25       | 54.00    | -1.75  | AV            |
| High Channel (5240 MHz)-Above 1G   |           |               |                |             |          |        |               |
| Vertical                           | 4739.19   | 73.64         | -9.45          | 64.19       | 74.00    | -9.81  | Pk            |
| Vertical                           | 4739.19   | 59.22         | -9.45          | 49.77       | 54.00    | -4.23  | AV            |
| Vertical                           | 10480.19  | 62.16         | -0.64          | 61.52       | 68.20    | -6.68  | Pk            |
| Vertical                           | 10480.19  | 49.20         | -0.64          | 48.56       | 54.00    | -5.44  | AV            |
| Vertical                           | 15720.07  | 64.74         | 2.33           | 67.07       | 74.00    | -6.93  | Pk            |
| Vertical                           | 15720.07  | 49.45         | 2.33           | 51.78       | 54.00    | -2.22  | AV            |
| Horizontal                         | 4739.12   | 74.64         | -9.45          | 65.19       | 74.00    | -8.81  | Pk            |
| Horizontal                         | 4739.12   | 59.04         | -9.45          | 49.59       | 54.00    | -4.41  | AV            |
| Horizontal                         | 10480.03  | 63.03         | -0.64          | 62.39       | 68.20    | -5.81  | Pk            |
| Horizontal                         | 10480.03  | 49.24         | -0.64          | 48.60       | 54.00    | -5.40  | AV            |
| Horizontal                         | 15720.08  | 63.94         | 2.33           | 66.27       | 74.00    | -7.73  | Pk            |
| Horizontal                         | 15720.08  | 49.38         | 2.33           | 51.71       | 54.00    | -2.29  | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor - Limits

|            |                             |
|------------|-----------------------------|
| Test Mode: | TX(5.1G) - 802.11 be- EHT40 |
|------------|-----------------------------|

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5190 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4434.06   | 71.72         | -10.52         | 61.20       | 68.20    | -7.00  | Pk            |
| Vertical                           | 4434.06   | 59.22         | -10.52         | 48.70       | 54.00    | -5.30  | AV            |
| Vertical                           | 10380.01  | 63.67         | -0.70          | 62.97       | 68.20    | -5.23  | Pk            |
| Vertical                           | 10380.01  | 49.71         | -0.70          | 49.01       | 54.00    | -4.99  | AV            |
| Vertical                           | 15570.02  | 62.80         | 2.39           | 65.19       | 74.00    | -8.81  | Pk            |
| Vertical                           | 15570.02  | 49.64         | 2.39           | 52.03       | 54.00    | -1.97  | AV            |
| Horizontal                         | 4434.10   | 72.63         | -10.52         | 62.11       | 74.00    | -11.89 | Pk            |
| Horizontal                         | 4434.10   | 59.25         | -10.52         | 48.73       | 54.00    | -5.27  | AV            |
| Horizontal                         | 10380.04  | 63.01         | -0.70          | 62.31       | 68.20    | -5.89  | Pk            |
| Horizontal                         | 10380.04  | 49.11         | -0.70          | 48.41       | 54.00    | -5.59  | AV            |
| Horizontal                         | 15570.05  | 61.00         | 2.39           | 63.39       | 74.00    | -10.61 | Pk            |
| Horizontal                         | 15570.05  | 49.09         | 2.39           | 51.48       | 54.00    | -2.52  | AV            |
| middle Channel (5230 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4739.19   | 74.98         | -9.45          | 65.53       | 68.20    | -2.67  | Pk            |
| Vertical                           | 4739.19   | 59.58         | -9.45          | 50.13       | 54.00    | -3.87  | AV            |
| Vertical                           | 10460.15  | 60.21         | -0.65          | 59.56       | 68.20    | -8.64  | Pk            |
| Vertical                           | 10460.15  | 49.52         | -0.65          | 48.87       | 54.00    | -5.13  | AV            |
| Vertical                           | 15690.14  | 63.41         | 2.33           | 65.74       | 74.00    | -8.26  | Pk            |
| Vertical                           | 15690.14  | 49.68         | 2.33           | 52.01       | 54.00    | -1.99  | AV            |
| Horizontal                         | 4739.12   | 74.83         | -9.45          | 65.38       | 68.20    | -2.82  | Pk            |
| Horizontal                         | 4739.12   | 59.83         | -9.45          | 50.38       | 54.00    | -3.62  | AV            |
| Horizontal                         | 10460.07  | 64.62         | -0.65          | 63.97       | 68.20    | -4.23  | Pk            |
| Horizontal                         | 10460.07  | 49.18         | -0.65          | 48.53       | 54.00    | -5.47  | AV            |
| Horizontal                         | 15690.01  | 61.52         | 2.33           | 63.85       | 74.00    | -10.15 | Pk            |
| Horizontal                         | 15690.01  | 49.63         | 2.33           | 51.96       | 54.00    | -2.04  | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor - Limits

Test Mode is MIMO Mode.

|            |                           |
|------------|---------------------------|
| Test Mode: | TX(5.1G) - 802.11be-EHT80 |
|------------|---------------------------|

| Polar               | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over  | Detector Type |
|---------------------|-----------|---------------|----------------|-------------|----------|-------|---------------|
| (H/V)               | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)  |               |
| (5210 MHz)-Above 1G |           |               |                |             |          |       |               |
| Vertical            | 4434.02   | 73.50         | -10.51         | 62.99       | 68.20    | -5.21 | Pk            |
| Vertical            | 4434.02   | 59.03         | -10.51         | 48.52       | 54.00    | -5.48 | AV            |
| Vertical            | 10420.11  | 60.01         | -0.66          | 59.35       | 68.20    | -8.85 | Pk            |
| Vertical            | 10420.11  | 49.29         | -0.66          | 48.63       | 54.00    | -5.37 | AV            |
| Vertical            | 15630.13  | 64.13         | 2.55           | 66.68       | 74.00    | -7.32 | Pk            |
| Vertical            | 15630.13  | 49.84         | 2.55           | 52.39       | 54.00    | -1.61 | AV            |
| Horizontal          | 4434.02   | 74.13         | -10.51         | 63.62       | 68.20    | -4.58 | Pk            |
| Horizontal          | 4434.02   | 59.75         | -10.51         | 49.24       | 54.00    | -4.76 | AV            |
| Horizontal          | 10420.04  | 64.20         | -0.66          | 63.54       | 68.20    | -4.66 | Pk            |
| Horizontal          | 10420.04  | 49.13         | -0.66          | 48.47       | 54.00    | -5.53 | AV            |
| Horizontal          | 15630.05  | 64.04         | 2.55           | 66.59       | 74.00    | -7.41 | Pk            |
| Horizontal          | 15630.05  | 49.87         | 2.55           | 52.42       | 54.00    | -1.58 | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor – Limits

Test Mode is MIMO Mode.

- ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge
- All the modes have been tested, and the worst result was 802.11ax20 as recorded, as follows:


Test mode: 802.11ax20 MIMO Frequency(MHz): 5180

| Frequency (MHz) | Polarity | PK(dBuV/m) (VBW=3MHz) | Limit 3m (dBuV/m) | AV(dBuV/m) (VBW=10Hz) | Limit 3m (dBuV/m) |
|-----------------|----------|-----------------------|-------------------|-----------------------|-------------------|
| 5150            | H        | 49.68                 | 74                | 37.65                 | 54                |
| 5150            | V        | 49.75                 | 74                | 37.85                 | 54                |

Test mode: 802.11a20 Frequency(MHz): 5240

| Frequency (MHz) | Polarity | PK(dBuV/m) (VBW=3MHz) | Limit 3m (dBuV/m) | AV(dBuV/m) (VBW=10Hz) | Limit 3m (dBuV/m) |
|-----------------|----------|-----------------------|-------------------|-----------------------|-------------------|
| 5350            | H        | 48.65                 | 74                | 36.48                 | 54                |
| 5350            | V        | 47.48                 | 74                | 38.65                 | 54                |

**Note:** (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).  
(2) Emission Level= Reading Level+Correct Factor.  
(3) Correct Factor= Ant\_F + Cab\_L - Preamp

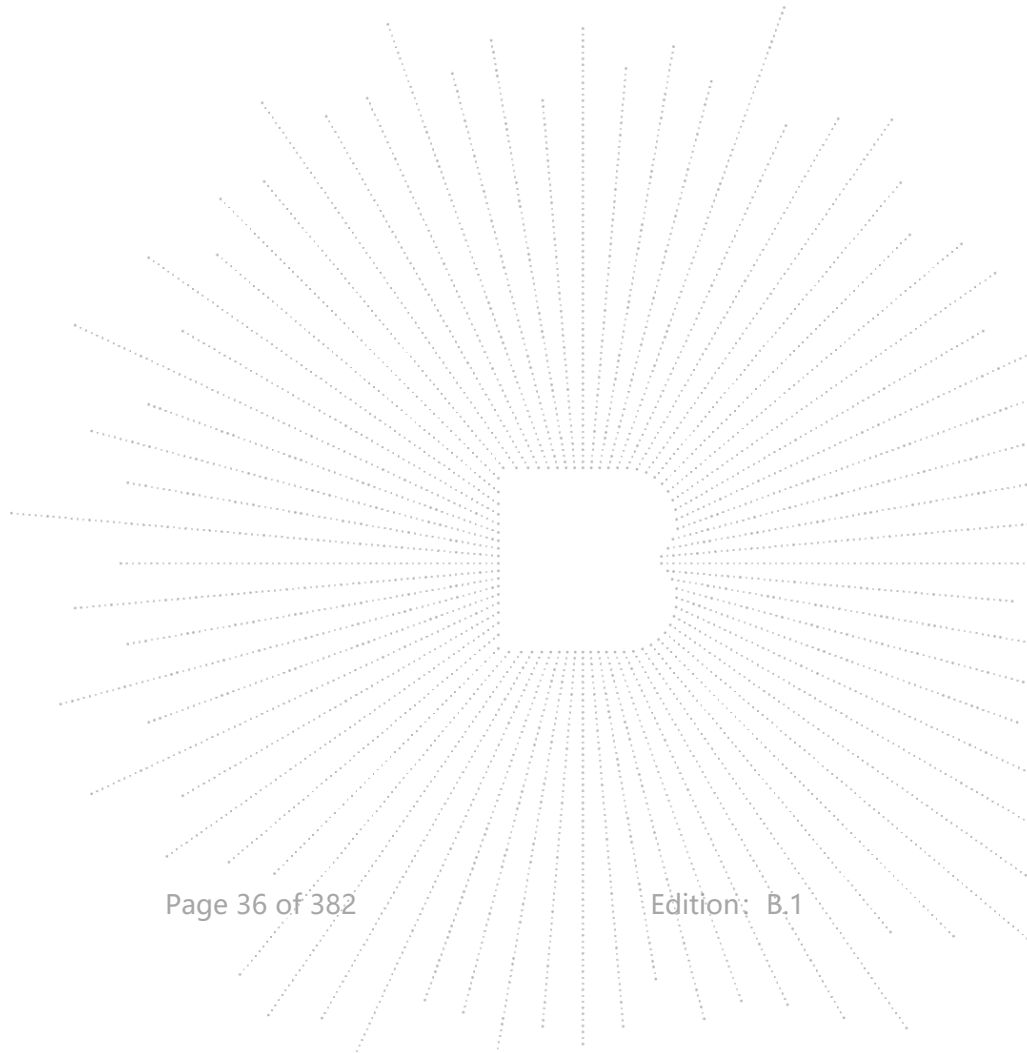

|            |                    |
|------------|--------------------|
| Test Mode: | TX(5.3G) - 802.11a |
|------------|--------------------|

| Polar                              | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|------------------------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)                              | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| Low Channel (5260 MHz)-Above 1G    |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4434.011       | 74.16            | -10.51            | 63.65            | 68.2     | -4.55  | PK               |
| Vertical                           | 4434.011       | 59.00            | -10.51            | 48.49            | 54       | -5.51  | AV               |
| Vertical                           | 10520.112      | 62.38            | -0.52             | 61.86            | 68.2     | -6.34  | PK               |
| Vertical                           | 10520.112      | 49.41            | -0.52             | 48.89            | 54       | -5.11  | AV               |
| Vertical                           | 15780.127      | 62.27            | 2.40              | 64.67            | 74       | -9.33  | PK               |
| Vertical                           | 15780.127      | 49.09            | 2.40              | 51.49            | 54       | -2.51  | AV               |
| Horizontal                         | 4434.034       | 73.91            | -10.51            | 63.40            | 68.2     | -4.80  | PK               |
| Horizontal                         | 4434.034       | 59.42            | -10.51            | 48.91            | 54       | -5.09  | AV               |
| Horizontal                         | 10520.012      | 61.95            | -0.52             | 61.43            | 68.2     | -6.77  | PK               |
| Horizontal                         | 10520.012      | 49.91            | -0.52             | 49.39            | 54       | -4.61  | AV               |
| Horizontal                         | 15780.059      | 60.61            | 2.40              | 63.01            | 74       | -10.99 | PK               |
| Horizontal                         | 15780.059      | 49.13            | 2.40              | 51.53            | 54       | -2.47  | AV               |
| middle Channel (5280 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4592.008       | 72.73            | -10.20            | 62.53            | 74       | -11.47 | PK               |
| Vertical                           | 4592.008       | 59.65            | -10.20            | 49.45            | 54       | -4.55  | AV               |
| Vertical                           | 10560.138      | 64.59            | -0.31             | 64.28            | 68.2     | -3.92  | PK               |
| Vertical                           | 10560.138      | 49.28            | -0.31             | 48.97            | 54       | -5.03  | AV               |
| Vertical                           | 15840.095      | 62.51            | 2.16              | 64.67            | 74       | -9.33  | PK               |
| Vertical                           | 15840.095      | 49.69            | 2.16              | 51.85            | 54       | -2.15  | AV               |
| Horizontal                         | 4592.039       | 70.36            | -10.20            | 60.16            | 74       | -13.84 | PK               |
| Horizontal                         | 4592.039       | 59.19            | -10.20            | 48.99            | 54       | -5.01  | AV               |
| Horizontal                         | 10560.035      | 61.71            | -0.31             | 61.40            | 68.2     | -6.80  | PK               |
| Horizontal                         | 10560.035      | 49.67            | -0.31             | 49.36            | 54       | -4.64  | AV               |
| Horizontal                         | 15840.118      | 64.61            | 2.16              | 66.77            | 74       | -7.23  | PK               |
| Horizontal                         | 15840.118      | 49.48            | 2.16              | 51.64            | 54       | -2.36  | AV               |
| High Channel (5320 MHz)-Above 1G   |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4739.115       | 74.07            | -9.45             | 64.62            | 74       | -9.38  | PK               |
| Vertical                           | 4739.115       | 59.17            | -9.45             | 49.72            | 54       | -4.28  | AV               |
| Vertical                           | 10640.110      | 63.81            | 0.00              | 63.81            | 68.2     | -4.39  | PK               |
| Vertical                           | 10640.110      | 49.91            | 0.00              | 49.91            | 54       | -4.09  | AV               |
| Vertical                           | 15960.116      | 62.09            | 2.02              | 64.11            | 74       | -9.89  | PK               |
| Vertical                           | 15960.116      | 49.90            | 2.02              | 51.92            | 54       | -2.08  | AV               |
| Horizontal                         | 4739.102       | 72.77            | -9.45             | 63.32            | 74       | -10.68 | PK               |
| Horizontal                         | 4739.102       | 59.14            | -9.45             | 49.69            | 54       | -4.31  | AV               |
| Horizontal                         | 10640.154      | 63.79            | 0.00              | 63.79            | 68.2     | -4.41  | PK               |
| Horizontal                         | 10640.154      | 49.16            | 0.00              | 49.16            | 54       | -4.84  | AV               |
| Horizontal                         | 15960.199      | 61.98            | 2.02              | 64.00            | 74       | -10.00 | PK               |
| Horizontal                         | 15960.199      | 49.09            | 2.02              | 51.11            | 54       | -2.89  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor – Limits

The worst case is Antenna A

|            |                         |
|------------|-------------------------|
| Test Mode: | TX(5.3G) - 802.11n-HT20 |
|------------|-------------------------|

| Polar                              | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|------------------------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)                              | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| Low Channel (5260 MHz)-Above 1G    |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4434.113       | 72.81            | -10.51            | 62.30            | 68.2     | -5.90  | PK               |
| Vertical                           | 4434.113       | 59.42            | -10.51            | 48.91            | 54       | -5.09  | AV               |
| Vertical                           | 10520.168      | 61.62            | -0.52             | 61.10            | 68.2     | -7.10  | PK               |
| Vertical                           | 10520.168      | 49.30            | -0.52             | 48.78            | 54       | -5.22  | AV               |
| Vertical                           | 15780.136      | 62.22            | 2.40              | 64.62            | 74       | -9.38  | PK               |
| Vertical                           | 15780.136      | 49.85            | 2.40              | 52.25            | 54       | -1.75  | AV               |
| Horizontal                         | 4434.164       | 71.15            | -10.51            | 60.64            | 68.2     | -7.56  | PK               |
| Horizontal                         | 4434.164       | 59.59            | -10.51            | 49.08            | 54       | -4.92  | AV               |
| Horizontal                         | 10520.030      | 61.38            | -0.52             | 60.86            | 68.2     | -7.34  | PK               |
| Horizontal                         | 10520.030      | 49.38            | -0.52             | 48.86            | 54       | -5.14  | AV               |
| Horizontal                         | 15780.198      | 60.52            | 2.40              | 62.92            | 74       | -11.08 | PK               |
| Horizontal                         | 15780.198      | 49.17            | 2.40              | 51.57            | 54       | -2.43  | AV               |
| middle Channel (5280 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4592.048       | 70.08            | -10.20            | 59.88            | 74       | -14.12 | PK               |
| Vertical                           | 4592.048       | 59.45            | -10.20            | 49.25            | 54       | -4.75  | AV               |
| Vertical                           | 10560.012      | 60.49            | -0.31             | 60.18            | 68.2     | -8.02  | PK               |
| Vertical                           | 10560.012      | 49.76            | -0.31             | 49.45            | 54       | -4.55  | AV               |
| Vertical                           | 15840.175      | 63.23            | 2.16              | 65.39            | 74       | -8.61  | PK               |
| Vertical                           | 15840.175      | 49.90            | 2.16              | 52.06            | 54       | -1.94  | AV               |
| Horizontal                         | 4592.082       | 73.69            | -10.20            | 63.49            | 74       | -10.51 | PK               |
| Horizontal                         | 4592.082       | 59.56            | -10.20            | 49.36            | 54       | -4.64  | AV               |
| Horizontal                         | 10560.061      | 62.24            | -0.31             | 61.93            | 68.2     | -6.27  | PK               |
| Horizontal                         | 10560.061      | 49.55            | -0.31             | 49.24            | 54       | -4.76  | AV               |
| Horizontal                         | 15840.115      | 64.21            | 2.16              | 66.37            | 74       | -7.63  | PK               |
| Horizontal                         | 15840.115      | 49.45            | 2.16              | 51.61            | 54       | -2.39  | AV               |
| High Channel (5320 MHz)-Above 1G   |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4739.059       | 73.75            | -9.45             | 64.30            | 74       | -9.70  | PK               |
| Vertical                           | 4739.059       | 59.34            | -9.45             | 49.89            | 54       | -4.11  | AV               |
| Vertical                           | 10640.193      | 61.75            | 0.00              | 61.75            | 68.2     | -6.45  | PK               |
| Vertical                           | 10640.193      | 49.90            | 0.00              | 49.90            | 54       | -4.10  | AV               |
| Vertical                           | 15960.101      | 64.44            | 2.02              | 66.46            | 74       | -7.54  | PK               |
| Vertical                           | 15960.101      | 49.89            | 2.02              | 51.91            | 54       | -2.09  | AV               |
| Horizontal                         | 4739.001       | 70.11            | -9.45             | 60.66            | 74       | -13.34 | PK               |
| Horizontal                         | 4739.001       | 59.84            | -9.45             | 50.39            | 54       | -3.61  | AV               |
| Horizontal                         | 10640.019      | 62.22            | 0.00              | 62.22            | 68.2     | -5.98  | PK               |
| Horizontal                         | 10640.019      | 49.94            | 0.00              | 49.94            | 54       | -4.06  | AV               |
| Horizontal                         | 15960.029      | 63.89            | 2.02              | 65.91            | 74       | -8.09  | PK               |
| Horizontal                         | 15960.029      | 49.91            | 2.02              | 51.93            | 54       | -2.07  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor - Limits

Test Mode is MIMO Mode.

|            |                         |
|------------|-------------------------|
| Test Mode: | TX(5.3G) - 802.11n-HT40 |
|------------|-------------------------|

| Polar<br>(H/V)                   | Fre-<br>quency<br>(MHz) | Reading<br>Level<br>(dBuV/m) | Correct<br>Factor<br>(dB) | Measure-<br>ment<br>(dBuV/m) | Limits<br>(dBuV/m) | Over<br>(dB) | Detector<br>Type |
|----------------------------------|-------------------------|------------------------------|---------------------------|------------------------------|--------------------|--------------|------------------|
| Low Channel (5270 MHz)-Above 1G  |                         |                              |                           |                              |                    |              |                  |
| Vertical                         | 4434.174                | 70.79                        | -10.51                    | 60.28                        | 68.2               | -7.92        | PK               |
| Vertical                         | 4434.174                | 59.99                        | -10.51                    | 49.48                        | 54                 | -4.52        | AV               |
| Vertical                         | 10540.175               | 60.48                        | -0.41                     | 60.07                        | 68.2               | -8.13        | PK               |
| Vertical                         | 10540.175               | 49.86                        | -0.41                     | 49.45                        | 54                 | -4.55        | AV               |
| Vertical                         | 15810.003               | 63.14                        | 2.36                      | 65.50                        | 74                 | -8.50        | PK               |
| Vertical                         | 15810.003               | 49.68                        | 2.36                      | 52.04                        | 54                 | -1.96        | AV               |
| Horizontal                       | 4434.157                | 73.03                        | -10.51                    | 62.52                        | 74                 | -11.48       | PK               |
| Horizontal                       | 4434.157                | 59.21                        | -10.51                    | 48.70                        | 54                 | -5.30        | AV               |
| Horizontal                       | 10540.073               | 62.69                        | -0.41                     | 62.28                        | 68.2               | -5.92        | PK               |
| Horizontal                       | 10540.073               | 49.17                        | -0.41                     | 48.76                        | 54                 | -5.24        | AV               |
| Horizontal                       | 15810.130               | 63.54                        | 2.36                      | 65.90                        | 74                 | -8.10        | PK               |
| Horizontal                       | 15810.130               | 49.39                        | 2.36                      | 51.75                        | 54                 | -2.25        | AV               |
| High Channel (5310 MHz)-Above 1G |                         |                              |                           |                              |                    |              |                  |
| Vertical                         | 4739.134                | 70.30                        | -9.45                     | 60.85                        | 68.2               | -7.35        | PK               |
| Vertical                         | 4739.134                | 59.54                        | -9.45                     | 50.09                        | 54                 | -3.91        | AV               |
| Vertical                         | 10620.159               | 64.14                        | -0.04                     | 64.10                        | 68.2               | -4.10        | PK               |
| Vertical                         | 10620.159               | 49.73                        | -0.04                     | 49.69                        | 54                 | -4.31        | AV               |
| Vertical                         | 15930.115               | 61.63                        | 1.88                      | 63.51                        | 74                 | -10.49       | PK               |
| Vertical                         | 15930.115               | 49.16                        | 1.88                      | 51.04                        | 54                 | -2.96        | AV               |
| Horizontal                       | 4739.015                | 70.95                        | -9.45                     | 61.50                        | 68.2               | -6.70        | PK               |
| Horizontal                       | 4739.015                | 59.37                        | -9.45                     | 49.92                        | 54                 | -4.08        | AV               |
| Horizontal                       | 10620.144               | 60.86                        | -0.04                     | 60.82                        | 68.2               | -7.38        | PK               |
| Horizontal                       | 10620.144               | 49.31                        | -0.04                     | 49.27                        | 54                 | -4.73        | AV               |
| Horizontal                       | 15930.189               | 63.59                        | 1.88                      | 65.47                        | 74                 | -8.53        | PK               |
| Horizontal                       | 15930.189               | 49.50                        | 1.88                      | 51.38                        | 54                 | -2.62        | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.  
The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
Emission level (dBuV/m) = 20 log Emission level (uV/m).  
Correct Factor =Antenna Factor + Cable Loss - Preamp Factor  
Over = Reading Level + Correct Factor - Limits  
Test Mode is MIMO Mode.

|            |                           |
|------------|---------------------------|
| Test Mode: | TX(5.3G) - 802.11ac-VHT20 |
|------------|---------------------------|

| Polar                              | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|------------------------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)                              | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| Low Channel (5260 MHz)-Above 1G    |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4434.030       | 70.45            | -10.51            | 59.94            | 68.2     | -8.26  | PK               |
| Vertical                           | 4434.030       | 59.12            | -10.51            | 48.61            | 54       | -5.39  | AV               |
| Vertical                           | 10520.123      | 64.39            | -0.52             | 63.87            | 68.2     | -4.33  | PK               |
| Vertical                           | 10520.123      | 49.15            | -0.52             | 48.63            | 54       | -5.37  | AV               |
| Vertical                           | 15780.050      | 64.39            | 2.40              | 66.79            | 74       | -7.21  | PK               |
| Vertical                           | 15780.050      | 49.83            | 2.40              | 52.23            | 54       | -1.77  | AV               |
| Horizontal                         | 4434.132       | 71.07            | -10.51            | 60.56            | 68.2     | -7.64  | PK               |
| Horizontal                         | 4434.132       | 59.09            | -10.51            | 48.58            | 54       | -5.42  | AV               |
| Horizontal                         | 10520.030      | 63.17            | -0.52             | 62.65            | 68.2     | -5.55  | PK               |
| Horizontal                         | 10520.030      | 49.20            | -0.52             | 48.68            | 54       | -5.32  | AV               |
| Horizontal                         | 15780.101      | 62.04            | 2.40              | 64.44            | 74       | -9.56  | PK               |
| Horizontal                         | 15780.101      | 49.12            | 2.40              | 51.52            | 54       | -2.48  | AV               |
| middle Channel (5280 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4592.131       | 74.05            | -10.20            | 63.85            | 74       | -10.15 | PK               |
| Vertical                           | 4592.131       | 59.28            | -10.20            | 49.08            | 54       | -4.92  | AV               |
| Vertical                           | 10560.089      | 62.90            | -0.31             | 62.59            | 68.2     | -5.61  | PK               |
| Vertical                           | 10560.089      | 49.20            | -0.31             | 48.89            | 54       | -5.11  | AV               |
| Vertical                           | 15840.128      | 63.43            | 2.16              | 65.59            | 74       | -8.41  | PK               |
| Vertical                           | 15840.128      | 49.94            | 2.16              | 52.10            | 54       | -1.90  | AV               |
| Horizontal                         | 4592.104       | 73.63            | -10.20            | 63.43            | 74       | -10.57 | PK               |
| Horizontal                         | 4592.104       | 59.29            | -10.20            | 49.09            | 54       | -4.91  | AV               |
| Horizontal                         | 10560.053      | 62.01            | -0.31             | 61.70            | 68.2     | -6.50  | PK               |
| Horizontal                         | 10560.053      | 49.76            | -0.31             | 49.45            | 54       | -4.55  | AV               |
| Horizontal                         | 15840.101      | 61.41            | 2.16              | 63.57            | 74       | -10.43 | PK               |
| Horizontal                         | 15840.101      | 49.06            | 2.16              | 51.22            | 54       | -2.78  | AV               |
| High Channel (5320 MHz)-Above 1G   |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4739.191       | 72.15            | -9.45             | 62.70            | 74       | -11.30 | PK               |
| Vertical                           | 4739.191       | 59.12            | -9.45             | 49.67            | 54       | -4.33  | AV               |
| Vertical                           | 10640.199      | 62.60            | 0.00              | 62.60            | 68.2     | -5.60  | PK               |
| Vertical                           | 10640.199      | 49.61            | 0.00              | 49.61            | 54       | -4.39  | AV               |
| Vertical                           | 15960.026      | 61.64            | 2.02              | 63.66            | 74       | -10.34 | PK               |
| Vertical                           | 15960.026      | 49.13            | 2.02              | 51.15            | 54       | -2.85  | AV               |
| Horizontal                         | 4739.085       | 73.88            | -9.45             | 64.43            | 74       | -9.57  | PK               |
| Horizontal                         | 4739.085       | 59.59            | -9.45             | 50.14            | 54       | -3.86  | AV               |
| Horizontal                         | 10640.144      | 63.49            | 0.00              | 63.49            | 68.2     | -4.71  | PK               |
| Horizontal                         | 10640.144      | 49.11            | 0.00              | 49.11            | 54       | -4.89  | AV               |
| Horizontal                         | 15960.097      | 62.57            | 2.02              | 64.59            | 74       | -9.41  | PK               |
| Horizontal                         | 15960.097      | 49.53            | 2.02              | 51.55            | 54       | -2.45  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor - Limits

Test Mode is MIMO Mode.

|            |                           |
|------------|---------------------------|
| Test Mode: | TX(5.3G) - 802.11ac-VHT40 |
|------------|---------------------------|

| Polar<br>(H/V)                   | Fre-<br>quency<br>(MHz) | Reading<br>Level<br>(dBuV/m) | Correct<br>Factor<br>(dB) | Measure-<br>ment<br>(dBuV/m) | Limits<br>(dBuV/m) | Over<br>(dB) | Detector<br>Type |
|----------------------------------|-------------------------|------------------------------|---------------------------|------------------------------|--------------------|--------------|------------------|
| Low Channel (5270 MHz)-Above 1G  |                         |                              |                           |                              |                    |              |                  |
| Vertical                         | 4434.047                | 70.93                        | -10.51                    | 60.42                        | 68.2               | -7.78        | PK               |
| Vertical                         | 4434.047                | 59.49                        | -10.51                    | 48.98                        | 54                 | -5.02        | AV               |
| Vertical                         | 10540.111               | 60.20                        | -0.41                     | 59.79                        | 68.2               | -8.41        | PK               |
| Vertical                         | 10540.111               | 49.88                        | -0.41                     | 49.47                        | 54                 | -4.53        | AV               |
| Vertical                         | 15810.070               | 63.90                        | 2.36                      | 66.26                        | 74                 | -7.74        | PK               |
| Vertical                         | 15810.070               | 49.13                        | 2.36                      | 51.49                        | 54                 | -2.51        | AV               |
| Horizontal                       | 4434.033                | 70.46                        | -10.51                    | 59.95                        | 74                 | -14.05       | PK               |
| Horizontal                       | 4434.033                | 59.87                        | -10.51                    | 49.36                        | 54                 | -4.64        | AV               |
| Horizontal                       | 10540.148               | 64.87                        | -0.41                     | 64.46                        | 68.2               | -3.74        | PK               |
| Horizontal                       | 10540.148               | 49.91                        | -0.41                     | 49.50                        | 54                 | -4.50        | AV               |
| Horizontal                       | 15810.018               | 62.01                        | 2.36                      | 64.37                        | 74                 | -9.63        | PK               |
| Horizontal                       | 15810.018               | 49.41                        | 2.36                      | 51.77                        | 54                 | -2.23        | AV               |
| High Channel (5310 MHz)-Above 1G |                         |                              |                           |                              |                    |              |                  |
| Vertical                         | 4739.092                | 74.70                        | -9.45                     | 65.25                        | 68.2               | -2.95        | PK               |
| Vertical                         | 4739.092                | 59.84                        | -9.45                     | 50.39                        | 54                 | -3.61        | AV               |
| Vertical                         | 10620.041               | 63.13                        | -0.04                     | 63.09                        | 68.2               | -5.11        | PK               |
| Vertical                         | 10620.041               | 49.88                        | -0.04                     | 49.84                        | 54                 | -4.16        | AV               |
| Vertical                         | 15930.018               | 60.13                        | 1.88                      | 62.01                        | 74                 | -11.99       | PK               |
| Vertical                         | 15930.018               | 49.33                        | 1.88                      | 51.21                        | 54                 | -2.79        | AV               |
| Horizontal                       | 4739.182                | 74.49                        | -9.45                     | 65.04                        | 68.2               | -3.16        | PK               |
| Horizontal                       | 4739.182                | 59.89                        | -9.45                     | 50.44                        | 54                 | -3.56        | AV               |
| Horizontal                       | 10620.075               | 61.84                        | -0.04                     | 61.80                        | 68.2               | -6.40        | PK               |
| Horizontal                       | 10620.075               | 49.37                        | -0.04                     | 49.33                        | 54                 | -4.67        | AV               |
| Horizontal                       | 15930.166               | 64.21                        | 1.88                      | 66.09                        | 74                 | -7.91        | PK               |
| Horizontal                       | 15930.166               | 49.25                        | 1.88                      | 51.13                        | 54                 | -2.87        | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor - Limits

Test Mode is MIMO Mode.

|            |                           |
|------------|---------------------------|
| Test Mode: | TX(5.3G) - 802.11ac-VHT80 |
|------------|---------------------------|

| Polar               | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|---------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)               | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| (5290 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical            | 4434.189       | 73.41            | -10.51            | 62.90            | 68.2     | -5.30  | PK               |
| Vertical            | 4434.189       | 59.00            | -10.51            | 48.49            | 54       | -5.51  | AV               |
| Vertical            | 10580.114      | 60.99            | -0.20             | 60.79            | 68.2     | -7.41  | PK               |
| Vertical            | 10580.114      | 49.23            | -0.20             | 49.03            | 54       | -4.97  | AV               |
| Vertical            | 15870.024      | 64.30            | 1.96              | 66.26            | 74       | -7.74  | PK               |
| Vertical            | 15870.024      | 49.97            | 1.96              | 51.93            | 54       | -2.07  | AV               |
| Horizontal          | 4434.169       | 71.28            | -10.51            | 60.77            | 68.2     | -7.43  | PK               |
| Horizontal          | 4434.169       | 59.98            | -10.51            | 49.47            | 54       | -4.53  | AV               |
| Horizontal          | 10580.057      | 62.04            | -0.20             | 61.84            | 68.2     | -6.36  | PK               |
| Horizontal          | 10580.057      | 49.69            | -0.20             | 49.49            | 54       | -4.51  | AV               |
| Horizontal          | 15870.019      | 61.30            | 1.96              | 63.26            | 74       | -10.74 | PK               |
| Horizontal          | 15870.019      | 49.67            | 1.96              | 51.63            | 54       | -2.37  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor - Limits

Test Mode is MIMO Mode.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX(5.3G) - 802.11ax-HE20 |
|------------|--------------------------|

| Polar                              | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|------------------------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)                              | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| Low Channel (5260 MHz)-Above 1G    |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4434.019       | 73.66            | -10.51            | 63.15            | 68.2     | -5.05  | PK               |
| Vertical                           | 4434.019       | 59.06            | -10.51            | 48.55            | 54       | -5.45  | AV               |
| Vertical                           | 10520.167      | 62.68            | -0.52             | 62.16            | 68.2     | -6.04  | PK               |
| Vertical                           | 10520.167      | 49.74            | -0.52             | 49.22            | 54       | -4.78  | AV               |
| Vertical                           | 15780.121      | 64.76            | 2.40              | 67.16            | 74       | -6.84  | PK               |
| Vertical                           | 15780.121      | 49.93            | 2.40              | 52.33            | 54       | -1.67  | AV               |
| Horizontal                         | 4434.147       | 70.26            | -10.51            | 59.75            | 68.2     | -8.45  | PK               |
| Horizontal                         | 4434.147       | 59.99            | -10.51            | 49.48            | 54       | -4.52  | AV               |
| Horizontal                         | 10520.159      | 63.17            | -0.52             | 62.65            | 68.2     | -5.55  | PK               |
| Horizontal                         | 10520.159      | 49.50            | -0.52             | 48.98            | 54       | -5.02  | AV               |
| Horizontal                         | 15780.163      | 62.63            | 2.40              | 65.03            | 74       | -8.97  | PK               |
| Horizontal                         | 15780.163      | 49.97            | 2.40              | 52.37            | 54       | -1.63  | AV               |
| middle Channel (5280 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4592.003       | 74.71            | -10.20            | 64.51            | 74       | -9.49  | PK               |
| Vertical                           | 4592.003       | 59.59            | -10.20            | 49.39            | 54       | -4.61  | AV               |
| Vertical                           | 10560.026      | 60.09            | -0.31             | 59.78            | 68.2     | -8.42  | PK               |
| Vertical                           | 10560.026      | 49.02            | -0.31             | 48.71            | 54       | -5.29  | AV               |
| Vertical                           | 15840.028      | 64.56            | 2.16              | 66.72            | 74       | -7.28  | PK               |
| Vertical                           | 15840.028      | 49.17            | 2.16              | 51.33            | 54       | -2.67  | AV               |
| Horizontal                         | 4592.035       | 71.20            | -10.20            | 61.00            | 74       | -13.00 | PK               |
| Horizontal                         | 4592.035       | 59.30            | -10.20            | 49.10            | 54       | -4.90  | AV               |
| Horizontal                         | 10560.116      | 64.88            | -0.31             | 64.57            | 68.2     | -3.63  | PK               |
| Horizontal                         | 10560.116      | 49.39            | -0.31             | 49.08            | 54       | -4.92  | AV               |
| Horizontal                         | 15840.095      | 64.20            | 2.16              | 66.36            | 74       | -7.64  | PK               |
| Horizontal                         | 15840.095      | 49.19            | 2.16              | 51.35            | 54       | -2.65  | AV               |
| High Channel (5320 MHz)-Above 1G   |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4739.086       | 74.96            | -9.45             | 65.51            | 74       | -8.49  | PK               |
| Vertical                           | 4739.086       | 59.16            | -9.45             | 49.71            | 54       | -4.29  | AV               |
| Vertical                           | 10640.094      | 64.06            | 0.00              | 64.06            | 68.2     | -4.14  | PK               |
| Vertical                           | 10640.094      | 49.18            | 0.00              | 49.18            | 54       | -4.82  | AV               |
| Vertical                           | 15960.161      | 63.31            | 2.02              | 65.33            | 74       | -8.67  | PK               |
| Vertical                           | 15960.161      | 49.56            | 2.02              | 51.58            | 54       | -2.42  | AV               |
| Horizontal                         | 4739.187       | 72.77            | -9.45             | 63.32            | 74       | -10.68 | PK               |
| Horizontal                         | 4739.187       | 59.16            | -9.45             | 49.71            | 54       | -4.29  | AV               |
| Horizontal                         | 10640.144      | 60.98            | 0.00              | 60.98            | 68.2     | -7.22  | PK               |
| Horizontal                         | 10640.144      | 49.80            | 0.00              | 49.80            | 54       | -4.20  | AV               |
| Horizontal                         | 15960.030      | 62.73            | 2.02              | 64.75            | 74       | -9.25  | PK               |
| Horizontal                         | 15960.030      | 49.19            | 2.02              | 51.21            | 54       | -2.79  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor – Limits

Test Mode is MIMO Mode.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX(5.3G) - 802.11ax-HE40 |
|------------|--------------------------|

| Polar<br>(H/V)                   | Fre-<br>quency<br>(MHz) | Reading<br>Level<br>(dBuV/m) | Correct<br>Factor<br>(dB) | Measure-<br>ment<br>(dBuV/m) | Limits<br>(dBuV/m) | Over<br>(dB) | Detector<br>Type |
|----------------------------------|-------------------------|------------------------------|---------------------------|------------------------------|--------------------|--------------|------------------|
| Low Channel (5270 MHz)-Above 1G  |                         |                              |                           |                              |                    |              |                  |
| Vertical                         | 4434.025                | 71.51                        | -10.51                    | 61.00                        | 68.2               | -7.20        | PK               |
| Vertical                         | 4434.025                | 59.66                        | -10.51                    | 49.15                        | 54                 | -4.85        | AV               |
| Vertical                         | 10540.065               | 62.47                        | -0.41                     | 62.06                        | 68.2               | -6.14        | PK               |
| Vertical                         | 10540.065               | 50.00                        | -0.41                     | 49.59                        | 54                 | -4.41        | AV               |
| Vertical                         | 15810.140               | 64.38                        | 2.36                      | 66.74                        | 74                 | -7.26        | PK               |
| Vertical                         | 15810.140               | 49.04                        | 2.36                      | 51.40                        | 54                 | -2.60        | AV               |
| Horizontal                       | 4434.184                | 74.16                        | -10.51                    | 63.65                        | 74                 | -10.35       | PK               |
| Horizontal                       | 4434.184                | 59.94                        | -10.51                    | 49.43                        | 54                 | -4.57        | AV               |
| Horizontal                       | 10540.139               | 60.78                        | -0.41                     | 60.37                        | 68.2               | -7.83        | PK               |
| Horizontal                       | 10540.139               | 50.00                        | -0.41                     | 49.59                        | 54                 | -4.41        | AV               |
| Horizontal                       | 15810.129               | 64.63                        | 2.36                      | 66.99                        | 74                 | -7.01        | PK               |
| Horizontal                       | 15810.129               | 49.76                        | 2.36                      | 52.12                        | 54                 | -1.88        | AV               |
| High Channel (5310 MHz)-Above 1G |                         |                              |                           |                              |                    |              |                  |
| Vertical                         | 4739.167                | 73.52                        | -9.45                     | 64.07                        | 68.2               | -4.13        | PK               |
| Vertical                         | 4739.167                | 59.75                        | -9.45                     | 50.30                        | 54                 | -3.70        | AV               |
| Vertical                         | 10620.037               | 60.73                        | -0.04                     | 60.69                        | 68.2               | -7.51        | PK               |
| Vertical                         | 10620.037               | 49.13                        | -0.04                     | 49.09                        | 54                 | -4.91        | AV               |
| Vertical                         | 15930.019               | 60.33                        | 1.88                      | 62.21                        | 74                 | -11.79       | PK               |
| Vertical                         | 15930.019               | 49.76                        | 1.88                      | 51.64                        | 54                 | -2.36        | AV               |
| Horizontal                       | 4739.082                | 70.91                        | -9.45                     | 61.46                        | 68.2               | -6.74        | PK               |
| Horizontal                       | 4739.082                | 59.06                        | -9.45                     | 49.61                        | 54                 | -4.39        | AV               |
| Horizontal                       | 10620.018               | 62.87                        | -0.04                     | 62.83                        | 68.2               | -5.37        | PK               |
| Horizontal                       | 10620.018               | 49.46                        | -0.04                     | 49.42                        | 54                 | -4.58        | AV               |
| Horizontal                       | 15930.131               | 64.46                        | 1.88                      | 66.34                        | 74                 | -7.66        | PK               |
| Horizontal                       | 15930.131               | 49.83                        | 1.88                      | 51.71                        | 54                 | -2.29        | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor - Limits

Test Mode is MIMO Mode.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX(5.3G) - 802.11ax-HE80 |
|------------|--------------------------|

| Polar               | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over  | Detector<br>Type |
|---------------------|----------------|------------------|-------------------|------------------|----------|-------|------------------|
| (H/V)               | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)  |                  |
| (5290 MHz)-Above 1G |                |                  |                   |                  |          |       |                  |
| Vertical            | 4434.053       | 73.07            | -10.51            | 62.56            | 68.2     | -5.64 | PK               |
| Vertical            | 4434.053       | 59.18            | -10.51            | 48.67            | 54       | -5.33 | AV               |
| Vertical            | 10580.153      | 62.73            | -0.20             | 62.53            | 68.2     | -5.67 | PK               |
| Vertical            | 10580.153      | 49.55            | -0.20             | 49.35            | 54       | -4.65 | AV               |
| Vertical            | 15870.161      | 63.15            | 1.96              | 65.11            | 74       | -8.89 | PK               |
| Vertical            | 15870.161      | 49.39            | 1.96              | 51.35            | 54       | -2.65 | AV               |
| Horizontal          | 4434.144       | 72.04            | -10.51            | 61.53            | 68.2     | -6.67 | PK               |
| Horizontal          | 4434.144       | 59.56            | -10.51            | 49.05            | 54       | -4.95 | AV               |
| Horizontal          | 10580.190      | 62.30            | -0.20             | 62.10            | 68.2     | -6.10 | PK               |
| Horizontal          | 10580.190      | 49.31            | -0.20             | 49.11            | 54       | -4.89 | AV               |
| Horizontal          | 15870.163      | 62.23            | 1.96              | 64.19            | 74       | -9.81 | PK               |
| Horizontal          | 15870.163      | 49.52            | 1.96              | 51.48            | 54       | -2.52 | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor - Limits

Test Mode is MIMO Mode.

|            |                           |
|------------|---------------------------|
| Test Mode: | TX(5.3G) - 802.11be-EHT20 |
|------------|---------------------------|

| Polar                              | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|------------------------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)                              | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| Low Channel (5260 MHz)-Above 1G    |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4434.173       | 71.42            | -10.51            | 60.91            | 68.2     | -7.29  | PK               |
| Vertical                           | 4434.173       | 59.60            | -10.51            | 49.09            | 54       | -4.91  | AV               |
| Vertical                           | 10520.081      | 61.84            | -0.52             | 61.32            | 68.2     | -6.88  | PK               |
| Vertical                           | 10520.081      | 49.31            | -0.52             | 48.79            | 54       | -5.21  | AV               |
| Vertical                           | 15780.054      | 64.00            | 2.40              | 66.40            | 74       | -7.60  | PK               |
| Vertical                           | 15780.054      | 49.29            | 2.40              | 51.69            | 54       | -2.31  | AV               |
| Horizontal                         | 4434.095       | 74.29            | -10.51            | 63.78            | 68.2     | -4.42  | PK               |
| Horizontal                         | 4434.095       | 59.55            | -10.51            | 49.04            | 54       | -4.96  | AV               |
| Horizontal                         | 10520.076      | 61.70            | -0.52             | 61.18            | 68.2     | -7.02  | PK               |
| Horizontal                         | 10520.076      | 49.87            | -0.52             | 49.35            | 54       | -4.65  | AV               |
| Horizontal                         | 15780.093      | 61.75            | 2.40              | 64.15            | 74       | -9.85  | PK               |
| Horizontal                         | 15780.093      | 49.10            | 2.40              | 51.50            | 54       | -2.50  | AV               |
| middle Channel (5280 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4592.125       | 71.08            | -10.20            | 60.88            | 74       | -13.12 | PK               |
| Vertical                           | 4592.125       | 59.43            | -10.20            | 49.23            | 54       | -4.77  | AV               |
| Vertical                           | 10560.089      | 60.75            | -0.31             | 60.44            | 68.2     | -7.76  | PK               |
| Vertical                           | 10560.089      | 49.81            | -0.31             | 49.50            | 54       | -4.50  | AV               |
| Vertical                           | 15840.143      | 60.44            | 2.16              | 62.60            | 74       | -11.40 | PK               |
| Vertical                           | 15840.143      | 49.10            | 2.16              | 51.26            | 54       | -2.74  | AV               |
| Horizontal                         | 4592.007       | 72.36            | -10.20            | 62.16            | 74       | -11.84 | PK               |
| Horizontal                         | 4592.007       | 59.94            | -10.20            | 49.74            | 54       | -4.26  | AV               |
| Horizontal                         | 10560.028      | 60.82            | -0.31             | 60.51            | 68.2     | -7.69  | PK               |
| Horizontal                         | 10560.028      | 49.51            | -0.31             | 49.20            | 54       | -4.80  | AV               |
| Horizontal                         | 15840.183      | 60.84            | 2.16              | 63.00            | 74       | -11.00 | PK               |
| Horizontal                         | 15840.183      | 49.23            | 2.16              | 51.39            | 54       | -2.61  | AV               |
| High Channel (5320 MHz)-Above 1G   |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4739.049       | 71.26            | -9.45             | 61.81            | 74       | -12.19 | PK               |
| Vertical                           | 4739.049       | 59.24            | -9.45             | 49.79            | 54       | -4.21  | AV               |
| Vertical                           | 10640.012      | 64.98            | 0.00              | 64.98            | 68.2     | -3.22  | PK               |
| Vertical                           | 10640.012      | 49.20            | 0.00              | 49.20            | 54       | -4.80  | AV               |
| Vertical                           | 15960.029      | 61.41            | 2.02              | 63.43            | 74       | -10.57 | PK               |
| Vertical                           | 15960.029      | 49.94            | 2.02              | 51.96            | 54       | -2.04  | AV               |
| Horizontal                         | 4739.083       | 73.25            | -9.45             | 63.80            | 74       | -10.20 | PK               |
| Horizontal                         | 4739.083       | 59.48            | -9.45             | 50.03            | 54       | -3.97  | AV               |
| Horizontal                         | 10640.141      | 62.00            | 0.00              | 62.00            | 68.2     | -6.20  | PK               |
| Horizontal                         | 10640.141      | 49.83            | 0.00              | 49.83            | 54       | -4.17  | AV               |
| Horizontal                         | 15960.050      | 63.16            | 2.02              | 65.18            | 74       | -8.82  | PK               |
| Horizontal                         | 15960.050      | 50.00            | 2.02              | 52.02            | 54       | -1.98  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor – Limits

Test Mode is MIMO Mode.

|            |                           |
|------------|---------------------------|
| Test Mode: | TX(5.3G) - 802.11be-EHT40 |
|------------|---------------------------|

| Polar<br>(H/V)                   | Fre-<br>quency<br>(MHz) | Reading<br>Level<br>(dBuV/m) | Correct<br>Factor<br>(dB) | Measure-<br>ment<br>(dBuV/m) | Limits<br>(dBuV/m) | Over<br>(dB) | Detector<br>Type |
|----------------------------------|-------------------------|------------------------------|---------------------------|------------------------------|--------------------|--------------|------------------|
| Low Channel (5270 MHz)-Above 1G  |                         |                              |                           |                              |                    |              |                  |
| Vertical                         | 4434.187                | 74.76                        | -10.51                    | 64.25                        | 68.2               | -3.95        | PK               |
| Vertical                         | 4434.187                | 59.69                        | -10.51                    | 49.18                        | 54                 | -4.82        | AV               |
| Vertical                         | 10540.032               | 63.03                        | -0.41                     | 62.62                        | 68.2               | -5.58        | PK               |
| Vertical                         | 10540.032               | 49.80                        | -0.41                     | 49.39                        | 54                 | -4.61        | AV               |
| Vertical                         | 15810.184               | 64.25                        | 2.36                      | 66.61                        | 74                 | -7.39        | PK               |
| Vertical                         | 15810.184               | 49.62                        | 2.36                      | 51.98                        | 54                 | -2.02        | AV               |
| Horizontal                       | 4434.043                | 74.20                        | -10.51                    | 63.69                        | 74                 | -10.31       | PK               |
| Horizontal                       | 4434.043                | 59.92                        | -10.51                    | 49.41                        | 54                 | -4.59        | AV               |
| Horizontal                       | 10540.139               | 62.46                        | -0.41                     | 62.05                        | 68.2               | -6.15        | PK               |
| Horizontal                       | 10540.139               | 49.48                        | -0.41                     | 49.07                        | 54                 | -4.93        | AV               |
| Horizontal                       | 15810.124               | 61.18                        | 2.36                      | 63.54                        | 74                 | -10.46       | PK               |
| Horizontal                       | 15810.124               | 49.71                        | 2.36                      | 52.07                        | 54                 | -1.93        | AV               |
| High Channel (5310 MHz)-Above 1G |                         |                              |                           |                              |                    |              |                  |
| Vertical                         | 4739.008                | 70.56                        | -9.45                     | 61.11                        | 68.2               | -7.09        | PK               |
| Vertical                         | 4739.008                | 59.03                        | -9.45                     | 49.58                        | 54                 | -4.42        | AV               |
| Vertical                         | 10620.102               | 64.93                        | -0.04                     | 64.89                        | 68.2               | -3.31        | PK               |
| Vertical                         | 10620.102               | 49.35                        | -0.04                     | 49.31                        | 54                 | -4.69        | AV               |
| Vertical                         | 15930.045               | 64.86                        | 1.88                      | 66.74                        | 74                 | -7.26        | PK               |
| Vertical                         | 15930.045               | 49.05                        | 1.88                      | 50.93                        | 54                 | -3.07        | AV               |
| Horizontal                       | 4739.133                | 70.96                        | -9.45                     | 61.51                        | 68.2               | -6.69        | PK               |
| Horizontal                       | 4739.133                | 59.23                        | -9.45                     | 49.78                        | 54                 | -4.22        | AV               |
| Horizontal                       | 10620.009               | 61.59                        | -0.04                     | 61.55                        | 68.2               | -6.65        | PK               |
| Horizontal                       | 10620.009               | 49.02                        | -0.04                     | 48.98                        | 54                 | -5.02        | AV               |
| Horizontal                       | 15930.083               | 61.50                        | 1.88                      | 63.38                        | 74                 | -10.62       | PK               |
| Horizontal                       | 15930.083               | 49.59                        | 1.88                      | 51.47                        | 54                 | -2.53        | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor - Limits

Test Mode is MIMO Mode.

|            |                           |
|------------|---------------------------|
| Test Mode: | TX(5.3G) - 802.11be-EHT80 |
|------------|---------------------------|

| Polar               | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|---------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)               | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| (5290 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical            | 4434.017       | 73.06            | -10.51            | 62.55            | 68.2     | -5.65  | PK               |
| Vertical            | 4434.017       | 59.65            | -10.51            | 49.14            | 54       | -4.86  | AV               |
| Vertical            | 10580.093      | 60.59            | -0.20             | 60.39            | 68.2     | -7.81  | PK               |
| Vertical            | 10580.093      | 49.33            | -0.20             | 49.13            | 54       | -4.87  | AV               |
| Vertical            | 15870.030      | 61.19            | 1.96              | 63.15            | 74       | -10.85 | PK               |
| Vertical            | 15870.030      | 49.38            | 1.96              | 51.34            | 54       | -2.66  | AV               |
| Horizontal          | 4434.109       | 74.22            | -10.51            | 63.71            | 68.2     | -4.49  | PK               |
| Horizontal          | 4434.109       | 59.62            | -10.51            | 49.11            | 54       | -4.89  | AV               |
| Horizontal          | 10580.097      | 64.56            | -0.20             | 64.36            | 68.2     | -3.84  | PK               |
| Horizontal          | 10580.097      | 49.14            | -0.20             | 48.94            | 54       | -5.06  | AV               |
| Horizontal          | 15870.190      | 61.58            | 1.96              | 63.54            | 74       | -10.46 | PK               |
| Horizontal          | 15870.190      | 49.72            | 1.96              | 51.68            | 54       | -2.32  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor - Limits

Test Mode is MIMO Mode.

|            |                    |
|------------|--------------------|
| Test Mode: | TX(5.6G) - 802.11a |
|------------|--------------------|

| Polar                              | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|------------------------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)                              | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| Low Channel (5500 MHz)-Above 1G    |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4434.196       | 71.51            | -10.51            | 61.00            | 68.2     | -7.20  | PK               |
| Vertical                           | 4434.196       | 59.69            | -10.51            | 49.18            | 54       | -4.82  | AV               |
| Vertical                           | 11000.195      | 64.04            | -0.45             | 63.59            | 68.2     | -4.61  | PK               |
| Vertical                           | 11000.195      | 49.99            | -0.45             | 49.54            | 54       | -4.46  | AV               |
| Vertical                           | 16500.151      | 61.87            | 2.94              | 64.81            | 74       | -9.19  | PK               |
| Vertical                           | 16500.151      | 49.43            | 2.94              | 52.37            | 54       | -1.63  | AV               |
| Horizontal                         | 4434.140       | 73.65            | -10.51            | 63.14            | 68.2     | -5.06  | PK               |
| Horizontal                         | 4434.140       | 59.44            | -10.51            | 48.93            | 54       | -5.07  | AV               |
| Horizontal                         | 11000.028      | 64.55            | -0.45             | 64.10            | 68.2     | -4.10  | PK               |
| Horizontal                         | 11000.028      | 49.93            | -0.45             | 49.48            | 54       | -4.52  | AV               |
| Horizontal                         | 16500.158      | 60.50            | 2.94              | 63.44            | 74       | -10.56 | PK               |
| Horizontal                         | 16500.158      | 49.60            | 2.94              | 52.54            | 54       | -1.46  | AV               |
| middle Channel (5580 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4592.156       | 70.27            | -10.20            | 60.07            | 74       | -13.93 | PK               |
| Vertical                           | 4592.156       | 59.10            | -10.20            | 48.90            | 54       | -5.10  | AV               |
| Vertical                           | 11160.131      | 63.18            | -0.65             | 62.53            | 68.2     | -5.67  | PK               |
| Vertical                           | 11160.131      | 49.04            | -0.65             | 48.39            | 54       | -5.61  | AV               |
| Vertical                           | 16740.064      | 63.16            | 3.63              | 66.79            | 74       | -7.21  | PK               |
| Vertical                           | 16740.064      | 49.87            | 3.63              | 53.50            | 54       | -0.50  | AV               |
| Horizontal                         | 4592.052       | 73.85            | -10.20            | 63.65            | 74       | -10.35 | PK               |
| Horizontal                         | 4592.052       | 59.75            | -10.20            | 49.55            | 54       | -4.45  | AV               |
| Horizontal                         | 11160.044      | 64.18            | -0.65             | 63.53            | 68.2     | -4.67  | PK               |
| Horizontal                         | 11160.044      | 49.90            | -0.65             | 49.25            | 54       | -4.75  | AV               |
| Horizontal                         | 16740.072      | 62.86            | 3.63              | 66.49            | 74       | -7.51  | PK               |
| Horizontal                         | 16740.072      | 49.22            | 3.63              | 52.85            | 54       | -1.15  | AV               |
| High Channel (5700 MHz)-Above 1G   |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4739.096       | 70.39            | -9.45             | 60.94            | 74       | -13.06 | PK               |
| Vertical                           | 4739.096       | 59.31            | -9.45             | 49.86            | 54       | -4.14  | AV               |
| Vertical                           | 11400.027      | 63.06            | 0.46              | 63.52            | 68.2     | -4.68  | PK               |
| Vertical                           | 11400.027      | 49.62            | 0.46              | 50.08            | 54       | -3.92  | AV               |
| Vertical                           | 17100.009      | 61.05            | 4.85              | 65.90            | 74       | -8.10  | PK               |
| Vertical                           | 17100.009      | 49.12            | 4.85              | 53.97            | 54       | -0.03  | AV               |
| Horizontal                         | 4739.087       | 70.97            | -9.45             | 61.52            | 74       | -12.48 | PK               |
| Horizontal                         | 4739.087       | 59.75            | -9.45             | 50.30            | 54       | -3.70  | AV               |
| Horizontal                         | 11400.152      | 60.00            | 0.46              | 60.46            | 68.2     | -7.74  | PK               |
| Horizontal                         | 11400.152      | 49.73            | 0.46              | 50.19            | 54       | -3.81  | AV               |
| Horizontal                         | 17100.039      | 64.46            | 4.85              | 69.31            | 74       | -4.69  | PK               |
| Horizontal                         | 17100.039      | 49.01            | 4.85              | 53.86            | 54       | -0.14  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor - Limits

The worst case is Antenna A

|            |                         |
|------------|-------------------------|
| Test Mode: | TX(5.6G) - 802.11n-HT20 |
|------------|-------------------------|

| Polar                              | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|------------------------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)                              | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| Low Channel (5500 MHz)-Above 1G    |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4434.149       | 53.62            | -0.51             | 53.11            | 68.2     | -15.09 | PK               |
| Vertical                           | 4434.149       | 49.33            | -0.51             | 48.82            | 54       | -5.18  | AV               |
| Vertical                           | 11000.172      | 60.99            | -0.45             | 60.54            | 68.2     | -7.66  | PK               |
| Vertical                           | 11000.172      | 49.19            | -0.45             | 48.74            | 54       | -5.26  | AV               |
| Vertical                           | 16500.029      | 60.99            | 2.94              | 63.93            | 74       | -10.07 | PK               |
| Vertical                           | 16500.029      | 49.02            | 2.94              | 51.96            | 54       | -2.04  | AV               |
| Horizontal                         | 4434.131       | 52.28            | -0.51             | 51.77            | 68.2     | -16.43 | PK               |
| Horizontal                         | 4434.131       | 49.73            | -0.51             | 49.22            | 54       | -4.78  | AV               |
| Horizontal                         | 11000.103      | 62.97            | -0.45             | 62.52            | 68.2     | -5.68  | PK               |
| Horizontal                         | 11000.103      | 49.59            | -0.45             | 49.14            | 54       | -4.86  | AV               |
| Horizontal                         | 16500.024      | 63.02            | 2.94              | 65.96            | 74       | -8.04  | PK               |
| Horizontal                         | 16500.024      | 49.15            | 2.94              | 52.09            | 54       | -1.91  | AV               |
| middle Channel (5580 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4592.200       | 71.47            | -10.20            | 61.27            | 74       | -12.73 | PK               |
| Vertical                           | 4592.200       | 59.95            | -10.20            | 49.75            | 54       | -4.25  | AV               |
| Vertical                           | 11160.156      | 62.47            | -0.65             | 61.82            | 68.2     | -6.38  | PK               |
| Vertical                           | 11160.156      | 49.97            | -0.65             | 49.32            | 54       | -4.68  | AV               |
| Vertical                           | 16740.150      | 60.68            | 3.63              | 64.31            | 74       | -9.69  | PK               |
| Vertical                           | 16740.150      | 49.13            | 3.63              | 52.76            | 54       | -1.24  | AV               |
| Horizontal                         | 4592.160       | 73.69            | -10.20            | 63.49            | 74       | -10.51 | PK               |
| Horizontal                         | 4592.160       | 59.03            | -10.20            | 48.83            | 54       | -5.17  | AV               |
| Horizontal                         | 11160.026      | 61.10            | -0.65             | 60.45            | 68.2     | -7.75  | PK               |
| Horizontal                         | 11160.026      | 49.04            | -0.65             | 48.39            | 54       | -5.61  | AV               |
| Horizontal                         | 16740.033      | 60.85            | 3.63              | 64.48            | 74       | -9.52  | PK               |
| Horizontal                         | 16740.033      | 49.98            | 3.63              | 53.61            | 54       | -0.39  | AV               |
| High Channel (5700 MHz)-Above 1G   |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4739.132       | 71.49            | -9.45             | 62.04            | 74       | -11.96 | PK               |
| Vertical                           | 4739.132       | 59.86            | -9.45             | 50.41            | 54       | -3.59  | AV               |
| Vertical                           | 11400.084      | 63.75            | 0.46              | 64.21            | 68.2     | -3.99  | PK               |
| Vertical                           | 11400.084      | 49.19            | 0.46              | 49.65            | 54       | -4.35  | AV               |
| Vertical                           | 17100.032      | 63.52            | 4.85              | 68.37            | 74       | -5.63  | PK               |
| Vertical                           | 17100.032      | 49.51            | 4.85              | 54.36            | 54       | 0.36   | AV               |
| Horizontal                         | 4739.054       | 70.49            | -9.45             | 61.04            | 74       | -12.96 | PK               |
| Horizontal                         | 4739.054       | 59.44            | -9.45             | 49.99            | 54       | -4.01  | AV               |
| Horizontal                         | 11400.173      | 62.29            | 0.46              | 62.75            | 68.2     | -5.45  | PK               |
| Horizontal                         | 11400.173      | 49.29            | 0.46              | 49.75            | 54       | -4.25  | AV               |
| Horizontal                         | 17100.037      | 64.82            | 4.85              | 69.67            | 74       | -4.33  | PK               |
| Horizontal                         | 17100.037      | 39.70            | 4.85              | 44.55            | 54       | -9.45  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.  
The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
Emission level (dBuV/m) = 20 log Emission level (uV/m).  
Correct Factor =Antenna Factor + Cable Loss - Preamp Factor  
Over = Reading Level + Correct Factor - Limits  
Test Mode is MIMO Mode.

|            |                         |
|------------|-------------------------|
| Test Mode: | TX(5.6G) - 802.11n-HT40 |
|------------|-------------------------|

| Polar                              | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|------------------------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)                              | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| Low Channel (5510 MHz)-Above 1G    |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4434.147       | 60.23            | -10.51            | 49.72            | 68.2     | -18.48 | PK               |
| Vertical                           | 4434.147       | 43.70            | -10.51            | 33.19            | 54       | -20.81 | AV               |
| Vertical                           | 11020.143      | 60.31            | -0.47             | 59.84            | 68.2     | -8.36  | PK               |
| Vertical                           | 11020.143      | 43.84            | -0.47             | 43.37            | 54       | -10.63 | AV               |
| Vertical                           | 16530.036      | 61.57            | 3.05              | 64.62            | 74       | -9.38  | PK               |
| Vertical                           | 16530.036      | 43.91            | 3.05              | 46.96            | 54       | -7.04  | AV               |
| Horizontal                         | 4434.175       | 60.90            | -10.51            | 50.39            | 74       | -23.61 | PK               |
| Horizontal                         | 4434.175       | 43.55            | -10.51            | 33.04            | 54       | -20.96 | AV               |
| Horizontal                         | 11020.018      | 53.17            | -0.47             | 52.70            | 68.2     | -15.50 | PK               |
| Horizontal                         | 11020.018      | 43.71            | -0.47             | 43.24            | 54       | -10.76 | AV               |
| Horizontal                         | 16530.107      | 51.38            | 3.05              | 54.43            | 74       | -19.57 | PK               |
| Horizontal                         | 16530.107      | 42.17            | 3.05              | 45.22            | 54       | -8.78  | AV               |
| middle Channel (5550 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4592.193       | 64.30            | -10.20            | 54.10            | 74       | -19.90 | PK               |
| Vertical                           | 4592.193       | 43.90            | -10.20            | 33.70            | 54       | -20.30 | AV               |
| Vertical                           | 11100.176      | 63.90            | -0.57             | 63.33            | 68.2     | -4.87  | PK               |
| Vertical                           | 11100.176      | 43.32            | -0.57             | 42.75            | 54       | -11.25 | AV               |
| Vertical                           | 16650.030      | 62.61            | 3.58              | 66.19            | 74       | -7.81  | PK               |
| Vertical                           | 16650.030      | 43.10            | 3.58              | 46.68            | 54       | -7.32  | AV               |
| Horizontal                         | 4592.063       | 63.57            | -10.20            | 53.37            | 74       | -20.63 | PK               |
| Horizontal                         | 4592.063       | 43.61            | -10.20            | 33.41            | 54       | -20.59 | AV               |
| Horizontal                         | 11100.185      | 51.32            | -0.57             | 50.75            | 68.2     | -17.45 | PK               |
| Horizontal                         | 11100.185      | 41.52            | -0.57             | 40.95            | 54       | -13.05 | AV               |
| Horizontal                         | 16650.065      | 54.17            | 3.58              | 57.75            | 74       | -16.25 | PK               |
| Horizontal                         | 16650.065      | 43.41            | 3.58              | 46.99            | 54       | -7.01  | AV               |
| High Channel (5670 MHz)-Above 1G   |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4739.157       | 60.45            | -9.45             | 51.00            | 68.2     | -17.20 | PK               |
| Vertical                           | 4739.157       | 43.93            | -9.45             | 34.48            | 54       | -19.52 | AV               |
| Vertical                           | 11340.085      | 60.31            | -0.13             | 60.18            | 68.2     | -8.02  | PK               |
| Vertical                           | 11340.085      | 43.83            | -0.13             | 43.70            | 54       | -10.30 | AV               |
| Vertical                           | 17010.148      | 61.01            | 3.91              | 64.92            | 74       | -9.08  | PK               |
| Vertical                           | 17010.148      | 43.91            | 3.91              | 47.82            | 54       | -6.18  | AV               |
| Horizontal                         | 4739.099       | 60.46            | -9.45             | 51.01            | 68.2     | -17.19 | PK               |
| Horizontal                         | 4739.099       | 43.49            | -9.45             | 34.04            | 54       | -19.96 | AV               |
| Horizontal                         | 11340.008      | 50.49            | -0.13             | 50.36            | 68.2     | -17.84 | PK               |
| Horizontal                         | 11340.008      | 41.71            | -0.13             | 41.58            | 54       | -12.42 | AV               |
| Horizontal                         | 17010.196      | 50.23            | 3.91              | 54.14            | 74       | -19.86 | PK               |
| Horizontal                         | 17010.196      | 41.85            | 3.91              | 45.76            | 54       | -8.24  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.  
The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
Emission level (dBuV/m) = 20 log Emission level (uV/m).  
Correct Factor =Antenna Factor + Cable Loss - Preamp Factor  
Over = Reading Level + Correct Factor – Limits  
Test Mode is MIMO Mode.

|            |                           |
|------------|---------------------------|
| Test Mode: | TX(5.6G) - 802.11ac-VHT20 |
|------------|---------------------------|

| Polar<br>(H/V)                     | Fre-<br>quency<br>(MHz) | Reading<br>Level<br>(dBuV/m) | Correct<br>Factor<br>(dB) | Measure-<br>ment<br>(dBuV/m) | Limits<br>(dBuV/m) | Over<br>(dB) | Detector<br>Type |
|------------------------------------|-------------------------|------------------------------|---------------------------|------------------------------|--------------------|--------------|------------------|
| Low Channel (5500 MHz)-Above 1G    |                         |                              |                           |                              |                    |              |                  |
| Vertical                           | 4434.110                | 50.33                        | -0.51                     | 49.82                        | 68.2               | -18.38       | PK               |
| Vertical                           | 4434.110                | 49.21                        | -0.51                     | 48.70                        | 54                 | -5.30        | AV               |
| Vertical                           | 11000.163               | 63.48                        | -0.45                     | 63.03                        | 68.2               | -5.17        | PK               |
| Vertical                           | 11000.163               | 49.74                        | -0.45                     | 49.29                        | 54                 | -4.71        | AV               |
| Vertical                           | 16500.114               | 63.16                        | 2.94                      | 66.10                        | 74                 | -7.90        | PK               |
| Vertical                           | 16500.114               | 49.90                        | 2.94                      | 52.84                        | 54                 | -1.16        | AV               |
| Horizontal                         | 4434.029                | 52.04                        | -0.51                     | 51.53                        | 68.2               | -16.67       | PK               |
| Horizontal                         | 4434.029                | 49.55                        | -0.51                     | 49.04                        | 54                 | -4.96        | AV               |
| Horizontal                         | 11000.057               | 63.54                        | -0.45                     | 63.09                        | 68.2               | -5.11        | PK               |
| Horizontal                         | 11000.057               | 49.52                        | -0.45                     | 49.07                        | 54                 | -4.93        | AV               |
| Horizontal                         | 16500.134               | 63.97                        | 2.94                      | 66.91                        | 74                 | -7.09        | PK               |
| Horizontal                         | 16500.134               | 49.48                        | 2.94                      | 52.42                        | 54                 | -1.58        | AV               |
| middle Channel (5580 MHz)-Above 1G |                         |                              |                           |                              |                    |              |                  |
| Vertical                           | 4592.060                | 73.05                        | -10.20                    | 62.85                        | 74                 | -11.15       | PK               |
| Vertical                           | 4592.060                | 59.84                        | -10.20                    | 49.64                        | 54                 | -4.36        | AV               |
| Vertical                           | 11160.108               | 60.63                        | -0.65                     | 59.98                        | 68.2               | -8.22        | PK               |
| Vertical                           | 11160.108               | 49.35                        | -0.65                     | 48.70                        | 54                 | -5.30        | AV               |
| Vertical                           | 16740.038               | 60.32                        | 3.63                      | 63.95                        | 74                 | -10.05       | PK               |
| Vertical                           | 16740.038               | 49.53                        | 3.63                      | 53.16                        | 54                 | -0.84        | AV               |
| Horizontal                         | 4592.116                | 73.01                        | -10.20                    | 62.81                        | 74                 | -11.19       | PK               |
| Horizontal                         | 4592.116                | 59.26                        | -10.20                    | 49.06                        | 54                 | -4.94        | AV               |
| Horizontal                         | 11160.087               | 61.94                        | -0.65                     | 61.29                        | 68.2               | -6.91        | PK               |
| Horizontal                         | 11160.087               | 49.46                        | -0.65                     | 48.81                        | 54                 | -5.19        | AV               |
| Horizontal                         | 16740.068               | 60.25                        | 3.63                      | 63.88                        | 74                 | -10.12       | PK               |
| Horizontal                         | 16740.068               | 49.76                        | 3.63                      | 53.39                        | 54                 | -0.61        | AV               |
| High Channel (5700 MHz)-Above 1G   |                         |                              |                           |                              |                    |              |                  |
| Vertical                           | 4739.150                | 71.08                        | -9.45                     | 61.63                        | 74                 | -12.37       | PK               |
| Vertical                           | 4739.150                | 59.26                        | -9.45                     | 49.81                        | 54                 | -4.19        | AV               |
| Vertical                           | 11400.177               | 62.47                        | 0.46                      | 62.93                        | 68.2               | -5.27        | PK               |
| Vertical                           | 11400.177               | 49.24                        | 0.46                      | 49.70                        | 54                 | -4.30        | AV               |
| Vertical                           | 17100.015               | 60.28                        | 4.85                      | 65.13                        | 74                 | -8.87        | PK               |
| Vertical                           | 17100.015               | 49.43                        | 4.85                      | 54.28                        | 54                 | 0.28         | AV               |
| Horizontal                         | 4739.020                | 71.78                        | -9.45                     | 62.33                        | 74                 | -11.67       | PK               |
| Horizontal                         | 4739.020                | 59.27                        | -9.45                     | 49.82                        | 54                 | -4.18        | AV               |
| Horizontal                         | 11400.023               | 63.36                        | 0.46                      | 63.82                        | 68.2               | -4.38        | PK               |
| Horizontal                         | 11400.023               | 49.19                        | 0.46                      | 49.65                        | 54                 | -4.35        | AV               |
| Horizontal                         | 17100.155               | 62.27                        | 4.85                      | 67.12                        | 74                 | -6.88        | PK               |
| Horizontal                         | 17100.155               | 40.00                        | 4.85                      | 44.85                        | 54                 | -9.15        | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor – Limits

Test Mode is MIMO Mode.

|            |                           |
|------------|---------------------------|
| Test Mode: | TX(5.6G) - 802.11ac-VHT40 |
|------------|---------------------------|

| Polar                              | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|------------------------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)                              | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| Low Channel (5510 MHz)-Above 1G    |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4434.189       | 63.04            | -10.51            | 52.53            | 68.2     | -15.67 | PK               |
| Vertical                           | 4434.189       | 43.85            | -10.51            | 33.34            | 54       | -20.66 | AV               |
| Vertical                           | 11020.181      | 62.99            | -0.47             | 62.52            | 68.2     | -5.68  | PK               |
| Vertical                           | 11020.181      | 43.60            | -0.47             | 43.13            | 54       | -10.87 | AV               |
| Vertical                           | 16530.018      | 61.77            | 3.05              | 64.82            | 74       | -9.18  | PK               |
| Vertical                           | 16530.018      | 43.66            | 3.05              | 46.71            | 54       | -7.29  | AV               |
| Horizontal                         | 4434.095       | 61.00            | -10.51            | 50.49            | 74       | -23.51 | PK               |
| Horizontal                         | 4434.095       | 43.94            | -10.51            | 33.43            | 54       | -20.57 | AV               |
| Horizontal                         | 11020.060      | 53.41            | -0.47             | 52.94            | 68.2     | -15.26 | PK               |
| Horizontal                         | 11020.060      | 40.94            | -0.47             | 40.47            | 54       | -13.53 | AV               |
| Horizontal                         | 16530.181      | 51.03            | 3.05              | 54.08            | 74       | -19.92 | PK               |
| Horizontal                         | 16530.181      | 41.38            | 3.05              | 44.43            | 54       | -9.57  | AV               |
| middle Channel (5550 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4592.065       | 60.19            | -10.20            | 49.99            | 74       | -24.01 | PK               |
| Vertical                           | 4592.065       | 43.64            | -10.20            | 33.44            | 54       | -20.56 | AV               |
| Vertical                           | 11100.144      | 63.05            | -0.57             | 62.48            | 68.2     | -5.72  | PK               |
| Vertical                           | 11100.144      | 43.57            | -0.57             | 43.00            | 54       | -11.00 | AV               |
| Vertical                           | 16650.016      | 60.59            | 3.58              | 64.17            | 74       | -9.83  | PK               |
| Vertical                           | 16650.016      | 43.36            | 3.58              | 46.94            | 54       | -7.06  | AV               |
| Horizontal                         | 4592.073       | 62.00            | -10.20            | 51.80            | 74       | -22.20 | PK               |
| Horizontal                         | 4592.073       | 43.44            | -10.20            | 33.24            | 54       | -20.76 | AV               |
| Horizontal                         | 11100.072      | 53.98            | -0.57             | 53.41            | 68.2     | -14.79 | PK               |
| Horizontal                         | 11100.072      | 41.38            | -0.57             | 40.81            | 54       | -13.19 | AV               |
| Horizontal                         | 16650.010      | 53.12            | 3.58              | 56.70            | 74       | -17.30 | PK               |
| Horizontal                         | 16650.010      | 40.96            | 3.58              | 44.54            | 54       | -9.46  | AV               |
| High Channel (5670 MHz)-Above 1G   |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4739.049       | 62.96            | -9.45             | 53.51            | 68.2     | -14.69 | PK               |
| Vertical                           | 4739.049       | 43.82            | -9.45             | 34.37            | 54       | -19.63 | AV               |
| Vertical                           | 11340.029      | 61.41            | -0.13             | 61.28            | 68.2     | -6.92  | PK               |
| Vertical                           | 11340.029      | 43.79            | -0.13             | 43.66            | 54       | -10.34 | AV               |
| Vertical                           | 17010.022      | 64.64            | 3.91              | 68.55            | 74       | -5.45  | PK               |
| Vertical                           | 17010.022      | 43.65            | 3.91              | 47.56            | 54       | -6.44  | AV               |
| Horizontal                         | 4739.083       | 63.60            | -9.45             | 54.15            | 68.2     | -14.05 | PK               |
| Horizontal                         | 4739.083       | 43.85            | -9.45             | 34.40            | 54       | -19.60 | AV               |
| Horizontal                         | 11340.081      | 51.71            | -0.13             | 51.58            | 68.2     | -16.62 | PK               |
| Horizontal                         | 11340.081      | 44.51            | -0.13             | 44.38            | 54       | -9.62  | AV               |
| Horizontal                         | 17010.028      | 51.06            | 3.91              | 54.97            | 74       | -19.03 | PK               |
| Horizontal                         | 17010.028      | 44.16            | 3.91              | 48.07            | 54       | -5.93  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.  
The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
Emission level (dBuV/m) = 20 log Emission level (uV/m).  
Correct Factor =Antenna Factor + Cable Loss - Preamp Factor  
Over = Reading Level + Correct Factor - Limits  
Test Mode is MIMO Mode.

|            |                           |
|------------|---------------------------|
| Test Mode: | TX(5.6G) - 802.11ac-VHT80 |
|------------|---------------------------|

| Polar               | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|---------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)               | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| (5530 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical            | 4434.150       | 60.34            | -10.51            | 49.83            | 68.2     | -18.37 | PK               |
| Vertical            | 4434.150       | 43.12            | -10.51            | 32.61            | 54       | -21.39 | AV               |
| Vertical            | 11060.161      | 60.73            | -0.52             | 60.21            | 68.2     | -7.99  | PK               |
| Vertical            | 11060.161      | 43.59            | -0.52             | 43.07            | 54       | -10.93 | AV               |
| Vertical            | 16590.005      | 62.23            | 3.26              | 65.49            | 74       | -8.51  | PK               |
| Vertical            | 16590.005      | 43.92            | 3.26              | 47.18            | 54       | -6.82  | AV               |
| Horizontal          | 4434.185       | 63.28            | -10.51            | 52.77            | 68.2     | -15.43 | PK               |
| Horizontal          | 4434.185       | 43.04            | -10.51            | 32.53            | 54       | -21.47 | AV               |
| Horizontal          | 11060.109      | 53.67            | -0.52             | 53.15            | 68.2     | -15.05 | PK               |
| Horizontal          | 11060.109      | 42.65            | -0.52             | 42.13            | 54       | -11.87 | AV               |
| Horizontal          | 16590.050      | 53.21            | 3.26              | 56.47            | 74       | -17.53 | PK               |
| Horizontal          | 16590.050      | 40.95            | 3.26              | 44.21            | 54       | -9.79  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor - Limits

Test Mode is MIMO Mode.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX(5.6G) - 802.11ax-HE20 |
|------------|--------------------------|

| Polar                              | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|------------------------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)                              | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| Low Channel (5500 MHz)-Above 1G    |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4434.107       | 51.40            | -0.51             | 50.89            | 68.2     | -17.31 | PK               |
| Vertical                           | 4434.107       | 49.52            | -0.51             | 49.01            | 54       | -4.99  | AV               |
| Vertical                           | 11000.156      | 63.38            | -0.45             | 62.93            | 68.2     | -5.27  | PK               |
| Vertical                           | 11000.156      | 49.46            | -0.45             | 49.01            | 54       | -4.99  | AV               |
| Vertical                           | 16500.020      | 60.39            | 2.94              | 63.33            | 74       | -10.67 | PK               |
| Vertical                           | 16500.020      | 49.38            | 2.94              | 52.32            | 54       | -1.68  | AV               |
| Horizontal                         | 4434.175       | 54.29            | -0.51             | 53.78            | 68.2     | -14.42 | PK               |
| Horizontal                         | 4434.175       | 49.54            | -0.51             | 49.03            | 54       | -4.97  | AV               |
| Horizontal                         | 11000.187      | 62.41            | -0.45             | 61.96            | 68.2     | -6.24  | PK               |
| Horizontal                         | 11000.187      | 49.42            | -0.45             | 48.97            | 54       | -5.03  | AV               |
| Horizontal                         | 16500.178      | 64.13            | 2.94              | 67.07            | 74       | -6.93  | PK               |
| Horizontal                         | 16500.178      | 49.93            | 2.94              | 52.87            | 54       | -1.13  | AV               |
| middle Channel (5580 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4592.148       | 70.41            | -10.20            | 60.21            | 74       | -13.79 | PK               |
| Vertical                           | 4592.148       | 59.81            | -10.20            | 49.61            | 54       | -4.39  | AV               |
| Vertical                           | 11160.134      | 63.57            | -0.65             | 62.92            | 68.2     | -5.28  | PK               |
| Vertical                           | 11160.134      | 49.48            | -0.65             | 48.83            | 54       | -5.17  | AV               |
| Vertical                           | 16740.051      | 63.50            | 3.63              | 67.13            | 74       | -6.87  | PK               |
| Vertical                           | 16740.051      | 49.28            | 3.63              | 52.91            | 54       | -1.09  | AV               |
| Horizontal                         | 4592.099       | 73.57            | -10.20            | 63.37            | 74       | -10.63 | PK               |
| Horizontal                         | 4592.099       | 59.48            | -10.20            | 49.28            | 54       | -4.72  | AV               |
| Horizontal                         | 11160.108      | 63.47            | -0.65             | 62.82            | 68.2     | -5.38  | PK               |
| Horizontal                         | 11160.108      | 49.88            | -0.65             | 49.23            | 54       | -4.77  | AV               |
| Horizontal                         | 16740.121      | 62.78            | 3.63              | 66.41            | 74       | -7.59  | PK               |
| Horizontal                         | 16740.121      | 49.31            | 3.63              | 52.94            | 54       | -1.06  | AV               |
| High Channel (5700 MHz)-Above 1G   |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4739.107       | 74.08            | -9.45             | 64.63            | 74       | -9.37  | PK               |
| Vertical                           | 4739.107       | 59.38            | -9.45             | 49.93            | 54       | -4.07  | AV               |
| Vertical                           | 11400.021      | 60.26            | 0.46              | 60.72            | 68.2     | -7.48  | PK               |
| Vertical                           | 11400.021      | 49.16            | 0.46              | 49.62            | 54       | -4.38  | AV               |
| Vertical                           | 17100.069      | 60.97            | 4.85              | 65.82            | 74       | -8.18  | PK               |
| Vertical                           | 17100.069      | 49.70            | 4.85              | 54.55            | 54       | 0.55   | AV               |
| Horizontal                         | 4739.065       | 72.33            | -9.45             | 62.88            | 74       | -11.12 | PK               |
| Horizontal                         | 4739.065       | 59.26            | -9.45             | 49.81            | 54       | -4.19  | AV               |
| Horizontal                         | 11400.159      | 64.13            | 0.46              | 64.59            | 68.2     | -3.61  | PK               |
| Horizontal                         | 11400.159      | 49.23            | 0.46              | 49.69            | 54       | -4.31  | AV               |
| Horizontal                         | 17100.159      | 60.93            | 4.85              | 65.78            | 74       | -8.22  | PK               |
| Horizontal                         | 17100.159      | 39.46            | 4.85              | 44.31            | 54       | -9.69  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor - Limits

Test Mode is MIMO Mode.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX(5.6G) - 802.11ax-HE40 |
|------------|--------------------------|


| Polar                              | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|------------------------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)                              | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| Low Channel (5510 MHz)-Above 1G    |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4434.055       | 64.98            | -10.51            | 54.47            | 68.2     | -13.73 | PK               |
| Vertical                           | 4434.055       | 43.20            | -10.51            | 32.69            | 54       | -21.31 | AV               |
| Vertical                           | 11020.165      | 60.72            | -0.47             | 60.25            | 68.2     | -7.95  | PK               |
| Vertical                           | 11020.165      | 43.45            | -0.47             | 42.98            | 54       | -11.02 | AV               |
| Vertical                           | 16530.143      | 60.93            | 3.05              | 63.98            | 74       | -10.02 | PK               |
| Vertical                           | 16530.143      | 43.68            | 3.05              | 46.73            | 54       | -7.27  | AV               |
| Horizontal                         | 4434.120       | 60.85            | -10.51            | 50.34            | 74       | -23.66 | PK               |
| Horizontal                         | 4434.120       | 43.12            | -10.51            | 32.61            | 54       | -21.39 | AV               |
| Horizontal                         | 11020.143      | 54.68            | -0.47             | 54.21            | 68.2     | -13.99 | PK               |
| Horizontal                         | 11020.143      | 40.75            | -0.47             | 40.28            | 54       | -13.72 | AV               |
| Horizontal                         | 16530.111      | 52.72            | 3.05              | 55.77            | 74       | -18.23 | PK               |
| Horizontal                         | 16530.111      | 43.95            | 3.05              | 47.00            | 54       | -7.00  | AV               |
| middle Channel (5550 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4592.016       | 64.60            | -10.20            | 54.40            | 74       | -19.60 | PK               |
| Vertical                           | 4592.016       | 43.29            | -10.20            | 33.09            | 54       | -20.91 | AV               |
| Vertical                           | 11100.063      | 63.16            | -0.57             | 62.59            | 68.2     | -5.61  | PK               |
| Vertical                           | 11100.063      | 43.26            | -0.57             | 42.69            | 54       | -11.31 | AV               |
| Vertical                           | 16650.006      | 64.57            | 3.58              | 68.15            | 74       | -5.85  | PK               |
| Vertical                           | 16650.006      | 43.66            | 3.58              | 47.24            | 54       | -6.76  | AV               |
| Horizontal                         | 4592.003       | 60.61            | -10.20            | 50.41            | 74       | -23.59 | PK               |
| Horizontal                         | 4592.003       | 43.26            | -10.20            | 33.06            | 54       | -20.94 | AV               |
| Horizontal                         | 11100.179      | 50.18            | -0.57             | 49.61            | 68.2     | -18.59 | PK               |
| Horizontal                         | 11100.179      | 43.51            | -0.57             | 42.94            | 54       | -11.06 | AV               |
| Horizontal                         | 16650.056      | 52.82            | 3.58              | 56.40            | 74       | -17.60 | PK               |
| Horizontal                         | 16650.056      | 43.19            | 3.58              | 46.77            | 54       | -7.23  | AV               |
| High Channel (5670 MHz)-Above 1G   |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4739.094       | 62.03            | -9.45             | 52.58            | 68.2     | -15.62 | PK               |
| Vertical                           | 4739.094       | 43.40            | -9.45             | 33.95            | 54       | -20.05 | AV               |
| Vertical                           | 11340.051      | 63.23            | -0.13             | 63.10            | 68.2     | -5.10  | PK               |
| Vertical                           | 11340.051      | 43.20            | -0.13             | 43.07            | 54       | -10.93 | AV               |
| Vertical                           | 17010.165      | 64.90            | 3.91              | 68.81            | 74       | -5.19  | PK               |
| Vertical                           | 17010.165      | 43.82            | 3.91              | 47.73            | 54       | -6.27  | AV               |
| Horizontal                         | 4739.195       | 60.69            | -9.45             | 51.24            | 68.2     | -16.96 | PK               |
| Horizontal                         | 4739.195       | 43.80            | -9.45             | 34.35            | 54       | -19.65 | AV               |
| Horizontal                         | 11340.120      | 54.64            | -0.13             | 54.51            | 68.2     | -13.69 | PK               |
| Horizontal                         | 11340.120      | 42.40            | -0.13             | 42.27            | 54       | -11.73 | AV               |
| Horizontal                         | 17010.035      | 51.52            | 3.91              | 55.43            | 74       | -18.57 | PK               |
| Horizontal                         | 17010.035      | 40.77            | 3.91              | 44.68            | 54       | -9.32  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.  
The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
Emission level (dBuV/m) = 20 log Emission level (uV/m).  
Correct Factor =Antenna Factor + Cable Loss - Preamp Factor  
Over = Reading Level + Correct Factor - Limits  
Test Mode is MIMO Mode.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX(5.6G) - 802.11ax-HE80 |
|------------|--------------------------|

| Polar               | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|---------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)               | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| (5530 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical            | 4434.143       | 64.40            | -10.51            | 53.89            | 68.2     | -14.31 | PK               |
| Vertical            | 4434.143       | 43.09            | -10.51            | 32.58            | 54       | -21.42 | AV               |
| Vertical            | 11060.112      | 62.26            | -0.52             | 61.74            | 68.2     | -6.46  | PK               |
| Vertical            | 11060.112      | 43.43            | -0.52             | 42.91            | 54       | -11.09 | AV               |
| Vertical            | 16590.177      | 61.96            | 3.26              | 65.22            | 74       | -8.78  | PK               |
| Vertical            | 16590.177      | 43.54            | 3.26              | 46.80            | 54       | -7.20  | AV               |
| Horizontal          | 4434.145       | 60.42            | -10.51            | 49.91            | 68.2     | -18.29 | PK               |
| Horizontal          | 4434.145       | 43.68            | -10.51            | 33.17            | 54       | -20.83 | AV               |
| Horizontal          | 11060.061      | 54.76            | -0.52             | 54.24            | 68.2     | -13.96 | PK               |
| Horizontal          | 11060.061      | 44.58            | -0.52             | 44.06            | 54       | -9.94  | AV               |
| Horizontal          | 16590.005      | 50.51            | 3.26              | 53.77            | 74       | -20.23 | PK               |
| Horizontal          | 16590.005      | 43.92            | 3.26              | 47.18            | 54       | -6.82  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.  
The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
Emission level (dBuV/m) = 20 log Emission level (uV/m).  
Correct Factor =Antenna Factor + Cable Loss - Preamp Factor  
Over = Reading Level + Correct Factor - Limits  
Test Mode is MIMO Mode.

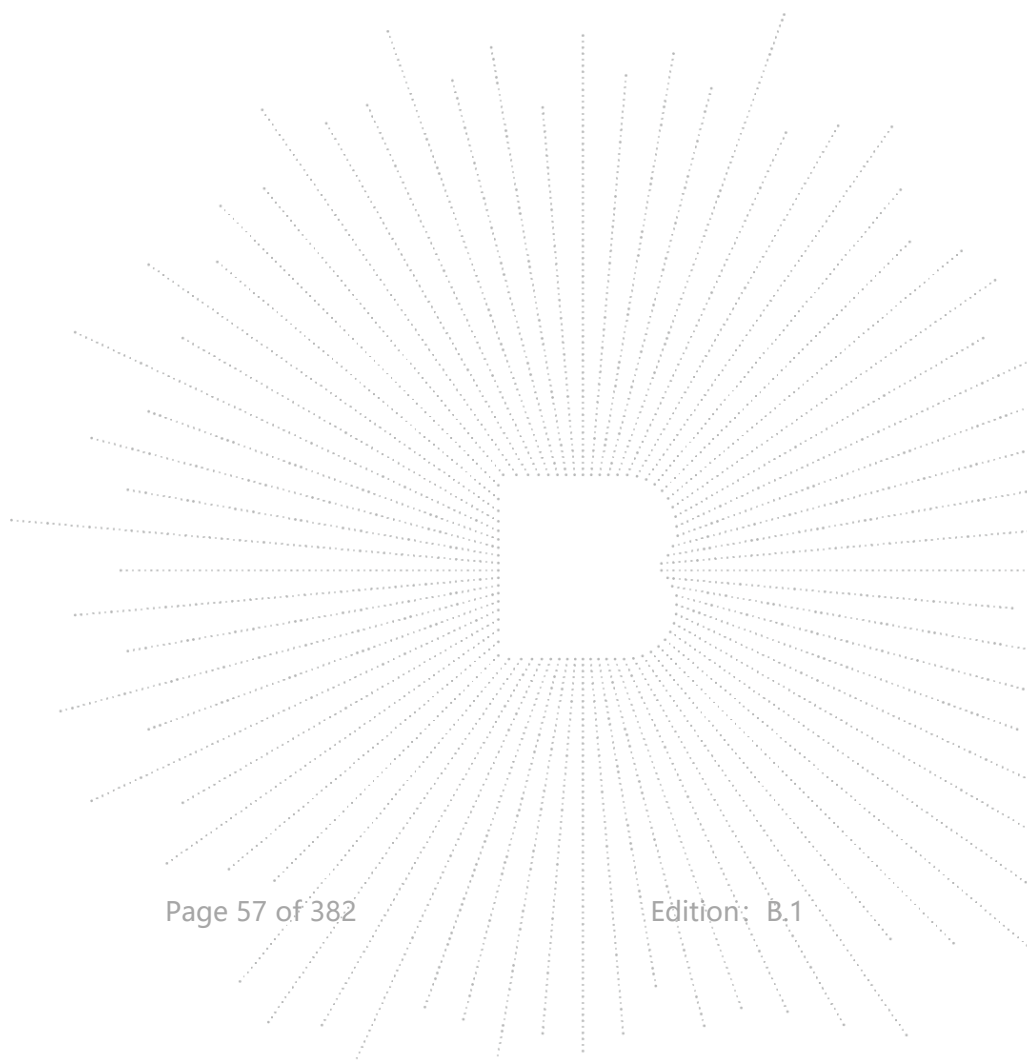

|            |                           |
|------------|---------------------------|
| Test Mode: | TX(5.6G) - 802.11be-EHT20 |
|------------|---------------------------|

| Polar                              | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|------------------------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)                              | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| Low Channel (5500 MHz)-Above 1G    |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4434.108       | 53.93            | -0.51             | 53.42            | 68.2     | -14.78 | PK               |
| Vertical                           | 4434.108       | 49.64            | -0.51             | 49.13            | 54       | -4.87  | AV               |
| Vertical                           | 11000.102      | 64.19            | -0.45             | 63.74            | 68.2     | -4.46  | PK               |
| Vertical                           | 11000.102      | 49.29            | -0.45             | 48.84            | 54       | -5.16  | AV               |
| Vertical                           | 16500.147      | 64.85            | 2.94              | 67.79            | 74       | -6.21  | PK               |
| Vertical                           | 16500.147      | 49.16            | 2.94              | 52.10            | 54       | -1.90  | AV               |
| Horizontal                         | 4434.005       | 53.33            | -0.51             | 52.82            | 68.2     | -15.38 | PK               |
| Horizontal                         | 4434.005       | 49.97            | -0.51             | 49.46            | 54       | -4.54  | AV               |
| Horizontal                         | 11000.108      | 62.44            | -0.45             | 61.99            | 68.2     | -6.21  | PK               |
| Horizontal                         | 11000.108      | 49.76            | -0.45             | 49.31            | 54       | -4.69  | AV               |
| Horizontal                         | 16500.089      | 63.16            | 2.94              | 66.10            | 74       | -7.90  | PK               |
| Horizontal                         | 16500.089      | 49.73            | 2.94              | 52.67            | 54       | -1.33  | AV               |
| middle Channel (5580 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4592.139       | 73.05            | -10.20            | 62.85            | 74       | -11.15 | PK               |
| Vertical                           | 4592.139       | 59.35            | -10.20            | 49.15            | 54       | -4.85  | AV               |
| Vertical                           | 11160.049      | 64.79            | -0.65             | 64.14            | 68.2     | -4.06  | PK               |
| Vertical                           | 11160.049      | 49.33            | -0.65             | 48.68            | 54       | -5.32  | AV               |
| Vertical                           | 16740.009      | 60.43            | 3.63              | 64.06            | 74       | -9.94  | PK               |
| Vertical                           | 16740.009      | 49.57            | 3.63              | 53.20            | 54       | -0.80  | AV               |
| Horizontal                         | 4592.138       | 72.94            | -10.20            | 62.74            | 74       | -11.26 | PK               |
| Horizontal                         | 4592.138       | 60.00            | -10.20            | 49.80            | 54       | -4.20  | AV               |
| Horizontal                         | 11160.155      | 62.32            | -0.65             | 61.67            | 68.2     | -6.53  | PK               |
| Horizontal                         | 11160.155      | 49.02            | -0.65             | 48.37            | 54       | -5.63  | AV               |
| Horizontal                         | 16740.058      | 63.96            | 3.63              | 67.59            | 74       | -6.41  | PK               |
| Horizontal                         | 16740.058      | 49.47            | 3.63              | 53.10            | 54       | -0.90  | AV               |
| High Channel (5700 MHz)-Above 1G   |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4739.036       | 70.38            | -9.45             | 60.93            | 74       | -13.07 | PK               |
| Vertical                           | 4739.036       | 59.97            | -9.45             | 50.52            | 54       | -3.48  | AV               |
| Vertical                           | 11400.133      | 63.66            | 0.46              | 64.12            | 68.2     | -4.08  | PK               |
| Vertical                           | 11400.133      | 49.17            | 0.46              | 49.63            | 54       | -4.37  | AV               |
| Vertical                           | 17100.066      | 61.34            | 4.85              | 66.19            | 74       | -7.81  | PK               |
| Vertical                           | 17100.066      | 49.08            | 4.85              | 53.93            | 54       | -0.07  | AV               |
| Horizontal                         | 4739.006       | 70.20            | -9.45             | 60.75            | 74       | -13.25 | PK               |
| Horizontal                         | 4739.006       | 59.92            | -9.45             | 50.47            | 54       | -3.53  | AV               |
| Horizontal                         | 11400.031      | 62.56            | 0.46              | 63.02            | 68.2     | -5.18  | PK               |
| Horizontal                         | 11400.031      | 49.98            | 0.46              | 50.44            | 54       | -3.56  | AV               |
| Horizontal                         | 17100.081      | 63.78            | 4.85              | 68.63            | 74       | -5.37  | PK               |
| Horizontal                         | 17100.081      | 39.87            | 4.85              | 44.72            | 54       | -9.28  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor - Limits

Test Mode is MIMO Mode.

|            |                           |
|------------|---------------------------|
| Test Mode: | TX(5.6G) - 802.11be-EHT40 |
|------------|---------------------------|


| Polar                              | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|------------------------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)                              | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| Low Channel (5510 MHz)-Above 1G    |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4434.062       | 63.89            | -10.51            | 53.38            | 68.2     | -14.82 | PK               |
| Vertical                           | 4434.062       | 43.53            | -10.51            | 33.02            | 54       | -20.98 | AV               |
| Vertical                           | 11020.123      | 60.55            | -0.47             | 60.08            | 68.2     | -8.12  | PK               |
| Vertical                           | 11020.123      | 43.05            | -0.47             | 42.58            | 54       | -11.42 | AV               |
| Vertical                           | 16530.069      | 61.28            | 3.05              | 64.33            | 74       | -9.67  | PK               |
| Vertical                           | 16530.069      | 43.78            | 3.05              | 46.83            | 54       | -7.17  | AV               |
| Horizontal                         | 4434.093       | 62.10            | -10.51            | 51.59            | 74       | -22.41 | PK               |
| Horizontal                         | 4434.093       | 43.49            | -10.51            | 32.98            | 54       | -21.02 | AV               |
| Horizontal                         | 11020.005      | 53.83            | -0.47             | 53.36            | 68.2     | -14.84 | PK               |
| Horizontal                         | 11020.005      | 43.86            | -0.47             | 43.39            | 54       | -10.61 | AV               |
| Horizontal                         | 16530.034      | 53.33            | 3.05              | 56.38            | 74       | -17.62 | PK               |
| Horizontal                         | 16530.034      | 44.46            | 3.05              | 47.51            | 54       | -6.49  | AV               |
| middle Channel (5550 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4592.009       | 62.34            | -10.20            | 52.14            | 74       | -21.86 | PK               |
| Vertical                           | 4592.009       | 43.95            | -10.20            | 33.75            | 54       | -20.25 | AV               |
| Vertical                           | 11100.083      | 63.05            | -0.57             | 62.48            | 68.2     | -5.72  | PK               |
| Vertical                           | 11100.083      | 43.38            | -0.57             | 42.81            | 54       | -11.19 | AV               |
| Vertical                           | 16650.031      | 62.93            | 3.58              | 66.51            | 74       | -7.49  | PK               |
| Vertical                           | 16650.031      | 43.88            | 3.58              | 47.46            | 54       | -6.54  | AV               |
| Horizontal                         | 4592.043       | 63.16            | -10.20            | 52.96            | 74       | -21.04 | PK               |
| Horizontal                         | 4592.043       | 43.22            | -10.20            | 33.02            | 54       | -20.98 | AV               |
| Horizontal                         | 11100.012      | 53.53            | -0.57             | 52.96            | 68.2     | -15.24 | PK               |
| Horizontal                         | 11100.012      | 42.69            | -0.57             | 42.12            | 54       | -11.88 | AV               |
| Horizontal                         | 16650.002      | 52.29            | 3.58              | 55.87            | 74       | -18.13 | PK               |
| Horizontal                         | 16650.002      | 44.48            | 3.58              | 48.06            | 54       | -5.94  | AV               |
| High Channel (5670 MHz)-Above 1G   |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4739.003       | 62.50            | -9.45             | 53.05            | 68.2     | -15.15 | PK               |
| Vertical                           | 4739.003       | 43.25            | -9.45             | 33.80            | 54       | -20.20 | AV               |
| Vertical                           | 11340.139      | 60.56            | -0.13             | 60.43            | 68.2     | -7.77  | PK               |
| Vertical                           | 11340.139      | 43.56            | -0.13             | 43.43            | 54       | -10.57 | AV               |
| Vertical                           | 17010.097      | 63.68            | 3.91              | 67.59            | 74       | -6.41  | PK               |
| Vertical                           | 17010.097      | 43.85            | 3.91              | 47.76            | 54       | -6.24  | AV               |
| Horizontal                         | 4739.097       | 63.78            | -9.45             | 54.33            | 68.2     | -13.87 | PK               |
| Horizontal                         | 4739.097       | 43.22            | -9.45             | 33.77            | 54       | -20.23 | AV               |
| Horizontal                         | 11340.039      | 51.11            | -0.13             | 50.98            | 68.2     | -17.22 | PK               |
| Horizontal                         | 11340.039      | 43.29            | -0.13             | 43.16            | 54       | -10.84 | AV               |
| Horizontal                         | 17010.083      | 52.94            | 3.91              | 56.85            | 74       | -17.15 | PK               |
| Horizontal                         | 17010.083      | 41.37            | 3.91              | 45.28            | 54       | -8.72  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.  
The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
Emission level (dBuV/m) = 20 log Emission level (uV/m).  
Correct Factor =Antenna Factor + Cable Loss - Preamp Factor  
Over = Reading Level + Correct Factor - Limits  
Test Mode is MIMO Mode.

|            |                           |
|------------|---------------------------|
| Test Mode: | TX(5.6G) - 802.11be-EHT80 |
|------------|---------------------------|

| Polar               | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|---------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)               | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| (5530 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical            | 4434.123       | 62.76            | -10.51            | 52.25            | 68.2     | -15.95 | PK               |
| Vertical            | 4434.123       | 43.30            | -10.51            | 32.79            | 54       | -21.21 | AV               |
| Vertical            | 11060.081      | 62.22            | -0.52             | 61.70            | 68.2     | -6.50  | PK               |
| Vertical            | 11060.081      | 43.45            | -0.52             | 42.93            | 54       | -11.07 | AV               |
| Vertical            | 16590.128      | 62.94            | 3.26              | 66.20            | 74       | -7.80  | PK               |
| Vertical            | 16590.128      | 43.89            | 3.26              | 47.15            | 54       | -6.85  | AV               |
| Horizontal          | 4434.010       | 63.04            | -10.51            | 52.53            | 68.2     | -15.67 | PK               |
| Horizontal          | 4434.010       | 43.44            | -10.51            | 32.93            | 54       | -21.07 | AV               |
| Horizontal          | 11060.060      | 50.30            | -0.52             | 49.78            | 68.2     | -18.42 | PK               |
| Horizontal          | 11060.060      | 42.04            | -0.52             | 41.52            | 54       | -12.48 | AV               |
| Horizontal          | 16590.040      | 51.22            | 3.26              | 54.48            | 74       | -19.52 | PK               |
| Horizontal          | 16590.040      | 44.26            | 3.26              | 47.52            | 54       | -6.48  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.  
The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
Emission level (dBuV/m) = 20 log Emission level (uV/m).  
Correct Factor =Antenna Factor + Cable Loss - Preamp Factor  
Over = Reading Level + Correct Factor - Limits  
Test Mode is MIMO Mode.

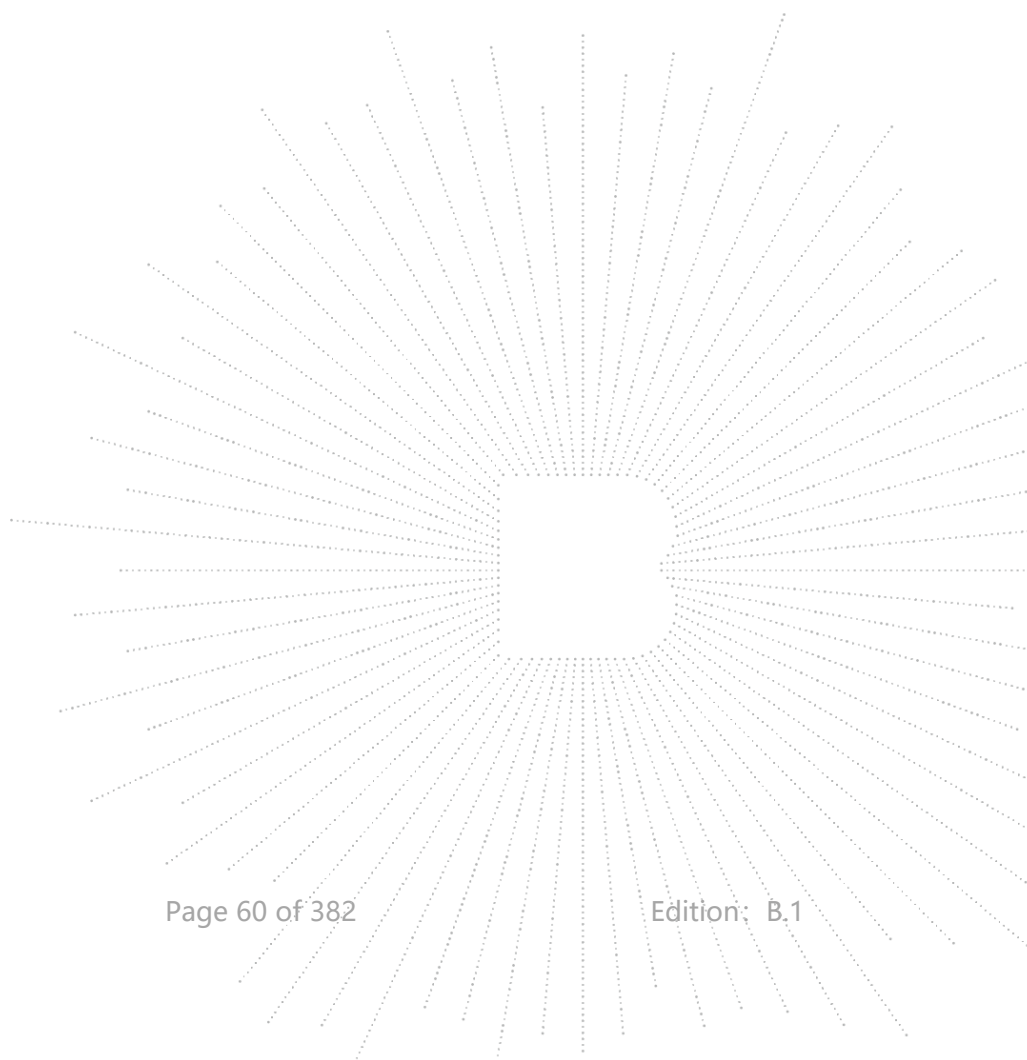

|            |                    |
|------------|--------------------|
| Test Mode: | TX(5.8G) - 802.11a |
|------------|--------------------|

| Polar                              | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|------------------------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)                              | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| Low Channel (5745 MHz)-Above 1G    |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4679.198       | 71.13            | -10.36            | 60.77            | 74       | -13.23 | PK               |
| Vertical                           | 4679.198       | 59.40            | -10.36            | 49.04            | 54       | -4.96  | AV               |
| Vertical                           | 11490.005      | 60.55            | -0.19             | 60.36            | 68.2     | -7.84  | PK               |
| Vertical                           | 11490.005      | 49.19            | -0.19             | 49.00            | 54       | -5.00  | AV               |
| Vertical                           | 17235.159      | 59.22            | 4.28              | 63.50            | 68.2     | -4.70  | PK               |
| Vertical                           | 17235.159      | 44.58            | 4.28              | 48.86            | 54       | -5.14  | AV               |
| Horizontal                         | 4679.171       | 70.27            | -10.36            | 59.91            | 74       | -14.09 | PK               |
| Horizontal                         | 4679.171       | 59.17            | -10.36            | 48.81            | 54       | -5.19  | AV               |
| Horizontal                         | 11490.082      | 63.94            | -0.19             | 63.75            | 68.2     | -4.45  | PK               |
| Horizontal                         | 11490.082      | 49.47            | -0.19             | 49.28            | 54       | -4.72  | AV               |
| Horizontal                         | 17235.184      | 57.47            | 4.28              | 61.75            | 68.2     | -6.45  | PK               |
| Horizontal                         | 17235.184      | 44.70            | 4.28              | 48.98            | 54       | -5.02  | AV               |
| middle Channel (5785 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4592.017       | 73.56            | -10.20            | 63.36            | 74       | -10.64 | PK               |
| Vertical                           | 4592.017       | 59.12            | -10.20            | 48.92            | 54       | -5.08  | AV               |
| Vertical                           | 11570.024      | 62.29            | -0.21             | 62.08            | 68.2     | -6.12  | PK               |
| Vertical                           | 11570.024      | 49.45            | -0.21             | 49.24            | 54       | -4.76  | AV               |
| Vertical                           | 17355.073      | 57.02            | 4.68              | 61.70            | 68.2     | -6.50  | PK               |
| Vertical                           | 17355.073      | 44.29            | 4.68              | 48.97            | 54       | -5.03  | AV               |
| Horizontal                         | 4592.130       | 73.44            | -10.20            | 63.24            | 74       | -10.76 | PK               |
| Horizontal                         | 4592.130       | 59.46            | -10.20            | 49.26            | 54       | -4.74  | AV               |
| Horizontal                         | 11570.115      | 62.02            | -0.21             | 61.81            | 68.2     | -6.39  | PK               |
| Horizontal                         | 11570.115      | 49.88            | -0.21             | 49.67            | 54       | -4.33  | AV               |
| Horizontal                         | 17355.050      | 58.84            | 4.68              | 63.52            | 68.2     | -4.68  | PK               |
| Horizontal                         | 17355.050      | 44.32            | 4.68              | 49.00            | 54       | -5.00  | AV               |
| High Channel (5825 MHz)-Above 1G   |                |                  |                   |                  |          |        |                  |
| Vertical                           | 6039.106       | 70.42            | -7.08             | 63.34            | 68.2     | -4.86  | PK               |
| Vertical                           | 6039.106       | 59.06            | -7.08             | 51.98            | 54       | -2.02  | AV               |
| Vertical                           | 11650.170      | 64.28            | -0.50             | 63.78            | 74       | -10.22 | PK               |
| Vertical                           | 11650.170      | 49.79            | -0.50             | 49.29            | 54       | -4.71  | AV               |
| Vertical                           | 17475.185      | 58.67            | 4.77              | 63.44            | 68.2     | -4.76  | PK               |
| Vertical                           | 17475.185      | 44.28            | 4.77              | 49.05            | 54       | -4.95  | AV               |
| Horizontal                         | 6039.156       | 74.75            | -7.08             | 67.67            | 68.2     | -0.53  | PK               |
| Horizontal                         | 6039.156       | 59.56            | -7.08             | 52.48            | 54       | -1.52  | AV               |
| Horizontal                         | 11650.145      | 64.50            | -0.50             | 64.00            | 74       | -10.00 | PK               |
| Horizontal                         | 11650.145      | 50.00            | -0.50             | 49.50            | 54       | -4.50  | AV               |
| Horizontal                         | 17475.187      | 56.96            | 4.77              | 61.73            | 68.2     | -6.47  | PK               |
| Horizontal                         | 17475.187      | 44.10            | 4.77              | 48.87            | 54       | -5.13  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor = Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor - Limits

The worst case is Antenna A

|            |                         |
|------------|-------------------------|
| Test Mode: | TX(5.8G) - 802.11n-HT20 |
|------------|-------------------------|

| Polar                              | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|------------------------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)                              | (MHz)          | (dBuV/m)         | (dB)              | (dBuV/m)         | (dBuV/m) | (dB)   |                  |
| Low Channel (5745 MHz)-Above 1G    |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4679.037       | 72.34            | -10.36            | 61.98            | 74       | -12.02 | PK               |
| Vertical                           | 4679.037       | 59.88            | -10.36            | 49.52            | 54       | -4.48  | AV               |
| Vertical                           | 11490.091      | 60.95            | -0.19             | 60.76            | 68.2     | -7.44  | PK               |
| Vertical                           | 11490.091      | 49.71            | -0.19             | 49.52            | 54       | -4.48  | AV               |
| Vertical                           | 17235.191      | 58.00            | 4.28              | 62.28            | 68.2     | -5.92  | PK               |
| Vertical                           | 17235.191      | 44.62            | 4.28              | 48.90            | 54       | -5.10  | AV               |
| Horizontal                         | 4679.092       | 74.84            | -10.36            | 64.48            | 74       | -9.52  | PK               |
| Horizontal                         | 4679.092       | 59.79            | -10.36            | 49.43            | 54       | -4.57  | AV               |
| Horizontal                         | 11490.197      | 60.27            | -0.19             | 60.08            | 68.2     | -8.12  | PK               |
| Horizontal                         | 11490.197      | 49.15            | -0.19             | 48.96            | 54       | -5.04  | AV               |
| Horizontal                         | 17235.199      | 55.80            | 4.28              | 60.08            | 68.2     | -8.12  | PK               |
| Horizontal                         | 17235.199      | 44.46            | 4.28              | 48.74            | 54       | -5.26  | AV               |
| middle Channel (5785 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical                           | 4592.096       | 73.88            | -10.20            | 63.68            | 74       | -10.32 | PK               |
| Vertical                           | 4592.096       | 59.62            | -10.20            | 49.42            | 54       | -4.58  | AV               |
| Vertical                           | 11570.111      | 60.76            | -0.21             | 60.55            | 68.2     | -7.65  | PK               |
| Vertical                           | 11570.111      | 49.12            | -0.21             | 48.91            | 54       | -5.09  | AV               |
| Vertical                           | 17355.171      | 59.81            | 4.68              | 64.49            | 68.2     | -3.71  | PK               |
| Vertical                           | 17355.171      | 44.71            | 4.68              | 49.39            | 54       | -4.61  | AV               |
| Horizontal                         | 4592.118       | 73.62            | -10.20            | 63.42            | 74       | -10.58 | PK               |
| Horizontal                         | 4592.118       | 59.09            | -10.20            | 48.89            | 54       | -5.11  | AV               |
| Horizontal                         | 11570.116      | 64.17            | -0.21             | 63.96            | 68.2     | -4.24  | PK               |
| Horizontal                         | 11570.116      | 49.33            | -0.21             | 49.12            | 54       | -4.88  | AV               |
| Horizontal                         | 17355.191      | 57.38            | 4.68              | 62.06            | 68.2     | -6.14  | PK               |
| Horizontal                         | 17355.191      | 44.53            | 4.68              | 49.21            | 54       | -4.79  | AV               |
| High Channel (5825 MHz)-Above 1G   |                |                  |                   |                  |          |        |                  |
| Vertical                           | 6039.058       | 74.51            | -7.08             | 67.43            | 68.2     | -0.77  | PK               |
| Vertical                           | 6039.058       | 59.60            | -7.08             | 52.52            | 54       | -1.48  | AV               |
| Vertical                           | 11650.118      | 62.22            | -0.50             | 61.72            | 74       | -12.28 | PK               |
| Vertical                           | 11650.118      | 49.77            | -0.50             | 49.27            | 54       | -4.73  | AV               |
| Vertical                           | 17475.182      | 59.27            | 4.77              | 64.04            | 68.2     | -4.16  | PK               |
| Vertical                           | 17475.182      | 44.84            | 4.77              | 49.61            | 54       | -4.39  | AV               |
| Horizontal                         | 6039.165       | 72.56            | -7.08             | 65.48            | 68.2     | -2.72  | PK               |
| Horizontal                         | 6039.165       | 59.70            | -7.08             | 52.62            | 54       | -1.38  | AV               |
| Horizontal                         | 11650.112      | 63.69            | -0.50             | 63.19            | 74       | -10.81 | PK               |
| Horizontal                         | 11650.112      | 49.31            | -0.50             | 48.81            | 54       | -5.19  | AV               |
| Horizontal                         | 17475.188      | 56.65            | 4.77              | 61.42            | 68.2     | -6.78  | PK               |
| Horizontal                         | 17475.188      | 44.69            | 4.77              | 49.46            | 54       | -4.54  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.  
The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
Emission level (dBuV/m) = 20 log Emission level (uV/m).  
Correct Factor =Antenna Factor + Cable Loss - Preamp Factor  
Over = Reading Level + Correct Factor – Limits  
Test Mode is MIMO Mode.

|            |                         |
|------------|-------------------------|
| Test Mode: | TX(5.8G) - 802.11n-HT40 |
|------------|-------------------------|

| Polar                            | Fre-<br>quency | Reading<br>Level | Correct<br>Factor | Measure-<br>ment | Limits   | Over   | Detector<br>Type |
|----------------------------------|----------------|------------------|-------------------|------------------|----------|--------|------------------|
| (H/V)                            | (MHz)          | (dBUV/m)         | (dB)              | (dBUV/m)         | (dBUV/m) | (dB)   |                  |
| Low Channel (5755 MHz)-Above 1G  |                |                  |                   |                  |          |        |                  |
| Vertical                         | 4679.181       | 74.39            | -10.36            | 64.03            | 74       | -9.97  | PK               |
| Vertical                         | 4679.181       | 59.82            | -10.36            | 49.46            | 54       | -4.54  | AV               |
| Vertical                         | 11510.095      | 64.26            | -0.26             | 64.00            | 74       | -10.00 | PK               |
| Vertical                         | 11510.095      | 49.84            | -0.26             | 49.58            | 54       | -4.42  | AV               |
| Vertical                         | 17265.177      | 59.62            | 4.35              | 63.97            | 68.2     | -4.23  | PK               |
| Vertical                         | 17265.177      | 44.83            | 4.35              | 49.18            | 54       | -4.82  | AV               |
| Horizontal                       | 4679.127       | 72.56            | -10.36            | 62.20            | 74       | -11.80 | PK               |
| Horizontal                       | 4679.127       | 59.89            | -10.36            | 49.53            | 54       | -4.47  | AV               |
| Horizontal                       | 11510.179      | 63.54            | -0.26             | 63.28            | 74       | -10.72 | PK               |
| Horizontal                       | 11510.179      | 49.68            | -0.26             | 49.42            | 54       | -4.58  | AV               |
| Horizontal                       | 17265.137      | 55.71            | 4.35              | 60.06            | 68.2     | -8.14  | PK               |
| Horizontal                       | 17265.137      | 44.96            | 4.35              | 49.31            | 54       | -4.69  | AV               |
| High Channel (5795 MHz)-Above 1G |                |                  |                   |                  |          |        |                  |
| Vertical                         | 6039.165       | 74.70            | -7.08             | 67.62            | 68.2     | -0.58  | PK               |
| Vertical                         | 6039.165       | 59.74            | -7.08             | 52.66            | 54       | -1.34  | AV               |
| Vertical                         | 11590.118      | 62.66            | -0.20             | 62.46            | 74       | -11.54 | PK               |
| Vertical                         | 11590.118      | 50.00            | -0.20             | 49.80            | 54       | -4.20  | AV               |
| Vertical                         | 17385.029      | 55.57            | 4.81              | 60.38            | 68.2     | -7.82  | PK               |
| Vertical                         | 17385.029      | 44.60            | 4.81              | 49.41            | 54       | -4.59  | AV               |
| Horizontal                       | 6039.135       | 74.98            | -7.08             | 67.90            | 68.2     | -0.30  | PK               |
| Horizontal                       | 6039.135       | 59.30            | -7.08             | 52.22            | 54       | -1.78  | AV               |
| Horizontal                       | 11590.025      | 61.12            | -0.20             | 60.92            | 74       | -13.08 | PK               |
| Horizontal                       | 11590.025      | 49.83            | -0.20             | 49.63            | 54       | -4.37  | AV               |
| Horizontal                       | 17385.189      | 55.06            | 4.81              | 59.87            | 68.2     | -8.33  | PK               |
| Horizontal                       | 17385.189      | 44.90            | 4.81              | 49.71            | 54       | -4.29  | AV               |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor - Limits

Test Mode is MIMO Mode.

Test Mode is MIMO Mode.

Test Mode: TX(5.8G) - 802.11ac-VHT20

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5745 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4679.163  | 74.84         | -10.36         | 64.48       | 74       | -9.52  | Pk            |
| Vertical                           | 4679.163  | 59.26         | -10.36         | 48.90       | 54       | -5.10  | AV            |
| Vertical                           | 11490.156 | 64.31         | -0.19          | 64.12       | 68.2     | -4.08  | Pk            |
| Vertical                           | 11490.156 | 49.56         | -0.19          | 49.37       | 54       | -4.63  | AV            |
| Vertical                           | 17235.154 | 57.47         | 4.28           | 61.75       | 68.2     | -6.45  | Pk            |
| Vertical                           | 17235.154 | 44.73         | 4.28           | 49.01       | 54       | -4.99  | AV            |
| Horizontal                         | 4679.139  | 72.75         | -10.36         | 62.39       | 74       | -11.61 | Pk            |
| Horizontal                         | 4679.139  | 59.93         | -10.36         | 49.57       | 54       | -4.43  | AV            |
| Horizontal                         | 11490.073 | 62.93         | -0.19          | 62.74       | 68.2     | -5.46  | Pk            |
| Horizontal                         | 11490.073 | 49.65         | -0.19          | 49.46       | 54       | -4.54  | AV            |
| Horizontal                         | 17235.008 | 59.32         | 4.28           | 63.60       | 68.2     | -4.60  | Pk            |
| Horizontal                         | 17235.008 | 44.19         | 4.28           | 48.47       | 54       | -5.53  | AV            |
| middle Channel (5785 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4592.090  | 73.51         | -10.20         | 63.31       | 74       | -10.69 | Pk            |
| Vertical                           | 4592.090  | 59.23         | -10.20         | 49.03       | 54       | -4.97  | AV            |
| Vertical                           | 11570.095 | 62.69         | -0.21          | 62.48       | 68.2     | -5.72  | Pk            |
| Vertical                           | 11570.095 | 49.39         | -0.21          | 49.18       | 54       | -4.82  | AV            |
| Vertical                           | 17355.037 | 57.17         | 4.68           | 61.85       | 68.2     | -6.35  | Pk            |
| Vertical                           | 17355.037 | 44.65         | 4.68           | 49.33       | 54       | -4.67  | AV            |
| Horizontal                         | 4592.088  | 70.85         | -10.20         | 60.65       | 74       | -13.35 | Pk            |
| Horizontal                         | 4592.088  | 59.62         | -10.20         | 49.42       | 54       | -4.58  | AV            |
| Horizontal                         | 11570.023 | 61.50         | -0.21          | 61.29       | 68.2     | -6.91  | Pk            |
| Horizontal                         | 11570.023 | 49.95         | -0.21          | 49.74       | 54       | -4.26  | AV            |
| Horizontal                         | 17355.169 | 58.40         | 4.68           | 63.08       | 68.2     | -5.12  | Pk            |
| Horizontal                         | 17355.169 | 44.19         | 4.68           | 48.87       | 54       | -5.13  | AV            |
| High Channel (5825 MHz)-Above 1G   |           |               |                |             |          |        |               |
| Vertical                           | 6039.112  | 72.98         | -7.08          | 65.90       | 68.2     | -2.30  | Pk            |
| Vertical                           | 6039.112  | 59.20         | -7.08          | 52.12       | 54       | -1.88  | AV            |
| Vertical                           | 11650.078 | 62.33         | -0.50          | 61.83       | 74       | -12.17 | Pk            |
| Vertical                           | 11650.078 | 49.91         | -0.50          | 49.41       | 54       | -4.59  | AV            |
| Vertical                           | 17475.084 | 55.55         | 4.77           | 60.32       | 68.2     | -7.88  | Pk            |
| Vertical                           | 17475.084 | 44.09         | 4.77           | 48.86       | 54       | -5.14  | AV            |
| Horizontal                         | 6039.047  | 74.07         | -7.08          | 66.99       | 68.2     | -1.21  | Pk            |
| Horizontal                         | 6039.047  | 59.75         | -7.08          | 52.67       | 54       | -1.33  | AV            |
| Horizontal                         | 11650.169 | 62.48         | -0.50          | 61.98       | 74       | -12.02 | Pk            |
| Horizontal                         | 11650.169 | 49.28         | -0.50          | 48.78       | 54       | -5.22  | AV            |
| Horizontal                         | 17475.129 | 59.67         | 4.77           | 64.44       | 68.2     | -3.76  | Pk            |
| Horizontal                         | 17475.129 | 44.13         | 4.77           | 48.90       | 54       | -5.10  | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor - Limits

Test Mode: TX(5.8G) - 802.11ac-VHT40

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5755 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4679.145  | 73.90         | -10.36         | 63.54       | 74       | -10.46 | AV            |
| Vertical                           | 4679.145  | 59.39         | -10.36         | 49.03       | 54       | -4.97  | Pk            |
| Vertical                           | 11510.097 | 60.45         | -0.26          | 60.19       | 74       | -13.81 | AV            |
| Vertical                           | 11510.097 | 49.78         | -0.26          | 49.52       | 54       | -4.48  | Pk            |
| Vertical                           | 17265.065 | 55.61         | 4.35           | 59.96       | 68.2     | -8.24  | AV            |
| Vertical                           | 17265.065 | 44.09         | 4.35           | 48.44       | 54       | -5.56  | Pk            |
| Horizontal                         | 4679.176  | 73.48         | -10.36         | 63.12       | 74       | -10.88 | AV            |
| Horizontal                         | 4679.176  | 59.23         | -10.36         | 48.87       | 54       | -5.13  | Pk            |
| Horizontal                         | 11510.093 | 61.95         | -0.26          | 61.69       | 74       | -12.31 | AV            |
| Horizontal                         | 11510.093 | 49.90         | -0.26          | 49.64       | 54       | -4.36  | Pk            |
| Horizontal                         | 17265.067 | 57.09         | 4.35           | 61.44       | 68.2     | -6.76  | AV            |
| Horizontal                         | 17265.067 | 44.40         | 4.35           | 48.75       | 54       | -5.25  | AV            |
| middle Channel (5795 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 6039.110  | 74.49         | -7.08          | 67.41       | 68.2     | -0.79  | Pk            |
| Vertical                           | 6039.110  | 59.02         | -7.08          | 51.94       | 54       | -2.06  | AV            |
| Vertical                           | 11590.012 | 64.04         | -0.20          | 63.84       | 74       | -10.16 | Pk            |
| Vertical                           | 11590.012 | 49.19         | -0.20          | 48.99       | 54       | -5.01  | AV            |
| Vertical                           | 17385.101 | 56.11         | 4.81           | 60.92       | 68.2     | -7.28  | Pk            |
| Vertical                           | 17385.101 | 44.72         | 4.81           | 49.53       | 54       | -4.47  | AV            |
| Horizontal                         | 6039.014  | 74.58         | -7.08          | 67.50       | 68.2     | -0.70  | Pk            |
| Horizontal                         | 6039.014  | 59.83         | -7.08          | 52.75       | 54       | -1.25  | AV            |
| Horizontal                         | 11590.025 | 61.81         | -0.20          | 61.61       | 74       | -12.39 | Pk            |
| Horizontal                         | 11590.025 | 49.16         | -0.20          | 48.96       | 54       | -5.04  | AV            |
| Horizontal                         | 17385.055 | 56.84         | 4.81           | 61.65       | 68.2     | -6.55  | Pk            |
| Horizontal                         | 17385.055 | 44.24         | 4.81           | 49.05       | 54       | -4.95  | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.  
The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
Emission level (dBuV/m) = 20 log Emission level (uV/m).  
Correct Factor =Antenna Factor + Cable Loss - Preamp Factor  
Over = Reading Level + Correct Factor – Limits  
Test Mode is MIMO Mode.

|            |                           |
|------------|---------------------------|
| Test Mode: | TX(5.8G) - 802.11ac-VHT80 |
|------------|---------------------------|

| Polar                           | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|---------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                           | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5775 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                        | 4679.137  | 71.20         | -10.36         | 60.84       | 74       | -13.16 | AV            |
| Vertical                        | 4679.137  | 59.36         | -10.36         | 49.00       | 54       | -5.00  | Pk            |
| Vertical                        | 11550.090 | 63.18         | 0.23           | 63.41       | 74       | -10.59 | AV            |
| Vertical                        | 11550.090 | 49.75         | 0.23           | 49.98       | 54       | -4.02  | Pk            |
| Vertical                        | 17325.160 | 58.98         | 4.55           | 63.53       | 68.2     | -4.67  | AV            |
| Vertical                        | 17325.160 | 44.81         | 4.55           | 49.36       | 54       | -4.64  | Pk            |
| Horizontal                      | 4679.069  | 74.04         | -10.36         | 63.68       | 74       | -10.32 | AV            |
| Horizontal                      | 4679.069  | 59.24         | -10.36         | 48.88       | 54       | -5.12  | Pk            |
| Horizontal                      | 11550.186 | 63.12         | 0.23           | 63.35       | 74       | -10.65 | AV            |
| Horizontal                      | 11550.186 | 49.29         | 0.23           | 49.52       | 54       | -4.48  | Pk            |
| Horizontal                      | 17325.079 | 58.81         | 4.55           | 63.36       | 68.2     | -4.84  | AV            |
| Horizontal                      | 17325.079 | 44.94         | 4.55           | 49.49       | 54       | -4.51  | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor – Limits

Test Mode is MIMO Mode.

Test Mode is MIMO Mode.

Test Mode: TX(5.8G) - 802.11ax-HE20

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5745 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4679.009  | 73.89         | -10.36         | 63.53       | 74       | -10.47 | Pk            |
| Vertical                           | 4679.009  | 59.52         | -10.36         | 49.16       | 54       | -4.84  | AV            |
| Vertical                           | 11490.146 | 64.47         | -0.19          | 64.28       | 68.2     | -3.92  | Pk            |
| Vertical                           | 11490.146 | 49.85         | -0.19          | 49.66       | 54       | -4.34  | AV            |
| Vertical                           | 17235.110 | 56.62         | 4.28           | 60.90       | 68.2     | -7.30  | Pk            |
| Vertical                           | 17235.110 | 44.56         | 4.28           | 48.84       | 54       | -5.16  | AV            |
| Horizontal                         | 4679.109  | 74.40         | -10.36         | 64.04       | 74       | -9.96  | Pk            |
| Horizontal                         | 4679.109  | 59.98         | -10.36         | 49.62       | 54       | -4.38  | AV            |
| Horizontal                         | 11490.158 | 62.40         | -0.19          | 62.21       | 68.2     | -5.99  | Pk            |
| Horizontal                         | 11490.158 | 49.85         | -0.19          | 49.66       | 54       | -4.34  | AV            |
| Horizontal                         | 17235.144 | 58.42         | 4.28           | 62.70       | 68.2     | -5.50  | Pk            |
| Horizontal                         | 17235.144 | 44.94         | 4.28           | 49.22       | 54       | -4.78  | AV            |
| middle Channel (5785 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4592.136  | 72.31         | -10.20         | 62.11       | 74       | -11.89 | Pk            |
| Vertical                           | 4592.136  | 59.78         | -10.20         | 49.58       | 54       | -4.42  | AV            |
| Vertical                           | 11570.174 | 62.71         | -0.21          | 62.50       | 68.2     | -5.70  | Pk            |
| Vertical                           | 11570.174 | 49.77         | -0.21          | 49.56       | 54       | -4.44  | AV            |
| Vertical                           | 17355.072 | 59.15         | 4.68           | 63.83       | 68.2     | -4.37  | Pk            |
| Vertical                           | 17355.072 | 45.00         | 4.68           | 49.68       | 54       | -4.32  | AV            |
| Horizontal                         | 4592.060  | 71.50         | -10.20         | 61.30       | 74       | -12.70 | Pk            |
| Horizontal                         | 4592.060  | 59.17         | -10.20         | 48.97       | 54       | -5.03  | AV            |
| Horizontal                         | 11570.027 | 61.48         | -0.21          | 61.27       | 68.2     | -6.93  | Pk            |
| Horizontal                         | 11570.027 | 49.09         | -0.21          | 48.88       | 54       | -5.12  | AV            |
| Horizontal                         | 17355.169 | 55.39         | 4.68           | 60.07       | 68.2     | -8.13  | Pk            |
| Horizontal                         | 17355.169 | 44.00         | 4.68           | 48.68       | 54       | -5.32  | AV            |
| High Channel (5825 MHz)-Above 1G   |           |               |                |             |          |        |               |
| Vertical                           | 6039.047  | 73.02         | -7.08          | 65.94       | 68.2     | -2.26  | Pk            |
| Vertical                           | 6039.047  | 59.61         | -7.08          | 52.53       | 54       | -1.47  | AV            |
| Vertical                           | 11650.089 | 60.96         | -0.50          | 60.46       | 74       | -13.54 | Pk            |
| Vertical                           | 11650.089 | 49.90         | -0.50          | 49.40       | 54       | -4.60  | AV            |
| Vertical                           | 17475.035 | 58.51         | 4.77           | 63.28       | 68.2     | -4.92  | Pk            |
| Vertical                           | 17475.035 | 44.61         | 4.77           | 49.38       | 54       | -4.62  | AV            |
| Horizontal                         | 6039.049  | 71.82         | -7.08          | 64.74       | 68.2     | -3.46  | Pk            |
| Horizontal                         | 6039.049  | 59.53         | -7.08          | 52.45       | 54       | -1.55  | AV            |
| Horizontal                         | 11650.146 | 60.03         | -0.50          | 59.53       | 74       | -14.47 | Pk            |
| Horizontal                         | 11650.146 | 49.61         | -0.50          | 49.11       | 54       | -4.89  | AV            |
| Horizontal                         | 17475.034 | 56.23         | 4.77           | 61.00       | 68.2     | -7.20  | Pk            |
| Horizontal                         | 17475.034 | 44.84         | 4.77           | 49.61       | 54       | -4.39  | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor - Limits

Test Mode: TX(5.8G) - 802.11ax-HE40

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5755 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4679.079  | 72.64         | -10.36         | 62.28       | 74       | -11.72 | AV            |
| Vertical                           | 4679.079  | 59.45         | -10.36         | 49.09       | 54       | -4.91  | Pk            |
| Vertical                           | 11510.015 | 60.19         | -0.26          | 59.93       | 74       | -14.07 | AV            |
| Vertical                           | 11510.015 | 49.66         | -0.26          | 49.40       | 54       | -4.60  | Pk            |
| Vertical                           | 17265.096 | 57.20         | 4.35           | 61.55       | 68.2     | -6.65  | AV            |
| Vertical                           | 17265.096 | 44.33         | 4.35           | 48.68       | 54       | -5.32  | Pk            |
| Horizontal                         | 4679.169  | 74.42         | -10.36         | 64.06       | 74       | -9.94  | AV            |
| Horizontal                         | 4679.169  | 59.10         | -10.36         | 48.74       | 54       | -5.26  | Pk            |
| Horizontal                         | 11510.170 | 64.66         | -0.26          | 64.40       | 74       | -9.60  | AV            |
| Horizontal                         | 11510.170 | 49.97         | -0.26          | 49.71       | 54       | -4.29  | Pk            |
| Horizontal                         | 17265.139 | 57.95         | 4.35           | 62.30       | 68.2     | -5.90  | AV            |
| Horizontal                         | 17265.139 | 44.56         | 4.35           | 48.91       | 54       | -5.09  | AV            |
| middle Channel (5795 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 6039.021  | 74.82         | -7.08          | 67.74       | 68.2     | -0.46  | Pk            |
| Vertical                           | 6039.021  | 59.97         | -7.08          | 52.89       | 54       | -1.11  | AV            |
| Vertical                           | 11590.008 | 61.47         | -0.20          | 61.27       | 74       | -12.73 | Pk            |
| Vertical                           | 11590.008 | 49.78         | -0.20          | 49.58       | 54       | -4.42  | AV            |
| Vertical                           | 17385.145 | 55.50         | 4.81           | 60.31       | 68.2     | -7.89  | Pk            |
| Vertical                           | 17385.145 | 44.02         | 4.81           | 48.83       | 54       | -5.17  | AV            |
| Horizontal                         | 6039.015  | 73.43         | -7.08          | 66.35       | 68.2     | -1.85  | Pk            |
| Horizontal                         | 6039.015  | 59.11         | -7.08          | 52.03       | 54       | -1.97  | AV            |
| Horizontal                         | 11590.188 | 62.88         | -0.20          | 62.68       | 74       | -11.32 | Pk            |
| Horizontal                         | 11590.188 | 49.54         | -0.20          | 49.34       | 54       | -4.66  | AV            |
| Horizontal                         | 17385.128 | 57.64         | 4.81           | 62.45       | 68.2     | -5.75  | Pk            |
| Horizontal                         | 17385.128 | 44.56         | 4.81           | 49.37       | 54       | -4.63  | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.  
The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
Emission level (dBuV/m) = 20 log Emission level (uV/m).  
Correct Factor =Antenna Factor + Cable Loss - Preamp Factor  
Over = Reading Level + Correct Factor - Limits  
Test Mode is MIMO Mode.

|            |                          |
|------------|--------------------------|
| Test Mode: | TX(5.8G) - 802.11ax-HE80 |
|------------|--------------------------|

| Polar                           | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|---------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                           | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5775 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                        | 4679.028  | 73.07         | -10.36         | 62.71       | 74       | -11.29 | AV            |
| Vertical                        | 4679.028  | 59.15         | -10.36         | 48.79       | 54       | -5.21  | Pk            |
| Vertical                        | 11550.116 | 60.16         | 0.23           | 60.39       | 74       | -13.61 | AV            |
| Vertical                        | 11550.116 | 49.06         | 0.23           | 49.29       | 54       | -4.71  | Pk            |
| Vertical                        | 17325.006 | 58.92         | 4.55           | 63.47       | 68.2     | -4.73  | AV            |
| Vertical                        | 17325.006 | 44.66         | 4.55           | 49.21       | 54       | -4.79  | Pk            |
| Horizontal                      | 4679.190  | 74.68         | -10.36         | 64.32       | 74       | -9.68  | AV            |
| Horizontal                      | 4679.190  | 59.71         | -10.36         | 49.35       | 54       | -4.65  | Pk            |
| Horizontal                      | 11550.112 | 64.12         | 0.23           | 64.35       | 74       | -9.65  | AV            |
| Horizontal                      | 11550.112 | 49.33         | 0.23           | 49.56       | 54       | -4.44  | Pk            |
| Horizontal                      | 17325.063 | 59.23         | 4.55           | 63.78       | 68.2     | -4.42  | AV            |
| Horizontal                      | 17325.063 | 44.72         | 4.55           | 49.27       | 54       | -4.73  | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor – Limits

Test Mode is MIMO Mode.

Test Mode is MIMO Mode.

Test Mode: TX(5.8G) - 802.11be-EHT20

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5745 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4679.024  | 73.25         | -10.36         | 62.89       | 74       | -11.11 | Pk            |
| Vertical                           | 4679.024  | 59.32         | -10.36         | 48.96       | 54       | -5.04  | AV            |
| Vertical                           | 11490.149 | 61.74         | -0.19          | 61.55       | 68.2     | -6.65  | Pk            |
| Vertical                           | 11490.149 | 49.10         | -0.19          | 48.91       | 54       | -5.09  | AV            |
| Vertical                           | 17235.192 | 56.12         | 4.28           | 60.40       | 68.2     | -7.80  | Pk            |
| Vertical                           | 17235.192 | 44.49         | 4.28           | 48.77       | 54       | -5.23  | AV            |
| Horizontal                         | 4679.164  | 74.41         | -10.36         | 64.05       | 74       | -9.95  | Pk            |
| Horizontal                         | 4679.164  | 59.15         | -10.36         | 48.79       | 54       | -5.21  | AV            |
| Horizontal                         | 11490.080 | 63.23         | -0.19          | 63.04       | 68.2     | -5.16  | Pk            |
| Horizontal                         | 11490.080 | 49.53         | -0.19          | 49.34       | 54       | -4.66  | AV            |
| Horizontal                         | 17235.012 | 55.44         | 4.28           | 59.72       | 68.2     | -8.48  | Pk            |
| Horizontal                         | 17235.012 | 44.88         | 4.28           | 49.16       | 54       | -4.84  | AV            |
| middle Channel (5785 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 4592.184  | 73.15         | -10.20         | 62.95       | 74       | -11.05 | Pk            |
| Vertical                           | 4592.184  | 59.34         | -10.20         | 49.14       | 54       | -4.86  | AV            |
| Vertical                           | 11570.153 | 64.09         | -0.21          | 63.88       | 68.2     | -4.32  | Pk            |
| Vertical                           | 11570.153 | 49.10         | -0.21          | 48.89       | 54       | -5.11  | AV            |
| Vertical                           | 17355.003 | 59.84         | 4.68           | 64.52       | 68.2     | -3.68  | Pk            |
| Vertical                           | 17355.003 | 44.13         | 4.68           | 48.81       | 54       | -5.19  | AV            |
| Horizontal                         | 4592.146  | 71.21         | -10.20         | 61.01       | 74       | -12.99 | Pk            |
| Horizontal                         | 4592.146  | 59.27         | -10.20         | 49.07       | 54       | -4.93  | AV            |
| Horizontal                         | 11570.002 | 61.49         | -0.21          | 61.28       | 68.2     | -6.92  | Pk            |
| Horizontal                         | 11570.002 | 49.92         | -0.21          | 49.71       | 54       | -4.29  | AV            |
| Horizontal                         | 17355.177 | 56.87         | 4.68           | 61.55       | 68.2     | -6.65  | Pk            |
| Horizontal                         | 17355.177 | 44.70         | 4.68           | 49.38       | 54       | -4.62  | AV            |
| High Channel (5825 MHz)-Above 1G   |           |               |                |             |          |        |               |
| Vertical                           | 6039.118  | 74.57         | -7.08          | 67.49       | 68.2     | -0.71  | Pk            |
| Vertical                           | 6039.118  | 59.16         | -7.08          | 52.08       | 54       | -1.92  | AV            |
| Vertical                           | 11650.018 | 60.91         | -0.50          | 60.41       | 74       | -13.59 | Pk            |
| Vertical                           | 11650.018 | 49.77         | -0.50          | 49.27       | 54       | -4.73  | AV            |
| Vertical                           | 17475.131 | 59.35         | 4.77           | 64.12       | 68.2     | -4.08  | Pk            |
| Vertical                           | 17475.131 | 44.94         | 4.77           | 49.71       | 54       | -4.29  | AV            |
| Horizontal                         | 6039.189  | 74.52         | -7.08          | 67.44       | 68.2     | -0.76  | Pk            |
| Horizontal                         | 6039.189  | 59.85         | -7.08          | 52.77       | 54       | -1.23  | AV            |
| Horizontal                         | 11650.186 | 60.72         | -0.50          | 60.22       | 74       | -13.78 | Pk            |
| Horizontal                         | 11650.186 | 49.57         | -0.50          | 49.07       | 54       | -4.93  | AV            |
| Horizontal                         | 17475.122 | 56.59         | 4.77           | 61.36       | 68.2     | -6.84  | Pk            |
| Horizontal                         | 17475.122 | 44.46         | 4.77           | 49.23       | 54       | -4.77  | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.

The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Correct Factor =Antenna Factor + Cable Loss - Preamp Factor

Over = Reading Level + Correct Factor - Limits

Test Mode: TX(5.8G) - 802.11be-EHT40

| Polar                              | Frequency | Reading Level | Correct Factor | Measurement | Limits   | Over   | Detector Type |
|------------------------------------|-----------|---------------|----------------|-------------|----------|--------|---------------|
| (H/V)                              | (MHz)     | (dBuV/m)      | (dB)           | (dBuV/m)    | (dBuV/m) | (dB)   |               |
| Low Channel (5755 MHz)-Above 1G    |           |               |                |             |          |        |               |
| Vertical                           | 4679.182  | 71.09         | -10.36         | 60.73       | 74       | -13.27 | AV            |
| Vertical                           | 4679.182  | 59.95         | -10.36         | 49.59       | 54       | -4.41  | Pk            |
| Vertical                           | 11510.151 | 60.76         | -0.26          | 60.50       | 74       | -13.50 | AV            |
| Vertical                           | 11510.151 | 49.81         | -0.26          | 49.55       | 54       | -4.45  | Pk            |
| Vertical                           | 17265.105 | 59.79         | 4.35           | 64.14       | 68.2     | -4.06  | AV            |
| Vertical                           | 17265.105 | 44.70         | 4.35           | 49.05       | 54       | -4.95  | Pk            |
| Horizontal                         | 4679.020  | 70.66         | -10.36         | 60.30       | 74       | -13.70 | AV            |
| Horizontal                         | 4679.020  | 59.89         | -10.36         | 49.53       | 54       | -4.47  | Pk            |
| Horizontal                         | 11510.185 | 63.91         | -0.26          | 63.65       | 74       | -10.35 | AV            |
| Horizontal                         | 11510.185 | 49.64         | -0.26          | 49.38       | 54       | -4.62  | Pk            |
| Horizontal                         | 17265.097 | 55.70         | 4.35           | 60.05       | 68.2     | -8.15  | AV            |
| Horizontal                         | 17265.097 | 44.47         | 4.35           | 48.82       | 54       | -5.18  | AV            |
| middle Channel (5795 MHz)-Above 1G |           |               |                |             |          |        |               |
| Vertical                           | 6039.031  | 71.26         | -7.08          | 64.18       | 68.2     | -4.02  | Pk            |
| Vertical                           | 6039.031  | 59.17         | -7.08          | 52.09       | 54       | -1.91  | AV            |
| Vertical                           | 11590.001 | 64.45         | -0.20          | 64.25       | 74       | -9.75  | Pk            |
| Vertical                           | 11590.001 | 49.39         | -0.20          | 49.19       | 54       | -4.81  | AV            |
| Vertical                           | 17385.053 | 55.18         | 4.81           | 59.99       | 68.2     | -8.21  | Pk            |
| Vertical                           | 17385.053 | 44.60         | 4.81           | 49.41       | 54       | -4.59  | AV            |
| Horizontal                         | 6039.133  | 73.86         | -7.08          | 66.78       | 68.2     | -1.42  | Pk            |
| Horizontal                         | 6039.133  | 59.29         | -7.08          | 52.21       | 54       | -1.79  | AV            |
| Horizontal                         | 11590.019 | 60.02         | -0.20          | 59.82       | 74       | -14.18 | Pk            |
| Horizontal                         | 11590.019 | 49.35         | -0.20          | 49.15       | 54       | -4.85  | AV            |
| Horizontal                         | 17385.060 | 57.17         | 4.81           | 61.98       | 68.2     | -6.22  | Pk            |
| Horizontal                         | 17385.060 | 44.56         | 4.81           | 49.37       | 54       | -4.63  | AV            |

Note: PK value is lower than the Average value limit, So average didn't record.  
The 26.5-40G amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.  
Emission level (dBuV/m) = 20 log Emission level (uV/m).  
Correct Factor =Antenna Factor + Cable Loss - Preamp Factor  
Over = Reading Level + Correct Factor - Limits  
Test Mode is MIMO Mode.