1. Bandwidth

1.1 OBW

1.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	99% Occupied Bandwidth (MHz) Result	Verdict
GFSK	SISO	2402	DH5	1	0.852	Pass
		2441	DH5	1	0.865	Pass
		2480	DH5	1	0.868	Pass
π/4-DQPSK	SISO	2402	2DH5	1	1.172	Pass
		2441	2DH5	1	1.172	Pass
		2480	2DH5	1	1.176	Pass

1.1.2 Test Graph

GFSK_DH5_LCH_2402MHz_Ant1_NTNV

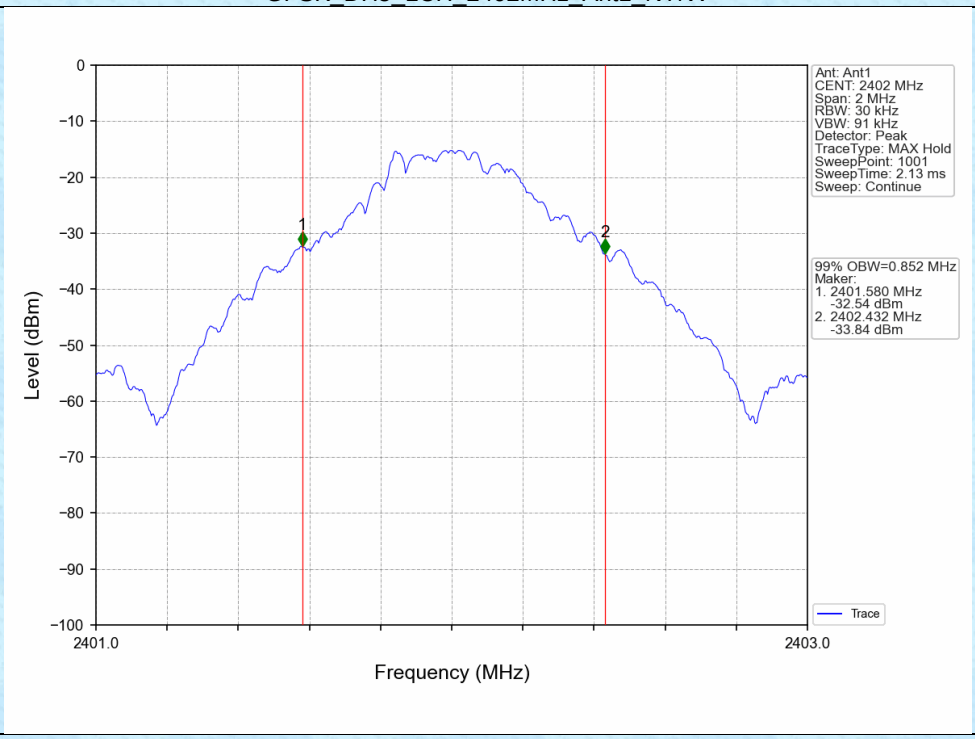

GFSK_DH5_MCH_2441MHz_Ant1_NTNV

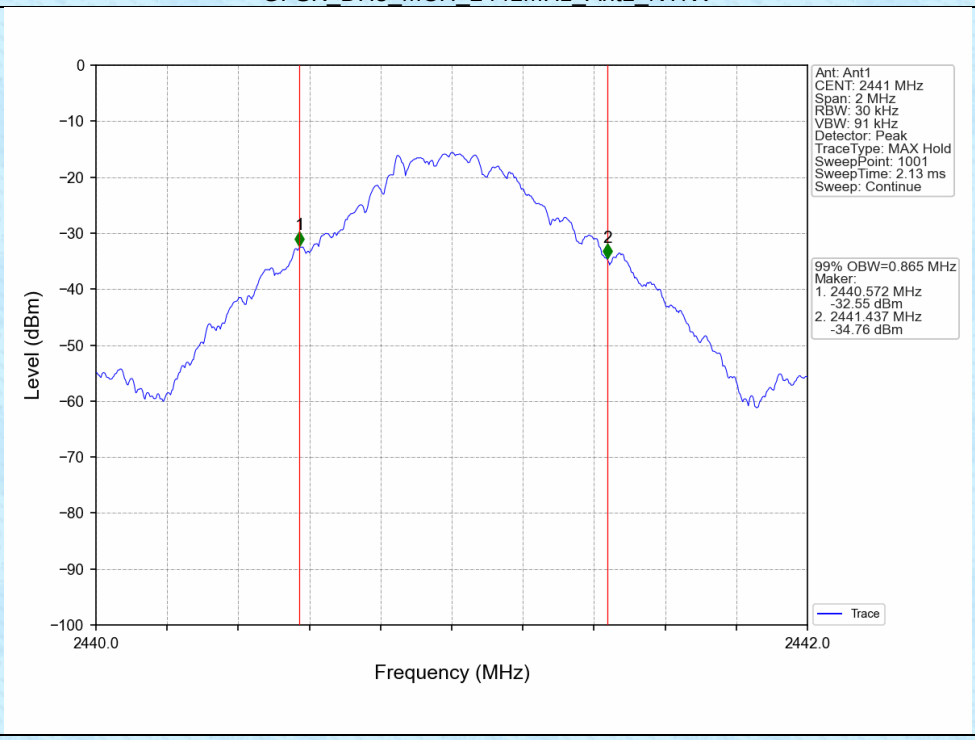

GFSK_DH5_HCH_2480MHz_Ant1_NTNV

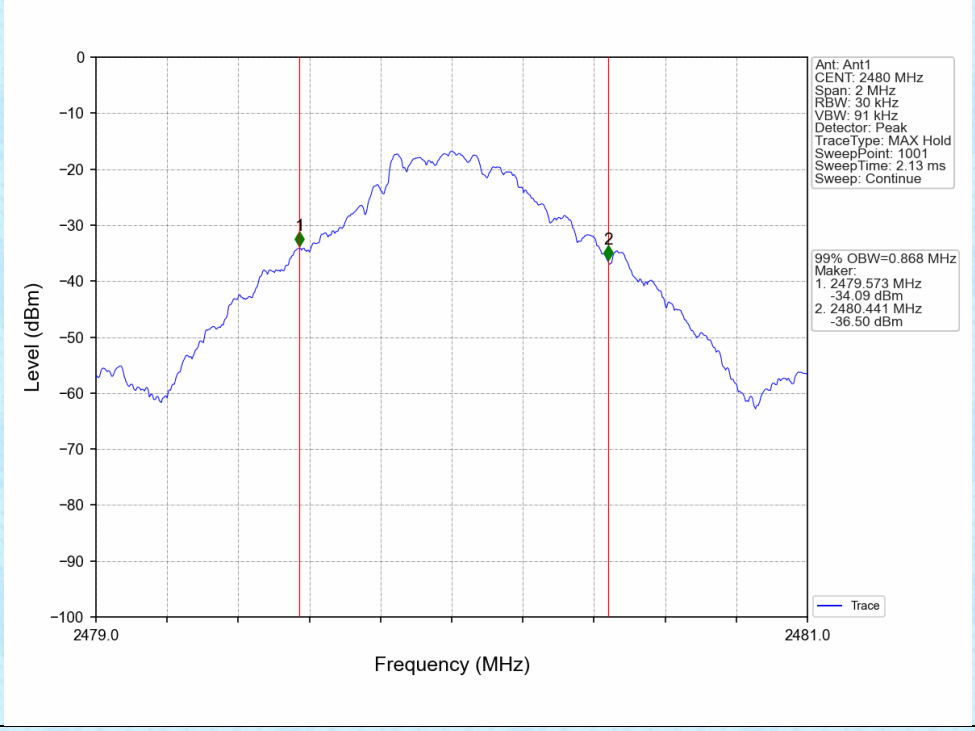

π/4-DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

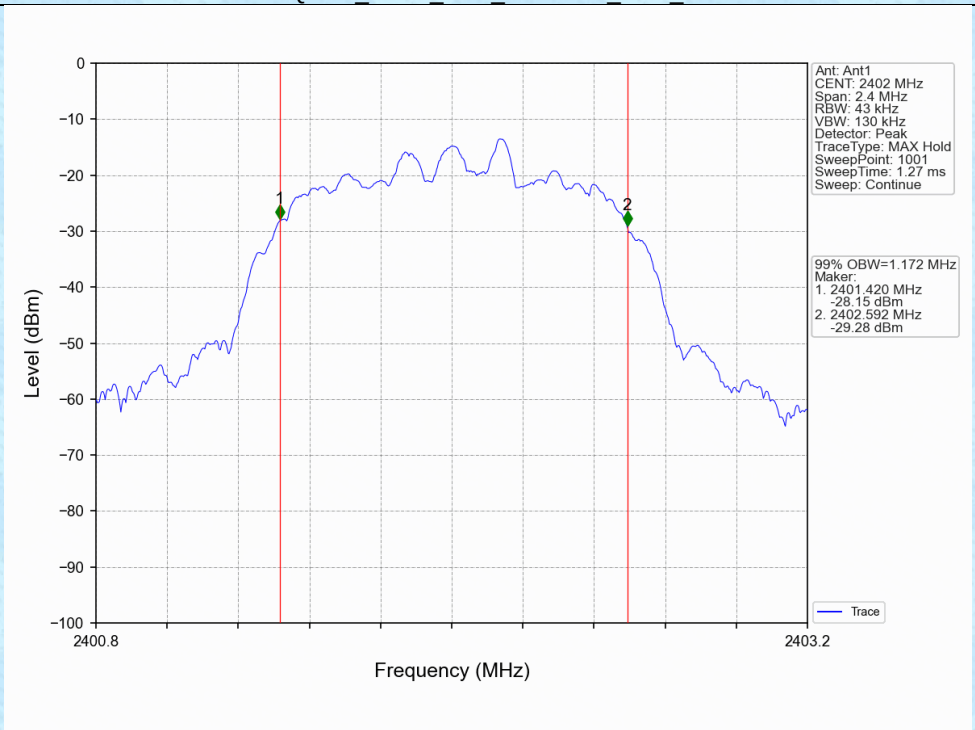

π/4-DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

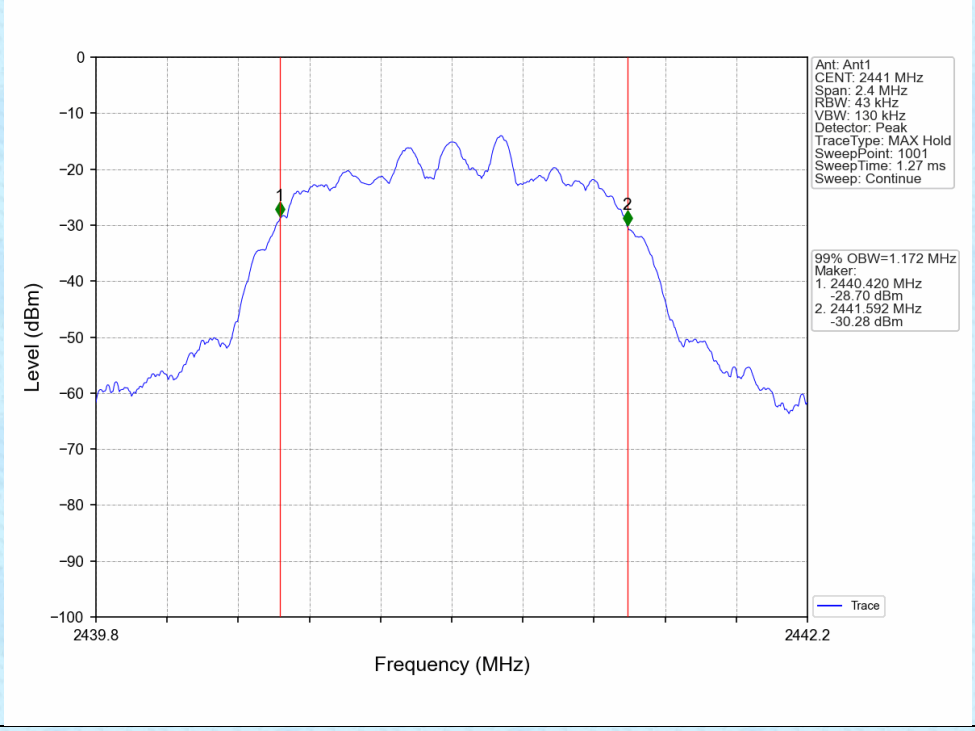

π/4-DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

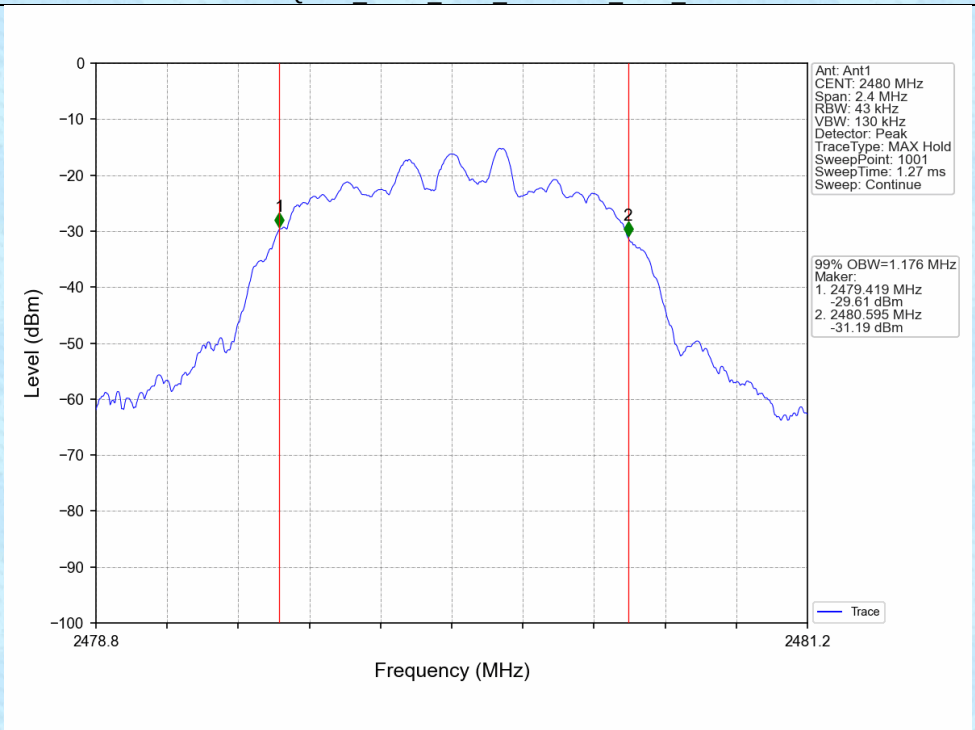

1.2 20dB BW

1.2.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz) Result	Verdict
GFSK	SISO	2402	DH5	1	0.956	Pass
		2441	DH5	1	0.954	Pass
		2480	DH5	1	0.953	Pass
π/4-DQPSK	SISO	2402	2DH5	1	1.291	Pass
		2441	2DH5	1	1.290	Pass
		2480	2DH5	1	1.294	Pass

1.2.2 Test Graph

GFSK_DH5_LCH_2402MHz_Ant1_NTNV

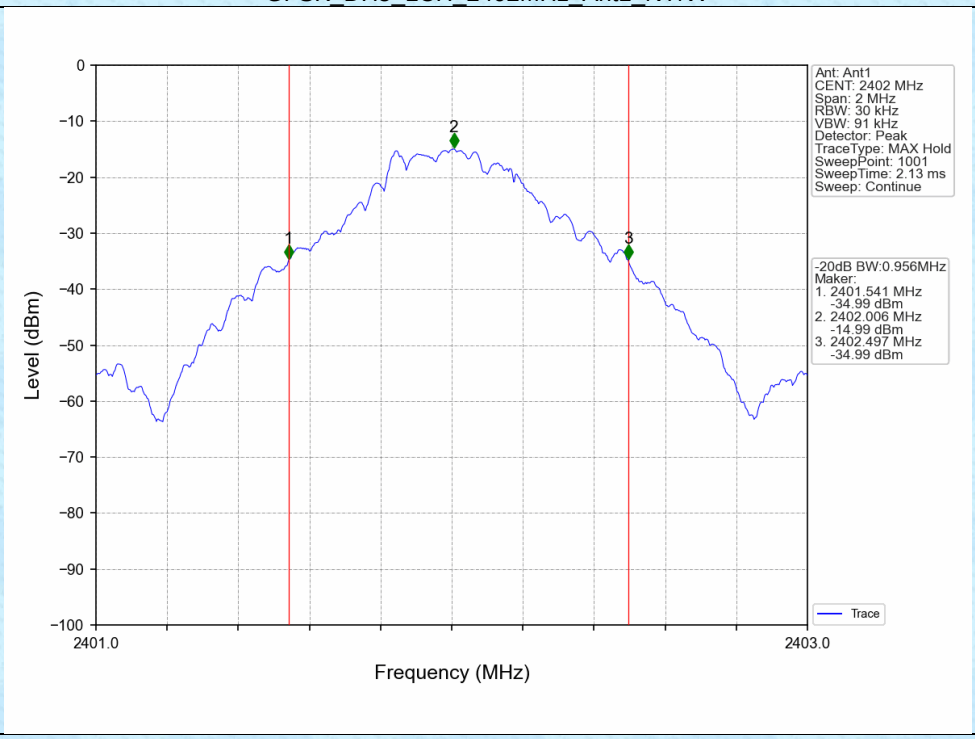

GFSK_DH5_MCH_2441MHz_Ant1_NTNV

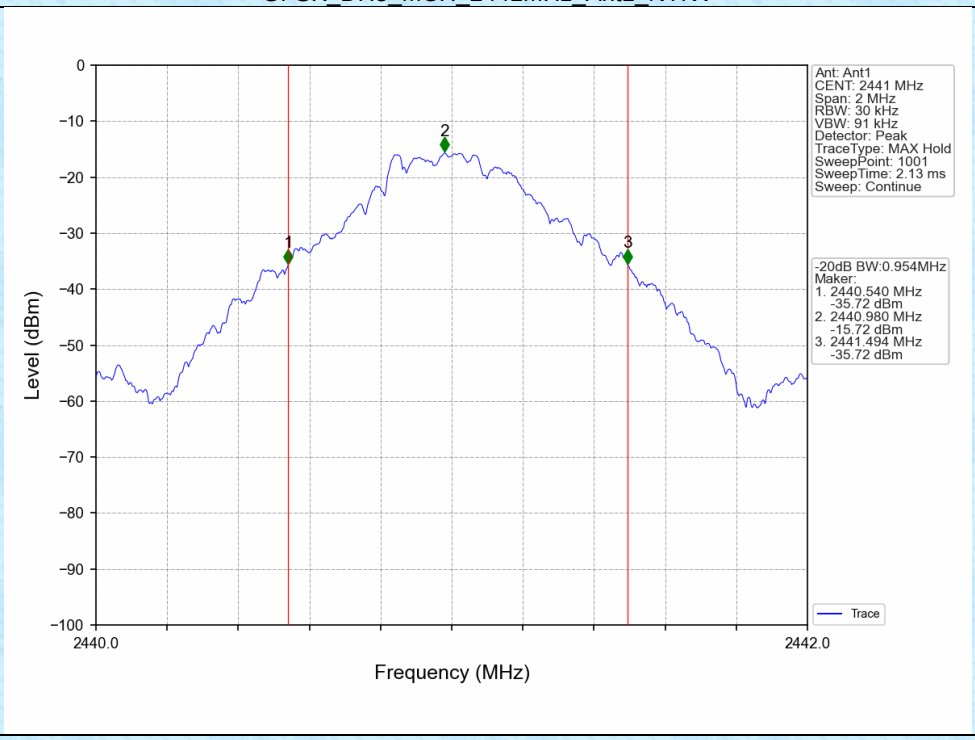

GFSK_DH5_HCH_2480MHz_Ant1_NTNV

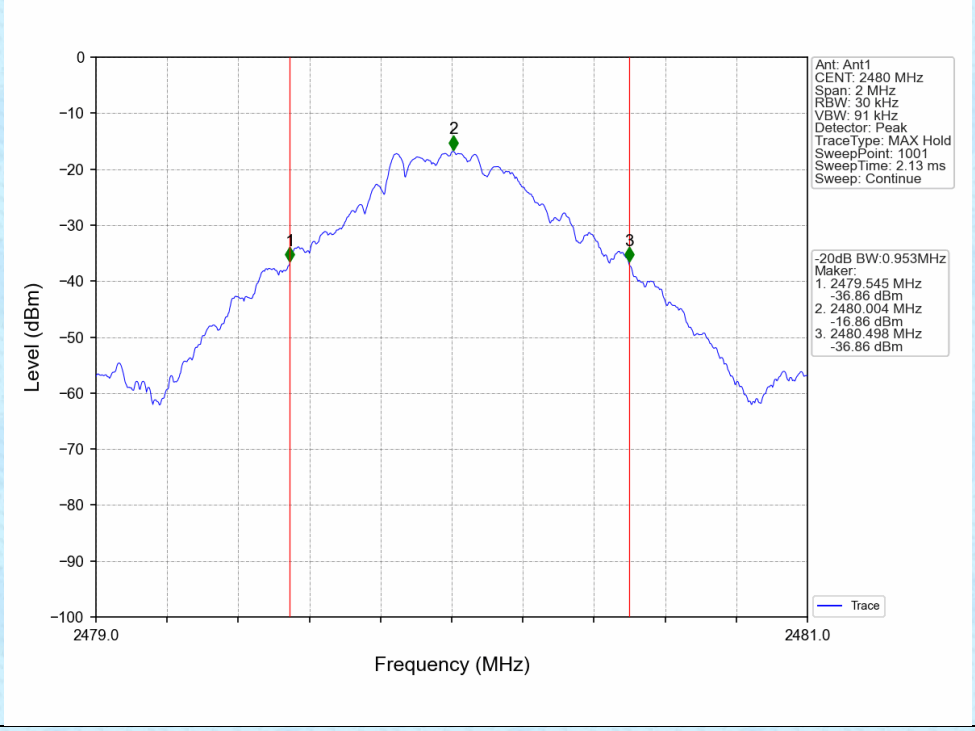

π/4-DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

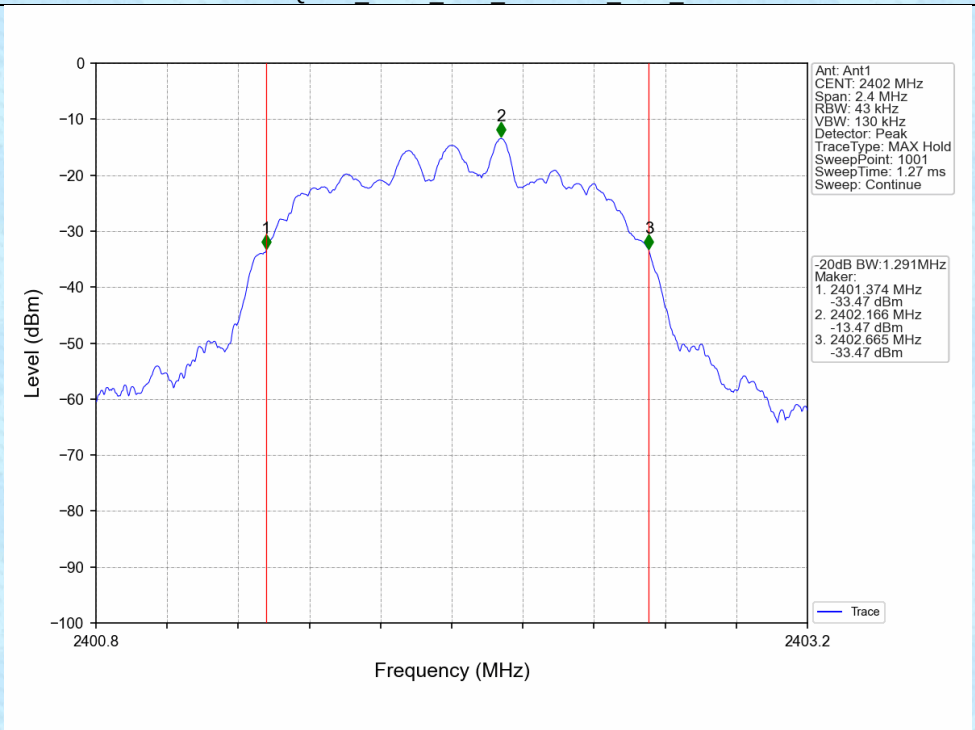

π/4-DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

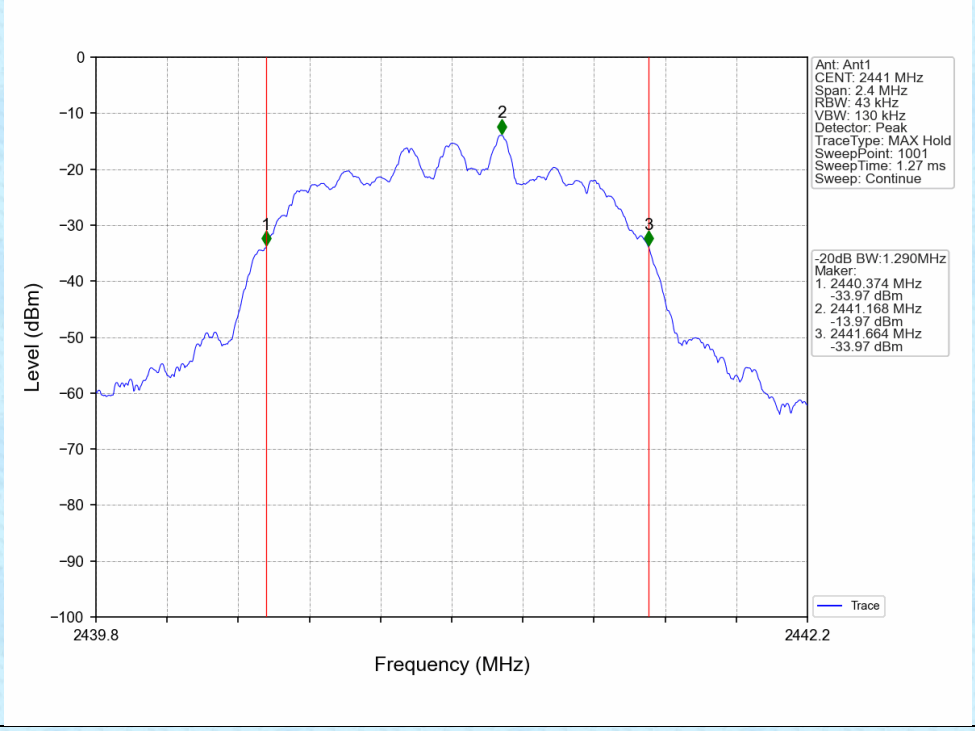

π/4-DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

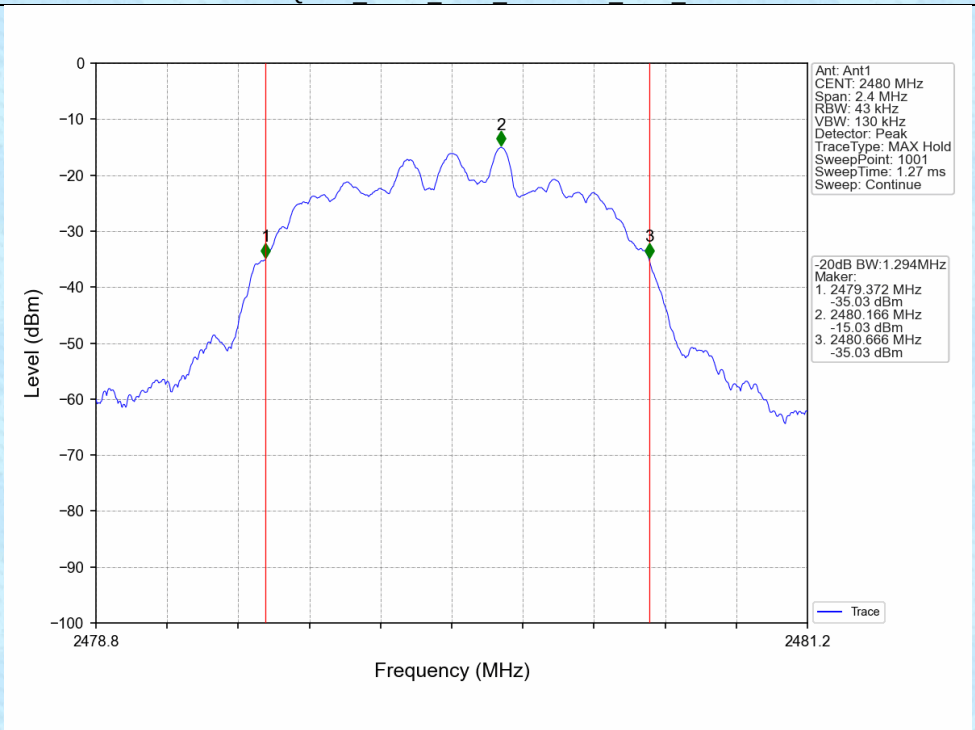

2. Maximum Conducted Output Power

2.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	-12.73	<=30	Pass
		2441	DH5	-13.33	<=30	Pass
		2480	DH5	-14.70	<=30	Pass
π/4-DQPSK	SISO	2402	2DH5	-11.82	<=20.97	Pass
		2441	2DH5	-12.29	<=20.97	Pass
		2480	2DH5	-13.37	<=20.97	Pass

3. Carrier Frequency Separation

3.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	0.996	0.956	>=0.956	Pass
π/4-DQPSK	SISO	HOPP	2DH5	0.998	1.294	>=0.863	Pass

3.2 Test Graph

GFSK_DH5_HOPP_Ant1_NTNV

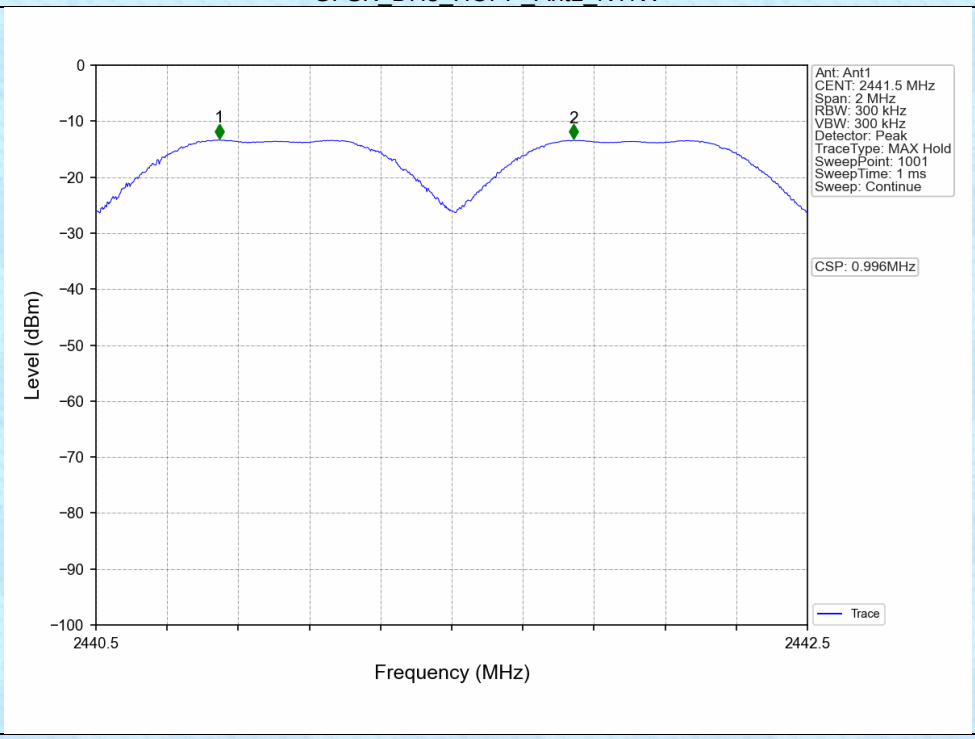

π/4-DQPSK_2DH5_HOPP_Ant1_NTNV

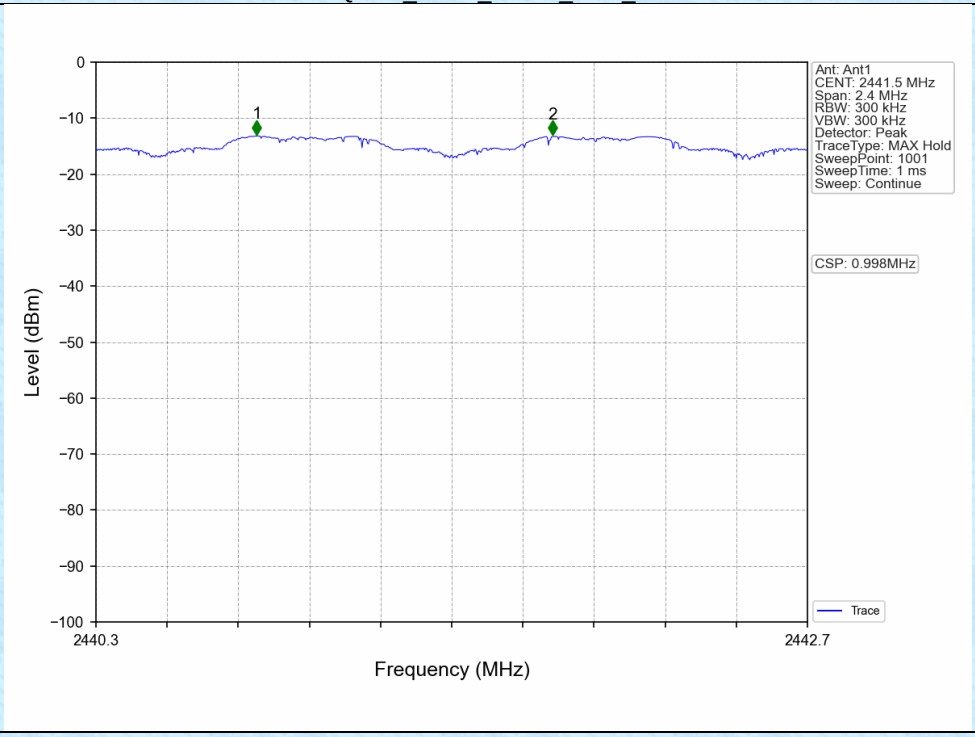

4. Number of Hopping Frequencies

4.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	>=15	Pass
π/4-DQPSK	SISO	HOPP	2DH5	79	>=15	Pass

4.2 Test Graph

GFSK_DH5_HOPP_Ant1_NTNV

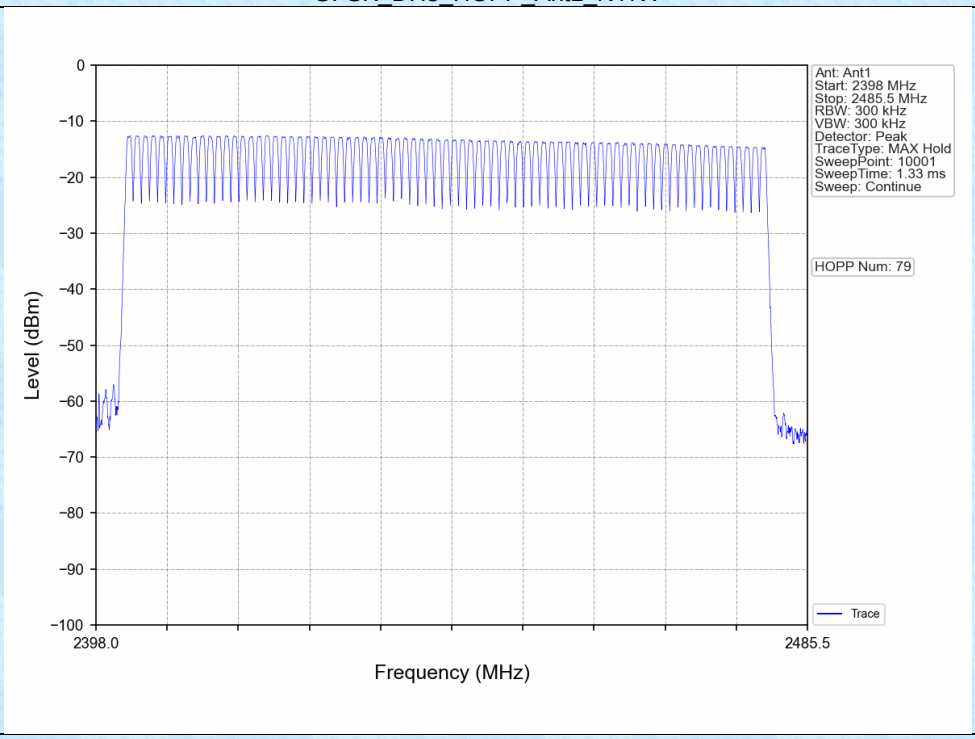

π/4-DQPSK_2DH5_HOPP_Ant1_NTNV

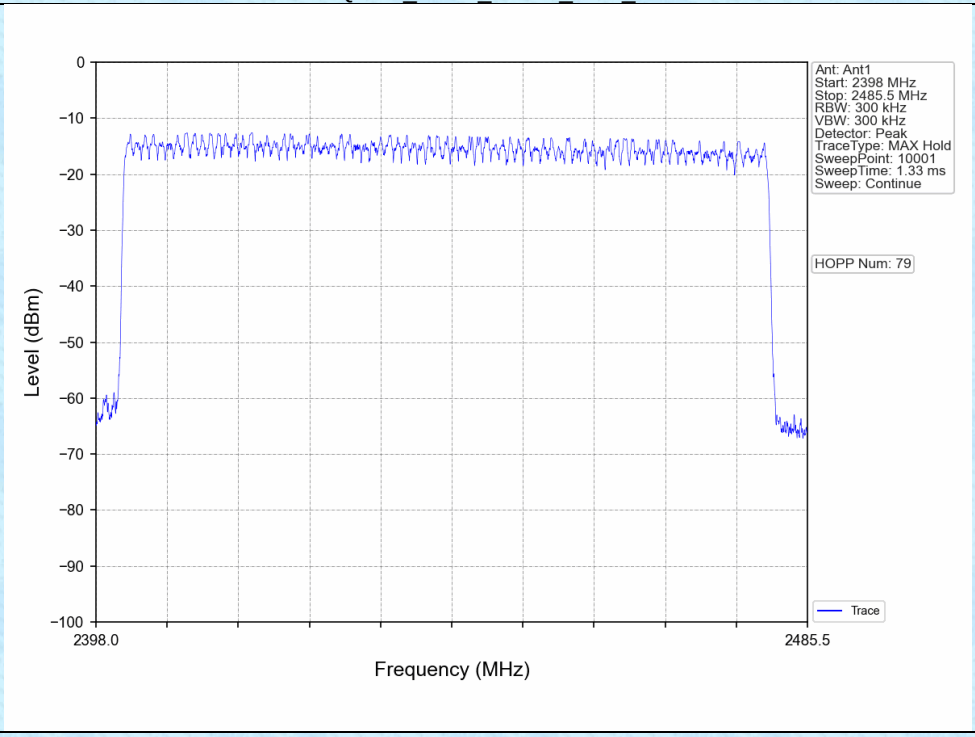

5. Time of Occupancy (Dwell Time)

5.1 Test Result

Ant1									
Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.382	31.600	319	121.858	<=400	Pass
			DH3	1.636	31.600	162	265.032	<=400	Pass
			DH5	2.888	31.600	115	332.120	<=400	Pass
π/4-DQPSK	SISO	HOPP	2DH1	0.388	31.600	320	124.160	<=400	Pass
			2DH3	1.642	31.600	154	252.868	<=400	Pass
			2DH5	2.892	31.600	108	312.336	<=400	Pass

5.2 Test Graph

GFSK_DH1_HOPP_Ant1_NTNV

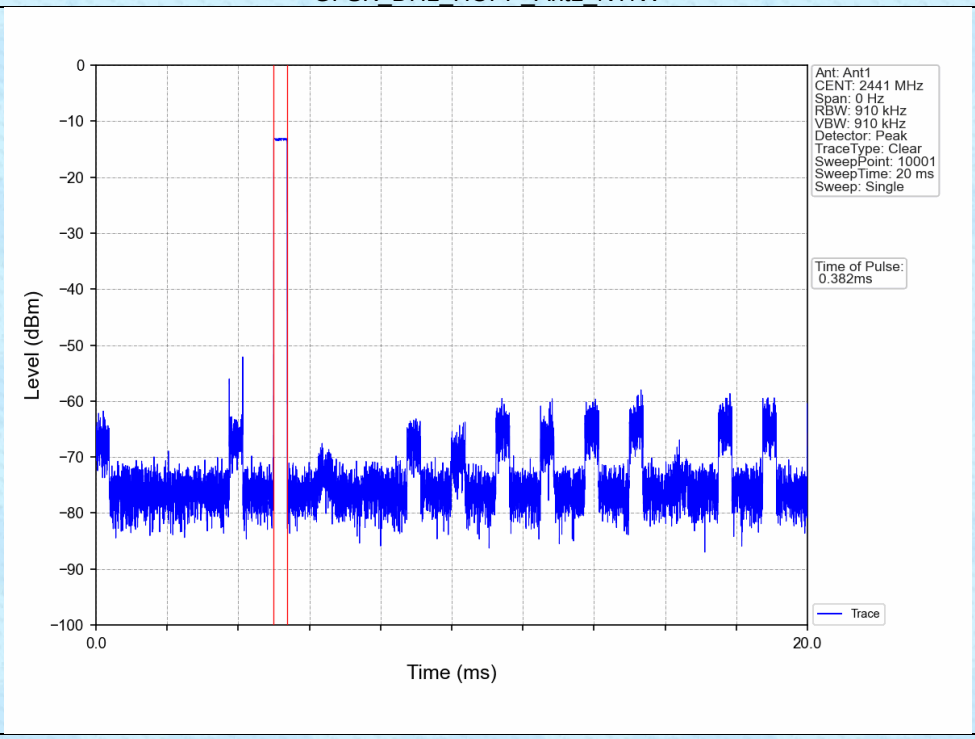

GFSK_DH1_HOPP_Ant1_NTNV

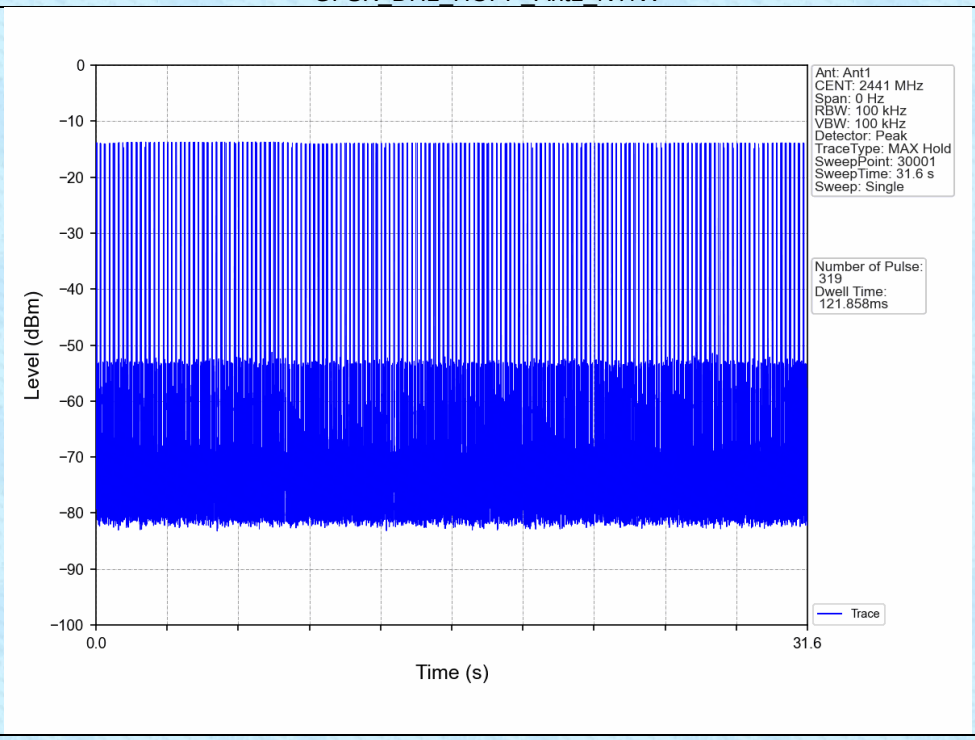

GFSK_DH3_HOPP_Ant1_NTNV

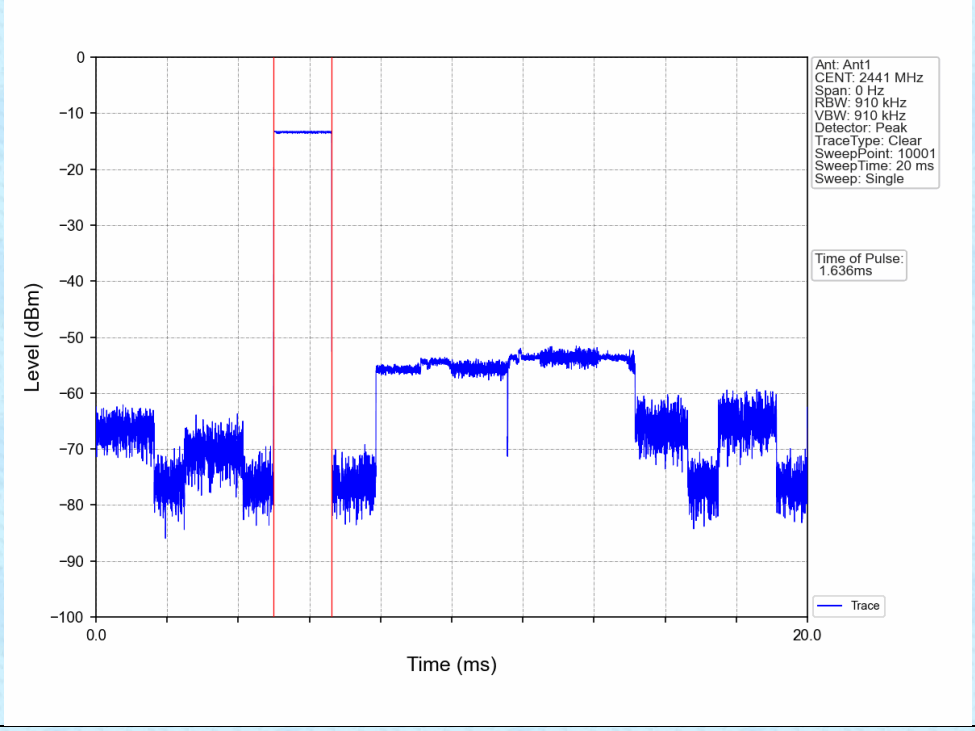

GFSK_DH3_HOPP_Ant1_NTNV

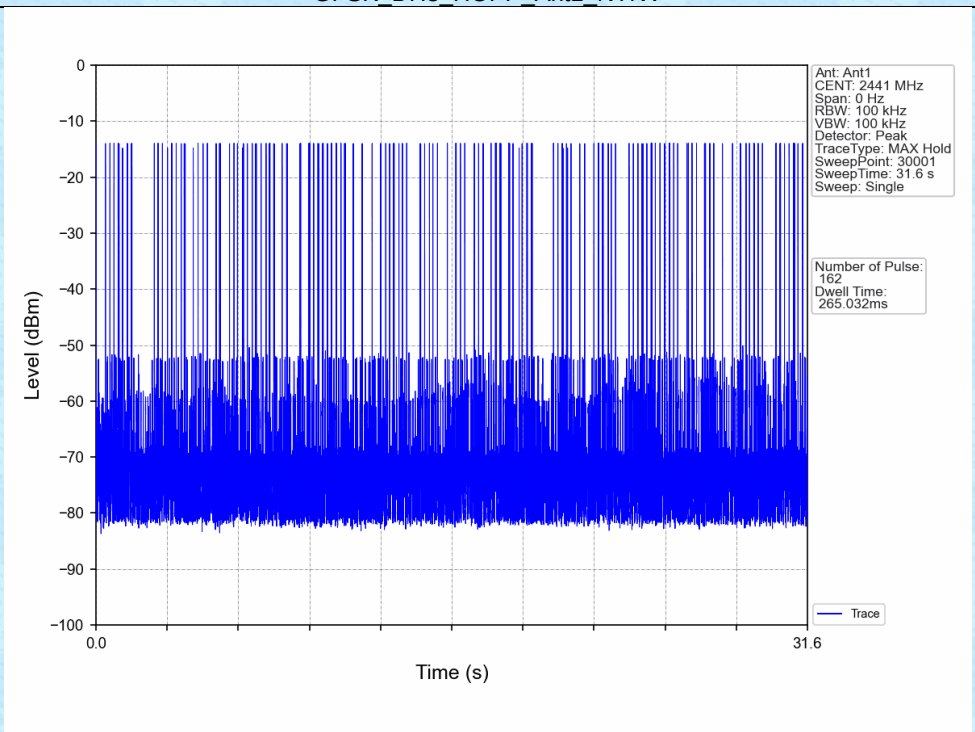

GFSK_DH5_HOPP_Ant1_NTNV

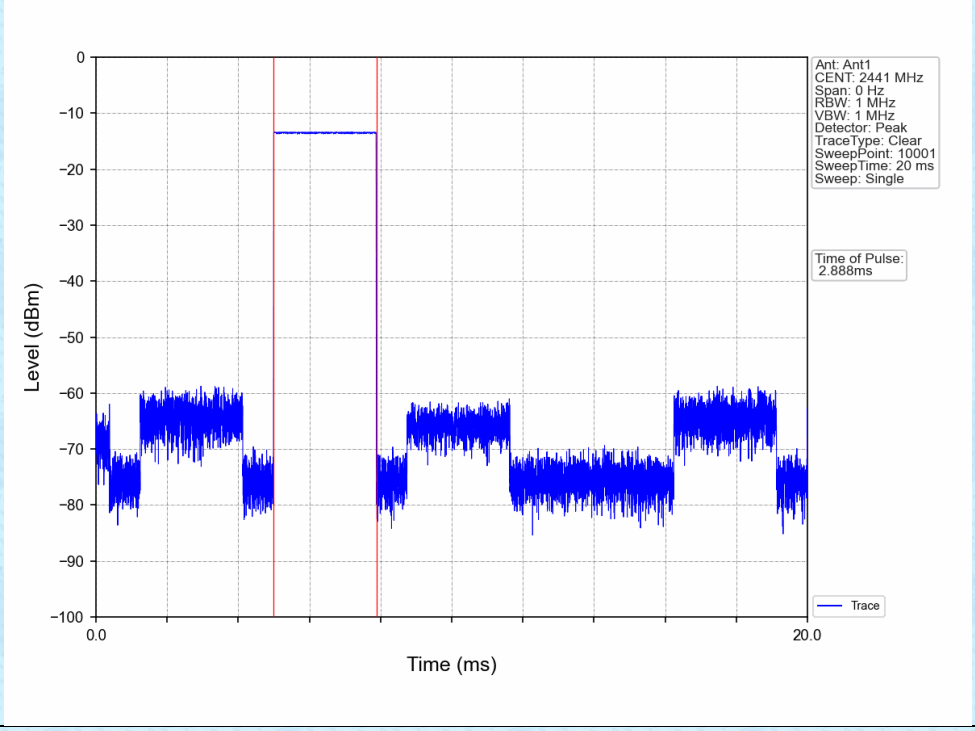

GFSK_DH5_HOPP_Ant1_NTNV

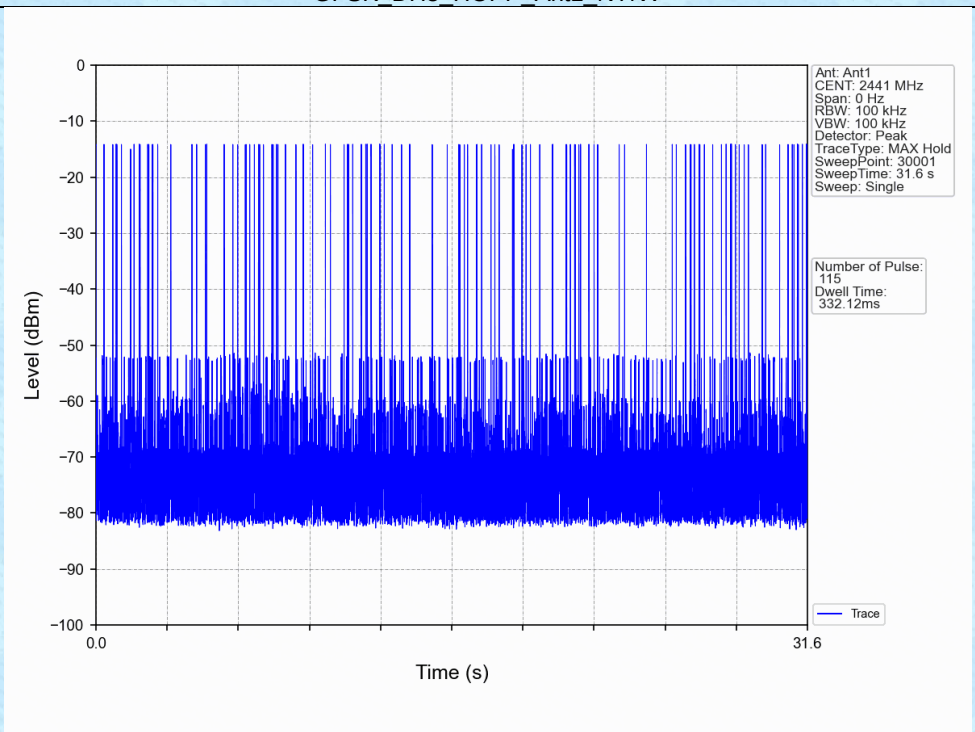

π/4-DQPSK_2DH1_HOPP_Ant1_NTNV

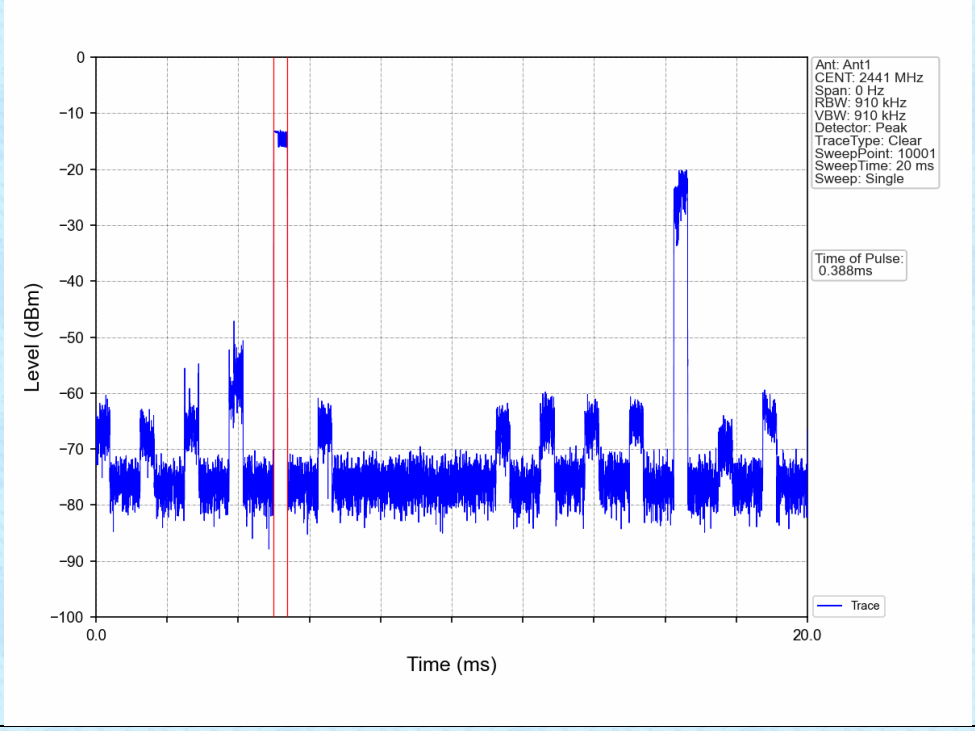

π/4-DQPSK_2DH1_HOPP_Ant1_NTNV

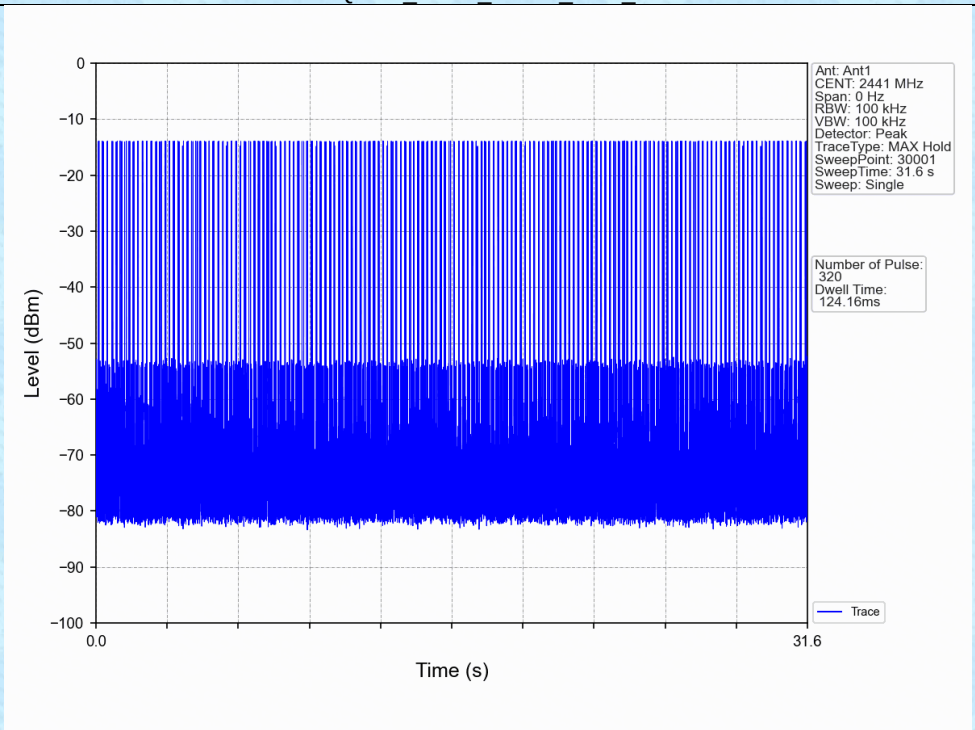

π/4-DQPSK_2DH3_HOPP_Ant1_NTNV

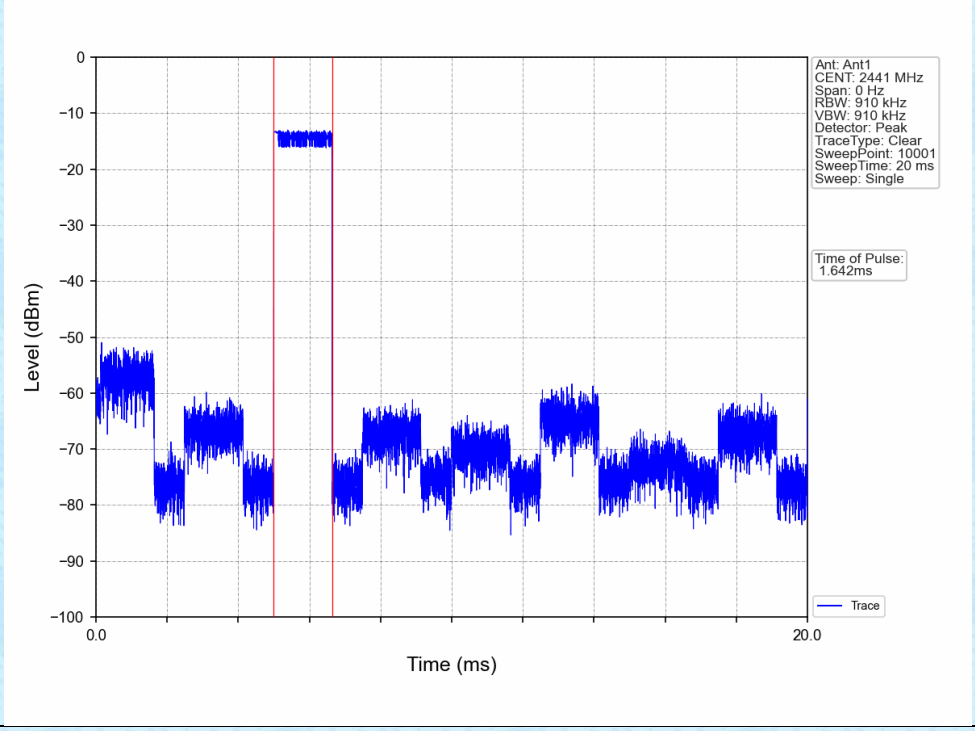

π/4-DQPSK_2DH3_HOPP_Ant1_NTNV

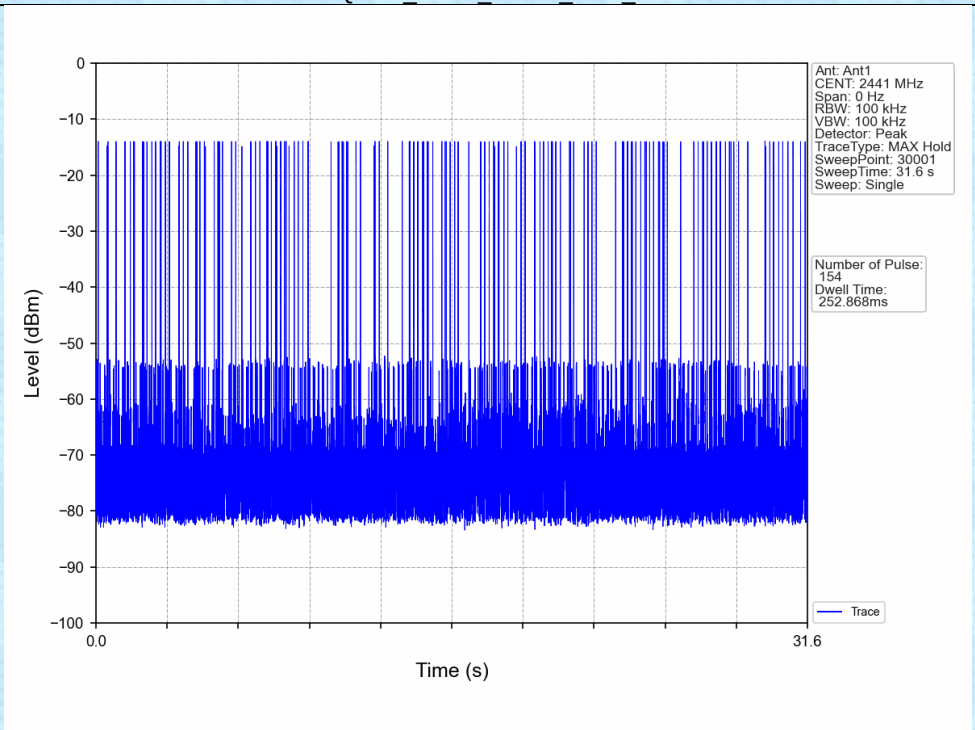

π/4-DQPSK_2DH5_HOPP_Ant1_NTNV

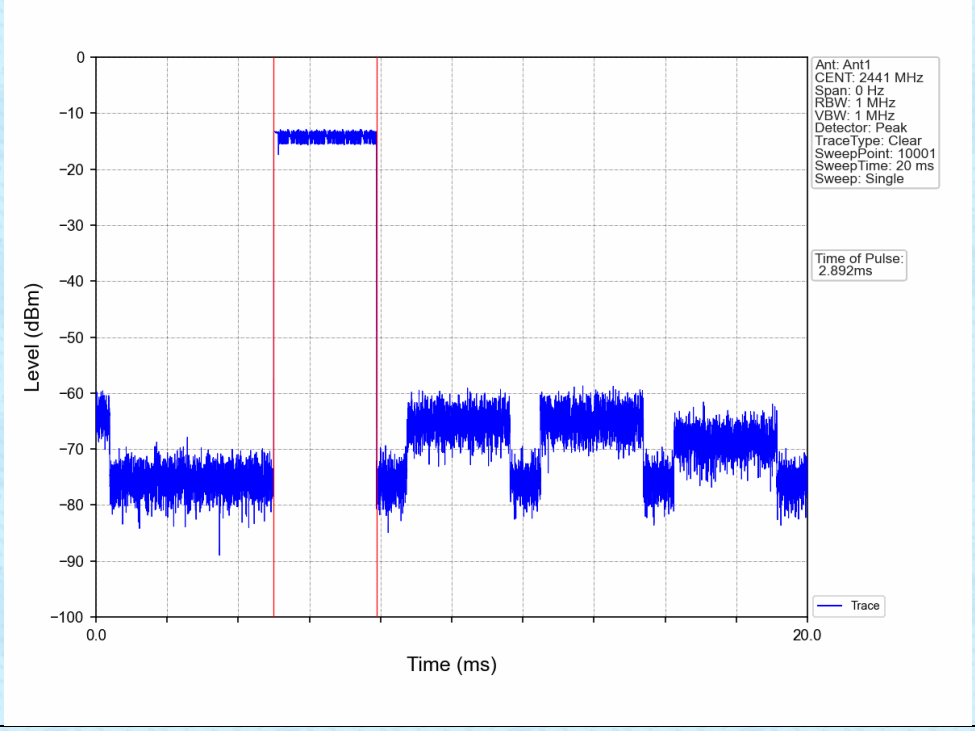

π/4-DQPSK_2DH5_HOPP_Ant1_NTNV

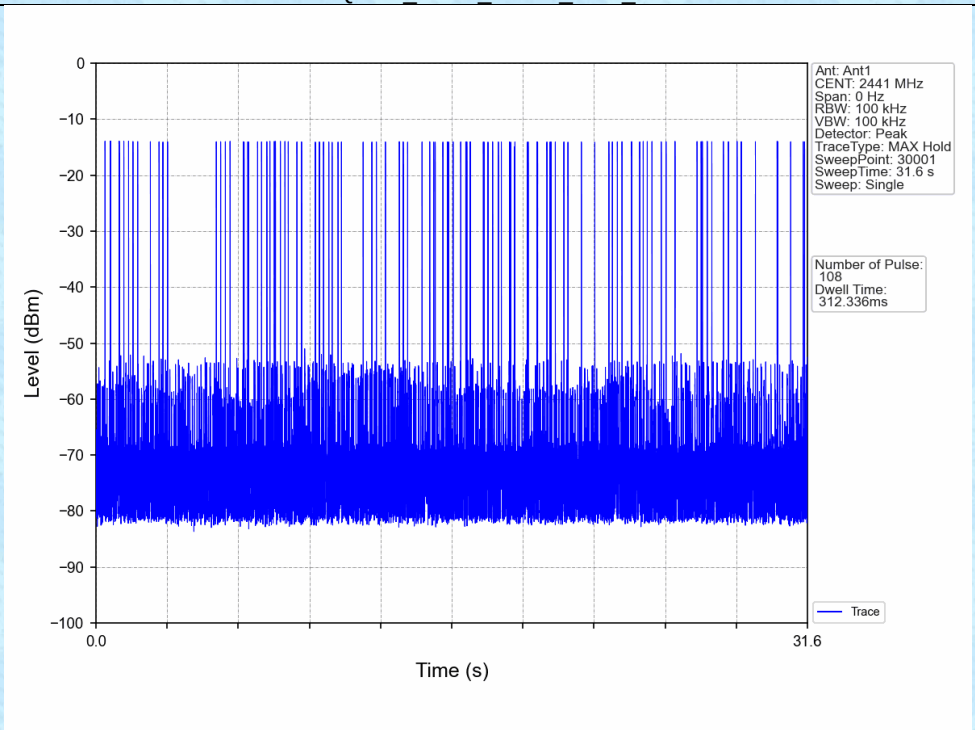

6. Unwanted Emissions In Non-restricted Frequency Bands

6.1 Ref

6.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	-12.84
		2441	DH5	1	-13.46
		2480	DH5	1	-14.81
π/4-DQPSK	SISO	2402	2DH5	1	-12.96
		2441	2DH5	1	-13.37
		2480	2DH5	1	-14.45
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.					

6.1.2 Test Graph

GFSK_DH5_LCH_2402MHz_Ant1_NTNV

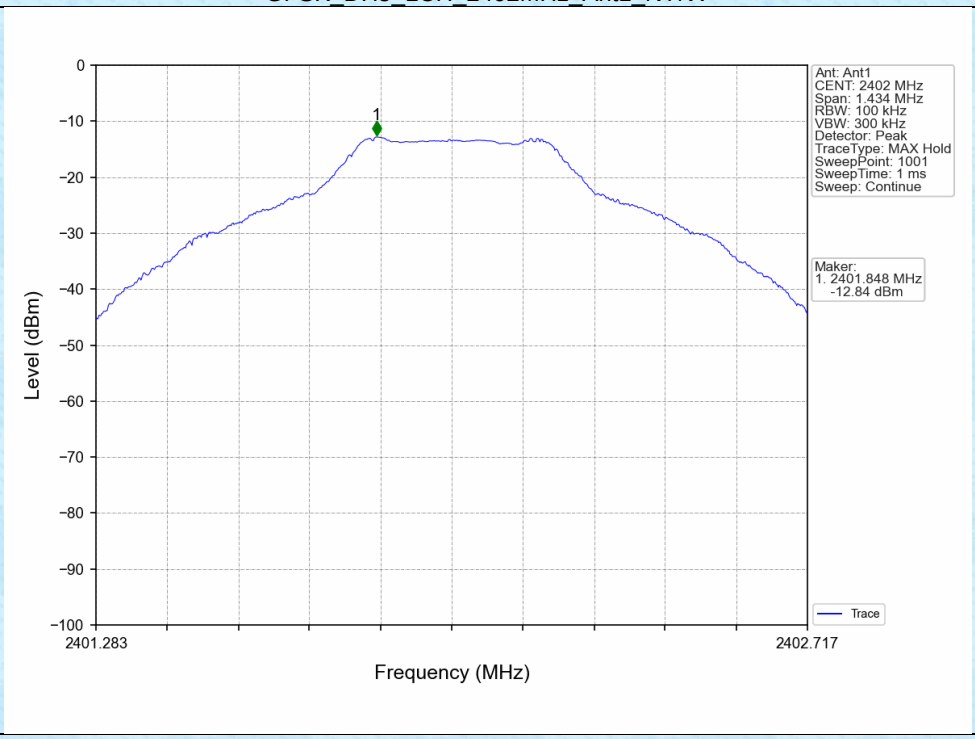

GFSK_DH5_MCH_2441MHz_Ant1_NTNV

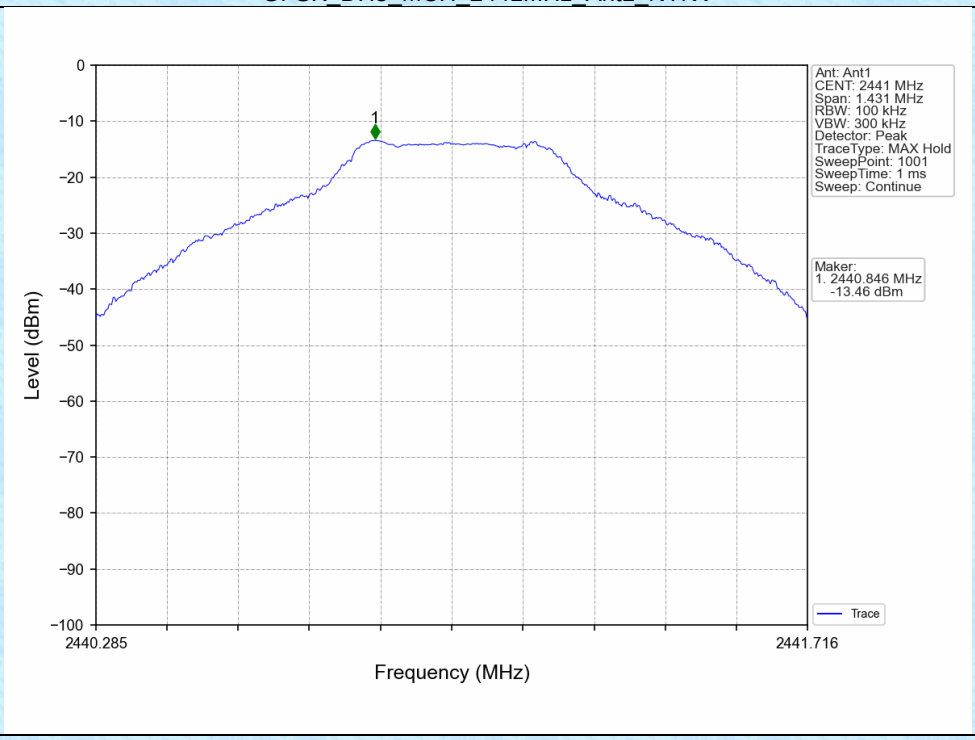

GFSK_DH5_HCH_2480MHz_Ant1_NTNV

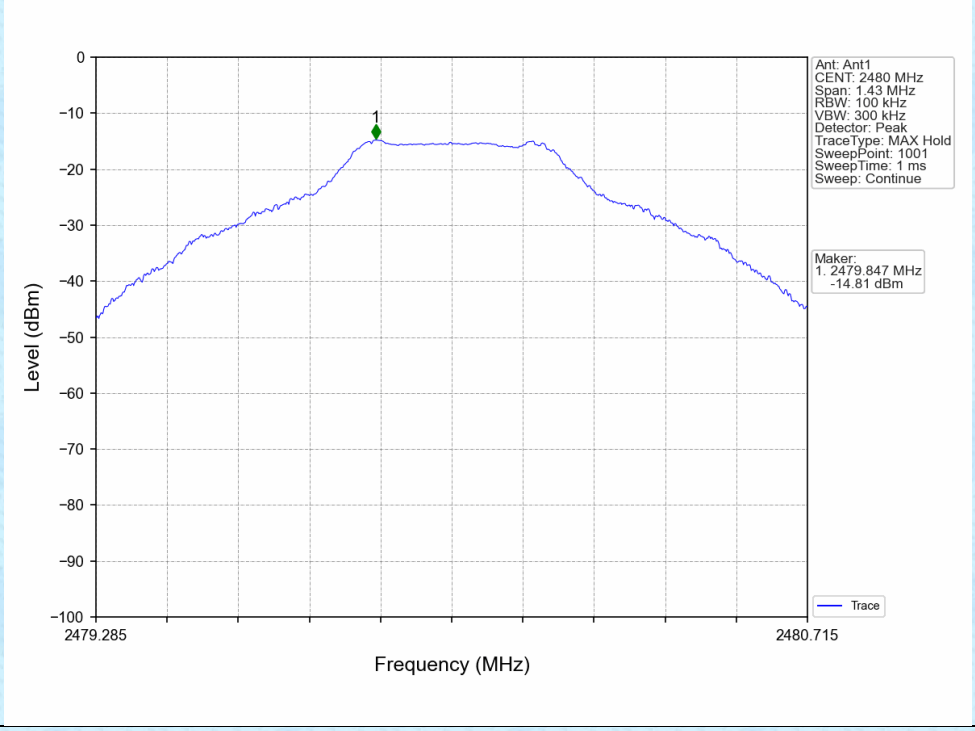

π/4-DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

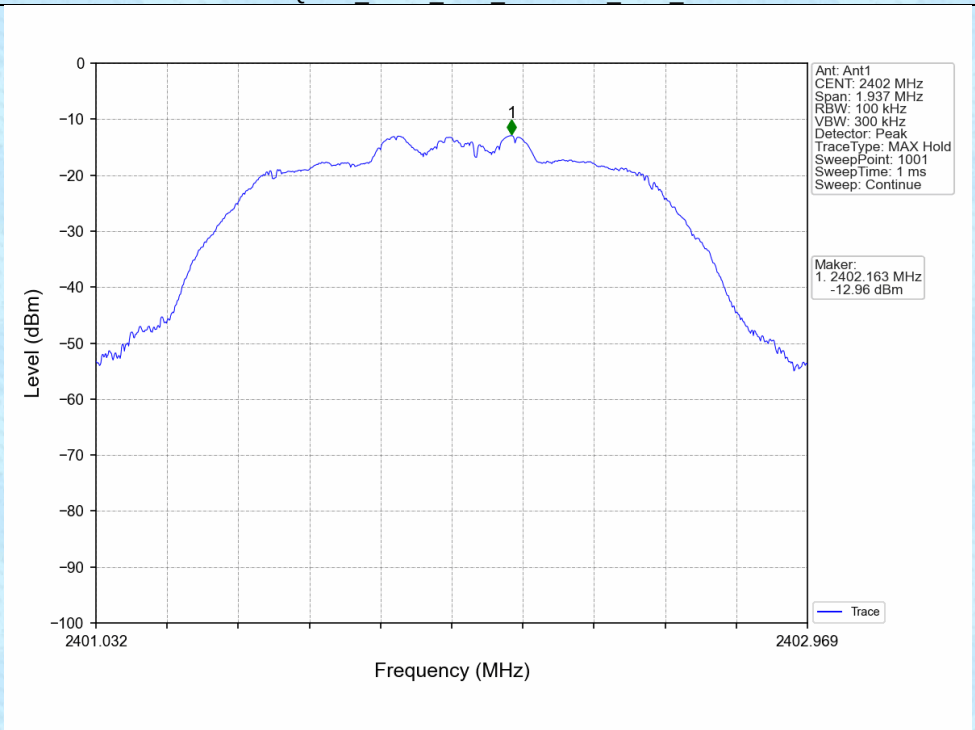

π/4-DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

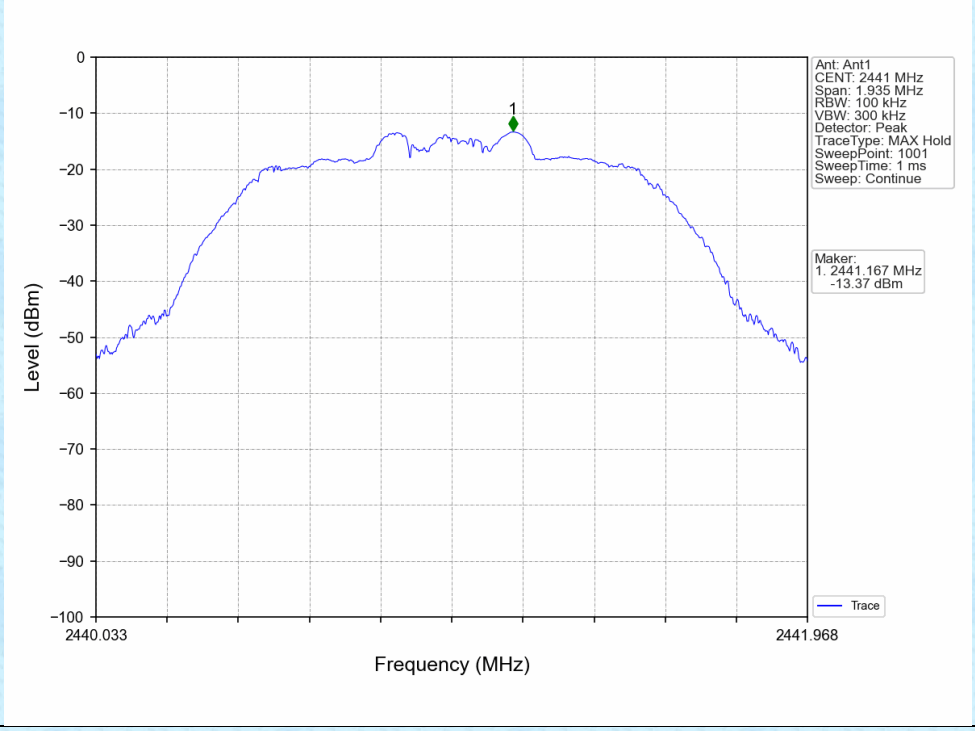

π/4-DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

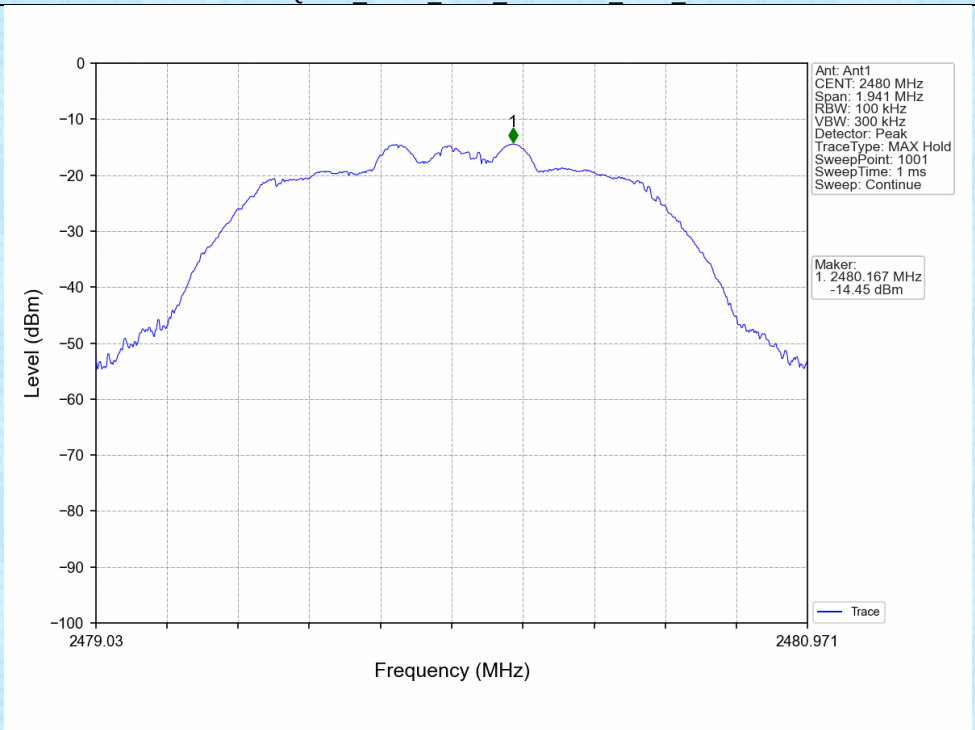

6.2 CSE

6.2.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	-12.84	-32.84	Pass
		2441	DH5	1	-12.84	-32.84	Pass
		2480	DH5	1	-12.84	-32.84	Pass
		HOPP	DH5	1	-12.84	-32.84	Pass
π/4-DQPSK	SISO	2402	2DH5	1	-12.96	-32.96	Pass
		2441	2DH5	1	-12.96	-32.96	Pass
		2480	2DH5	1	-12.96	-32.96	Pass
		HOPP	2DH5	1	-12.96	-32.96	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.							

6.2.2 Test Graph

GFSK_DH5_LCH_2402MHz_Ant1_NTNV

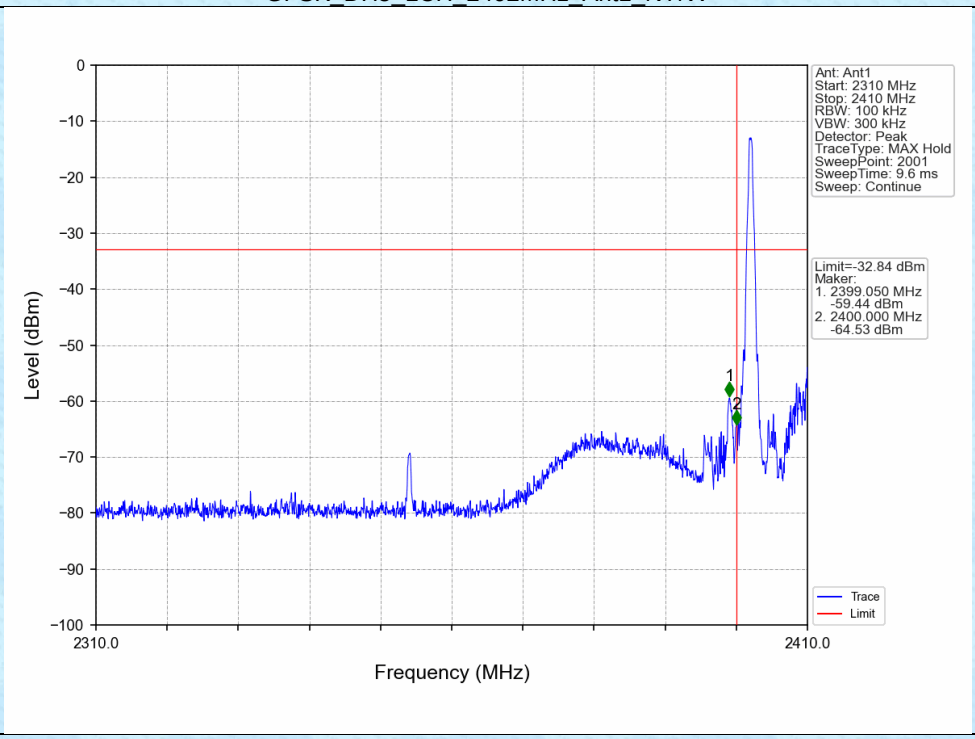

GFSK_DH5_LCH_2402MHz_Ant1_NTNV

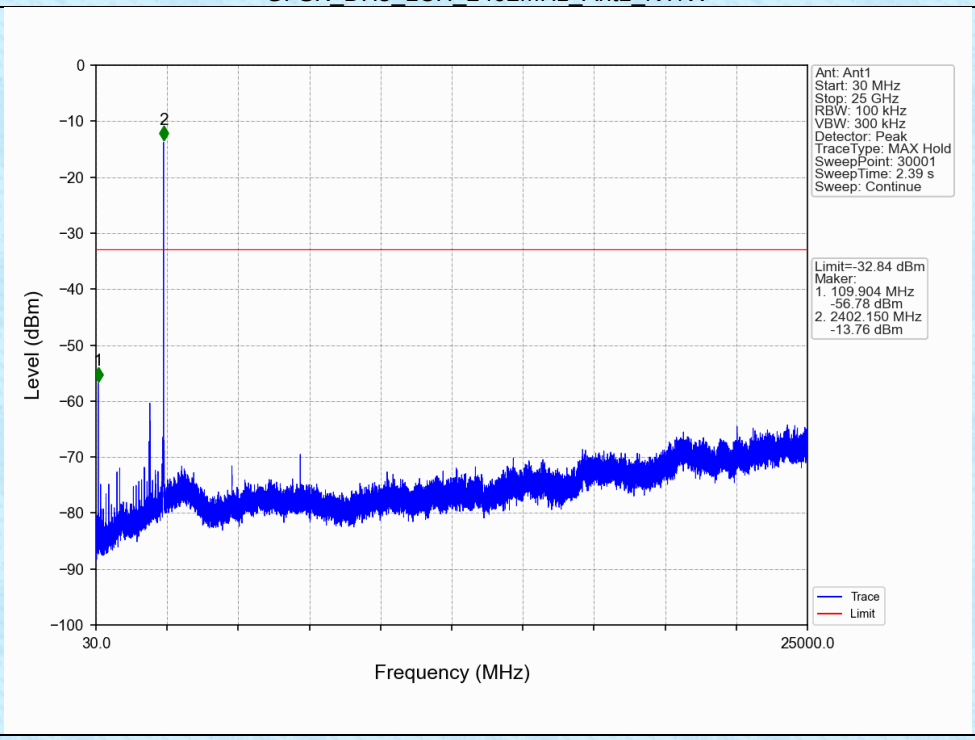

GFSK_DH5_MCH_2441MHz_Ant1_NTNV

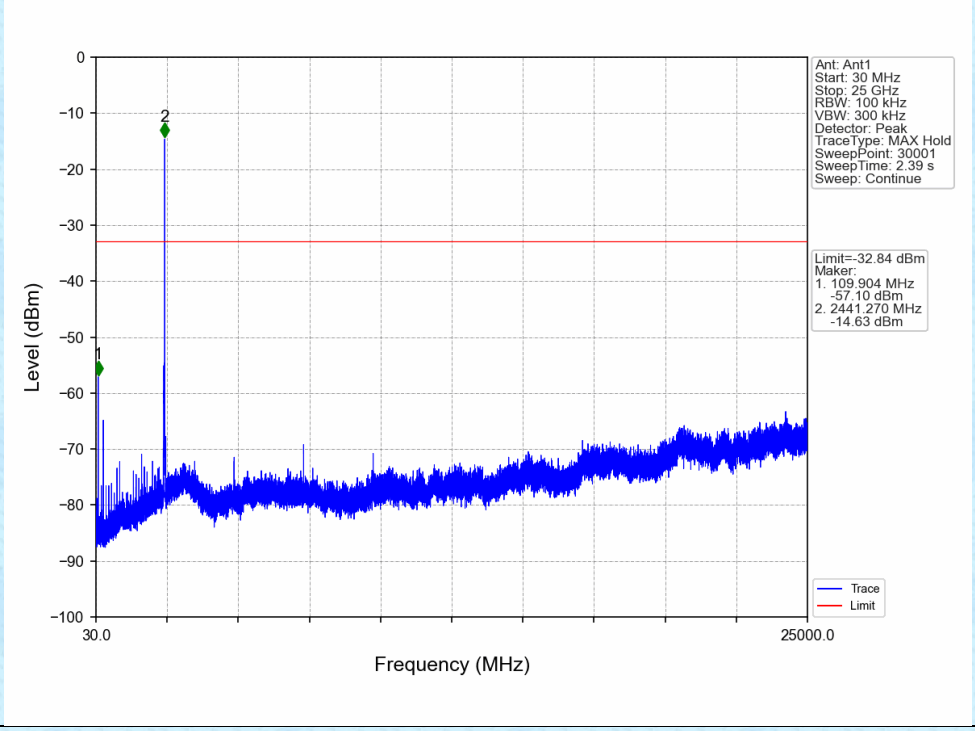

GFSK_DH5_HCH_2480MHz_Ant1_NTNV

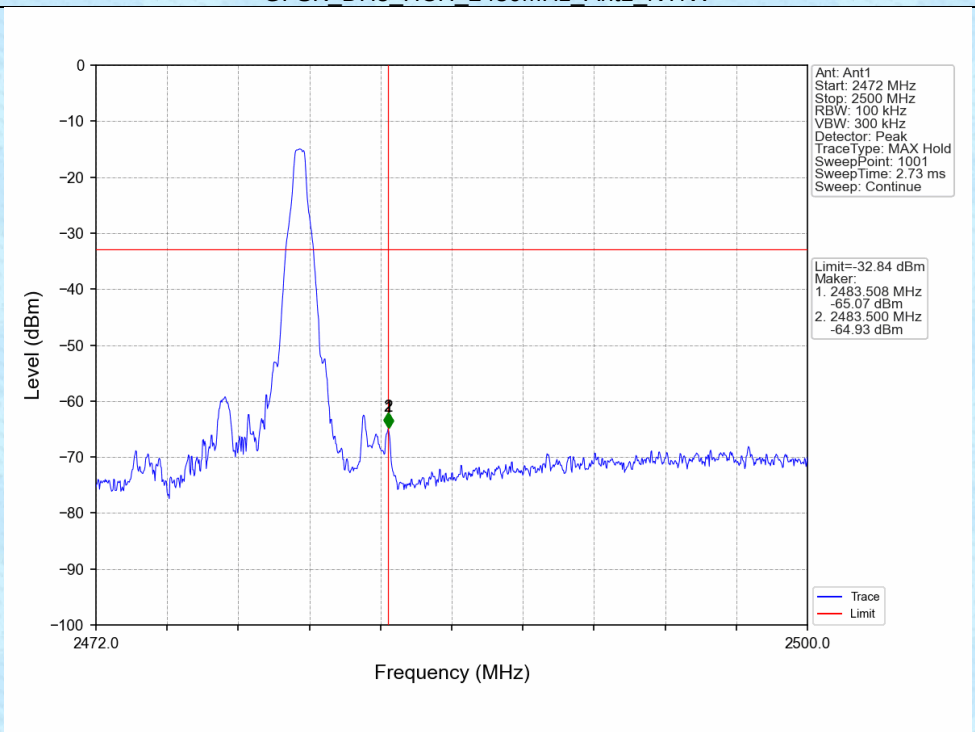

GFSK_DH5_HCH_2480MHz_Ant1_NTNV

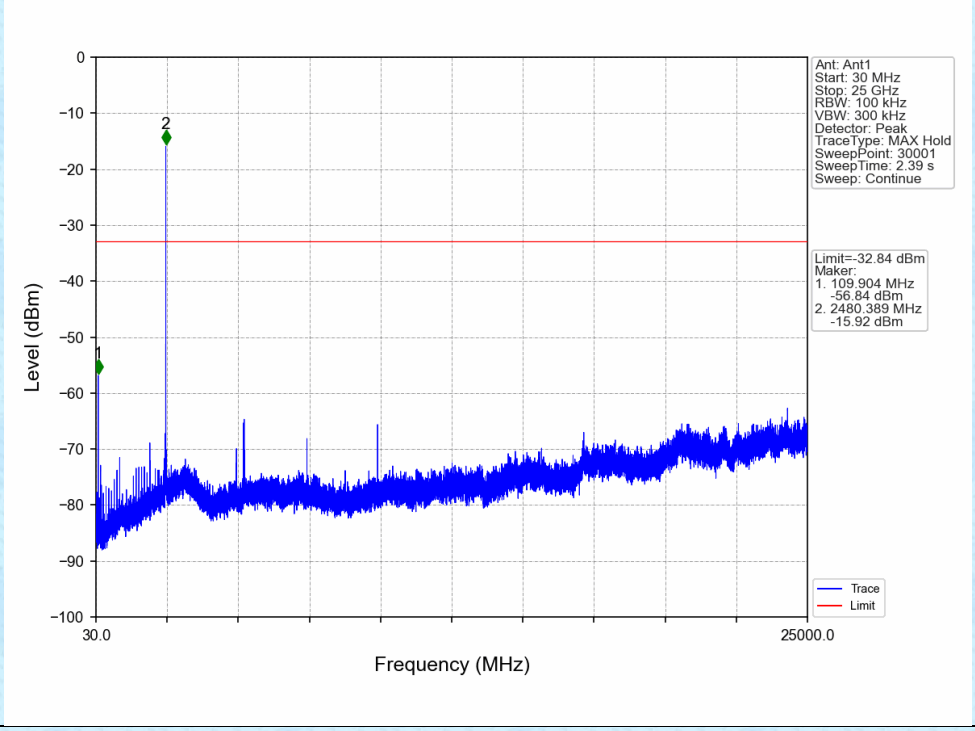

GFSK_DH5_HOPP_Ant1_NTNV

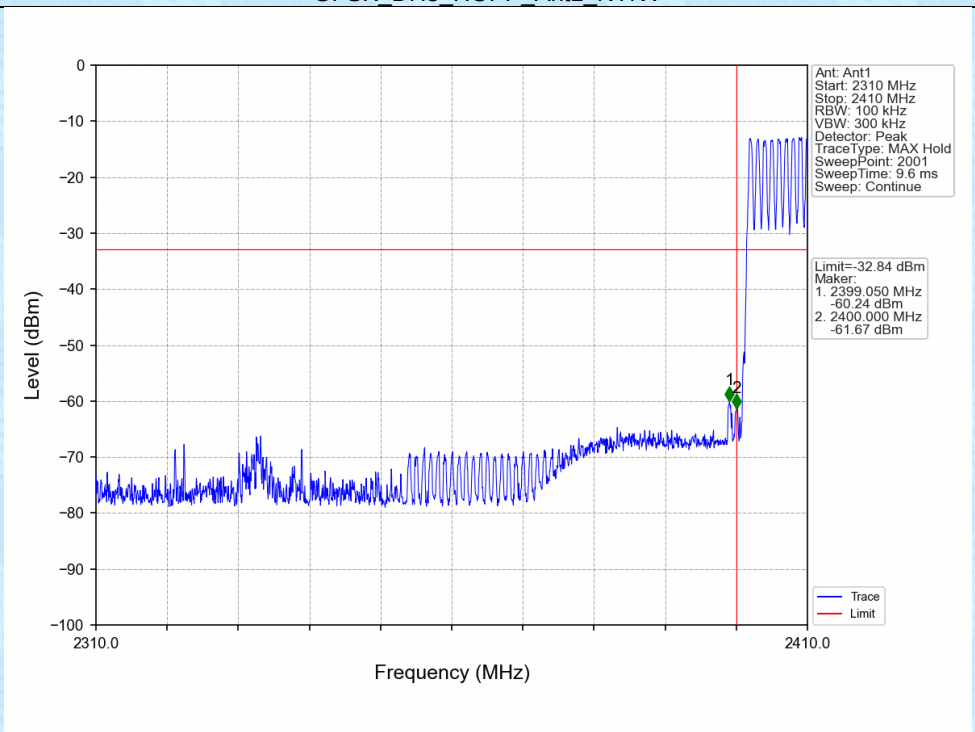

GFSK_DH5_HOPP_Ant1_NTNV

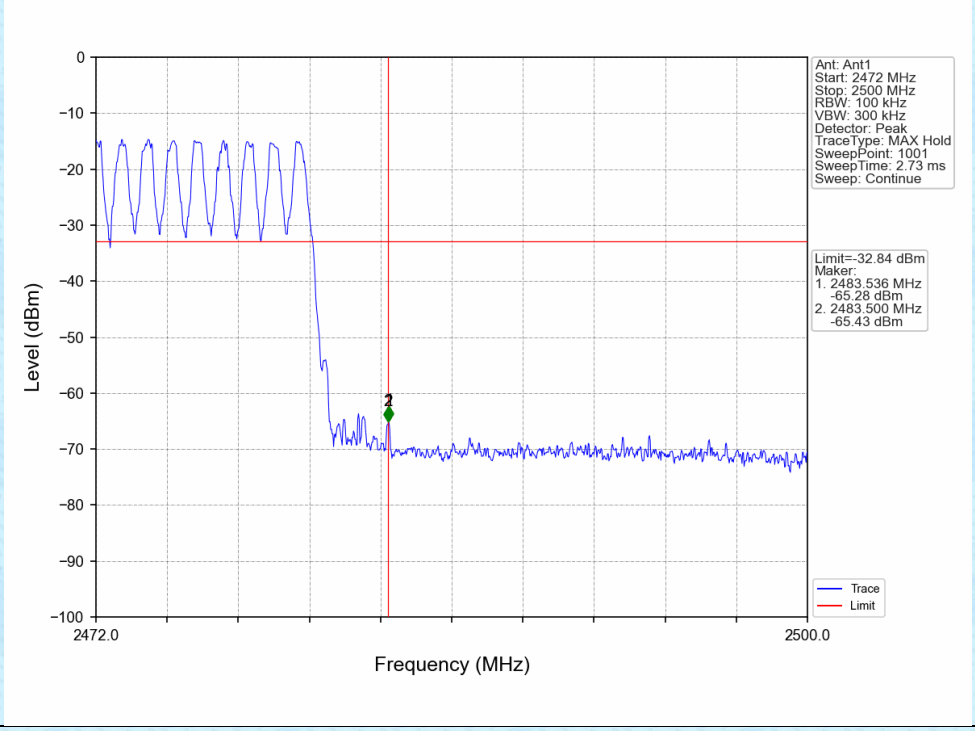

π/4-DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

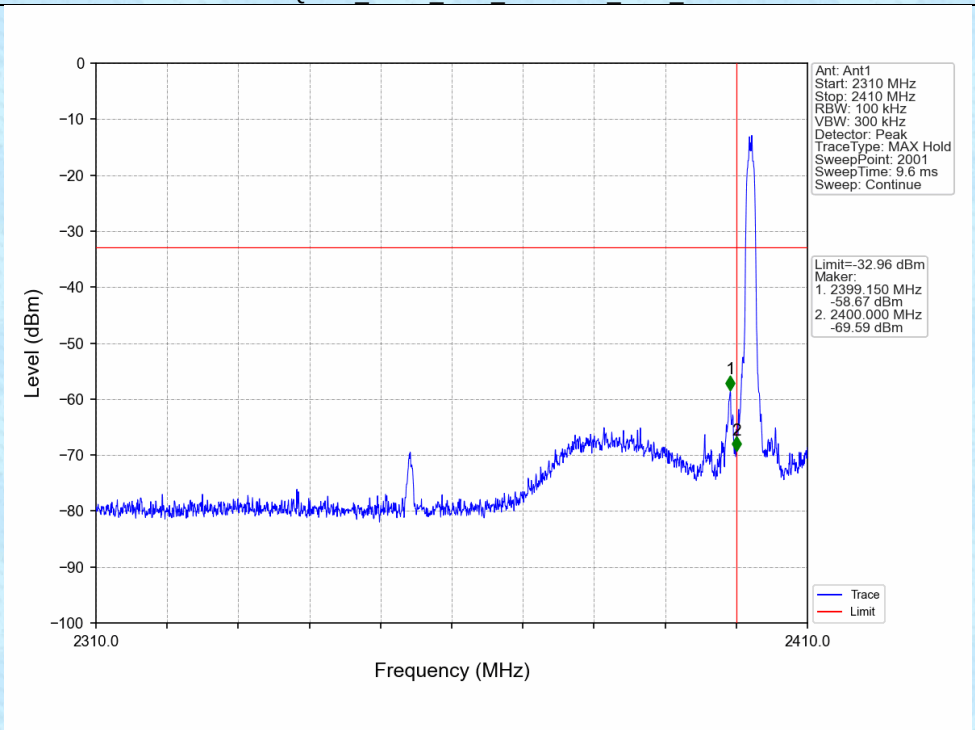

π/4-DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

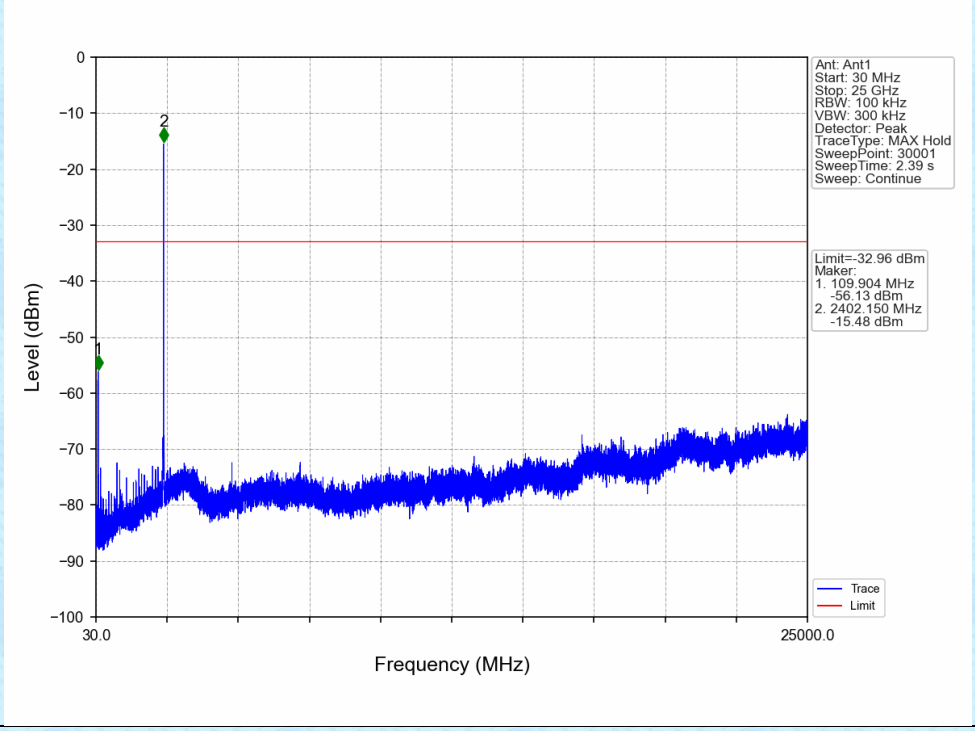

π/4-DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

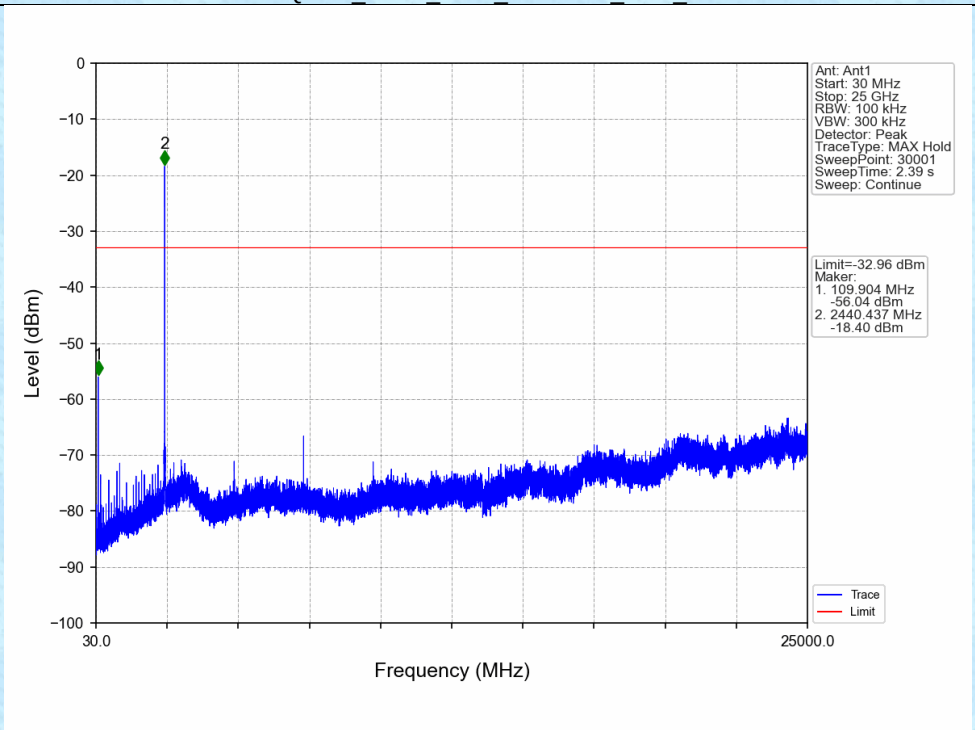

π/4-DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

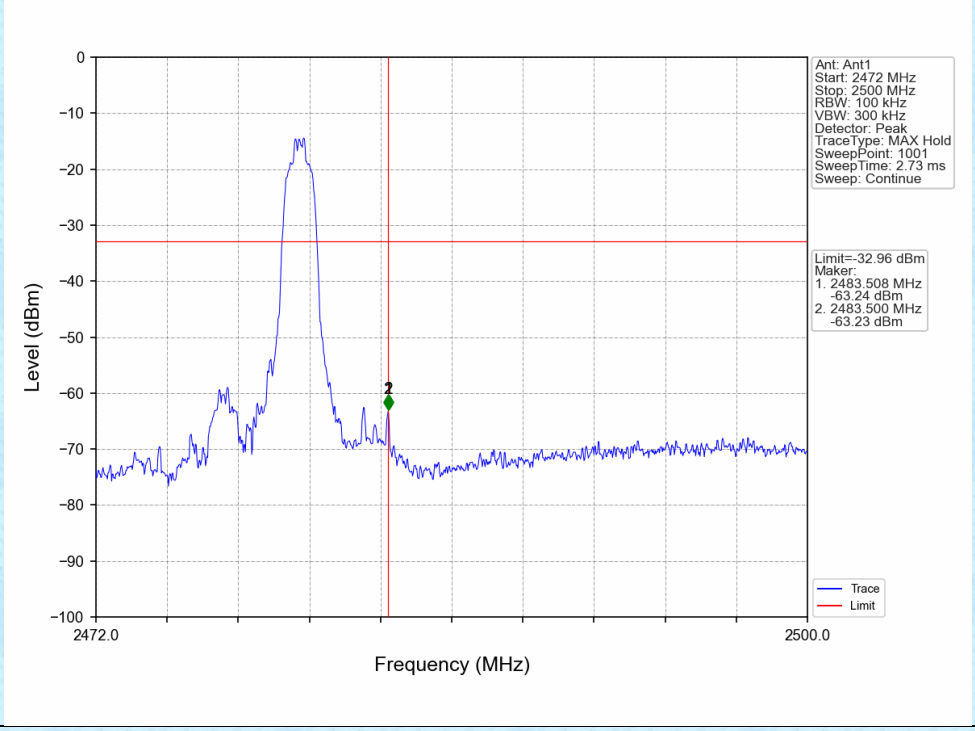

π/4-DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

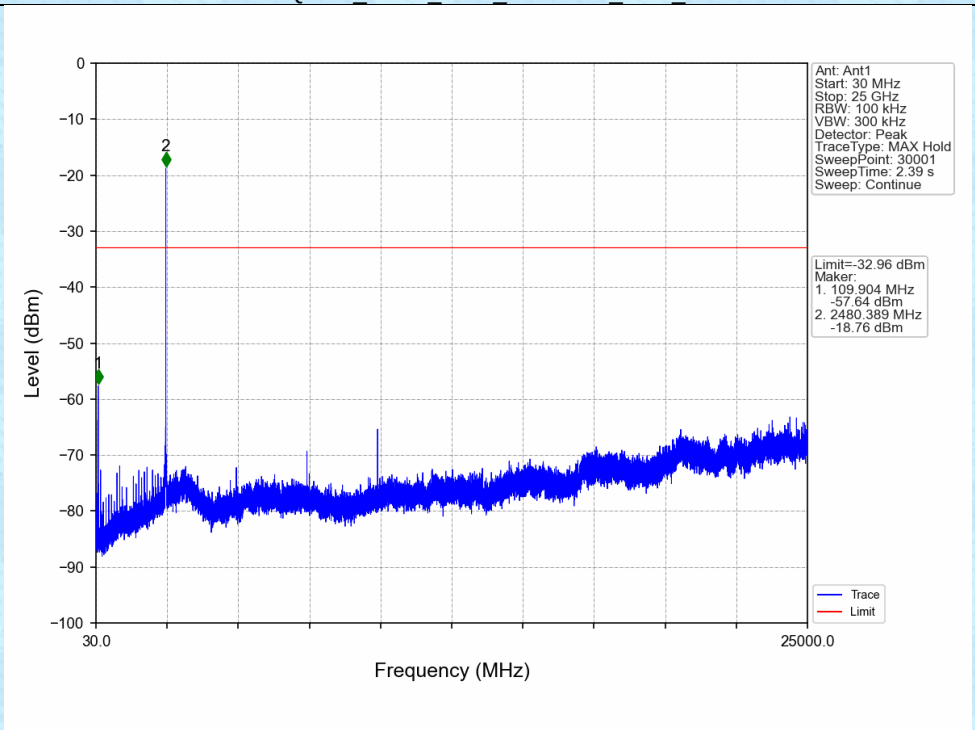

π/4-DQPSK_2DH5_HOPP_Ant1_NTNV

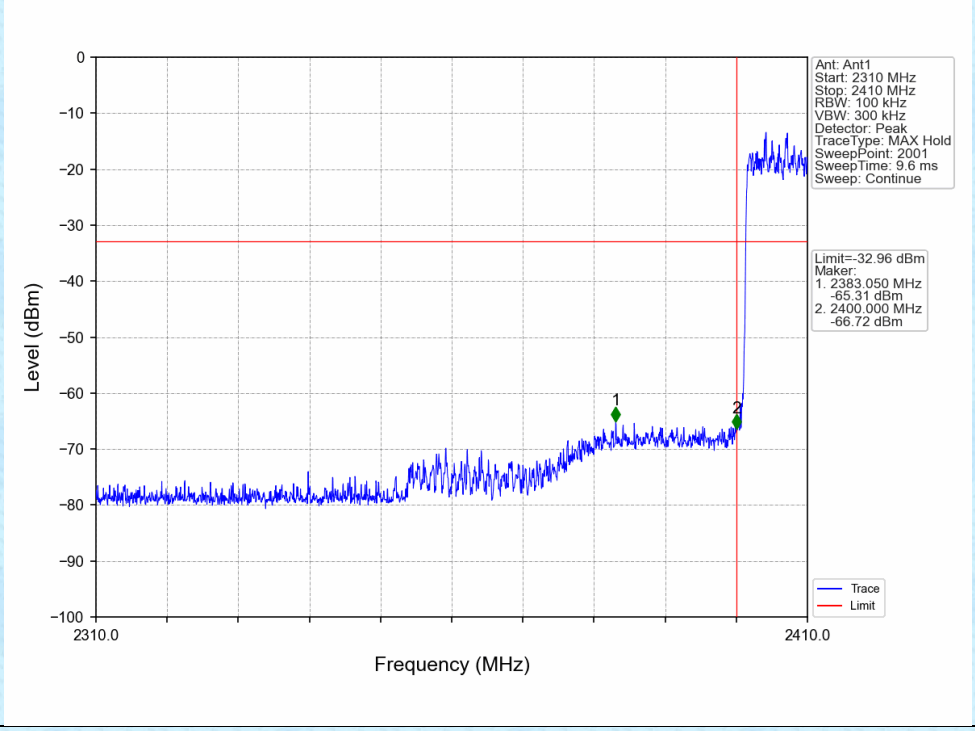

π/4-DQPSK_2DH5_HOPP_Ant1_NTNV

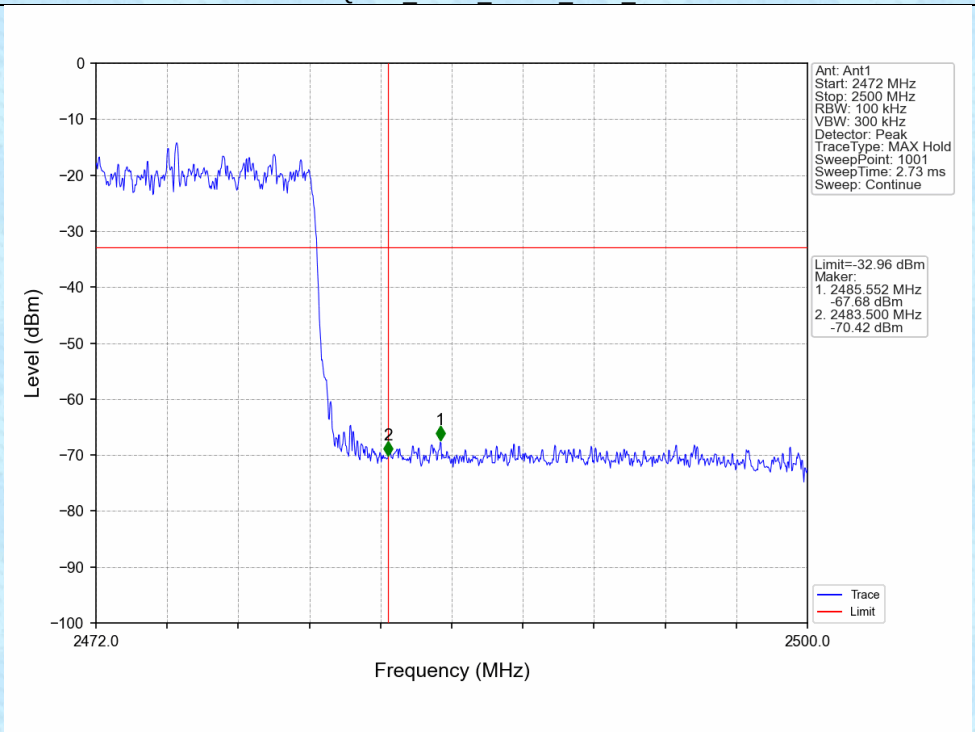

------End------