




Duty Cycle

Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	31.97	4.95	10
NVNT	BLE 1M	2440	31.97	4.95	10
NVNT	BLE 1M	2480	32.07	4.94	10
NVNT	BLE 2M	2402	23.98	6.20	10
NVNT	BLE 2M	2440	23.98	6.20	10
NVNT	BLE 2M	2480	23.98	6.20	10

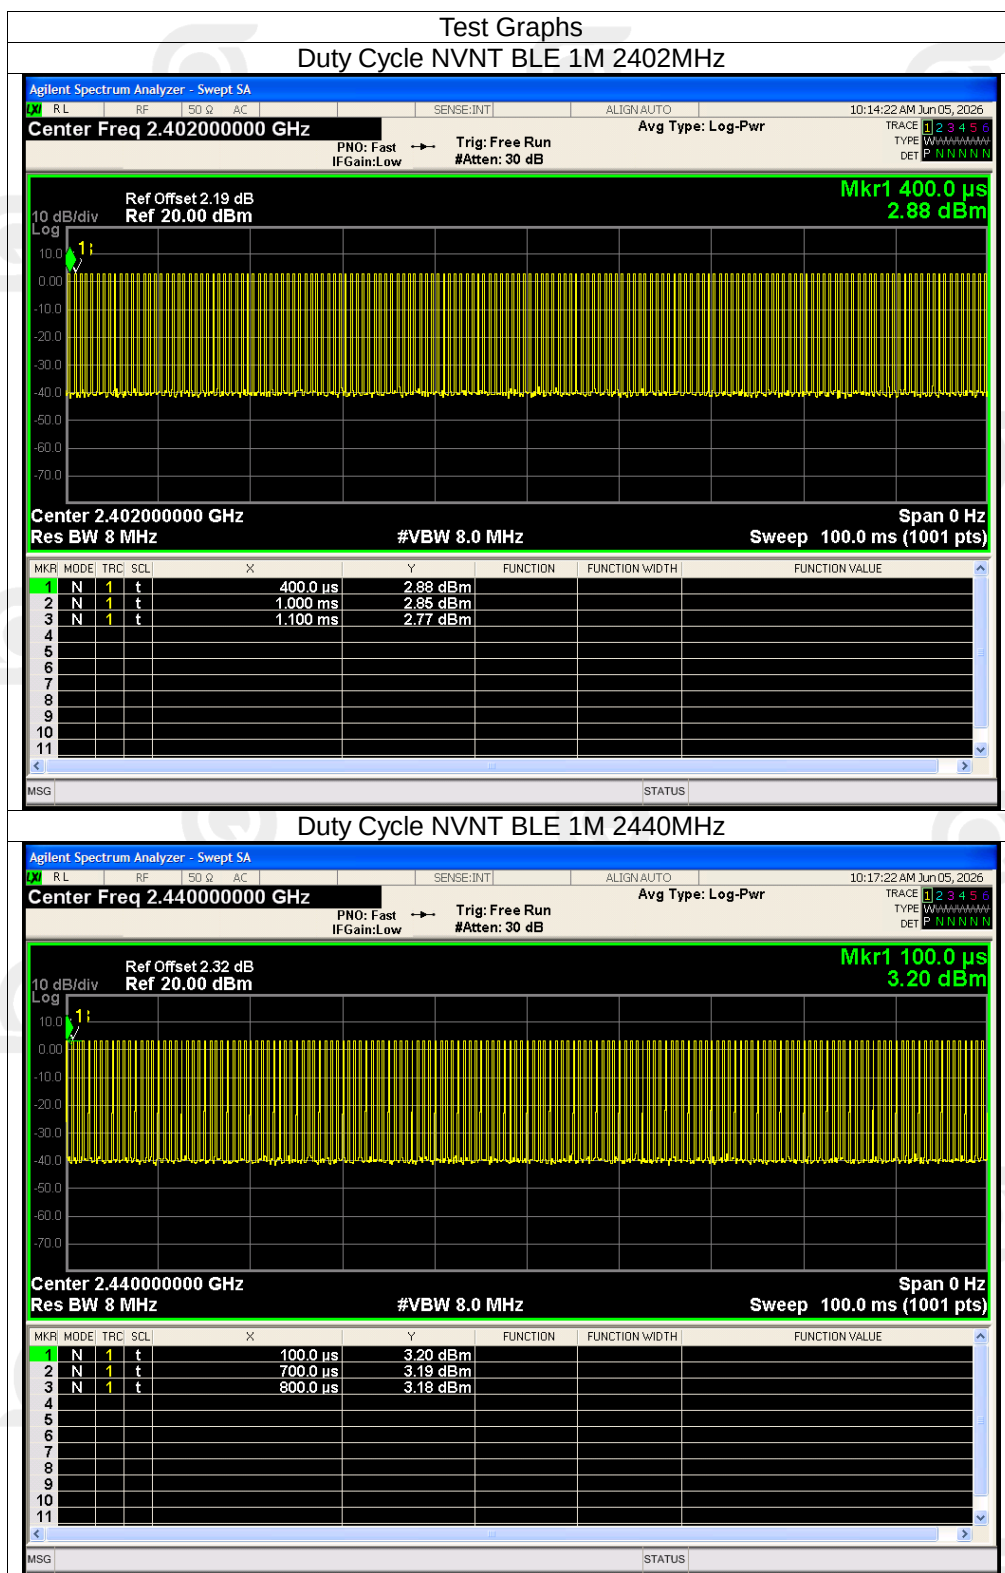


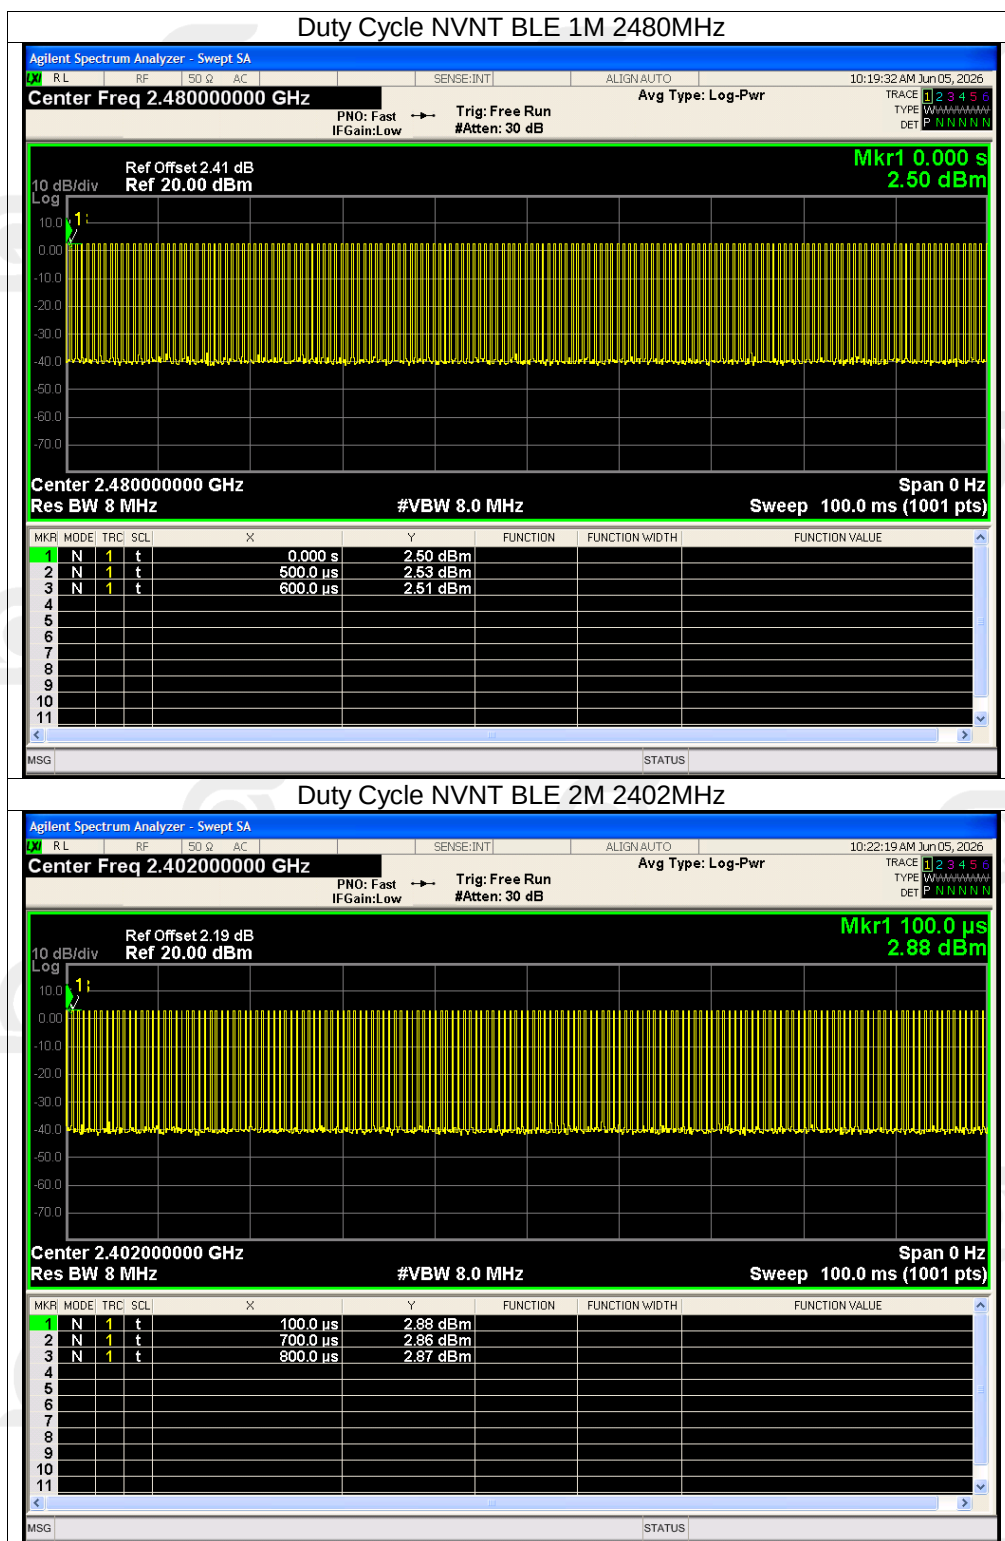


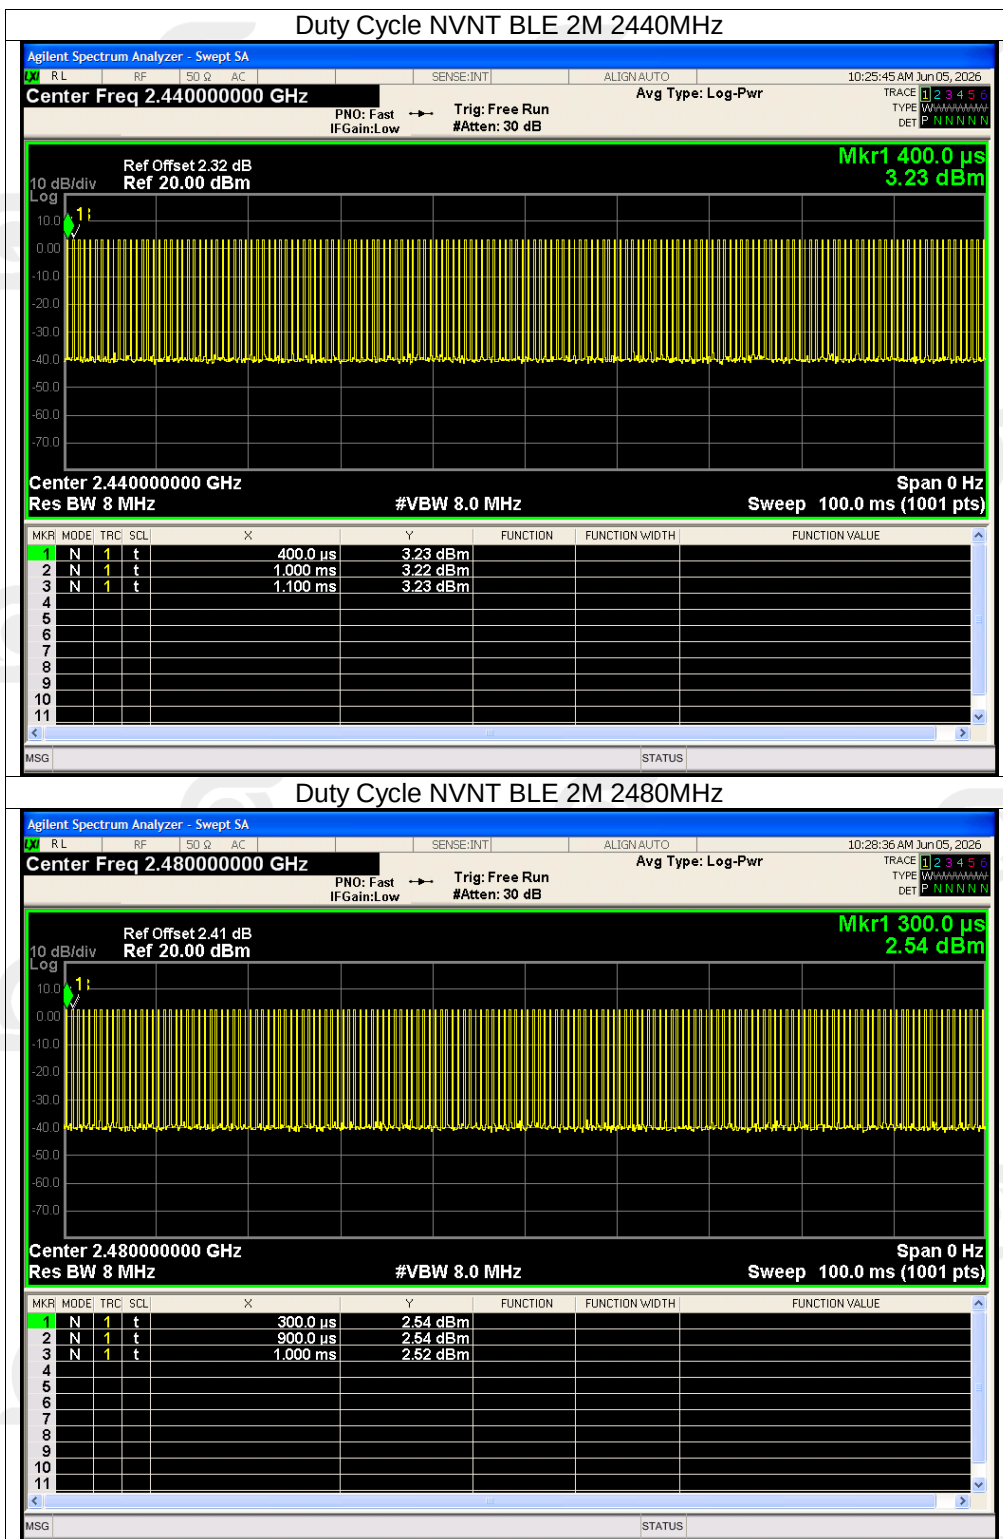


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	2.84	30	Pass
NVNT	BLE 1M	2440	3.20	30	Pass
NVNT	BLE 1M	2480	2.51	30	Pass
NVNT	BLE 2M	2402	2.80	30	Pass
NVNT	BLE 2M	2440	3.16	30	Pass
NVNT	BLE 2M	2480	2.48	30	Pass

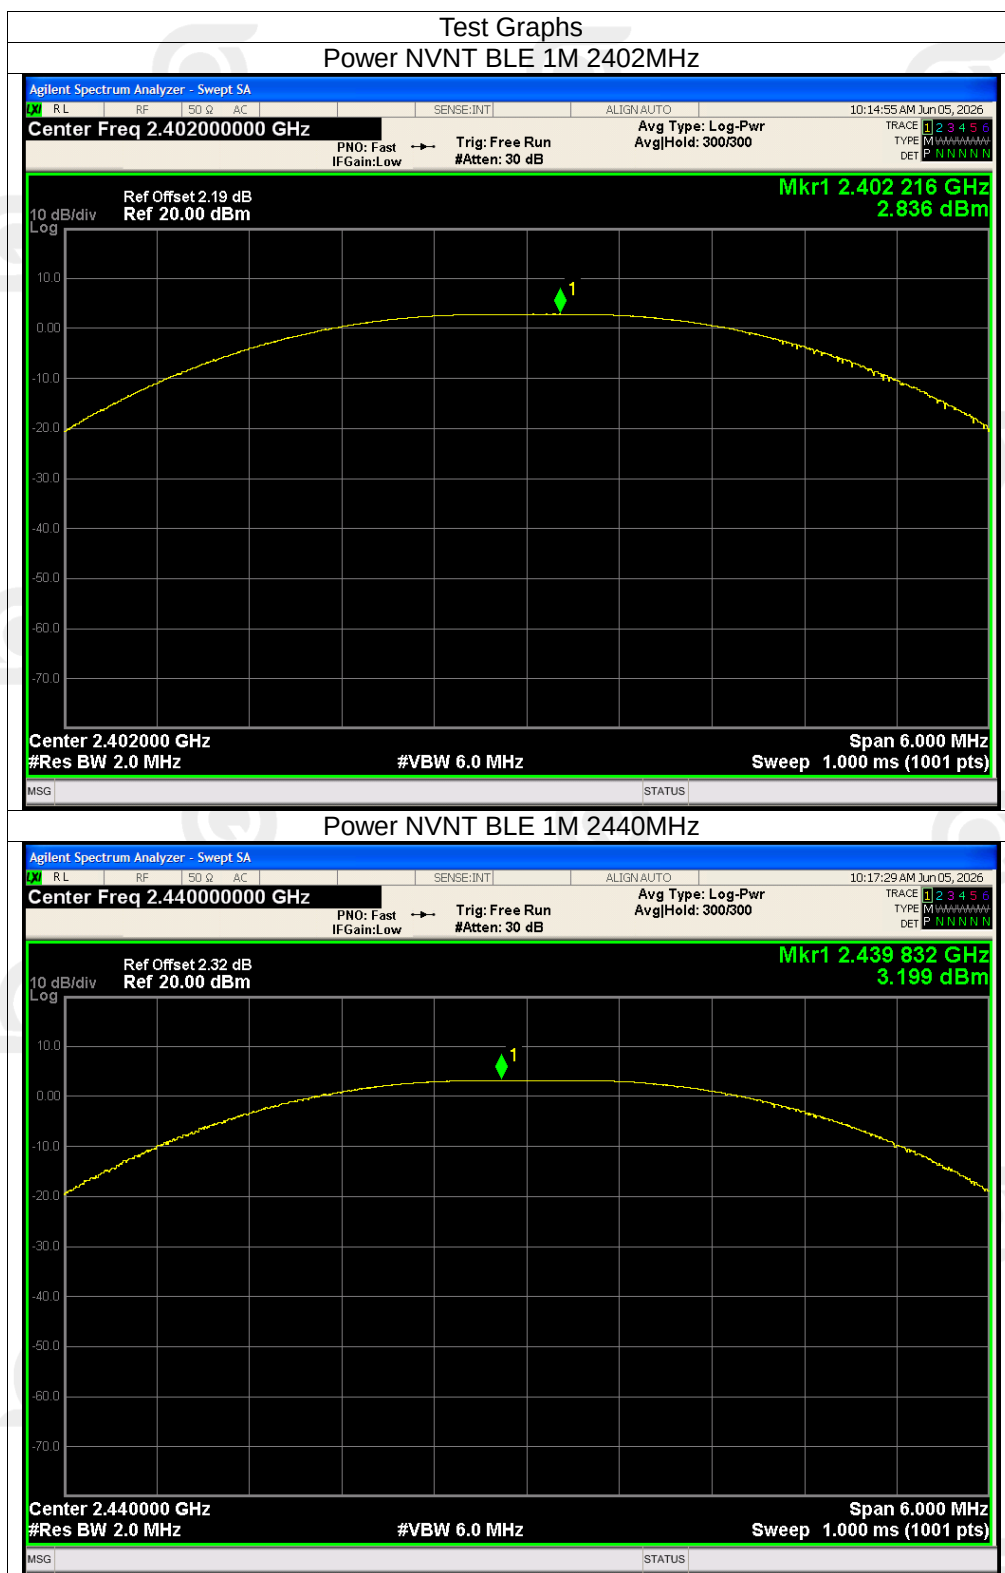


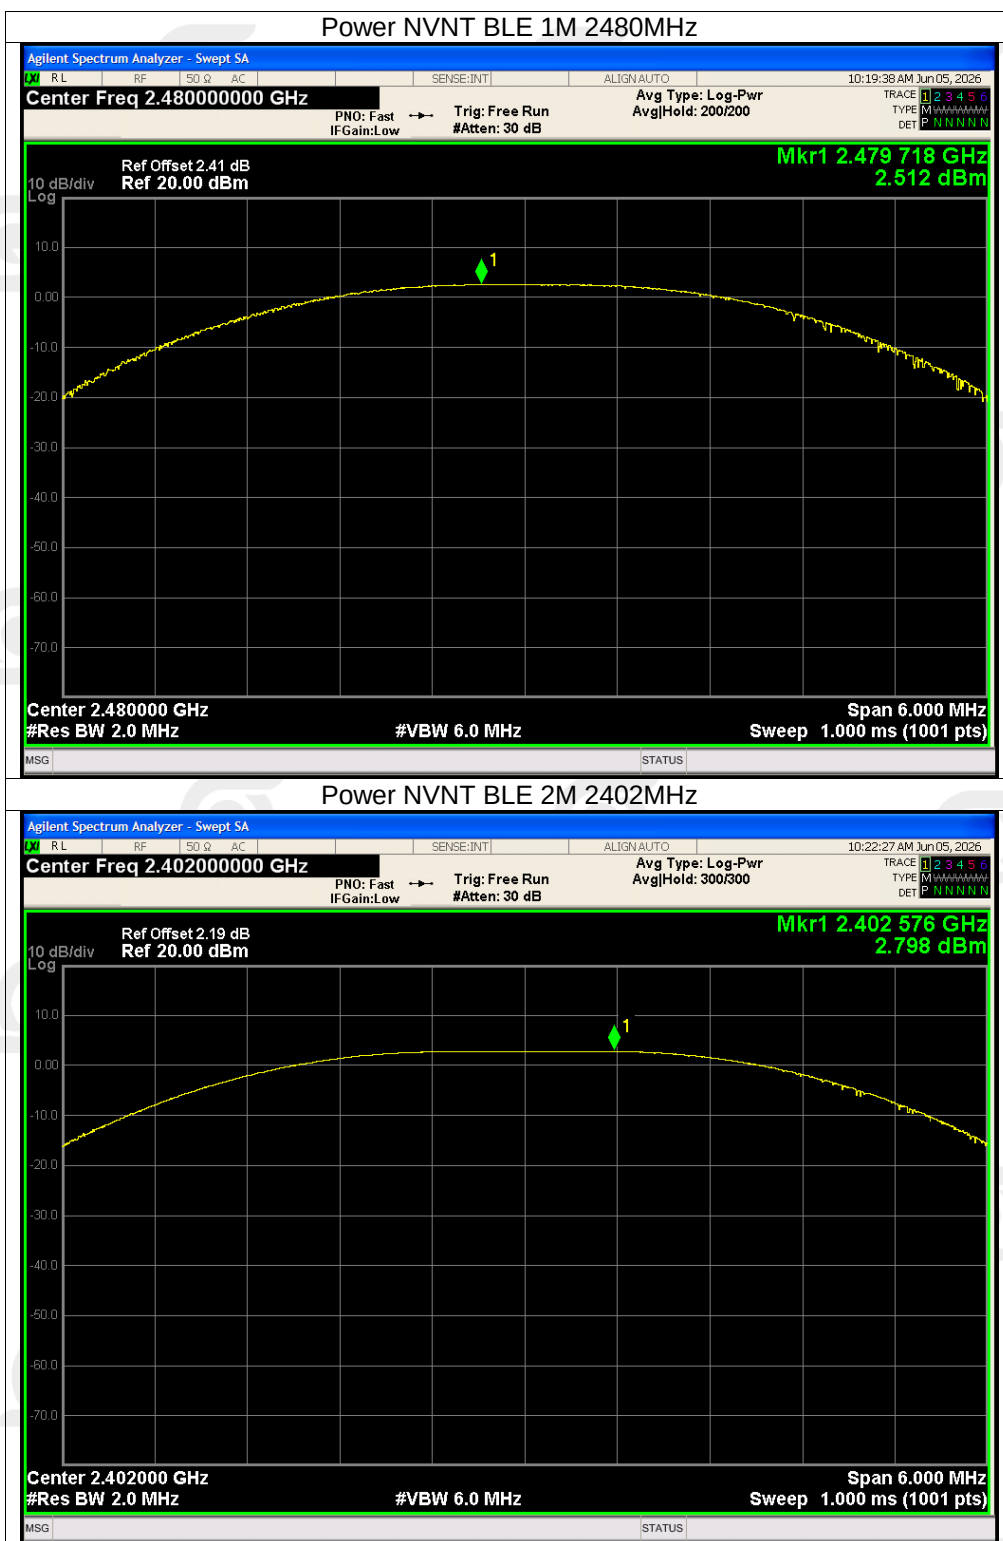


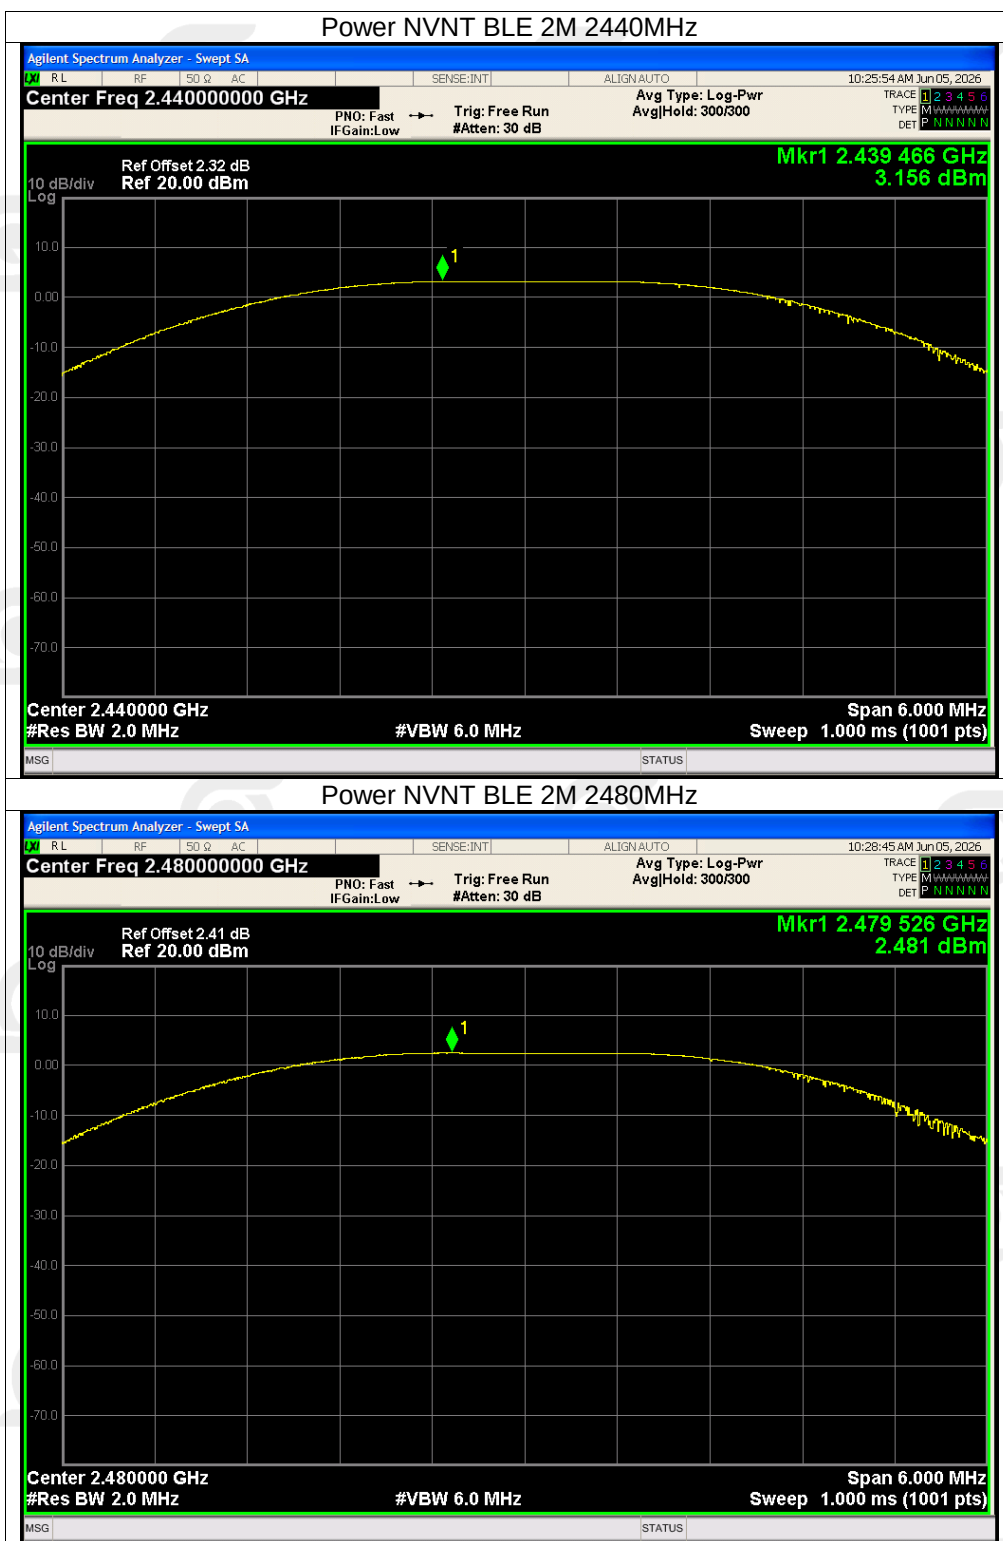


-6dB Bandwidth

Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	0.510	0.5	Pass
NVNT	BLE 1M	2440	0.524	0.5	Pass
NVNT	BLE 1M	2480	0.535	0.5	Pass
NVNT	BLE 2M	2402	0.865	0.5	Pass
NVNT	BLE 2M	2440	0.840	0.5	Pass
NVNT	BLE 2M	2480	0.835	0.5	Pass




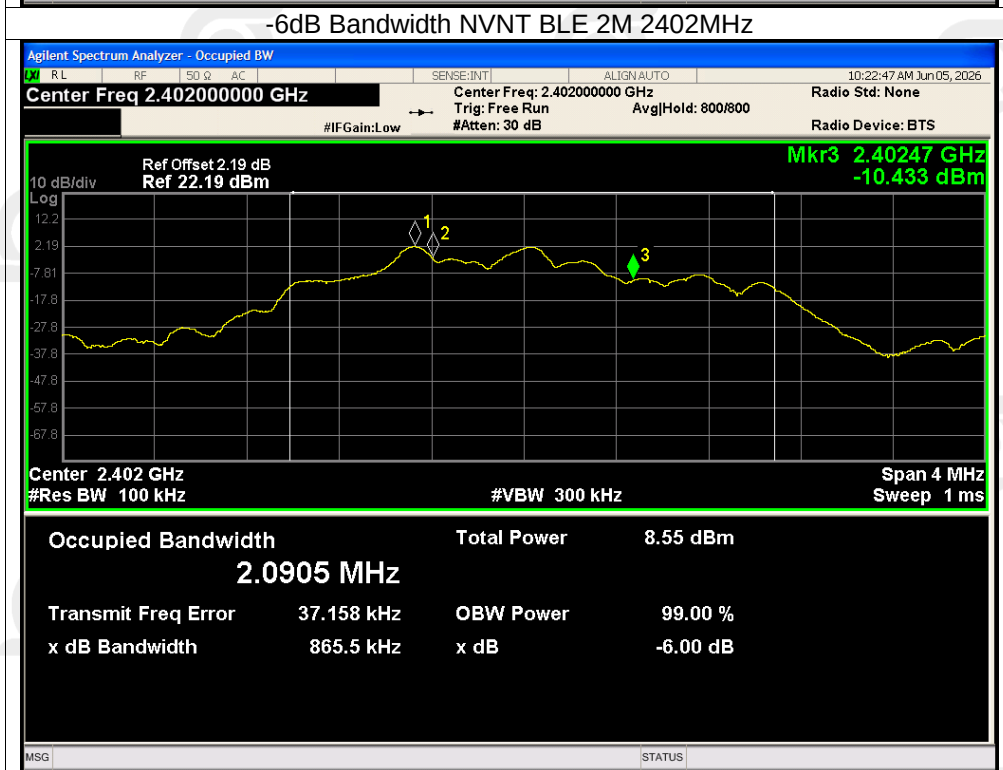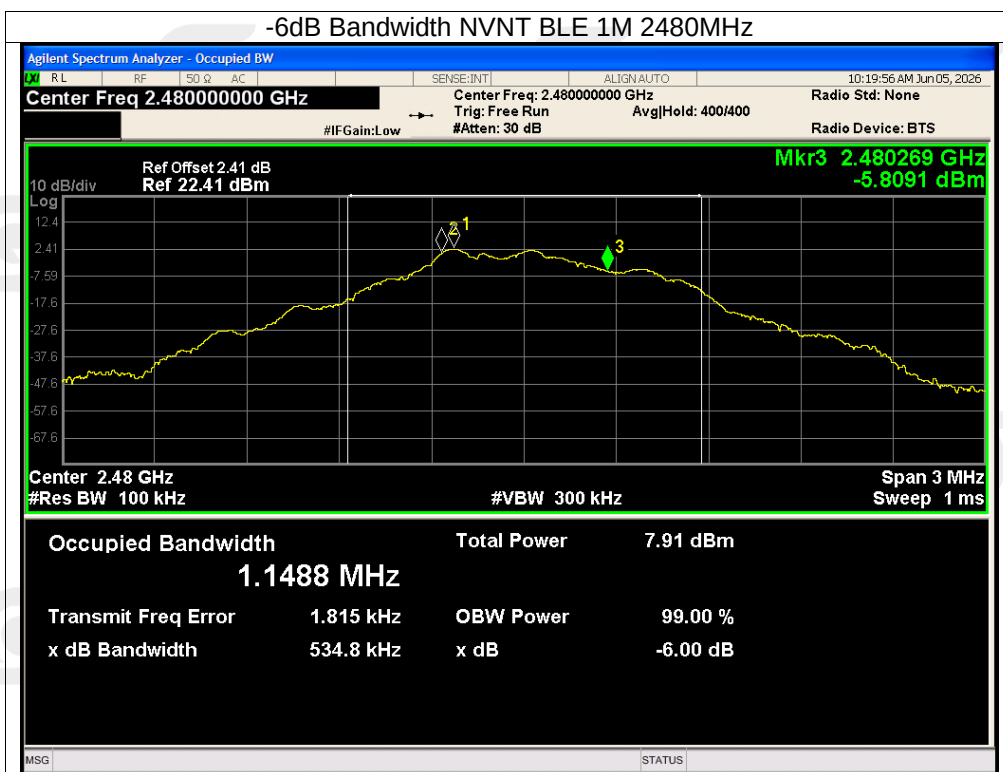


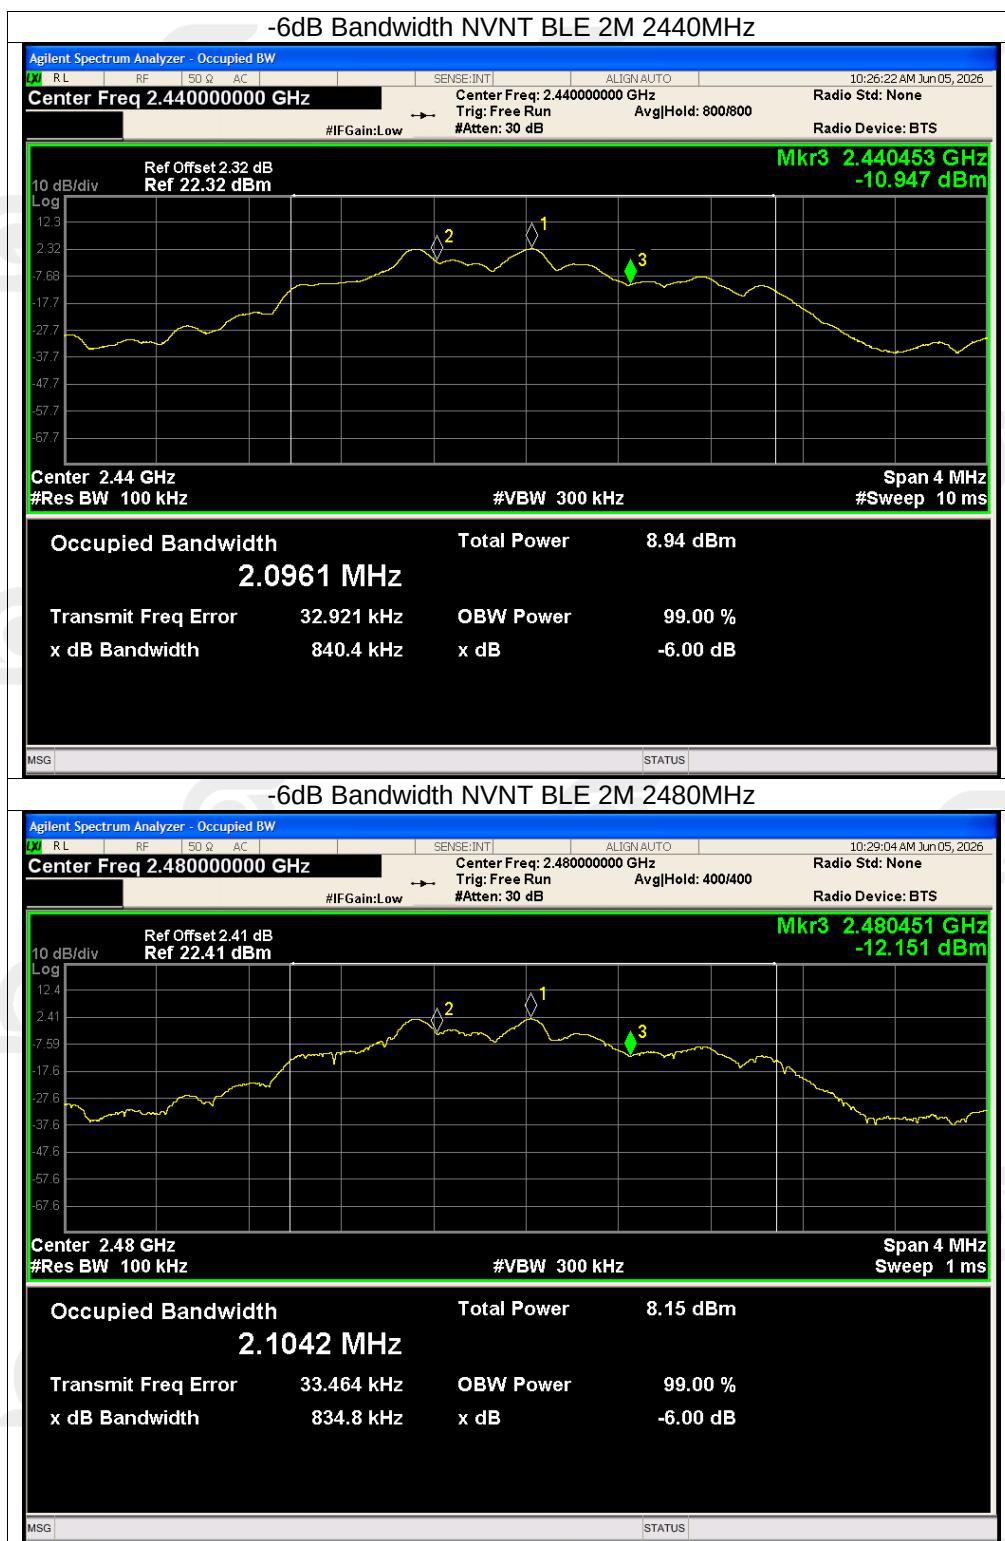


Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	-17.17	8	Pass
NVNT	BLE 1M	2440	-17.30	8	Pass
NVNT	BLE 1M	2480	-18.19	8	Pass
NVNT	BLE 2M	2402	-19.67	8	Pass
NVNT	BLE 2M	2440	-19.22	8	Pass
NVNT	BLE 2M	2480	-19.84	8	Pass

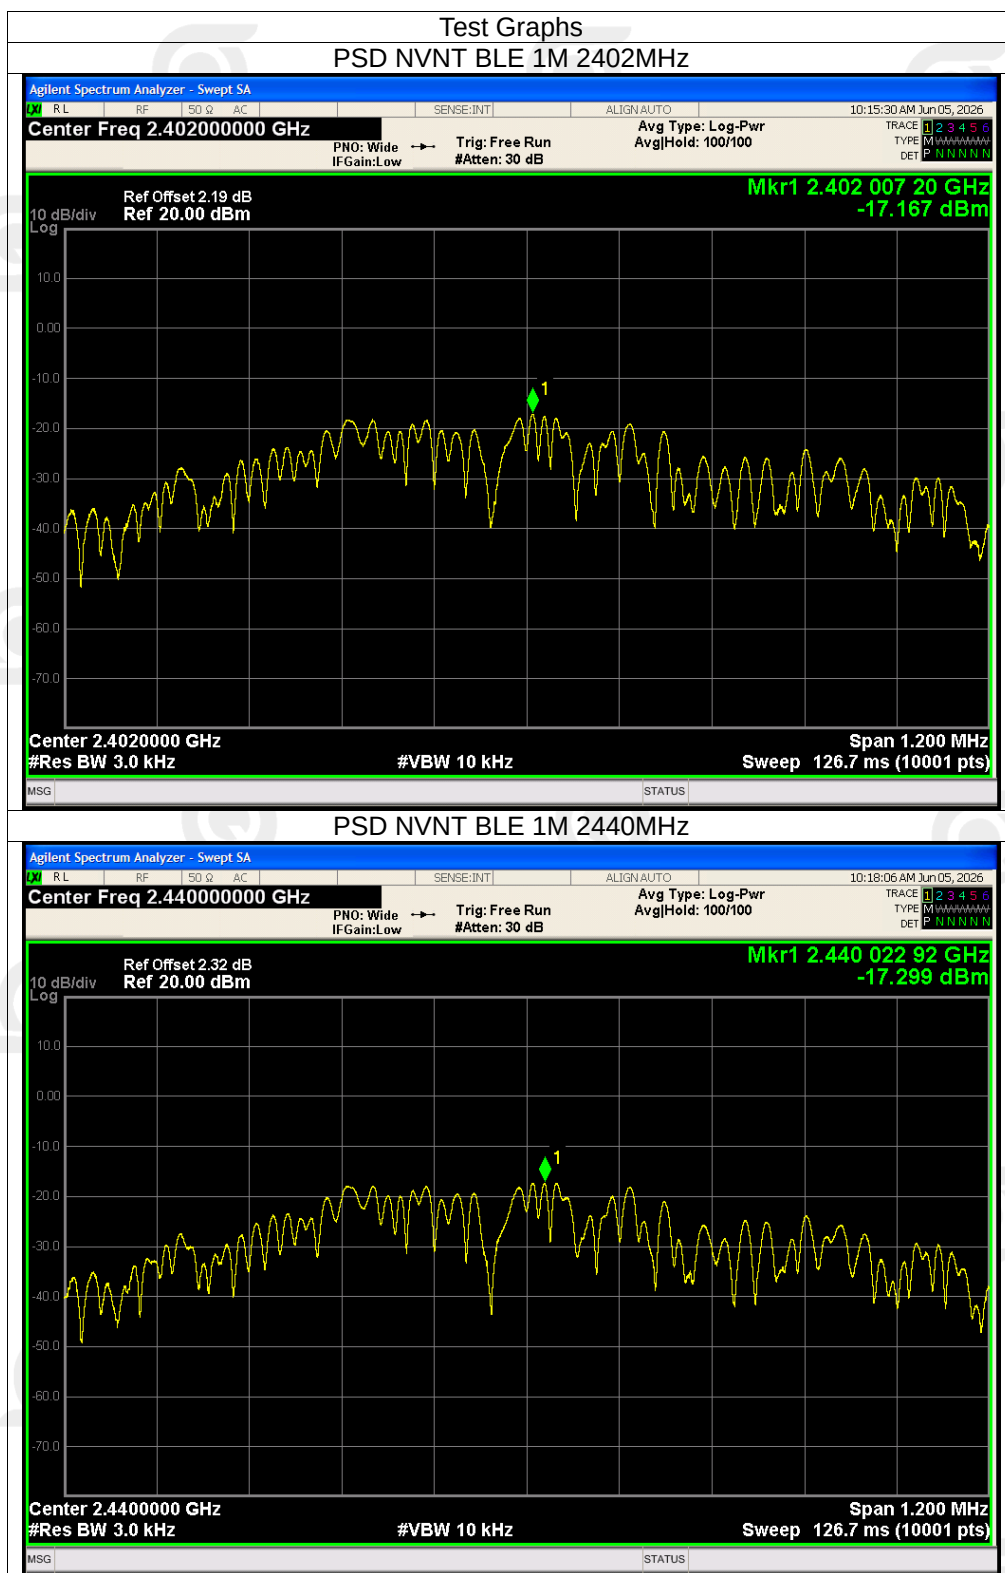


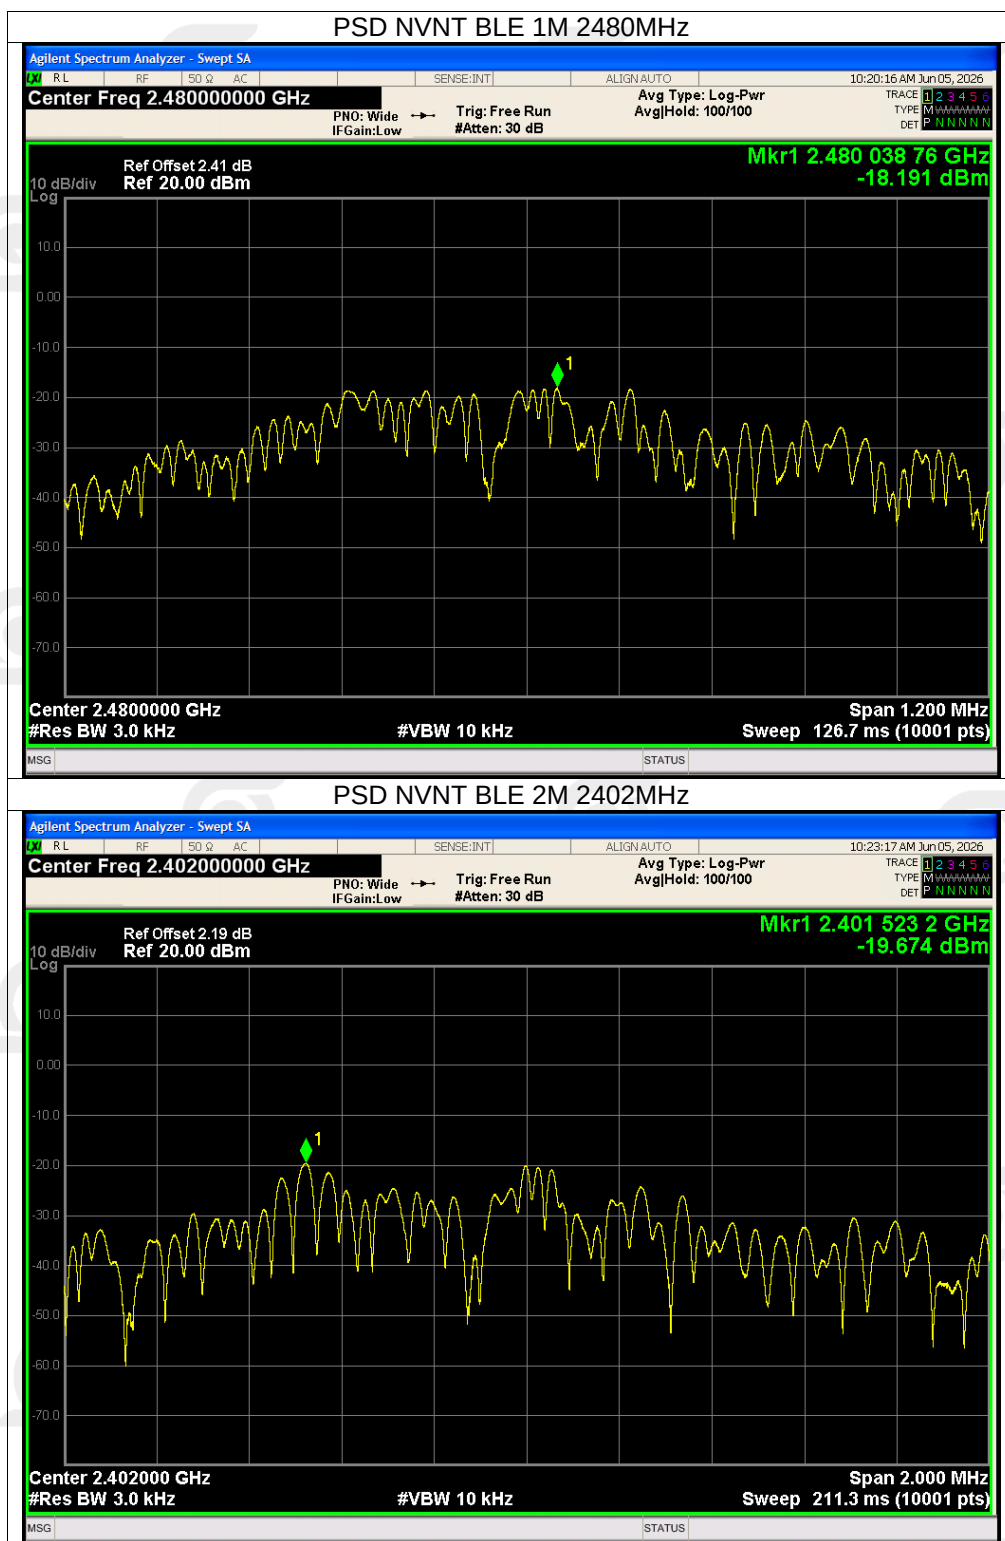


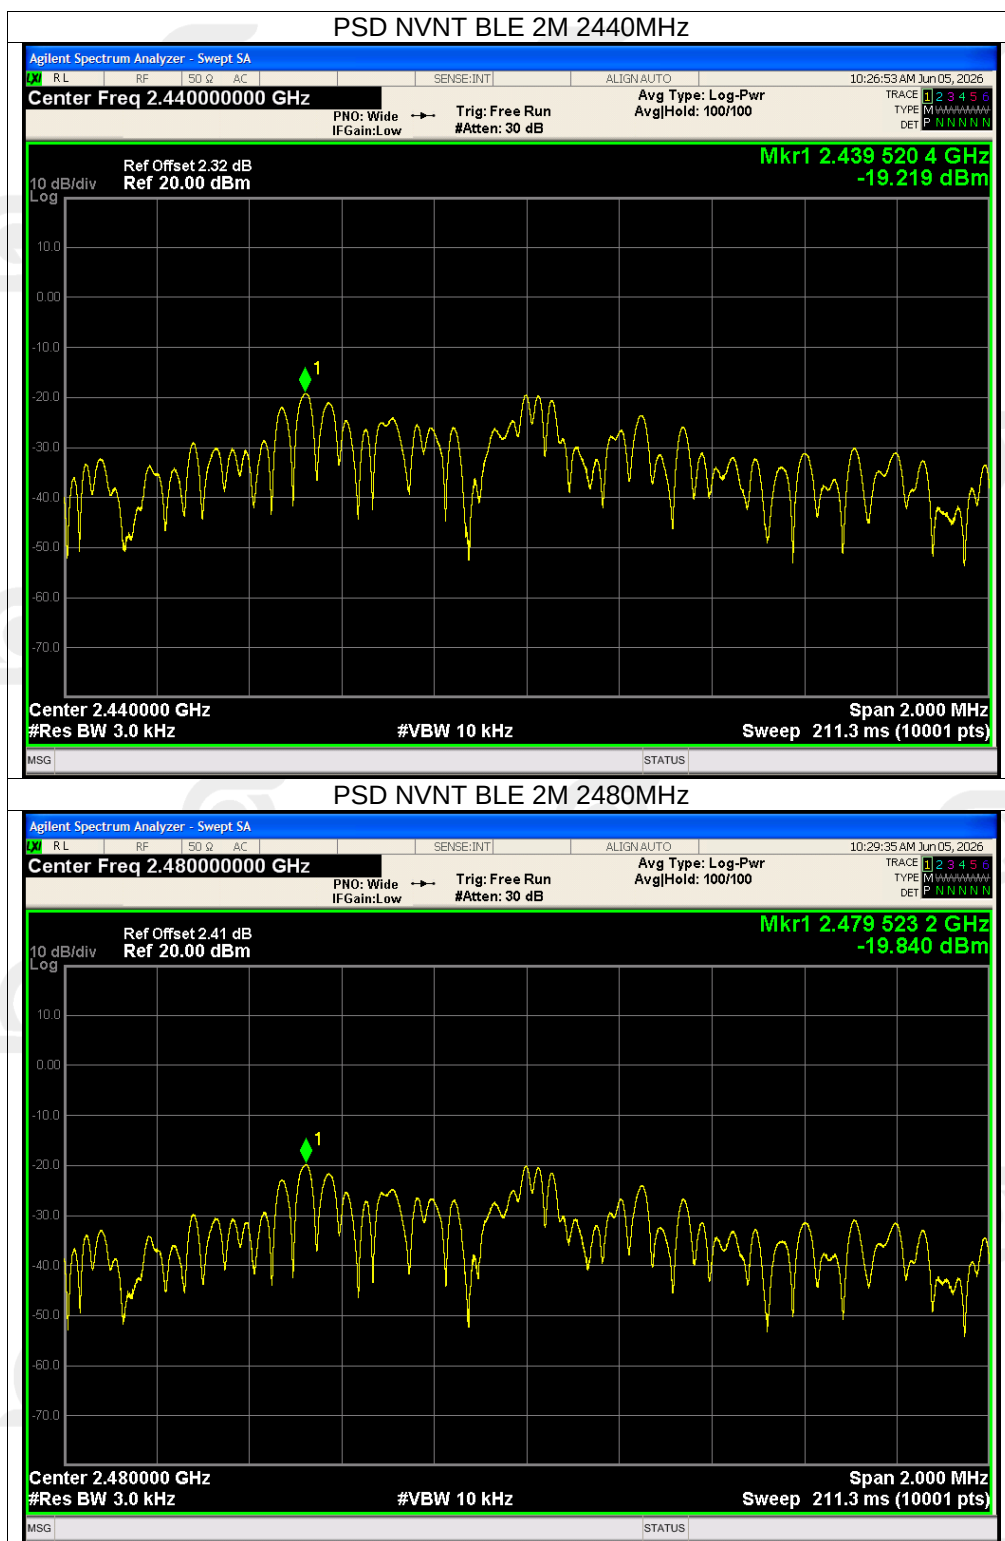


Band Edge

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-55.40	-20	Pass
NVNT	BLE 1M	2480	-55.37	-20	Pass
NVNT	BLE 2M	2402	-54.96	-20	Pass
NVNT	BLE 2M	2480	-48.77	-20	Pass

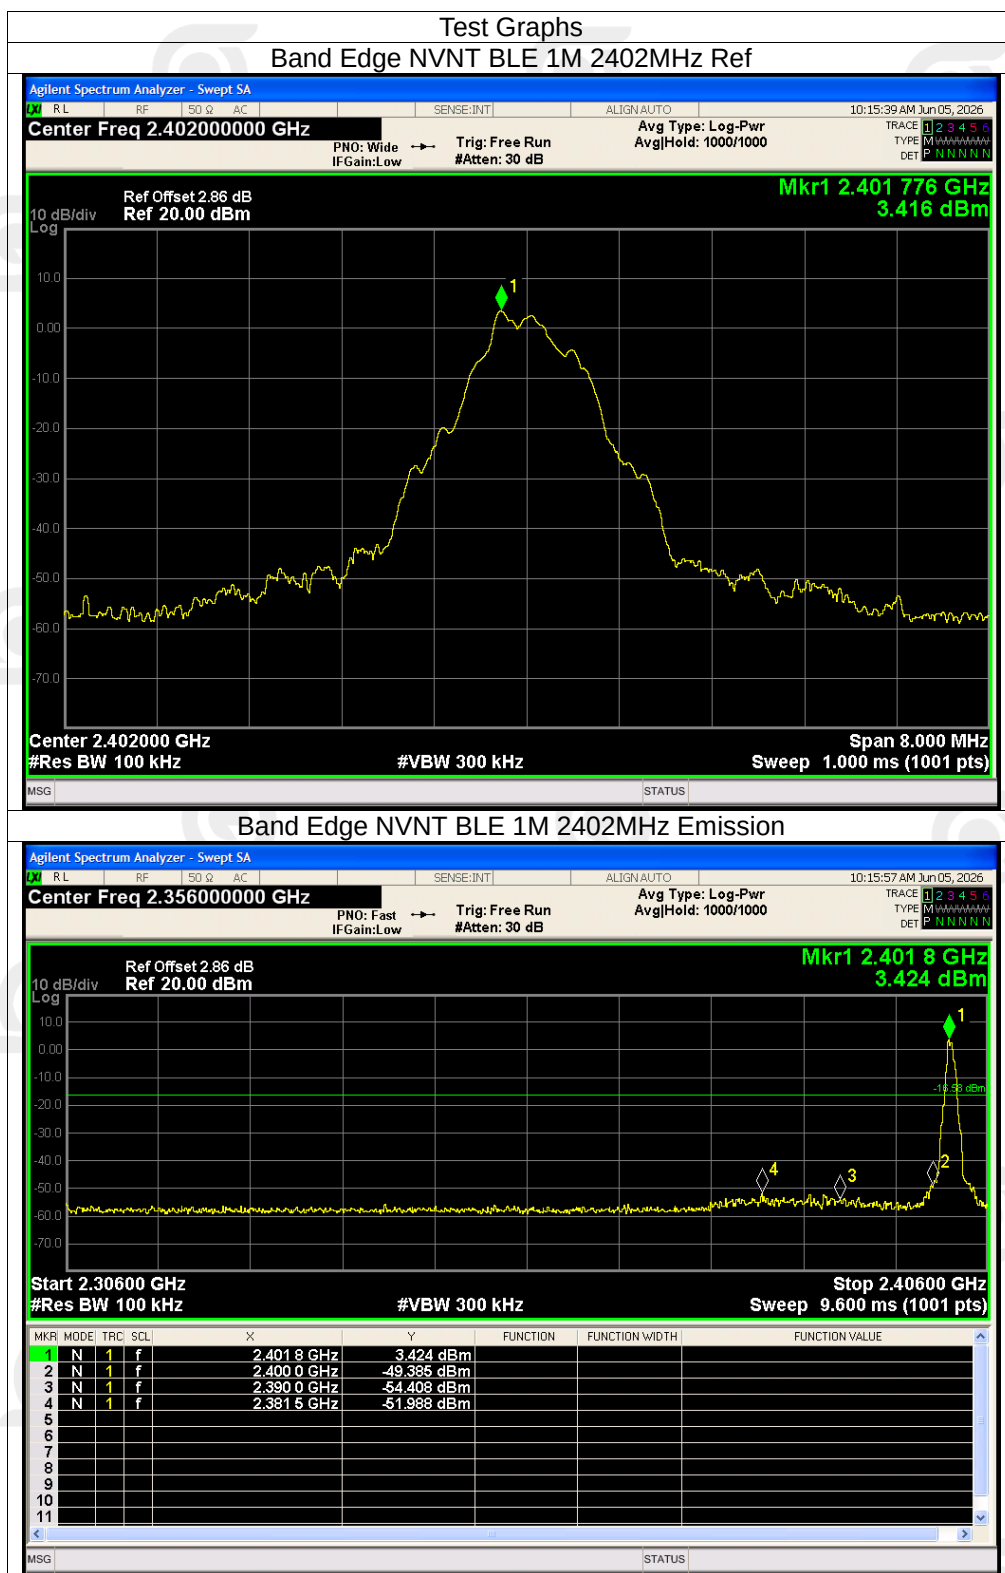

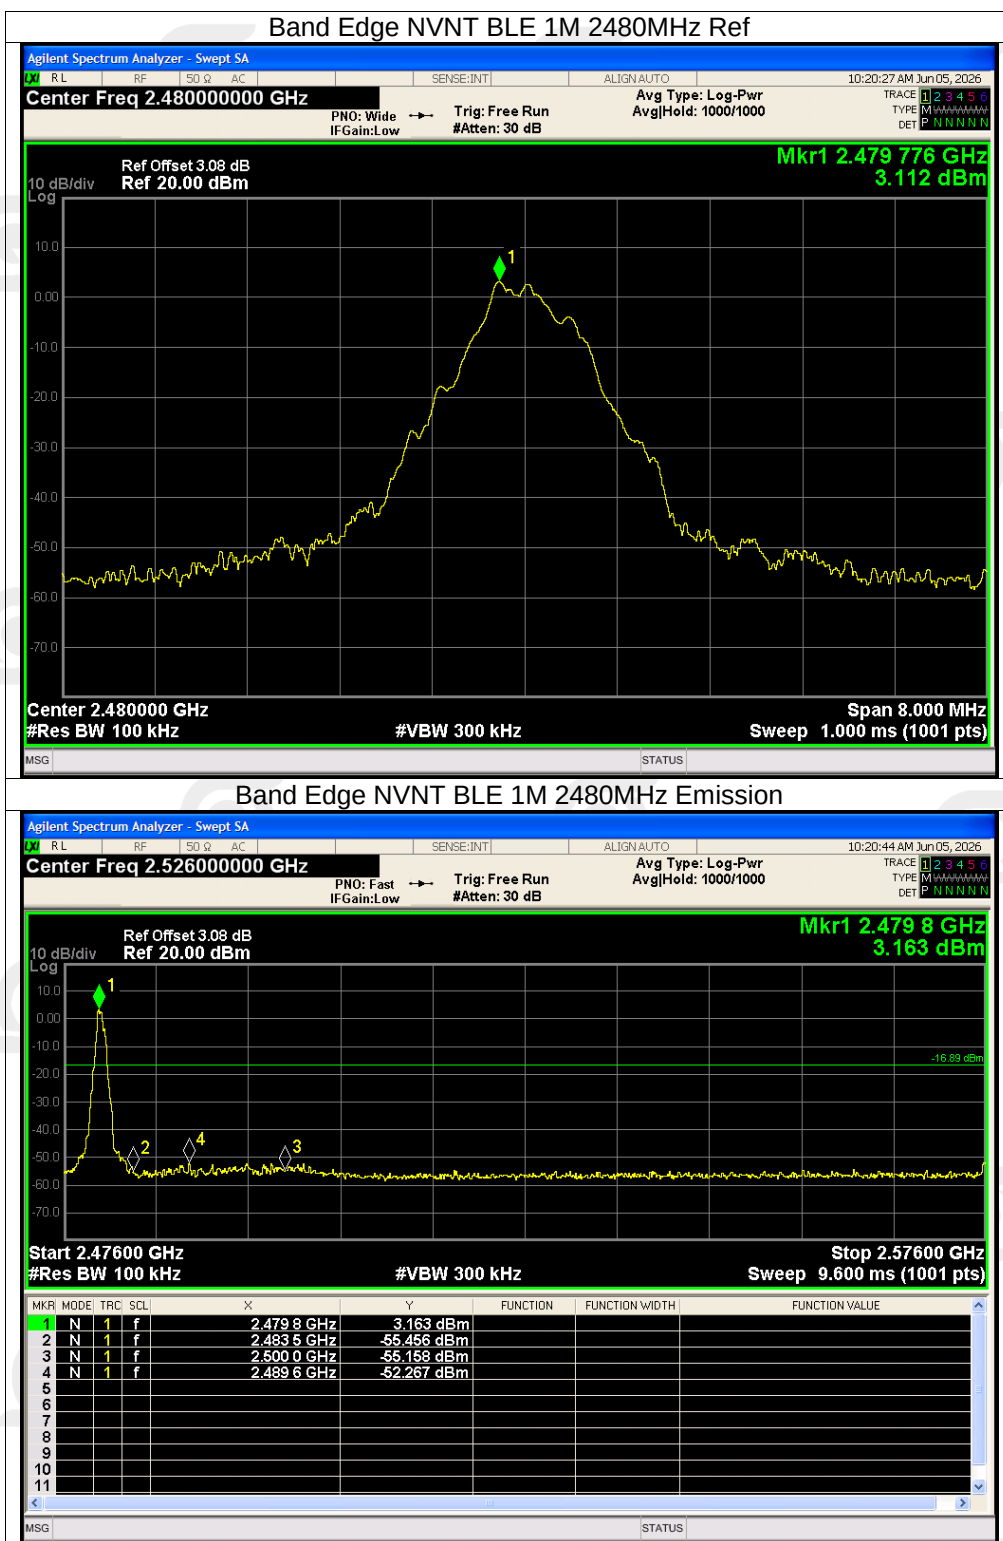





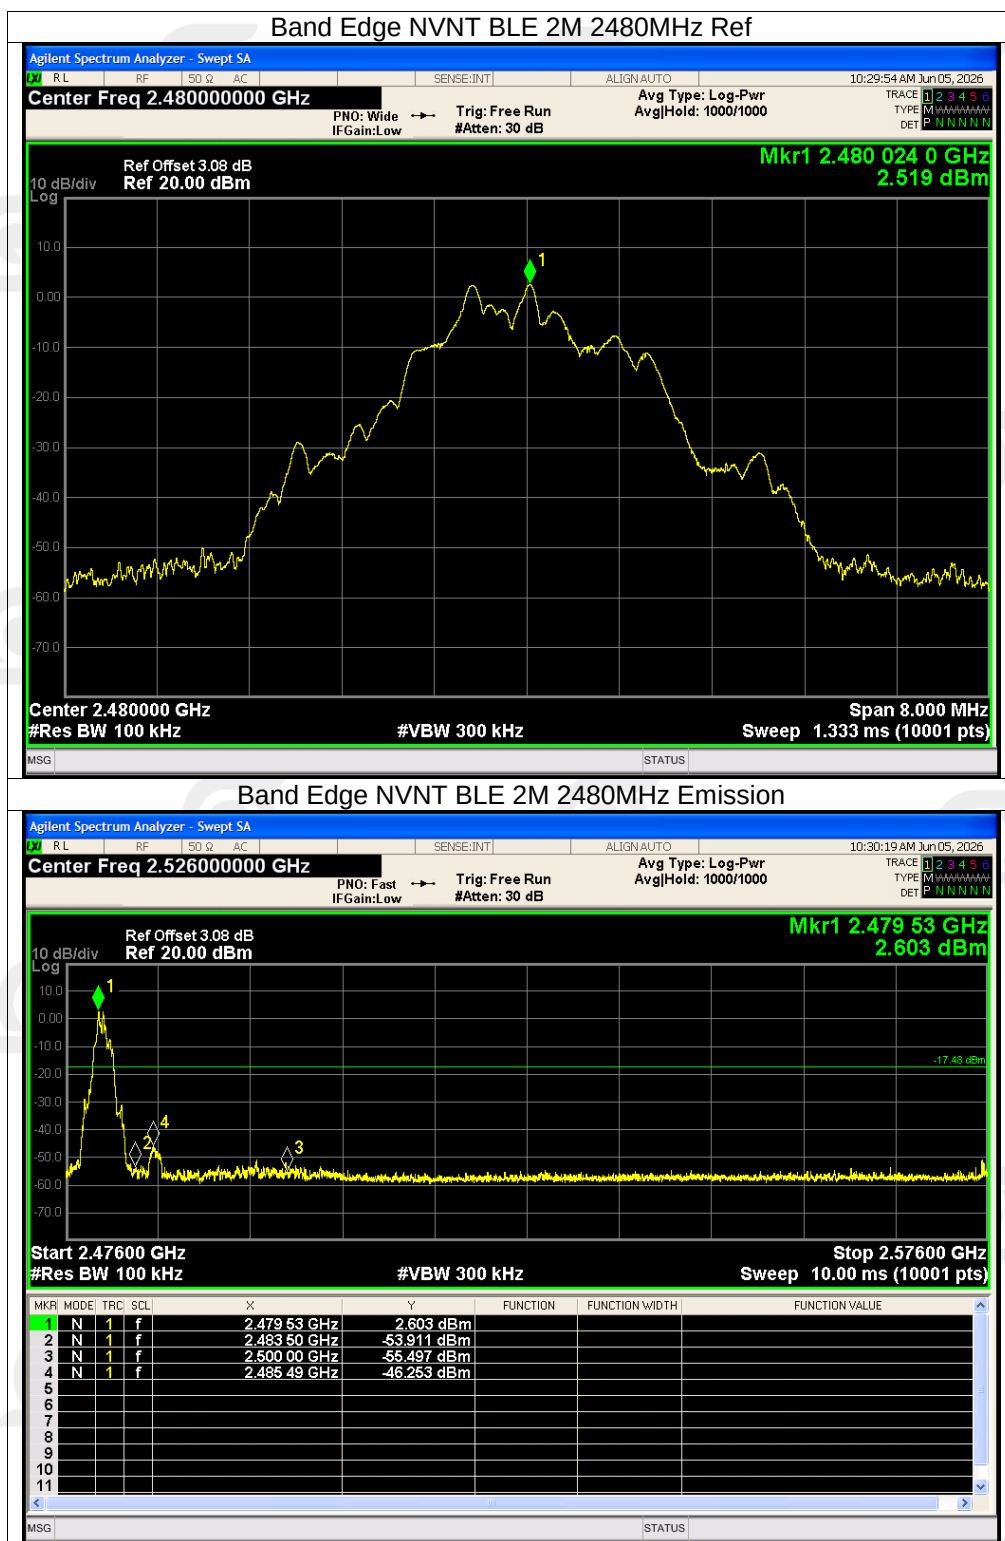



Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-43.66	-20	Pass
NVNT	BLE 1M	2440	-42.65	-20	Pass
NVNT	BLE 1M	2480	-42.20	-20	Pass
NVNT	BLE 2M	2402	-42.55	-20	Pass
NVNT	BLE 2M	2440	-43.44	-20	Pass
NVNT	BLE 2M	2480	-42.12	-20	Pass

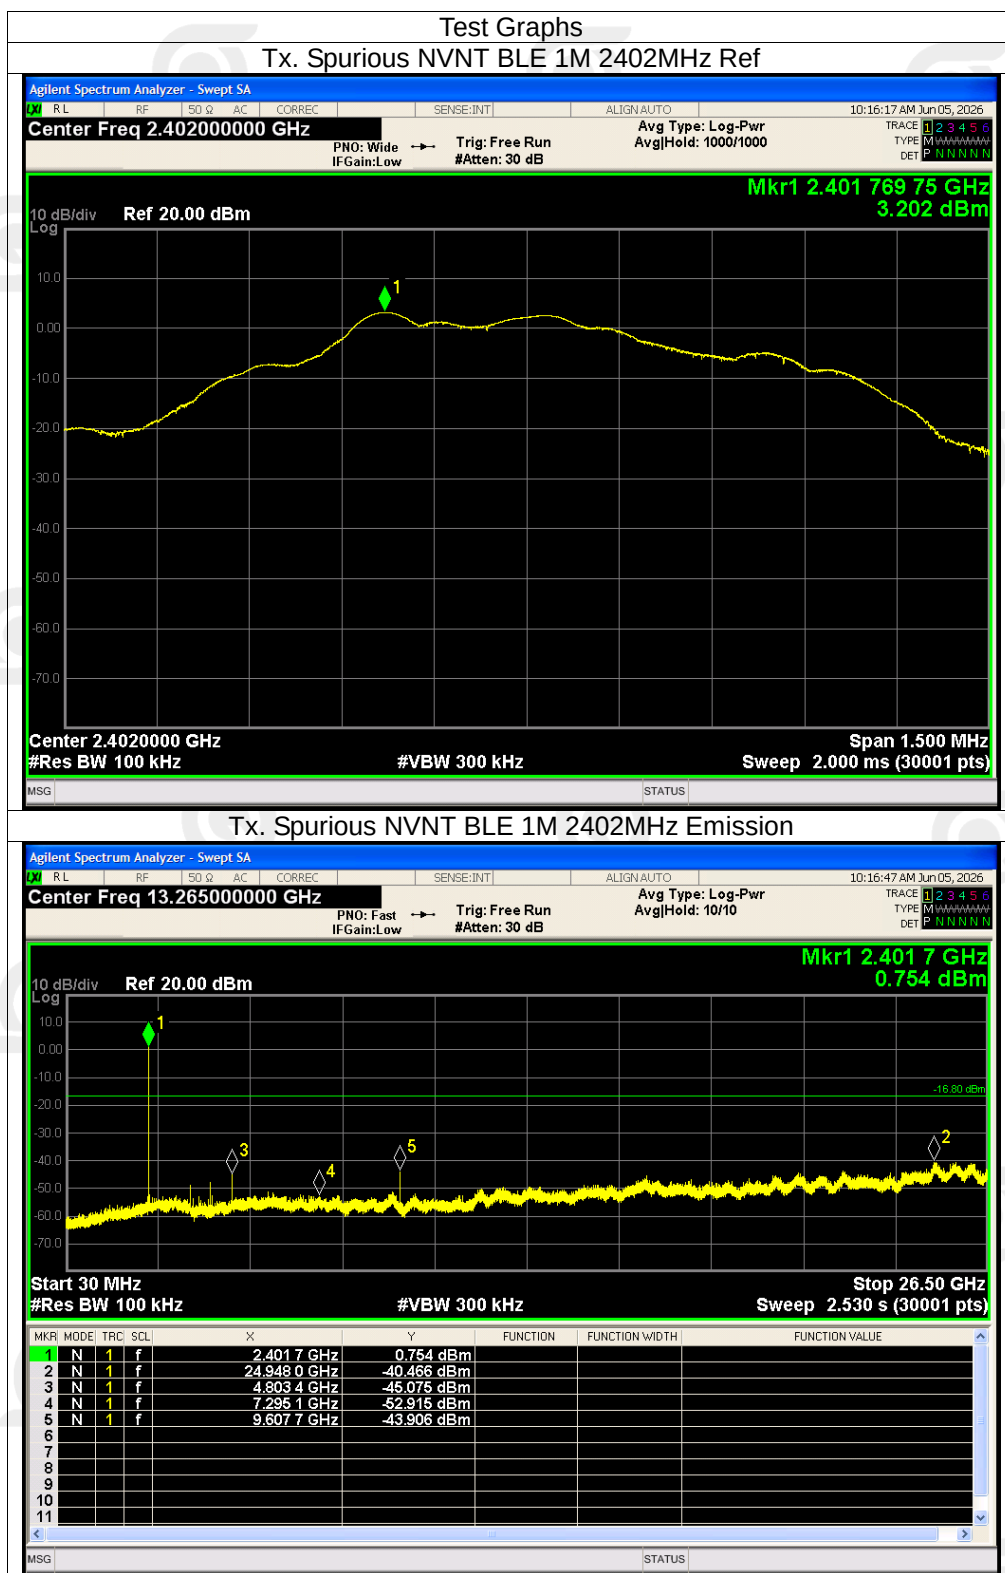


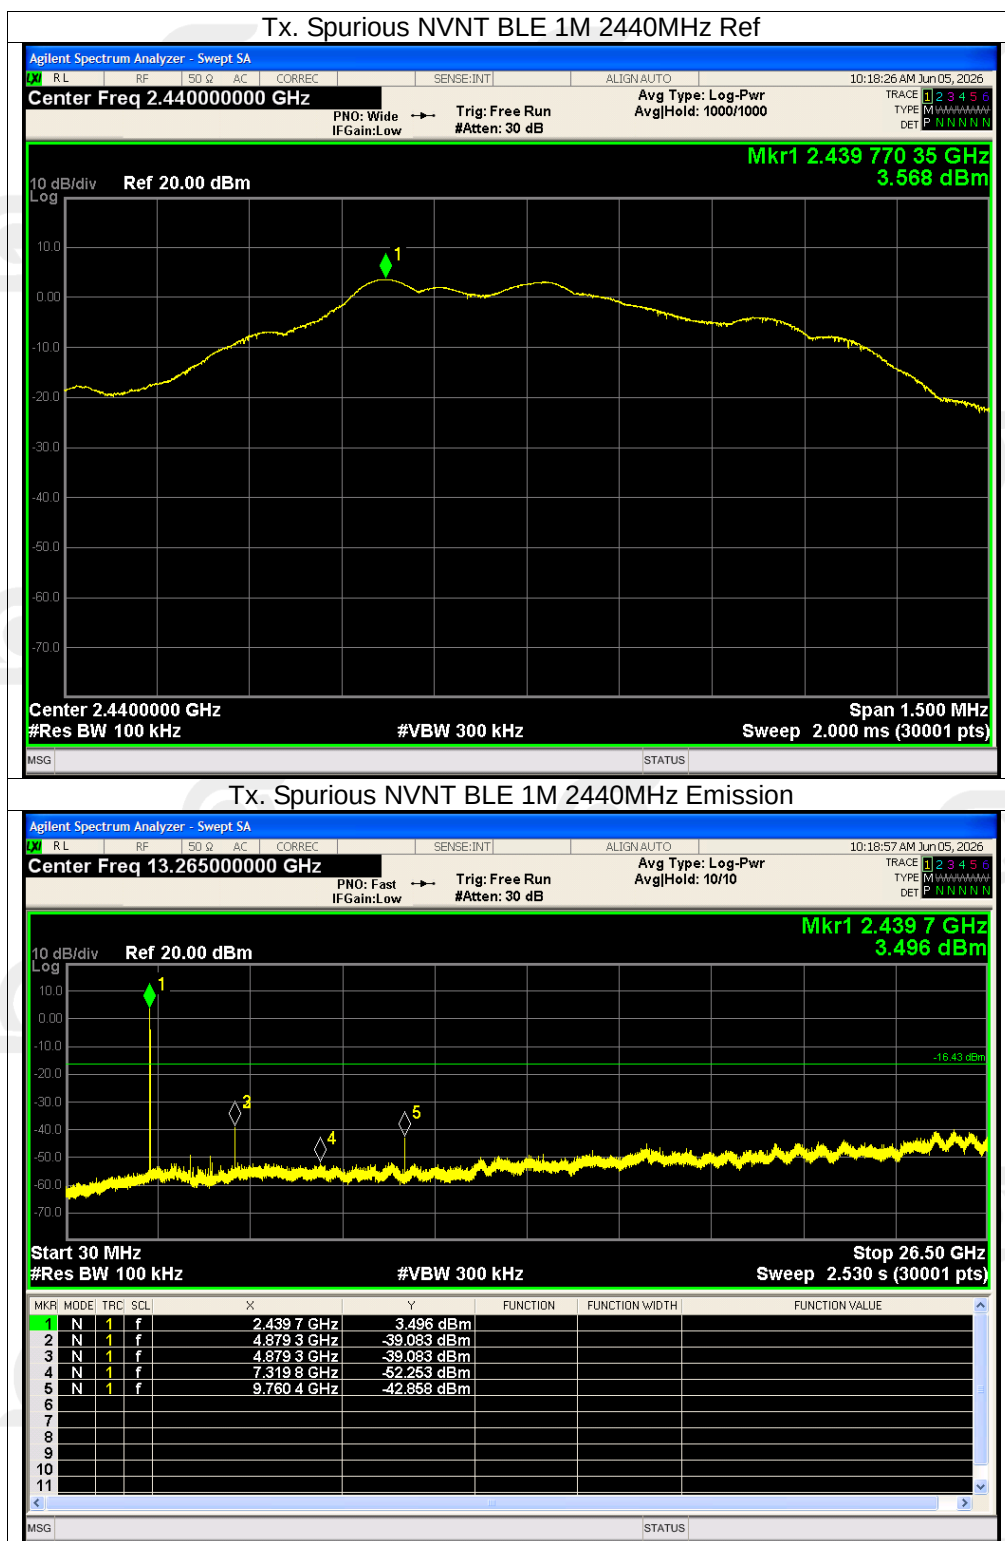

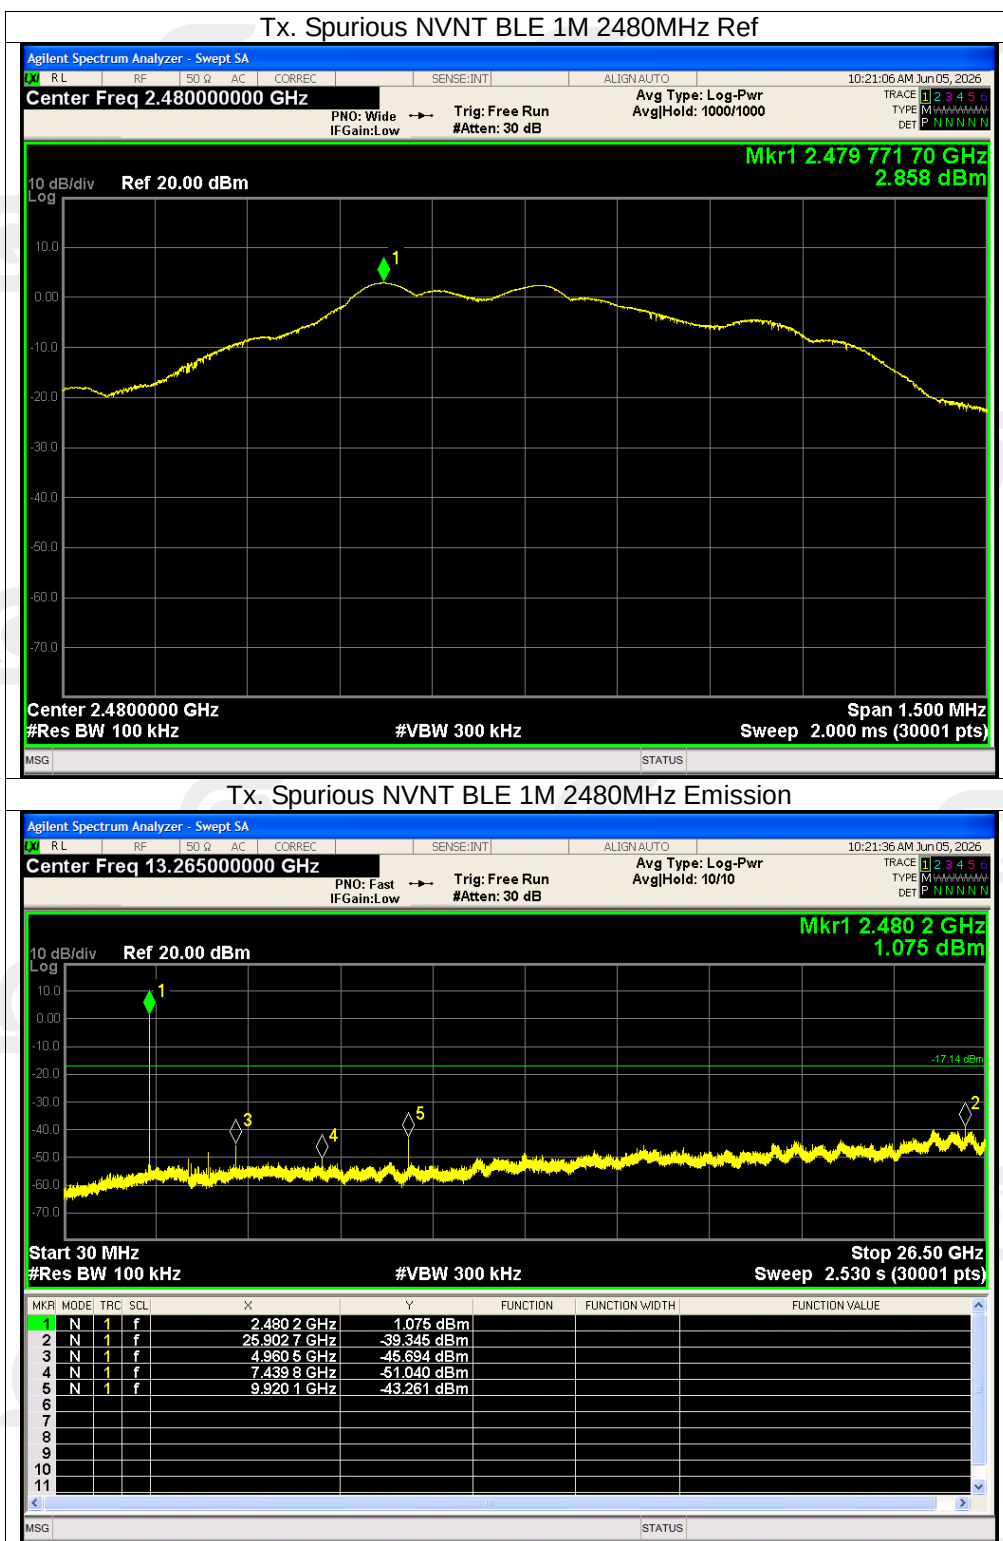

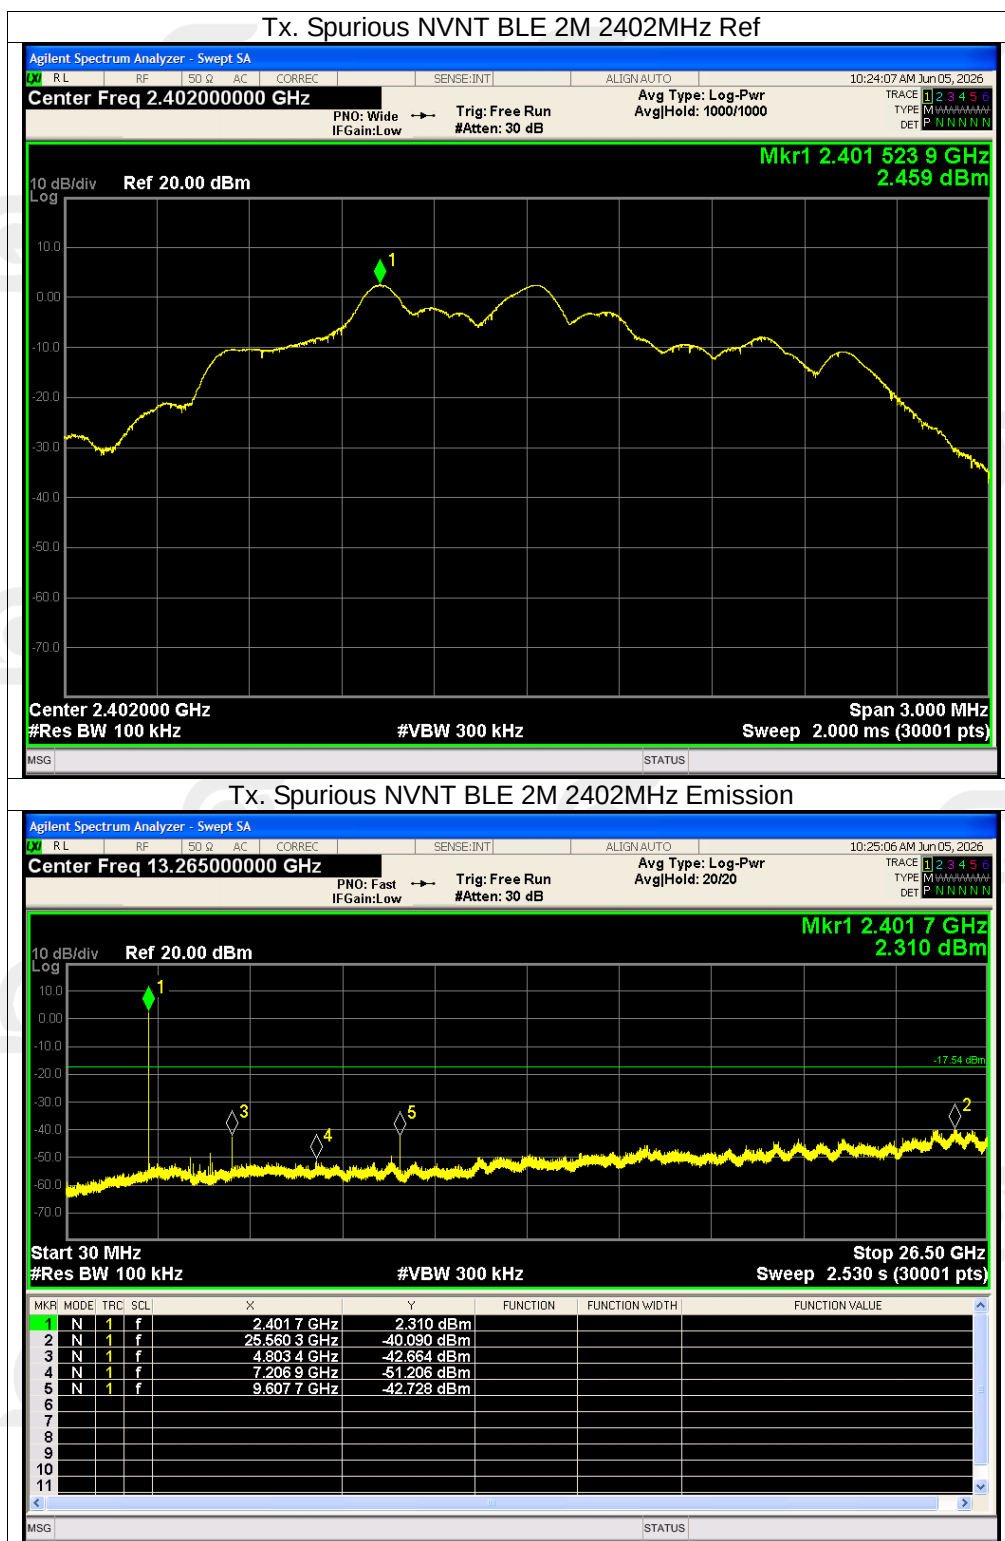

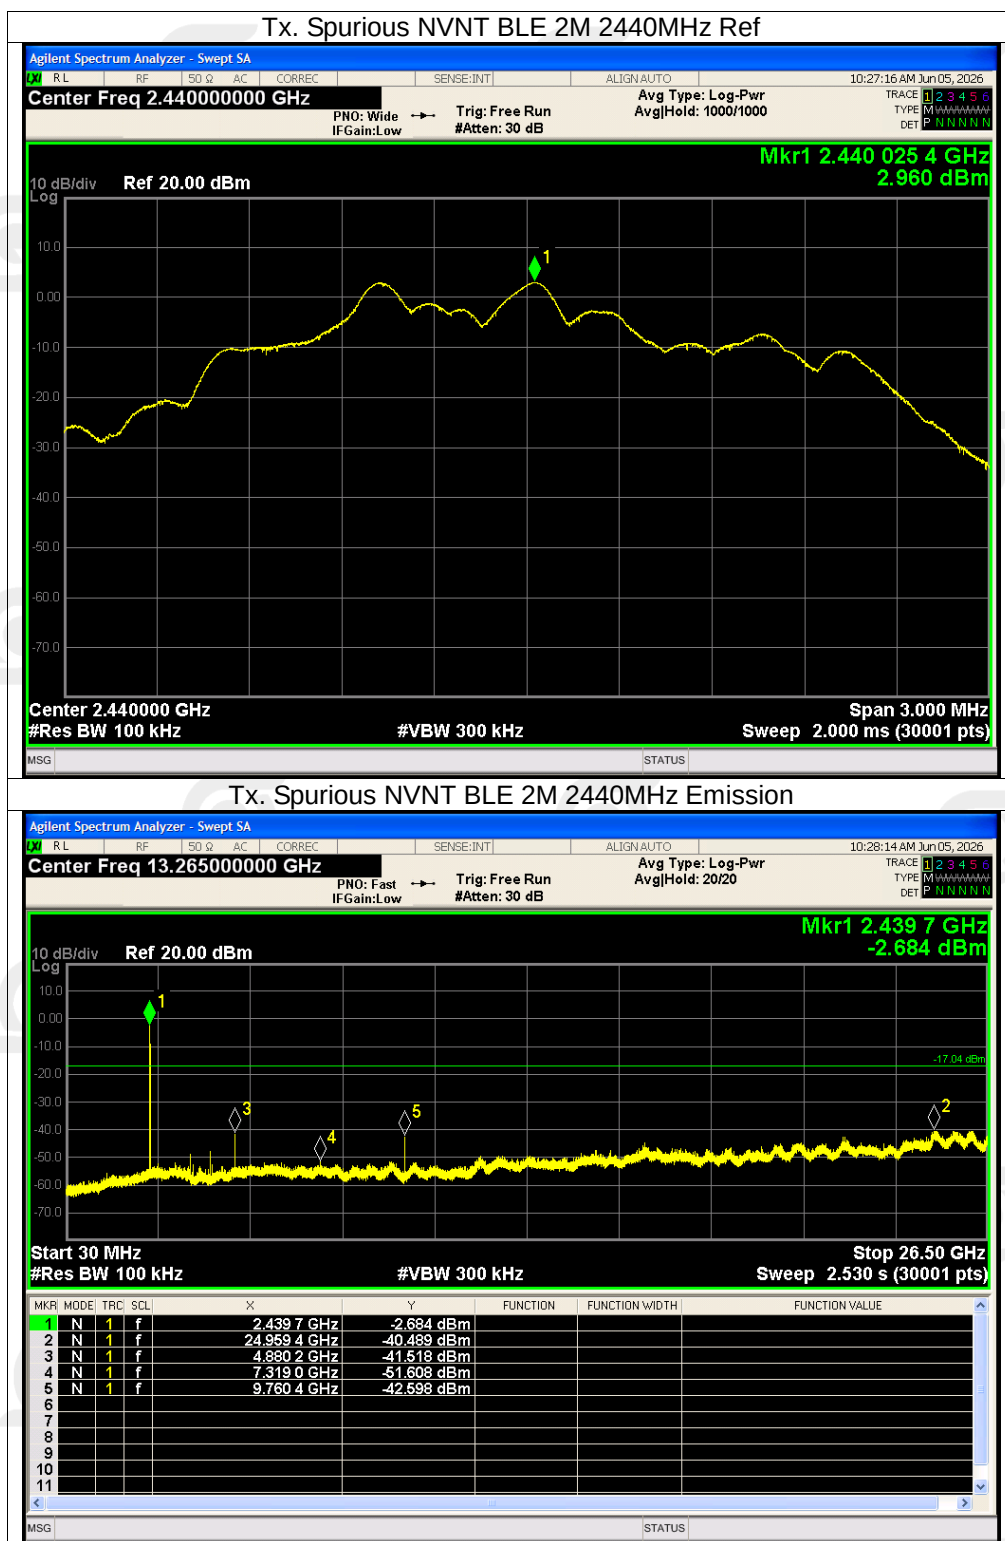

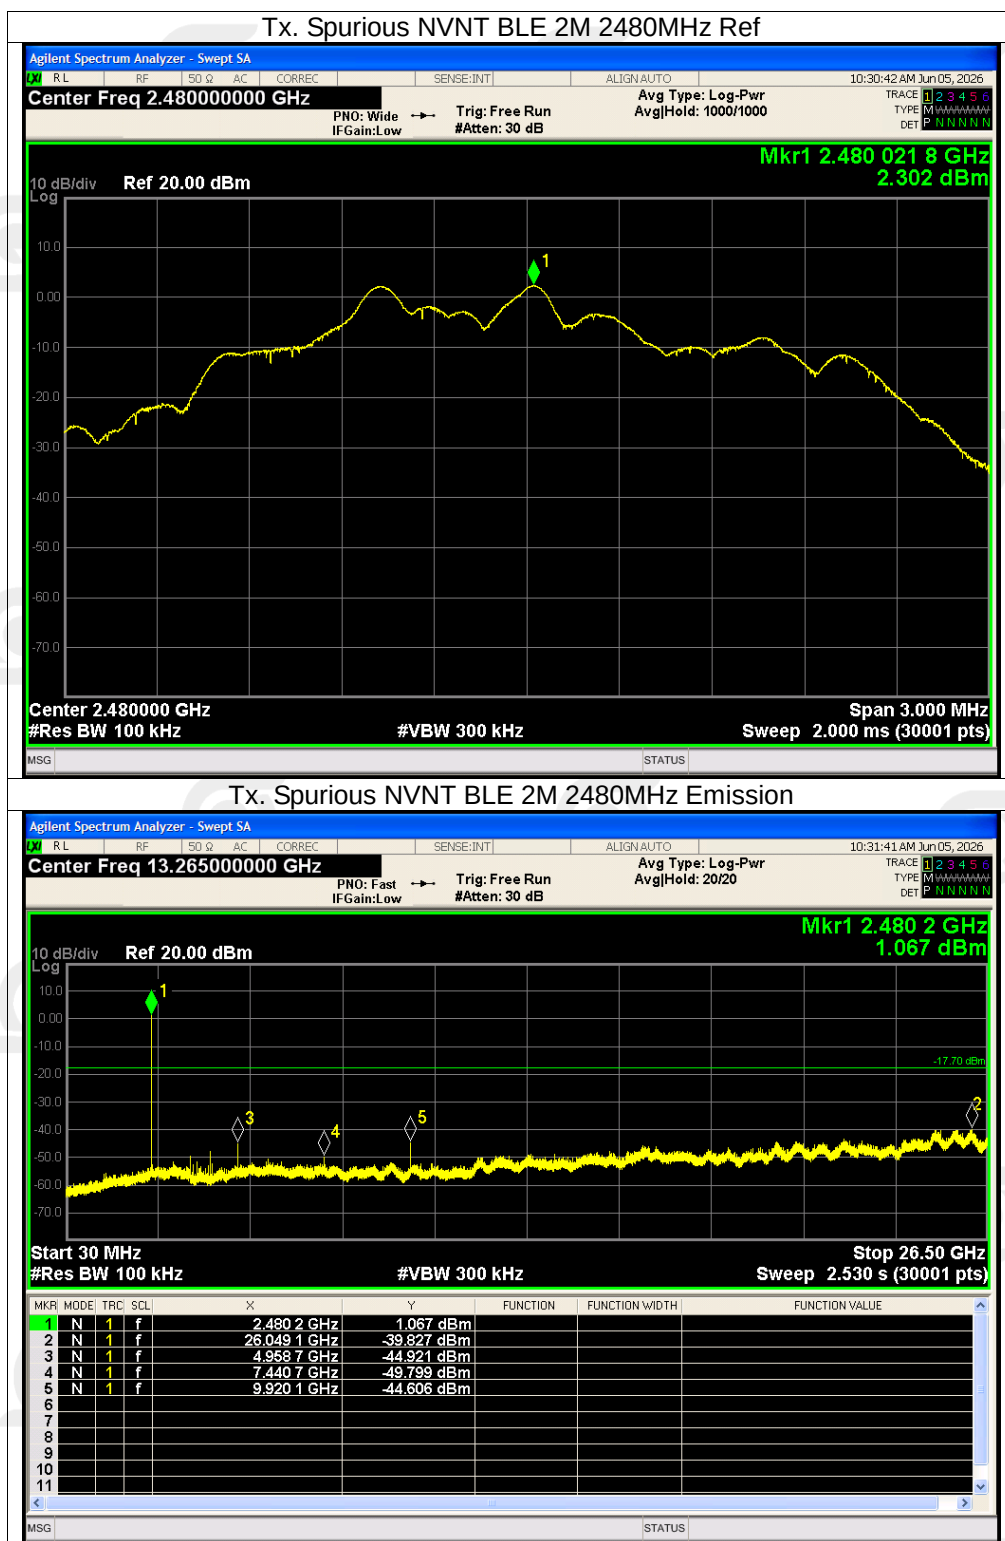

▶▶▶ END ◀◀◀