


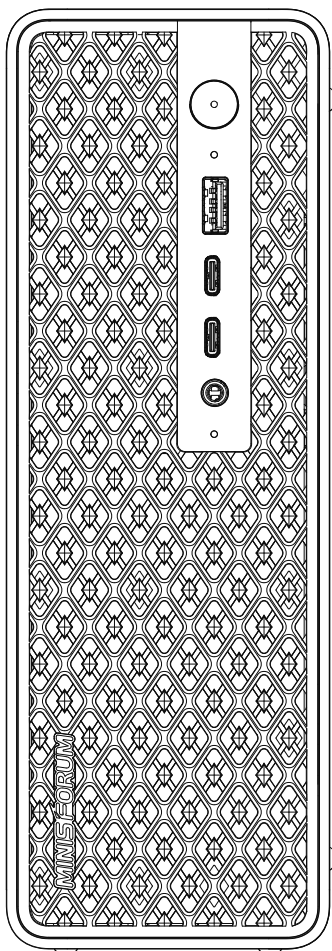

MINISFORUM

Copyright @ 2024-2025 Micro Computer (HK) Tech
Limited.

Product Name: MINIPC

Model: MS-S1 MAX

Operating Voltage: 12V 26.6A

Maximum frequency operation: 5.1Ghz

Disclaimer And Safety Instructions

• Disclaimer

- 1.Thank you for purchasing MS-S1 MAX product.
- 2.The contents mentioned in this disclaimer are related to your safety, legal rights and responsibilities. Please pay attention to any warnings, cautions and attention signs on the instructions and product labels, and install according to the instructions in the instructions.
- 3.The product is relatively complex, and users need to have basic hands-on installation skills and safety knowledge. You should be careful during installation.
- 4.Before using this product, please read the instructions carefully to ensure that the product can be set up correctly. Failure to follow the instructions, warnings, cautions, and attention signs may damage the product or data, and may result in personal or property injury or loss.
- 5.Once you use this product, you are deemed to have carefully read the content requirements of the disclaimer, warning, caution, and attention signs, understood and accepted all the contents. You promise to take full responsibility for the consequences of using this product. You promise to use this product only for legitimate purposes and agree to this statement and any policies and guidelines formulated by MINISFORUM.
- 6.In addition to the warranty terms, MINISFORUM is not legally responsible for damage or injury caused directly or indirectly by using this product, especially those caused by failure to operate in accordance with safety guidelines. Users should follow the instructions mentioned in this statement and all safety guidelines.
- 7.The final interpretation right of this statement belongs to MINISFORUM.

• Tips for Use

- 1.Dust, moisture and drastic temperature changes will affect the product life, so please try to avoid placing the product in these places.
- 2.The suitable temperature for the MINI PC and accessories is 0°C ~ 35°C.
- 3.Before you using this product, make sure you leave enough space around the device for ventilation. Please don't block or cover these openings. Never insert objects of any kind into the ventilation openings.
- 4.This equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.
- 5.When you use the power extension cords, the total current of all connected products should be within the rated current of cables, ensuring stable operation.

• Safety Precautions

- ▲ **Warning:** The machine supports both vertical and horizontal placement and also supports wall mounting with the VESA bracket (100 mm X 2). Please use the provided wall-mounted screws and spacers for installation. Locking 2 screws is sufficient for installation, but if placed in a cabinet, you can choose to secure it with 4 holes based on your needs. (The screw's specification is M4, with a size of 100 X 178.5 mm)
- ▲ **Warning:** The machine supports integrated quick disassembling. After loosening 2 screws on the IO cover plate, do not hang the machine upside down to avoid internal hardware from slipping out and falling. Please place the machine on a desktop. After loosening the screws, use the accessory tool clip to hook the heat dissipation slot to pull out the internal motherboard tray.

• Maintenance Guideline

- 1.Do not step on the power cord or put anything on your Mini PC.
- 2.Do not spill water or any other liquid over this product.
- 3.There's still some current passing through even when the system is off. To avoid severe damage caused by possible electric shock, plug out all power cables from sockets temporarily before cleaning or moving this product.
- 4.If you encounter the technical problems with the product unplug the power cord and contact a qualified service technician or your retailer.

- **FAQ**

1.The start-up speed may be slow in the following situations: unexpected restart, BIOS reset, memory bank replacement, and SSD replacement. Generally speaking, the start-up speed will return to normal after one successful power-on and power-off process.

2.The core graphics card will occupy a part of the memory as GPU-specific memory.

3.Due to the design of the AMD CPU (Strix Halo platform), the position of the PCIe expansion slot does not support independent graphics card operation, but it can support other types of expansion cards via the PCIe channel.

4.The machine supports 4-screen presentation, HDMI, USB4 x 2, and USBV2 x 2, and at most 4 display signal outputs can be connected to the 5 display signal interfaces.

5.The USB4V2 function chip is Intel JHL9580, which has the Thunderbolt5_Controller function and **supports 80Gbps data transfer**.

6."Rack Mode" in BIOS refers to cabinet mode, which focuses on optimizing the balance between performance and heat dissipation based on the usage scenarios of the cabinet, and the noise may slightly increase.


7.If your PCIe expansion card is not compatible, go to the BIOS and select PCIe 4.0, PCIe 3.0, or PCIe 2.0 **mode to adapt**.

Note: --- This message contains additional instructions for this item.


Important! --- This information contains instructions that must be followed.

Warning! --- This message contains information about user safety and product safety.


包装内容

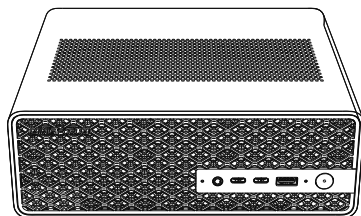

MINI PC



Power Cord */




HDMI® Cable */



SSD Heatsink */



Clip */



Screw & Washer */



Mylar
(PCIe expansion card area)*/





User Manual */

NOTE:

* The power adapter and other accessories included in the box will vary depending on the model parameter or area purchased.

3 了解您的迷你电脑

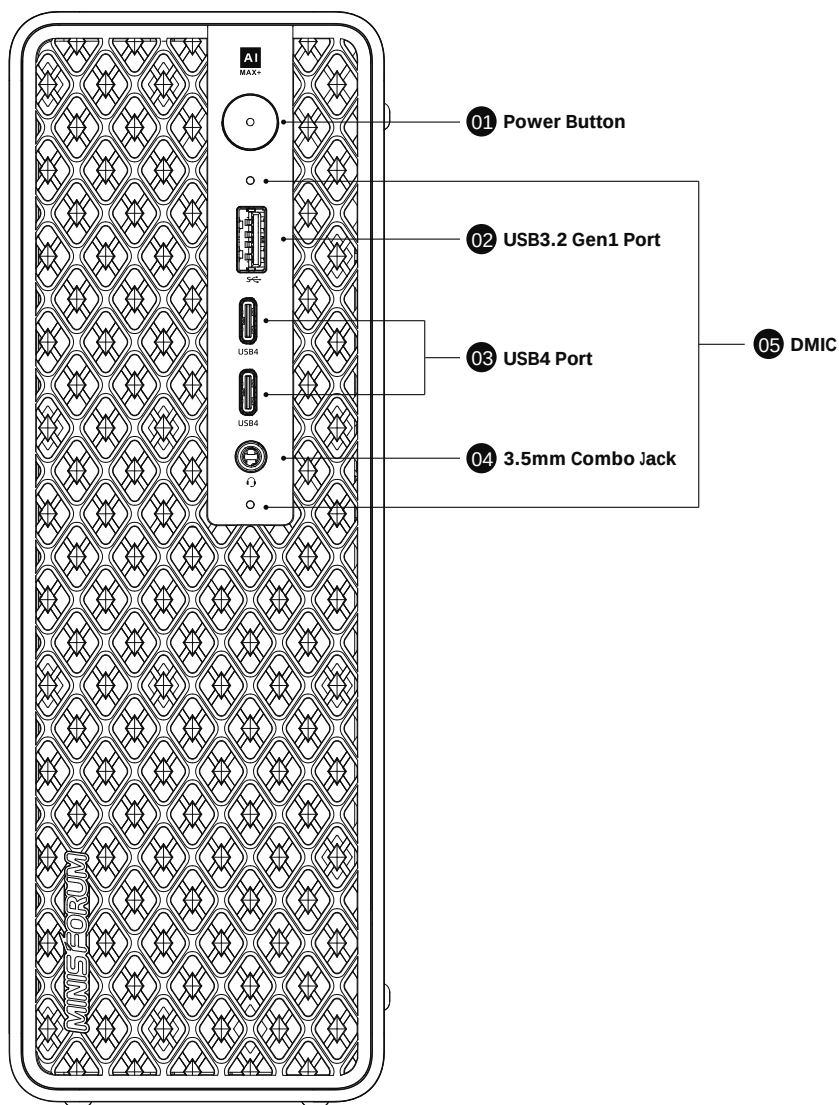

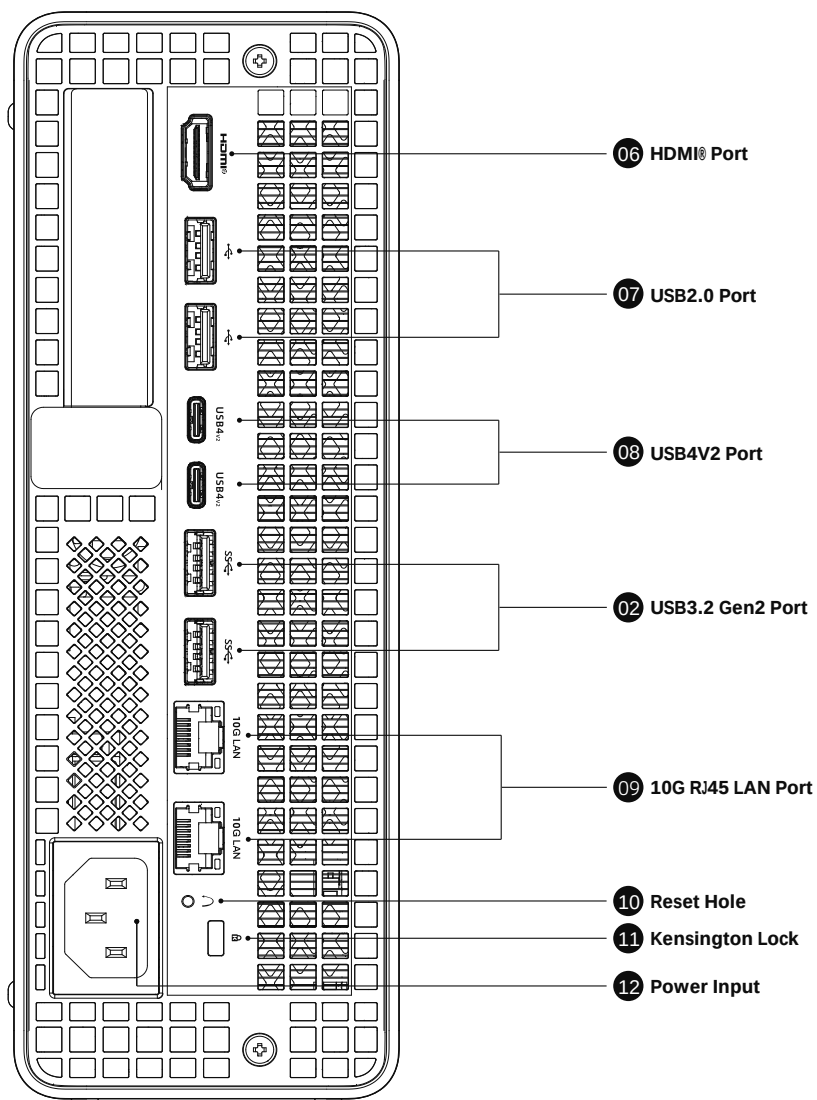

Interface

01 Power Button

The power button allows you to turn the Mini PC on /off. You can press the power button to put your Mini PC to sleep mode or press it for 10 seconds to force shutdown your Mini PC.

02 USB3.2 Gen2 Port

USB3.2 Gen2 (Universal Serial Bus) port provides a transfer rate of up to 10 Gbit/s. It can be connected to keyboards, pointing devices, cameras, hard disks, printers and scanners.

03 USB4 Port

This interface supports USB4 transmission protocol, with a maximum data transmission rate of 40Gbps. Support Alt DP audio and video output, only support 5V output, support PCIe data transmission, and support Thunderbolt Ethernet.

04 3.5mm Combo Jack

This connector is used to connect audio output signals to a power amplifier or headphones. You can also use it to connect an external microphone or output signals from audio equipment.

05 DMIC

These two DMICs can support recording function and, in combination with AI large models, can achieve voice interaction function. The two DMICs form an array that can effectively extend the voice pickup distance, and, in combination with software algorithms, can achieve noise reduction and human voice recognition function.

06 HDMI® Port

The HDMI® port (High-Definition Multimedia interface) is uncompressed, fully digital audio/video interface that provides a common data connection channel for compatible devices, It can be used to connect external display devices and televisions.

07 USB2.0 Port

The USB (Universal Serial Bus) port is compatible with USB2.0 or USB1.1 devices such as keyboards, and printers.

08 USB4V2 Port

The USB4V2 function chip is Intel JHL9580, which has the Thunderbolt5_Controller function and supports 80Gbps data transfer.

09 10G RJ45 Port

This RJ-45 network interface supports standard Ethernet cables and can be connected to a local area network. (Transmission speed 10Gbps)

10 Reset Hole

Please remove the power source and hold the reset hole for ten seconds to restore the BIOS to its factory default settings.

Important! If you encounter certain issues during use, you can first try to resolve them by holding the reset hole.

11 Kensington Lock


The Kensington Lock can be connected to a locker to prevent others from stealing your Mini PC.

12 Power Input

Connect the power cord to the power source. The built-in high conversion rate power supply can convert AC power to DC power, providing power to your Mini PC.


Warning! To prevent damage to your Mini PC, please do not block the power's cooling vents.

1

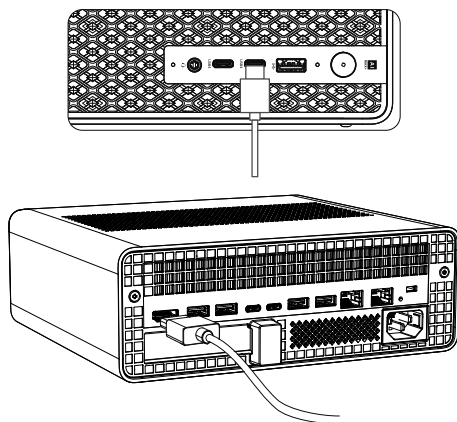


Connect the display to the Mini PC's HDMI port/USB4/USB4V2 port.

2

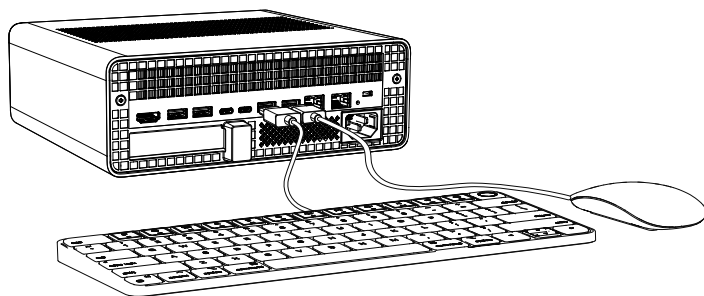


Connect the keyboard and mouse.

3

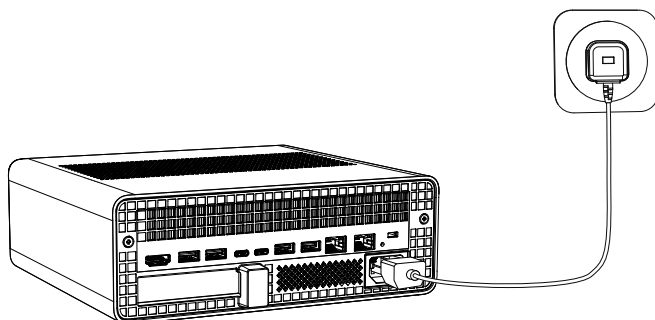

Connect the provided power cord to your Mini PC.

4

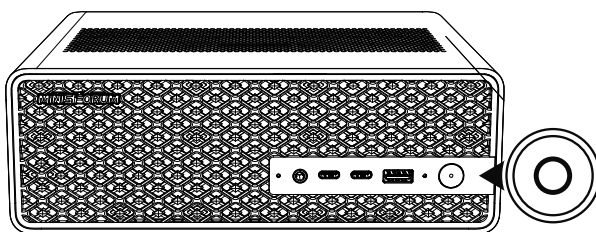


Turn on the power and start the Mini PC.

Installation Guide


- 1 Use a tool to remove the two screws on the back cover, then use the provided tool to pull out the motherboard slot as shown in the picture.

Warning: Only use the clip at the position shown in the diagram.

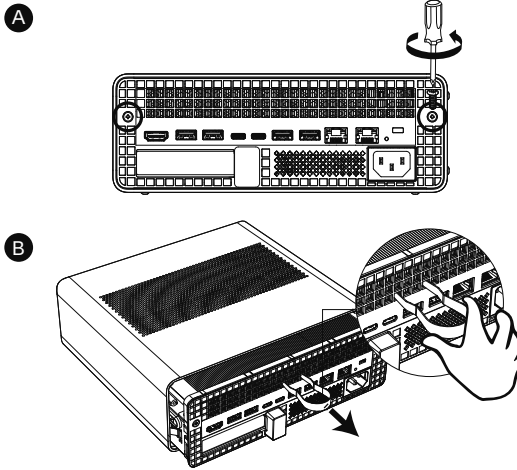


DIY SSD

- 2 Use the clip tool to pull out the integrated motherboard tray of the machine. First unscrew the SSD fixing screws for replacement or installation.

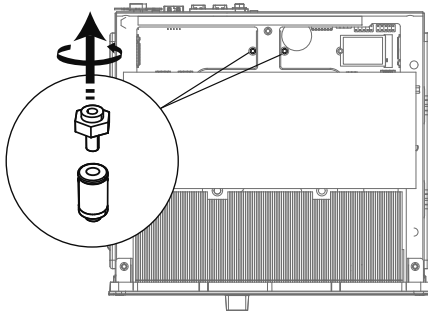

- 3 Install the SSD heat sink onto the SSD and lock it with a strap. Align the SSD card with the notch in the card slot and insert it at an angle, then secure it with screws.

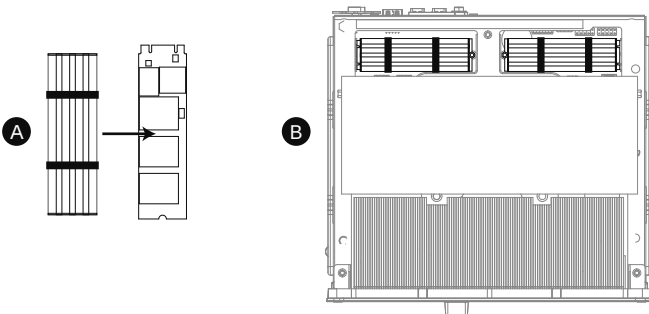


DIY PCIe Expansion Card




The PCIe expansion slot of the machine does not support a discrete graphics card, but it can accommodate other types of PCIe expansion cards.


- 4 First use a tool to unscrew the positioning clamp screw, press the positioning clamp to take it out, and remove the baffle.

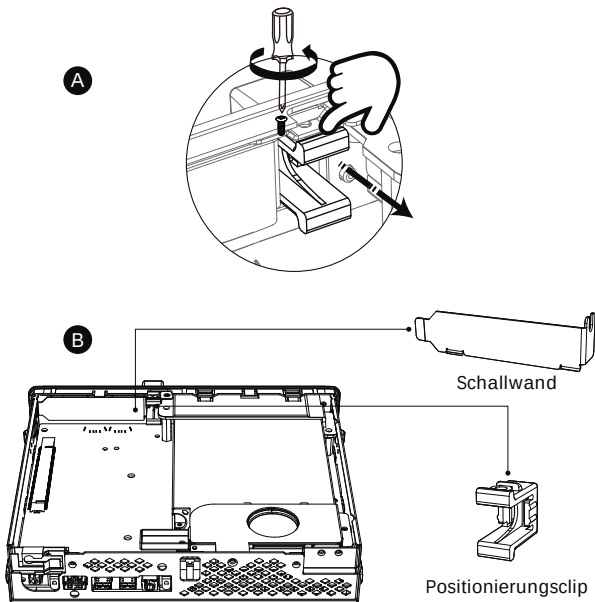



- 5 Use a tool to remove the screws of the power bracket.

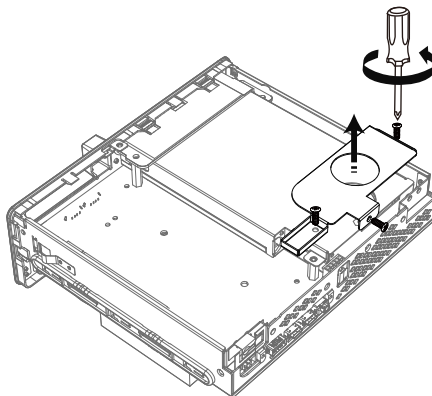



- 6 First stick the Mylar piece from the accessory bag to the motherboard installation area of the expansion card to protect the back of the expansion card PCB.

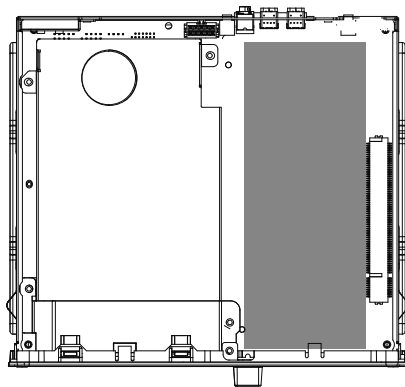



- 7 Insert the expansion card into the motherboard slot in an oblique direction, and insert the expansion card parallel into the PCIe slot with both hands.
- Note:** Only half-height single-slot PCIe expansion cards are supported.

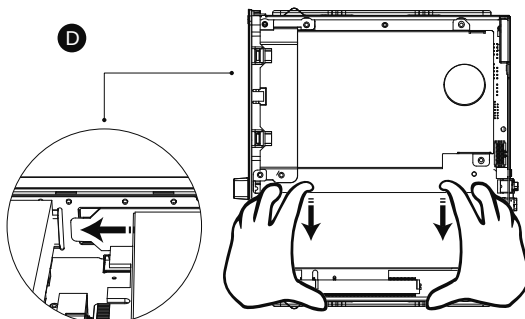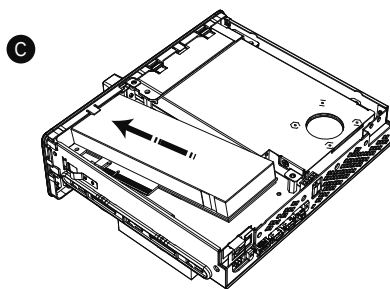

Warn! The correct way to disassemble the expansion card is as shown in the figure, and be careful not to pinch your hands.

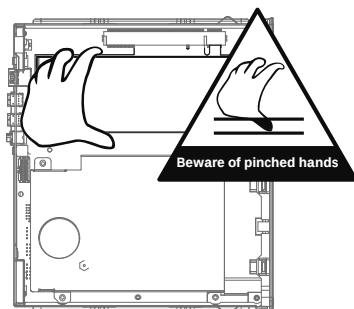

- 8 After completing the installation, reinstall the motherboard tray into the case and secure the two back-cover screws using a tool.

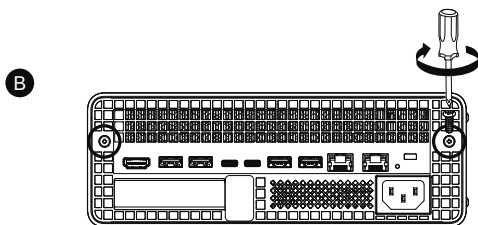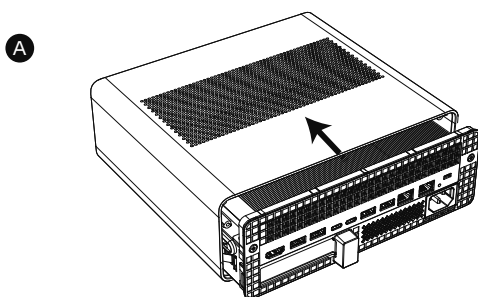

IC Statement

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference;
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Operation of this device is restricted to indoor use only. (5150-5250MHz) This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance of 20 cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Devices shall not be used for control of or communications with unmanned aircraft systems. Devices shall not be used on oil platforms.

Devices shall not be used on aircraft, except for the low-power indoor access points, indoor subordinate devices, low-power client devices, and very low-power devices operating in the 5925-6425 MHz band, that may be used on large aircraft as defined in the Canadian Aviation Regulations, while flying above 3,048 metres (10,000 feet). Devices shall not be used on automobiles. Devices shall not be used on trains.

Devices shall not be used on maritime vessels.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage;
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Le fonctionnement de cet appareil est limité à une utilisation en intérieur uniquement.
(5150-5250MHz)

Cet équipement est conforme aux limites d'exposition aux rayonnements de la IC établies pour un environnement non contrôlé. Cet équipement doit être installé et fonctionner à au moins 20cm de distance d'un radiateur ou de votre corps. Cet émetteur ne doit pas être co-localisé ni fonctionner en conjonction avec une autre antenne ou un autre émetteur.

L'équipement ne doit pas être utilisé pour contrôler ou communiquer avec les systèmes d'aéronefs sans pilote. L'équipement ne doit pas être utilisé sur une plate-forme pétrolière.

L'équipement ne doit pas être utilisé à bord d'un aéronef, à l'exception des points d'accès intérieurs de faible puissance, de l'équipement esclave intérieur, de l'équipement client de faible puissance et de l'équipement de très faible puissance fonctionnant dans la bande 5925 - 6425 MHz qui peuvent être utilisés sur de gros aéronefs tels que définis dans le règlement de l'aviation canadien et volant à des altitudes supérieures à 3048 m (10 000 FT). L'équipement ne doit pas être utilisé dans la voiture.

L'équipement ne doit pas être utilisé à bord du train.

L'équipement ne doit pas être utilisé à bord des navires en mer.

ANT A⁺

Type of antenna: ⁺	Internal antenna ⁺
Antenna Gain: ⁺	2.4G :2400-2500(0.11dBi) ⁺ 5G :5150-5850MHz(3.99dBi) ⁺ 6G:5925-7125MHz(3.85dBi) ⁺
Impedance: ⁺	50hm ⁺
Manufacture: ⁺	Shenzhen ~~Luxshare~~ Acoustics Technology Ltd. ⁺
Model: ⁺	LZZRF049-DT-H ⁺

Type of antenna:	Internal antenna
Antenna Gain:	2.4G :2400-2500(1.75dBi) 5G :5150-5850MHz(3.16dBi) 6G:5925-7125MHz(3.94dBi)
Impedance:	50hm
Manufacture:	Shenzhen Luxshare Acoustics Technology Ltd.
Model:	LZZRF050-DT-H

FCC STATEMENT

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reason-able protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communica-tions. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:—Reorient or relocate the receiving antenna.

—Increase the separation between the equipment and receiver.

—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

—Consult the dealer or an experienced radio/ TV technician for help.

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions(1)this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Transmitters in the 5.925-7.125 GHz band are prohibited from operating to control or communicate with unmanned aircraft systems.

FCC regulations restrict the operation of this device to indoor use only. It is prohibited on oil platforms, cars, trains, boats, and aircraft, except it is permitted in large aircraft while flying above 10,000 feet.

This product is only suitable for indoor used onl