

1.1 Test Result

1.1.1 OBW


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	99% Occupied Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.837	/	Pass
		2441	DH5	1	0.825	/	Pass
		2480	DH5	1	0.847	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.077	/	Pass
		2441	2DH5	1	1.083	/	Pass
		2480	2DH5	1	1.079	/	Pass
8DPSK	SISO	2402	3DH5	1	1.085	/	Pass
		2441	3DH5	1	1.085	/	Pass
		2480	3DH5	1	1.079	/	Pass

1.1.2 20dB BW


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)		Verdict
					Result	Limit	
GFSK	SISO	2402	DH5	1	0.825	/	Pass
		2441	DH5	1	0.808	/	Pass
		2480	DH5	1	0.829	/	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.172	/	Pass
		2441	2DH5	1	1.147	/	Pass
		2480	2DH5	1	1.153	/	Pass
8DPSK	SISO	2402	3DH5	1	1.150	/	Pass
		2441	3DH5	1	1.167	/	Pass
		2480	3DH5	1	1.164	/	Pass

1.2 Test Graph


1.2.1 OBW

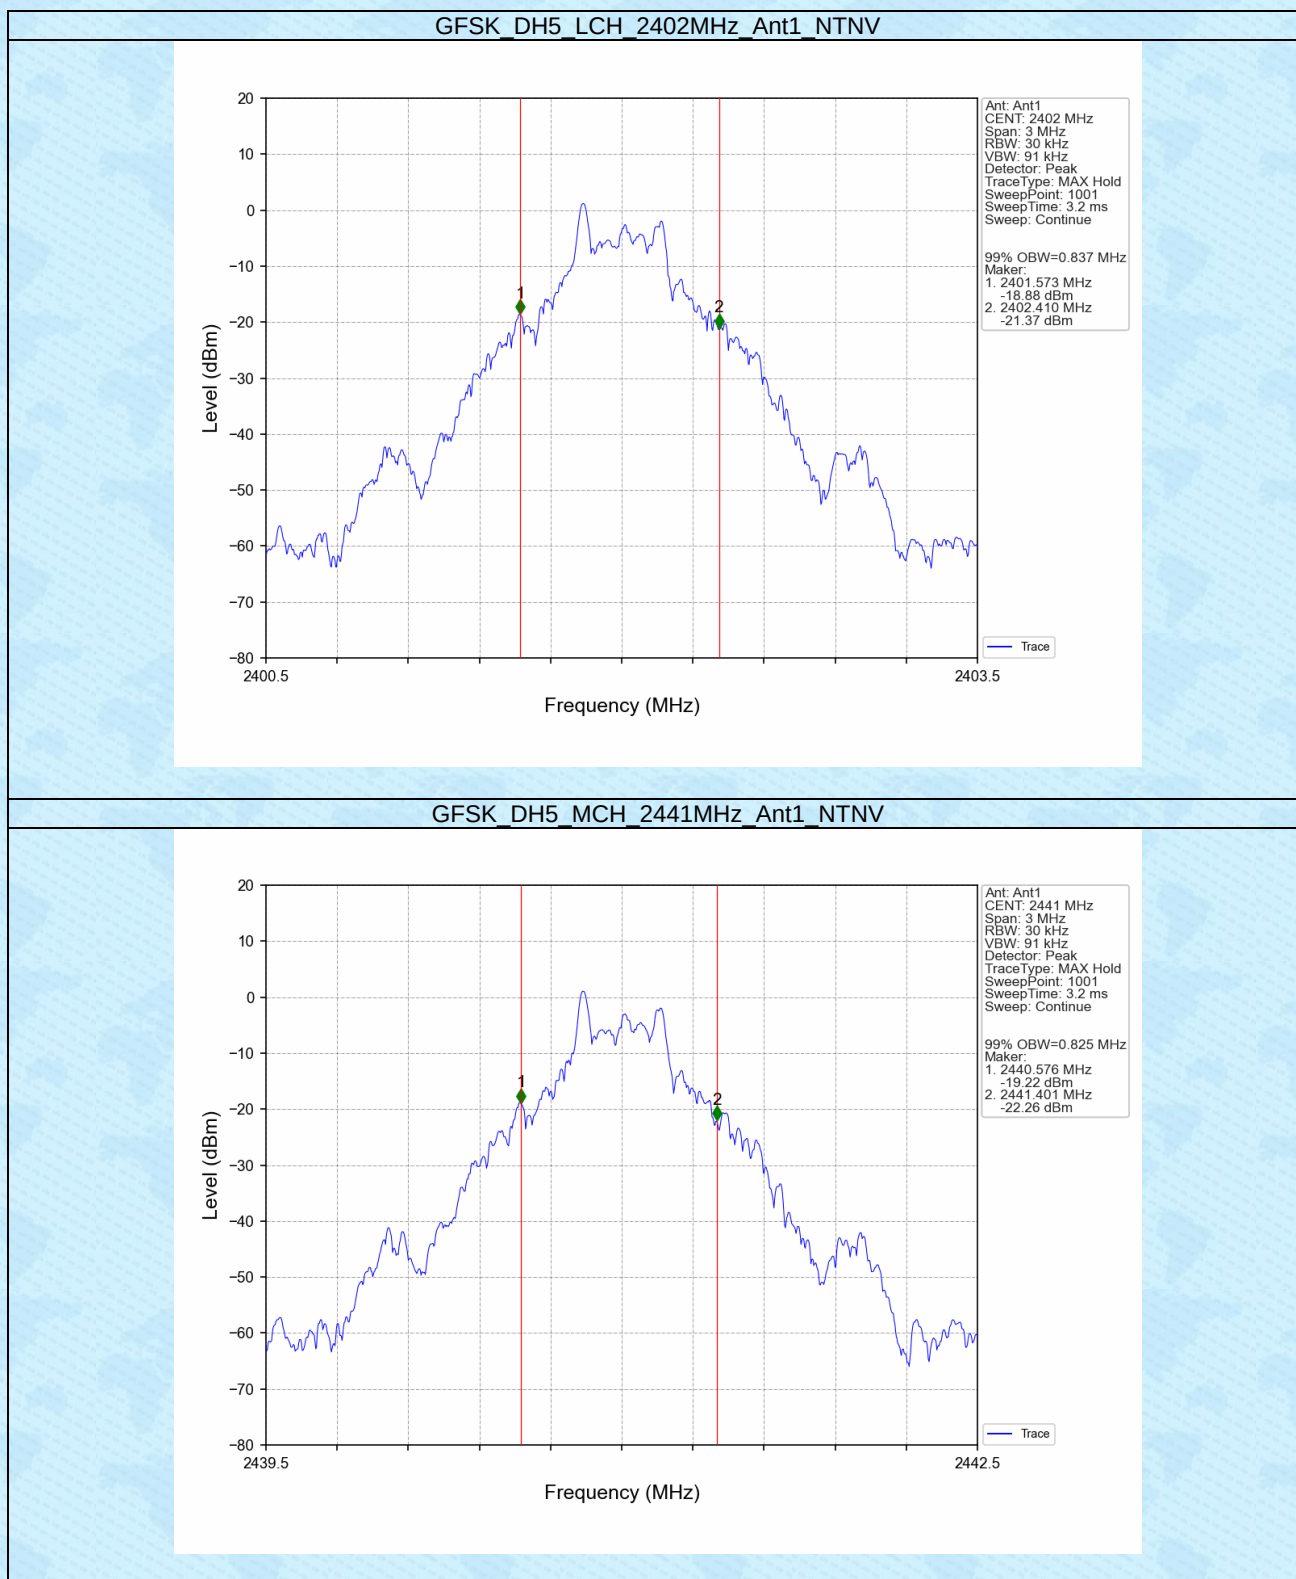


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

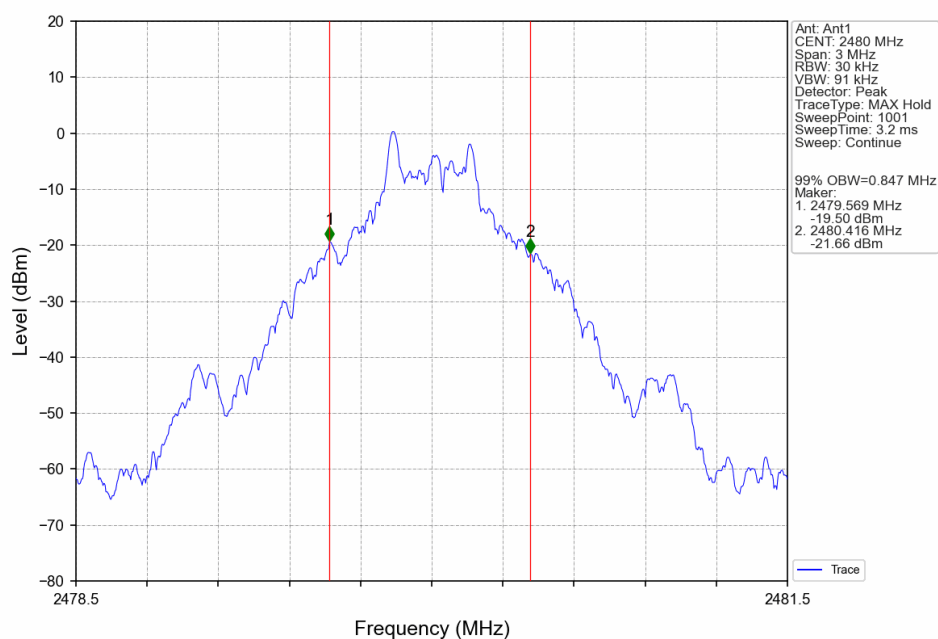


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

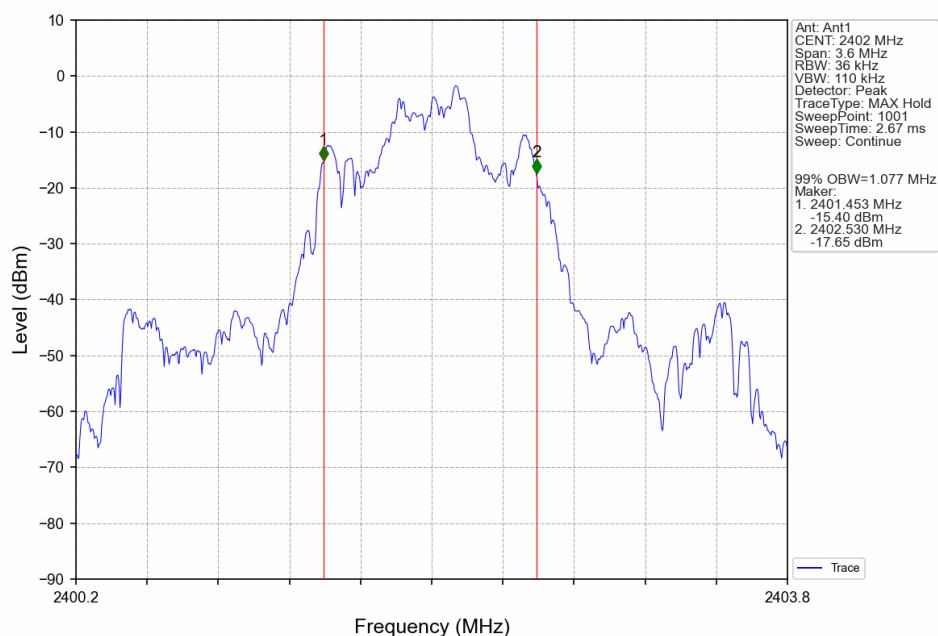


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

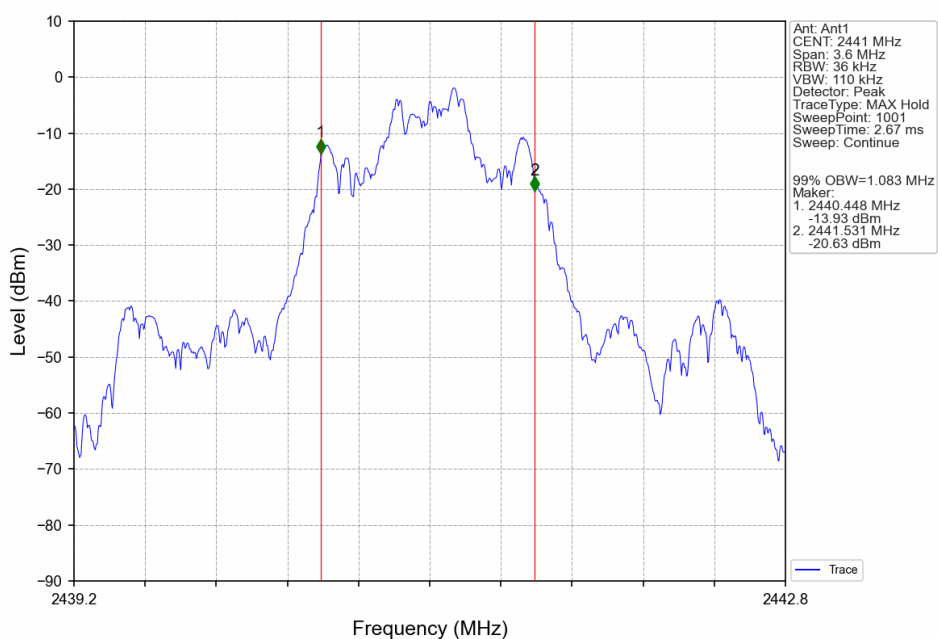


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

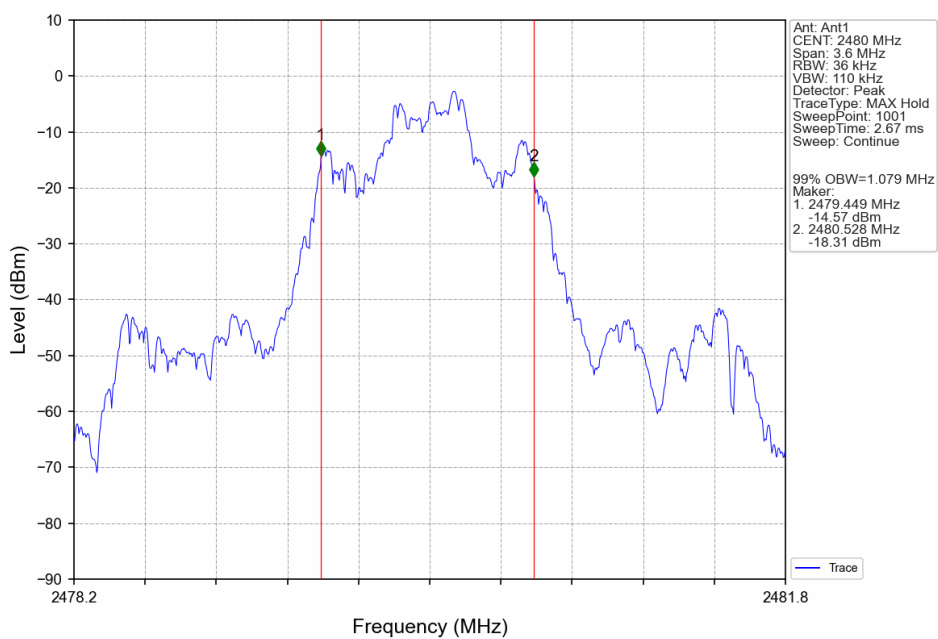


8DPSK 3DH5_LCH_2402MHz_Ant1_NTNV

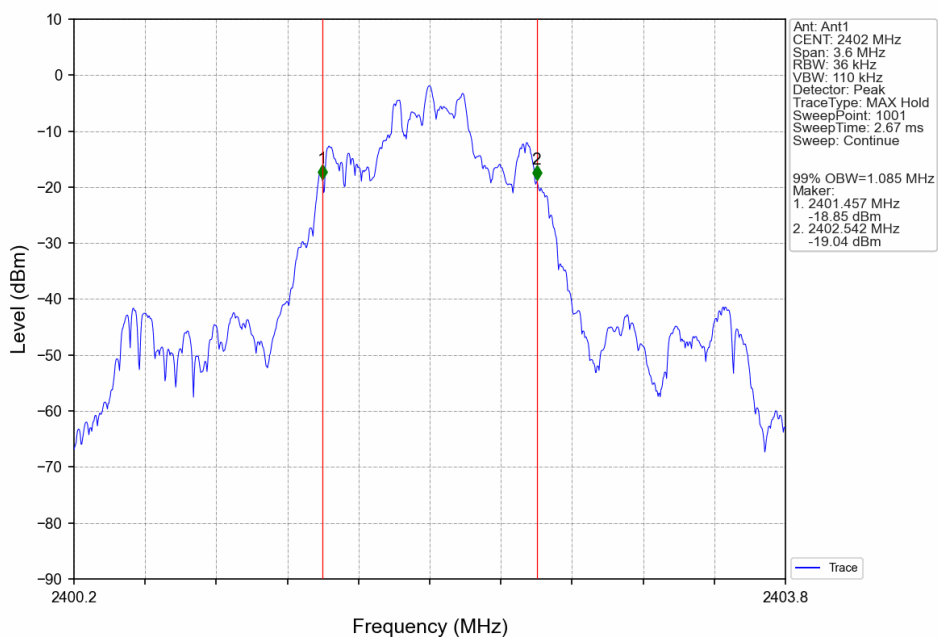


8DPSK 3DH5_MCH_2441MHz_Ant1_NTNV

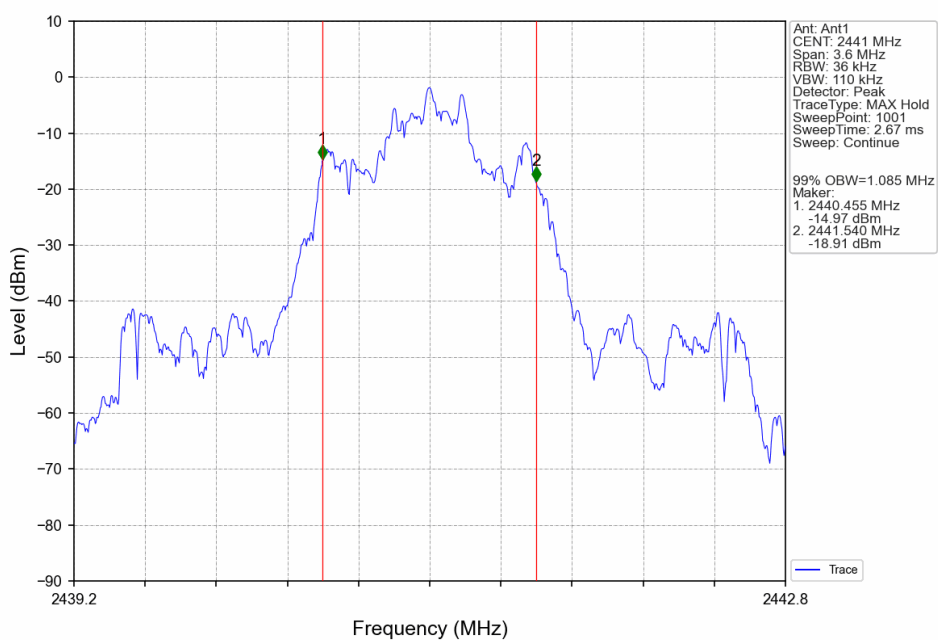


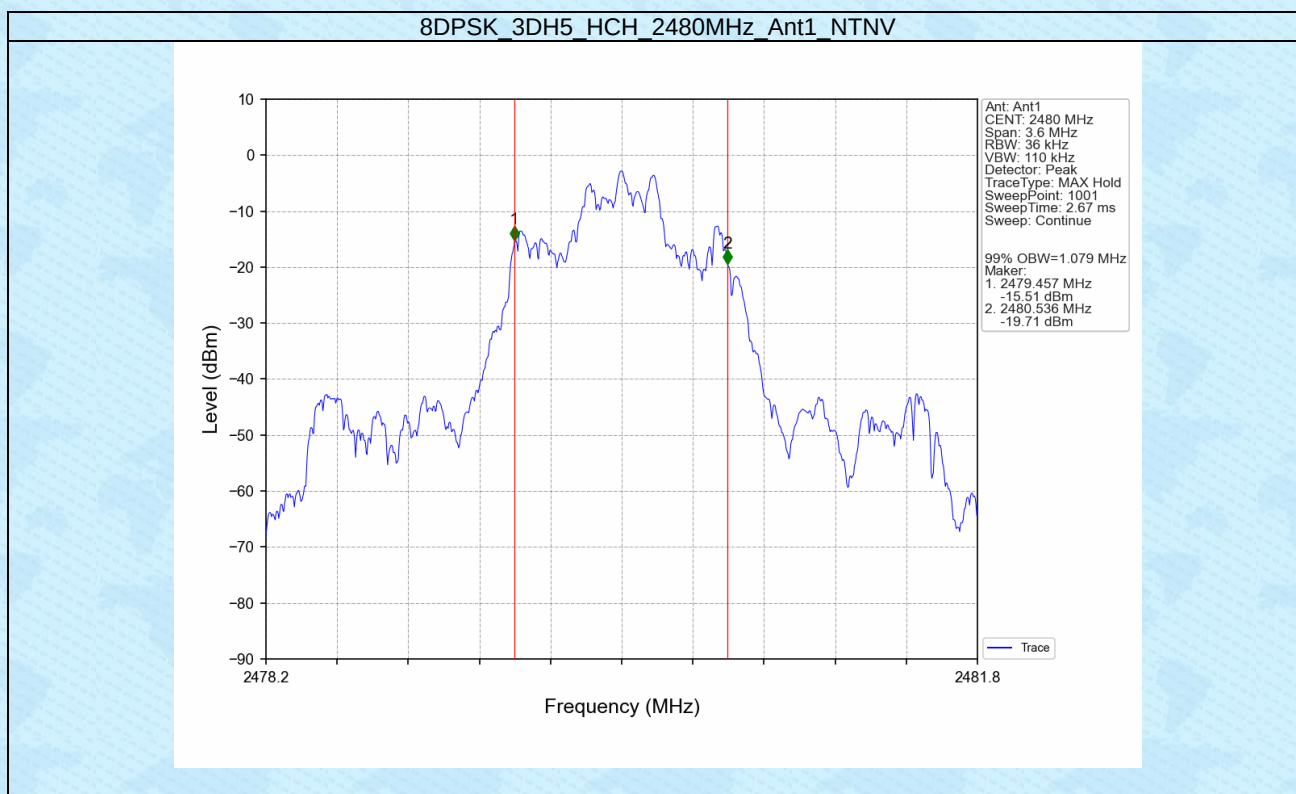


1.2.2 20dB BW

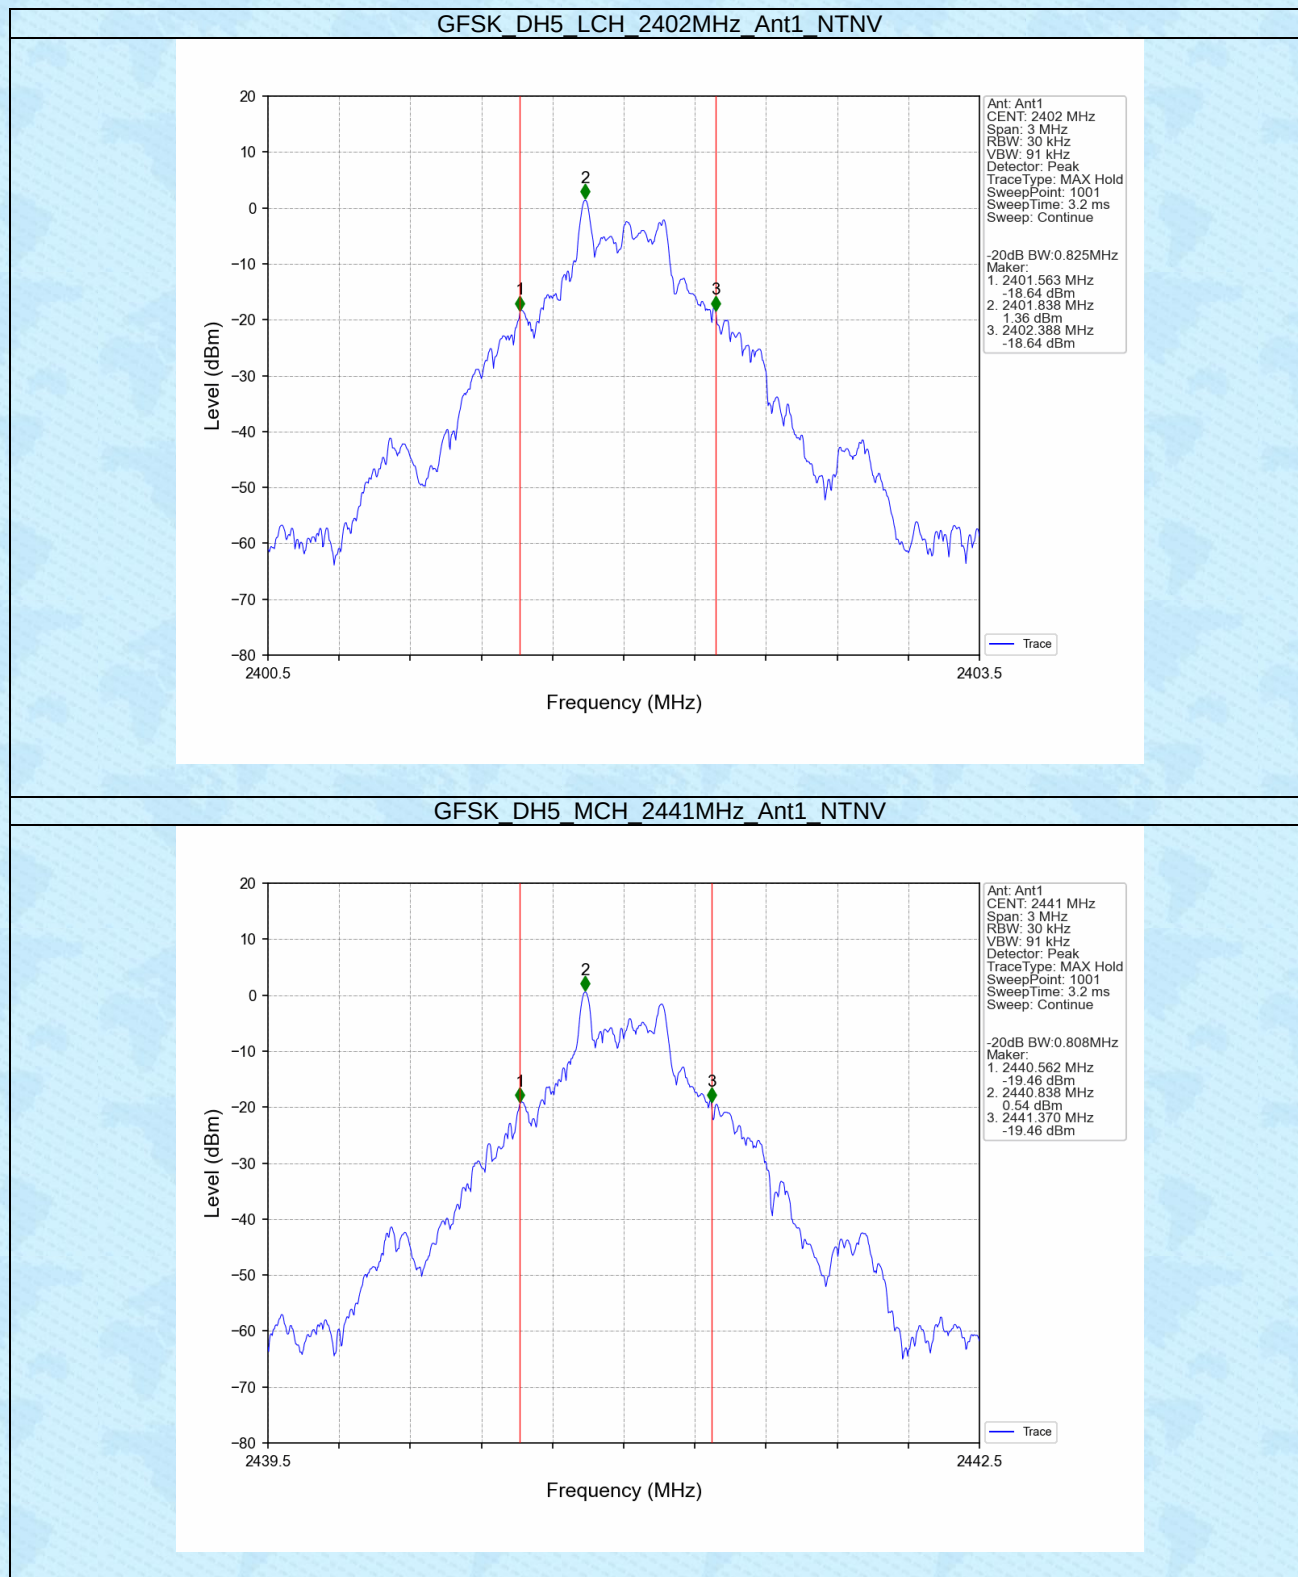


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

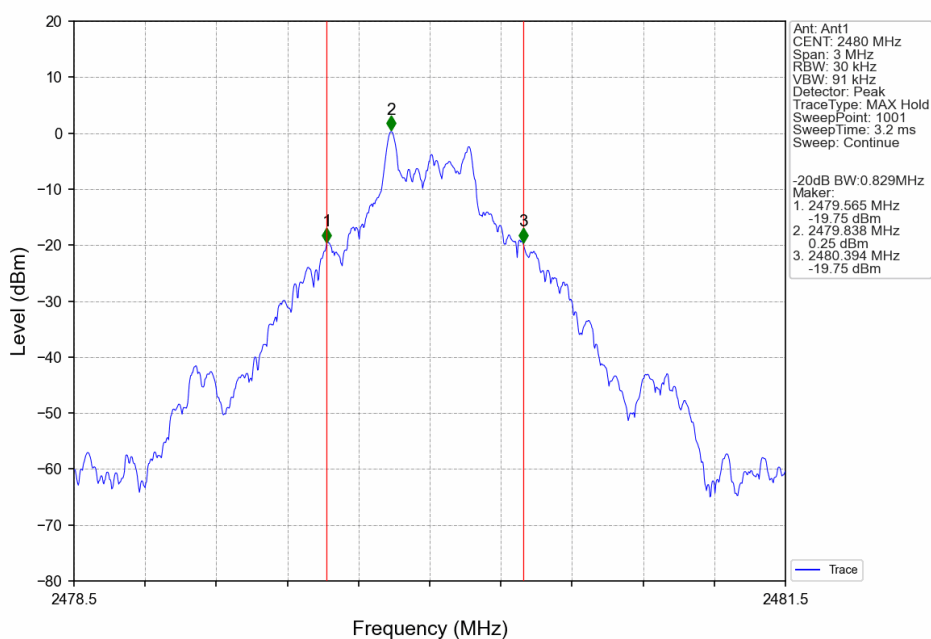


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

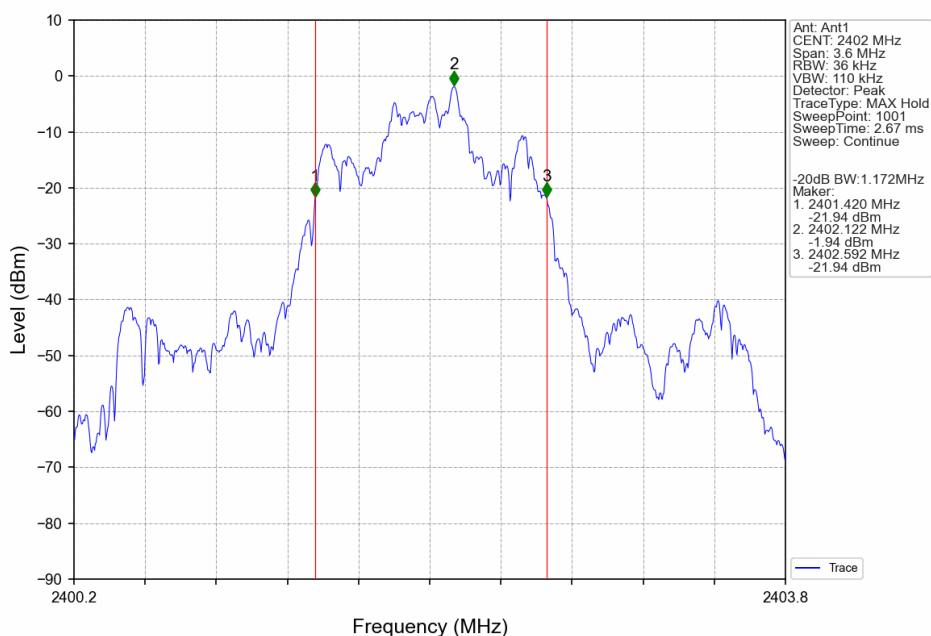


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

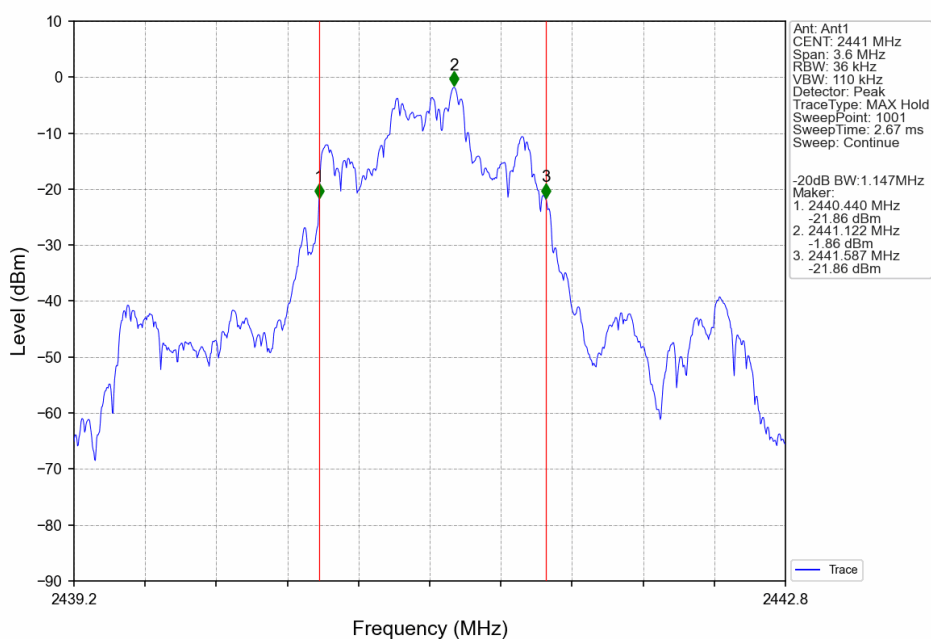


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

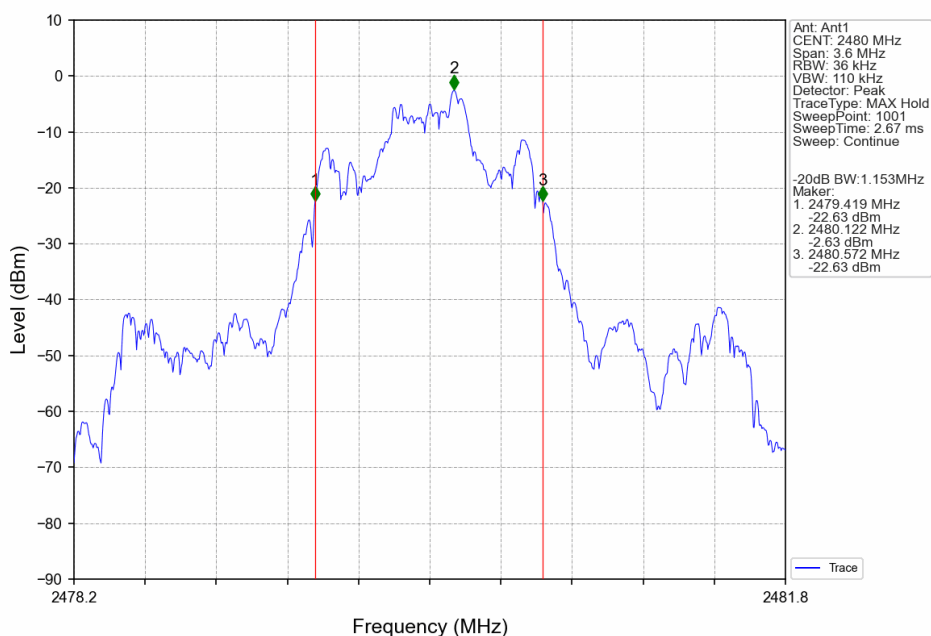


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

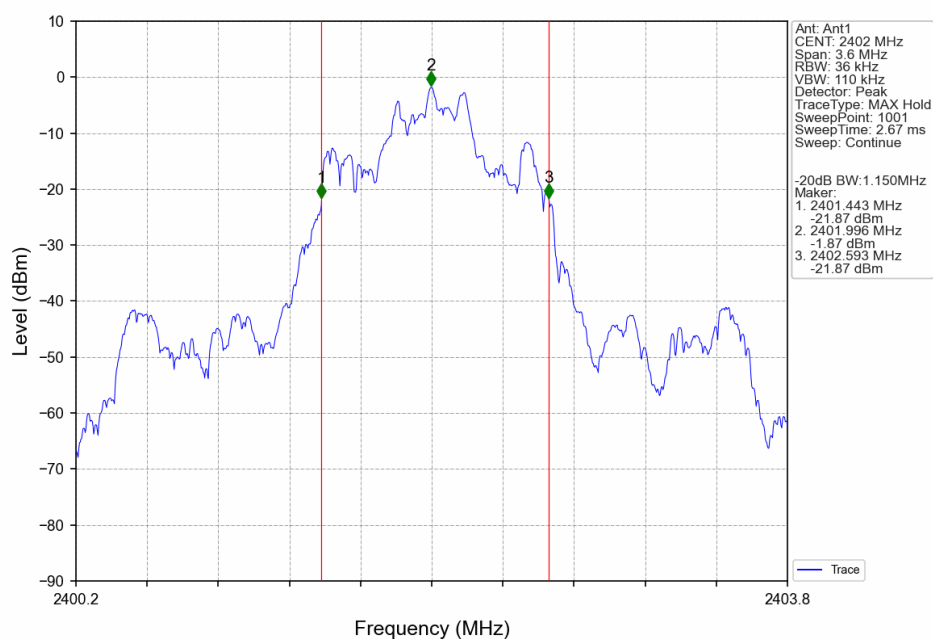

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

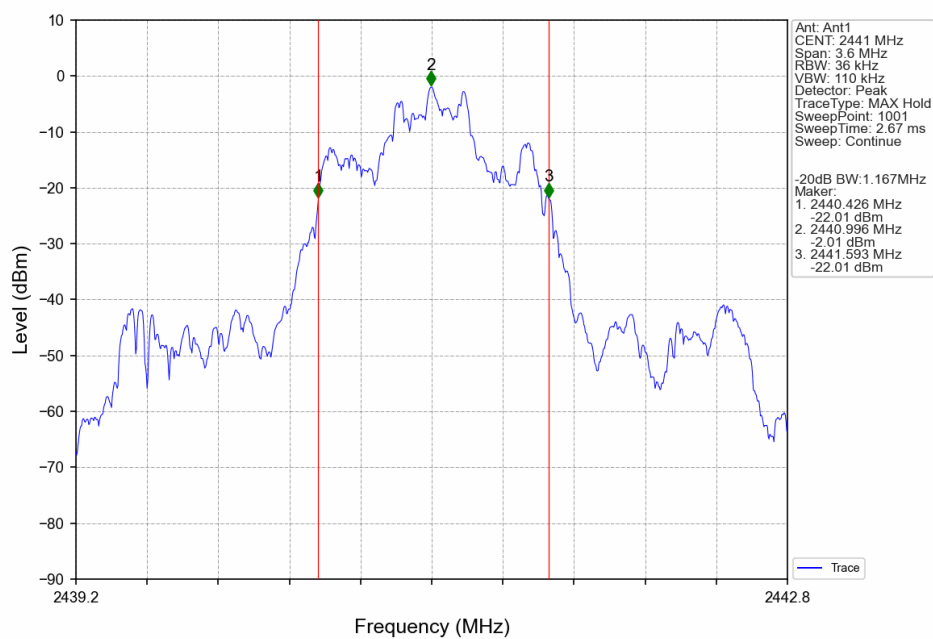

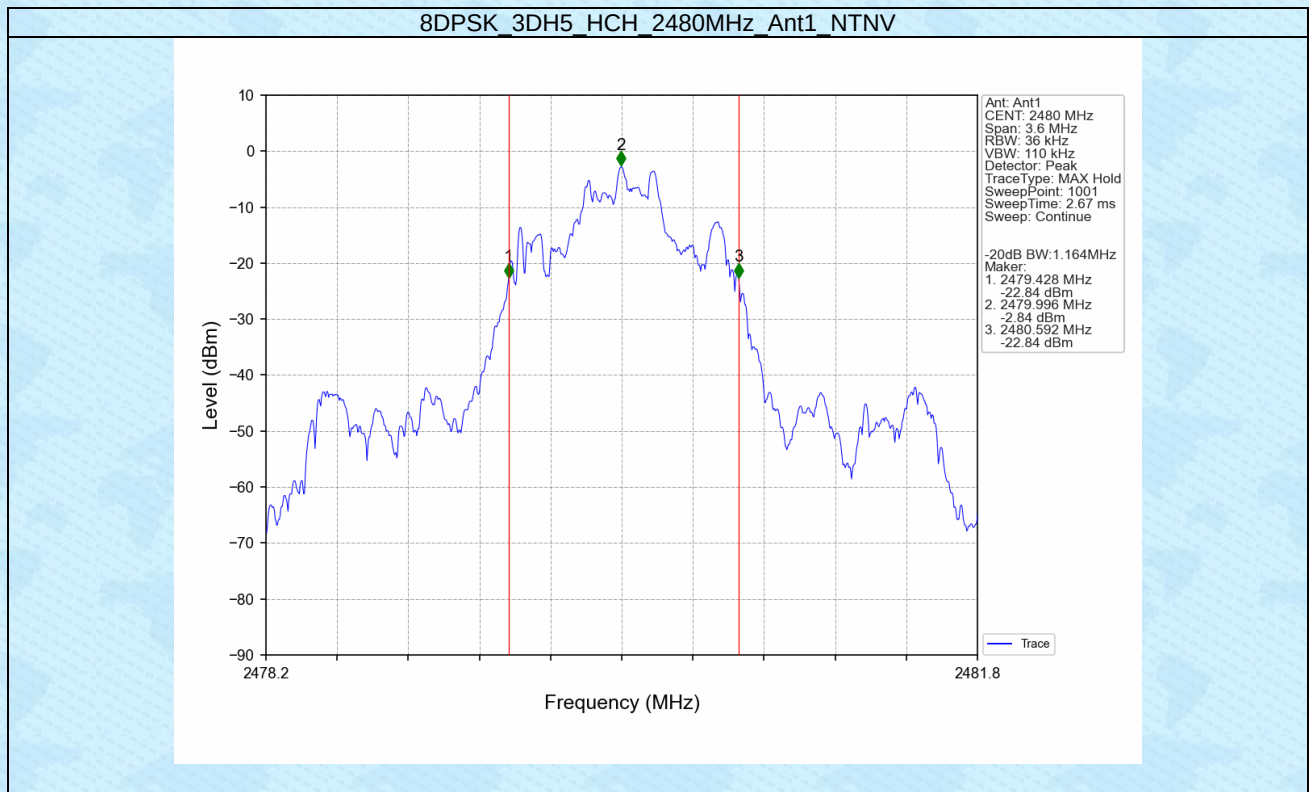

2. Maximum Conducted Output Power

2.1 Test Result

2.1.1 Power

Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)		Verdict
				ANT1	Limit	
GFSK	SISO	2402	DH5	1.61	<=30	Pass
		2441	DH5	0.77	<=30	Pass
		2480	DH5	0.48	<=30	Pass
Pi/4DQPSK	SISO	2402	2DH5	-0.14	<=20.97	Pass
		2441	2DH5	-0.25	<=20.97	Pass
		2480	2DH5	-0.98	<=20.97	Pass
8DPSK	SISO	2402	3DH5	-0.13	<=20.97	Pass
		2441	3DH5	-0.32	<=20.97	Pass
		2480	3DH5	-1.15	<=20.97	Pass

Note1: Antenna Gain: Ant1: -0.68dBi;

3. Carrier Frequency Separation


3.1 Test Result


3.1.1 Ant1

Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	1.002	0.829	>=0.829	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	1.008	1.172	>=0.781	Pass
8DPSK	SISO	HOPP	3DH5	1.015	1.167	>=0.778	Pass

3.2 Test Graph

3.2.1 Ant1

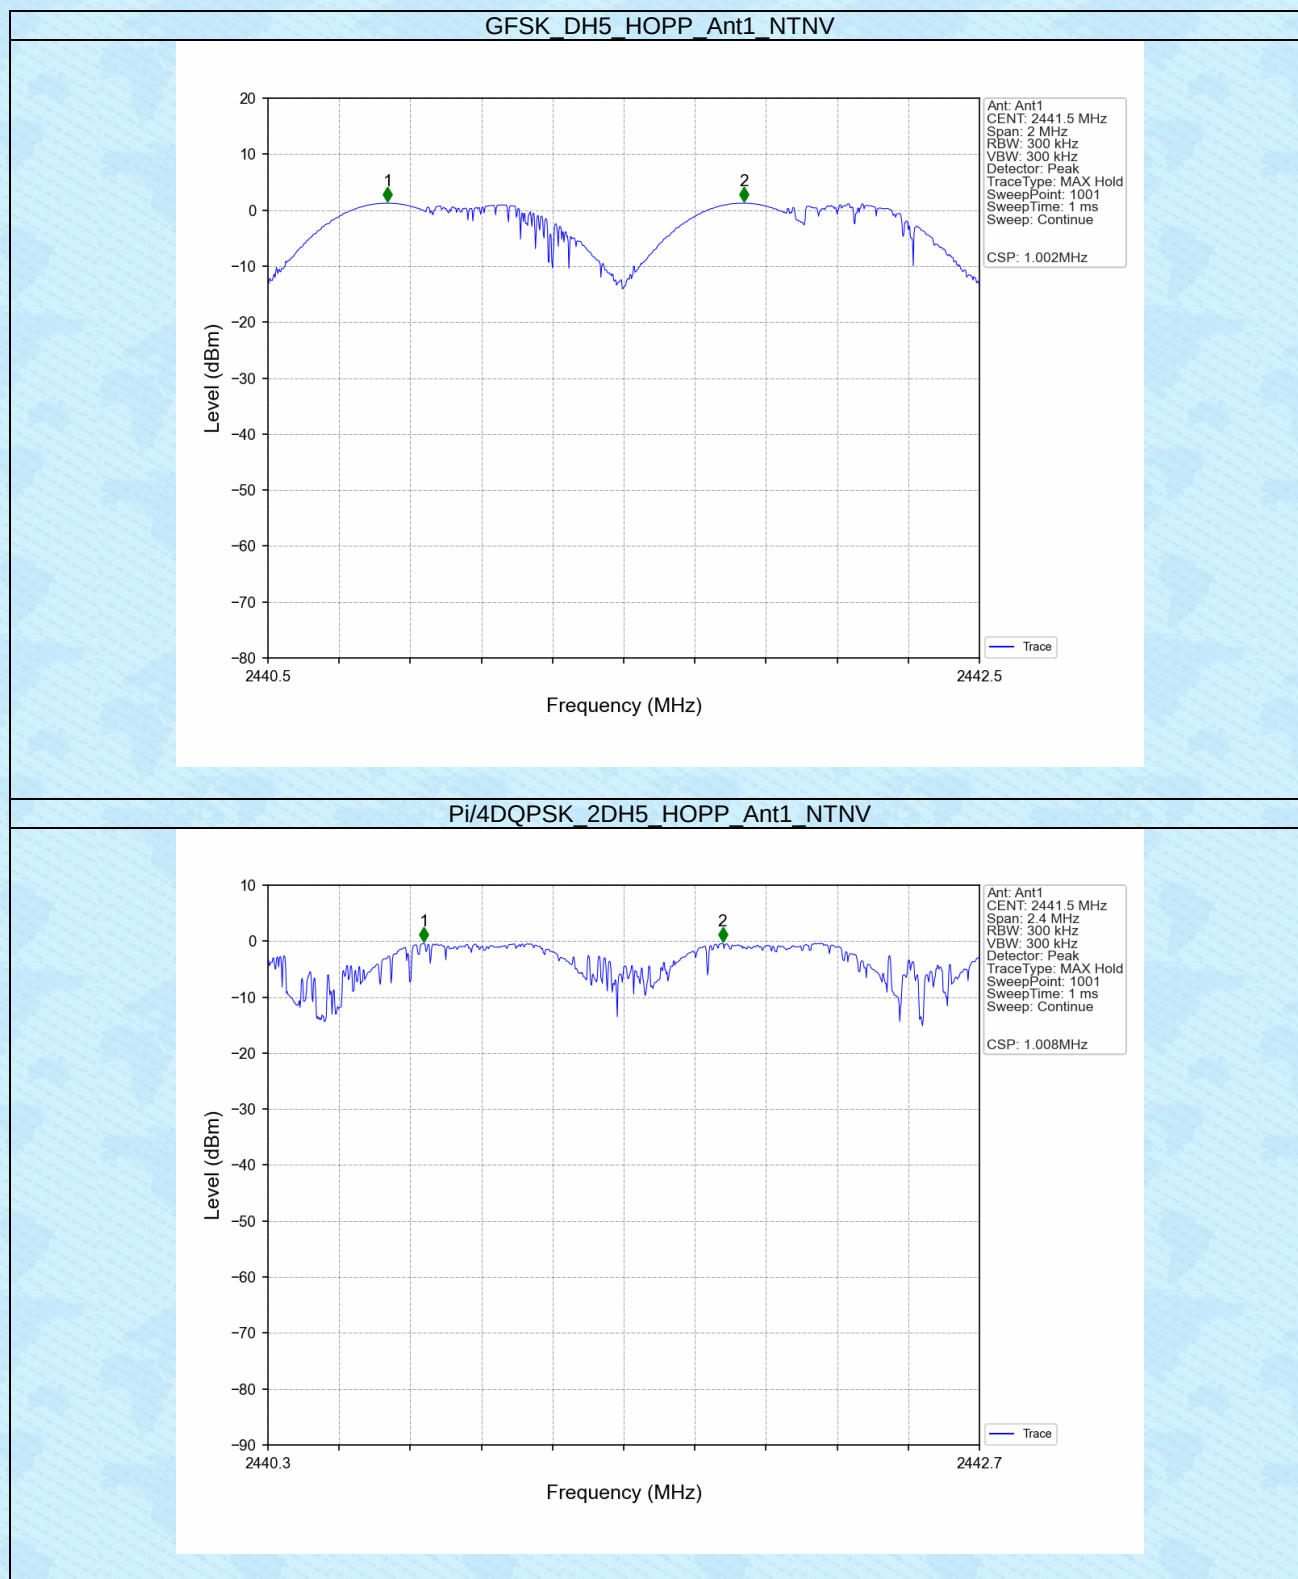

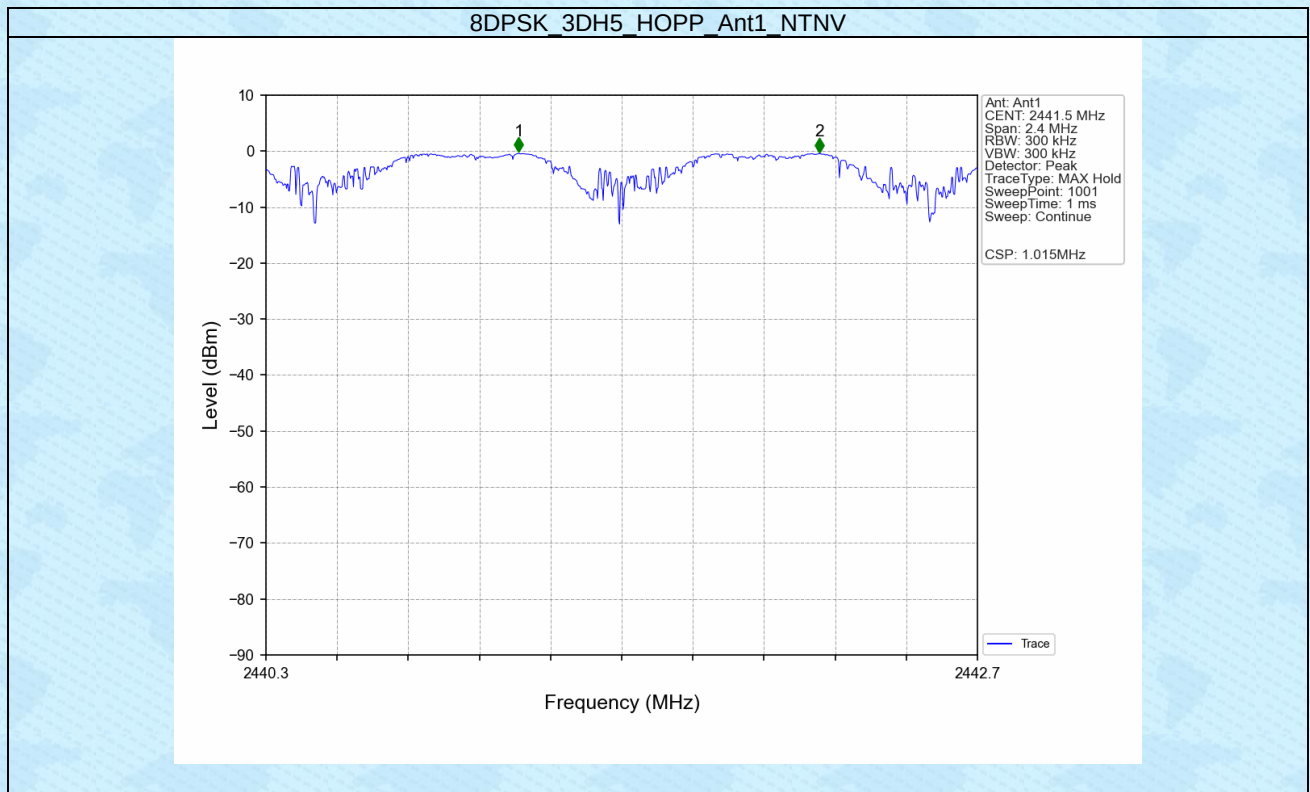

4. Number of Hopping Frequencies


4.1 Test Result


4.1.1 HoppNum

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	≥ 15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	≥ 15	Pass
8DPSK	SISO	HOPP	3DH5	79	≥ 15	Pass

4.2 Test Graph

4.2.1 HoppNum

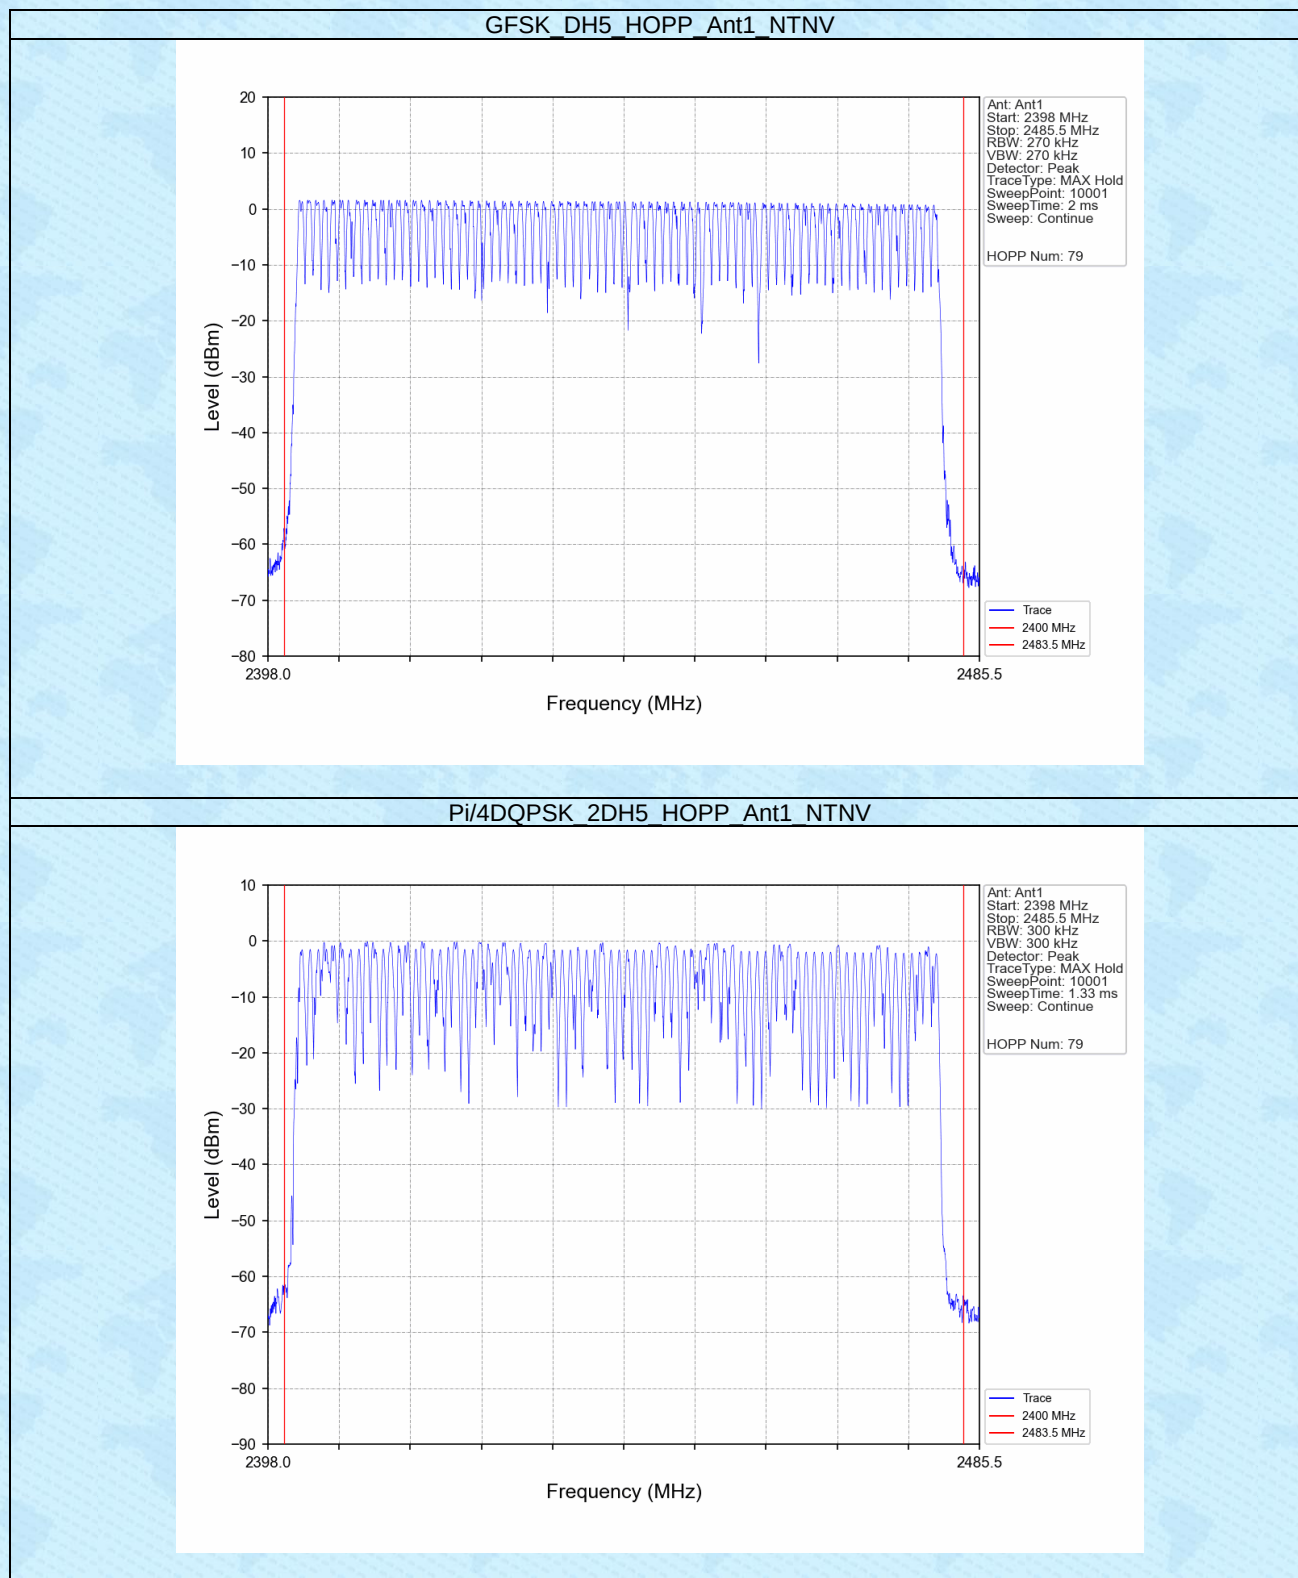

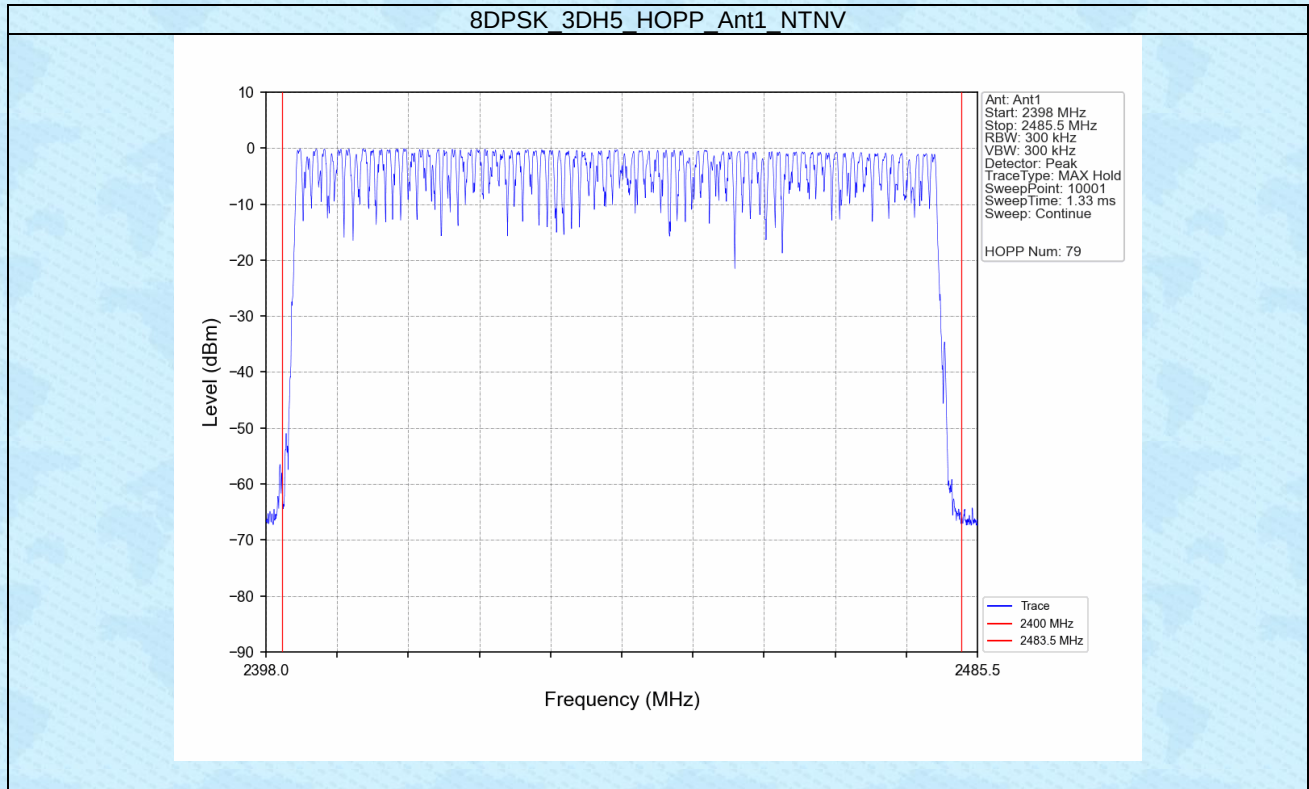

5. Time of Occupancy (Dwell Time)


5.1 Test Result

5.1.1 Ant1


Ant1									
Mode	Tx Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.374	31.600	320	119.680	<=400	Pass
			DH3	1.640	31.600	161	264.040	<=400	Pass
			DH5	2.890	31.600	98	283.220	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH1	0.406	31.600	320	129.920	<=400	Pass
			2DH3	1.644	31.600	160	263.040	<=400	Pass
			2DH5	2.882	31.600	114	328.548	<=400	Pass
8DPSK	SISO	HOPP	3DH1	0.390	31.600	320	124.800	<=400	Pass
			3DH3	1.632	31.600	164	267.648	<=400	Pass
			3DH5	2.894	31.600	105	303.870	<=400	Pass

5.2 Test Graph


5.2.1 Ant1

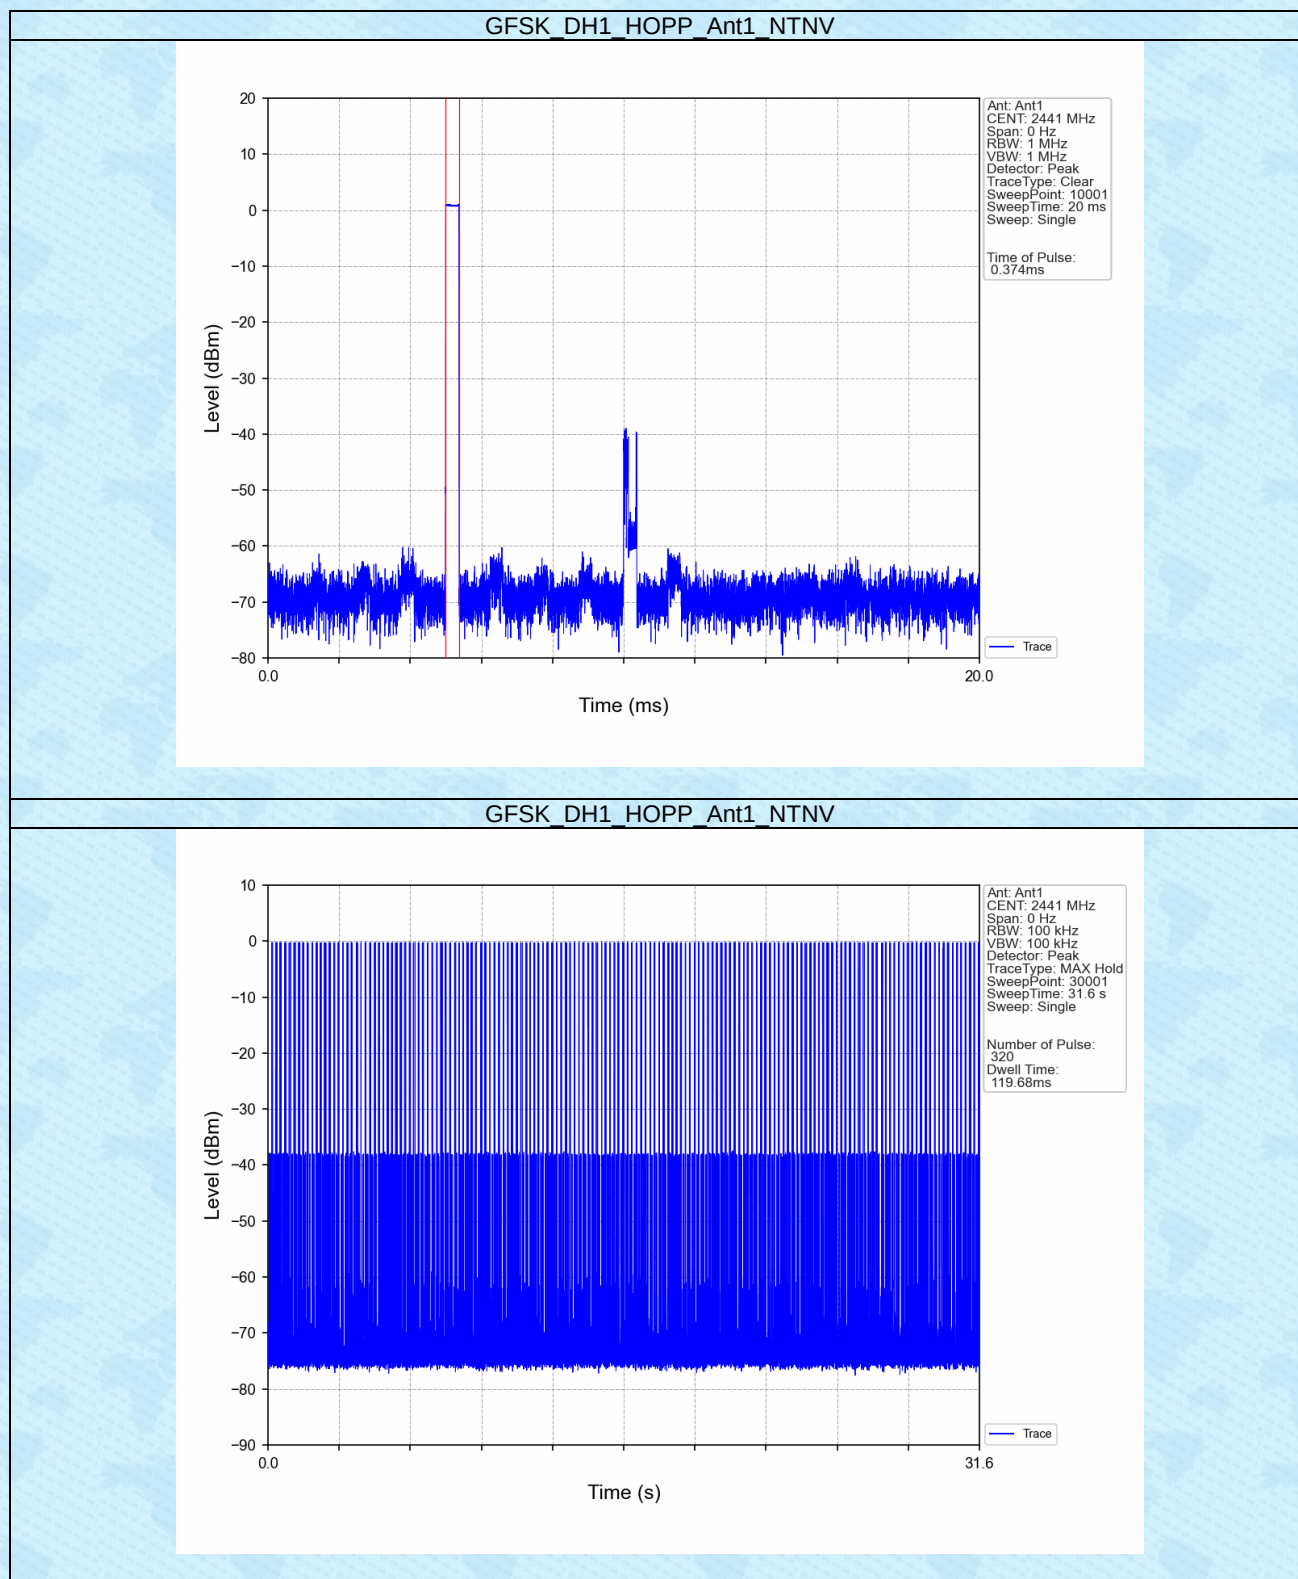


GFSK DH3 HOPP Ant1 NTN

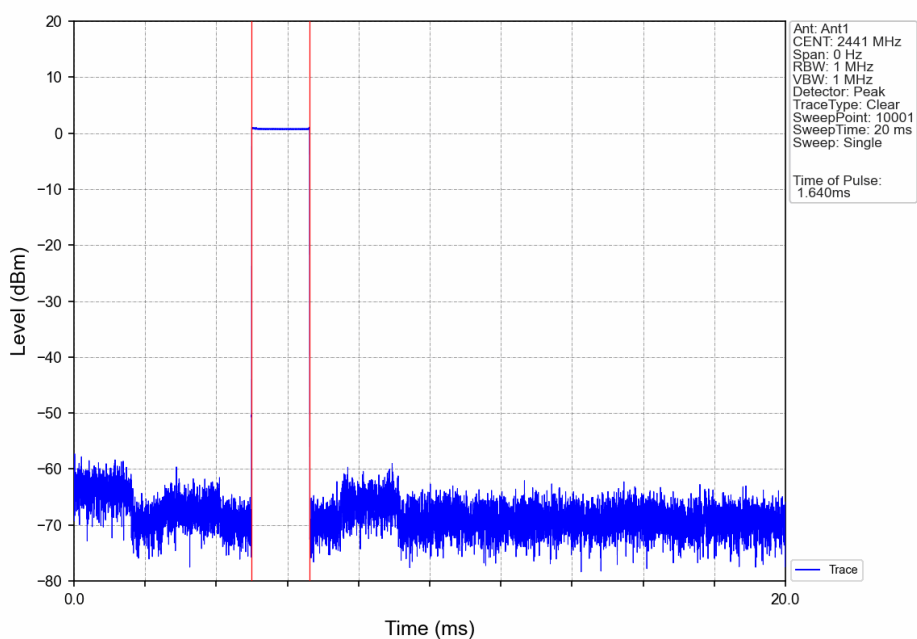


GFSK DH3 HOPP Ant1 NTN

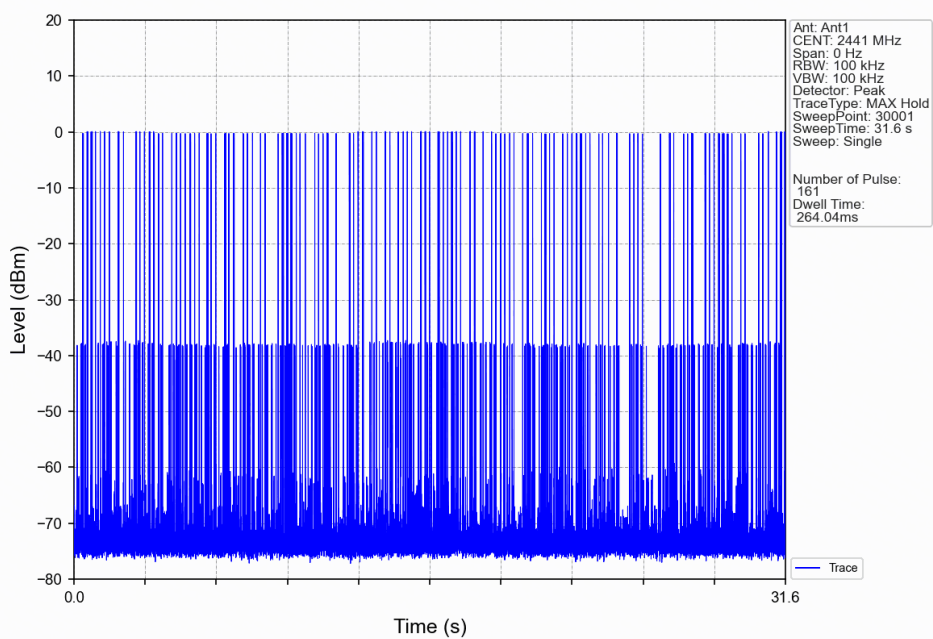


GFSK DH5 HOPP Ant1 NTN

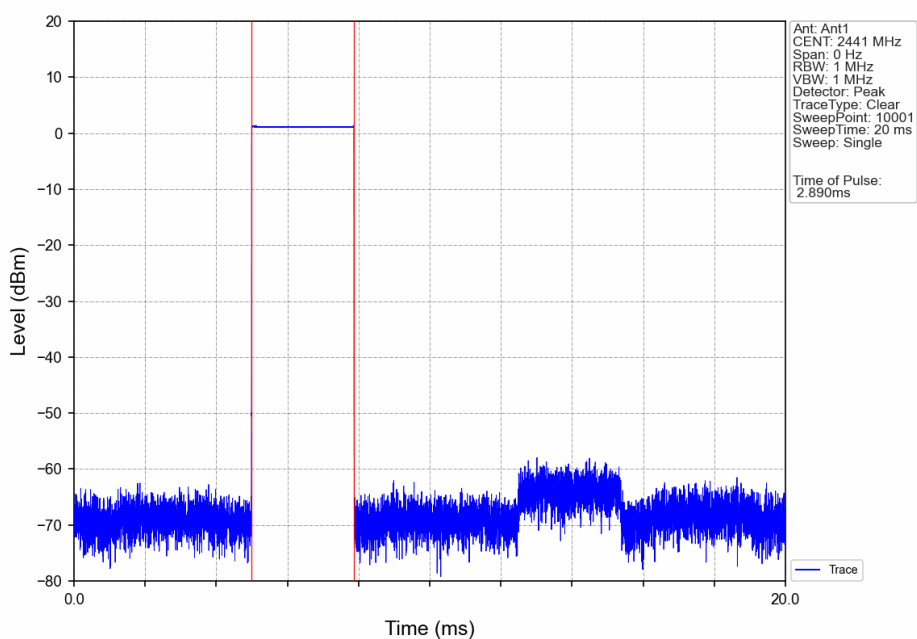


GFSK DH5 HOPP Ant1 NTN

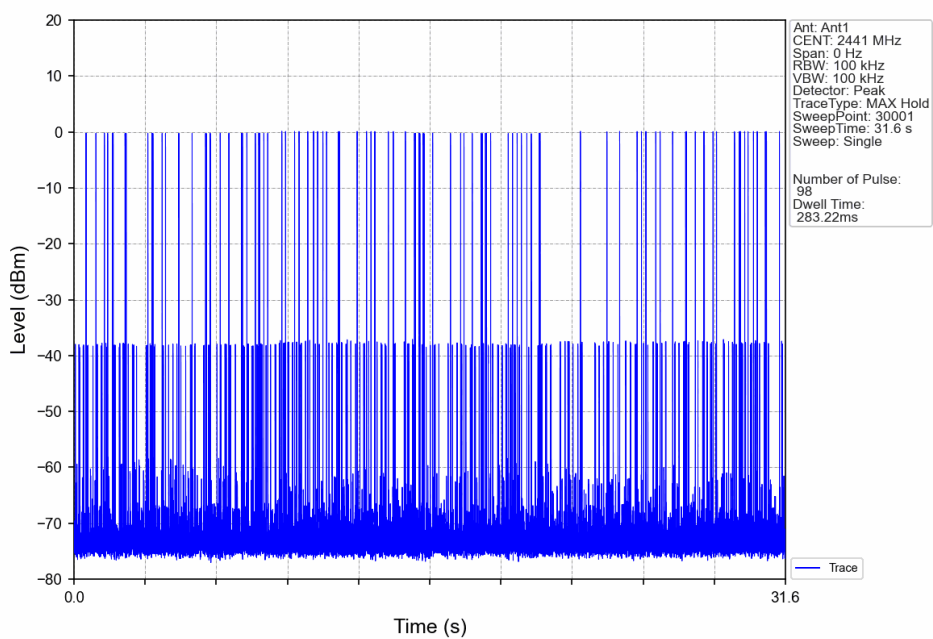


Pi/4DQPSK_2DH1_HOPP_Ant1_NTNV

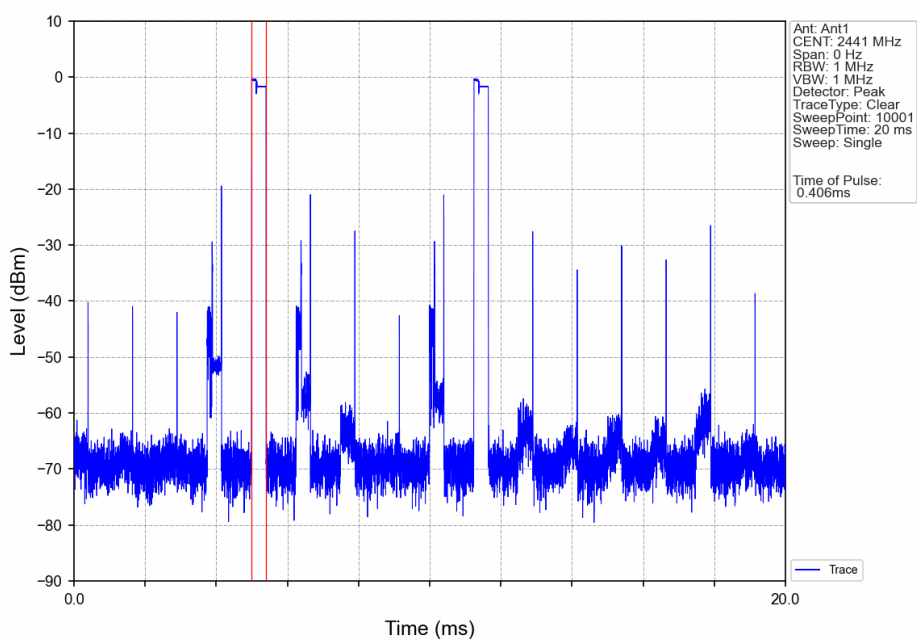


Pi/4DQPSK_2DH1_HOPP_Ant1_NTNV

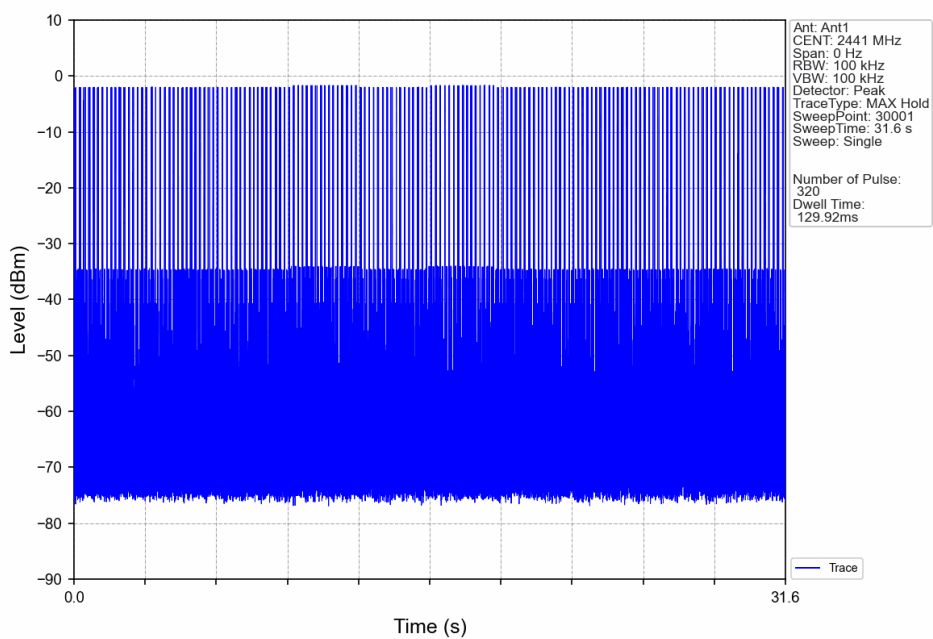


Pi/4DQPSK_2DH3_HOPP_Ant1_NTNV

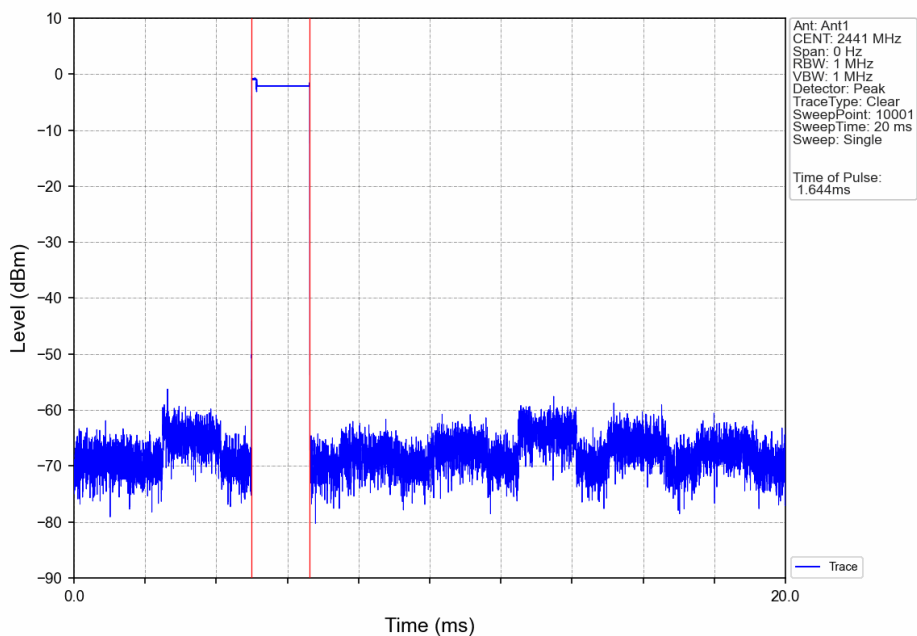


Pi/4DQPSK_2DH3_HOPP_Ant1_NTNV

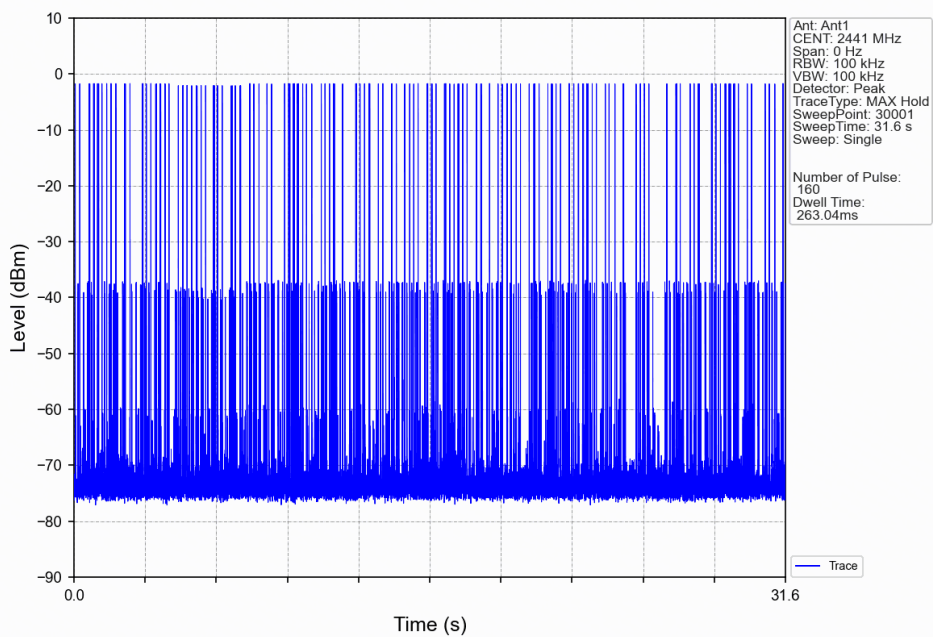


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

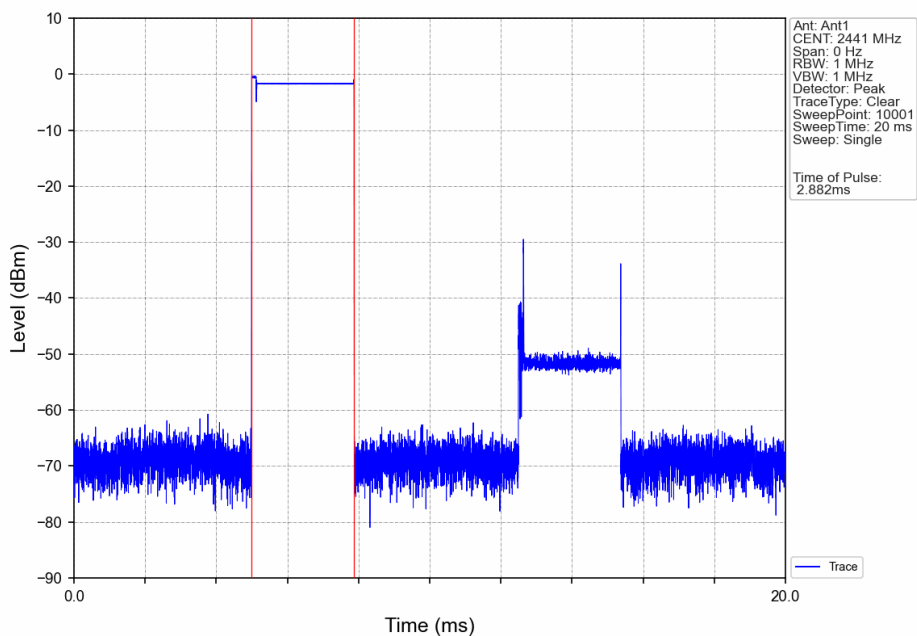


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

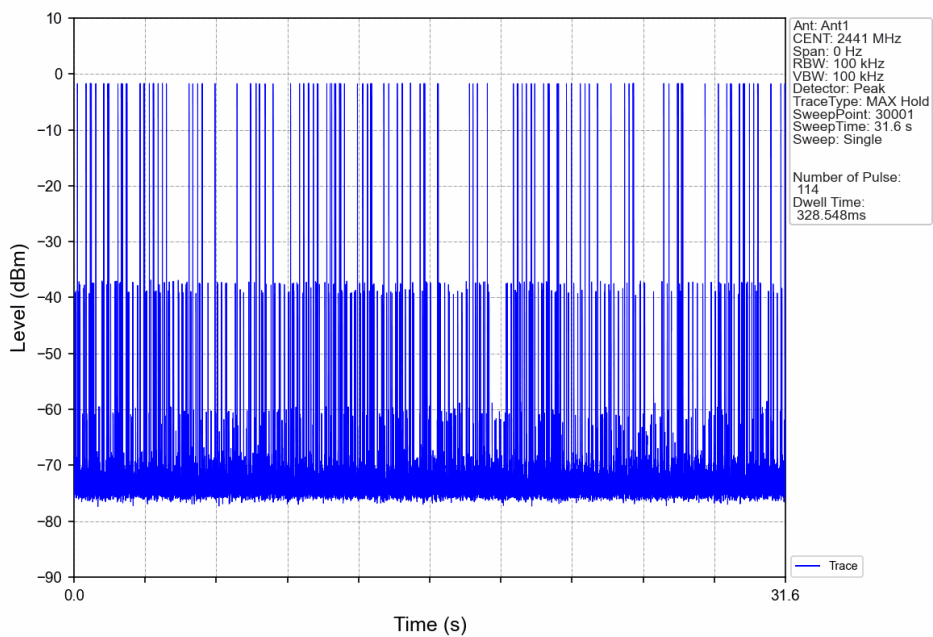


8DPSK 3DH1_HOPP_Ant1_NTNV

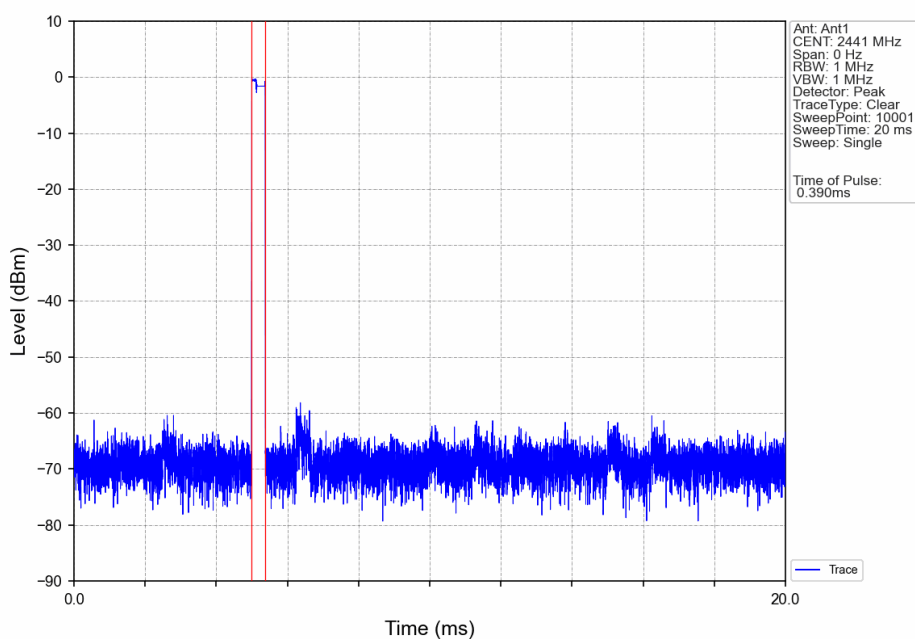


8DPSK 3DH1_HOPP_Ant1_NTNV

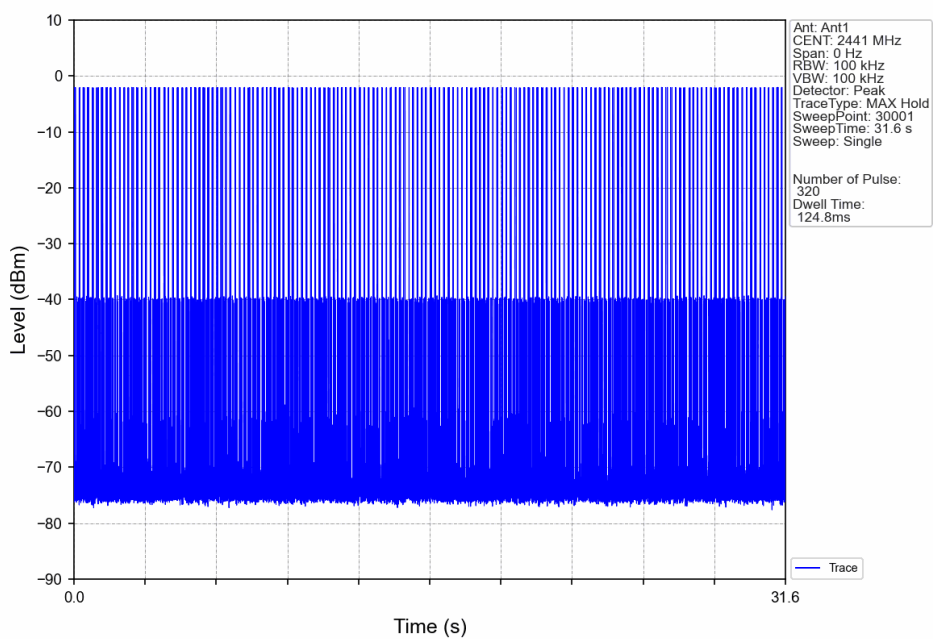


8DPSK 3DH3 HOPP Ant1 NTN

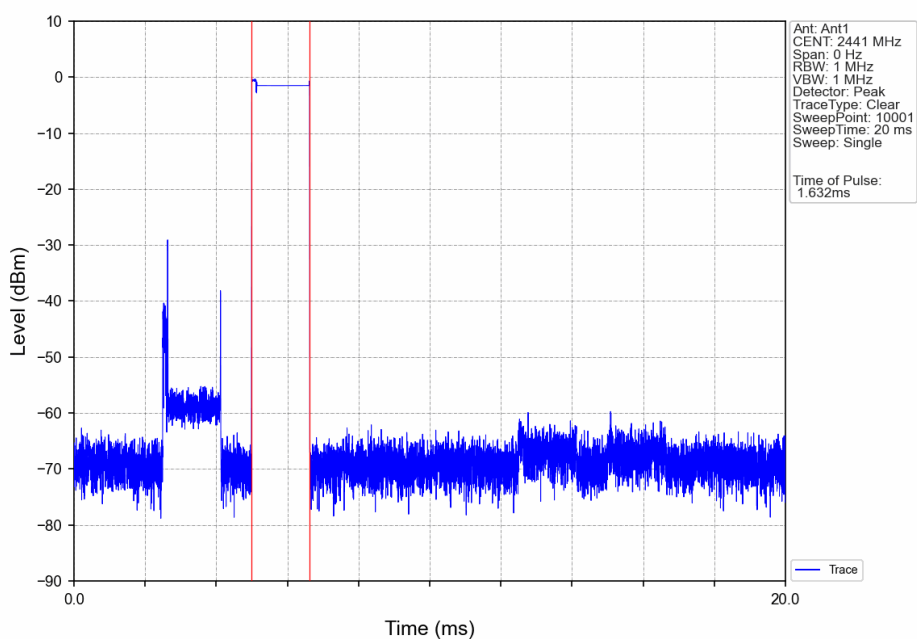


8DPSK 3DH3 HOPP Ant1 NTN

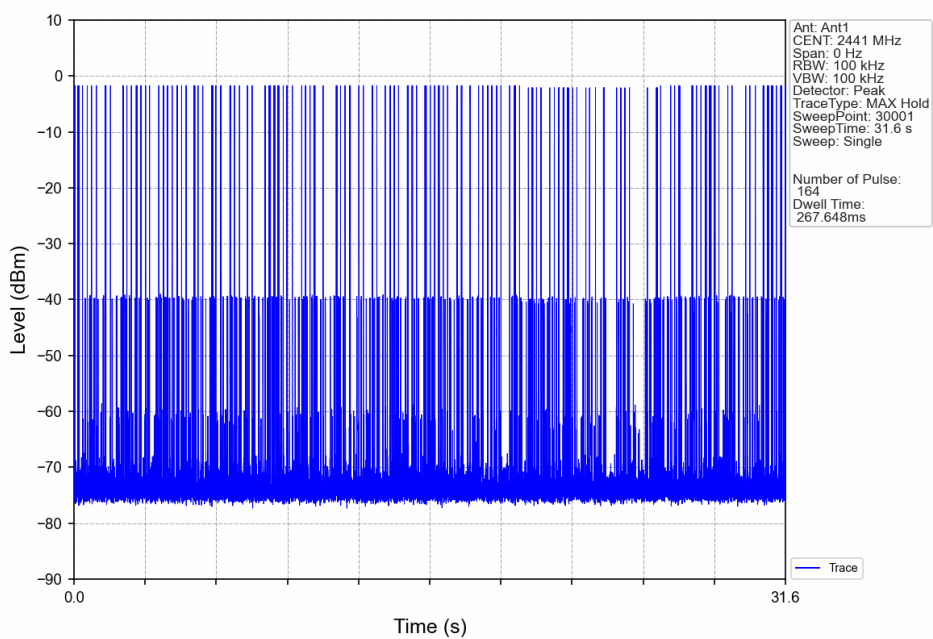

8DPSK 3DH5 HOPP Ant1 NTN

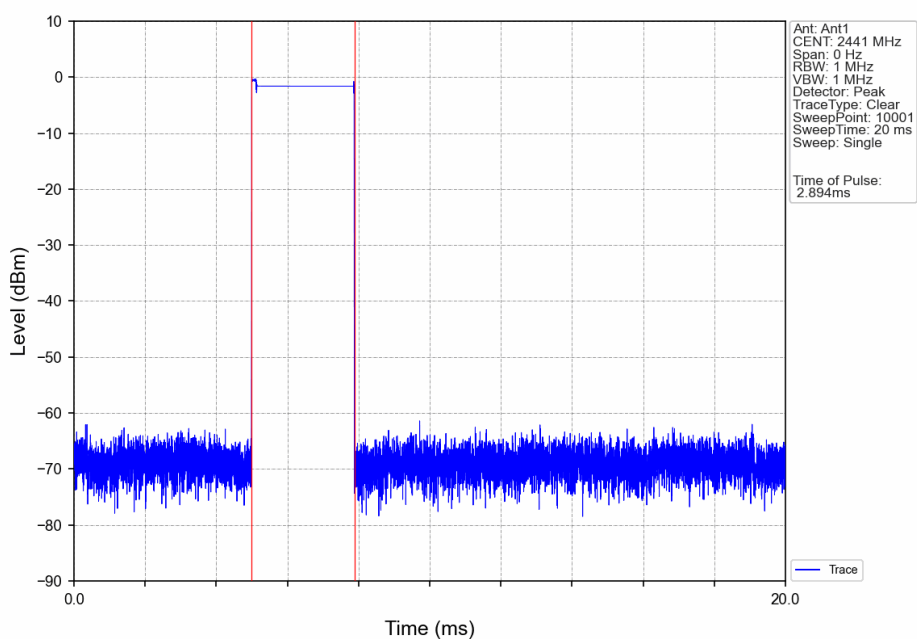

8DPSK 3DH5 HOPP Ant1 NTN

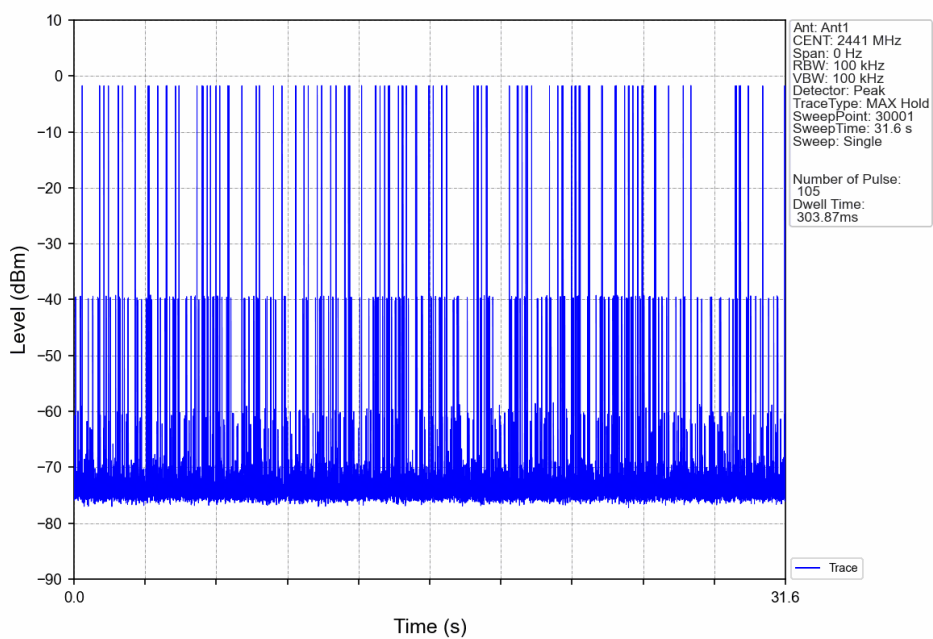

6. Unwanted Emissions In Non-restricted Frequency Bands

6.1 Test Result

6.1.1 Ref

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	1.41
		2441	DH5	1	0.63
		2480	DH5	1	0.29
Pi/4DQPSK	SISO	2402	2DH5	1	-0.51
		2441	2DH5	1	-0.65
		2480	2DH5	1	-1.33
8DPSK	SISO	2402	3DH5	1	-0.57
		2441	3DH5	1	-0.71
		2480	3DH5	1	-1.55

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

6.1.2 CSE

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	1.41	-18.59	Pass
		2441	DH5	1	1.41	-18.59	Pass
		2480	DH5	1	1.41	-18.59	Pass
		HOPP	DH5	1	1.41	-18.59	Pass
					1.41	-18.59	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	-0.51	-20.51	Pass
		2441	2DH5	1	-0.51	-20.51	Pass
		2480	2DH5	1	-0.51	-20.51	Pass
		HOPP	2DH5	1	-0.51	-20.51	Pass
					-0.51	-20.51	Pass
8DPSK	SISO	2402	3DH5	1	-0.57	-20.57	Pass
		2441	3DH5	1	-0.57	-20.57	Pass
		2480	3DH5	1	-0.57	-20.57	Pass
		HOPP	3DH5	1	-0.57	-20.57	Pass
					-0.57	-20.57	Pass


Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.

6.2 Test Graph


6.2.1 Ref




GFSK_DH5_HCH_2480MHz_Ant1_NTNV

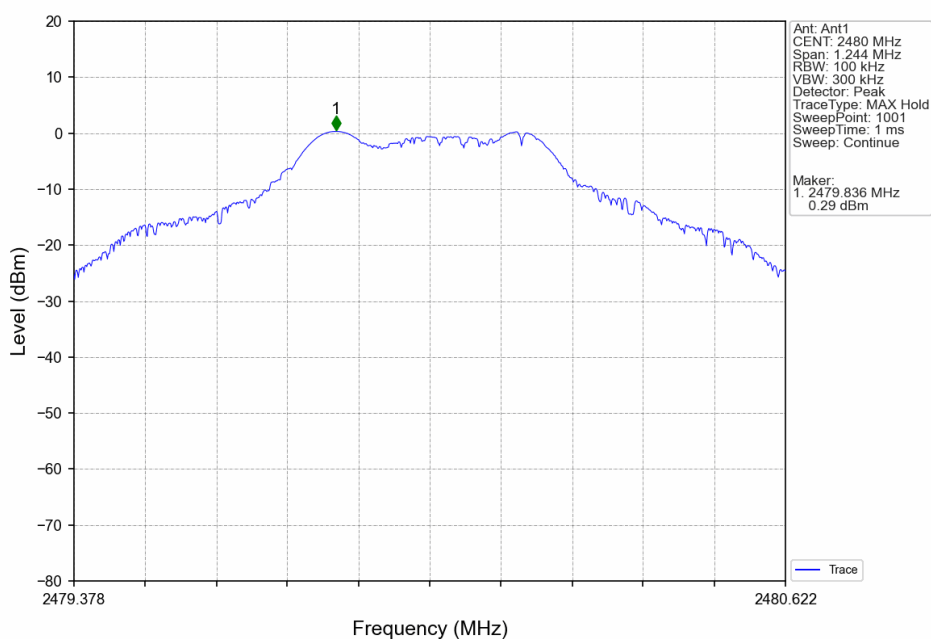


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

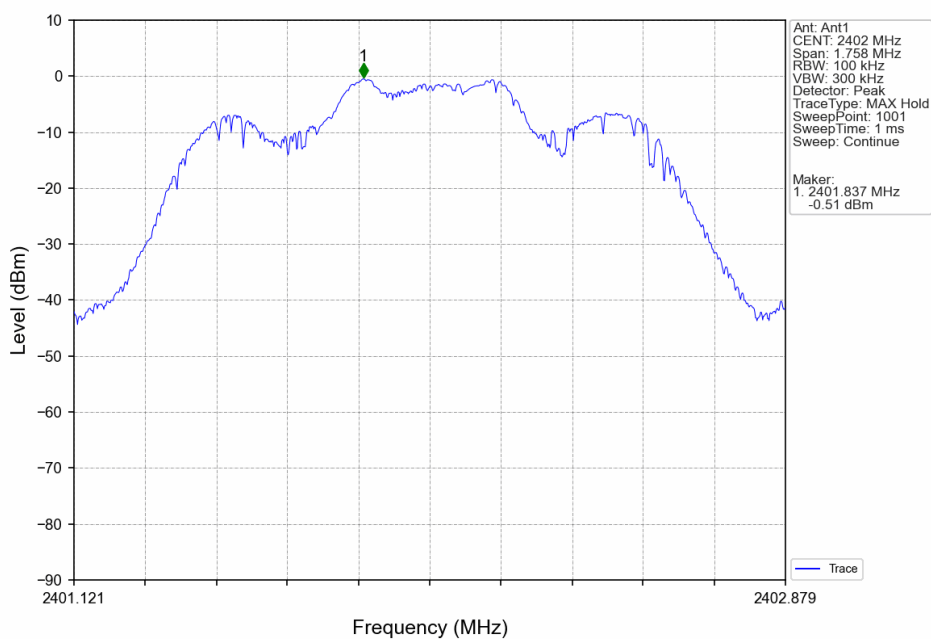


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

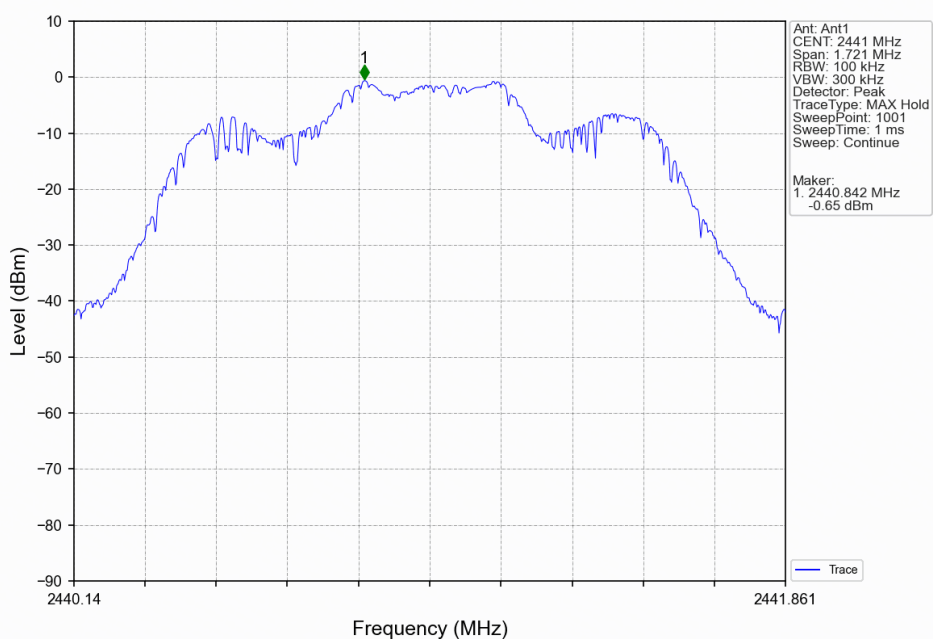


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

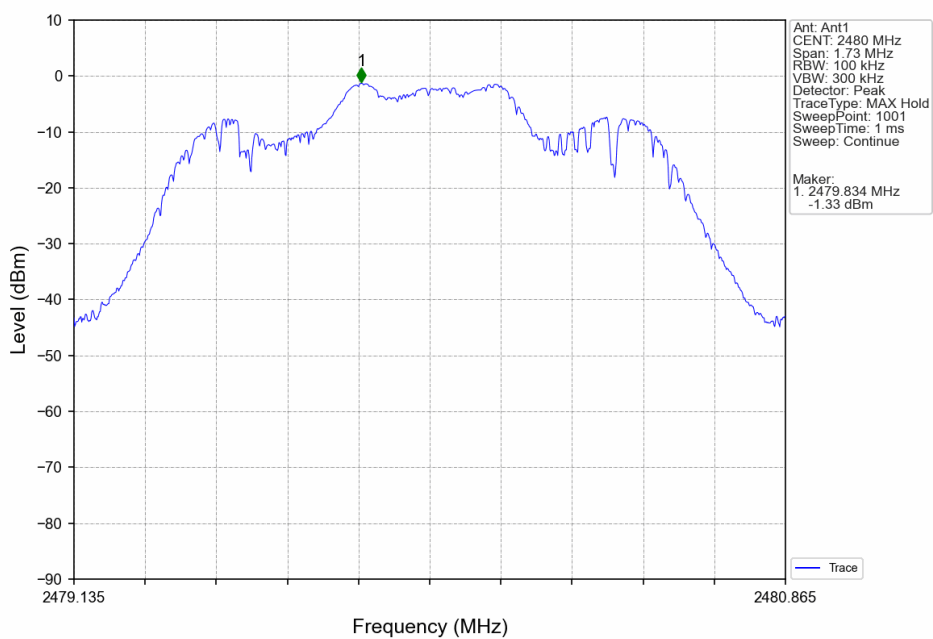


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

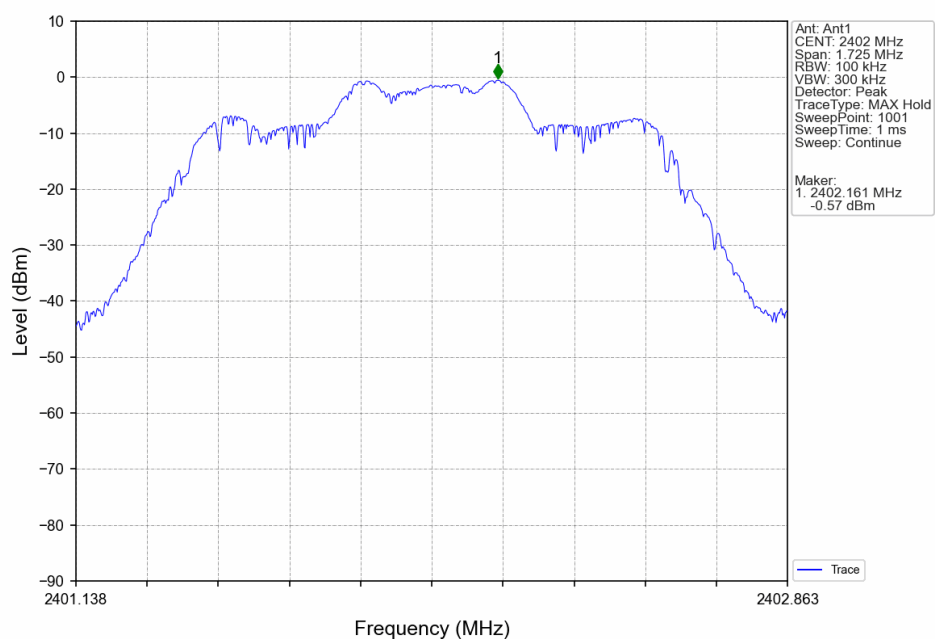


8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

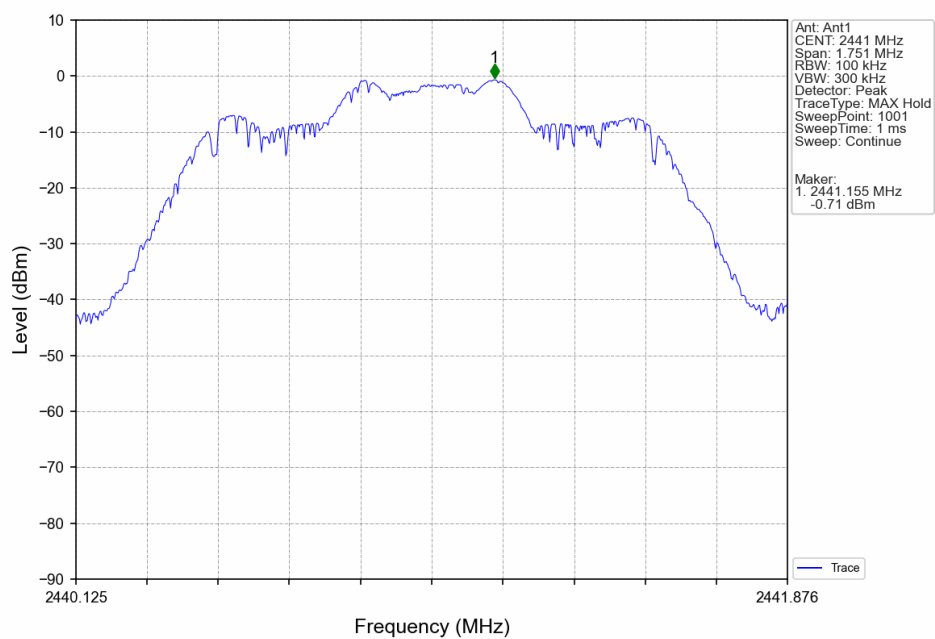


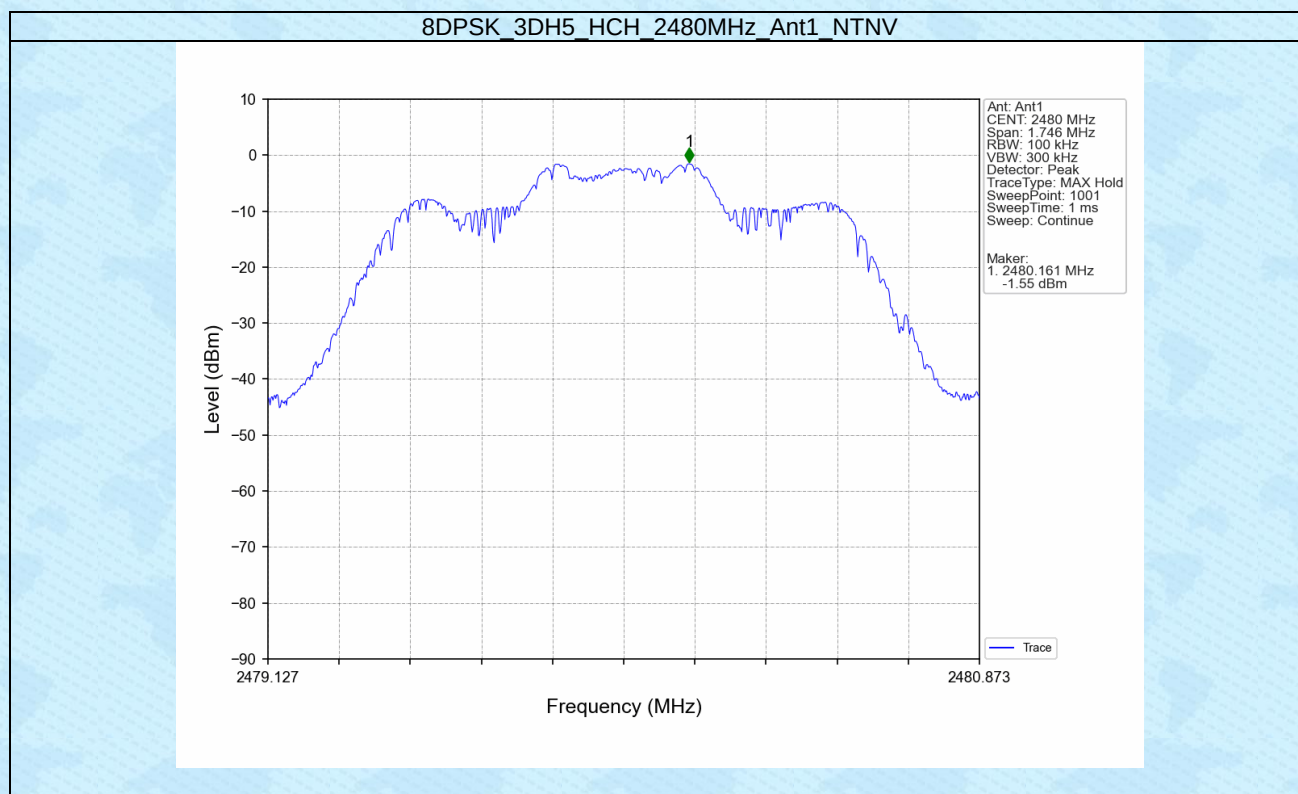


6.2.2 CSE

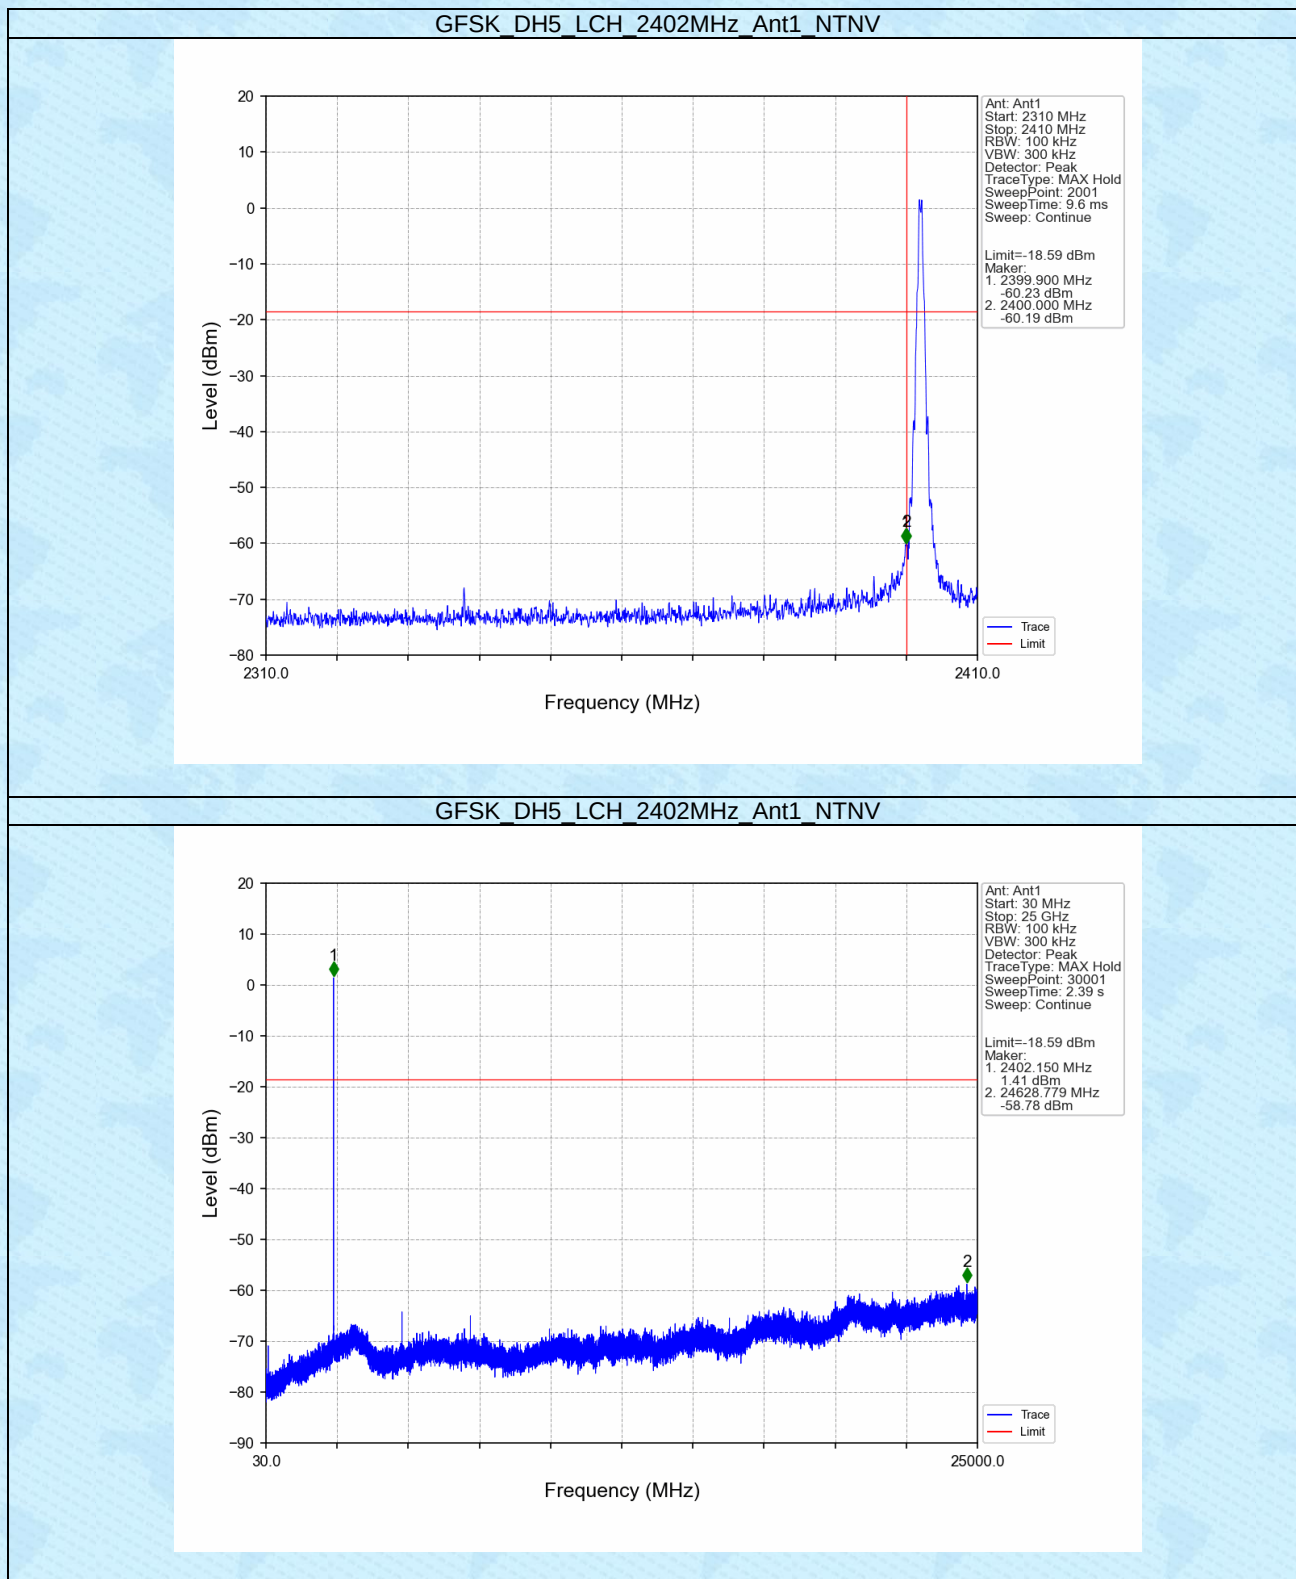


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

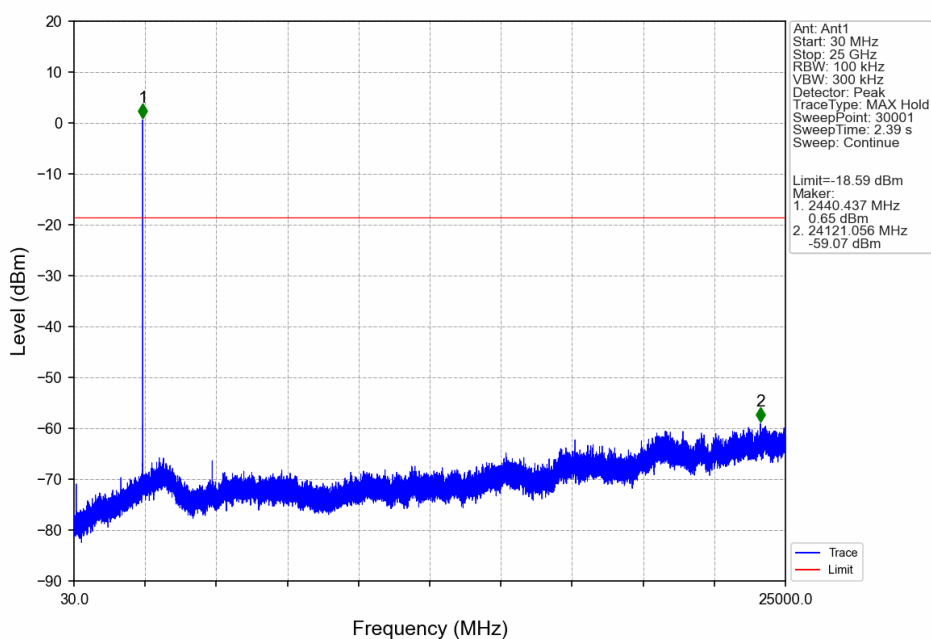


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

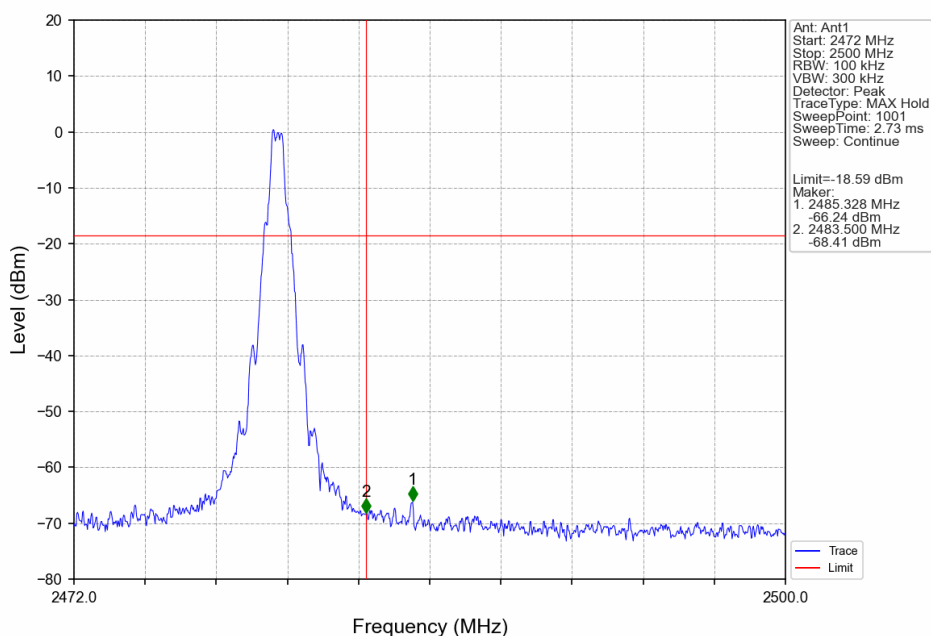


GFSK DH5 HCH 2480MHz Ant1 NTN

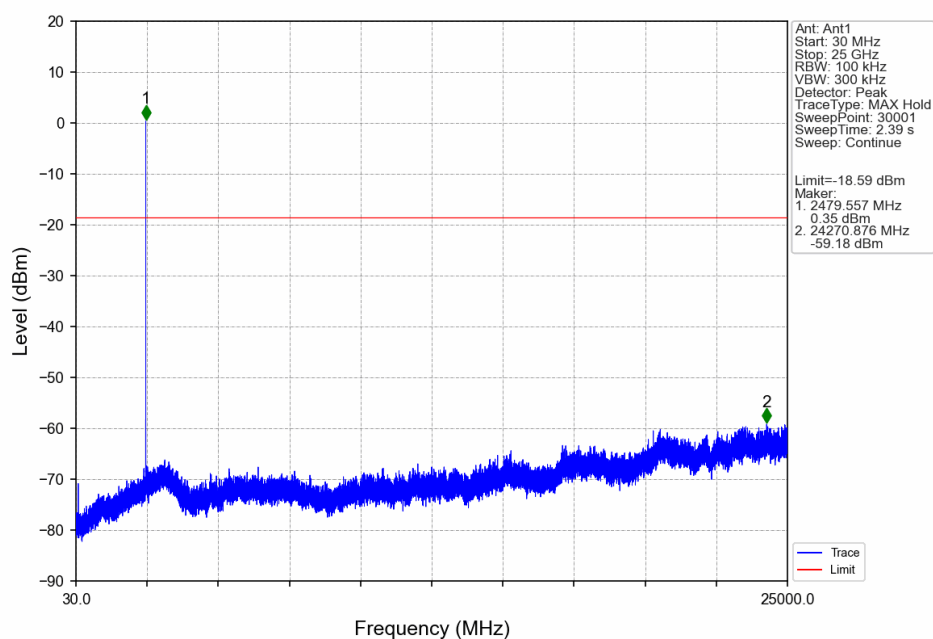


GFSK DH5 HOPP Ant1 NTN

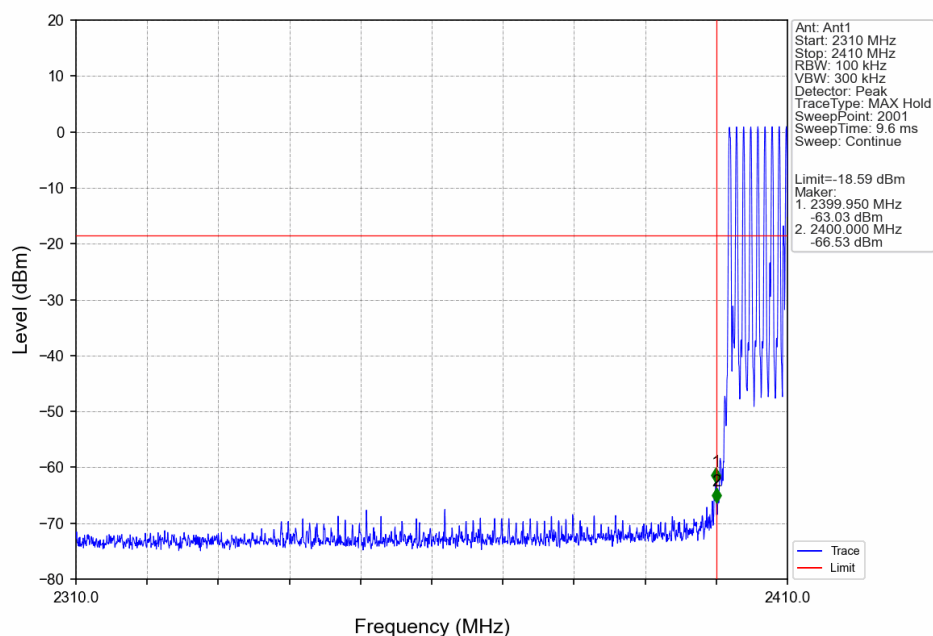


GFSK DH5_HOPP_Ant1_NTNV

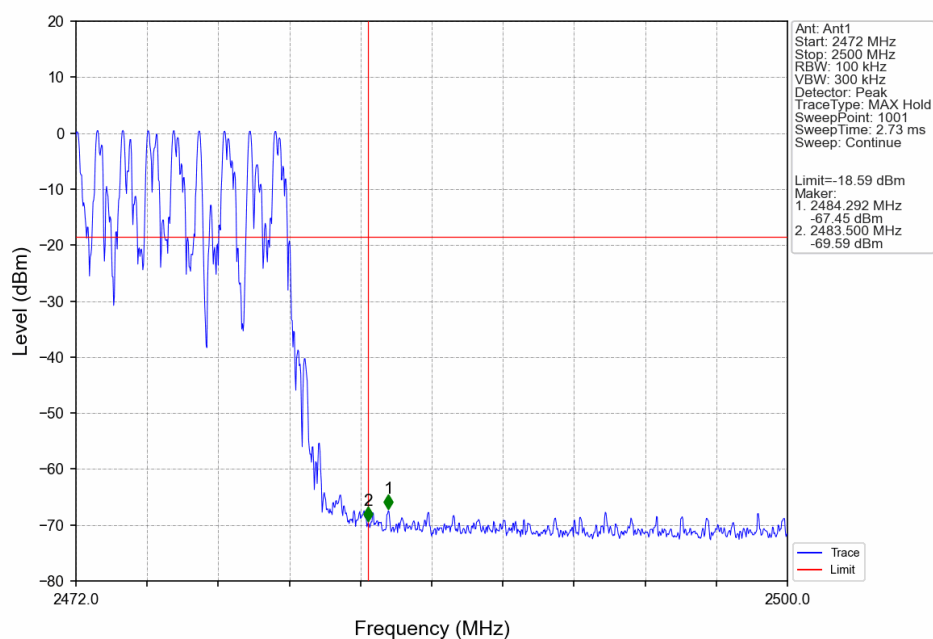


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

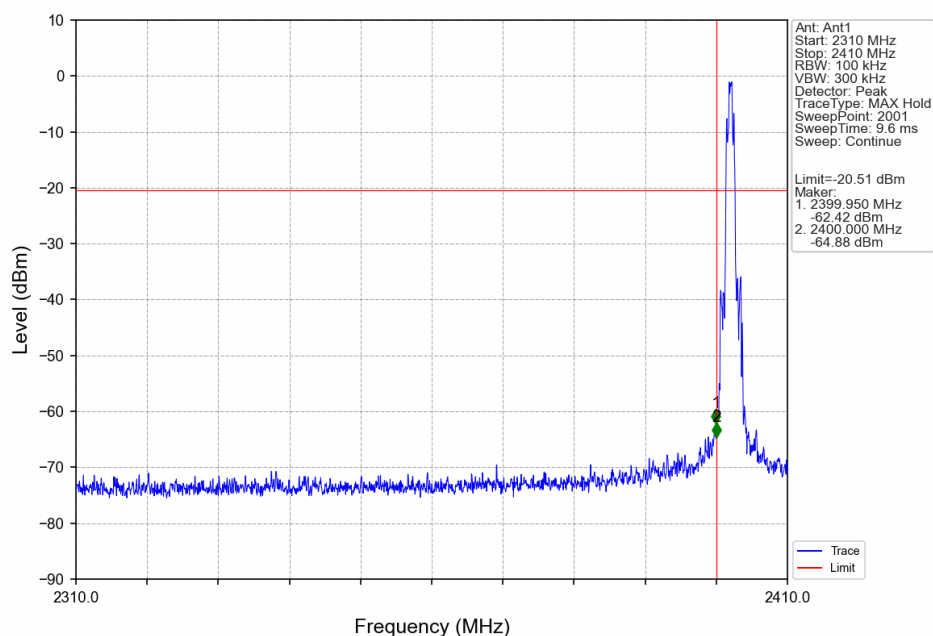


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

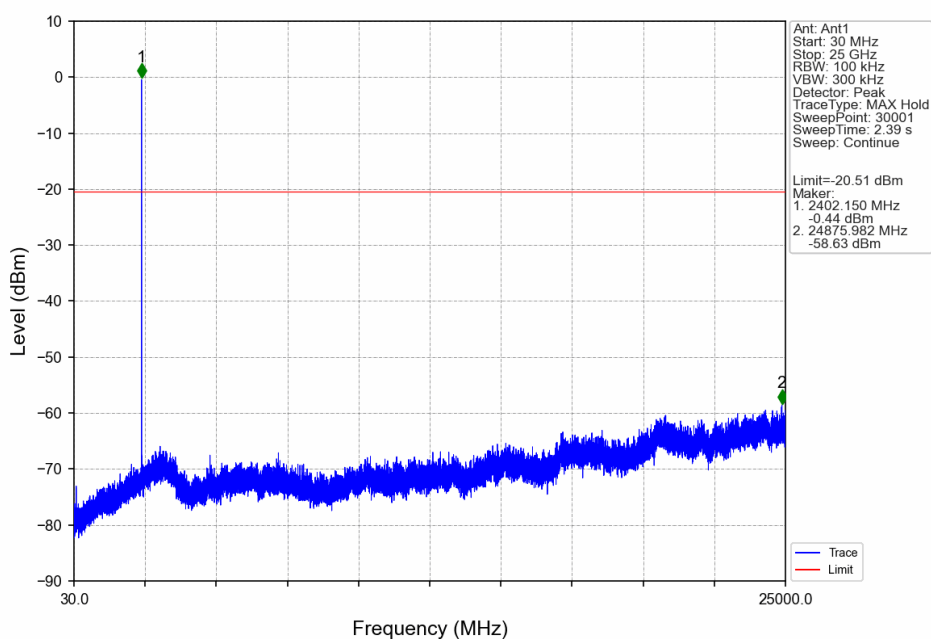


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

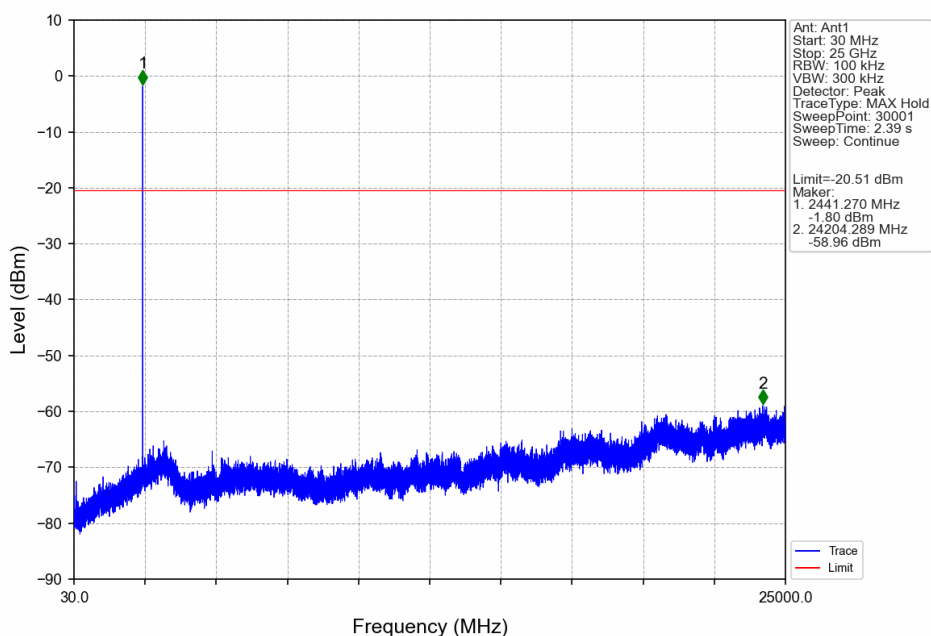


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

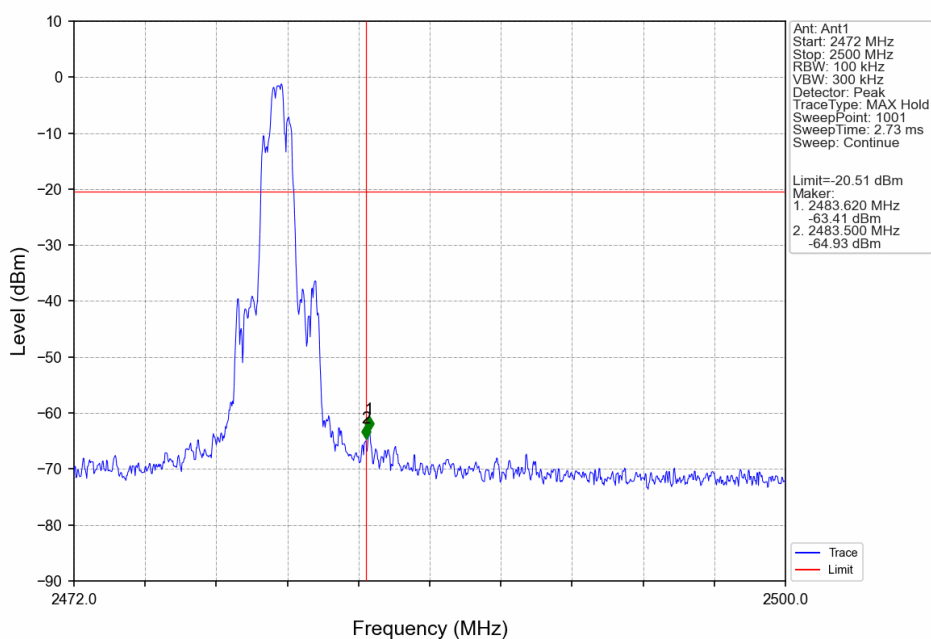


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

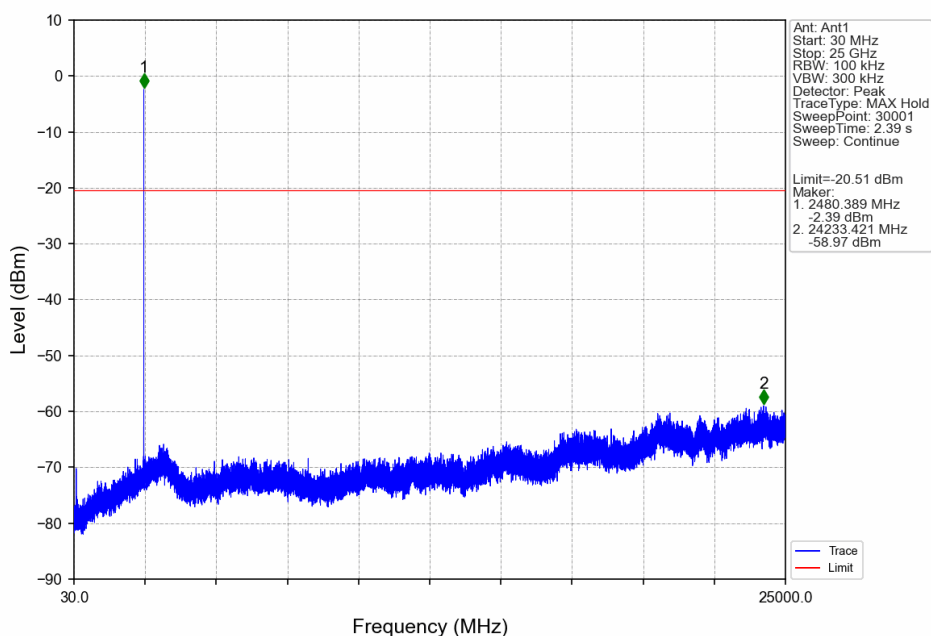


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

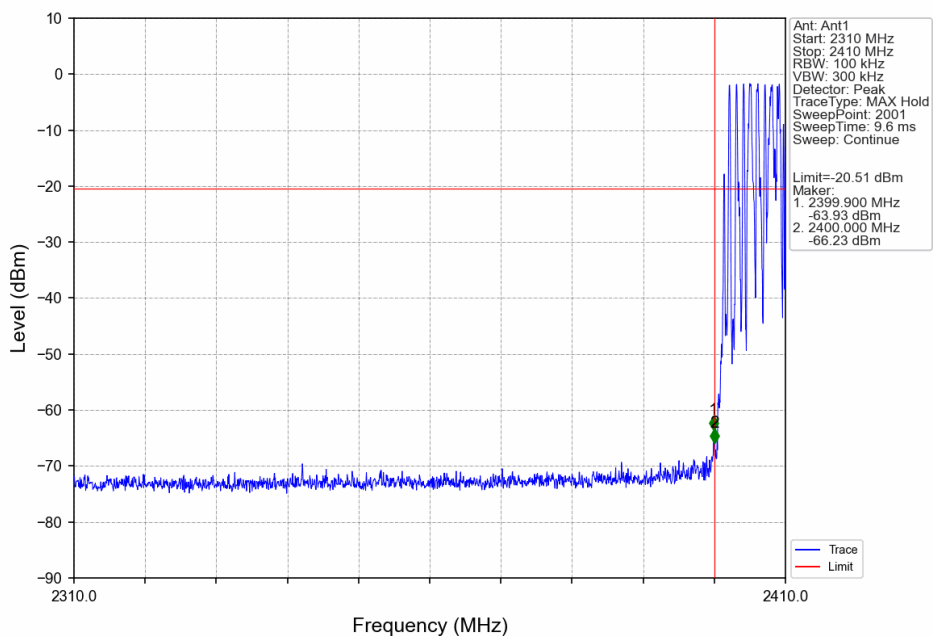


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

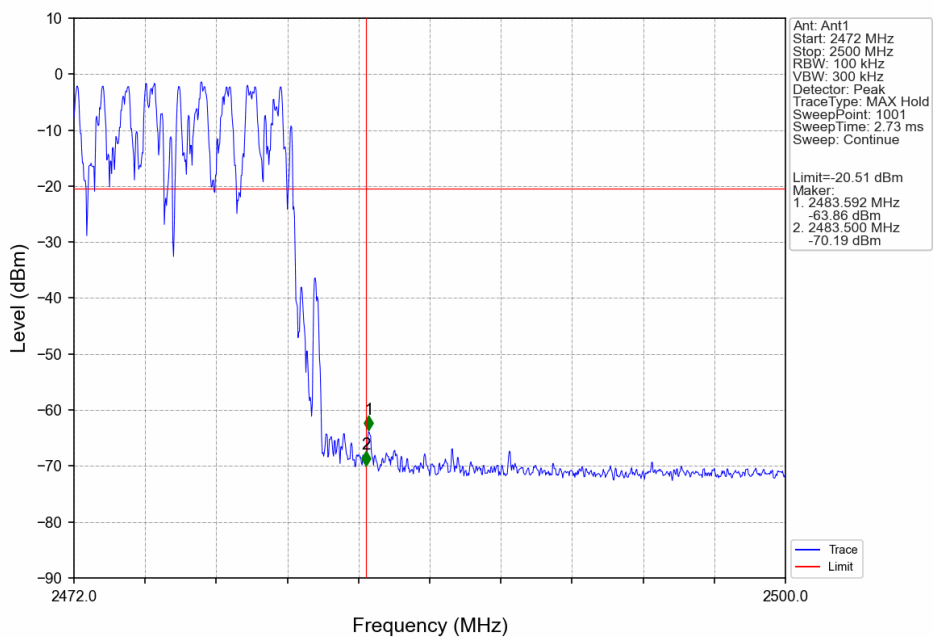


8DPSK 3DH5 LCH_2402MHz_Ant1_NTNV

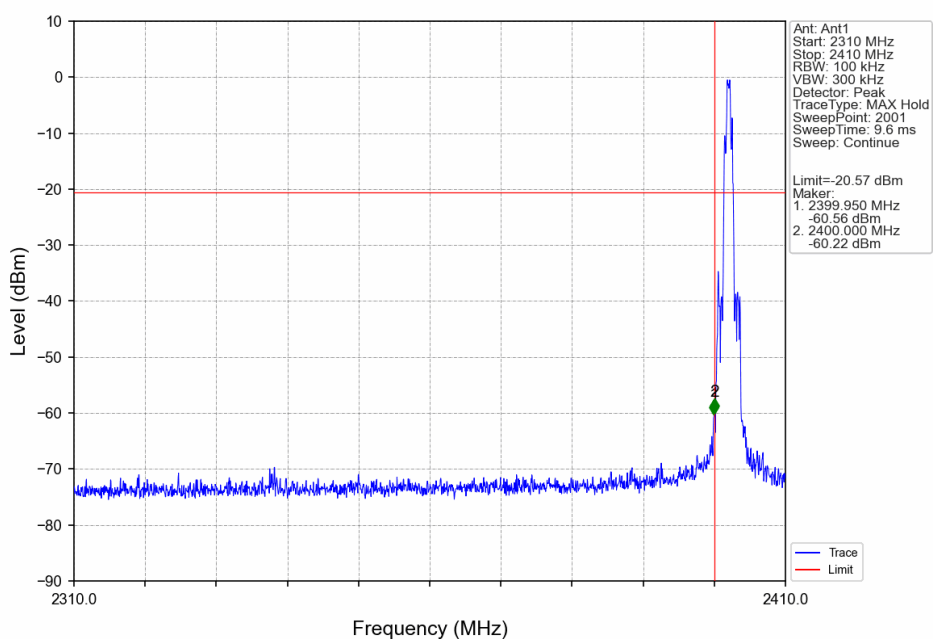


8DPSK 3DH5 LCH_2402MHz_Ant1_NTNV

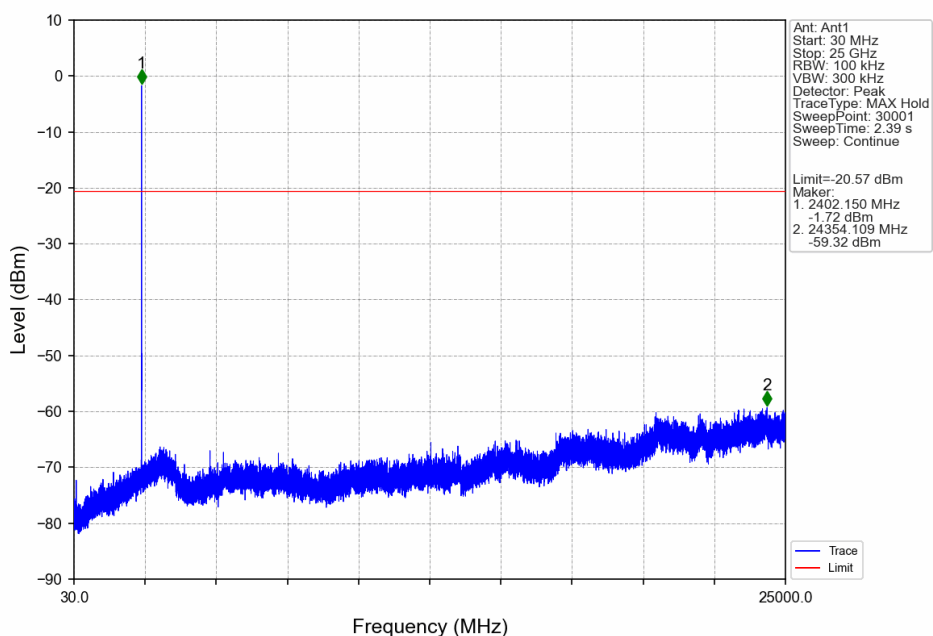


8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

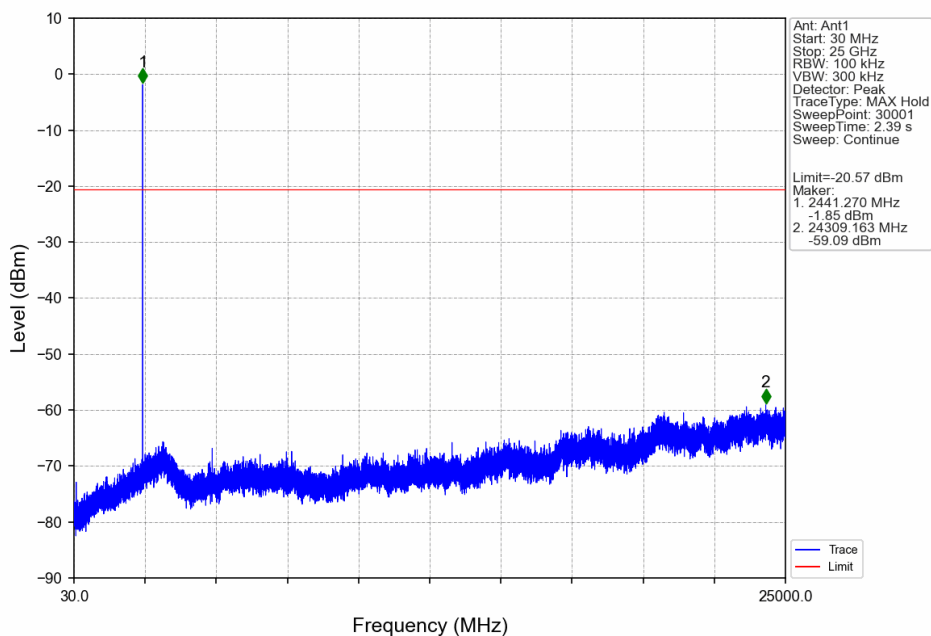


8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

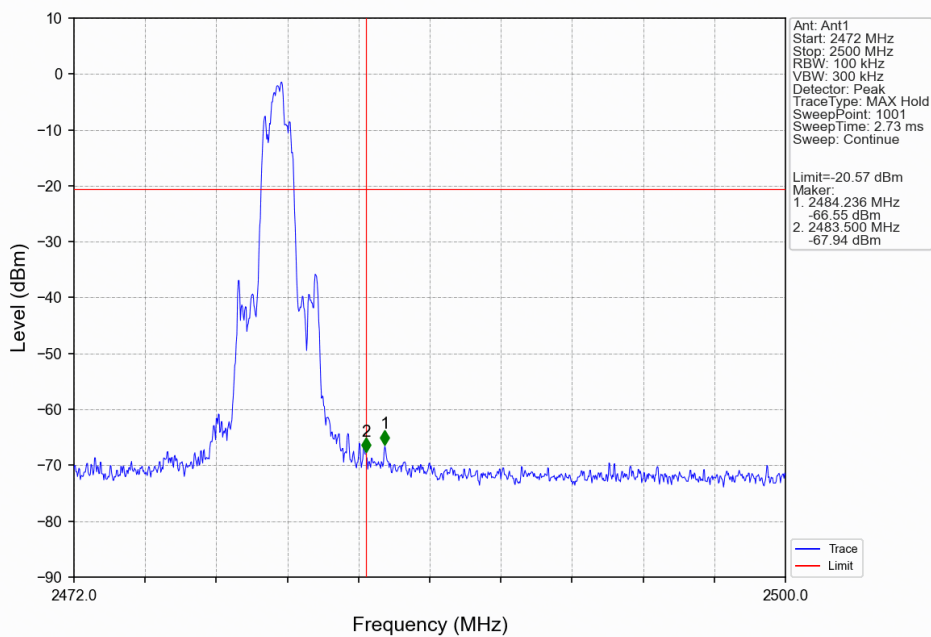


8DPSK 3DH5_HCH_2480MHz_Ant1_NTNV

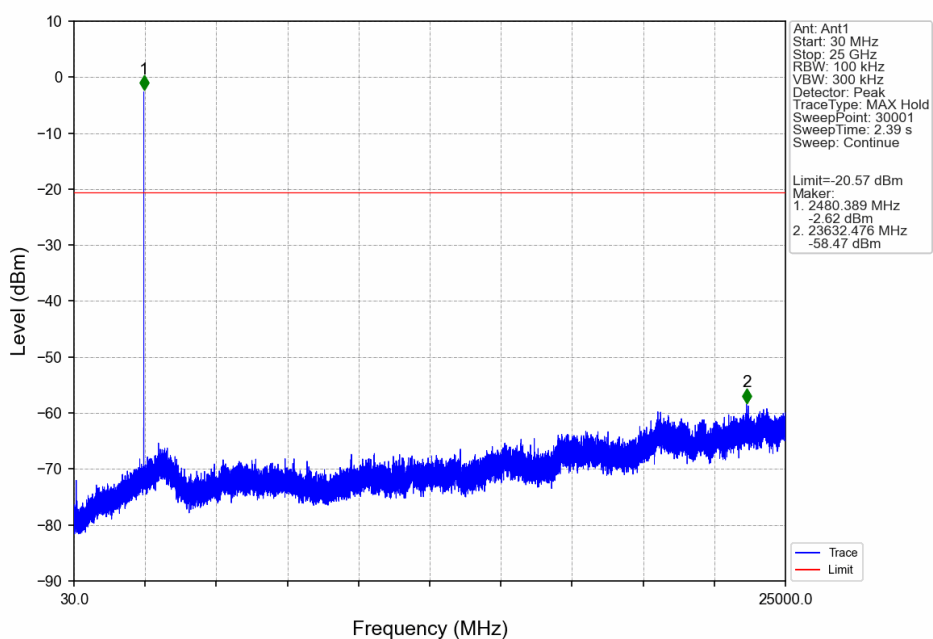

8DPSK 3DH5_HOPP_Ant1_NTNV

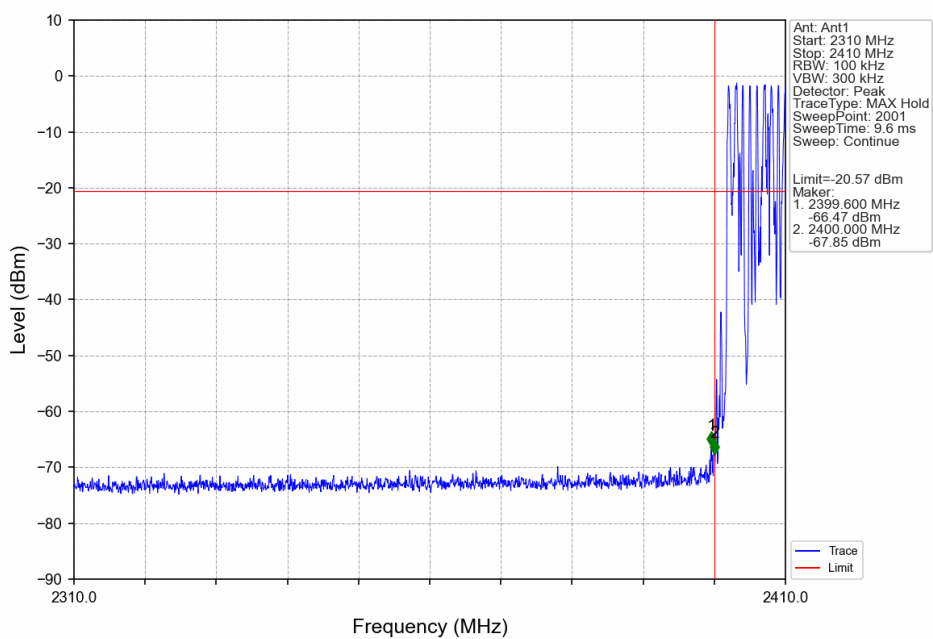

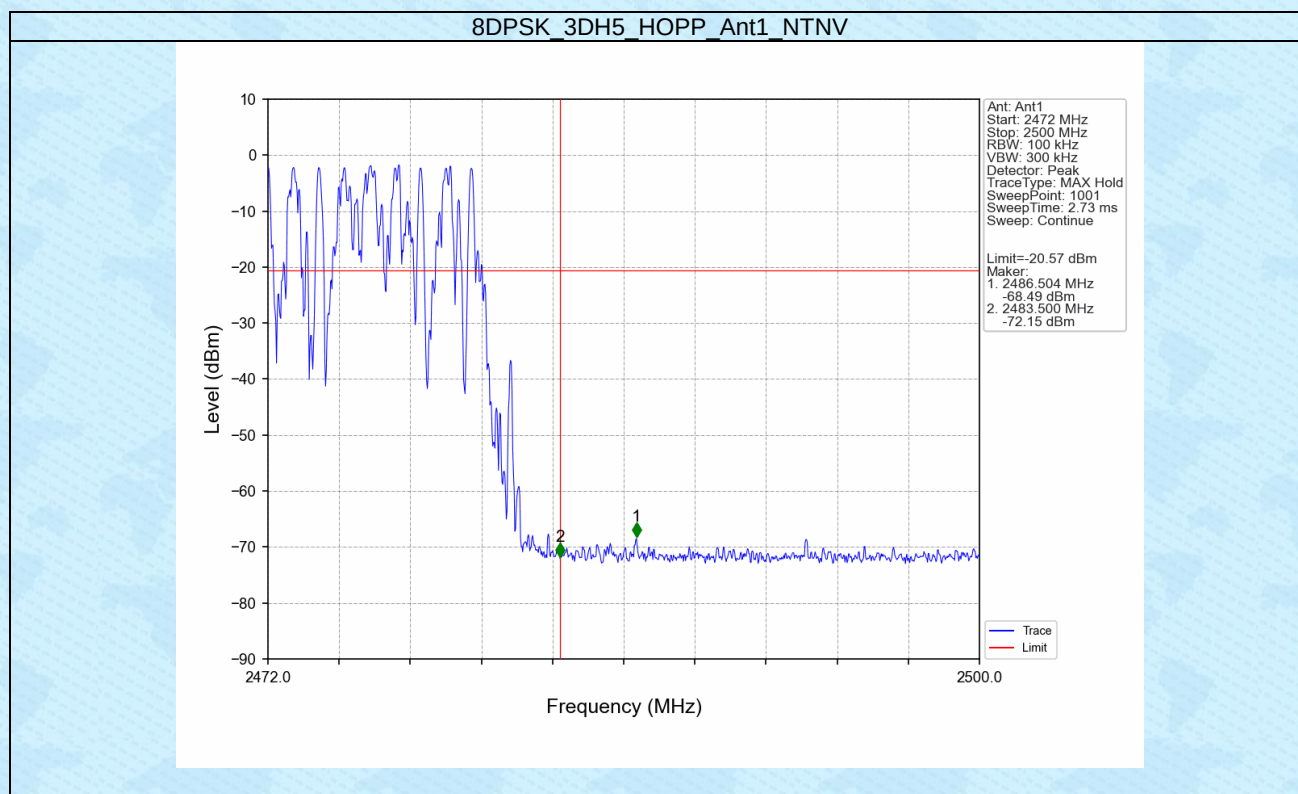

-----End-----