



FCC RADIO TEST REPORT

FCC ID : 2AVVV-A2
Equipment : Wi-Fi 7 Wall Plate Access Point
Brand Name : meter
Model Name : A2
Applicant : Meter, Inc.
548 Market St, PMB 22716 San Francisco CA 94104 USA
Manufacturer : Meter Inc.
548 Market St, PMB 22716 San Francisco CA 94104 USA
Standard : 47 CFR FCC Part 15.407

The product was received on Nov. 27, 2025, and testing was started from Jan. 30, 2026 and completed on Mar. 28, 2026. We, SPORTON INTERNATIONAL INC. Hsinhua Laboratory, would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC. Hsinhua Laboratory, the test report shall not be reproduced except in full.



Approved by: Jackson Tsai

SPORTON INTERNATIONAL INC. Hsinhua Laboratory

No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Information.....	5
1.2 Applicable Standards	11
1.3 Testing Location Information	11
1.4 Measurement Uncertainty	12
2 Test Configuration of EUT	13
2.1 Test Channel Mode	13
2.2 The Worst Case Measurement Configuration	14
2.3 Support Equipment.....	17
2.4 Test Setup Diagram	18
3 Transmitter Test Result	19
3.1 AC Power-line Conducted Emissions	19
3.2 Emission Bandwidth	21
3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	22
3.4 Peak Power Spectral Density (E.I.R.P.)	25
3.5 Unwanted Emissions.....	28
3.6 Contention Based Protocol.....	33
4 Test Equipment and Calibration Data	34
Appendix A. Test Results of AC Power-line Conducted Emissions	
Appendix B. Test Results of Emission Bandwidth	
Appendix C. Test Results of Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	
Appendix D. Test Results of Peak Power Spectral Density (E.I.R.P.)	
Appendix E. Test Results of Unwanted Emissions	
Appendix F. Test Results of Contention-Based Protocol	
Appendix G. Test Results of Radiated Emission Co-location	
Appendix H. Test Photos	
Photographs of EUT v01	



TEL : 886-3-656-9065
FAX : 886-3-656-9085
Report Template No.: HE1-D1-1 Ver2.8
FCC ID: 2AVVV-A2



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.1.2	15.203	Antenna Requirement	PASS	-
3.1	15.207	AC Power-line Conducted Emissions	PASS	-
3.2	15.407(a)	Emission Bandwidth	PASS	-
3.3	15.407(a)	Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	PASS	-
3.4	15.407(a)	Peak Power Spectral Density (E.I.R.P.)	PASS	-
3.5	15.407(b)	Unwanted Emissions	PASS	-
3.6	15.407(d)	Contention-Based Protocol	PASS	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

None

Reviewed by: Ben Tseng

Report Producer: Debby Hung



1 General Description

1.1 Information

Scan Radio only has RX function.

1.1.1 RF General Information

Frequency Range (MHz)	IEEE Std. 802.11	Ch. Frequency (MHz)	Channel Number
5925 ~ 7125	a, ax (HEW20), be (EHT20)	5955 ~ 7115	1 ~ 233 [59]
5925 ~ 7125	ax (HEW40), be (EHT40)	5965 ~ 7085	3 ~ 227 [29]
5925 ~ 7125	ax (HEW80), be (EHT80)	5985 ~ 7025	7 ~ 215 [14]
5925 ~ 7125	ax (HEW160), be (EHT160)	6025 ~ 6985	15 ~ 207 [7]

Non-Beamforming

Band	Mode	BWch	Nant
5.925-6.425GHz	802.11a	20	2TX
6.425-6.525GHz	802.11a	20	2TX
6.525-6.875GHz	802.11a	20	2TX
6.875-7.125GHz	802.11a	20	2TX
5.925-6.425GHz	802.11be EHT20	20	2TX
6.425-6.525GHz	802.11be EHT20	20	2TX
6.525-6.875GHz	802.11be EHT20	20	2TX
6.875-7.125GHz	802.11be EHT20	20	2TX
5.925-6.425GHz	802.11be EHT40	40	2TX
6.425-6.525GHz	802.11be EHT40	40	2TX
6.525-6.875GHz	802.11be EHT40	40	2TX
6.875-7.125GHz	802.11be EHT40	40	2TX
5.925-6.425GHz	802.11be EHT80	80	2TX
6.425-6.525GHz	802.11be EHT80	80	2TX
6.525-6.875GHz	802.11be EHT80	80	2TX
6.875-7.125GHz	802.11be EHT80	80	2TX
5.925-6.425GHz	802.11be EHT160	160	2TX
6.425-6.525GHz	802.11be EHT160	160	2TX
6.525-6.875GHz	802.11be EHT160	160	2TX
6.875-7.125GHz	802.11be EHT160	160	2TX

**Beamforming**

Band	Mode	BWch	Nant
5.925-6.425GHz	802.11be EHT20-BF	20	2TX
6.425-6.525GHz	802.11be EHT20-BF	20	2TX
6.525-6.875GHz	802.11be EHT20-BF	20	2TX
6.875-7.125GHz	802.11be EHT20-BF	20	2TX
5.925-6.425GHz	802.11be EHT40-BF	40	2TX
6.425-6.525GHz	802.11be EHT40-BF	40	2TX
6.525-6.875GHz	802.11be EHT40-BF	40	2TX
6.875-7.125GHz	802.11be EHT40-BF	40	2TX
5.925-6.425GHz	802.11be EHT80-BF	80	2TX
6.425-6.525GHz	802.11be EHT80-BF	80	2TX
6.525-6.875GHz	802.11be EHT80-BF	80	2TX
6.875-7.125GHz	802.11be EHT80-BF	80	2TX
5.925-6.425GHz	802.11be EHT160-BF	160	2TX
6.425-6.525GHz	802.11be EHT160-BF	160	2TX
6.525-6.875GHz	802.11be EHT160-BF	160	2TX
6.875-7.125GHz	802.11be EHT160-BF	160	2TX

Note:

- ♦ 11a use a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.
- ♦ HEW20, HEW40, HEW80 and HEW160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM modulation.
- ♦ EHT20, EHT40, EHT80, EHT160 use a combination of OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM, 4096QAM modulation.
- ♦ BWch is the nominal channel bandwidth.
- ♦ The channel defined in the IEEE Standard P802.11ax™/D6.1.

**1.1.2 Antenna Information**

Ant.	Brand Name	Model Name	Antenna Type	Connector	Support	Radio
1	GrandTek	2G-1	PCB	I-Pex	2.4G	Radio 1
2	GrandTek	2G-2	PCB	I-Pex	2.4G	Radio 1
3	GrandTek	5G-1	PCB	I-Pex	5G	Radio 2
4	GrandTek	5G-2	PCB	I-Pex	5G	Radio 2
5	GrandTek	6G-1	PCB	I-Pex	6G	Radio 3
6	GrandTek	6G-2	PCB	I-Pex	6G	Radio 3
7	GrandTek	Scan1	PCB	I-Pex	Scanning	Scan Radio
8	GrandTek	Scan2	PCB	I-Pex	Scanning	Scan Radio
9	GrandTek	BLE	PCB	I-Pex	BT	BT

Ant.	Port	Gain (dBi)			
		2.4G	5G	6G	BT
1	1	4.2	-	-	-
2	2	2.6	-	-	-
3	1	-	5.1	-	-
4	2	-	5.2	-	-
5	1	-	-	5.5	-
6	2	-	-	7.1	-
7	1	1.8	5.1	5.3	-
8	2	1.5	5.9	5.6	-
9	1	-	-	-	4.63

Note 1: The EUT has nine antennas.

**For 2.4GHz function:**

For IEEE 802.11 b/g/n/VHT/ax/be mode (2TX/2RX) **(Radio 1)**

Ant. 1 (port 1), Ant. 2 (port 2) could transmit/receive simultaneously.

For IEEE 802.11 b/g/n/VHT/ax (2RX) **(Scan Radio)**

Ant. 7 (port 1), Ant. 8 (port 2) could receive simultaneously.

For 5GHz function:

For IEEE 802.11 a/n/ac/ax/be mode (2TX/2RX) **(Radio 2)**

Ant. 3 (port 1), Ant. 4 (port 2) could transmit/receive simultaneously.

For IEEE 802.11 a/n/ac/ax mode (2RX) **(Scan Radio)**

Ant. 7 (port 1), Ant. 8 (port 2) could receive simultaneously.

For 6GHz function:

For IEEE 802.11 a/ax/be mode (2TX/2RX) **(Radio 3)**

Ant. 5 (port 1), Ant. 6 (port 2) could transmit/receive simultaneously.

For IEEE 802.11 a/ax mode (2RX) **(Scan Radio)**

Ant. 7 (port 1), Ant. 8 (port 2) could receive simultaneously.

For BT function:

For IEEE 802.15.1 Bluetooth mode (1TX/1RX)

Ant. 9 (port 1) could transmit/receive.

Note 2: Directional gain information

	Maximum Output Power	Power Spectral Density
Non-BF	Directional gain = Max.gain + array gain. For power measurements on IEEE 802.11 devices Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$
BF	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$	$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$

**1.1.3 EUT Information**

Operational Condition			
EUT Power Type	From PoE		
EUT Function	☒	Indoor Access Point	☐ Dual Client
	☐	Indoor Client	☐ Fixed Client
	☐	Subordinate	☐ Standard Client
	☐	Very Low Power	☐ Standard Power Access Point
			☐ Indoor use
			☐ Outdoor use
Beamforming Function	☒	With beamforming	☐ Without beamforming
Resource Unit	☒	Full RU	☐ Partial RU
	☐	MRU	
Channel Puncturing	☐	Supported	☒ Unsupported
Software / Firmware Version for CBP		OpenWrt 23.05-SNAPSHOT r0-4fb62ad5b / LuCI IPQ5322_Sideswipe-64bit_MP branch git-25.143.25178-0cc6555	
Type of EUT			
☒	Stand-alone		
☐	Combined (EUT where the radio part is fully integrated within another device)		
	Combined Equipment - Brand Name / Model No.:		...
☐	Plug-in radio (EUT intended for a variety of host systems)		
	Host System - Brand Name / Model No.:		
☐	Other:		

Note: The above information was declared by manufacturer.

**1.1.4 Mode Test Duty Cycle****Non-Beamforming**

Mode	DC	DCF (dB)	T (s)	VBW (Hz) _1/T
802.11a_Nss1,(6Mbps)_2TX	0.993	0.03	1.981m	10Hz (DC>=0.98)
802.11be EHT20_Nss1,(MCS0)_2TX	0.997	0.01	5.456m	10Hz (DC>=0.98)
802.11be EHT40_Nss1,(MCS0)_2TX	0.997	0.01	5.456m	10Hz (DC>=0.98)
802.11be EHT80_Nss1,(MCS0)_2TX	0.997	0.01	5.456m	10Hz (DC>=0.98)
802.11be EHT160_Nss1,(MCS0)_2TX	0.997	0.01	5.456m	10Hz (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.

Beamforming

Mode	DC	DCF (dB)	T (s)	VBW (Hz) _1/T
802.11be EHT20-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.456m	10Hz (DC>=0.98)
802.11be EHT40-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.456m	10Hz (DC>=0.98)
802.11be EHT80-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.456m	10Hz (DC>=0.98)
802.11be EHT160-BF_Nss1,(MCS0)_2TX	0.997	0.01	5.456m	10Hz (DC>=0.98)

Note. If DC < 0.98, the DCF was added while measuring Output power and PSD.



1.2 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024
- ♦ FCC KDB 789033 D02 v02r01

The following reference test guidance is not within the scope of accreditation of TAF.

- ♦ KDB 987594 D01 v03r01
- ♦ KDB 987594 D02 v03
- ♦ KDB 662911 D01 v02r01
- ♦ KDB 412172 D01 v01r01
- ♦ KDB 414788 D01 v01r01

1.3 Testing Location Information

Test Lab. : Sporton International Inc. Hsinhua Laboratory				
☒ Hsinhua (TAF: 3785)	ADD: No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan (R.O.C.)			
	TEL: 886-3-327-3456		FAX: 886-3-327-0973	
Test site Designation No. TW3785 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
AC Conduction	CO04-HY	Lego Lin	17.5~19.2°C / 57~61%	28/Mar/2026
Contention-Based Protocol	DFS03-HY	CHUN-YI WU	19.7~20.3°C / 60~65%	07/Feb/2026
☒ Wenhua 3rd. (TAF: 3785)	ADD: No. 58, Aly. 75, Ln. 564, Wenhua 3rd Rd., Guishan Dist. Taoyuan City 333, Taiwan (R.O.C.)			
	TEL: 886-3-327-0868			
Test site Designation No. TW0036 with FCC.				
Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
RF Conducted	TH06-HY	Wayne Chiu	22.7~23.1°C / 54~59%	06/Feb/2026
Radiated	03CH24-HY	Jack Tang	18.2~19.6°C / 57~62%	30/Jan/2026~04/Feb/2026
Radiated (Co-Location)	03CH24-HY	Billy Wang	19.8~19.9°C / 58~60%	14/Feb/2026



1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
AC Power-line Conducted Emissions	3.44 dB	Confidence levels of 95%
Emission Bandwidth	0.05 MHz	Confidence levels of 95%
Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)	1.48 dB	Confidence levels of 95%
Peak Power Spectral Density (E.I.R.P.)	1.48 dB	Confidence levels of 95%
Contention-Based Protocol	0.94 dB	Confidence levels of 95%
Radiated Emission (9 kHz ~ 30 MHz)	2.9 dB	Confidence levels of 95%
Radiated Emission (30 MHz ~ 1 GHz)	5.64 dB	Confidence levels of 95%
Radiated Emission (1 GHz ~ 18 GHz)	5.02 dB	Confidence levels of 95%
Radiated Emission (18 GHz ~ 40 GHz)	5.28 dB	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Channel Mode

Test Software Version	qdart_conn.win.1.0_installer_00099.1
------------------------------	--------------------------------------

Non-Beamforming

Mode	Power Setting
802.11a_Nss1,(6Mbps)_2TX	-
5955MHz	11
6195MHz	11
6415MHz	11
6435MHz	11
6475MHz	10.5
6515MHz	10
6535MHz	10
6695MHz	11
6875MHz	8.5
6895MHz	9
6995MHz	8
7095MHz	8
7115MHz	3.5
802.11be EHT20_Nss1,(MCS0)_2TX	-
5955MHz	11.5
6195MHz	10.5
6415MHz	10.5
6435MHz	10.5
6475MHz	10.5
6515MHz	10.5
6535MHz	11
6695MHz	11.5
6875MHz	9
6895MHz	9
6995MHz	8
7095MHz	8
7115MHz	7.5
802.11be EHT40_Nss1,(MCS0)_2TX	-
5965MHz	14
6205MHz	13.5
6405MHz	13.5
6445MHz	14
6485MHz	14.5



Mode	Power Setting
6525MHz	14
6565MHz	14
6685MHz	14.5
6885MHz	12.5
6925MHz	12
7005MHz	11.5
7085MHz	11.5
802.11be EHT80_Nss1,(MCS0)_2TX	-
5985MHz	16
6225MHz	16.5
6385MHz	17
6465MHz	17.5
6545MHz	16.5
6625MHz	18
6705MHz	17.5
6785MHz	17
6865MHz	15
6945MHz	14
7025MHz	14.5
802.11be EHT160_Nss1,(MCS0)_2TX	-
6025MHz	19
6185MHz	20
6345MHz	19.5
6505MHz	19
6665MHz	20
6825MHz	20
6985MHz	19

Beamforming

Mode	Power Setting
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-
5955MHz	11.5
6195MHz	10.5
6415MHz	10.5
6435MHz	10.5
6475MHz	10.5
6515MHz	10.5
6535MHz	11
6695MHz	11.5
6875MHz	9



Mode	Power Setting
6895MHz	9
6995MHz	8
7095MHz	8
7115MHz	7.5
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-
5965MHz	14
6205MHz	13.5
6405MHz	13.5
6445MHz	14
6485MHz	14.5
6525MHz	14
6565MHz	14
6685MHz	14.5
6885MHz	12.5
6925MHz	12
7005MHz	11.5
7085MHz	11.5
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-
5985MHz	16
6225MHz	16.5
6385MHz	17
6465MHz	17.5
6545MHz	16.5
6625MHz	18
6705MHz	17.5
6785MHz	17
6865MHz	15
6945MHz	14
7025MHz	14.5
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-
6025MHz	19
6185MHz	20
6345MHz	19.5
6505MHz	19
6665MHz	20
6825MHz	20
6985MHz	19

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	PoE Mode

The Worst Case Mode for Following Conformance Tests	
Tests Item	Emission Bandwidth Unwanted Emissions Contention Based Protocol Frequency Stability
Test Condition	Conducted measurement at transmit chains

The Worst Case Mode for Following Conformance Tests			
Tests Item	Unwanted Emissions Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Peak Power Spectral Density (E.I.R.P.)		
Test Condition	Radiated measurement If EUT consist of multiple antenna assembly (multiple antenna are used in EUT regardless of spatial multiplexing MIMO configuration), the radiated test should be performed with highest antenna gain of each antenna type.		
Operating Mode < 1GHz	CTX		
1	PoE Mode		
Operating Mode > 1GHz	CTX		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Worst Planes of EUT		V	

The Worst Case Mode for Following Conformance Tests	
Tests Item	Simultaneous Transmission Analysis - Radiated Emission Co-location
Test Condition	Radiated measurement
Operating Mode	CTX
1	WLAN 2.4GHz+WLAN 5GHz+WLAN 6GHz
Refer to Sporton Test Report No.: FA5N2105 for Co-location RF Exposure Evaluation and Appendix G for	



Radiated Emission Co-location.



2.3 Support Equipment

Support Equipment – AC Conduction					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	RJ45 Cable	Power sync	CAT-6E-03	-	-

Support Equipment – Conducted					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	Notebook	DELL	E5410	-	-
2	Adapter for NB	DELL	HA65NM130	-	-
3	Fixture	Sporton	Sporton	-	-
4	PoE	EnGenius	EPA5006GP	-	-

Support Equipment – Radiated					
No.	Equipment	Brand Name	Model Name	FCC ID	Remark
1	RJ45 Cable	Power sync	CAT-6E-03	-	-

2.4 Test Setup Diagram

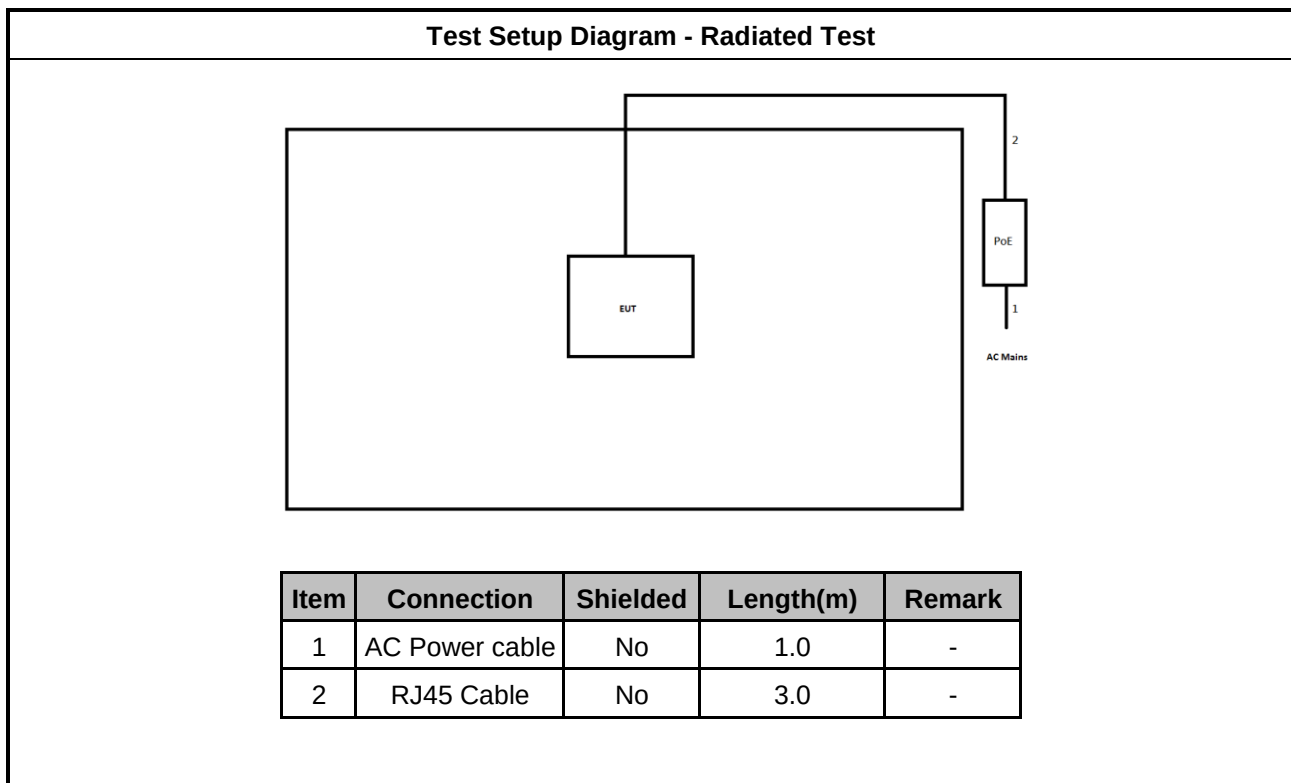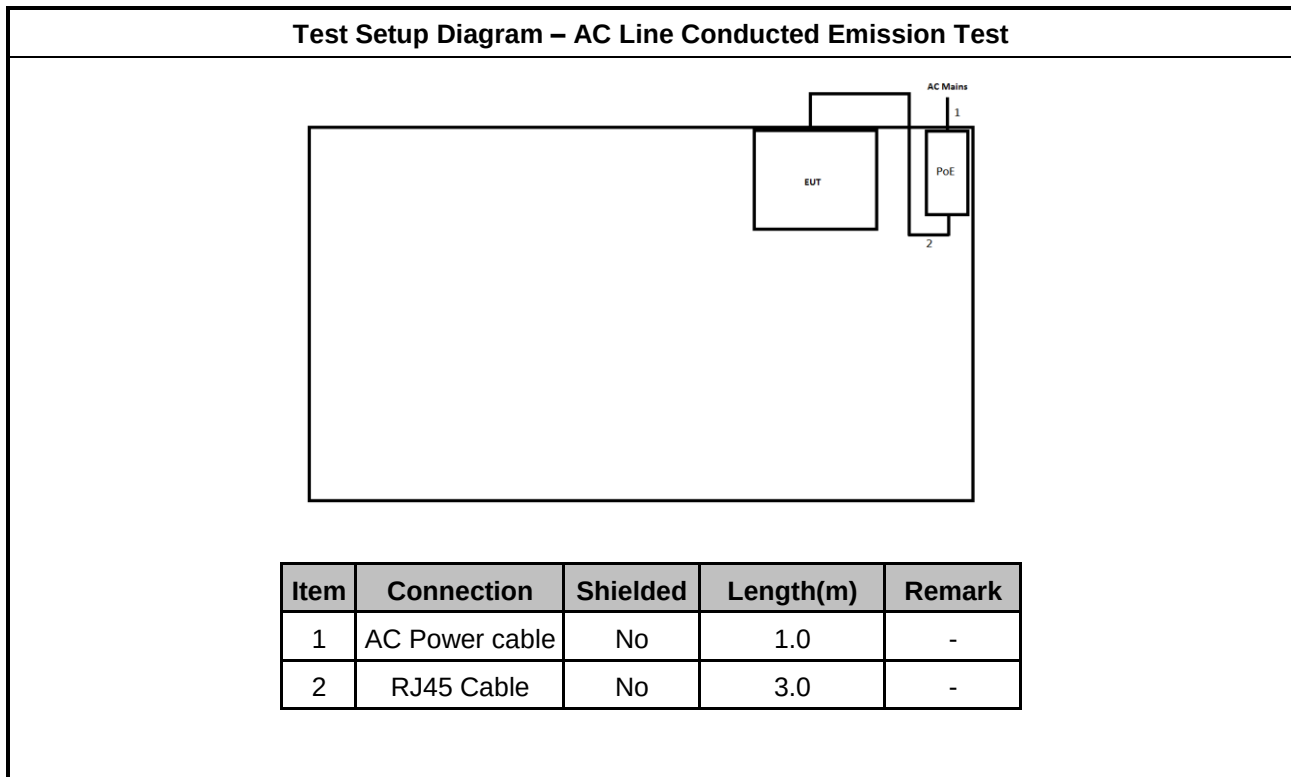



3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50
Note 1: * Decreases with the logarithm of the frequency.		

3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures


Test Method
☒ Refer as ANSI C63.10, clause 6.2 for AC power-line conducted emissions.

3.1.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + LISN(LISN Factor) + CL(Cable Loss) + AT(Attenuator).

3.1.5 Test Setup

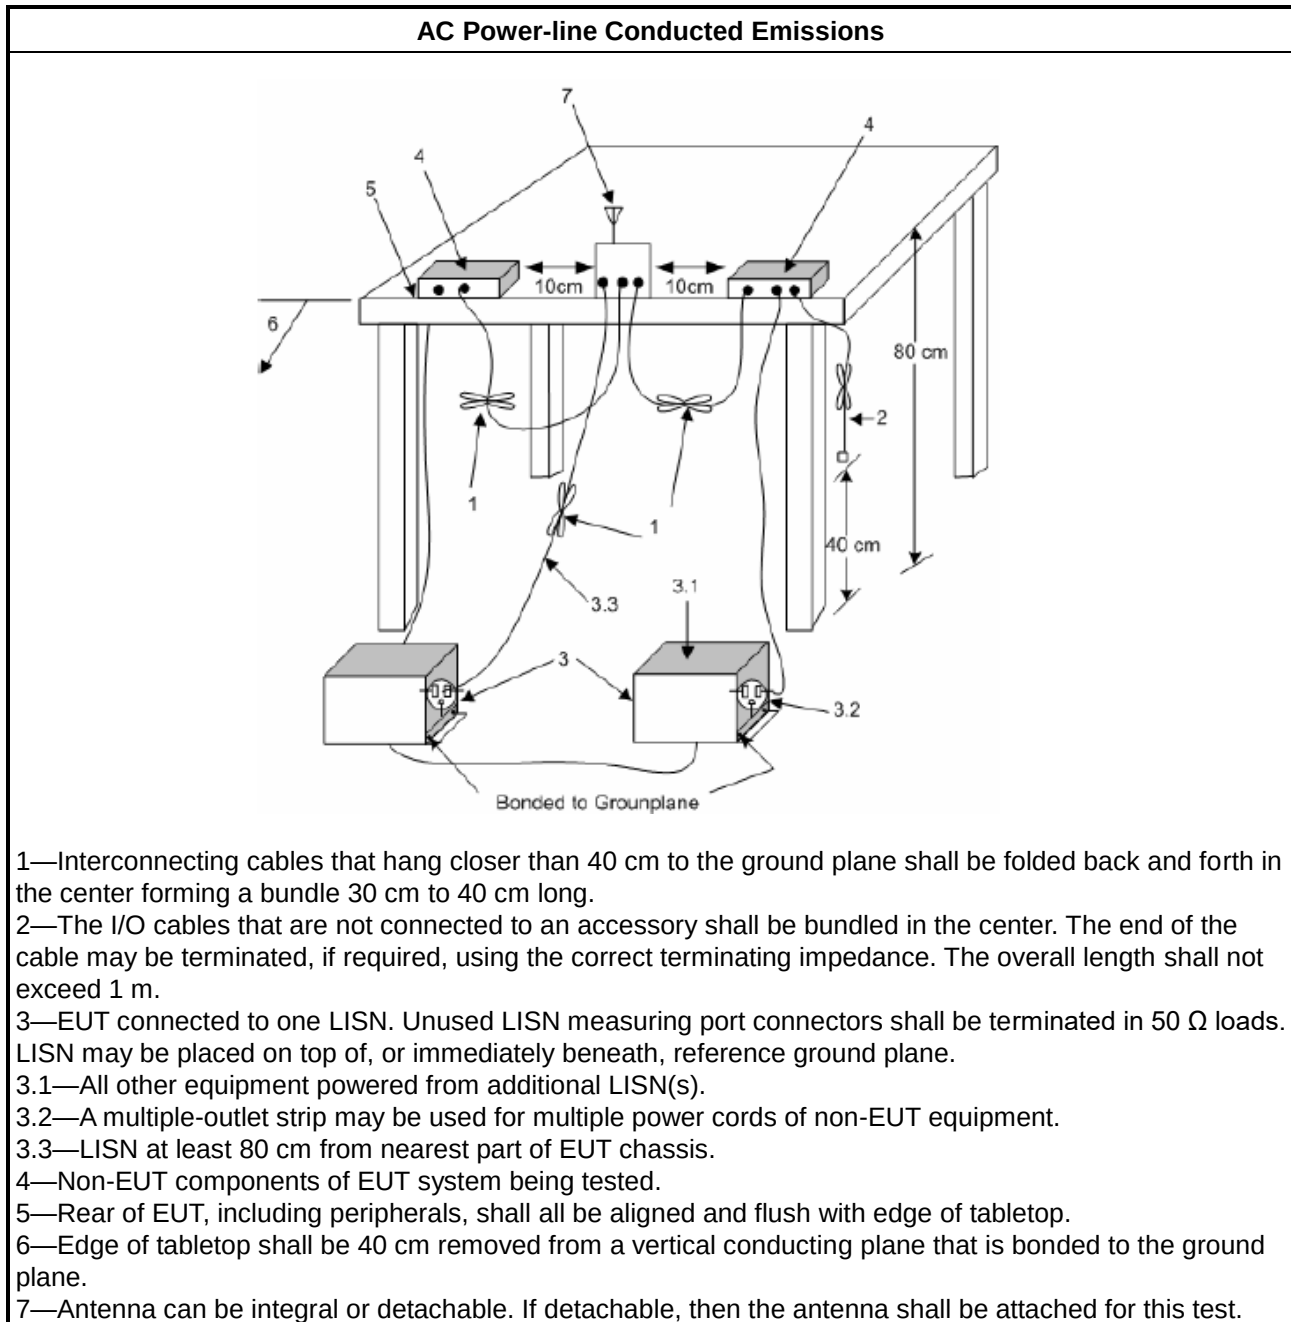

3.1.6 Test Result of AC Power-line Conducted Emissions

Refer as Appendix A

3.2 Emission Bandwidth

3.2.1 Emission Bandwidth Limit

Emission Bandwidth Limit	
UNII Devices	
☒	For the 5925-6425 GHz band, N/A
☒	For the 6425-6525 GHz band, N/A
☒	For the 6525-6875 GHz band, N/A
☒	For the 6875-7125 GHz band, N/A


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.2.3 Test Procedures

Test Method	
For the emission bandwidth shall be measured using one of the options below:	
☒	Refer as FCC KDB 789033, clause C for EBW and clause D for OBW measurement.
☐	Refer as ANSI C63.10, clause 6.9.3 for occupied bandwidth testing.
☐	Refer as IC RSS-Gen, clause 6.7 for bandwidth testing.

3.2.4 Test Setup

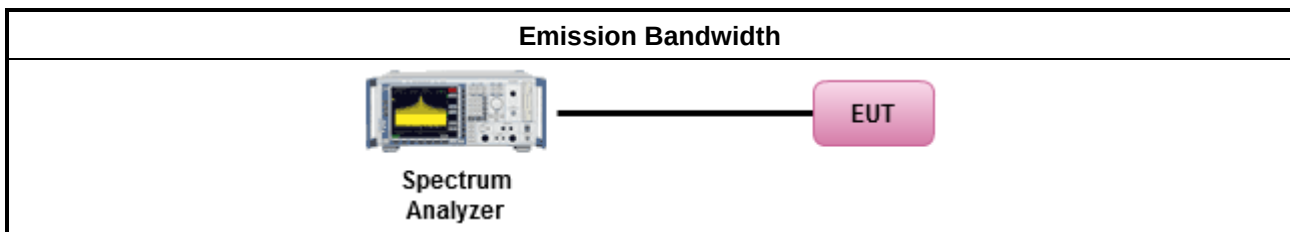

3.2.5 Test Result of Emission Bandwidth

Refer as Appendix B



3.3 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.)

3.3.1 Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit

Maximum Equivalent Isotropically Radiated Power (E.I.R.P.) Limit	
UNII Devices	
☒	For the 5.925 ~ 6.425 GHz band:
☐	For standard power access point and fixed client device : e.i.r.p < 36 dBm , For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
☐	For indoor access point : e.i.r.p < 30 dBm.
☐	For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
☐	For client device control of a standard power access point : e.i.r.p < 30 dBm.
☐	For client device control of an indoor access point : e.i.r.p < 24 dBm.
☐	For very low power device : e.i.r.p < 14 dBm.
☒	For the 6.425 ~ 6.525 GHz band:
☐	For indoor access point : e.i.r.p < 30 dBm.
☐	For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
☐	For client device control of an indoor access point : e.i.r.p < 24 dBm.
☐	For very low power device : e.i.r.p < 14 dBm.
☒	For the 6.525 ~ 6.875 GHz band:
☐	For standard power access point and fixed client device : e.i.r.p < 36 dBm , For outdoor devices, the maximum e.i.r.p. at any elevation angle above 30 degrees not exceed 125 mW (21 dBm).
☐	For indoor access point : e.i.r.p < 30 dBm.
☐	For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
☐	For client device control of a standard power access point : e.i.r.p < 30 dBm.
☐	For client device control of an indoor access point : e.i.r.p < 24 dBm.
☐	For very low power device : e.i.r.p < 14 dBm.
☒	For the 6.875 ~ 7.125 GHz band:
☐	For indoor access point : e.i.r.p < 30 dBm.
☐	For subordinate device control of an indoor access point : e.i.r.p < 30 dBm.
☐	For client device control of an indoor access point : e.i.r.p < 24 dBm.
☐	For very low power device : e.i.r.p < 14 dBm.




3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method	
▪ Maximum Output Power Setting	
	Duty cycle $\geq 98\%$
☒	Refer as FCC KDB 789033, clause E Method SA-2 (spectral trace averaging).
	Duty cycle $< 98\%$
☐	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
	Wideband RF power meter and average over on/off periods with duty factor
☐	Refer as FCC KDB 789033, clause E Method PM-G (using an RF average power meter).
☐ For conducted measurement.	
	▪ If the EUT supports multiple transmit chains using options given below: Refer as FCC KDB 662911, In-band power measurements. Using the measure-and-sum approach, measured all transmit ports individually. Sum the power (in linear power units e.g., mW) of all ports for each individual sample and save them.
	▪ If multiple transmit chains, EIRP calculation could be following as methods: $P_{\text{total}} = P_1 + P_2 + \dots + P_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $\text{EIRP}_{\text{total}} = P_{\text{total}} + \text{DG}$
☒ For radiated measurement.	
	▪ Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
	▪ Refer as FCC KDB 789033, clause II A.1.F "Antenna-port Conducted versus Radiated Testing"
	▪ Refer as KDB 412172, clause 2.2 for EIRP calculation.

3.3.4 Test Setup

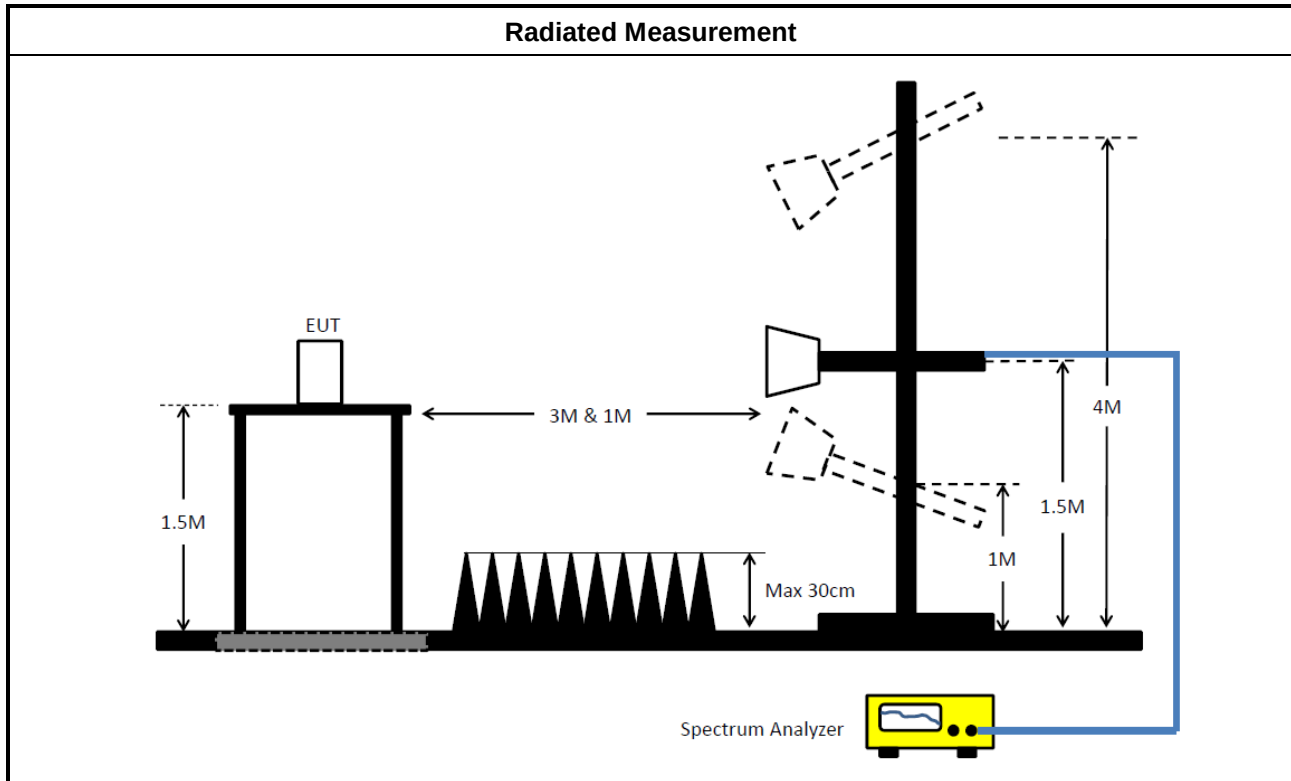

3.3.5 Test Result of Maximum Equivalent Isotropically Radiated Power (E.I.R.P)

Refer as Appendix C



3.4 Peak Power Spectral Density (E.I.R.P.)

3.4.1 Peak Power Spectral Density (E.I.R.P.) Limit

Peak Power Spectral Density (E.I.R.P.) Limit	
UNII Devices	
☒	For the 5.925 ~ 6.425 GHz band:
☐	For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
☐	For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
☐	For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
☐	For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
☐	For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
☐	For very low power device : e.i.r.p < -5 dBm.
☒	For the 6.425 ~ 6.525 GHz band:
☐	For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
☐	For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
☐	For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
☐	For very low power device : e.i.r.p < -5 dBm.
☒	For the 6.525 ~ 6.875 GHz band:
☐	For standard power access point and fixed client device : e.i.r.p PSD < 23 dBm/MHz.
☐	For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
☐	For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
☐	For client device control of a standard power access point : e.i.r.p PSD < 17 dBm/MHz.
☐	For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
☐	For very low power device : e.i.r.p < -5 dBm.
☒	For the 6.875 ~ 7.125 GHz band:
☐	For indoor access point : e.i.r.p PSD < 5 dBm/MHz.
☐	For subordinate device control of an indoor access point : e.i.r.p PSD < 5 dBm/MHz.
☐	For client device control of an indoor access point : e.i.r.p PSD < -1 dBm/MHz.
☐	For very low power device : e.i.r.p < -5 dBm.


3.4.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

**3.4.3 Test Procedures**

Test Method	
Peak power spectral density procedures that the same method as used to determine the conducted output power shall be used to determine the peak power spectral density and use the peak search function on the spectrum analyzer to find the peak of the spectrum. For the peak power spectral density shall be measured using below options:	
☐	Refer as FCC KDB 789033, F)5) power spectral density can be measured using resolution bandwidths < 1 MHz provided that the results are integrated over 1 MHz bandwidth
☒	Refer as FCC KDB 789033, clause E Method SA-2. (spectral trace averaging)
☐	Refer as FCC KDB 789033, clause E Method SA-2 Alt. (RMS detection with slow sweep speed)
☐ For conducted measurement.	
If the EUT supports multiple transmit chains using options given below:	
☐	Option 1: Measure and sum the spectra across the outputs. Refer as FCC KDB 662911, In-band power spectral density (PSD). Sample all transmit ports simultaneously using a spectrum analyzer for each transmit port. Where the trace bin-by-bin of each transmit port summing can be performed. (i.e., in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3, and so on up to the NTX output to obtain the value for the first frequency bin of the summed spectrum.). Add up the amplitude (power) values for the different transmit chains and use this as the new data trace.
☐	Option 2: Measure and sum spectral maxima across the outputs. With this technique, spectra are measured at each output of the device at the required resolution bandwidth. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs. These operations shall be performed separately over frequency spans that have different out-of-band or spurious emission limits,
☐	Option 3: Measure and add 10 log(N) dB, where N is the number of transmit chains. Refer as FCC KDB 662911, In-band power spectral density (PSD). Performed at each transmit chains and each transmit chains shall be compared with the limit have been reduced with 10 log(N). Or each transmit chains shall be add 10 log(N) to compared with the limit.
If multiple transmit chains, EIRP PPSD calculation could be following as methods: $PPSD_{total} = PPSD_1 + PPSD_2 + \dots + PPSD_n$ (calculated in linear unit [mW] and transfer to log unit [dBm]) $EIRP_{total} = PPSD_{total} + DG$	
☒ For radiated measurement.	
Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.	
Refer as KDB 789033, clause II A.1.F "Antenna-port Conducted versus Radiated Testing"	
Refer as KDB 412172, clause 2.2 for EIRP calculation.	

3.4.4 Test Setup

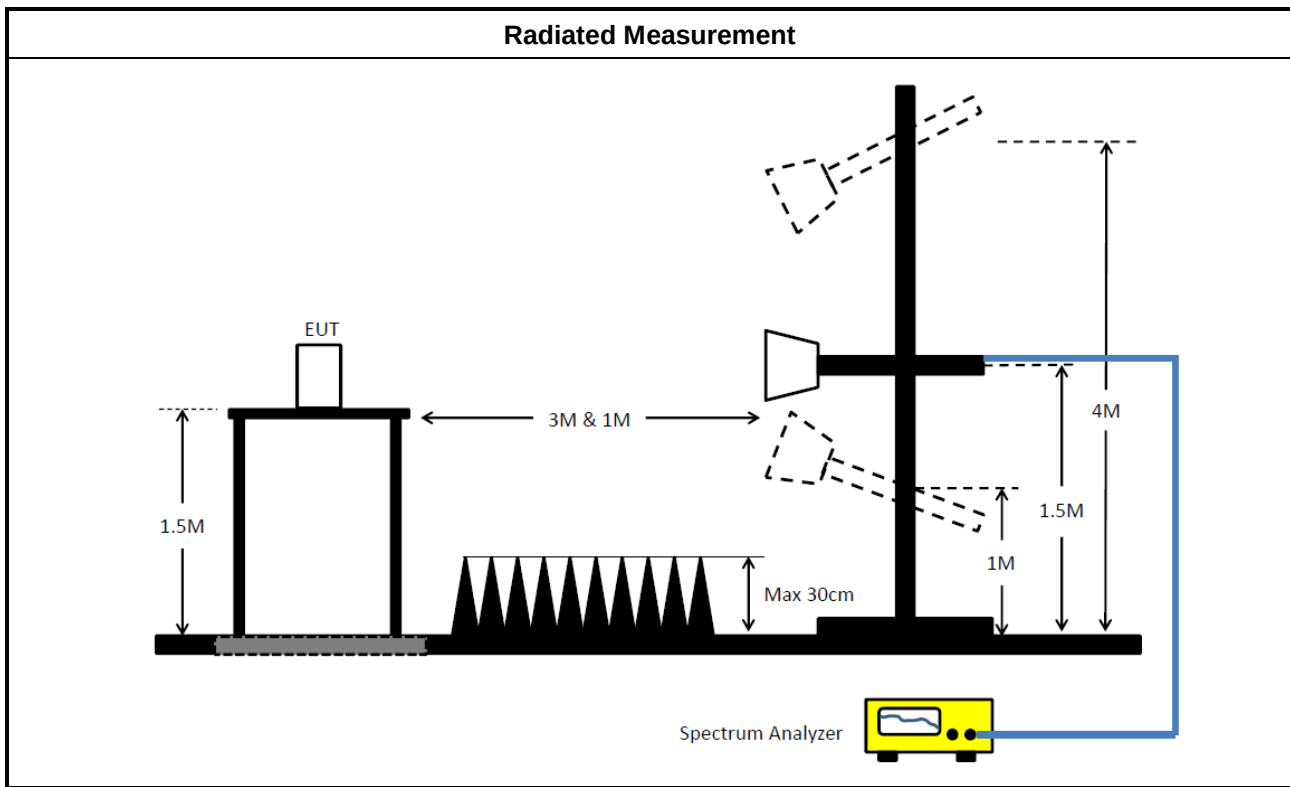

3.4.5 Test Result of Peak Power Spectral Density (E.I.R.P.)

Refer as Appendix D



3.5 Unwanted Emissions

3.5.1 Transmitter Unwanted Emissions Limit

Unwanted emissions below 1 GHz and restricted band emissions above 1GHz limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3


Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Note 3: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$).
EX. Above 18GHz emission limit calculation (3m to 1m) = 54dBuV/m at 3m + 9.54dB = 63.54 dBuV/m at 1m.

Un-restricted band emissions above 1GHz Limit	
Frequency	Limit
Any outside the 5.945 – 7.125 GHz emission	e.i.r.p. -27 dBm [68.2 dBuV/m@3m] Note 1: Using the distance of 1m during the test for above 18 GHz, and the test value to correct for the distance factor at 3m($20 \times \log(\text{standard distance}/\text{test distance}) = 20\log(3/1) = 9.54\text{dB}$). EX. Above 18GHz emission limit calculation (3m to 1m) = 68.2dBuV/m at 3m + 9.54dB = 77.74 dBuV/m at 1m.
Frequency	Emission MASK Limit
5.945 – 7.125 GHz	Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the

limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB. The channel bandwidth is defined as 26 dB EBW.

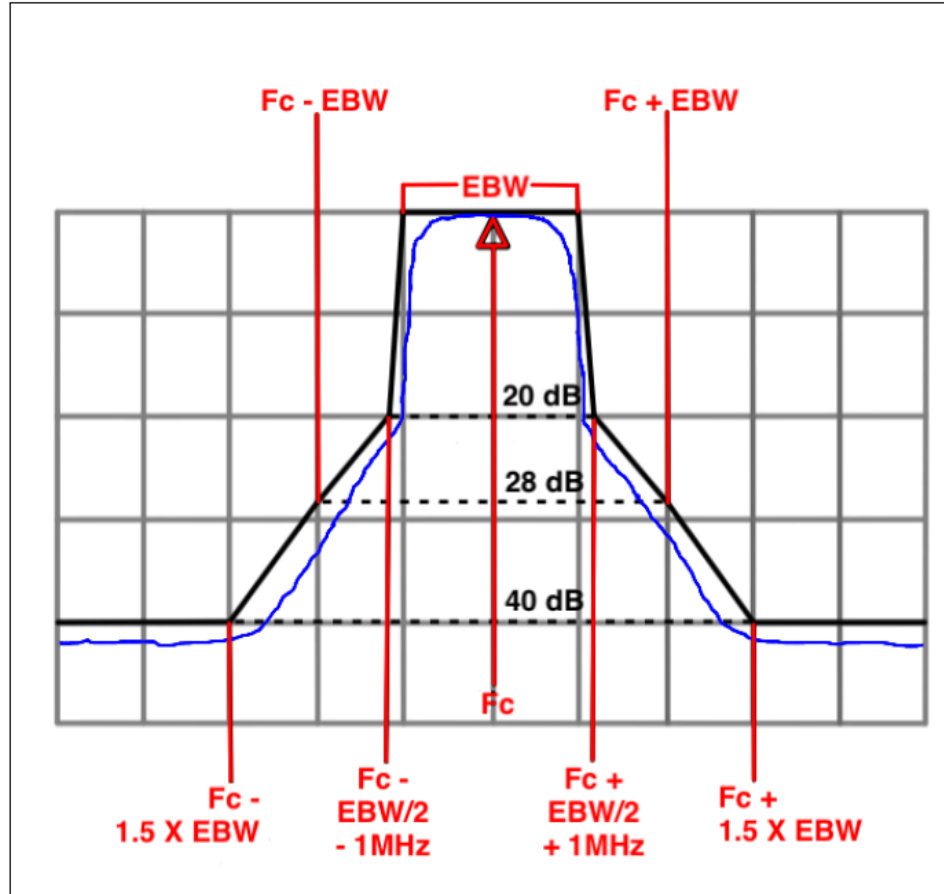



3.5.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures

Test Method	
Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 m for frequencies above 30 MHz, unless it can be further demonstrated that measurements at a distance of 30 m or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).	
The average emission levels shall be measured in [duty cycle $\geq$ 98 or duty factor].	
For the transmitter unwanted emissions shall be measured using following options below:	
	Refer as FCC KDB 789033, clause G)2) for unwanted emissions into non-restricted bands.
	Refer as FCC KDB 789033, clause G)1) for unwanted emissions into restricted bands.
	☒ Refer as FCC KDB 789033, G)6) Method AD (Trace Averaging). (For unrestricted band measurement)
	☐ Refer as FCC KDB 789033, G)6) Method VB (Reduced VBW).
	☒ Refer as ANSI C63.10, clause 11.12.2.5.2.3 (Reduced VBW). VBW $\geq$ 1/T, where T is pulse time.(For restricted band average measurement)
	☐ Refer as ANSI C63.10, clause 7.5 average value of pulsed emissions.
	☒ Refer as FCC KDB 789033, clause G)5) measurement procedure peak limit.
	☐ Refer as ANSI C63.10, clause 4.1.5.2.2 measurement procedure peak limit.
	☒ Refer as FCC KDB 789033, clause G)3)d)ii) for Band edge Integration measurements.
For emission MASK shall be measured using following options below:	
	☒ Refer as KDB 987594 D02, J) In-Band Emissions
For radiated measurement.	
	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1GHz.
The any unwanted emissions level shall not exceed the fundamental emission level.	
All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.	


Use the following spectrum analyzer settings:	
	Set RBW=100 kHz for $f < 1$ GHz; VBW=3 * RBW; Sweep = auto; Detector function = peak; Trace = max hold.
	Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement. For average measurement, refer as 1.1.4.
KDB 414788 Open-Field Test Sites and Chamber Correlation Justification.	
	Based on FCC 15.31 (f) (2): measurements may be performed at a distance closer than that specified in regulations; however, an attempt should be made to avoid making measurements in the near field.
	Open-field site and chamber correlation testing had been performed and chamber measured test result is the worst case test result.


3.5.4 Measurement Results Calculation

The measured Level is calculated using:

Corrected Reading: Raw(Read Level) + AF(Antenna Factor) + CL(Cable Loss) - PA(Preamp Factor)

3.5.5 Test Setup

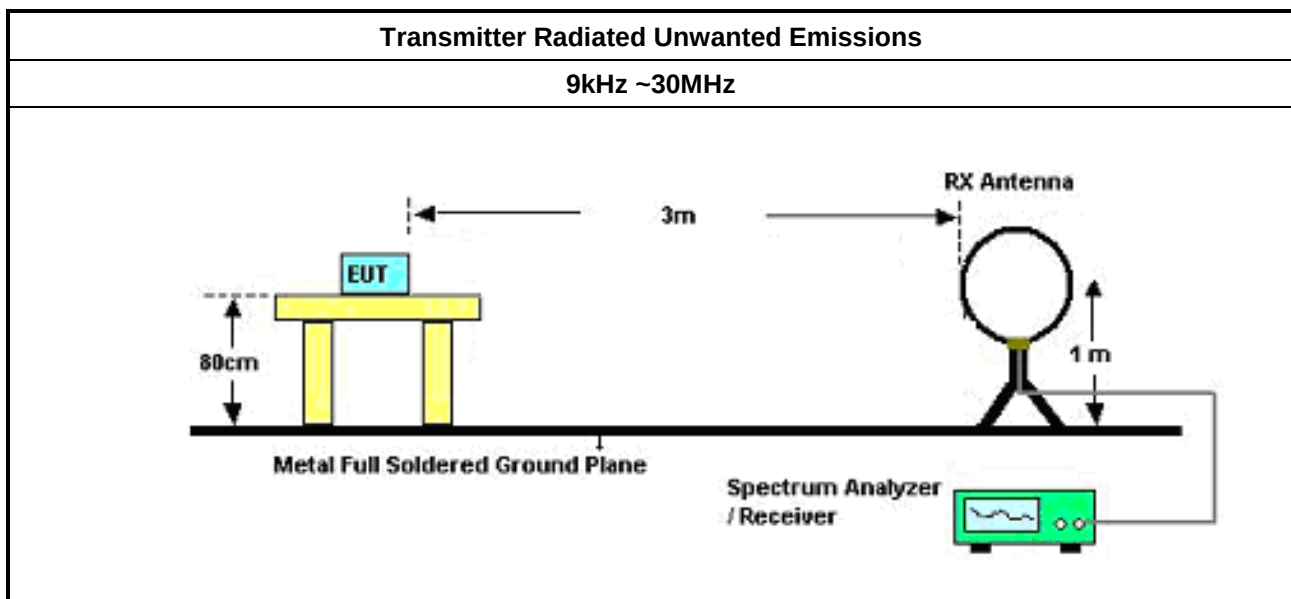

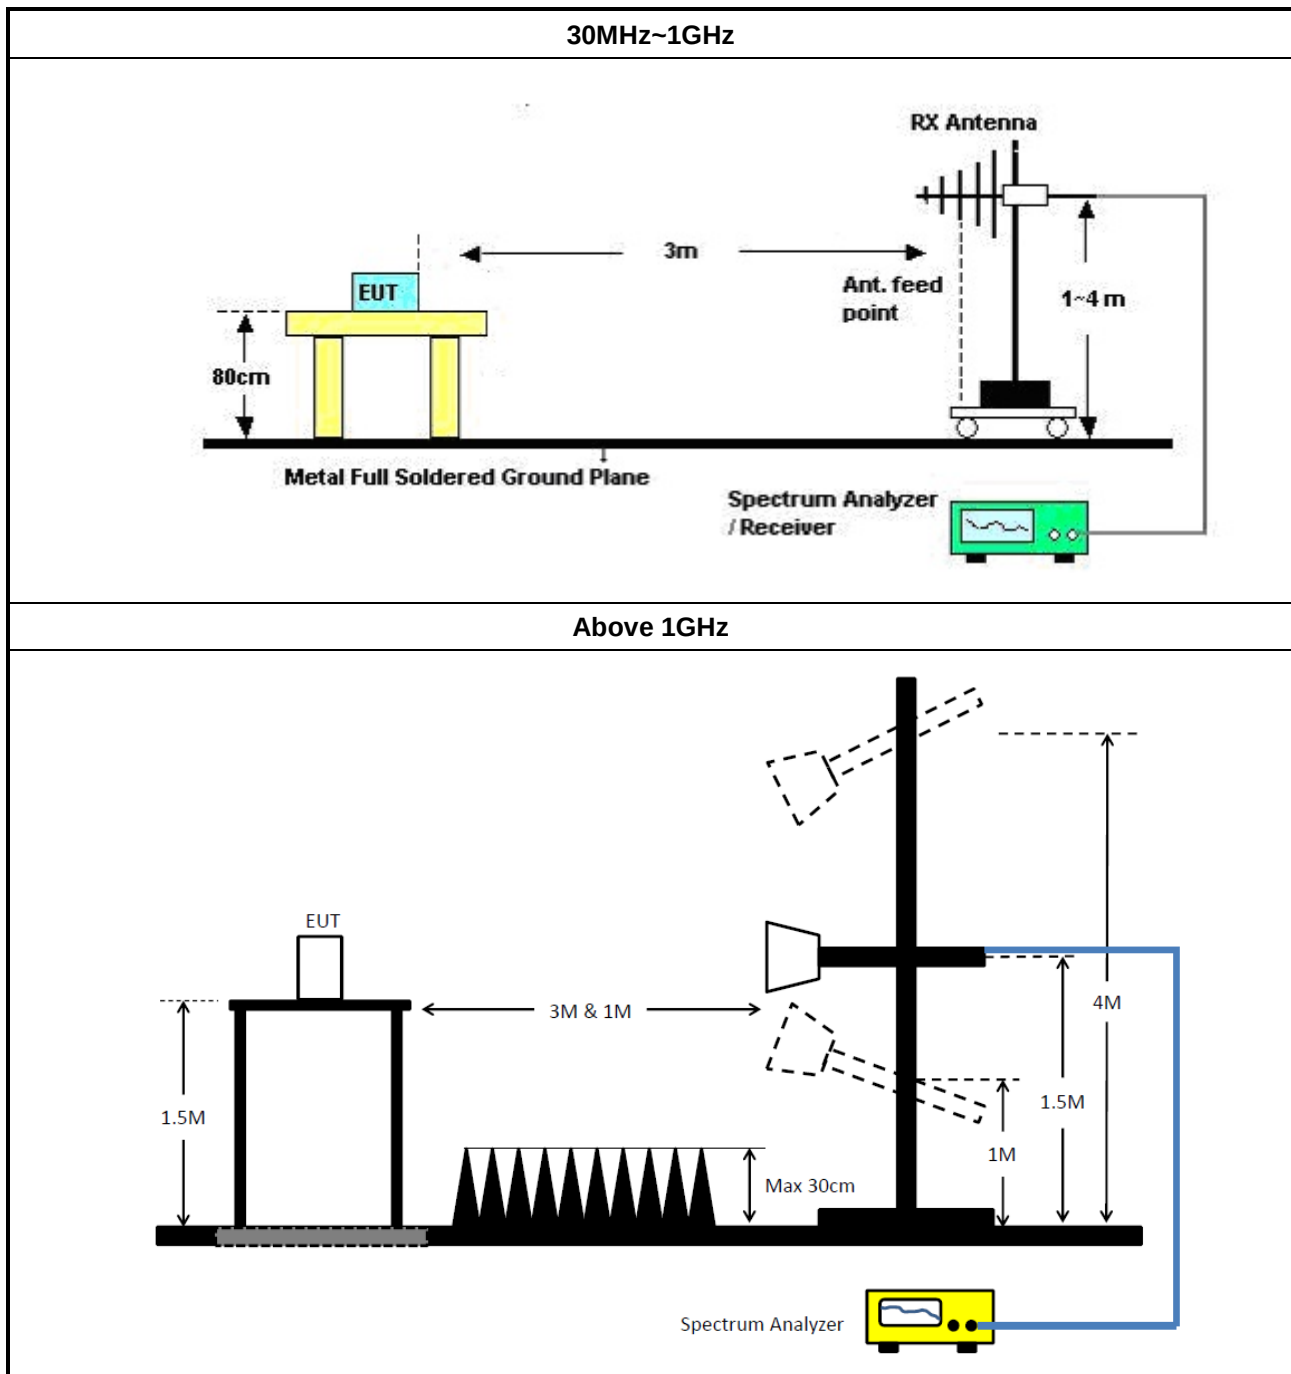

3.5.6 Transmitter Unwanted Emissions (Below 30MHz)

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.5.7 Test Result of Transmitter Unwanted Emissions

Refer as Appendix E

3.6 Contention Based Protocol

3.6.1 Contention Based Protocol Limit

EUT can detect an AWGN signal with 90% (or better) level of certainty.


3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures

Test Method	
■	For Contention Based Protocol shall be measured using following options below:
☒	Refer as KDB 987594 D02, I) Contention Based Protocol.

3.6.4 Test Setup

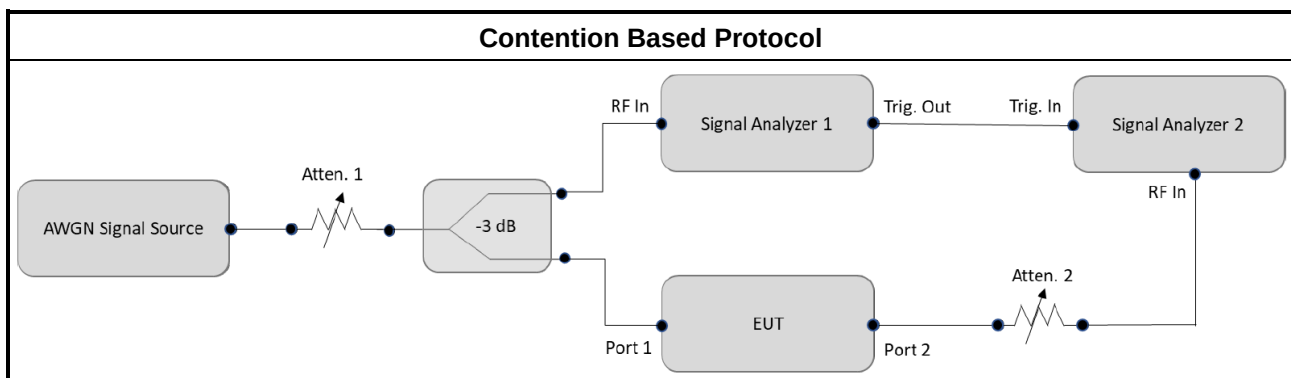

3.6.5 Test Result of Contention Based Protocol

Refer as Appendix F



4 Test Equipment and Calibration Data

Instrument for AC Conduction

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
EMI Test Receiver	ROHDE & SCHWARZ	ESR3	102051	9kHz ~ 3.6GHz	21/May/2025	20/May/2026
Two-Line V-Network	ROHDE & SCHWARZ	ENV 216	101578	9kHz ~ 30MHz	24/Aug/2025	23/Aug/2026
RF Cable 5m	TITAN	TITAN	CO04-cable-01	9 kHz~200MHz	25/Feb/2026	24/Feb/2027
Pulse Limiter	SCHWARZBECK	VTSD 9561F-N	1056	9kHz ~ 30MHz	25/Jun/2025	24/Jun/2026
Software	Sporton	SENSE-EMI	V5.11.6	-	NCR	NCR

NCR: No Calibration Required

Instrument for Conducted Test

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Signal Analyzer	R&S	FSV 40	101029	10Hz~40GHz	30/Oct/2025	29/Oct/2026
SMB100A Signal Generator	R&S	SMB100A	181147	100kHz~40GHz	29/Oct/2025	28/Oct/2026
Power Meter	Anritsu	ML2495A	1124009	300MHz~40GHz	28/Mar/2025	27/Mar/2026
Pulse Sensor	Anritsu	MA2411B	1027452	300MHz~40GHz	28/Mar/2025	27/Mar/2026
SENSE-15407_NII	Sporton	V5.11.29	N/A	N/A	N/A	N/A

Instrument for Radiated Test

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH24-HY	30MHz~1GHz 3m	15/Aug/2025	14/Aug/2026
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH24-HY	1GHz~18GHz 3m	29/Jul/2025	28/Jul/2026
EMI Test Receiver	ROHDE & SCHWARZ	ESR	102052	9kHz~3.6GHz	14/May/2025	13/May/2026
Signal Analyzer	ROHDE&SCHWARZ	FSV40	101013	10Hz~44GHz	22/Apr/2025	21/Apr/2026
Loop Antenna	TESEQ	HLA 6120	31244	9kHz~30MHz	20/Mar/2025	19/Mar/2026
Bilog Antenna & 6dB Attenuator	TESEQ / Woken	CBL 6112D / 00800N1D01N-06	35376 / 02	30MHz~1GHz	13/Apr/2025	12/Apr/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02744	1GHz~18GHz	07/Aug/2025	06/Aug/2026
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	07/Oct/2025	06/Oct/2026
RF Cable	HUBER+SUHNER	SUOFLEX 104	03CH24-cable-01	9kHz~40GHz	02/Oct/2025	01/Oct/2026
Pre-Amplifier	Aglient	8447D	2944A06292	30MHz~1GHz	08/Apr/2025	07/Apr/2026
Amplifier	EM	EM01G18G	060870	1GHz ~18GHz	08/Aug/2025	07/Aug/2026
Amplifier	EM	EM18G40GA	060874	18GHz ~40GHz	18/Apr/2025	17/Apr/2026
SENSE-15407-NII	Sporton	V5.11.27	NA	NA	NA	NA

**Instrument for Radiated Test Co-location**

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
3m Semi Anechoic Chamber	TDK	SAC-3M	03CH24-HY	1GHz~18GHz 3m	29/Jul/2025	28/Jul/2026
Signal Analyzer	ROHDE&SCHWARZ	FSV40	101013	10Hz~44GHz	22/Apr/2025	21/Apr/2026
Double Ridged Guide Horn Antenna	SCHWARZBECK	BBHA 9120 D	02744	1GHz~18GHz	07/Aug/2025	06/Aug/2026
Broadband Horn Antenna	SCHWARZBECK	BBHA 9170	01248	18GHz~40GHz	07/Oct/2025	06/Oct/2026
RF Cable	HUBER+SUHNER	SUOFLEX 104	03CH24-cable-01	9kHz~40GHz	02/Oct/2025	01/Oct/2026
Amplifier	EM	EM01G18G	060870	1GHz ~18GHz	08/Aug/2025	07/Aug/2026
Amplifier	EM	EM18G40GA	060874	18GHz ~40GHz	18/Apr/2025	17/Apr/2026
SENSE-EMI	Sporton	V5.11.10	NA	NA	NA	NA

Instrument for Contention-Based Protocol Test

Instrument	Manufacturer /Brand	Model No.	Serial No.	Spec.	Calibration Date	Calibration Due Date
Spectrum Analyzer	R&S	FSP40	100593	9 kHz ~ 40 GHz	26/Mar/2025	25/Mar/2026
Vector Signal Generator	R&S	SMW200A	111529	100kHz~7.5GHz	20/Mar/2025	19/Mar/2026
DFS-Adaptivity	Sporton	Ver 2.10	N/A	N/A	N/A	N/A
Adaptivity Analysis-5G	Sporton	Ver 2.10	N/A	N/A	N/A	N/A




Summary

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	AV	562.28k	38.85	46.00	-7.15	Line


Result

Mode	Result	Type	Freq (Hz)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Condition
Mode 1	Pass	QP	153.02k	47.03	65.83	-18.80	Line
Mode 1	Pass	AV	153.02k	34.90	55.83	-20.93	Line
Mode 1	Pass	QP	267.6k	36.75	61.20	-24.45	Line
Mode 1	Pass	AV	267.6k	30.33	51.20	-20.87	Line
Mode 1	Pass	QP	562.28k	44.18	56.00	-11.82	Line
Mode 1	Pass	AV	562.28k	38.85	46.00	-7.15	Line
Mode 1	Pass	QP	601.76k	39.94	56.00	-16.06	Line
Mode 1	Pass	AV	601.76k	35.02	46.00	-10.98	Line
Mode 1	Pass	QP	3.03M	35.06	56.00	-20.94	Line
Mode 1	Pass	AV	3.03M	30.31	46.00	-15.69	Line
Mode 1	Pass	QP	14.04M	39.98	60.00	-20.02	Line
Mode 1	Pass	AV	14.04M	34.97	50.00	-15.03	Line
Mode 1	Pass	QP	151.2k	47.55	65.92	-18.37	Neutral
Mode 1	Pass	AV	151.2k	34.35	55.92	-21.57	Neutral
Mode 1	Pass	QP	250.04k	36.29	61.76	-25.47	Neutral
Mode 1	Pass	AV	250.04k	28.25	51.76	-23.51	Neutral
Mode 1	Pass	QP	560.04k	44.02	56.00	-11.98	Neutral
Mode 1	Pass	AV	560.04k	38.72	46.00	-7.28	Neutral
Mode 1	Pass	QP	613.89k	38.00	56.00	-18.00	Neutral
Mode 1	Pass	AV	613.89k	33.34	46.00	-12.66	Neutral
Mode 1	Pass	QP	3.42M	28.65	56.00	-27.35	Neutral
Mode 1	Pass	AV	3.42M	23.95	46.00	-22.05	Neutral
Mode 1	Pass	QP	19.87M	38.54	60.00	-21.46	Neutral
Mode 1	Pass	AV	19.87M	36.71	50.00	-13.29	Neutral

Conducted Emissions at Powerline_Mode 1

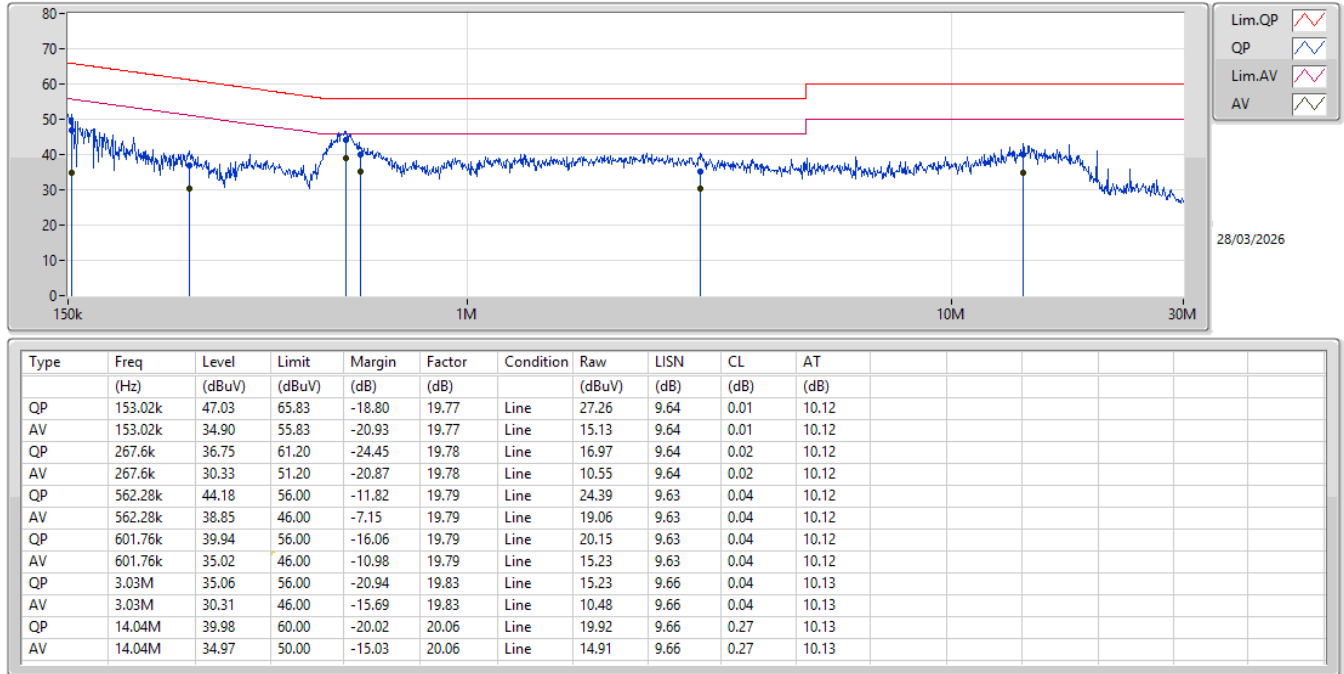

Conducted Emissions at Powerline_Mode 1

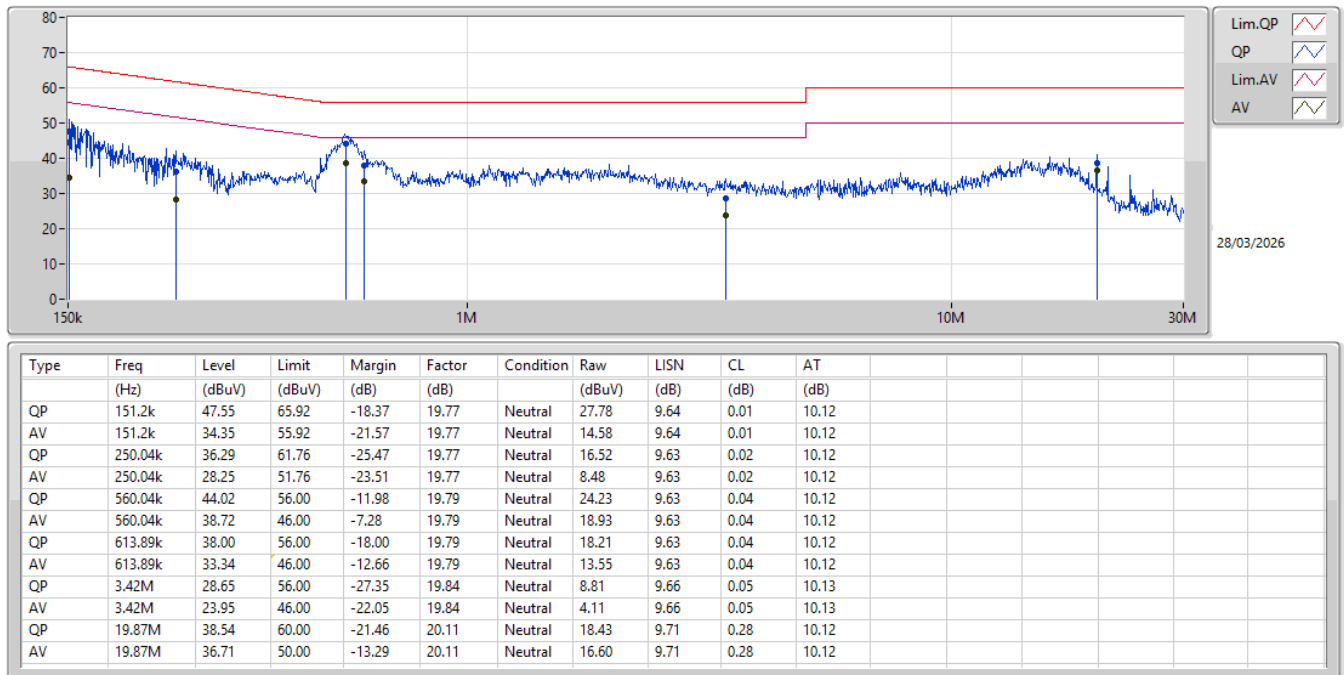

Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	22M	16.987M	17M0D1D	20.845M	16.767M
802.11be EHT20_Nss1,(MCS0)_2TX	22.825M	19.075M	19M1D1D	20.68M	18.801M
802.11be EHT40_Nss1,(MCS0)_2TX	44.44M	38.371M	38M4D1D	42.9M	38.041M
802.11be EHT80_Nss1,(MCS0)_2TX	86.24M	78.061M	78M1D1D	82.06M	77.401M
802.11be EHT160_Nss1,(MCS0)_2TX	176.44M	157.881M	158MD1D	170.28M	157.001M
6.425-6.525GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	22.55M	16.932M	16M9D1D	20.845M	16.767M
802.11be EHT20_Nss1,(MCS0)_2TX	22.935M	19.13M	19M1D1D	20.845M	18.966M
802.11be EHT40_Nss1,(MCS0)_2TX	44.55M	38.261M	38M3D1D	42.46M	38.041M
802.11be EHT80_Nss1,(MCS0)_2TX	86.68M	77.621M	77M6D1D	81.84M	77.181M
802.11be EHT160_Nss1,(MCS0)_2TX	173.36M	157.001M	157MD1D	169.84M	156.562M
6.525-6.875GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	22.825M	16.987M	17M0D1D	21.01M	16.767M
802.11be EHT20_Nss1,(MCS0)_2TX	22.99M	19.185M	19M2D1D	21.065M	18.856M
802.11be EHT40_Nss1,(MCS0)_2TX	44.33M	38.481M	38M5D1D	42.79M	37.931M
802.11be EHT80_Nss1,(MCS0)_2TX	87.56M	78.061M	78M1D1D	83.16M	77.181M
802.11be EHT160_Nss1,(MCS0)_2TX	174.24M	157.881M	158MD1D	171.16M	156.562M
6.875-7.125GHz	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	22.275M	16.987M	17M0D1D	21.065M	16.657M
802.11be EHT20_Nss1,(MCS0)_2TX	22M	19.02M	19M0D1D	20.46M	18.691M
802.11be EHT40_Nss1,(MCS0)_2TX	45.98M	38.591M	38M6D1D	43.56M	38.371M
802.11be EHT80_Nss1,(MCS0)_2TX	86.9M	78.281M	78M3D1D	82.5M	77.841M
802.11be EHT160_Nss1,(MCS0)_2TX	173.8M	157.441M	157MD1D	171.6M	157.001M

Max-N dB = Maximum 26dB down bandwidth for other band;
 Max-OBW = Maximum 99% occupied bandwidth;
 Min-N dB = Maximum 26dB down bandwidth for other band;
 Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-
5955MHz	Pass	320M	21.67M	16.987M	21.89M	16.932M
6195MHz	Pass	320M	21.89M	16.767M	21.67M	16.987M
6415MHz	Pass	320M	22M	16.767M	20.845M	16.767M
6435MHz	Pass	320M	21.89M	16.932M	21.78M	16.767M
6475MHz	Pass	320M	21.395M	16.932M	21.12M	16.822M
6515MHz	Pass	320M	22.55M	16.932M	20.845M	16.822M
6535MHz	Pass	320M	22.825M	16.987M	21.01M	16.767M
6695MHz	Pass	320M	22.11M	16.877M	22.055M	16.932M
6875MHz	Pass	320M	22M	16.877M	21.175M	16.877M
6895MHz	Pass	320M	22M	16.932M	21.065M	16.767M
6995MHz	Pass	320M	21.78M	16.767M	21.12M	16.657M
7095MHz	Pass	320M	22.275M	16.932M	21.285M	16.767M
7115MHz	Pass	320M	21.835M	16.987M	21.395M	16.877M
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5955MHz	Pass	320M	22.825M	19.075M	22M	19.02M
6195MHz	Pass	320M	21.34M	18.801M	20.68M	18.911M
6415MHz	Pass	320M	21.505M	18.966M	22.275M	19.02M
6435MHz	Pass	320M	20.845M	18.966M	21.56M	18.966M
6475MHz	Pass	320M	22.66M	19.13M	21.615M	19.02M
6515MHz	Pass	320M	21.78M	19.13M	22.935M	19.075M
6535MHz	Pass	320M	22.99M	19.185M	22.385M	19.13M
6695MHz	Pass	320M	22.22M	19.185M	21.835M	19.185M
6875MHz	Pass	320M	21.065M	18.856M	21.45M	19.02M
6895MHz	Pass	320M	21.23M	18.801M	22M	19.02M
6995MHz	Pass	320M	20.46M	18.691M	21.285M	18.856M
7095MHz	Pass	320M	21.12M	18.911M	20.735M	18.801M
7115MHz	Pass	320M	21.725M	18.966M	21.23M	18.856M
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5965MHz	Pass	320M	43.01M	38.041M	43.56M	38.261M
6205MHz	Pass	320M	44.44M	38.371M	42.9M	38.371M
6405MHz	Pass	320M	42.9M	38.261M	44M	38.261M
6445MHz	Pass	320M	42.68M	38.151M	42.46M	38.261M
6485MHz	Pass	320M	44.22M	38.151M	44.11M	38.261M
6525MHz	Pass	320M	42.68M	38.041M	44.55M	38.151M
6565MHz	Pass	320M	42.79M	37.931M	43.34M	38.151M
6685MHz	Pass	320M	43.45M	37.931M	44.33M	38.151M
6885MHz	Pass	320M	42.79M	38.261M	44.33M	38.481M
6925MHz	Pass	320M	43.89M	38.591M	43.67M	38.371M
7005MHz	Pass	320M	45.98M	38.591M	44.88M	38.481M
7085MHz	Pass	320M	43.56M	38.591M	43.89M	38.591M
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5985MHz	Pass	320M	86.24M	77.401M	83.6M	77.621M
6225MHz	Pass	320M	83.82M	77.621M	83.16M	78.061M
6385MHz	Pass	320M	82.06M	77.841M	85.58M	77.841M
6465MHz	Pass	320M	86.68M	77.621M	81.84M	77.621M
6545MHz	Pass	320M	85.36M	77.181M	84.7M	77.621M
6625MHz	Pass	320M	83.16M	77.181M	85.8M	77.181M
6705MHz	Pass	320M	86.24M	77.401M	85.36M	77.401M
6785MHz	Pass	320M	84.26M	77.621M	85.58M	77.621M
6865MHz	Pass	320M	87.56M	78.061M	86.02M	77.841M
6945MHz	Pass	320M	86.9M	78.061M	82.5M	77.841M
7025MHz	Pass	320M	85.8M	78.281M	84.7M	78.061M
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6025MHz	Pass	320M	170.28M	157.001M	174.24M	157.881M



Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
6185MHz	Pass	320M	170.72M	157.441M	176.44M	157.881M
6345MHz	Pass	320M	172.92M	157.441M	173.36M	157.881M
6505MHz	Pass	320M	173.36M	156.562M	169.84M	157.001M
6665MHz	Pass	320M	173.8M	157.001M	174.24M	156.562M
6825MHz	Pass	320M	171.16M	157.441M	174.24M	157.881M
6985MHz	Pass	320M	171.6M	157.001M	173.8M	157.441M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

6415MHz

06/02/2026

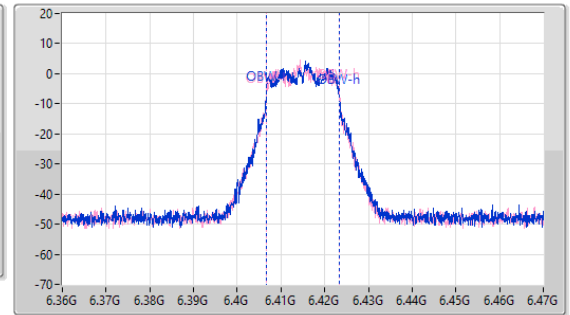
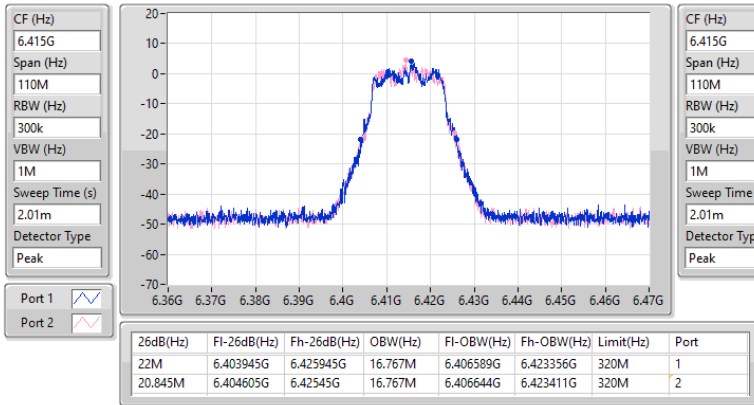


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

5955MHz

06/02/2026

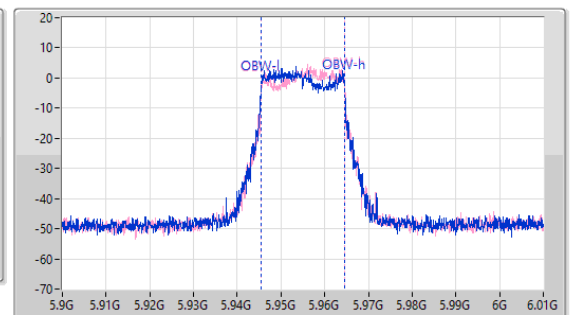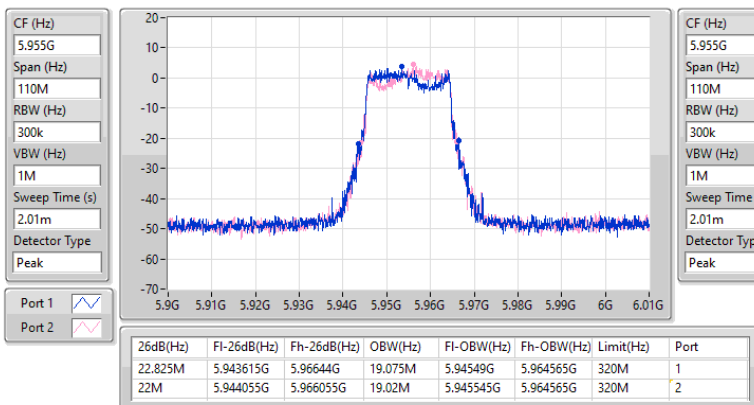


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

6205MHz

06/02/2026

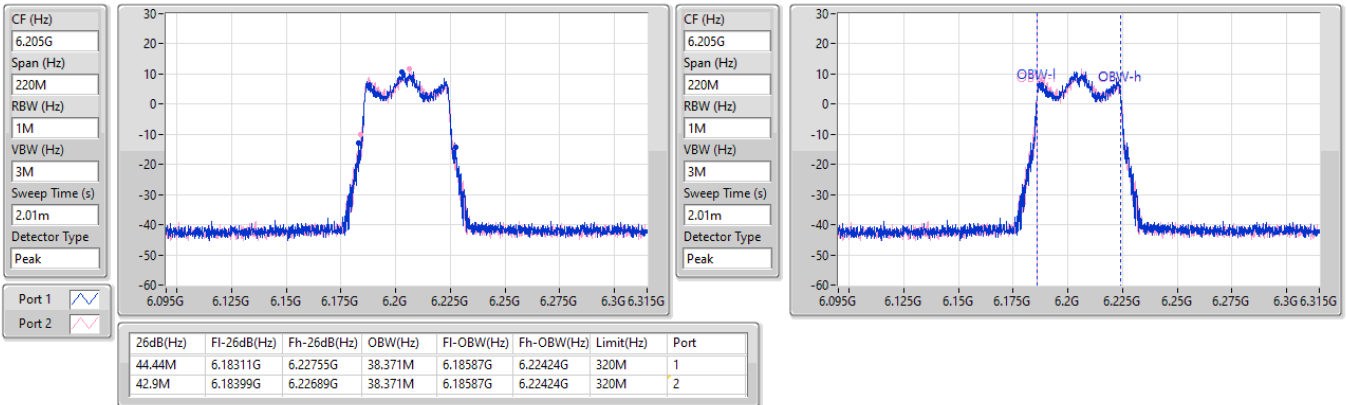


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

5985MHz

06/02/2026


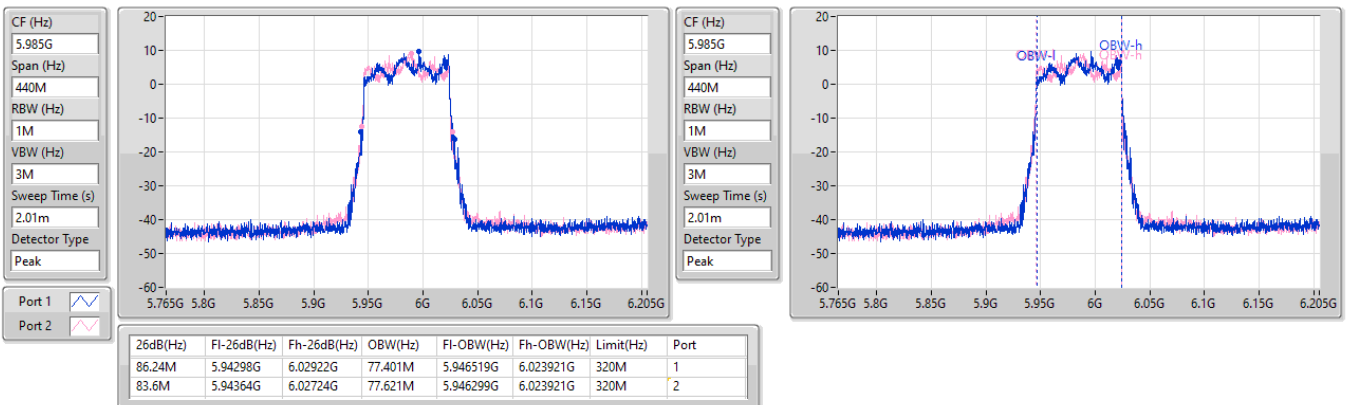


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6185MHz

06/02/2026

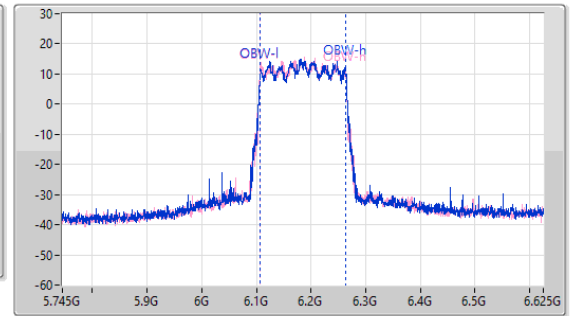
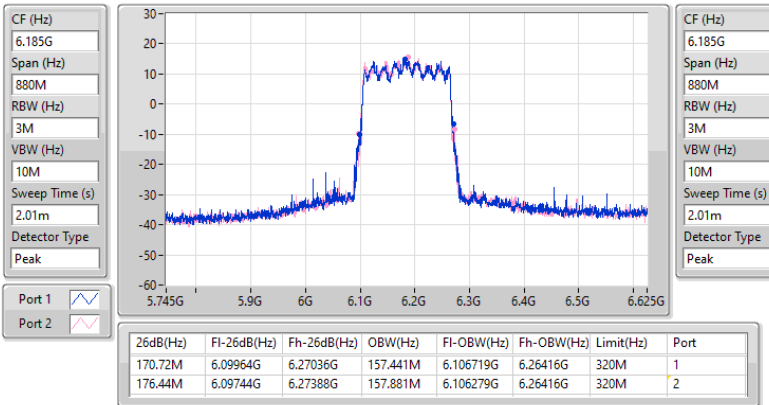


6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

6515MHz

06/02/2026

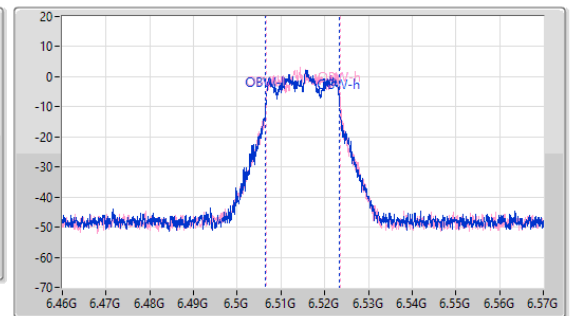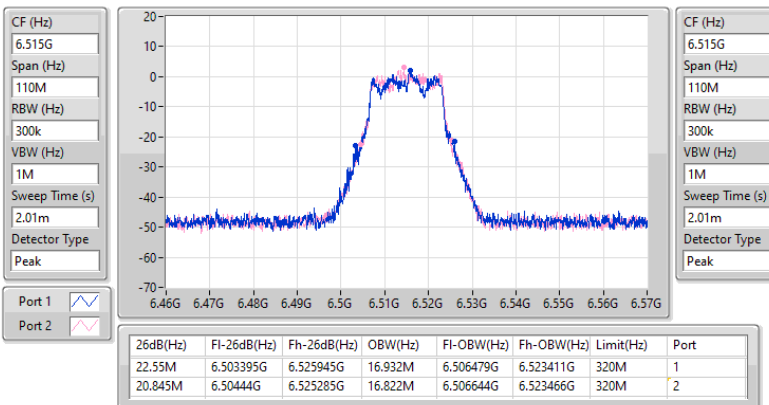


6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

6515MHz

06/02/2026

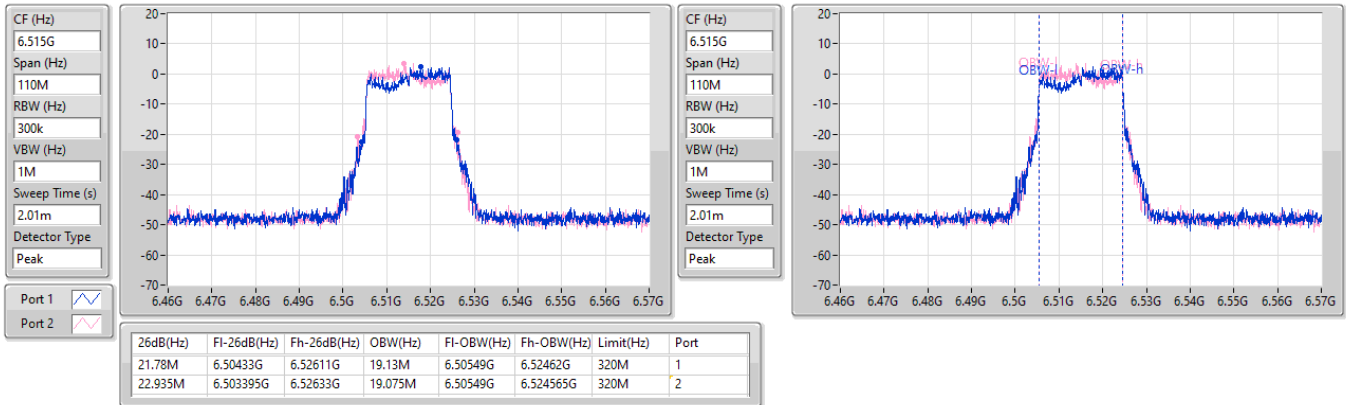


6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

6525MHz

06/02/2026

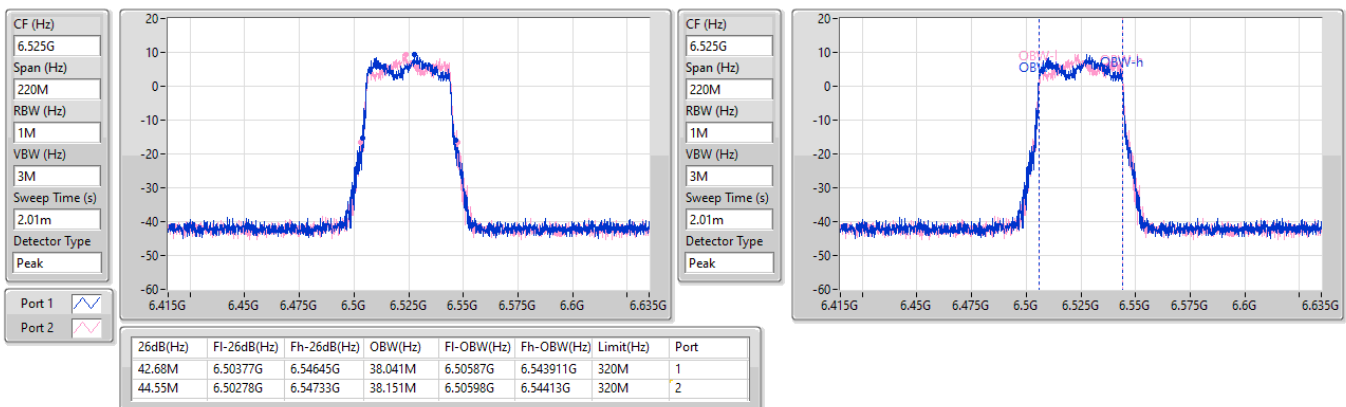


6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

6465MHz

06/02/2026

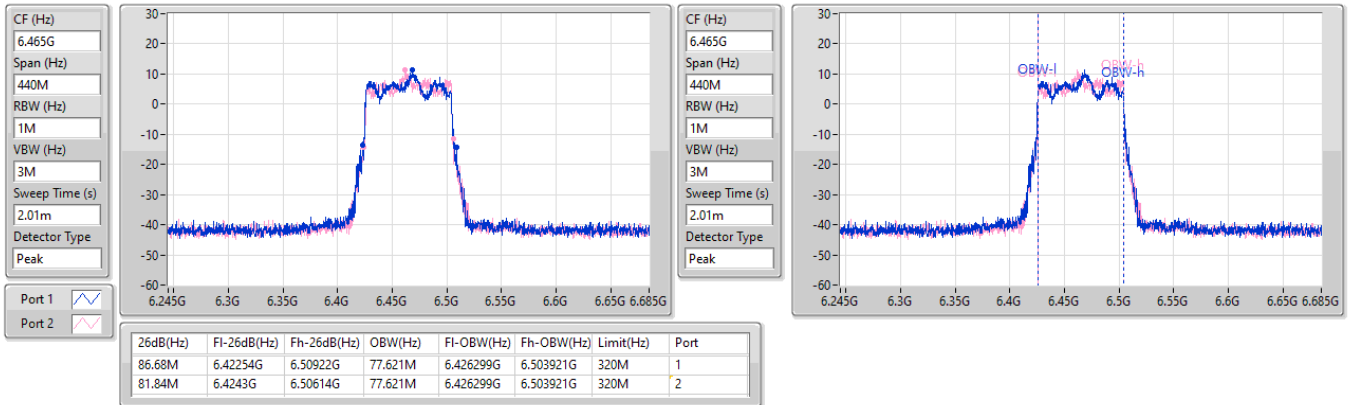


6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6505MHz

06/02/2026

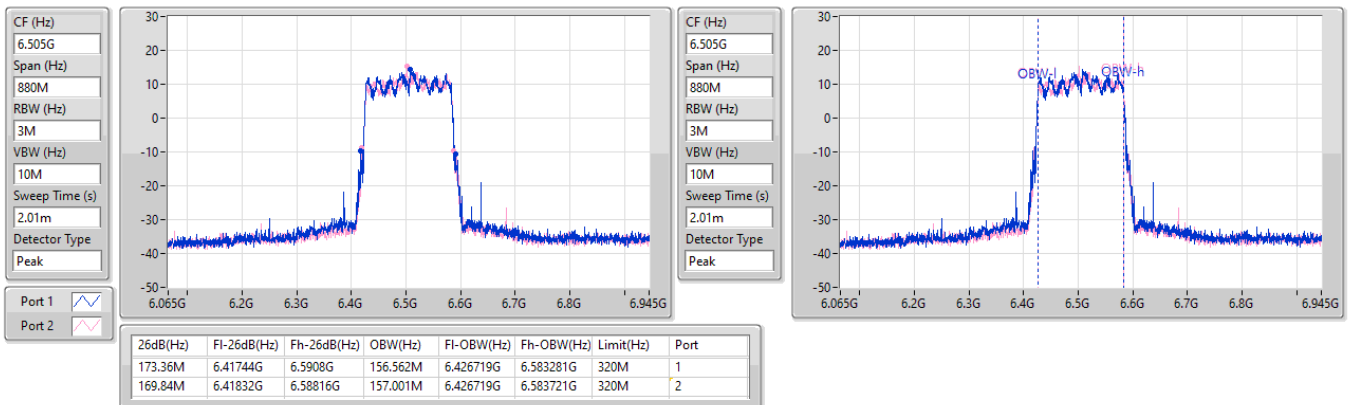


6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

6535MHz

06/02/2026

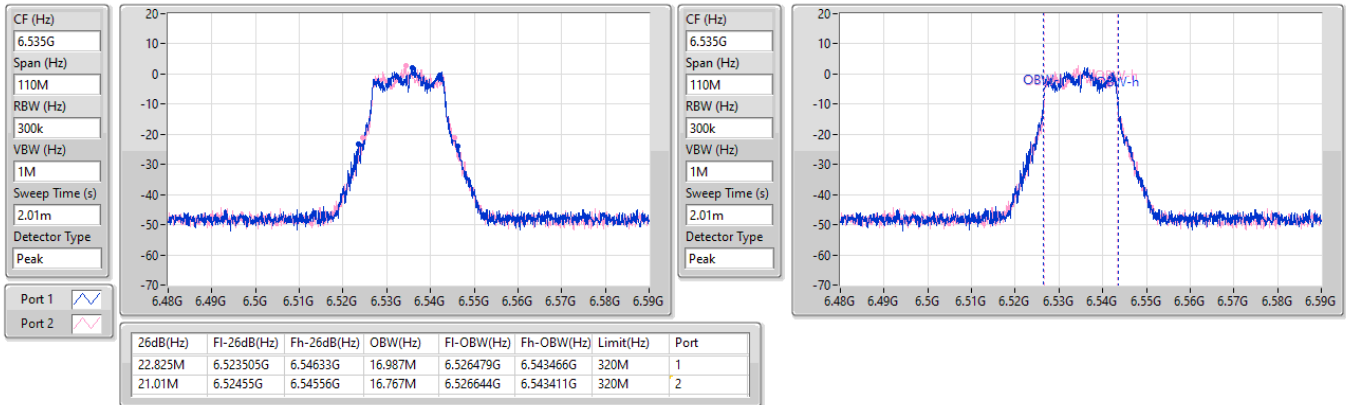


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

6535MHz

06/02/2026

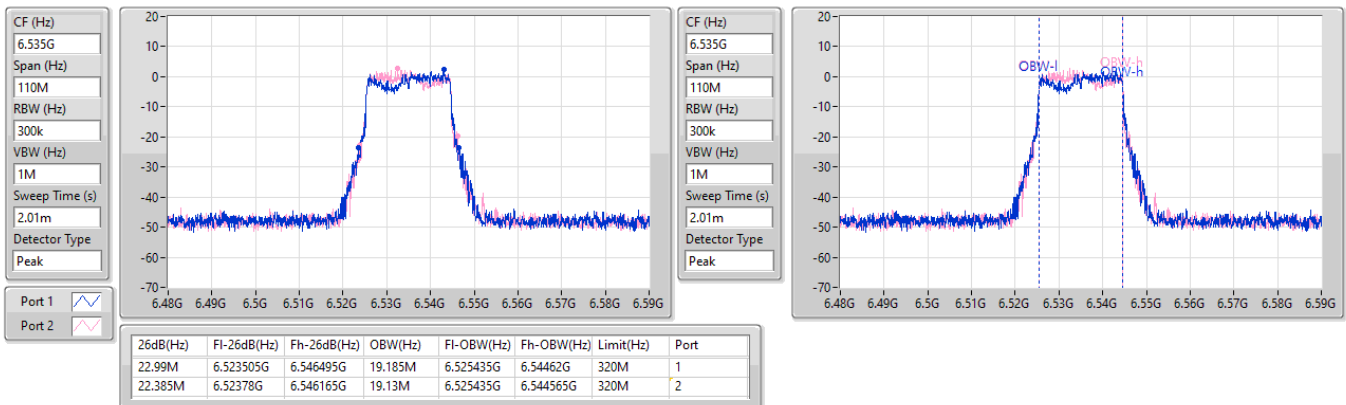


6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

6685MHz

06/02/2026

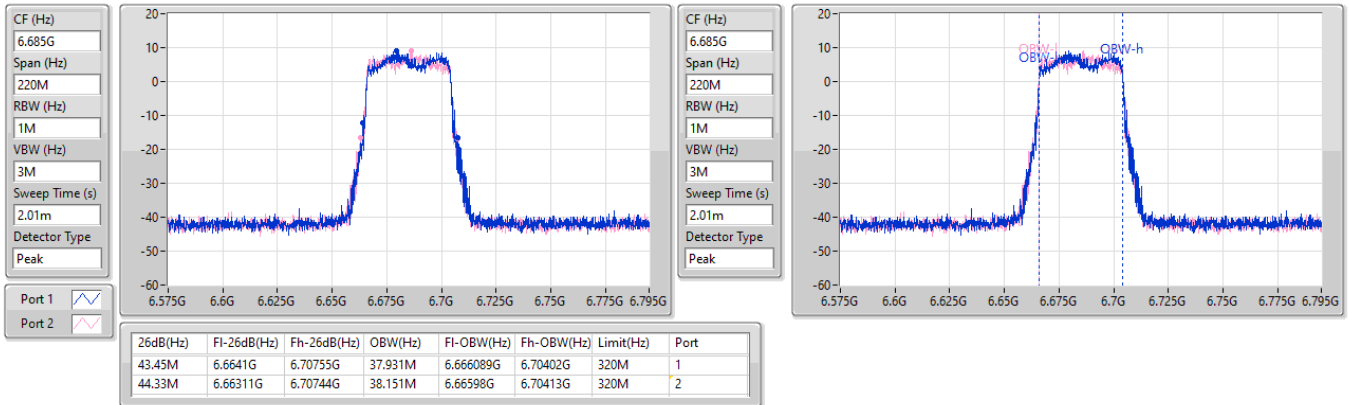


6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

6865MHz

06/02/2026

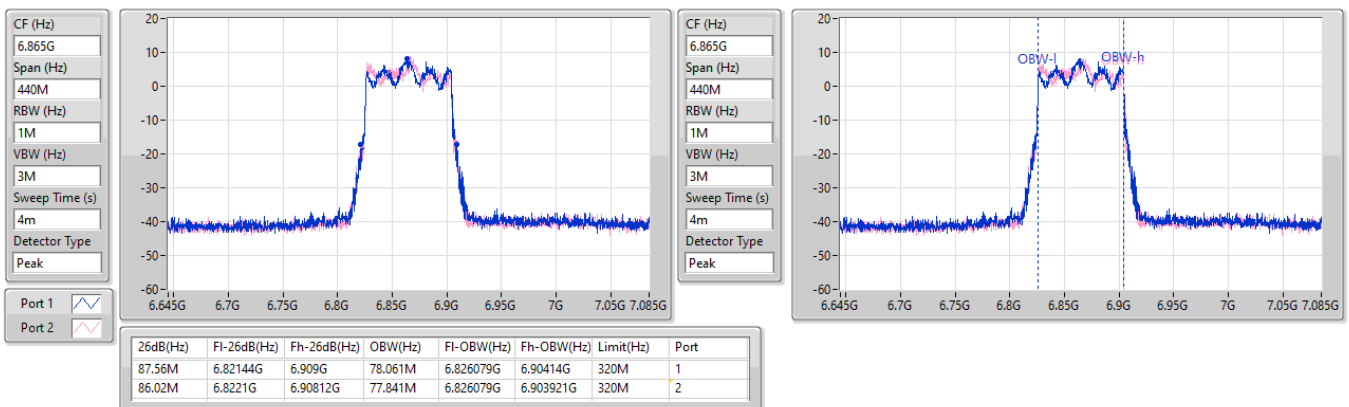


6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6665MHz

06/02/2026

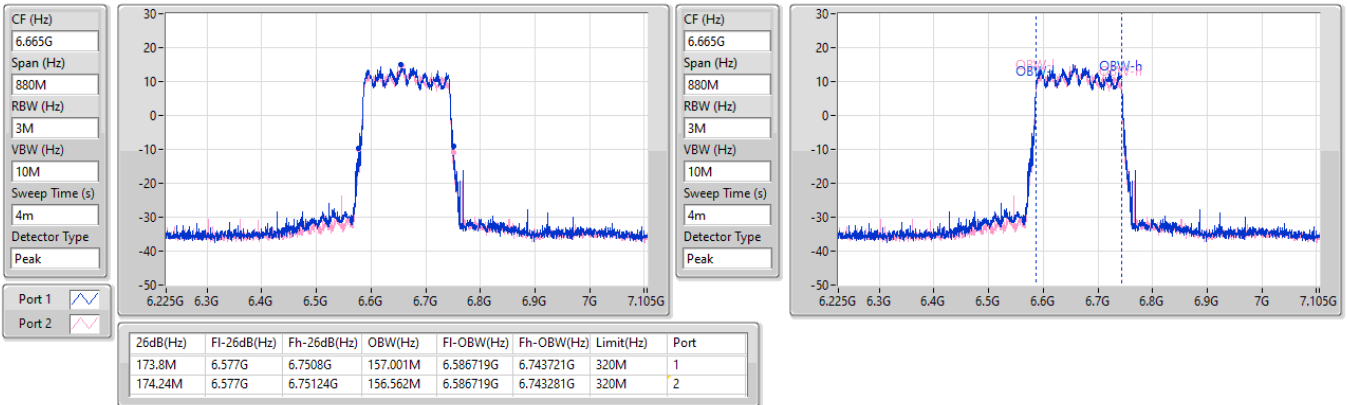


6.875-7.125GHz_802.11a_Nss1,(6Mbps)_2TX

EBW

7095MHz

06/02/2026

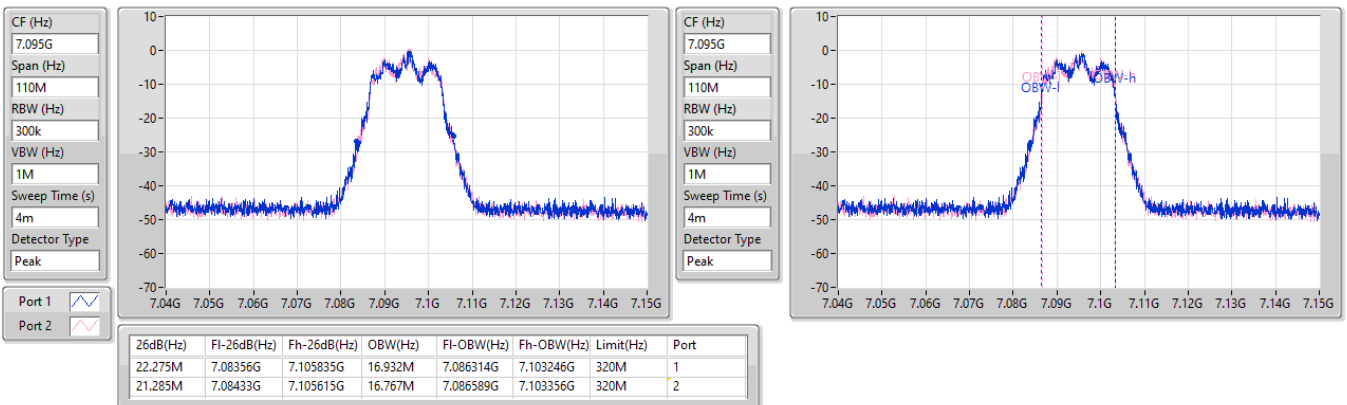


6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

EBW

6895MHz

06/02/2026

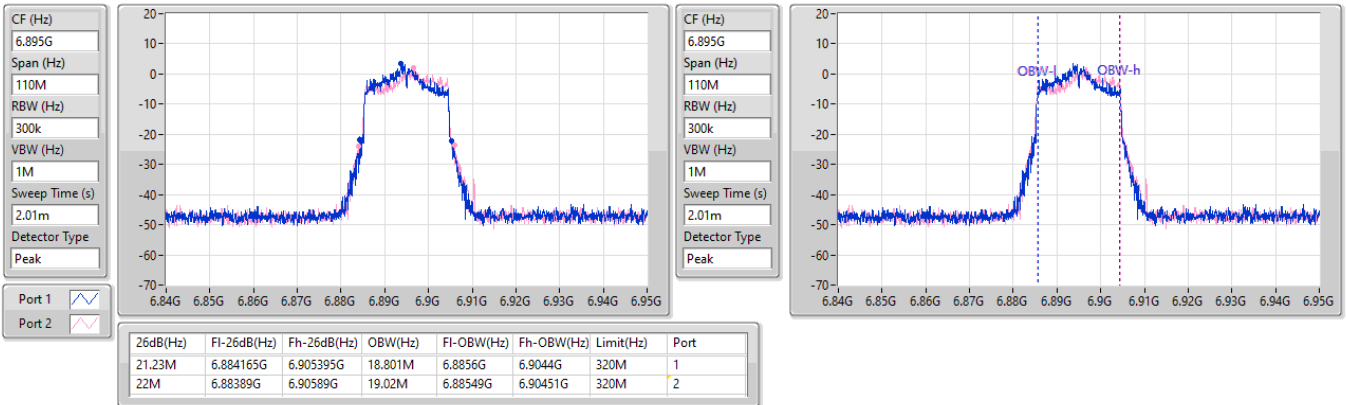


6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX

EBW

7005MHz

06/02/2026

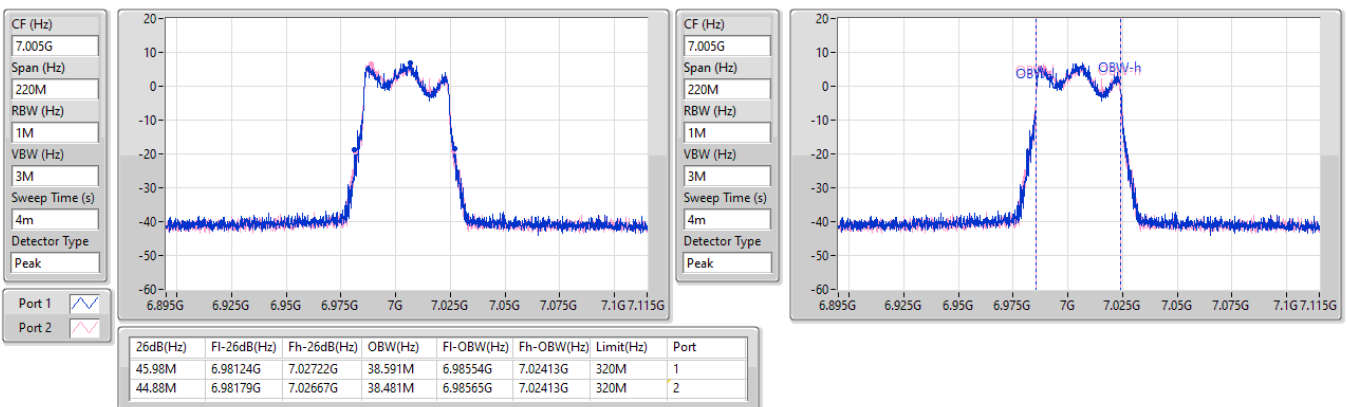


6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_2TX

EBW

6945MHz

06/02/2026

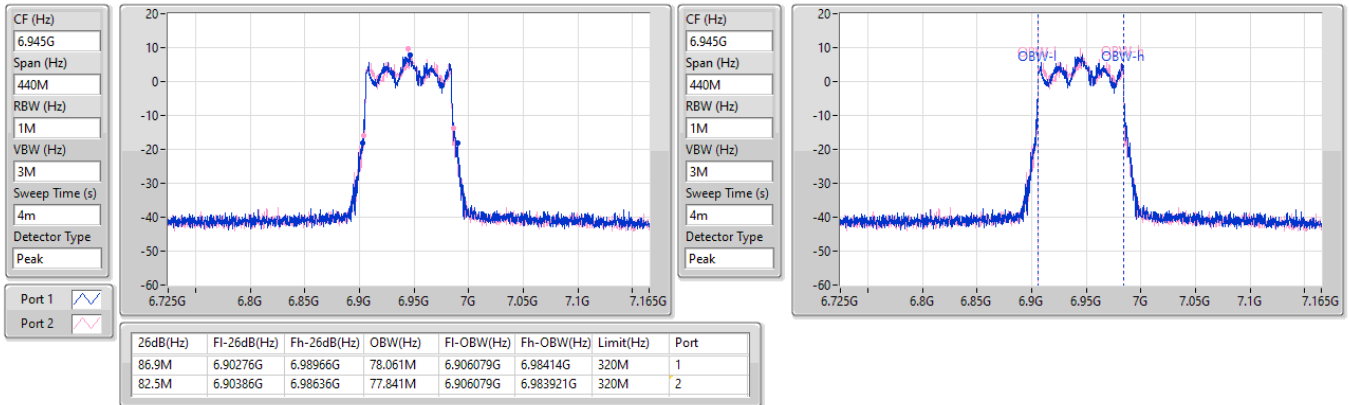


6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_2TX

EBW

6985MHz

06/02/2026

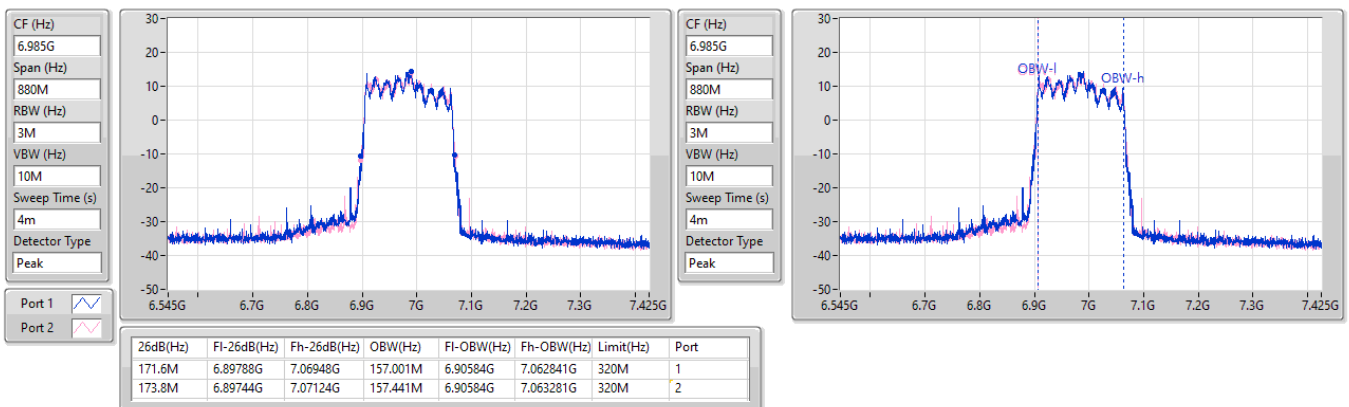

**Summary**

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
5.925-6.425GHz	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	22.165M	19.075M	19M1D1D	21.395M	18.856M
802.11be EHT40-BF_Nss1,(MCS0)_2TX	44.66M	38.371M	38M4D1D	43.34M	38.151M
802.11be EHT80-BF_Nss1,(MCS0)_2TX	86.24M	78.281M	78M3D1D	83.6M	77.621M
802.11be EHT160-BF_Nss1,(MCS0)_2TX	177.32M	158.321M	158MD1D	169.84M	157.441M
6.425-6.525GHz	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	22.495M	19.24M	19M2D1D	21.34M	19.02M
802.11be EHT40-BF_Nss1,(MCS0)_2TX	44.99M	38.261M	38M3D1D	42.68M	38.151M
802.11be EHT80-BF_Nss1,(MCS0)_2TX	86.46M	77.841M	77M8D1D	83.16M	77.181M
802.11be EHT160-BF_Nss1,(MCS0)_2TX	174.68M	157.441M	157MD1D	169.4M	157.001M
6.525-6.875GHz	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	22.88M	19.13M	19M1D1D	20.405M	18.856M
802.11be EHT40-BF_Nss1,(MCS0)_2TX	44.44M	38.591M	38M6D1D	41.8M	37.821M
802.11be EHT80-BF_Nss1,(MCS0)_2TX	86.24M	77.841M	77M8D1D	83.16M	77.181M
802.11be EHT160-BF_Nss1,(MCS0)_2TX	174.68M	157.881M	158MD1D	170.72M	156.562M
6.875-7.125GHz	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	21.835M	19.02M	19M0D1D	20.57M	18.691M
802.11be EHT40-BF_Nss1,(MCS0)_2TX	44.88M	38.591M	38M6D1D	43.23M	38.371M
802.11be EHT80-BF_Nss1,(MCS0)_2TX	87.34M	78.061M	78M1D1D	86.02M	77.841M
802.11be EHT160-BF_Nss1,(MCS0)_2TX	175.12M	157.881M	158MD1D	173.8M	156.562M

Max-N dB = Maximum 26dB down bandwidth for other band;
Max-OBW = Maximum 99% occupied bandwidth;
Min-N dB = Maximum 26dB down bandwidth for other band;
Min-OBW = Minimum 99% occupied bandwidth

Result

Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)	Port 2-N dB (Hz)	Port 2-OBW (Hz)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5955MHz	Pass	320M	21.505M	19.075M	21.725M	19.075M
6195MHz	Pass	320M	21.67M	18.856M	21.89M	18.911M
6415MHz	Pass	320M	22.165M	19.075M	21.395M	18.966M
6435MHz	Pass	320M	21.34M	19.13M	21.56M	19.02M
6475MHz	Pass	320M	22.495M	19.075M	22.055M	19.24M
6515MHz	Pass	320M	22.165M	19.075M	22.33M	19.075M
6535MHz	Pass	320M	22.055M	19.13M	22.275M	19.075M
6695MHz	Pass	320M	22.88M	19.13M	22.605M	19.075M
6875MHz	Pass	320M	20.405M	18.856M	22M	19.075M
6895MHz	Pass	320M	20.68M	18.746M	21.285M	19.02M
6995MHz	Pass	320M	20.57M	18.691M	21.34M	18.856M
7095MHz	Pass	320M	21.67M	18.911M	21.065M	18.801M
7115MHz	Pass	320M	21.835M	18.966M	21.67M	18.856M
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5965MHz	Pass	320M	44.66M	38.151M	44.11M	38.371M
6205MHz	Pass	320M	44.11M	38.371M	43.34M	38.371M
6405MHz	Pass	320M	43.56M	38.261M	43.56M	38.261M
6445MHz	Pass	320M	43.23M	38.261M	43.34M	38.261M
6485MHz	Pass	320M	44.44M	38.151M	42.68M	38.151M
6525MHz	Pass	320M	44.99M	38.151M	43.78M	38.261M
6565MHz	Pass	320M	44.44M	37.821M	43.56M	38.151M
6685MHz	Pass	320M	43.56M	37.931M	42.79M	38.041M
6885MHz	Pass	320M	44.11M	38.591M	41.8M	38.371M
6925MHz	Pass	320M	43.23M	38.591M	44.77M	38.371M
7005MHz	Pass	320M	44.77M	38.481M	43.23M	38.481M
7085MHz	Pass	320M	44.22M	38.481M	44.88M	38.481M
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
5985MHz	Pass	320M	84.7M	77.621M	84.7M	77.621M
6225MHz	Pass	320M	84.04M	78.281M	83.6M	77.621M
6385MHz	Pass	320M	86.24M	77.841M	86.02M	77.621M
6465MHz	Pass	320M	84.92M	77.401M	86.46M	77.841M
6545MHz	Pass	320M	83.16M	77.401M	85.14M	77.181M
6625MHz	Pass	320M	83.38M	77.181M	83.16M	77.181M
6705MHz	Pass	320M	83.82M	77.401M	84.48M	77.401M
6785MHz	Pass	320M	84.26M	77.621M	86.24M	77.621M
6865MHz	Pass	320M	83.6M	77.841M	83.38M	77.841M
6945MHz	Pass	320M	87.34M	78.061M	86.02M	77.841M
7025MHz	Pass	320M	86.46M	78.061M	86.9M	78.061M
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-
6025MHz	Pass	320M	169.84M	157.441M	172.92M	157.881M
6185MHz	Pass	320M	172.92M	157.441M	175.56M	158.321M
6345MHz	Pass	320M	170.72M	157.881M	177.32M	157.881M
6505MHz	Pass	320M	174.68M	157.441M	169.4M	157.001M
6665MHz	Pass	320M	174.24M	157.441M	170.72M	156.562M
6825MHz	Pass	320M	174.68M	157.441M	173.8M	157.881M
6985MHz	Pass	320M	173.8M	156.562M	175.12M	157.881M



Port X-N dB = Port X 6dB down bandwidth for 5.725-5.85GHz band / 26dB down bandwidth for other band
Port X-OBW = Port X 99% occupied bandwidth

5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW

6415MHz

06/02/2026

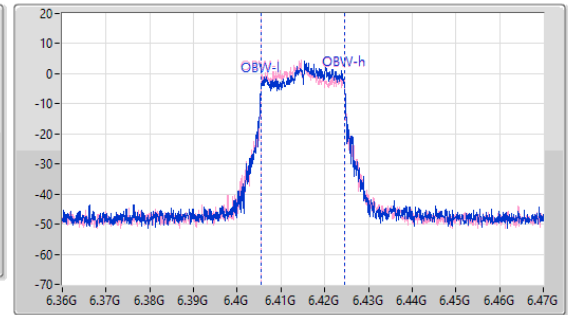
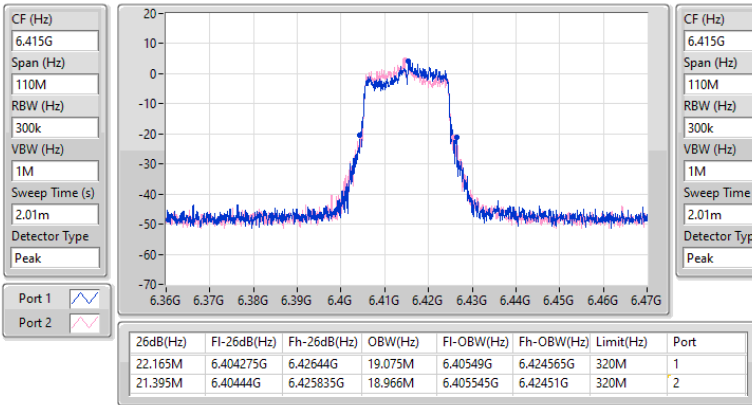


5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

EBW

5965MHz

06/02/2026

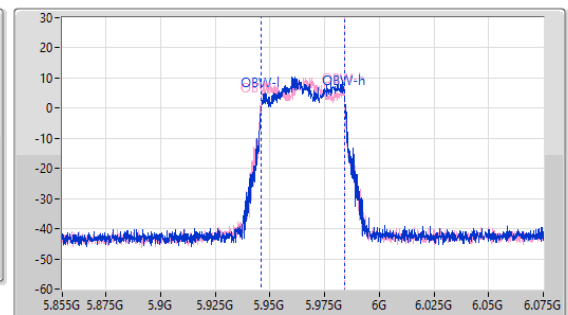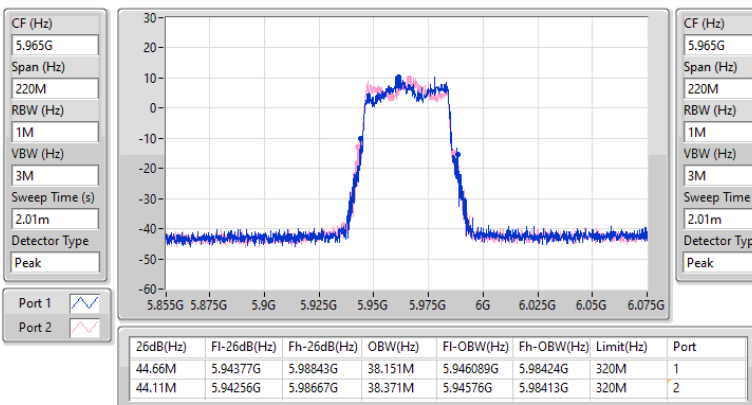


5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

EBW

6385MHz

06/02/2026

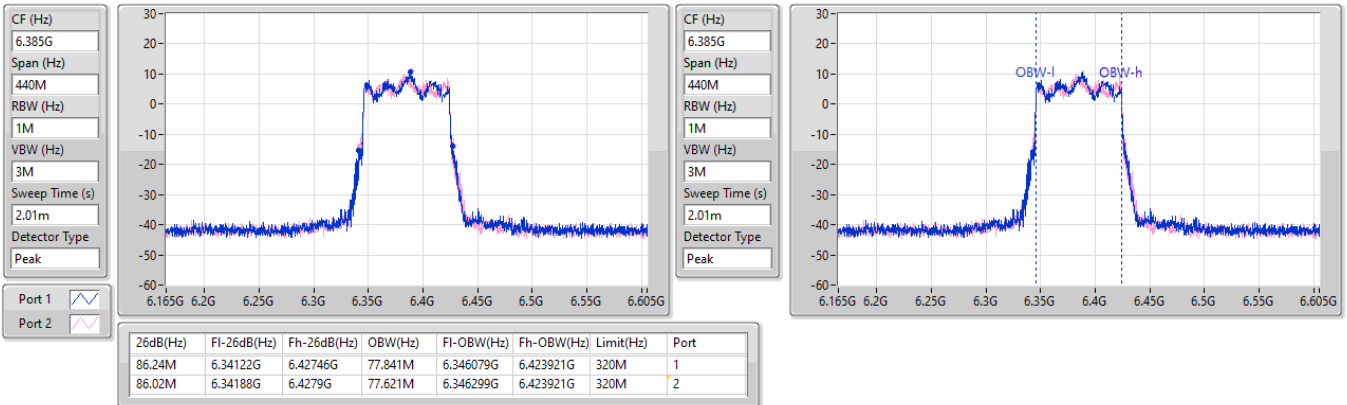


5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

EBW

6345MHz

06/02/2026

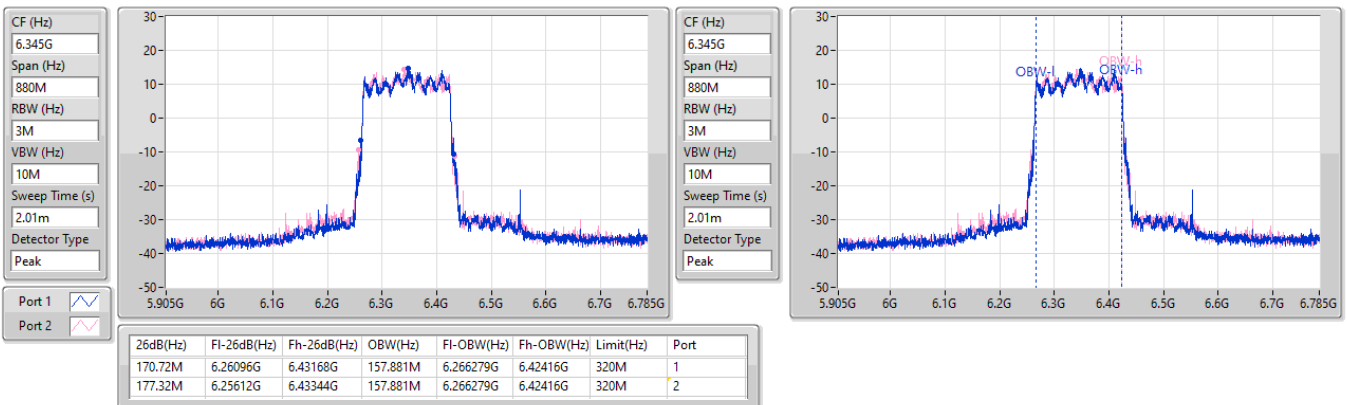


6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW

6475MHz

06/02/2026

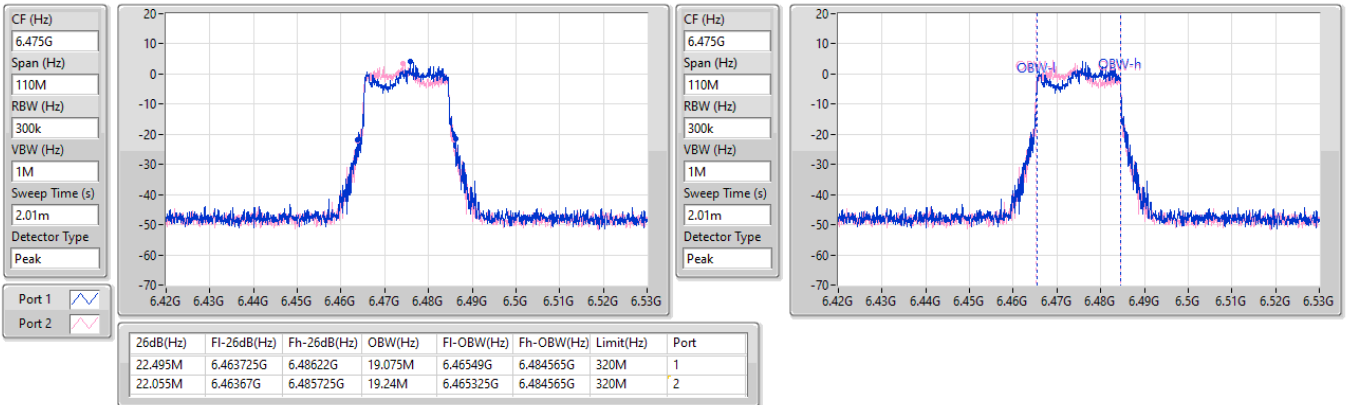


6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

EBW

6525MHz

06/02/2026

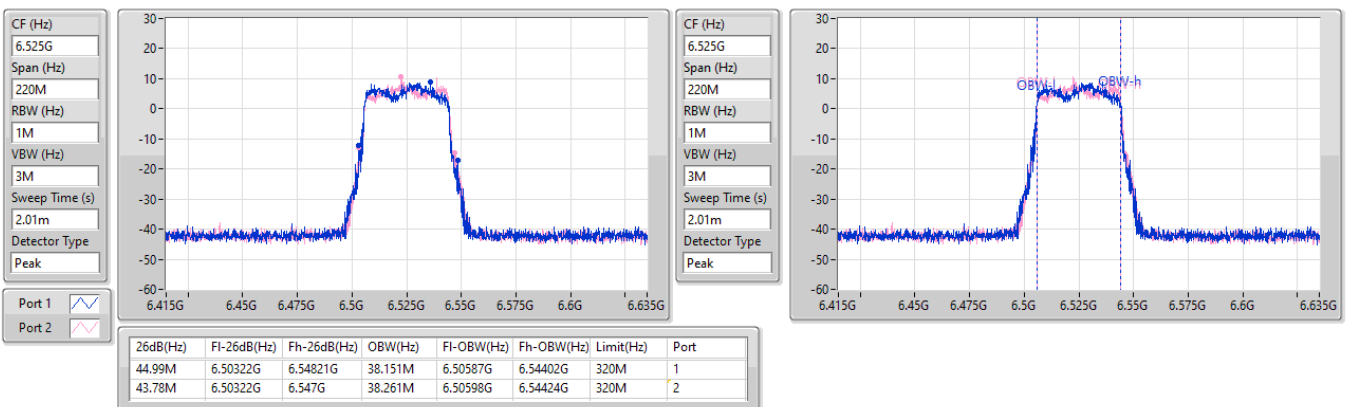


6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

EBW

6465MHz

06/02/2026

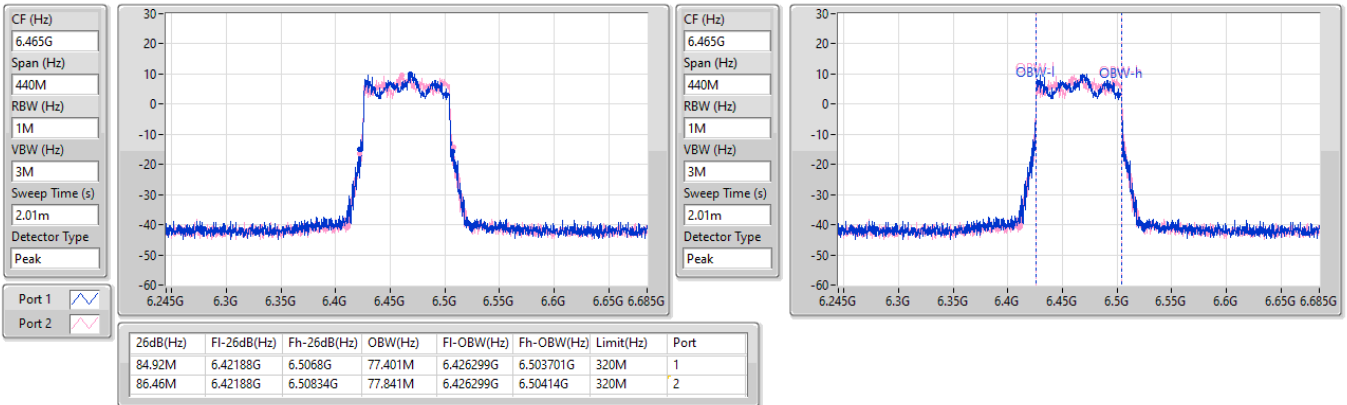


6.425-6.525GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

EBW

6505MHz

06/02/2026

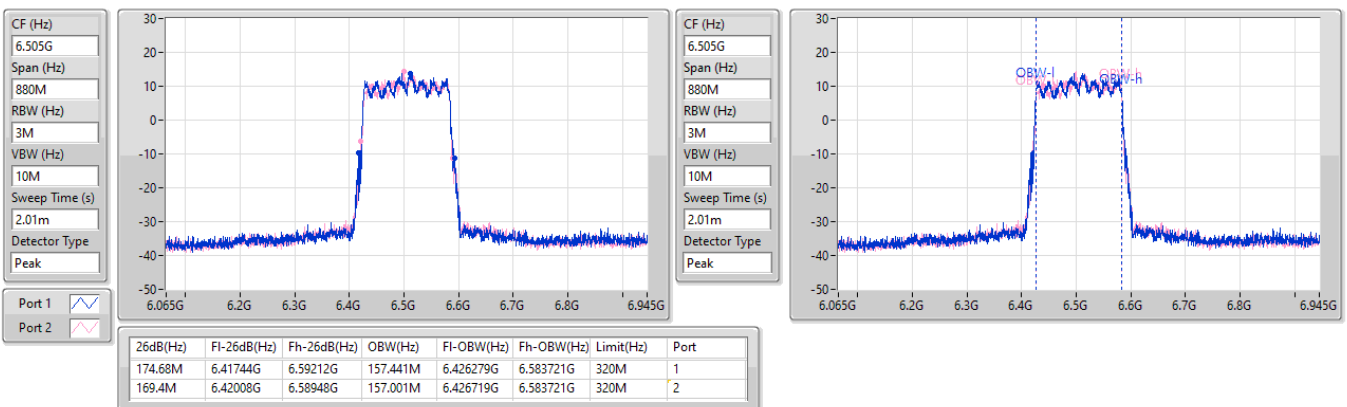


6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW

6695MHz

06/02/2026

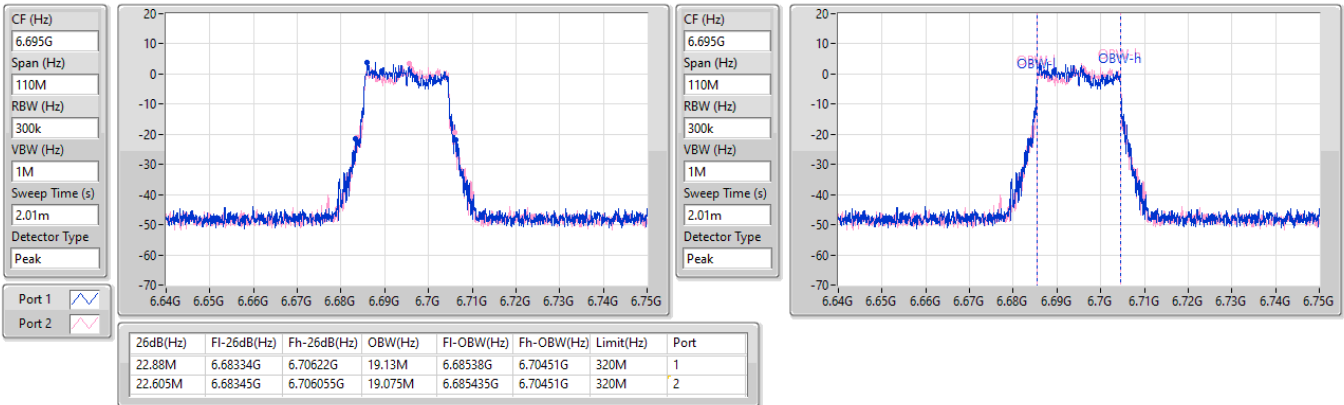


6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

EBW

6565MHz

06/02/2026

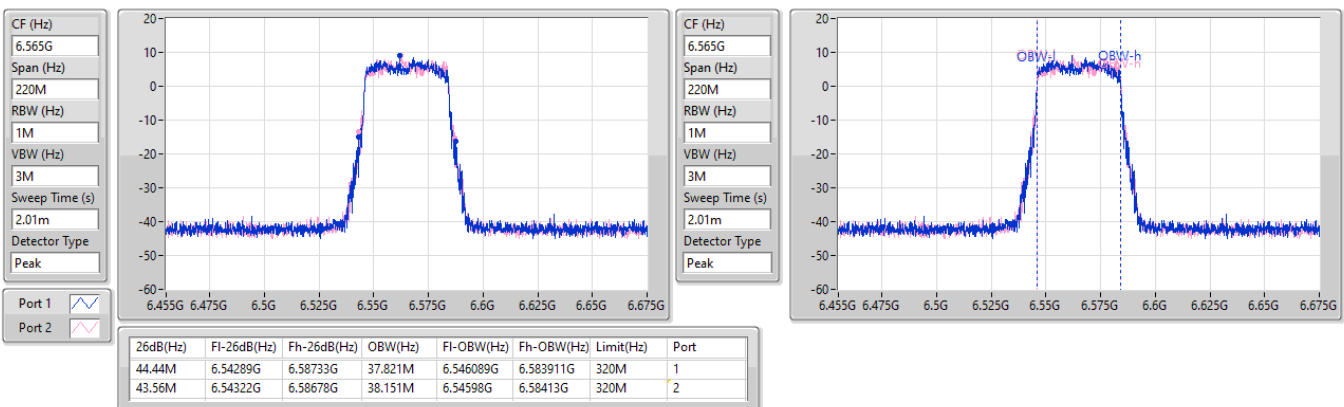


6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

EBW

6785MHz

06/02/2026

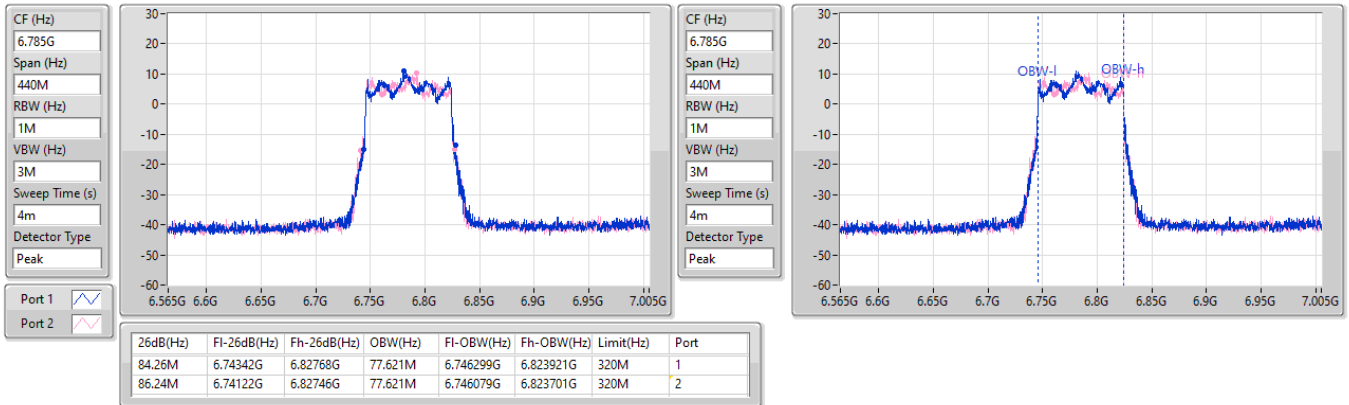


6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

EBW

6825MHz

06/02/2026

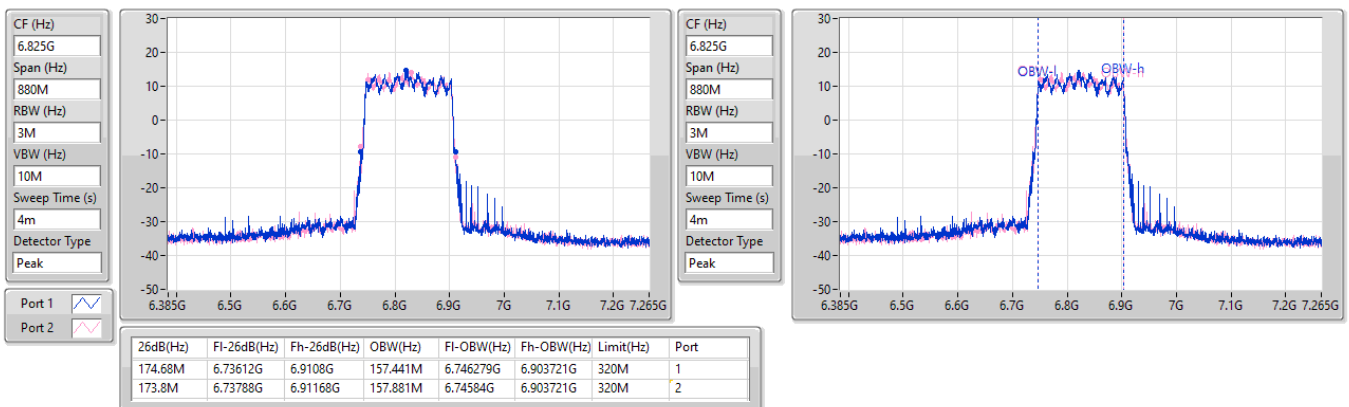


6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

EBW

7115MHz

06/02/2026

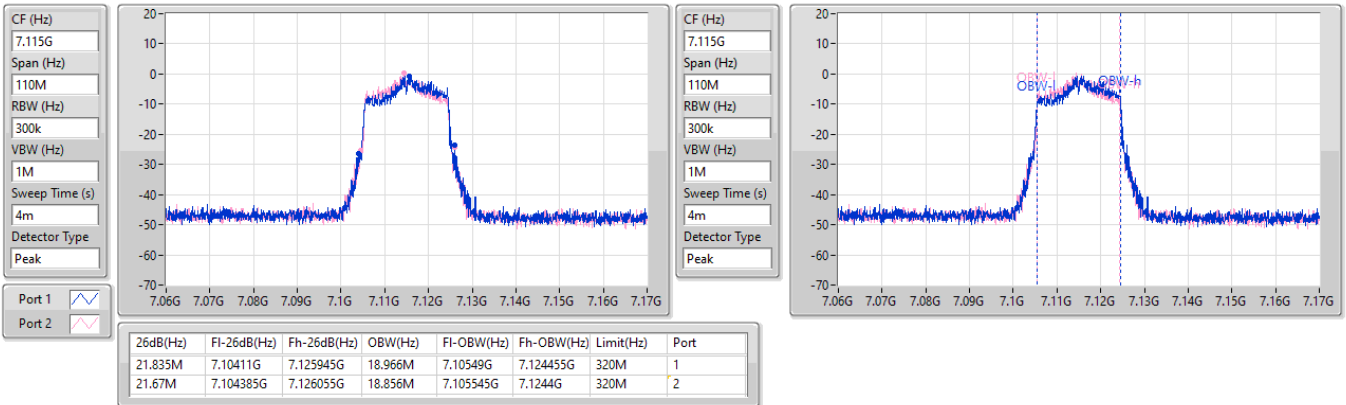


6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

EBW

7085MHz

06/02/2026

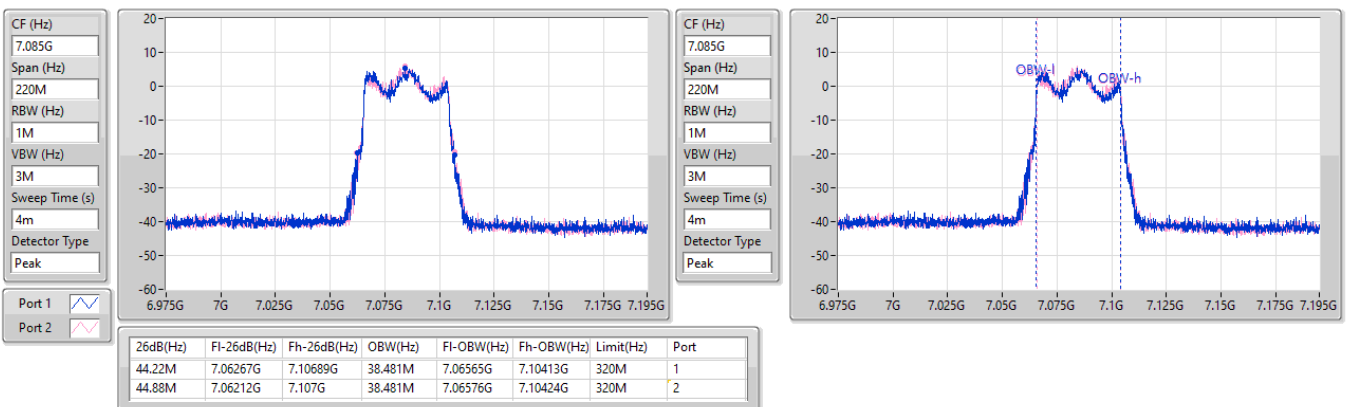


6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

EBW

6945MHz

06/02/2026

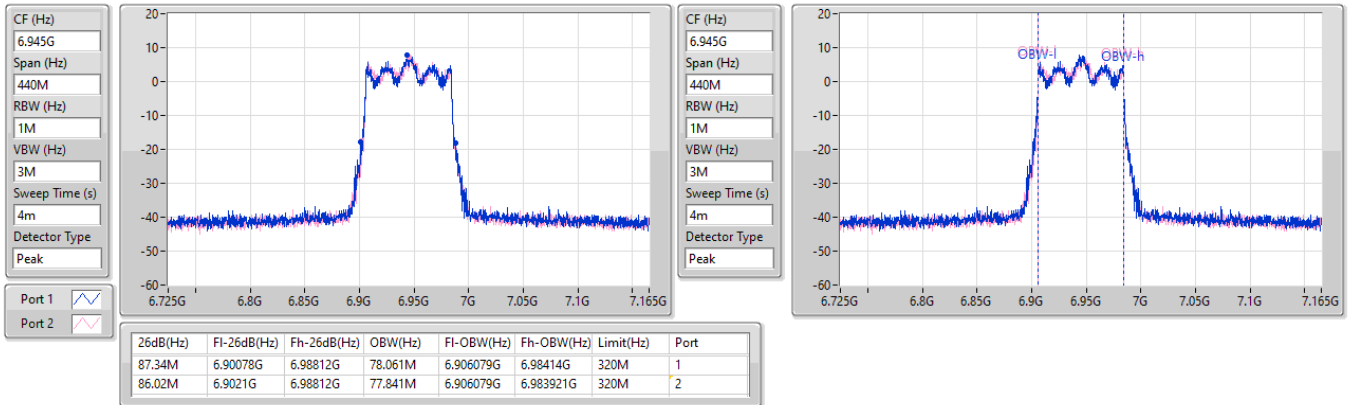


6.875-7.125GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

EBW

6985MHz

06/02/2026

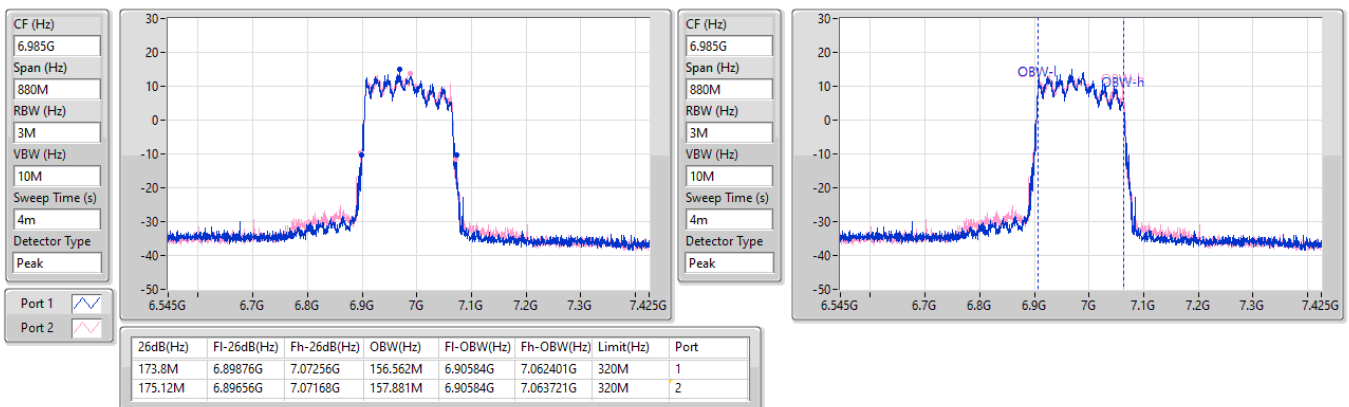

Summary

Mode	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	13.95	0.02483
802.11be EHT20_Nss1,(MCS0)_2TX	14.87	0.03069
802.11be EHT40_Nss1,(MCS0)_2TX	17.00	0.05012
802.11be EHT80_Nss1,(MCS0)_2TX	19.67	0.09268
802.11be EHT160_Nss1,(MCS0)_2TX	22.78	0.18967
6.425-6.525GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	14.87	0.03069
802.11be EHT20_Nss1,(MCS0)_2TX	14.30	0.02692
802.11be EHT40_Nss1,(MCS0)_2TX	18.15	0.06531
802.11be EHT80_Nss1,(MCS0)_2TX	20.63	0.11561
802.11be EHT160_Nss1,(MCS0)_2TX	23.29	0.21330
6.525-6.875GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	14.89	0.03083
802.11be EHT20_Nss1,(MCS0)_2TX	14.64	0.02911
802.11be EHT40_Nss1,(MCS0)_2TX	18.20	0.06607
802.11be EHT80_Nss1,(MCS0)_2TX	21.46	0.13996
802.11be EHT160_Nss1,(MCS0)_2TX	23.72	0.23550
6.875-7.125GHz	-	-
802.11a_Nss1,(6Mbps)_2TX	13.82	0.02410
802.11be EHT20_Nss1,(MCS0)_2TX	14.58	0.02871
802.11be EHT40_Nss1,(MCS0)_2TX	17.43	0.05534
802.11be EHT80_Nss1,(MCS0)_2TX	19.98	0.09954
802.11be EHT160_Nss1,(MCS0)_2TX	23.97	0.24946

Result

Mode	Result	EIRP (dBm)	EIRP Limit (dBm)
802.11a_Nss1,(6Mbps)_2TX	-	-	-
5955MHz	Pass	13.73	30.00
6195MHz	Pass	13.68	30.00
6415MHz	Pass	13.95	30.00
6435MHz	Pass	13.87	30.00
6475MHz	Pass	14.18	30.00
6515MHz	Pass	14.87	30.00
6535MHz	Pass	14.43	30.00
6695MHz	Pass	14.89	30.00
6875MHz Straddle 6.525-6.875GHz	Pass	13.32	30.00
6895MHz	Pass	13.78	30.00
6995MHz	Pass	13.82	30.00
7095MHz	Pass	13.41	30.00
7115MHz	Pass	8.47	30.00
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-
5955MHz	Pass	14.87	30.00
6195MHz	Pass	13.98	30.00
6415MHz	Pass	13.95	30.00
6435MHz	Pass	13.99	30.00
6475MHz	Pass	14.30	30.00
6515MHz	Pass	14.22	30.00
6535MHz	Pass	14.56	30.00
6695MHz	Pass	14.64	30.00
6875MHz Straddle 6.525-6.875GHz	Pass	14.56	30.00
6895MHz	Pass	14.58	30.00
6995MHz	Pass	14.58	30.00
7095MHz	Pass	14.28	30.00
7115MHz	Pass	13.61	30.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-
5965MHz	Pass	17.00	30.00
6205MHz	Pass	16.74	30.00
6405MHz	Pass	16.41	30.00
6445MHz	Pass	17.23	30.00
6485MHz	Pass	17.88	30.00
6525MHz Straddle 6.425-6.525GHz	Pass	18.15	30.00
6565MHz	Pass	18.20	30.00
6685MHz	Pass	17.84	30.00
6885MHz Straddle 6.525-6.875GHz	Pass	17.27	30.00
6925MHz	Pass	17.43	30.00
7005MHz	Pass	17.21	30.00
7085MHz	Pass	16.78	30.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-
5985MHz	Pass	19.00	30.00
6225MHz	Pass	18.86	30.00
6385MHz	Pass	19.67	30.00
6465MHz	Pass	20.52	30.00
6545MHz Straddle 6.425-6.525GHz	Pass	20.63	30.00
6625MHz	Pass	21.46	30.00
6705MHz	Pass	20.81	30.00
6785MHz	Pass	19.52	30.00
6865MHz Straddle 6.525-6.875GHz	Pass	19.42	30.00
6945MHz	Pass	19.30	30.00
7025MHz	Pass	19.98	30.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-
6025MHz	Pass	22.47	30.00




Radiated EIRP_Beamforming

Appendix C.1

Mode	Result	EIRP (dBm)	EIRP Limit (dBm)
6185MHz	Pass	22.78	30.00
6345MHz	Pass	22.53	30.00
6505MHz Straddle 6.425-6.525GHz	Pass	23.29	30.00
6665MHz	Pass	23.72	30.00
6825MHz Straddle 6.525-6.875GHz	Pass	22.89	30.00
6985MHz	Pass	23.97	30.00

DG = Directional Gain; Port X = Port X output power
Inf = There's no restriction for the limit.

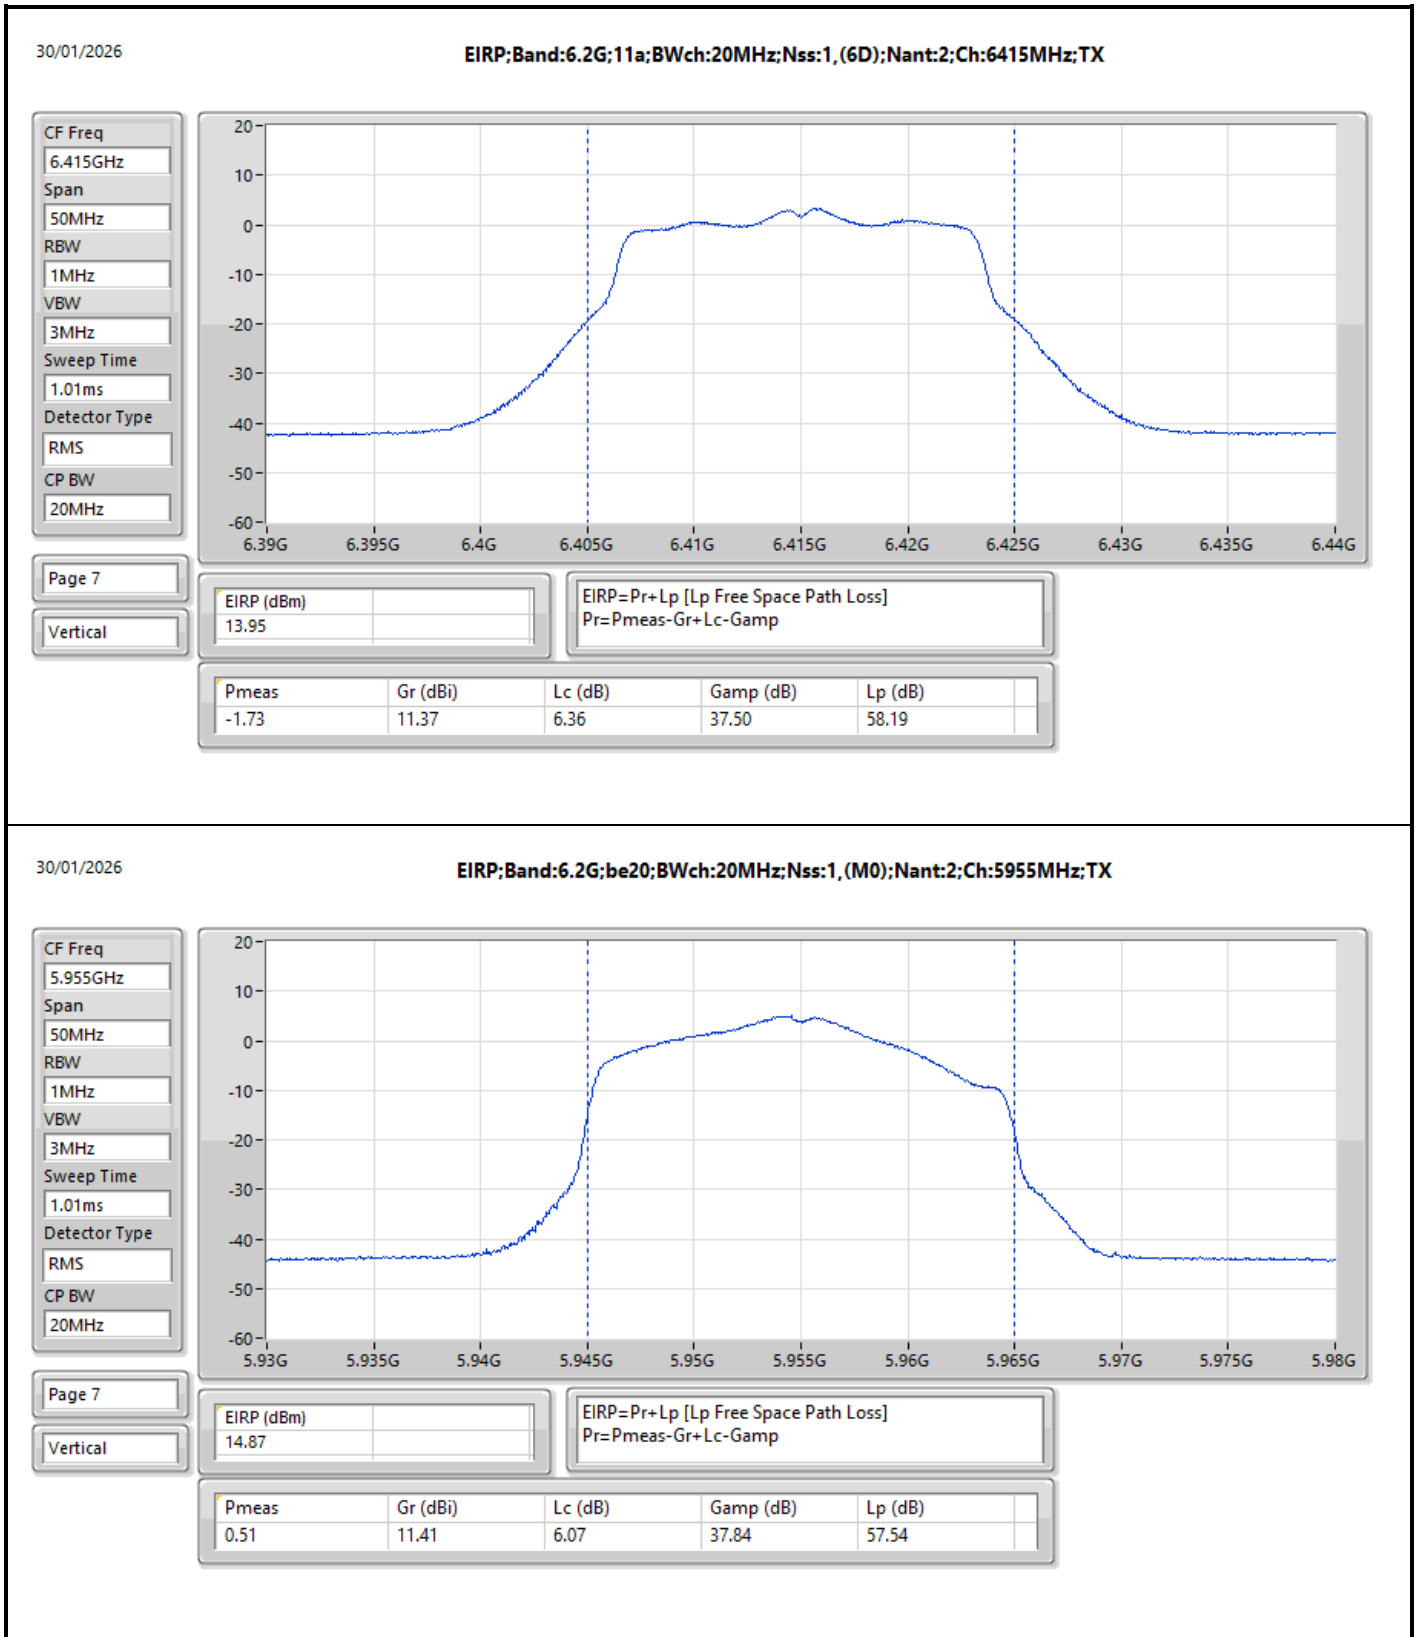

30/01/2026

EIRP;Band:6.2G;be20;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:5955MHz;TX

CF Freq

5.955GHz

Span

50MHz

RBW

1MHz

VBW

3MHz

Sweep Time

1.01ms

Detector Type

RMS

CP BW

20MHz

Page 7

Vertical


EIRP (dBm)

14.87

EIRP=Pr+Lp [Lp Free Space Path Loss]

Pr=Pmeas-Gr+Lc-Gamp

Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
0.51	11.41	6.07	37.84	57.54

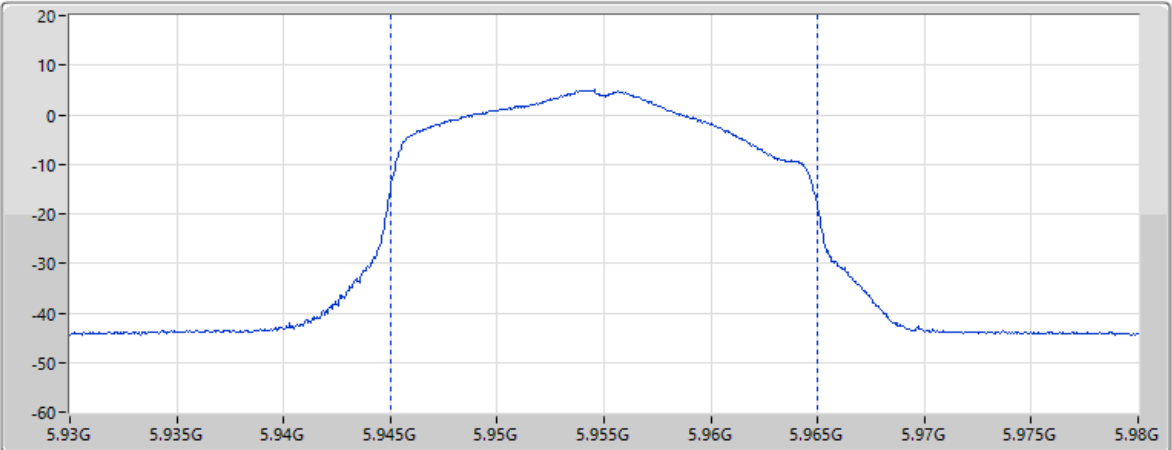

30/01/2026

EIRP;Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:5965MHz;TX

CF Freq
5.965GHz

Span
100MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
40MHz

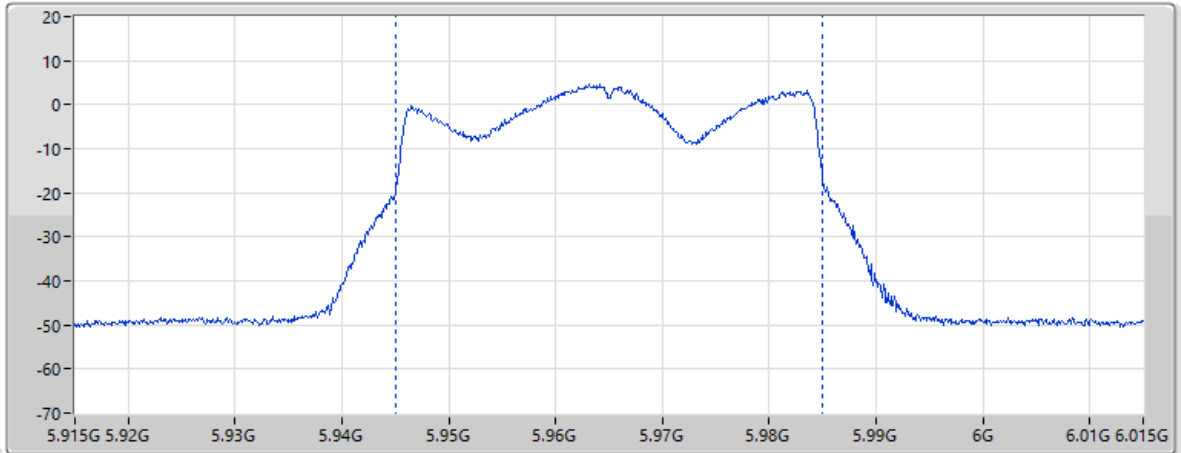

Page 7

Vertical

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
17		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
2.65	11.43	6.07	37.84	57.55

30/01/2026

EIRP;Band:6.2G;be80;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6385MHz;TX

CF Freq
6.385GHz

Span
200MHz


RBW
1MHz

VBW
3MHz

Sweep Time
2ms

Detector Type
RMS

CP BW
80MHz

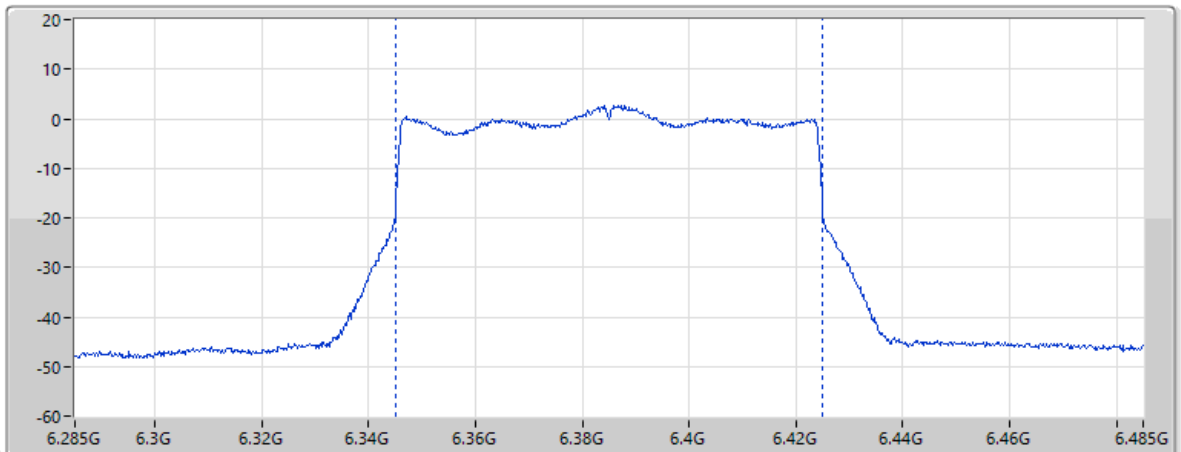


Page 7

Vertical

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
19.67		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
4.19	11.49	6.35	37.53	58.15


30/01/2026

EIRP;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6185MHz;TX

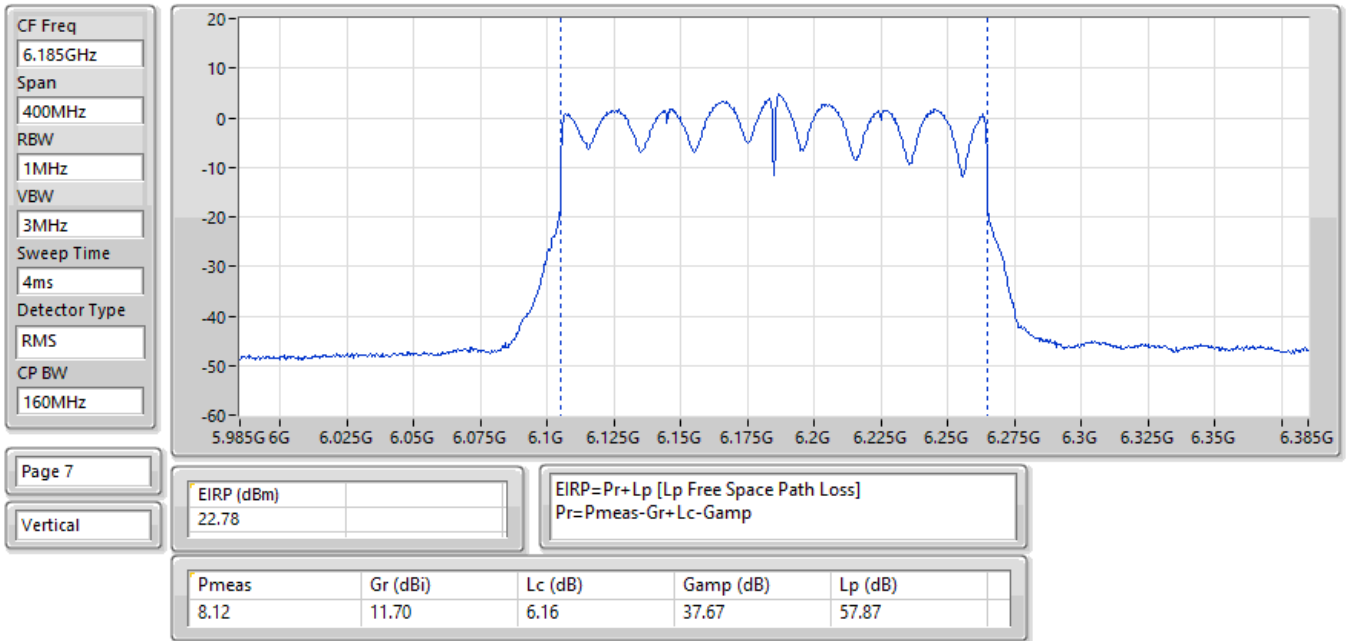


30/01/2026

EIRP;Band:6.4G;11a;BWch:20MHz;Nss:1,(6D);Nant:2;Ch:6515MHz;TX

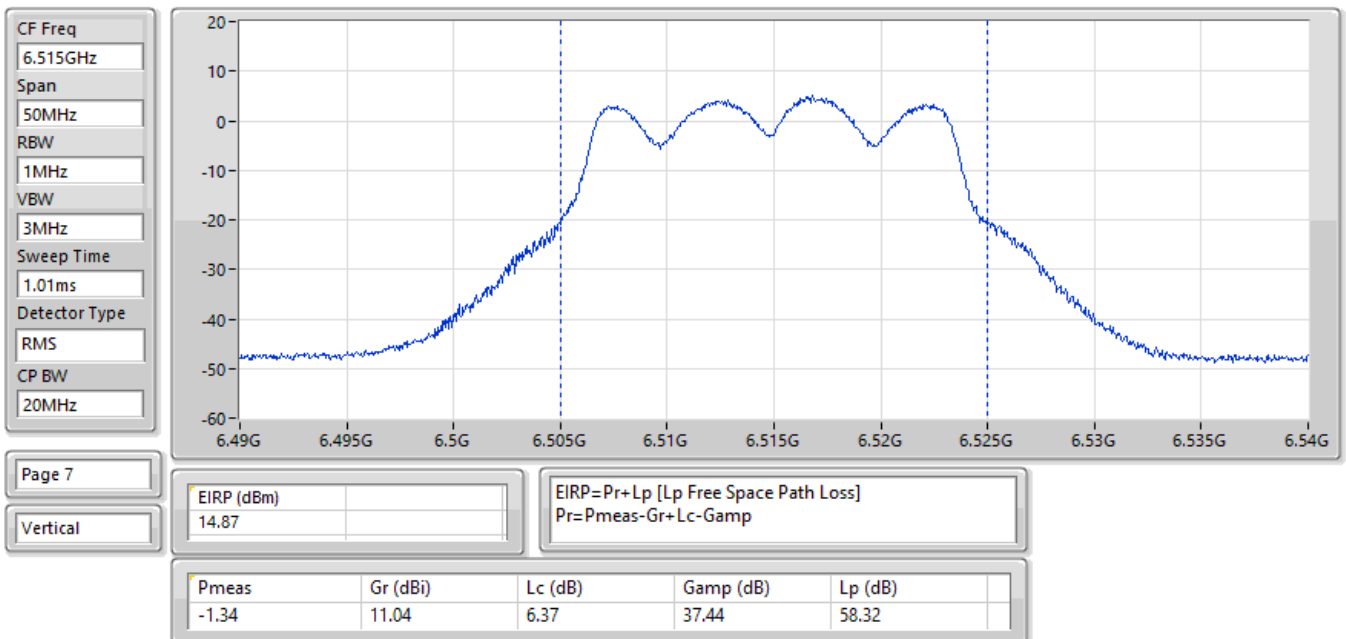


30/01/2026

EIRP:Band:6.4G;be20;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6475MHz;TX

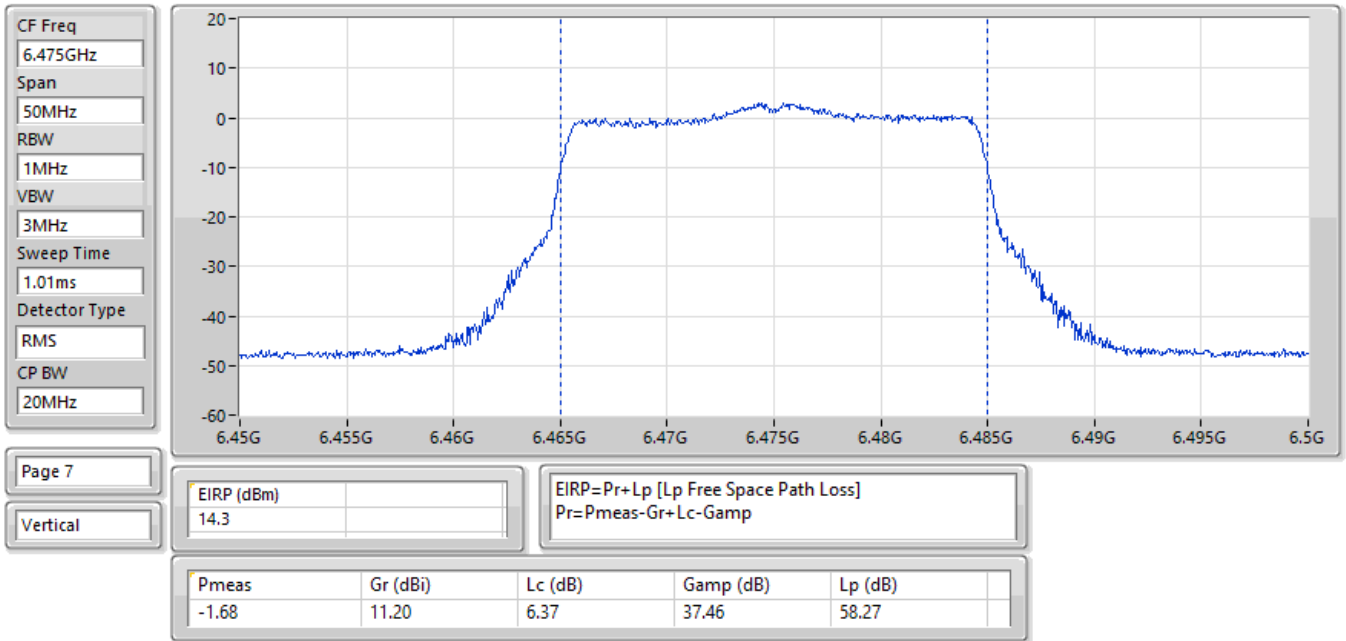


30/01/2026

EIRP:Band:6.4G;be40;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6525MHz;TX

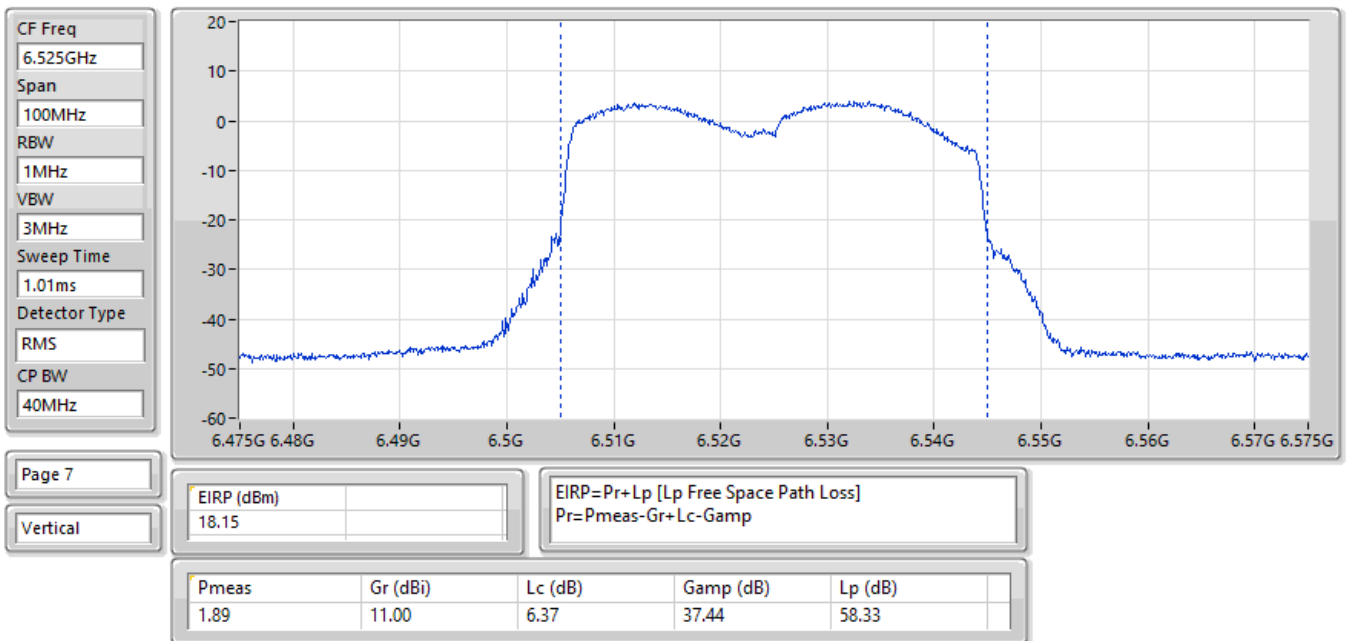


30/01/2026

EIRP;Band:6.4G;be80;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6545MHz;TX

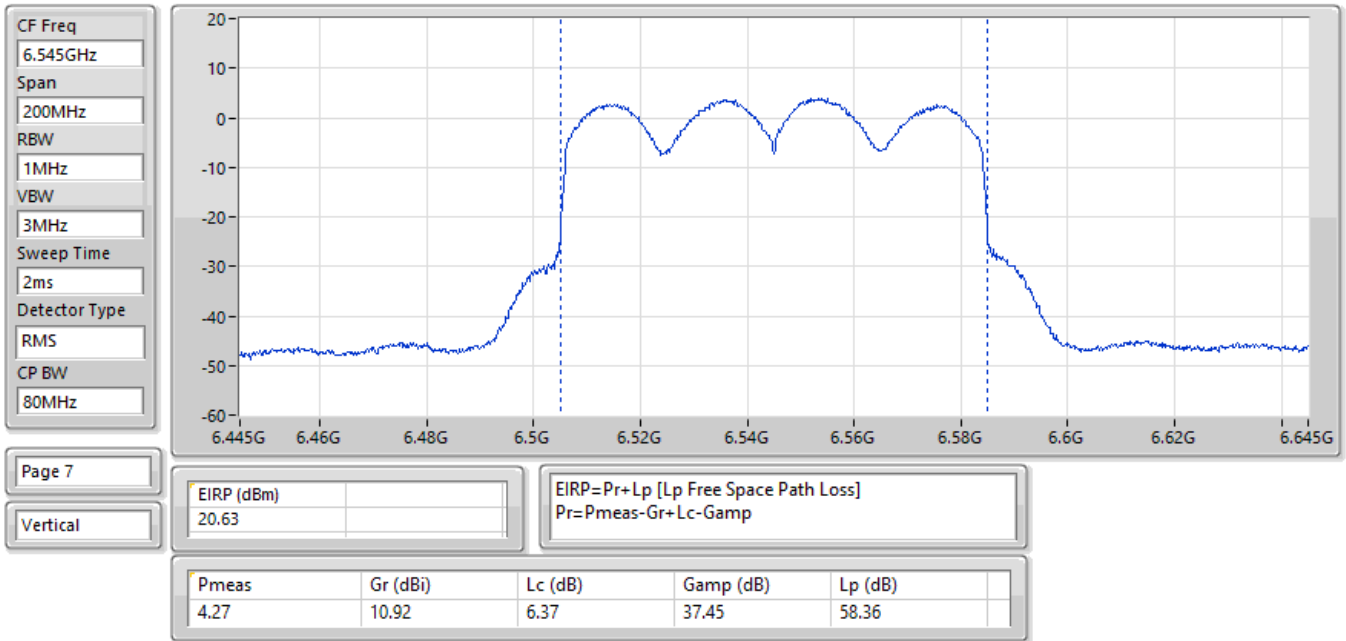


30/01/2026

EIRP;Band:6.4G;be160;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6505MHz;TX

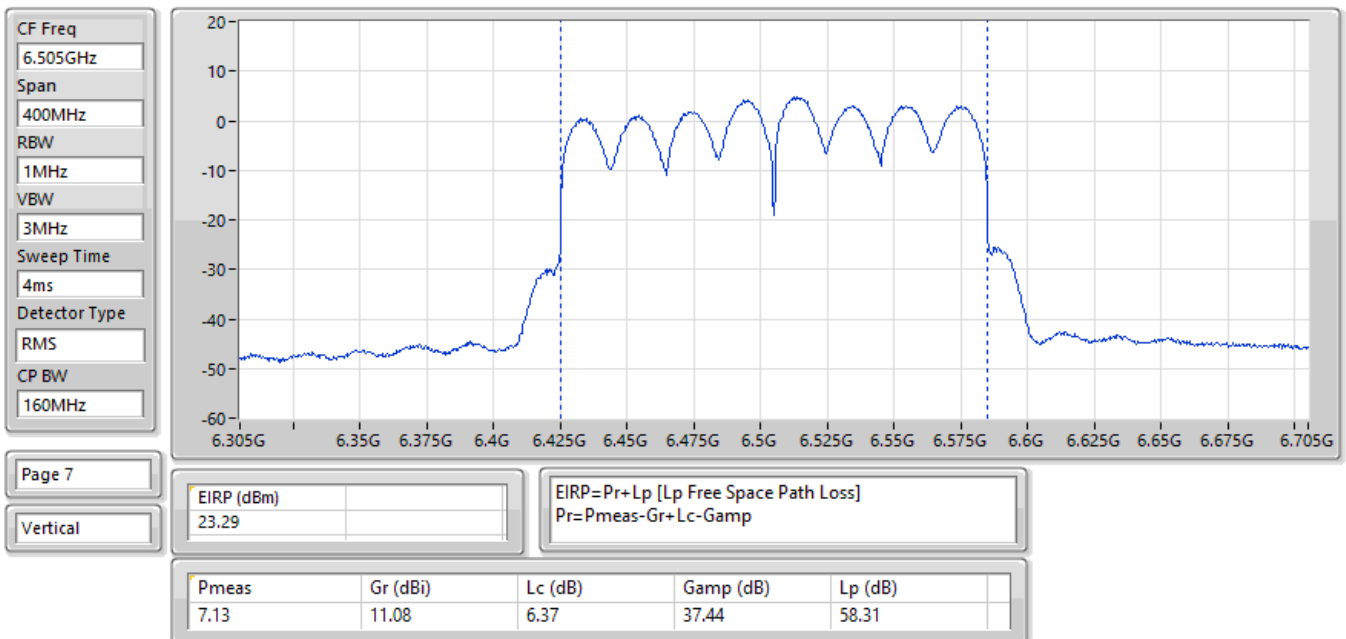


30/01/2026

EIRP:Band:6.7G;11a;BWch:20MHz;Nss:1,(6D);Nant:2;Ch:6695MHz;TX

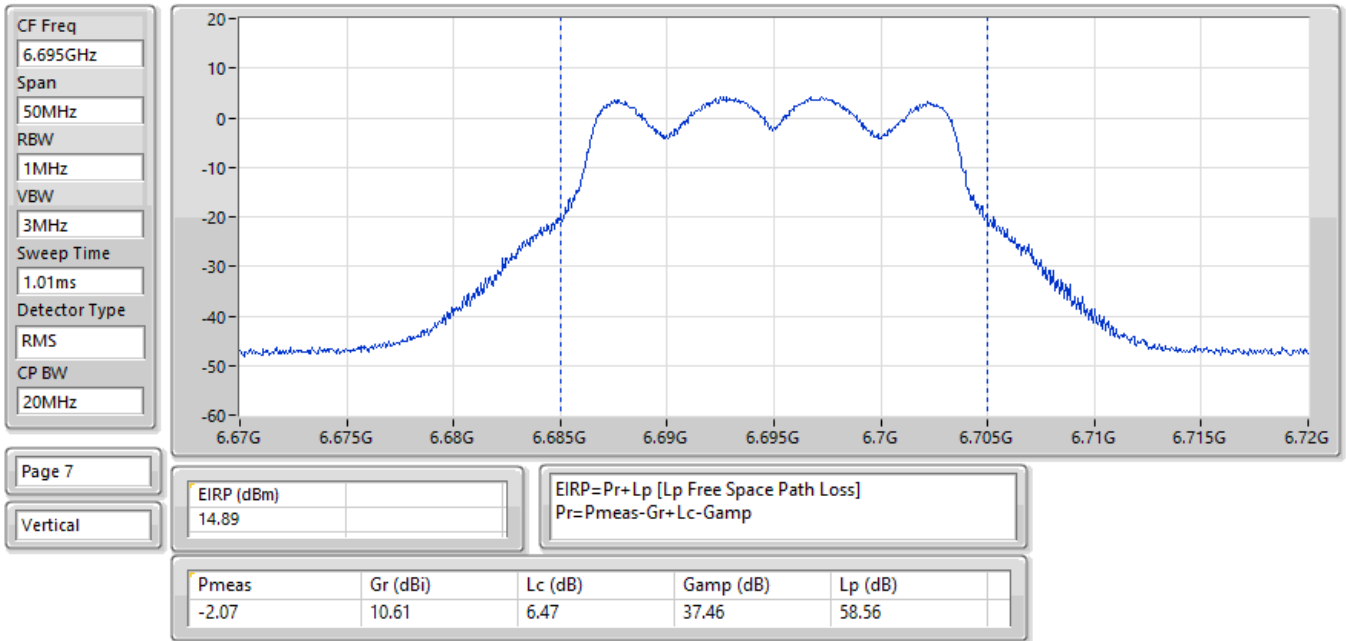


30/01/2026

EIRP:Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6695MHz;TX

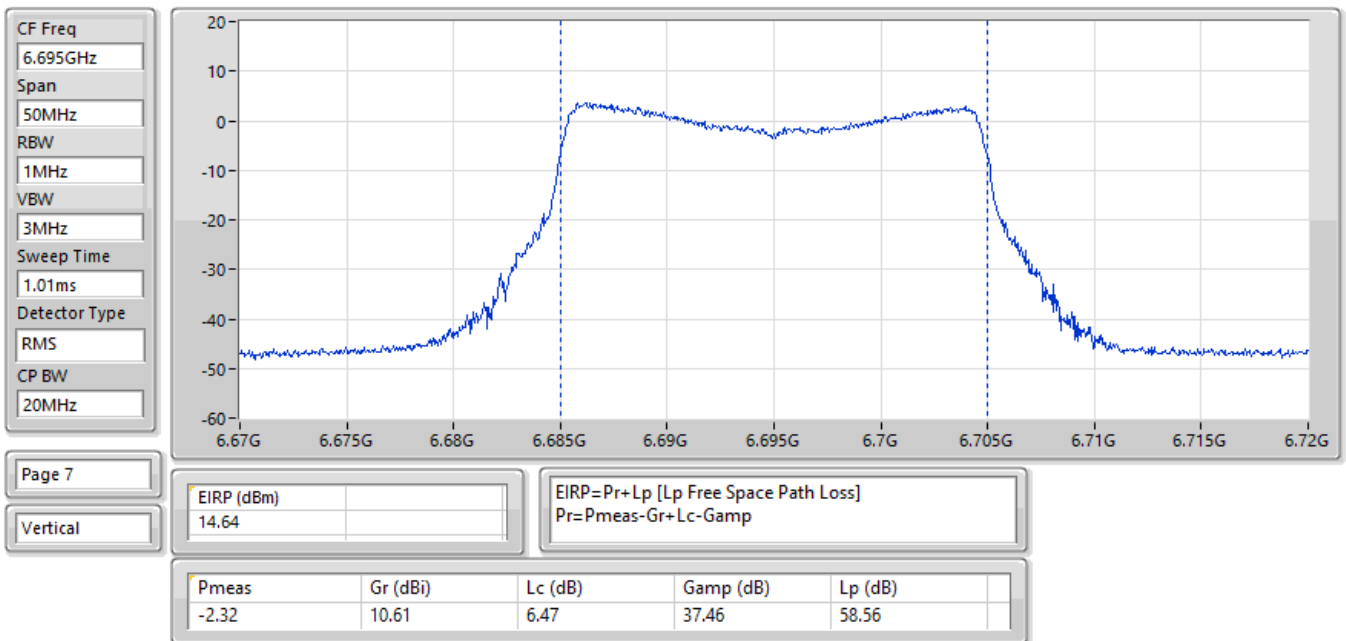


30/01/2026

EIRP:Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6565MHz;TX

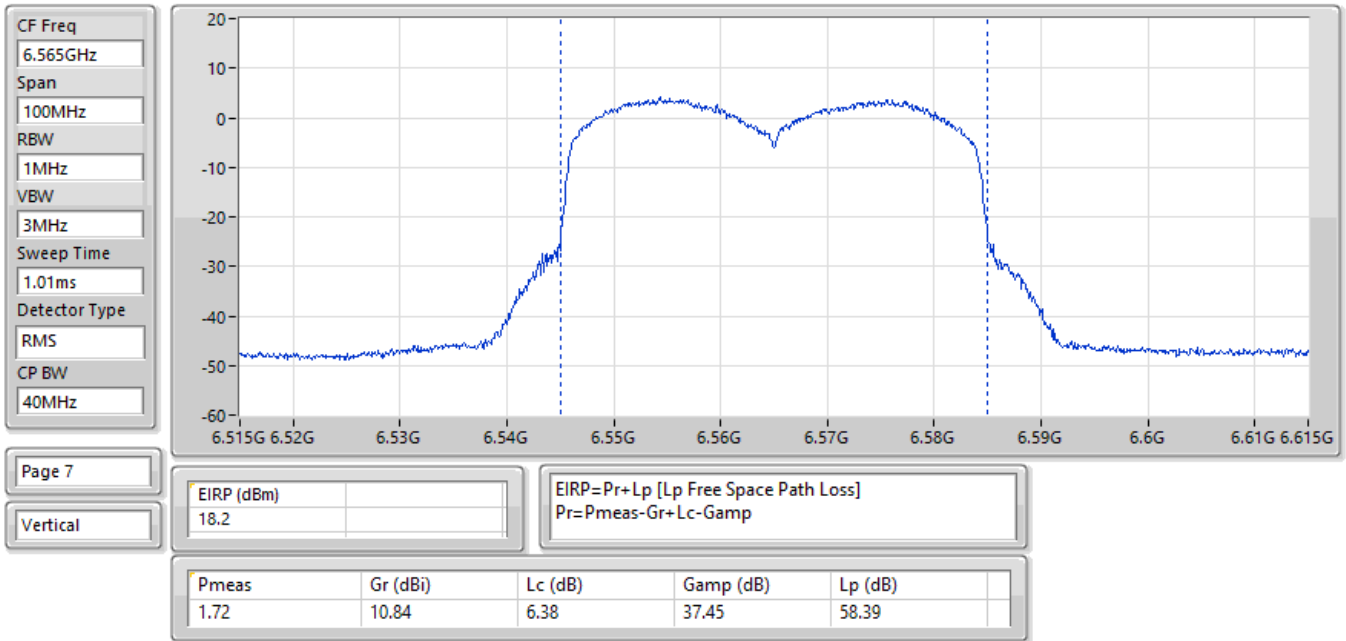


30/01/2026

EIRP:Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6625MHz;TX

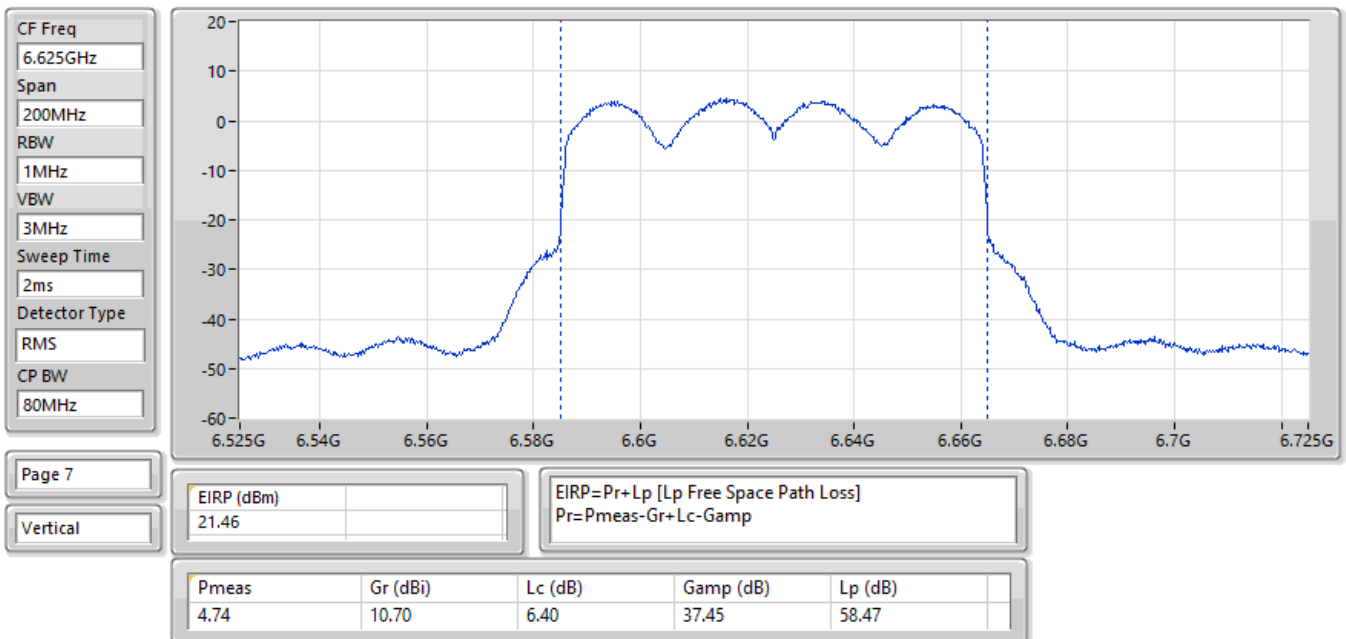


30/01/2026

EIRP;Band:6.7G;be160;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6665MHz;TX

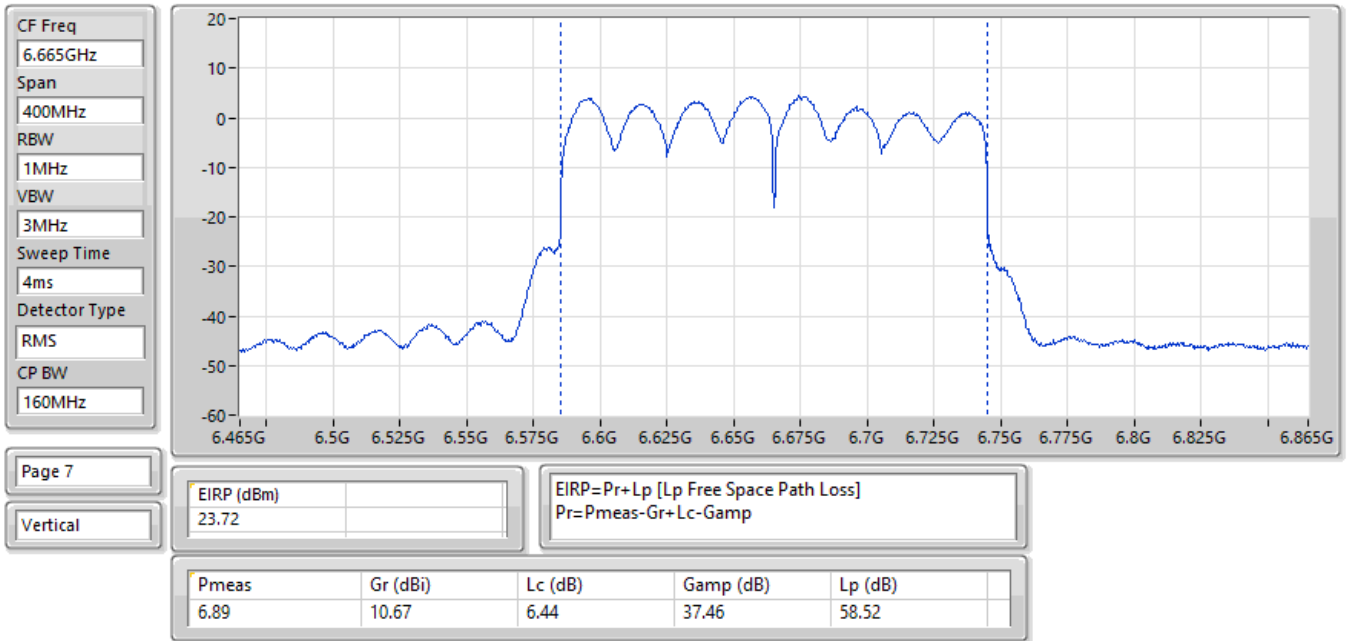


30/01/2026

EIRP;Band:7.0G;11a;BWch:20MHz;Nss:1,(6D);Nant:2;Ch:6995MHz;TX

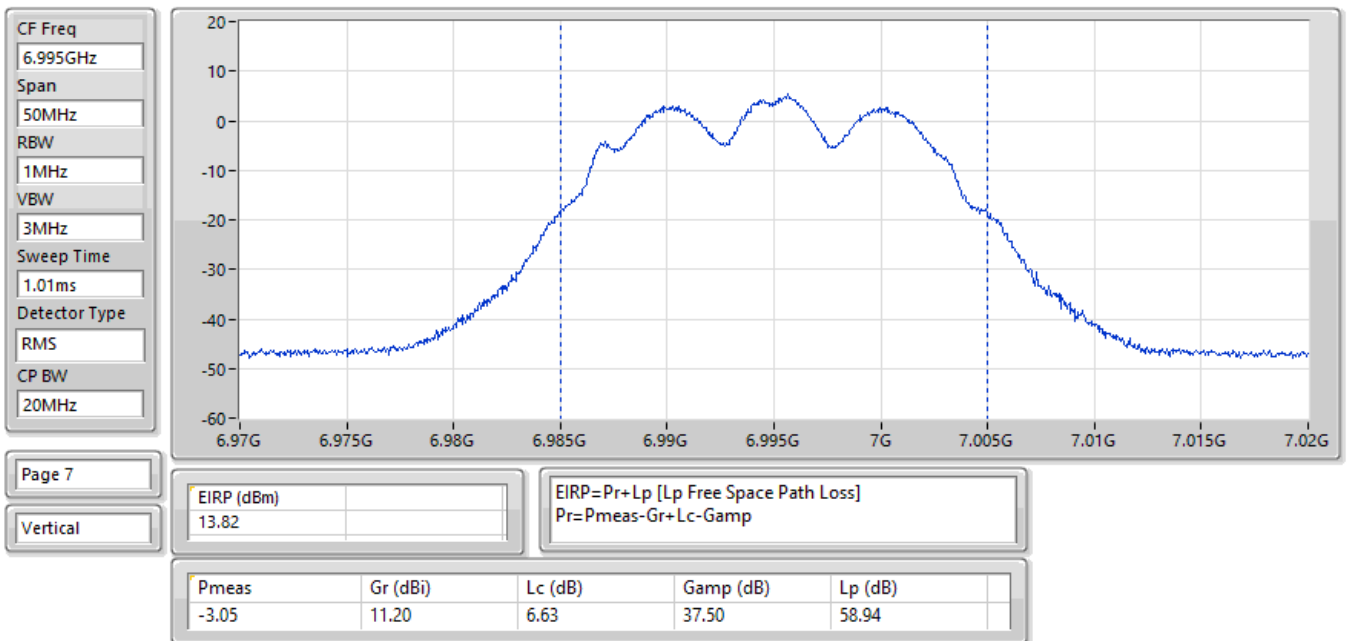


30/01/2026

EIRP:Band:7.0G;be20;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6895MHz;TX

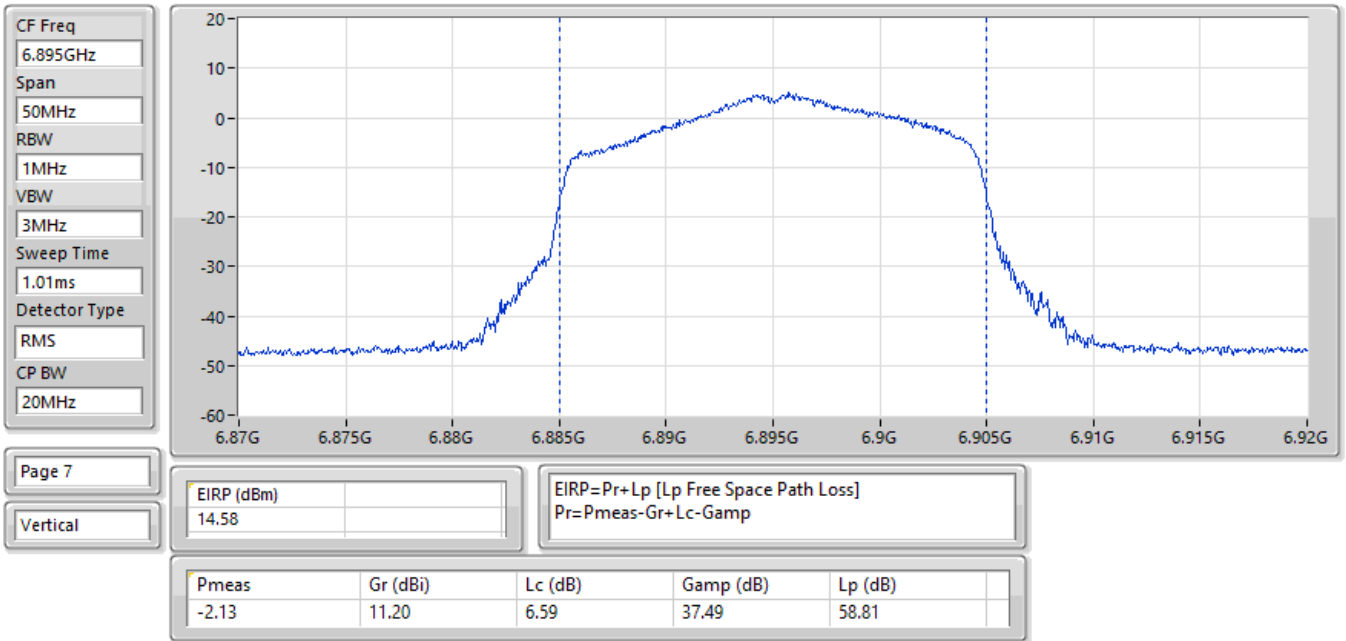


30/01/2026

EIRP:Band:7.0G;be40;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6925MHz;TX

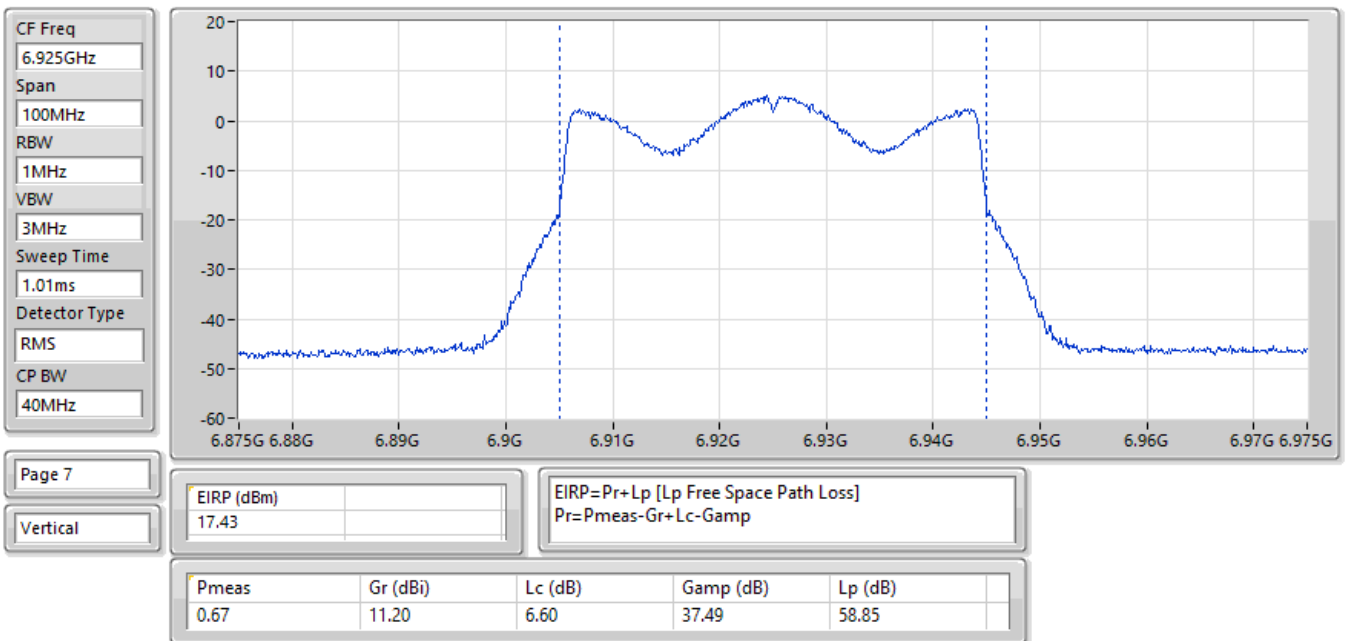


30/01/2026

EIRP;Band:7.0G;be80;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:7025MHz;TX

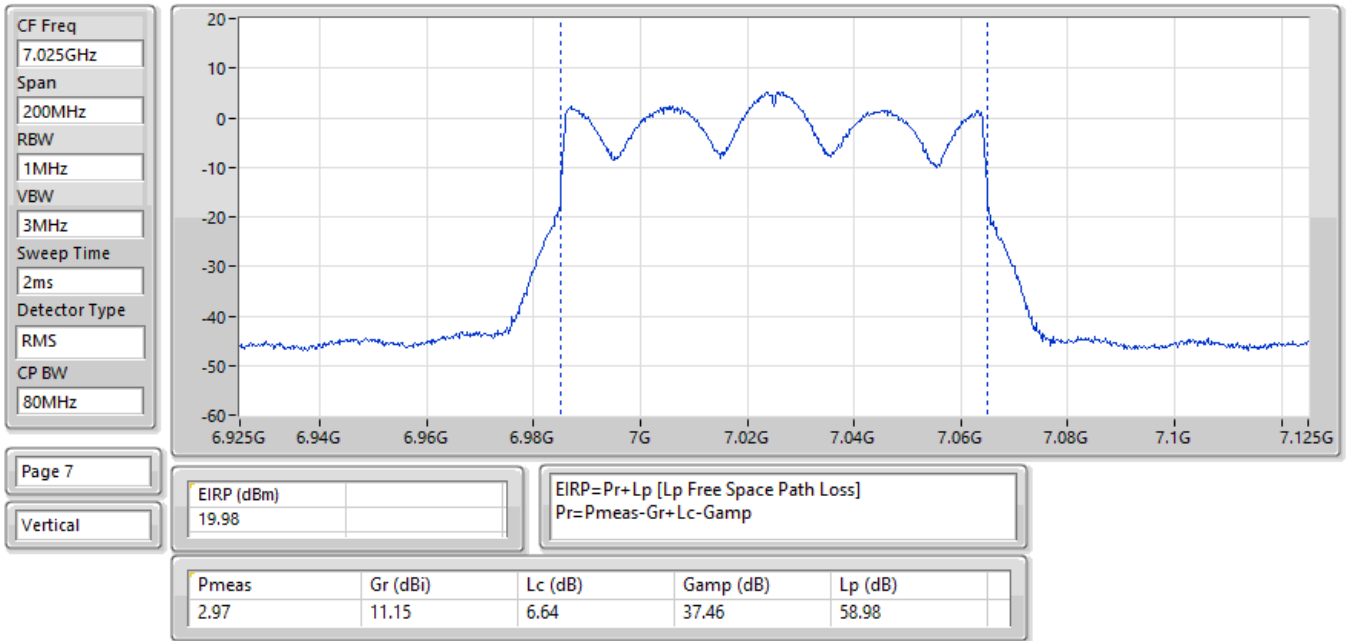

30/01/2026

EIRP;Band:7.0G;be160;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6985MHz;TX

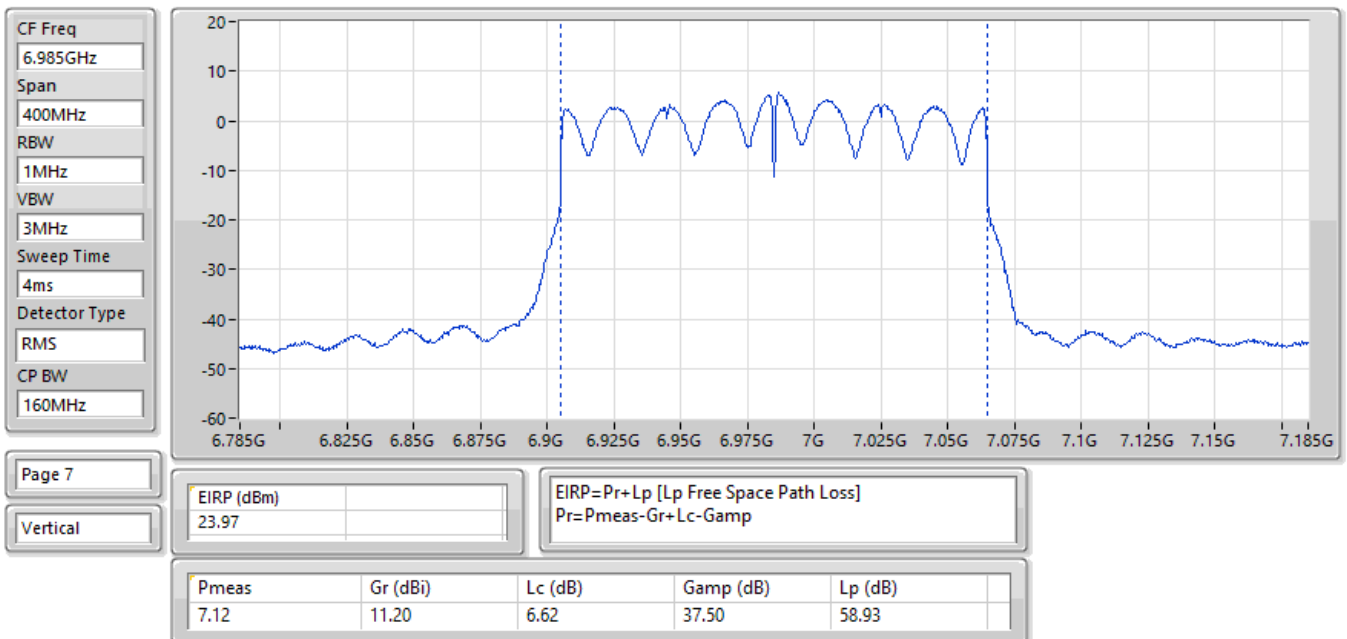

Summary

Mode	EIRP (dBm)	EIRP (W)
5.925-6.425GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	17.85	0.06095
802.11be EHT40-BF_Nss1,(MCS0)_2TX	20.01	0.10023
802.11be EHT80-BF_Nss1,(MCS0)_2TX	22.70	0.18621
802.11be EHT160-BF_Nss1,(MCS0)_2TX	25.75	0.37584
6.425-6.525GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	17.28	0.05346
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.15	0.13032
802.11be EHT80-BF_Nss1,(MCS0)_2TX	23.70	0.23442
802.11be EHT160-BF_Nss1,(MCS0)_2TX	26.34	0.43053
6.525-6.875GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	17.72	0.05916
802.11be EHT40-BF_Nss1,(MCS0)_2TX	21.31	0.13521
802.11be EHT80-BF_Nss1,(MCS0)_2TX	24.55	0.28510
802.11be EHT160-BF_Nss1,(MCS0)_2TX	26.78	0.47643
6.875-7.125GHz	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	17.61	0.05768
802.11be EHT40-BF_Nss1,(MCS0)_2TX	20.56	0.11376
802.11be EHT80-BF_Nss1,(MCS0)_2TX	22.90	0.19498
802.11be EHT160-BF_Nss1,(MCS0)_2TX	27.02	0.50350

Result

Mode	Result	EIRP (dBm)	EIRP Limit (dBm)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-
5955MHz	Pass	17.85	30.00
6195MHz	Pass	16.96	30.00
6415MHz	Pass	16.90	30.00
6435MHz	Pass	16.97	30.00
6475MHz	Pass	17.28	30.00
6515MHz	Pass	17.21	30.00
6535MHz	Pass	17.51	30.00
6695MHz	Pass	17.72	30.00
6875MHz Straddle 6.525-6.875GHz	Pass	17.55	30.00
6895MHz	Pass	17.61	30.00
6995MHz	Pass	17.54	30.00
7095MHz	Pass	17.25	30.00
7115MHz	Pass	16.63	30.00
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-
5965MHz	Pass	20.01	30.00
6205MHz	Pass	19.73	30.00
6405MHz	Pass	19.48	30.00
6445MHz	Pass	20.29	30.00
6485MHz	Pass	20.85	30.00
6525MHz Straddle 6.425-6.525GHz	Pass	21.15	30.00
6565MHz	Pass	21.31	30.00
6685MHz	Pass	20.93	30.00
6885MHz Straddle 6.525-6.875GHz	Pass	20.34	30.00
6925MHz	Pass	20.56	30.00
7005MHz	Pass	20.19	30.00
7085MHz	Pass	19.80	30.00
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-
5985MHz	Pass	22.07	30.00
6225MHz	Pass	21.83	30.00
6385MHz	Pass	22.70	30.00
6465MHz	Pass	23.60	30.00
6545MHz Straddle 6.425-6.525GHz	Pass	23.70	30.00
6625MHz	Pass	24.55	30.00
6705MHz	Pass	23.87	30.00
6785MHz	Pass	22.59	30.00
6865MHz Straddle 6.525-6.875GHz	Pass	22.42	30.00
6945MHz	Pass	22.21	30.00
7025MHz	Pass	22.90	30.00
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-
6025MHz	Pass	25.53	30.00
6185MHz	Pass	25.75	30.00
6345MHz	Pass	25.61	30.00
6505MHz Straddle 6.425-6.525GHz	Pass	26.34	30.00
6665MHz	Pass	26.78	30.00
6825MHz Straddle 6.525-6.875GHz	Pass	25.93	30.00
6985MHz	Pass	27.02	30.00

DG = Directional Gain; Port X = Port X output power
 Inf = There's no restriction for the limit.

30/01/2026

EIRP;Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:5955MHz;TX

CF Freq
5.955GHz

Span
50MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
20MHz

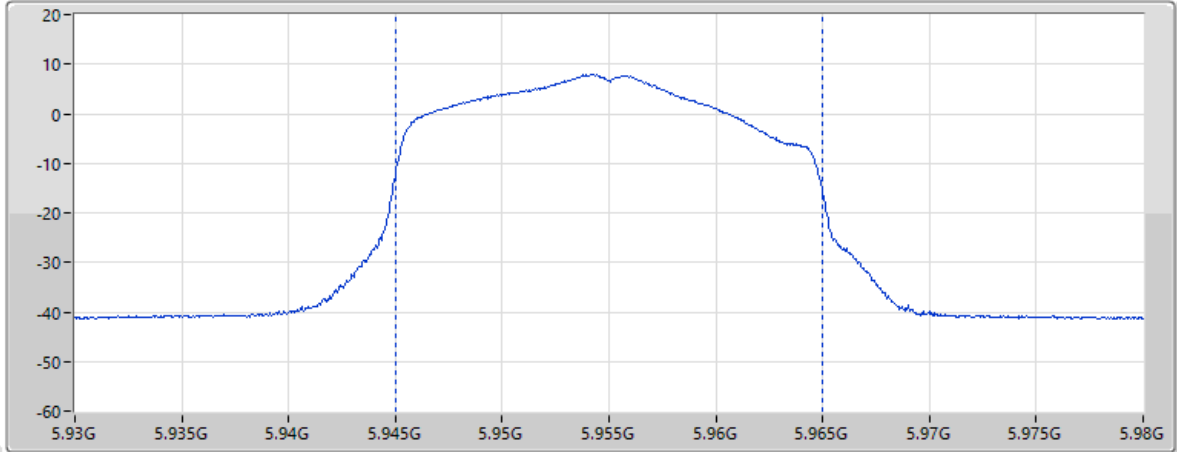

Page 7

Vertical

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
17.85		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
3.49	11.41	6.07	37.84	57.54

30/01/2026

EIRP;Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:5965MHz;TX

CF Freq
5.965GHz

Span
100MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
40MHz

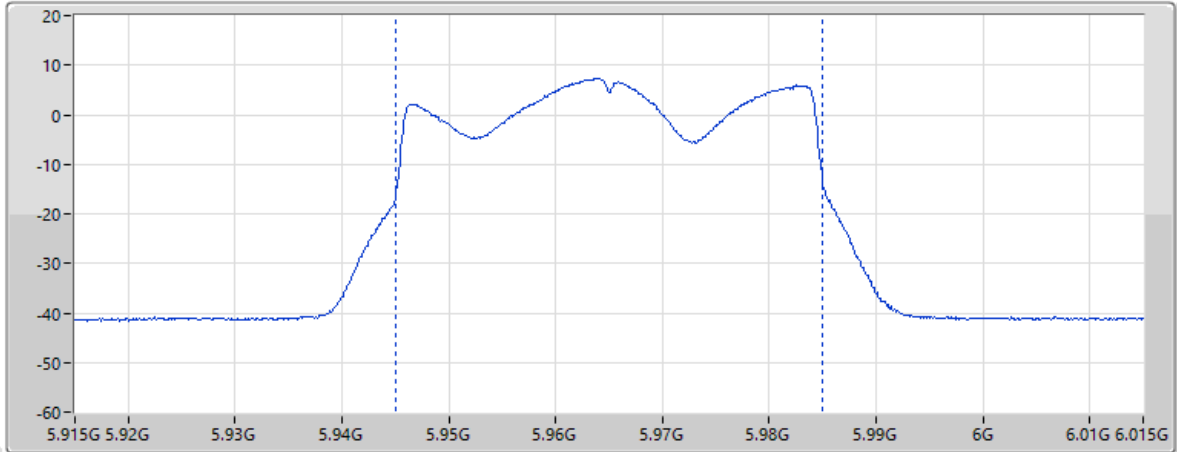


Page 7

Vertical

EIRP (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
20.01		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
5.66	11.43	6.07	37.84	57.55


31/01/2026

EIRP;Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6385MHz;TX

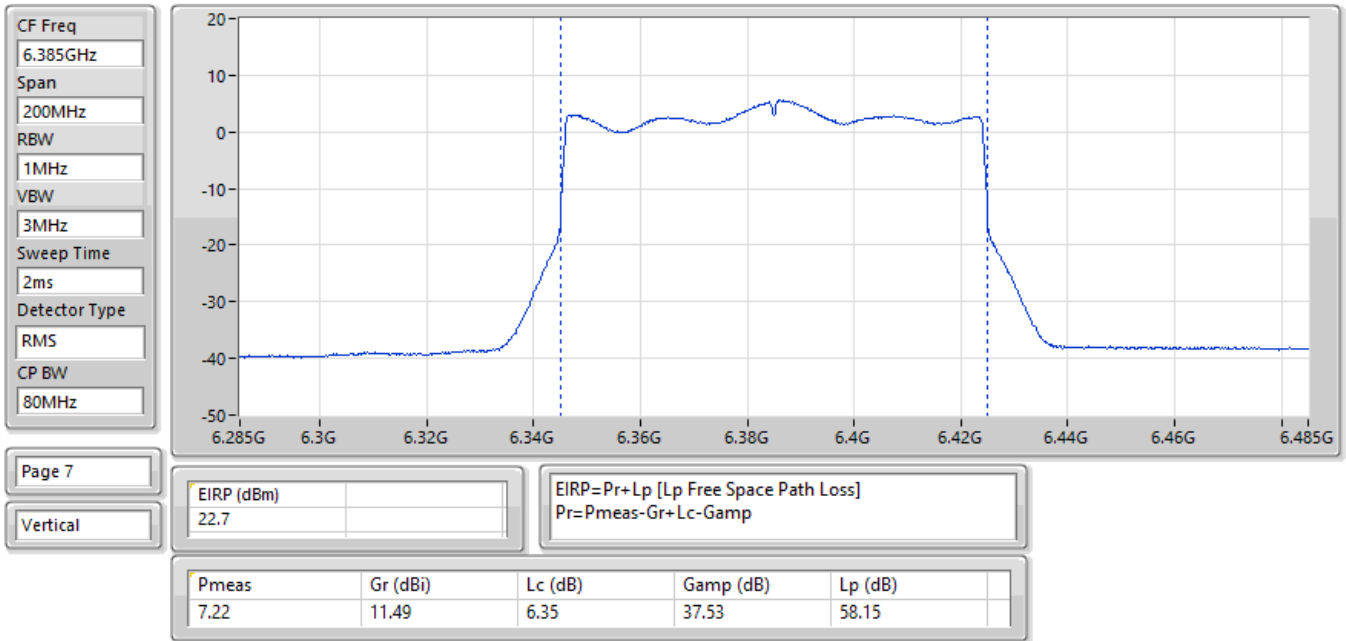


31/01/2026

EIRP;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6185MHz;TX

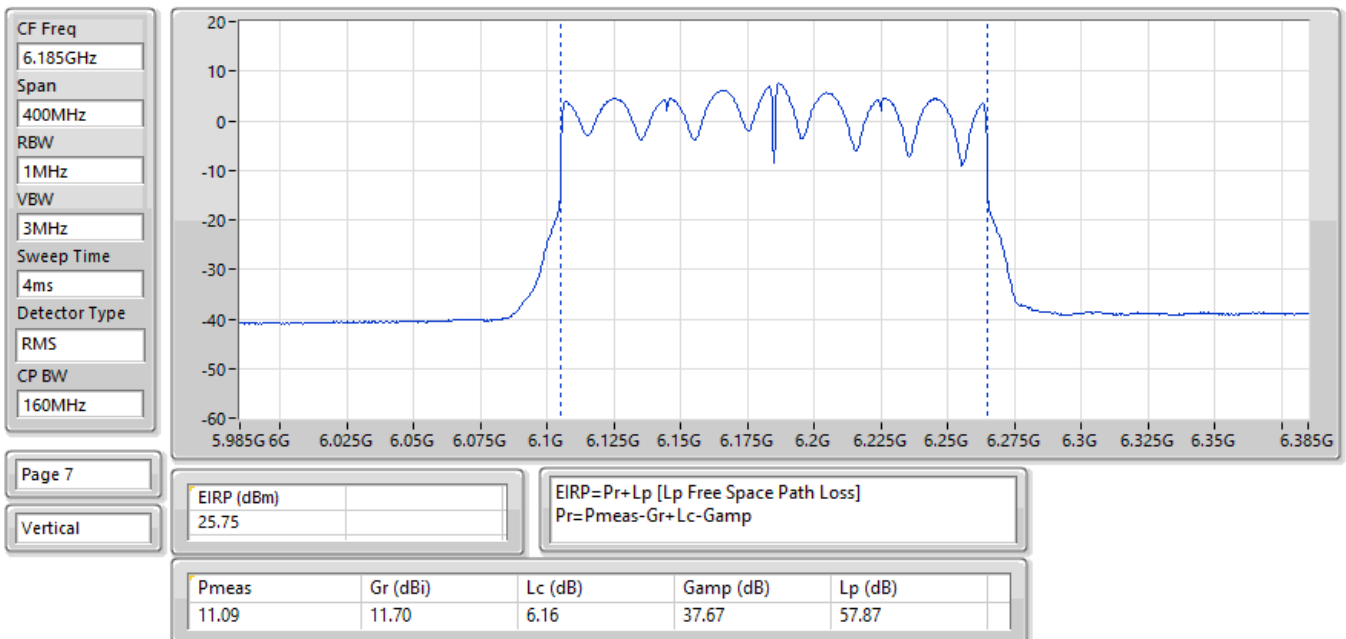


30/01/2026

EIRP:Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6475MHz;TX

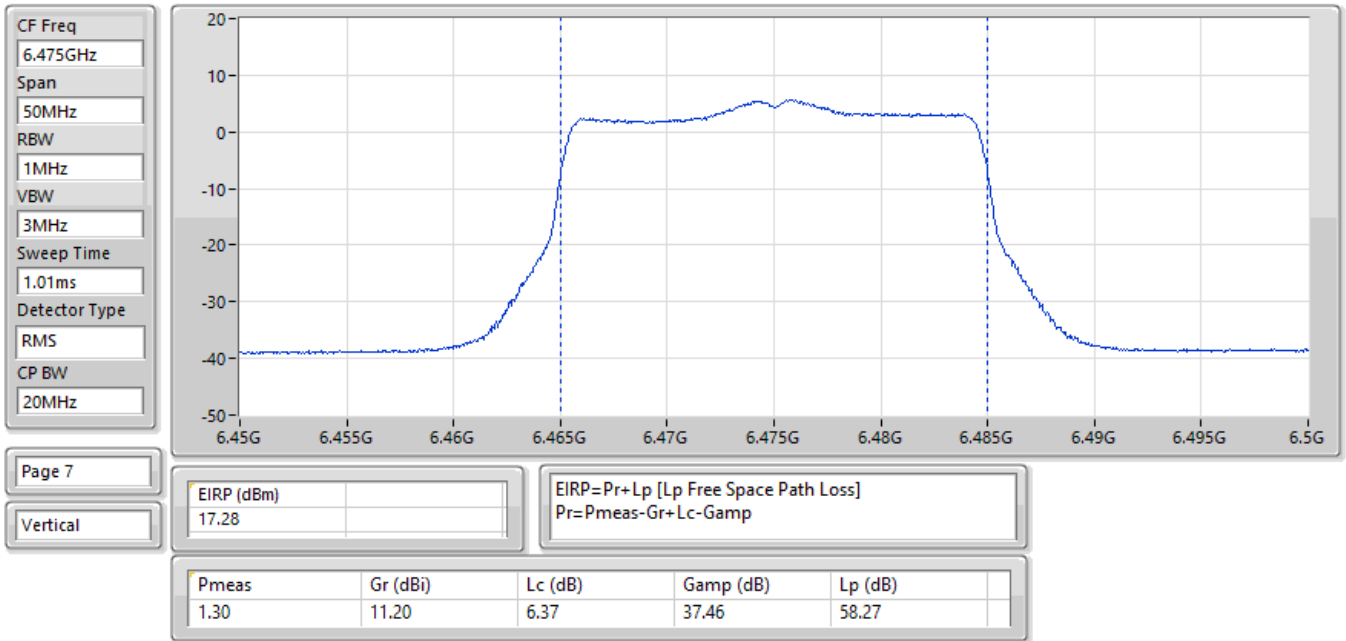


31/01/2026

EIRP:Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6525MHz;TX

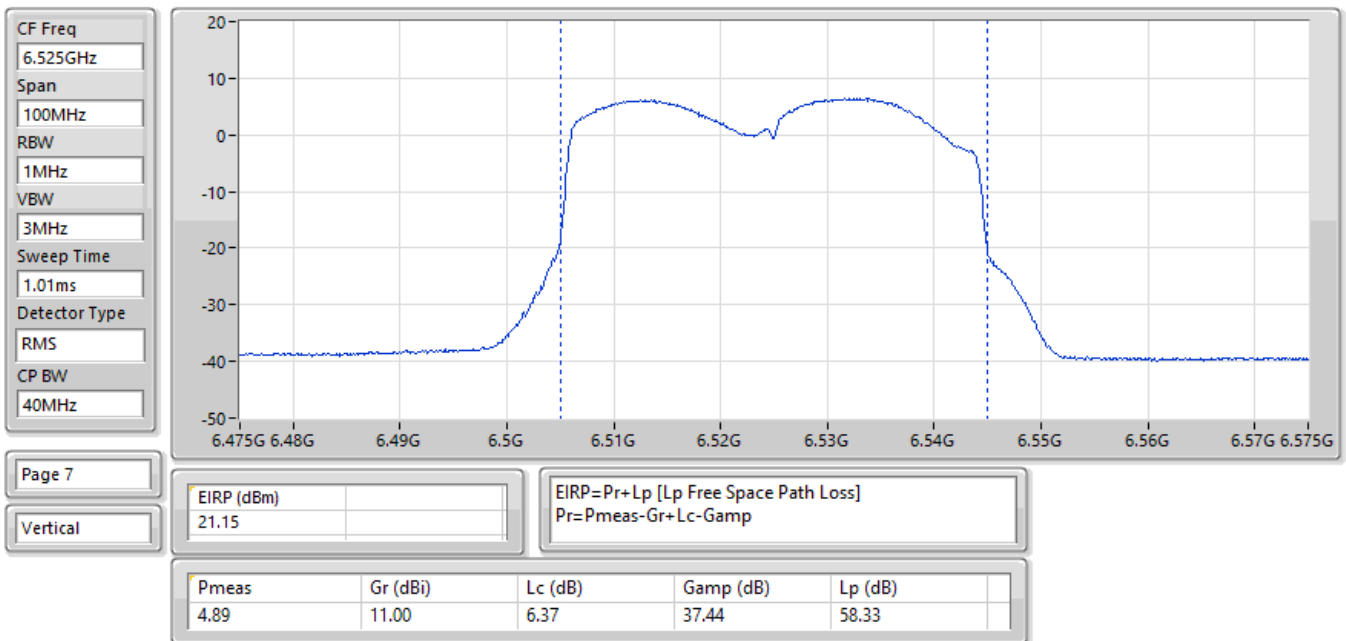


31/01/2026

EIRP;Band:6.4G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6545MHz;TX

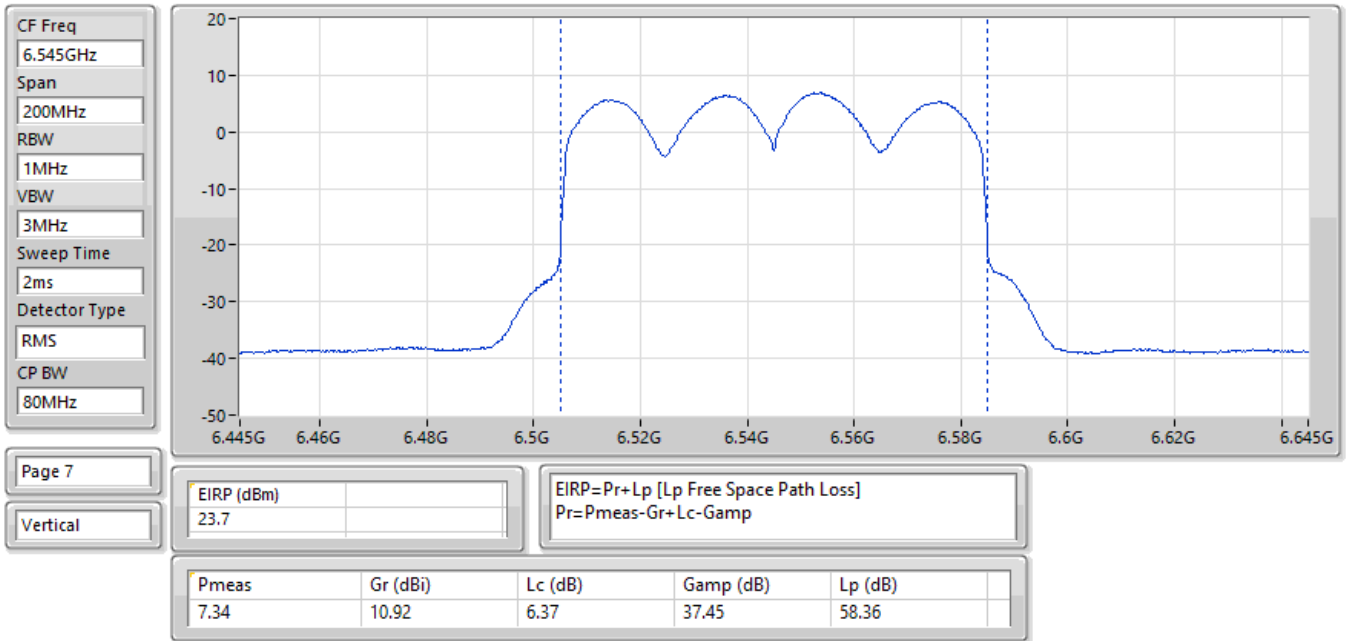


31/01/2026

EIRP;Band:6.4G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6505MHz;TX

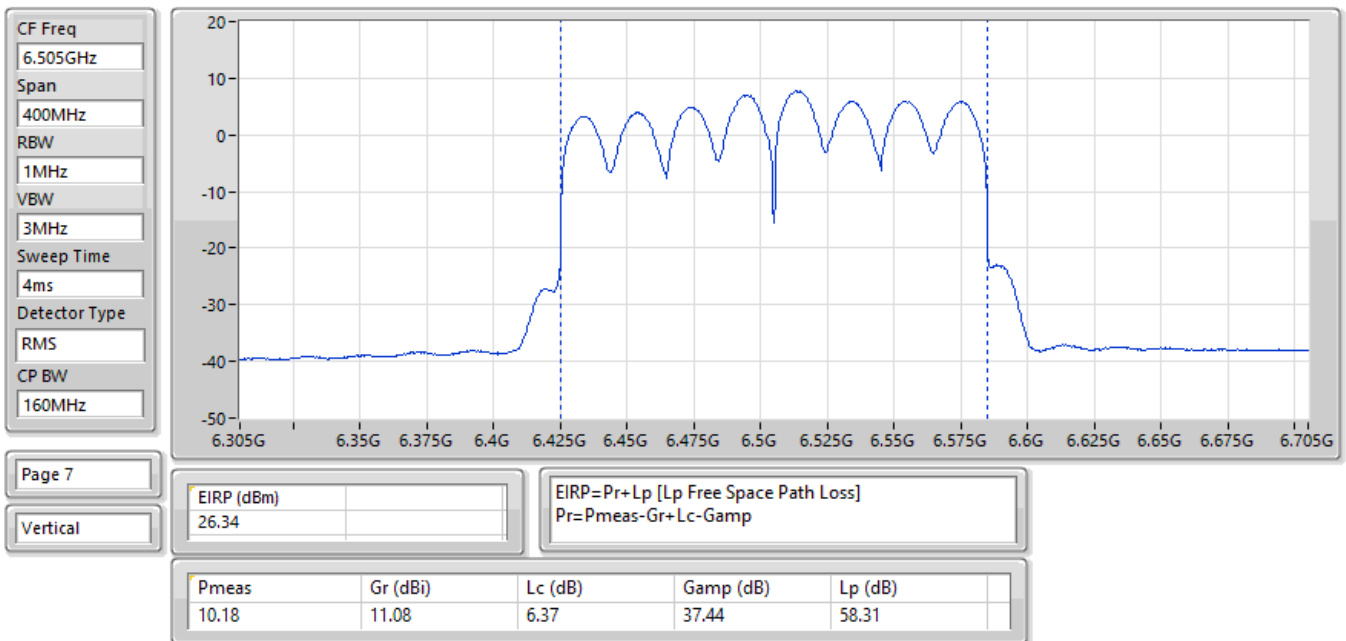


30/01/2026

EIRP:Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6695MHz;TX

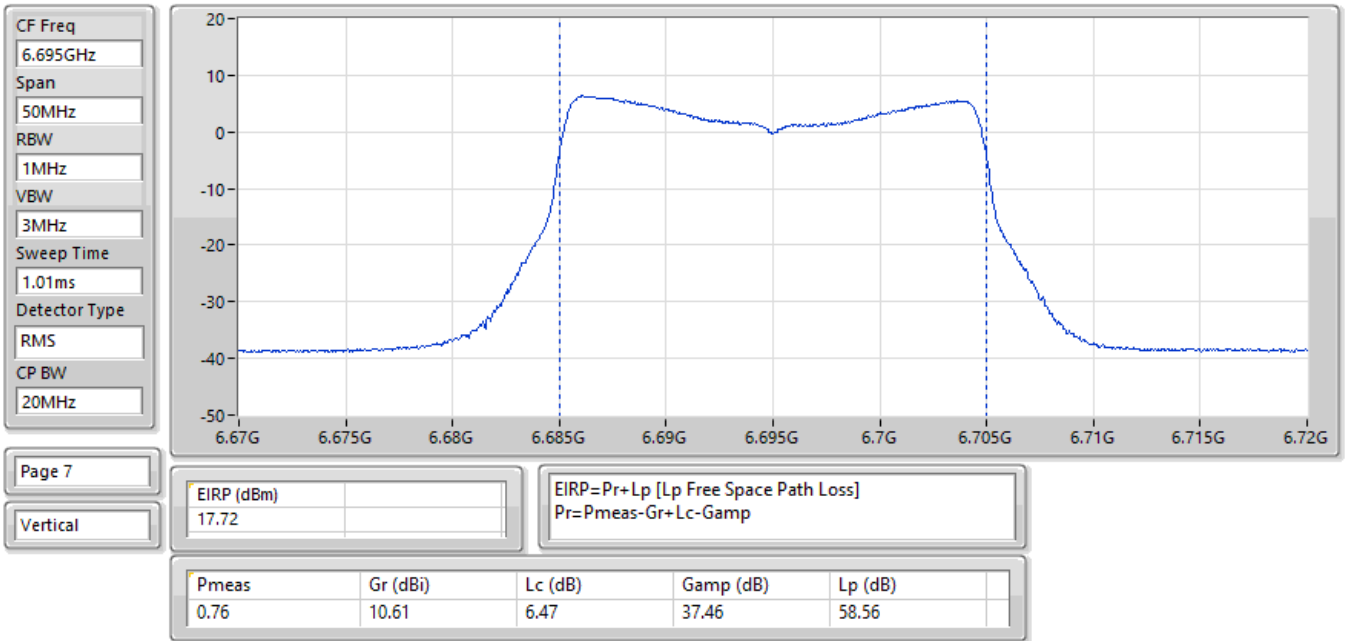


31/01/2026

EIRP:Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6565MHz;TX

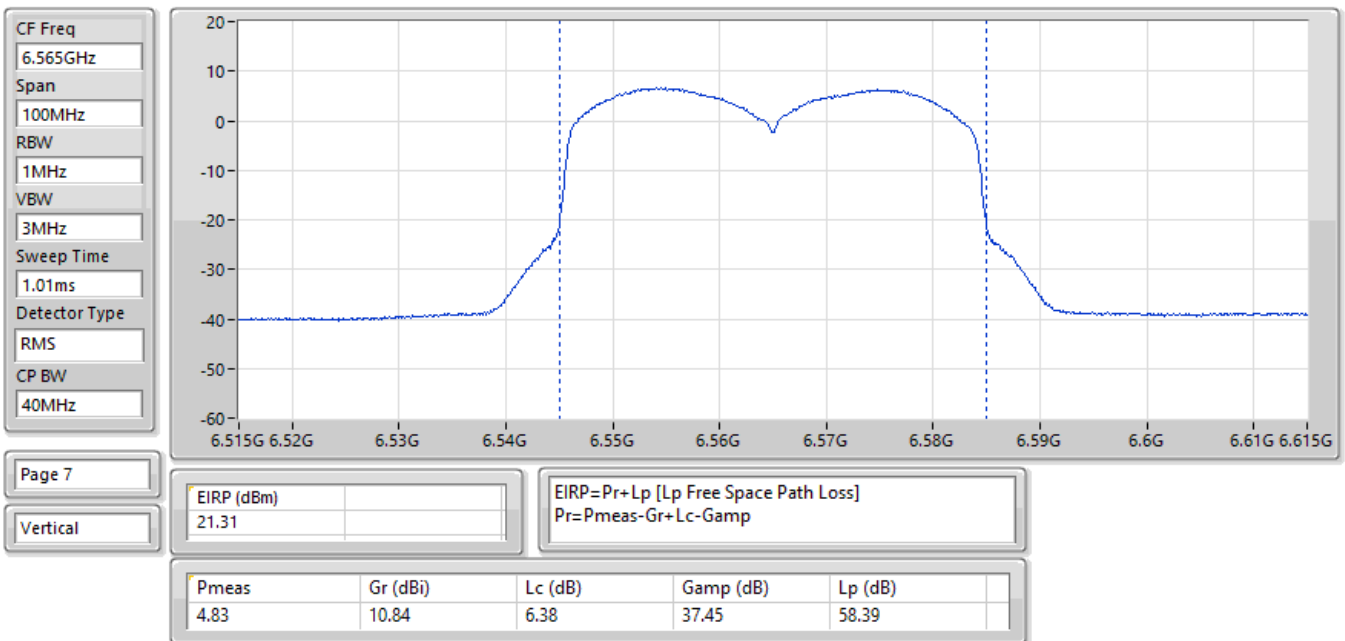


31/01/2026

EIRP;Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6625MHz;TX

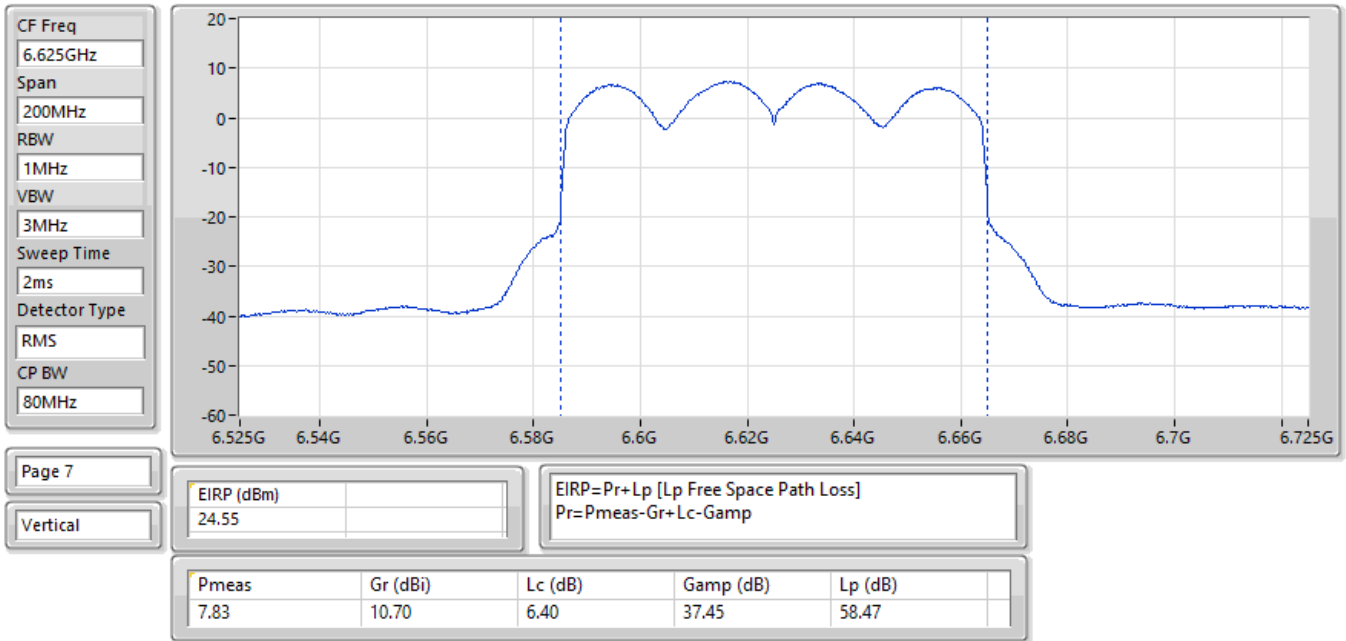


31/01/2026

EIRP;Band:6.7G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6665MHz;TX

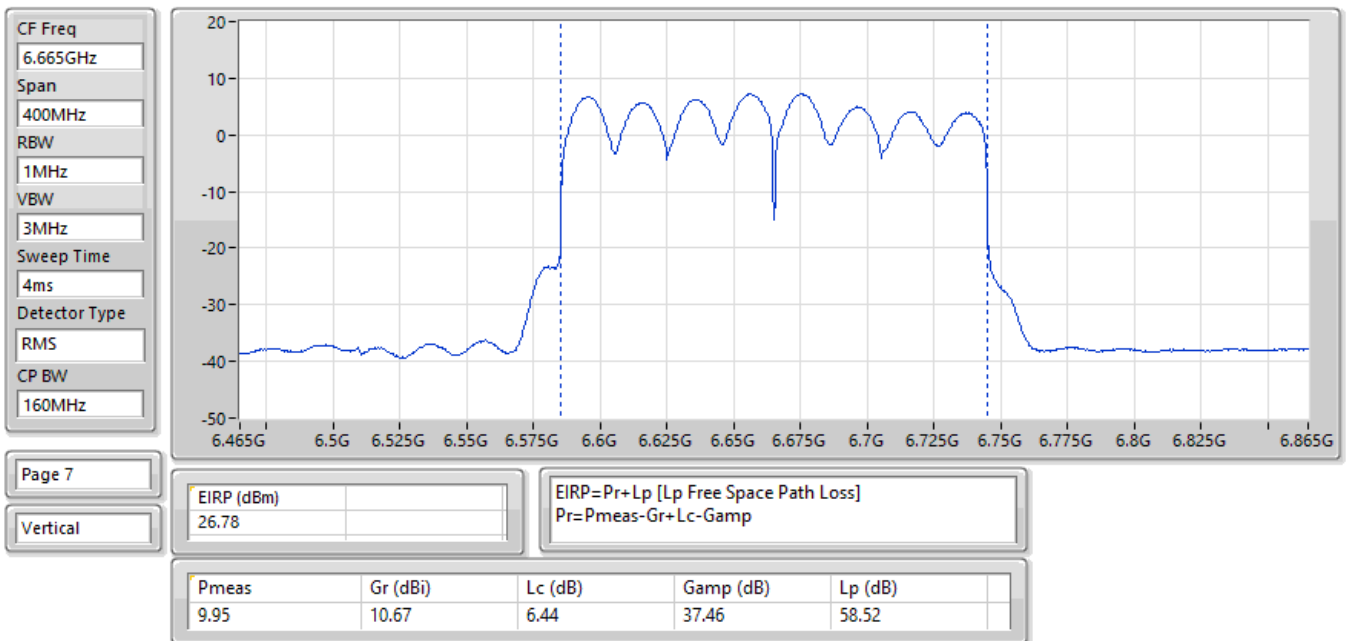


30/01/2026

EIRP:Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6895MHz;TX

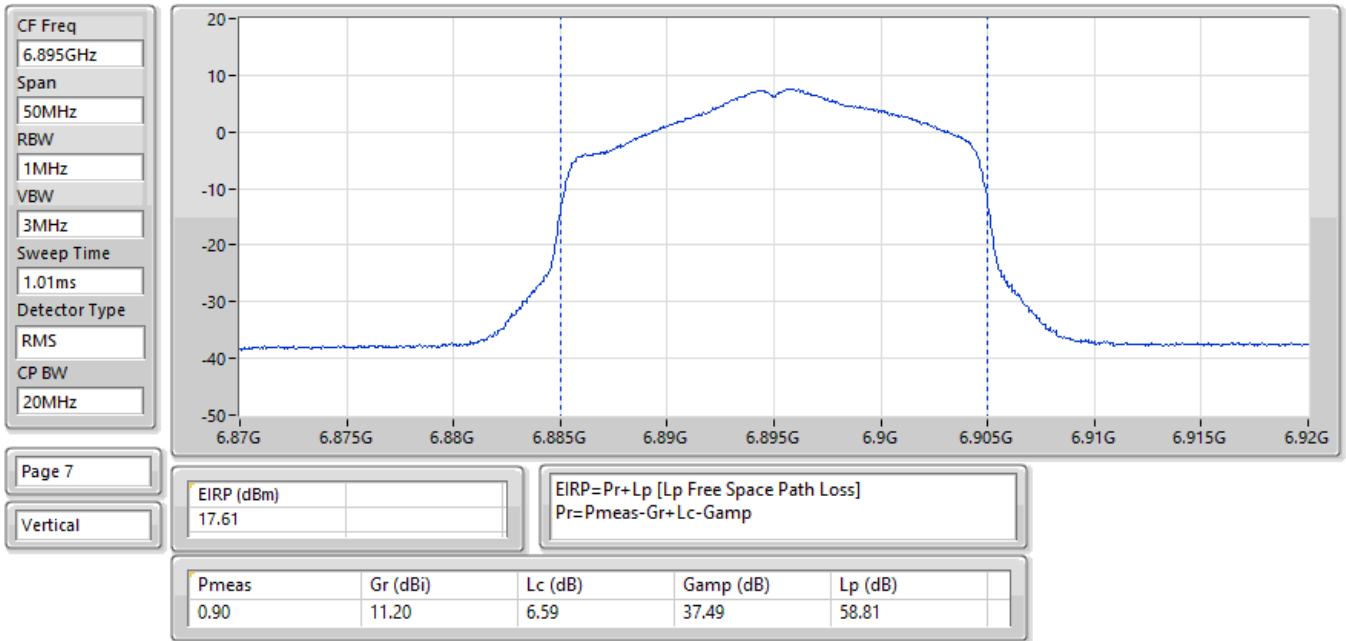


31/01/2026

EIRP:Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6925MHz;TX

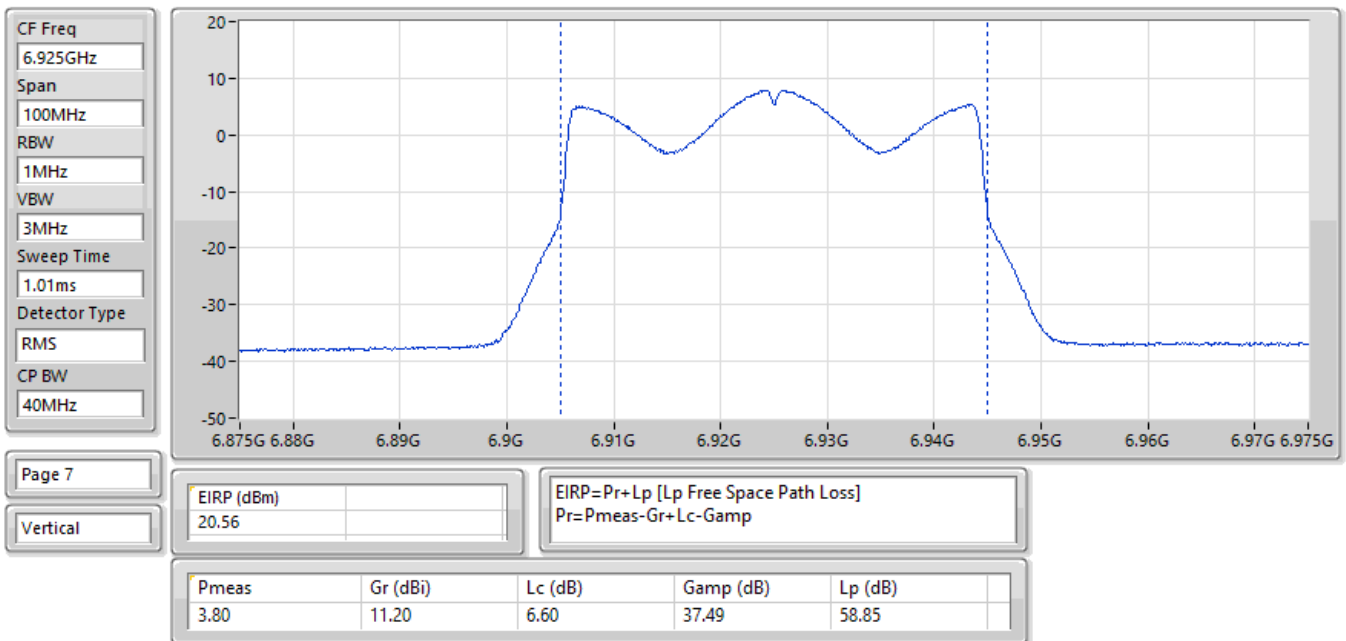


31/01/2026

EIRP;Band:7.0G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:7025MHz;TX

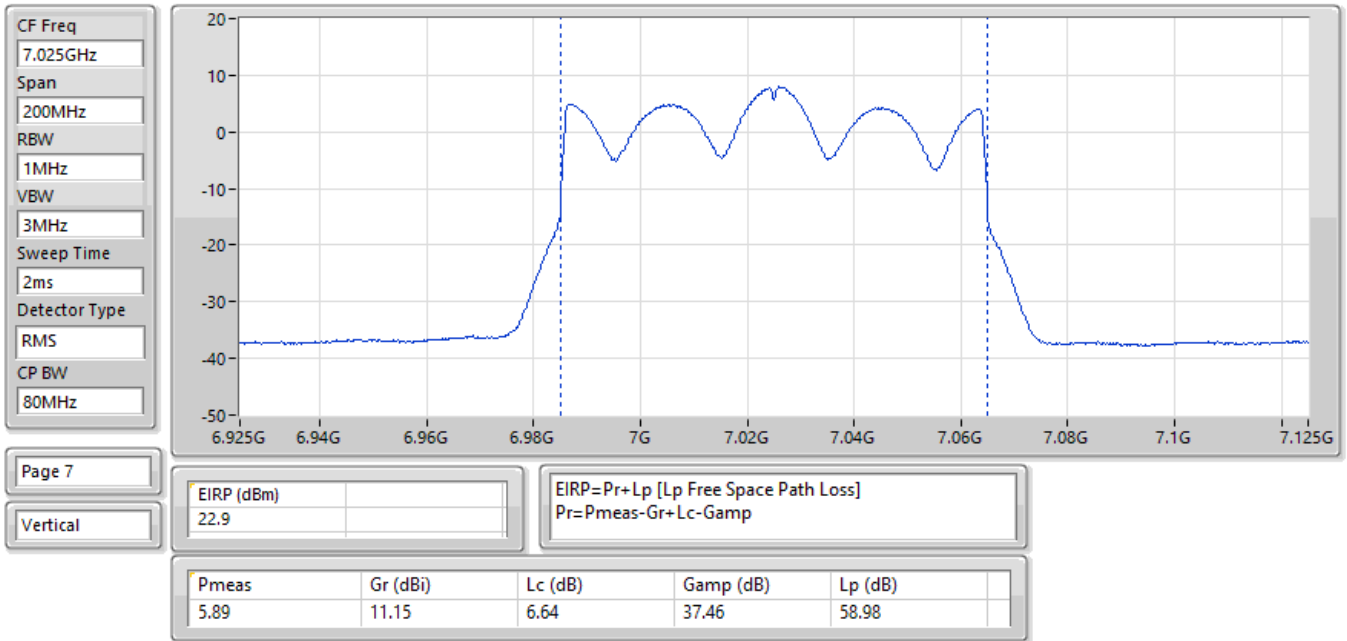

31/01/2026

EIRP;Band:7.0G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6985MHz;TX

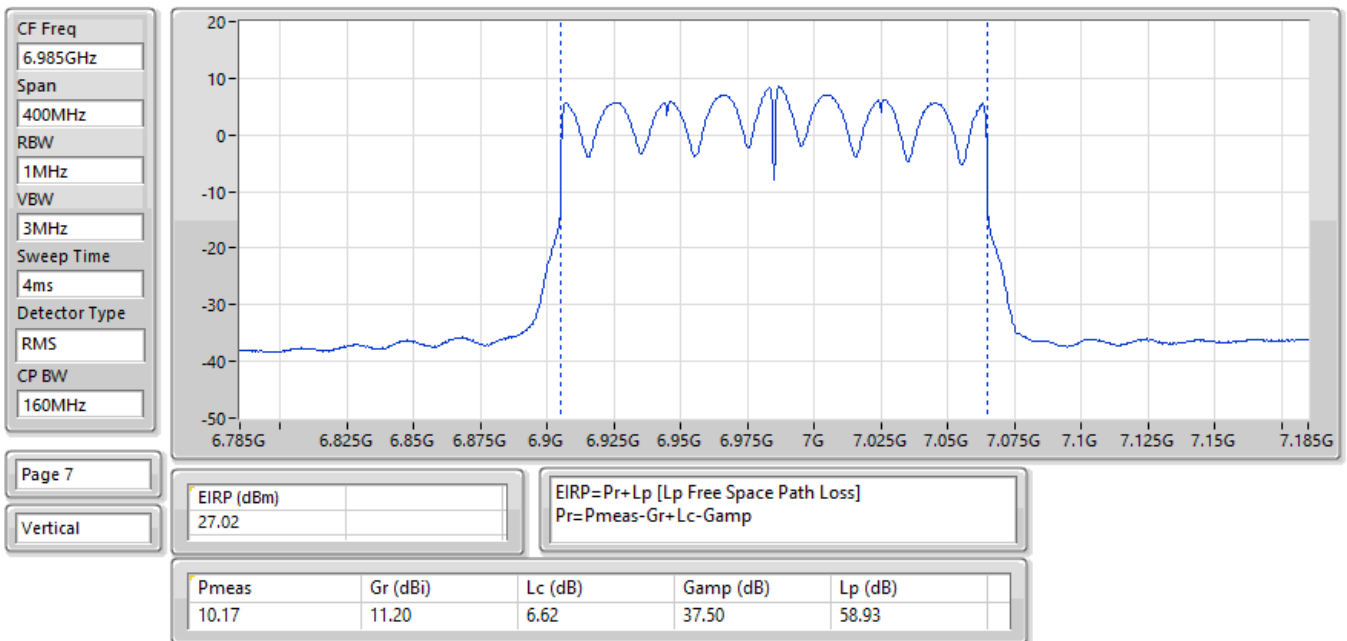

**Summary**

Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11a_Nss1,(6Mbps)_2TX	4.94
802.11be EHT20_Nss1,(MCS0)_2TX	4.71
802.11be EHT40_Nss1,(MCS0)_2TX	4.91
802.11be EHT80_Nss1,(MCS0)_2TX	4.93
802.11be EHT160_Nss1,(MCS0)_2TX	4.76
6.425-6.525GHz	-
802.11a_Nss1,(6Mbps)_2TX	4.89
802.11be EHT20_Nss1,(MCS0)_2TX	4.77
802.11be EHT40_Nss1,(MCS0)_2TX	4.88
802.11be EHT80_Nss1,(MCS0)_2TX	4.64
802.11be EHT160_Nss1,(MCS0)_2TX	4.88
6.525-6.875GHz	-
802.11a_Nss1,(6Mbps)_2TX	4.95
802.11be EHT20_Nss1,(MCS0)_2TX	4.85
802.11be EHT40_Nss1,(MCS0)_2TX	4.74
802.11be EHT80_Nss1,(MCS0)_2TX	4.79
802.11be EHT160_Nss1,(MCS0)_2TX	4.58
6.875-7.125GHz	-
802.11a_Nss1,(6Mbps)_2TX	4.92
802.11be EHT20_Nss1,(MCS0)_2TX	4.91
802.11be EHT40_Nss1,(MCS0)_2TX	4.93
802.11be EHT80_Nss1,(MCS0)_2TX	4.91
802.11be EHT160_Nss1,(MCS0)_2TX	4.69

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11a_Nss1,(6Mbps)_2TX	-	-	-
5955MHz	Pass	4.44	5.00
6195MHz	Pass	4.59	5.00
6415MHz	Pass	4.94	5.00
6435MHz	Pass	4.71	5.00
6475MHz	Pass	4.67	5.00
6515MHz	Pass	4.89	5.00
6535MHz	Pass	4.69	5.00
6695MHz	Pass	4.95	5.00
6875MHz Straddle 6.525-6.875GHz	Pass	4.32	5.00
6895MHz	Pass	4.84	5.00
6995MHz	Pass	4.92	5.00
7095MHz	Pass	4.71	5.00
7115MHz	Pass	-0.33	5.00
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-
5955MHz	Pass	4.71	5.00
6195MHz	Pass	4.42	5.00
6415MHz	Pass	4.55	5.00
6435MHz	Pass	4.73	5.00
6475MHz	Pass	4.77	5.00
6515MHz	Pass	4.68	5.00
6535MHz	Pass	4.85	5.00
6695MHz	Pass	4.75	5.00
6875MHz Straddle 6.525-6.875GHz	Pass	4.71	5.00
6895MHz	Pass	4.81	5.00
6995MHz	Pass	4.91	5.00
7095MHz	Pass	4.76	5.00
7115MHz	Pass	4.81	5.00
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-
5965MHz	Pass	4.52	5.00
6205MHz	Pass	4.91	5.00
6405MHz	Pass	4.75	5.00
6445MHz	Pass	4.86	5.00
6485MHz	Pass	4.88	5.00
6525MHz Straddle 6.425-6.525GHz	Pass	4.45	5.00
6565MHz	Pass	4.48	5.00
6685MHz	Pass	4.58	5.00
6885MHz Straddle 6.525-6.875GHz	Pass	4.74	5.00
6925MHz	Pass	4.86	5.00
7005MHz	Pass	4.62	5.00
7085MHz	Pass	4.93	5.00
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-
5985MHz	Pass	4.26	5.00
6225MHz	Pass	4.71	5.00
6385MHz	Pass	4.93	5.00
6465MHz	Pass	4.62	5.00
6545MHz Straddle 6.425-6.525GHz	Pass	4.64	5.00
6625MHz	Pass	4.73	5.00
6705MHz	Pass	4.67	5.00
6785MHz	Pass	4.79	5.00
6865MHz Straddle 6.525-6.875GHz	Pass	4.56	5.00
6945MHz	Pass	4.62	5.00
7025MHz	Pass	4.91	5.00
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-
6025MHz	Pass	4.41	5.00



Radiated PSD_Non-Beamforming


Appendix D.1

Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
6185MHz	Pass	4.76	5.00
6345MHz	Pass	4.37	5.00
6505MHz Straddle 6.425-6.525GHz	Pass	4.88	5.00
6665MHz	Pass	4.50	5.00
6825MHz Straddle 6.525-6.875GHz	Pass	4.58	5.00
6985MHz	Pass	4.69	5.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.


30/01/2026

EIRP PSD;Band:6.2G;11a;BWch:20MHz;Nss:1,(6D);Nant:2;Ch:6415MHz;TX

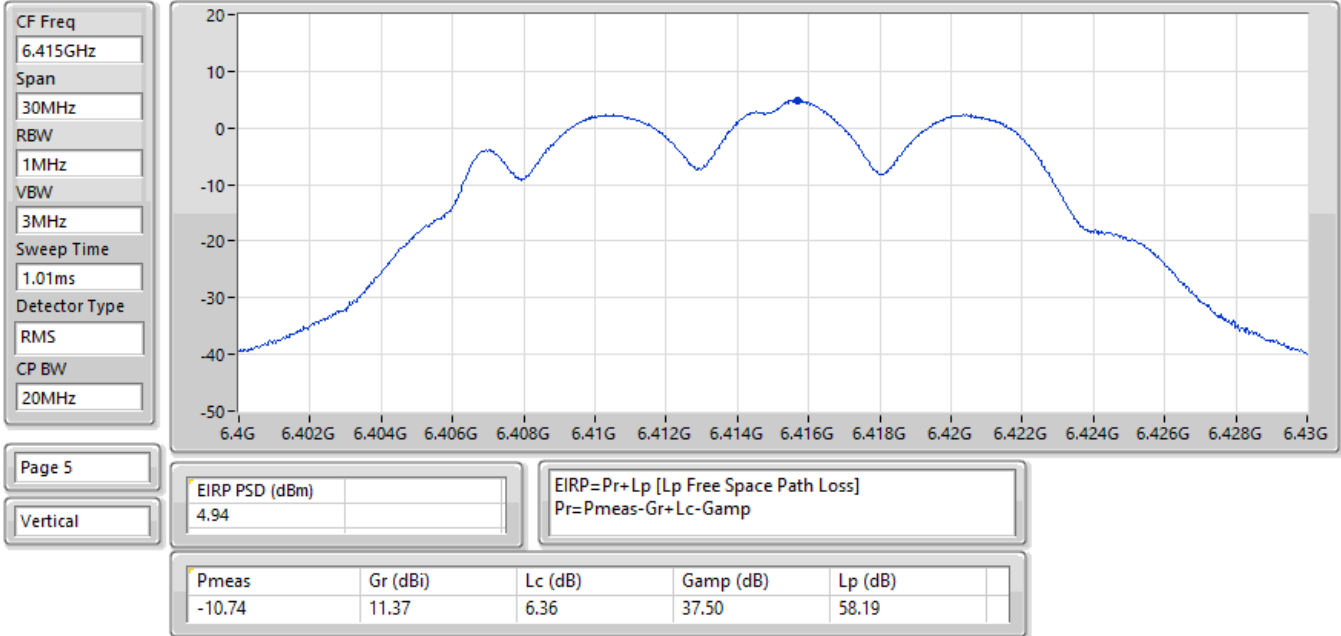


30/01/2026

EIRP PSD;Band:6.2G;be20;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:5955MHz;TX

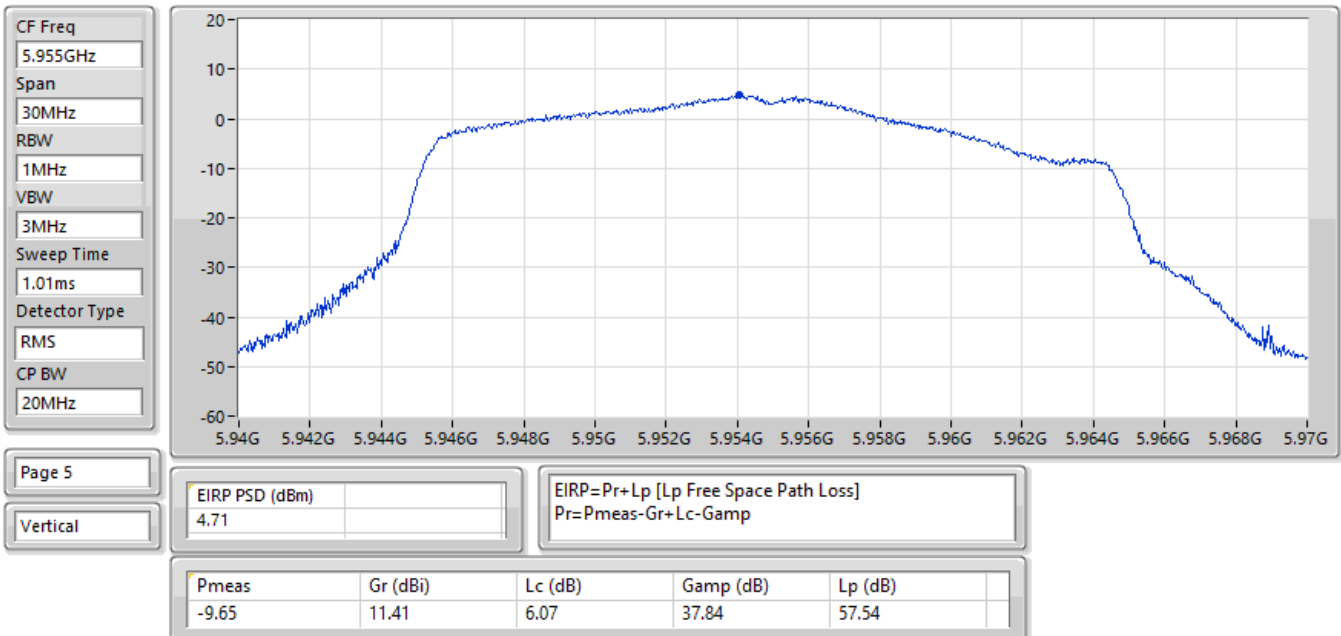


31/01/2026

EIRP PSD;Band:6.2G;be40;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6205MHz;TX

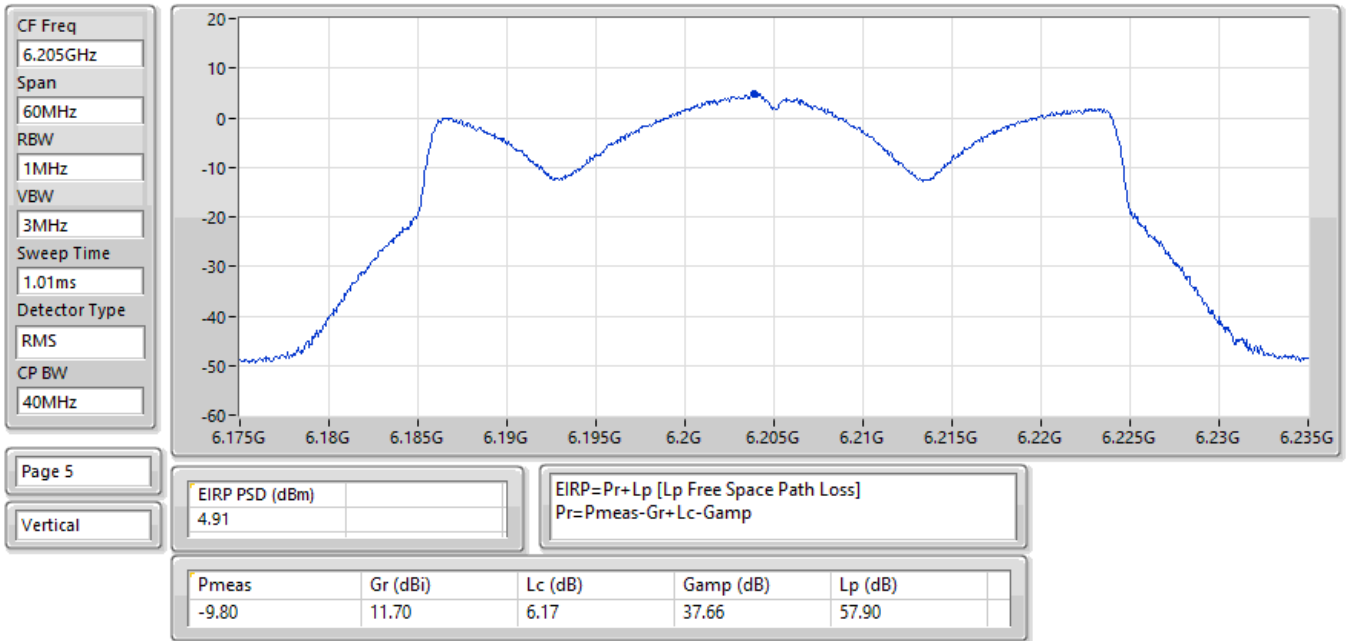


31/01/2026

EIRP PSD;Band:6.2G;be80;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6385MHz;TX

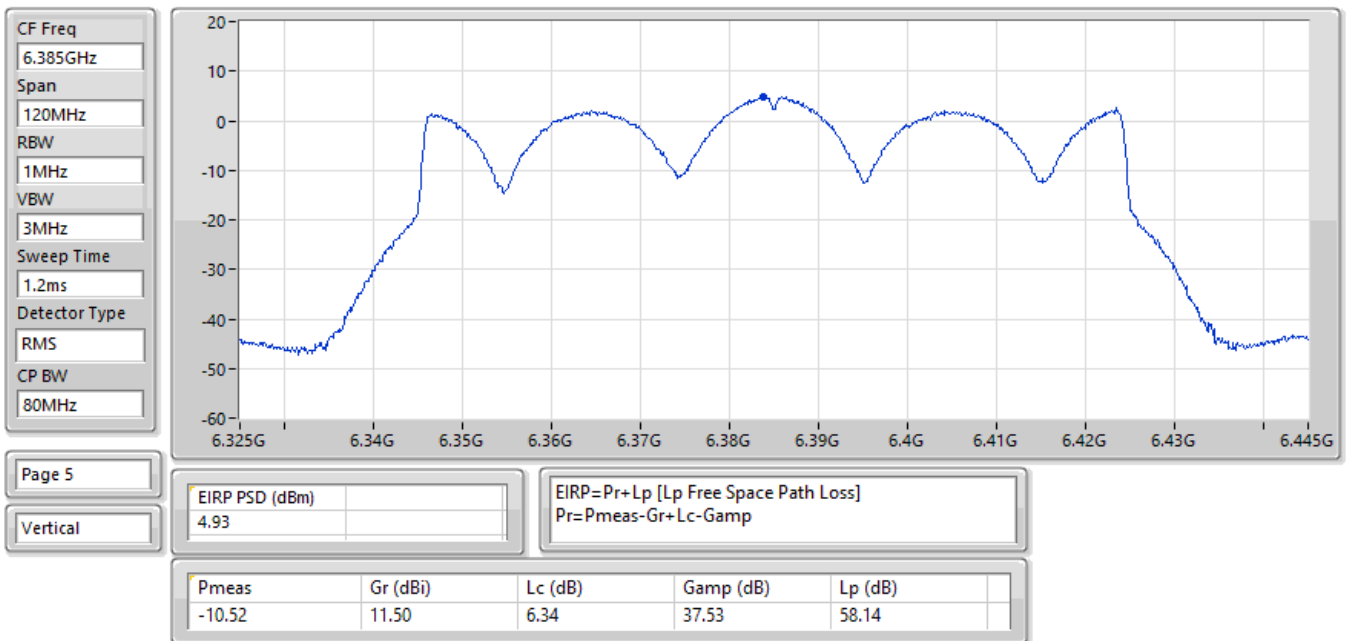


31/01/2026

EIRP PSD;Band:6.2G;be160;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6185MHz;TX

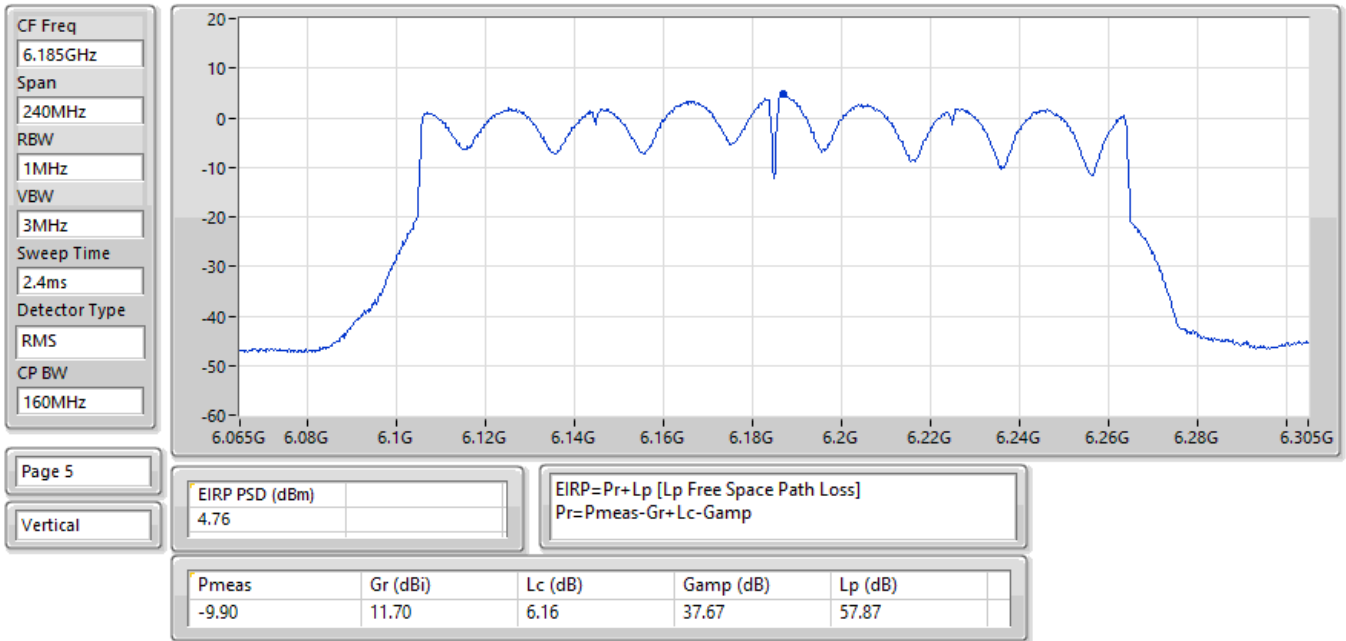


30/01/2026

EIRP PSD;Band:6.4G;11a;BWch:20MHz;Nss:1,(6D);Nant:2;Ch:6515MHz;TX

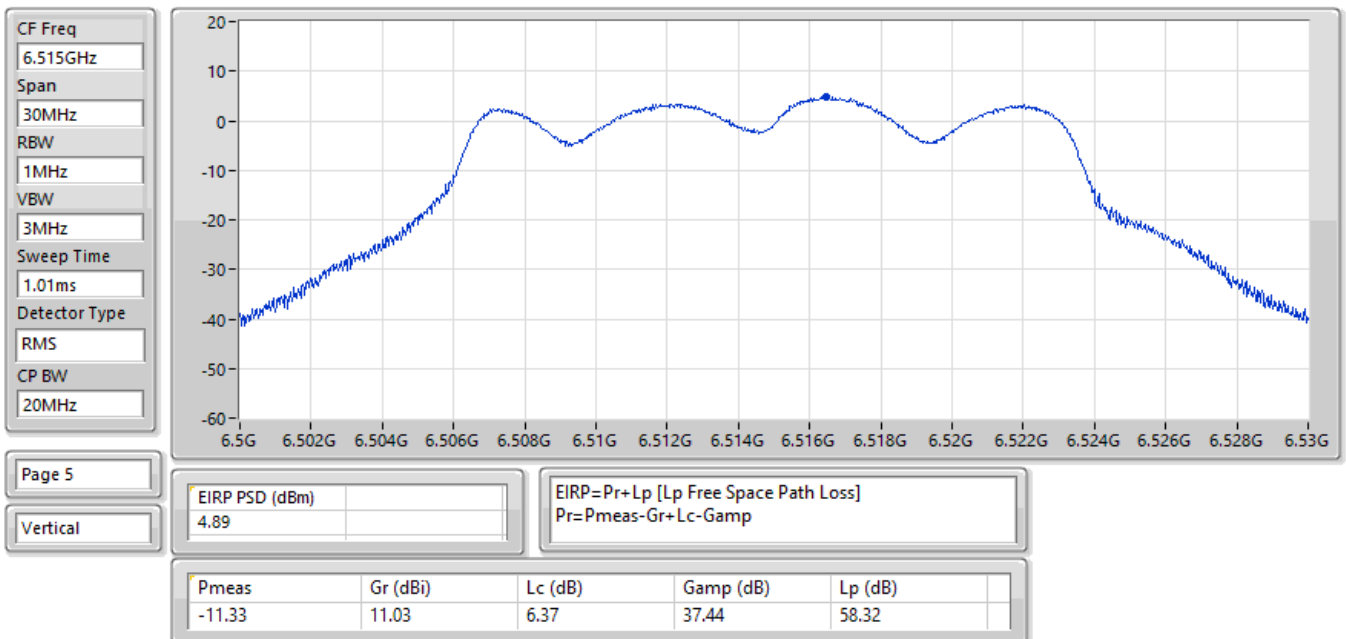


30/01/2026

EIRP PSD;Band:6.4G;be20;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6475MHz;TX

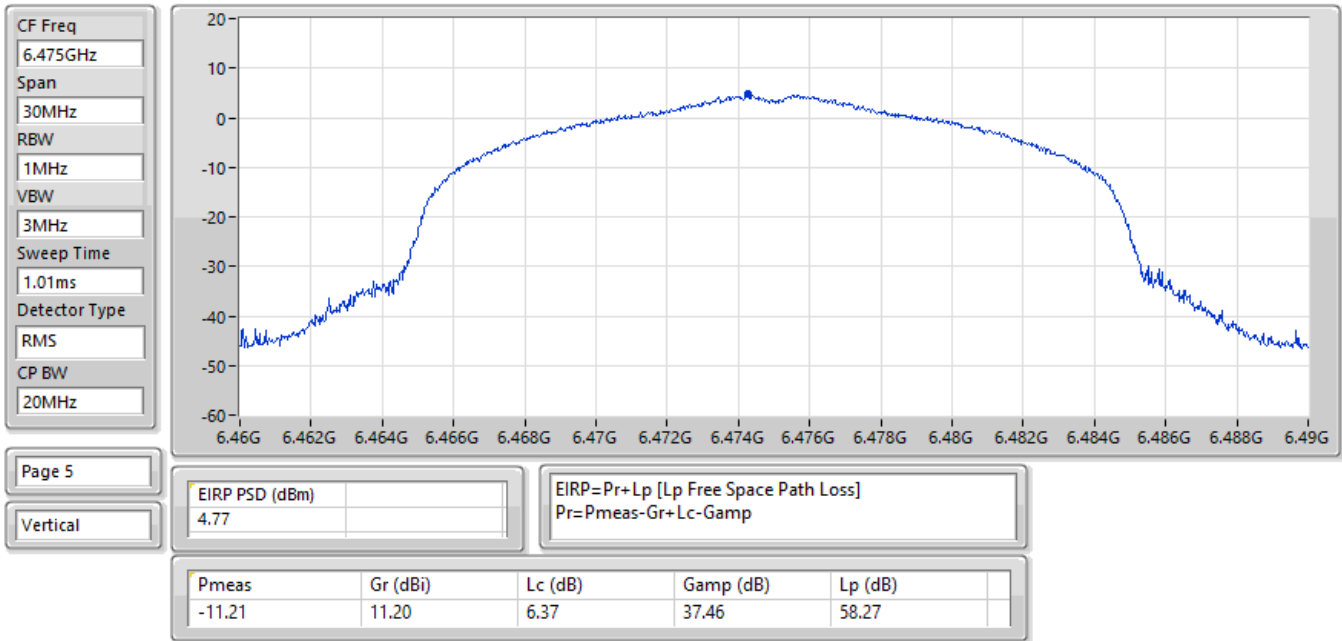


31/01/2026

EIRP PSD;Band:6.4G;be40;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6485MHz;TX

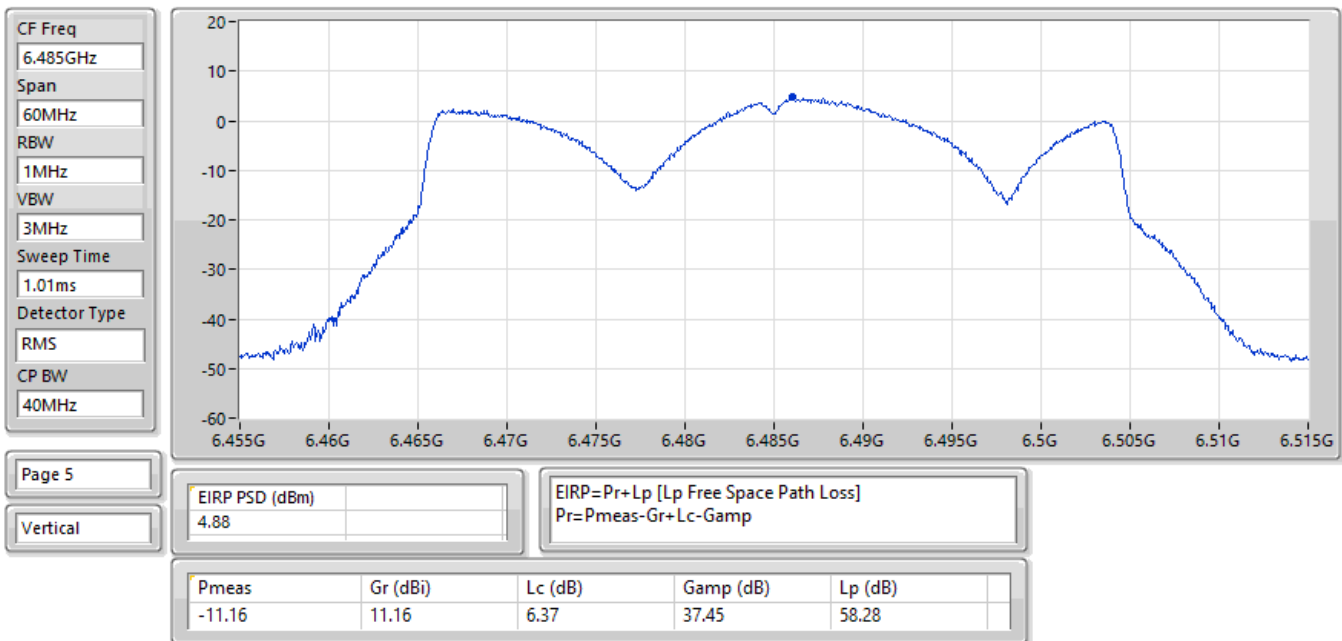


31/01/2026

EIRP PSD;Band:6.4G;be80;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6545MHz;TX

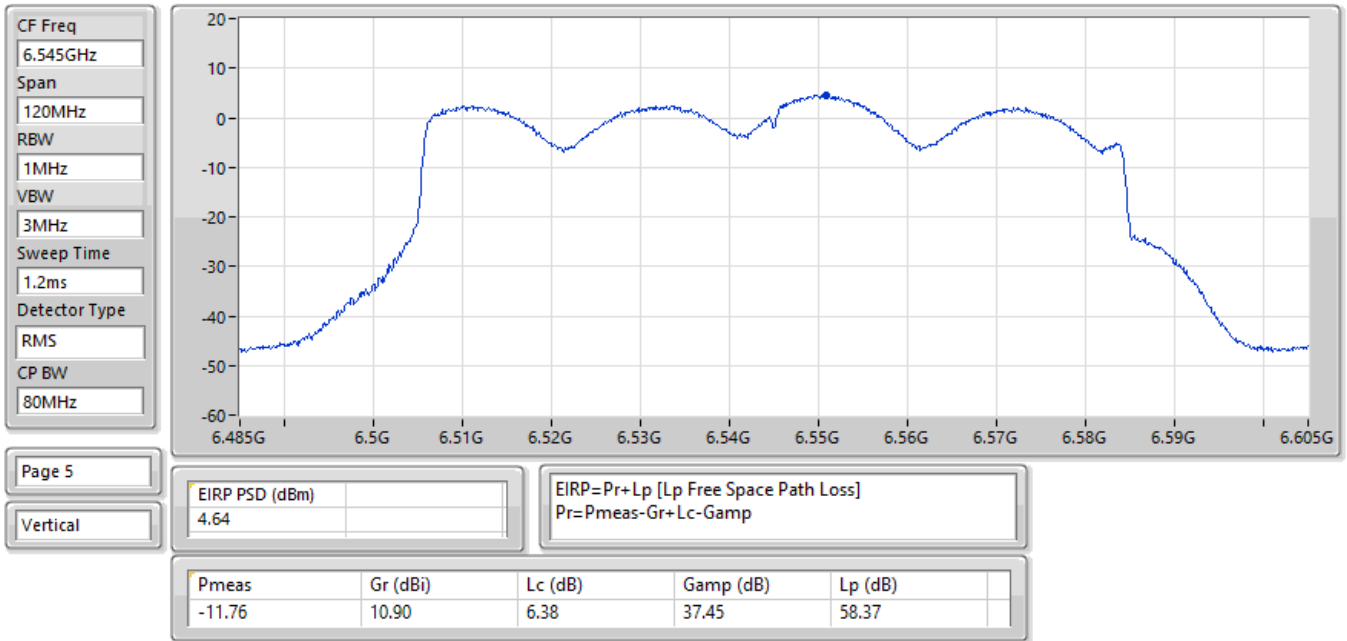


31/01/2026

EIRP PSD;Band:6.4G;be160;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6505MHz;TX

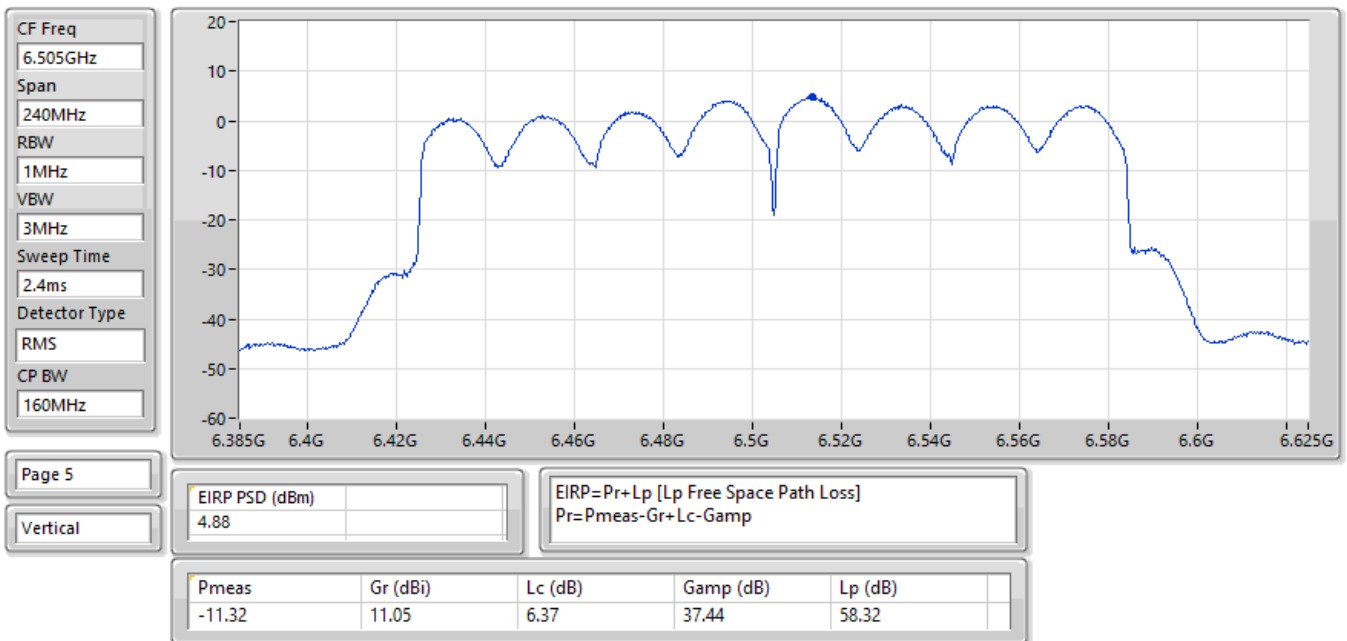


30/01/2026

EIRP PSD;Band:6.7G;11a;BWch:20MHz;Nss:1,(6D);Nant:2;Ch:6695MHz;TX

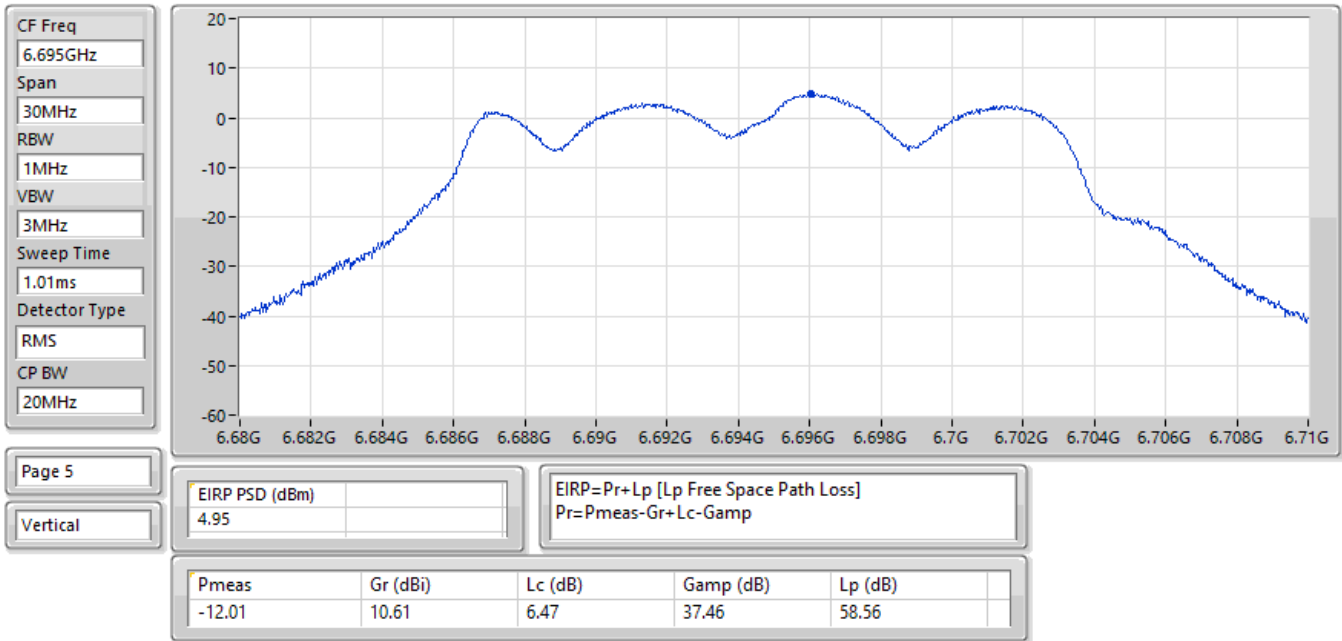


30/01/2026

EIRP PSD;Band:6.7G;be20;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6535MHz;TX

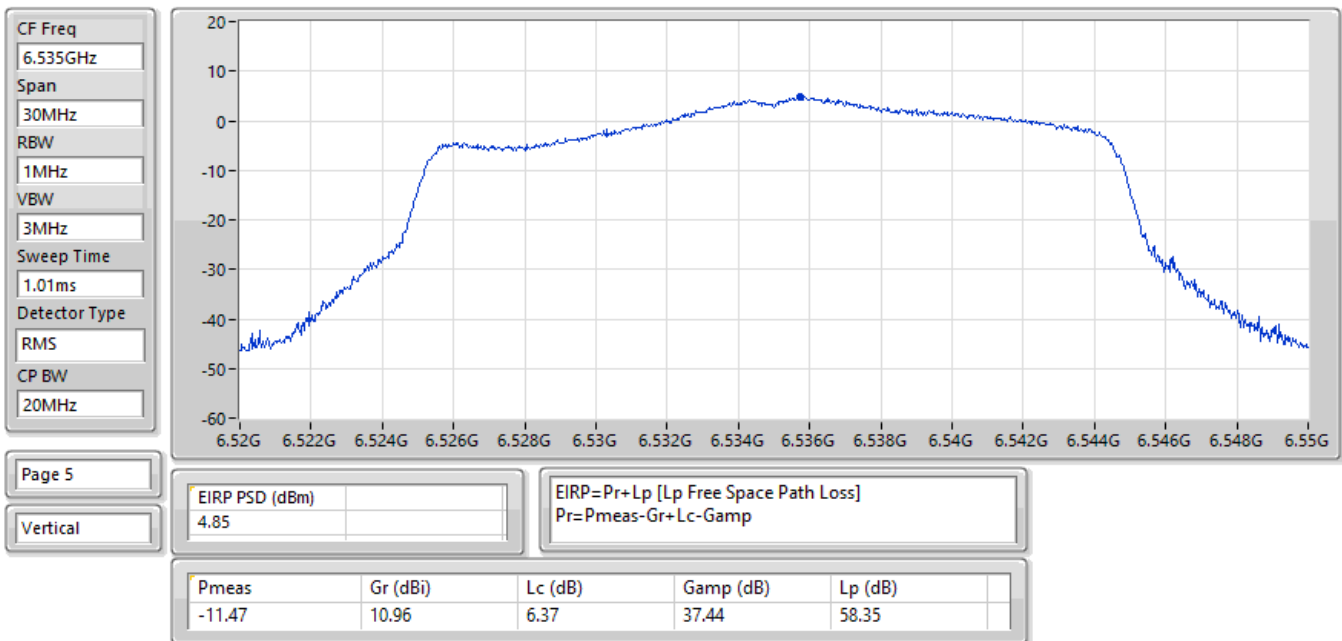


31/01/2026

EIRP PSD;Band:6.7G;be40;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6885MHz;TX

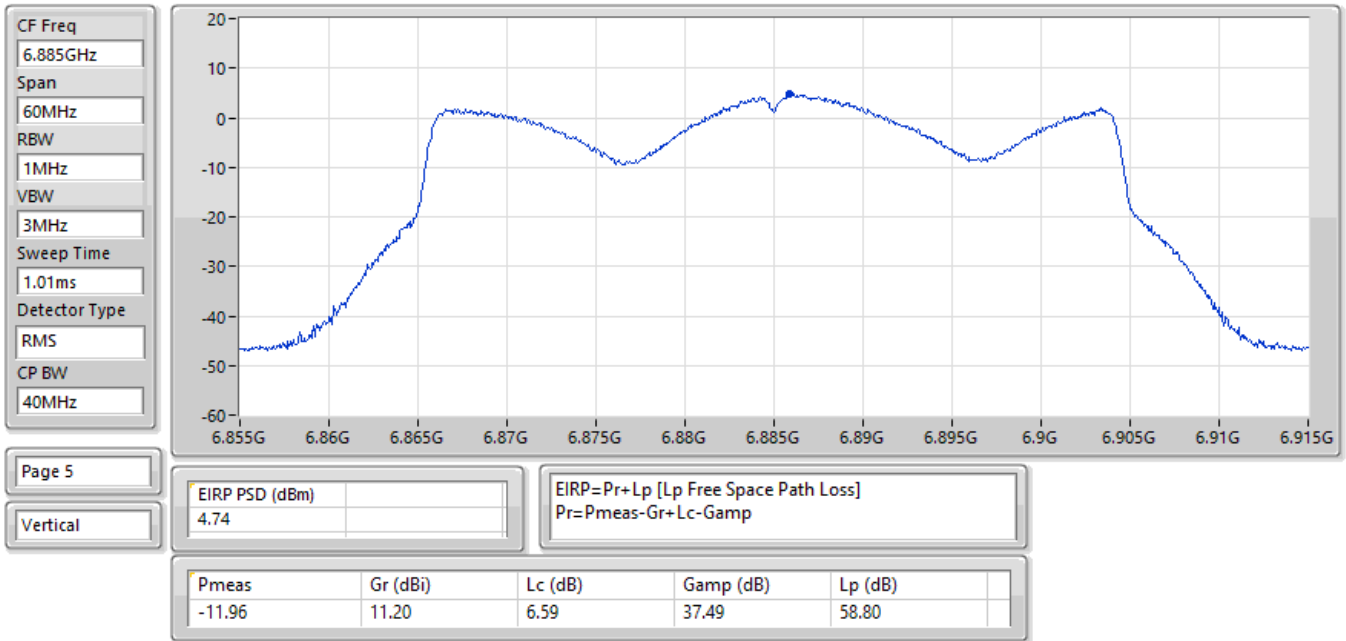


31/01/2026

EIRP PSD;Band:6.7G;be80;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6785MHz;TX

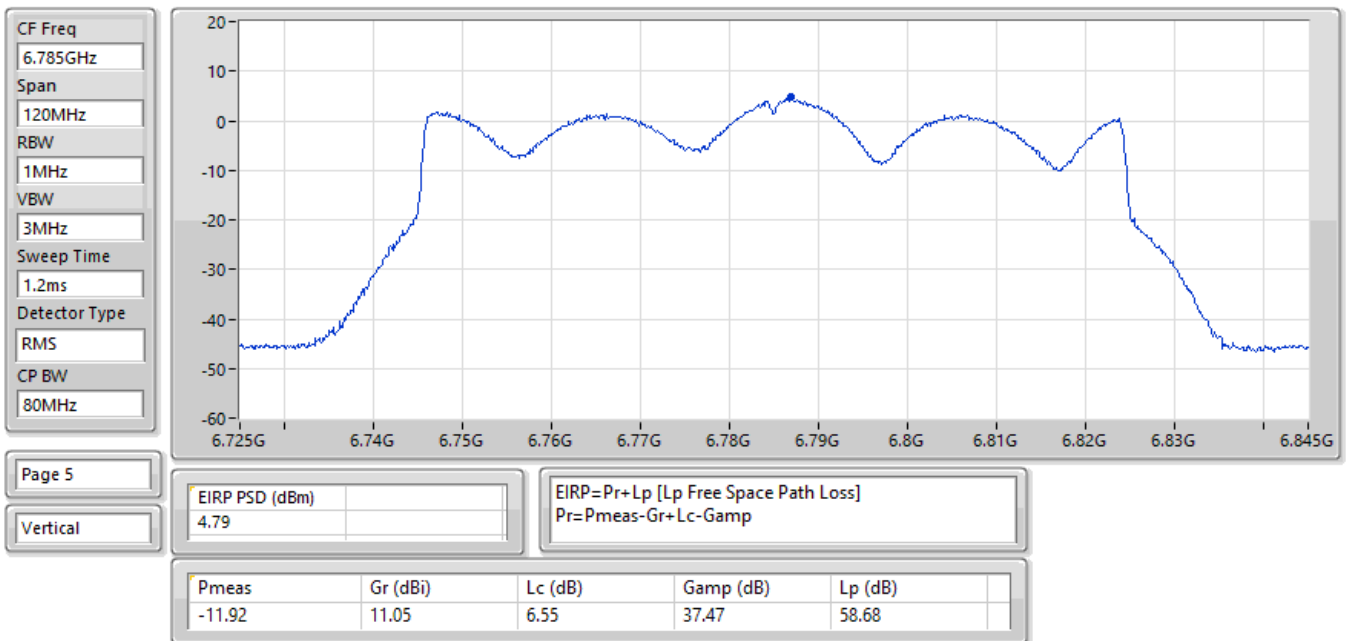


31/01/2026

EIRP PSD;Band:6.7G;be160;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6825MHz;TX

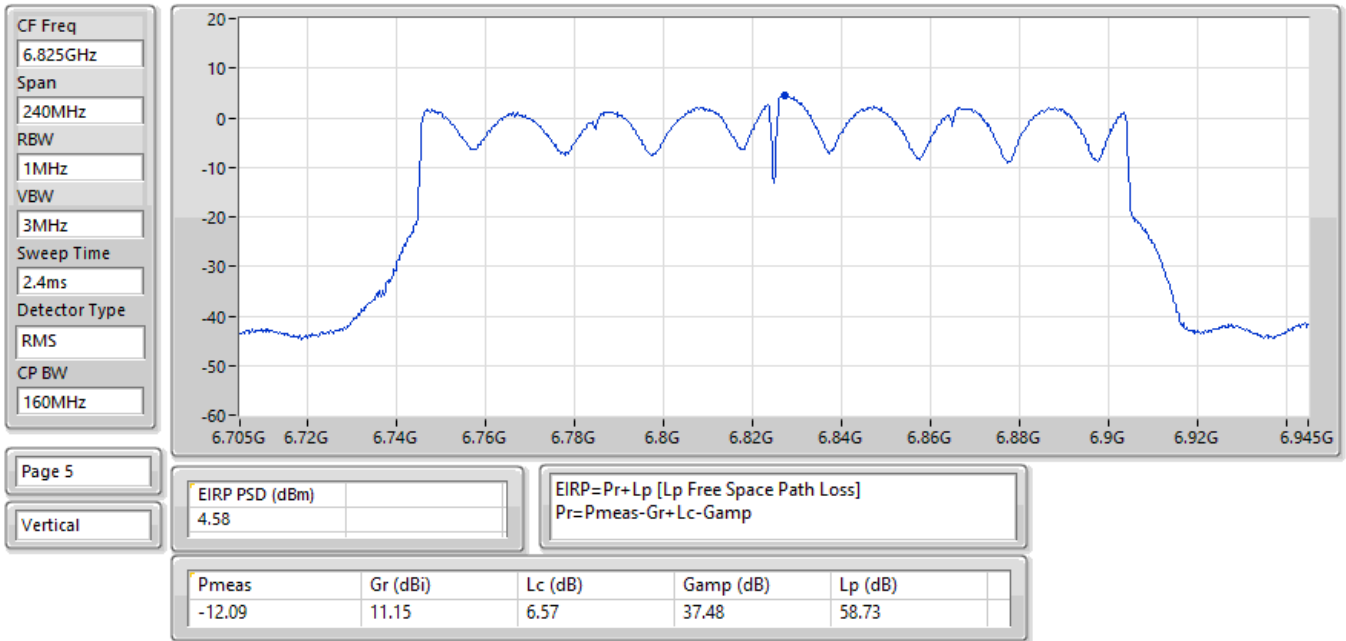


30/01/2026

EIRP PSD;Band:7.0G;11a;BWch:20MHz;Nss:1,(6D);Nant:2;Ch:6995MHz;TX

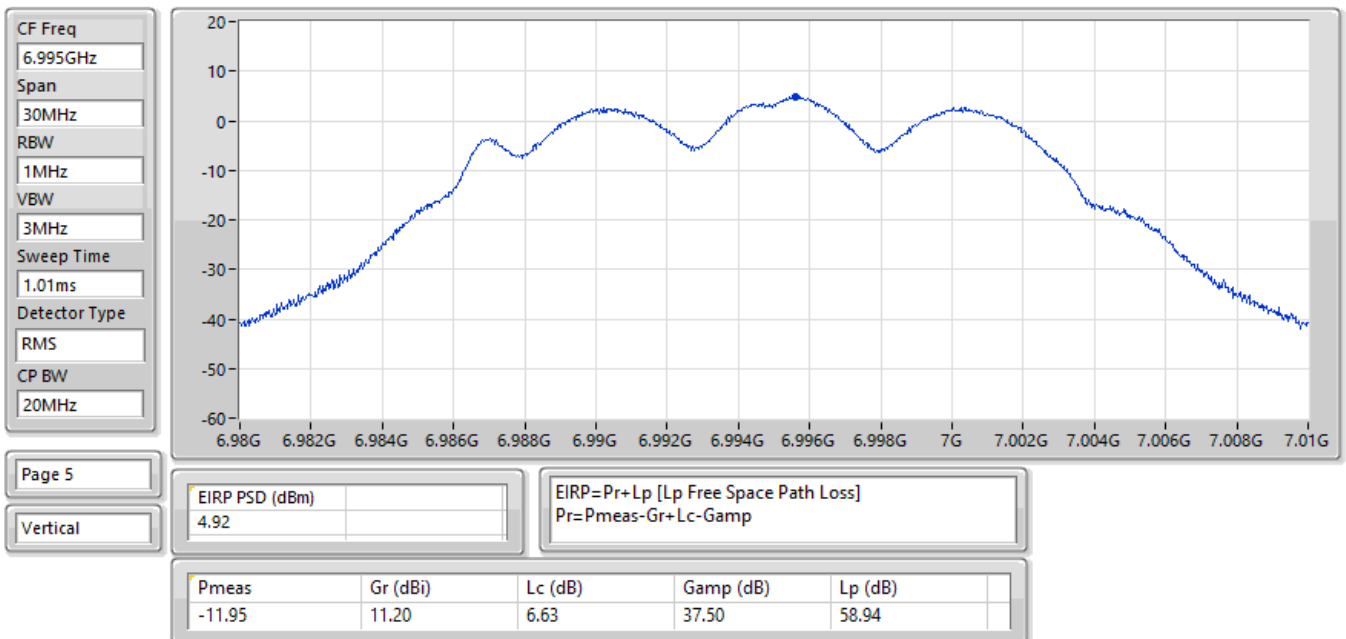


30/01/2026

EIRP PSD;Band:7.0G;be20;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6995MHz;TX

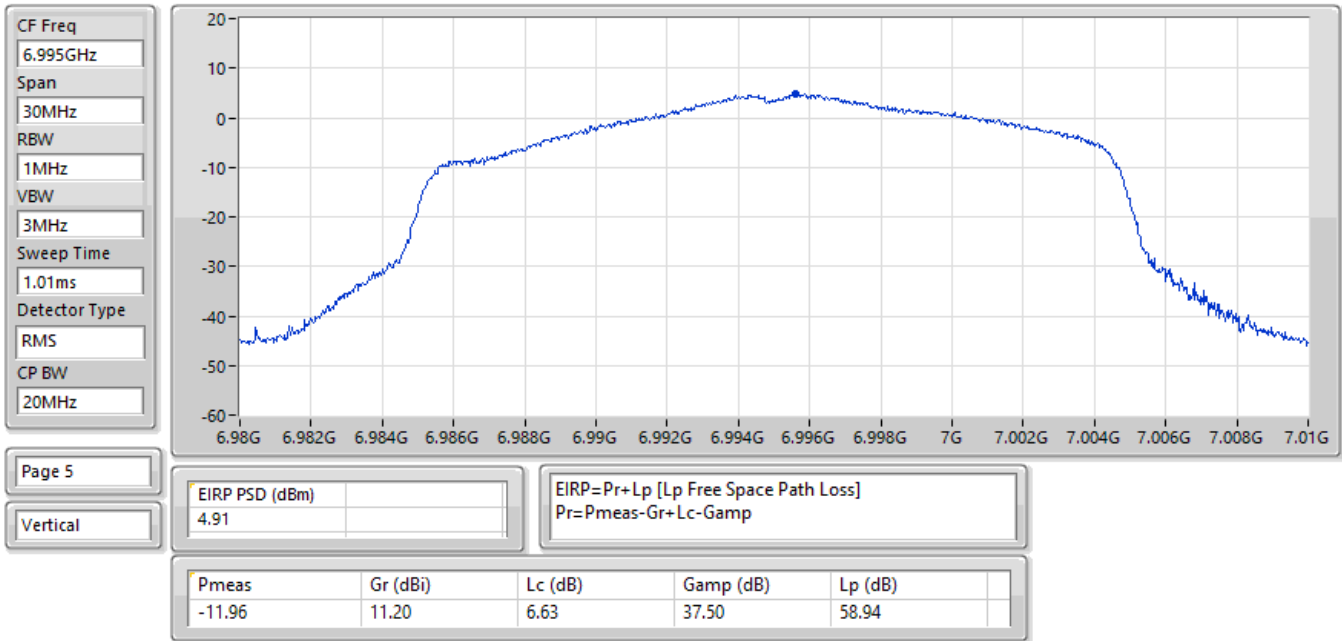


31/01/2026

EIRP PSD;Band:7.0G;be40;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:7085MHz;TX

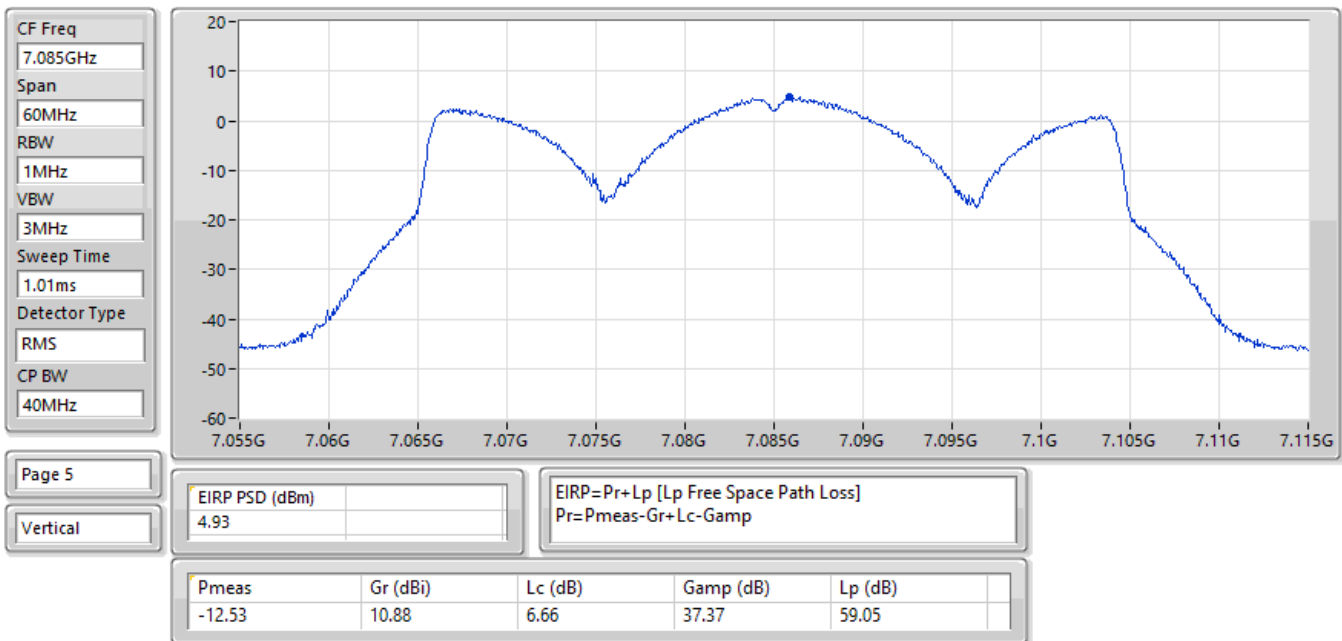


31/01/2026

EIRP PSD;Band:7.0G;be80;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:7025MHz;TX

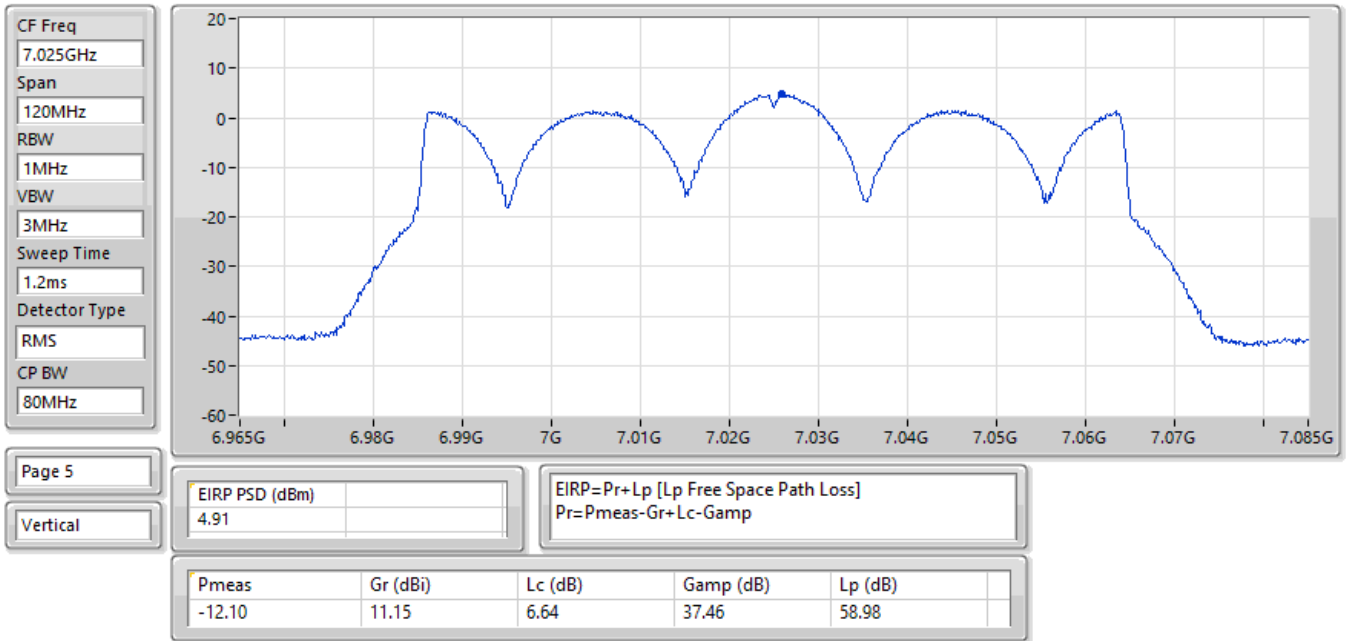

31/01/2026

EIRP PSD;Band:7.0G;be160;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6985MHz;TX

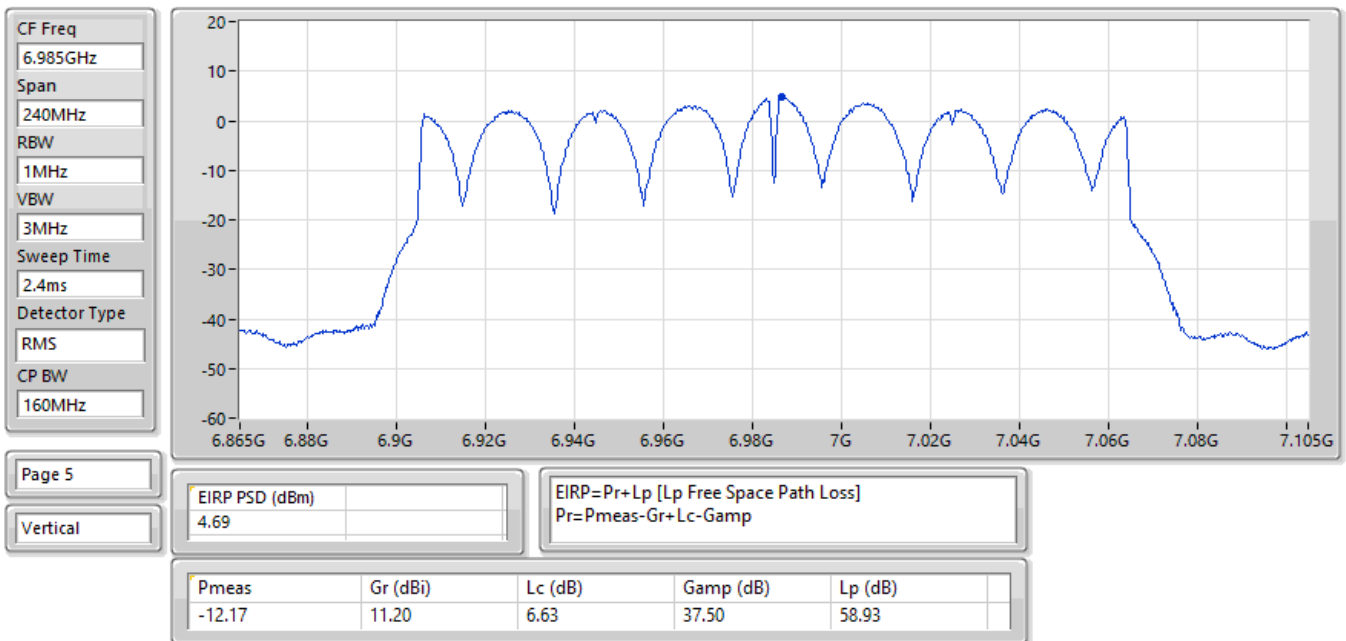

**Summary**

Mode	EIRP PD (dBm/RBW)
5.925-6.425GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	4.67
802.11be EHT40-BF_Nss1,(MCS0)_2TX	4.54
802.11be EHT80-BF_Nss1,(MCS0)_2TX	4.79
802.11be EHT160-BF_Nss1,(MCS0)_2TX	4.53
6.425-6.525GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	4.92
802.11be EHT40-BF_Nss1,(MCS0)_2TX	4.57
802.11be EHT80-BF_Nss1,(MCS0)_2TX	4.53
802.11be EHT160-BF_Nss1,(MCS0)_2TX	4.67
6.525-6.875GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	4.79
802.11be EHT40-BF_Nss1,(MCS0)_2TX	4.61
802.11be EHT80-BF_Nss1,(MCS0)_2TX	4.59
802.11be EHT160-BF_Nss1,(MCS0)_2TX	4.57
6.875-7.125GHz	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	4.84
802.11be EHT40-BF_Nss1,(MCS0)_2TX	4.56
802.11be EHT80-BF_Nss1,(MCS0)_2TX	4.89
802.11be EHT160-BF_Nss1,(MCS0)_2TX	4.72

RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;

Result

Mode	Result	EIRP PD (dBm/RBW)	EIRP PD Limit (dBm/RBW)
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-
5955MHz	Pass	4.67	5.00
6195MHz	Pass	4.45	5.00
6415MHz	Pass	4.62	5.00
6435MHz	Pass	4.87	5.00
6475MHz	Pass	4.92	5.00
6515MHz	Pass	4.83	5.00
6535MHz	Pass	4.79	5.00
6695MHz	Pass	4.55	5.00
6875MHz Straddle 6.525-6.875GHz	Pass	4.77	5.00
6895MHz	Pass	4.84	5.00
6995MHz	Pass	4.68	5.00
7095MHz	Pass	4.60	5.00
7115MHz	Pass	4.36	5.00
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-
5965MHz	Pass	4.48	5.00
6205MHz	Pass	4.45	5.00
6405MHz	Pass	4.54	5.00
6445MHz	Pass	4.35	5.00
6485MHz	Pass	4.57	5.00
6525MHz Straddle 6.425-6.525GHz	Pass	4.28	5.00
6565MHz	Pass	4.32	5.00
6685MHz	Pass	4.51	5.00
6885MHz Straddle 6.525-6.875GHz	Pass	4.61	5.00
6925MHz	Pass	4.54	5.00
7005MHz	Pass	4.40	5.00
7085MHz	Pass	4.56	5.00
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-
5985MHz	Pass	4.26	5.00
6225MHz	Pass	4.69	5.00
6385MHz	Pass	4.79	5.00
6465MHz	Pass	4.53	5.00
6545MHz Straddle 6.425-6.525GHz	Pass	4.50	5.00
6625MHz	Pass	4.56	5.00
6705MHz	Pass	4.59	5.00
6785MHz	Pass	4.39	5.00
6865MHz Straddle 6.525-6.875GHz	Pass	4.24	5.00
6945MHz	Pass	4.36	5.00
7025MHz	Pass	4.89	5.00
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-
6025MHz	Pass	4.38	5.00
6185MHz	Pass	4.53	5.00
6345MHz	Pass	4.36	5.00
6505MHz Straddle 6.425-6.525GHz	Pass	4.67	5.00
6665MHz	Pass	4.57	5.00
6825MHz Straddle 6.525-6.875GHz	Pass	4.40	5.00
6985MHz	Pass	4.72	5.00

DG = Directional Gain; RBW = 500kHz for 5.725-5.85GHz band / 1MHz for other band;
PD = trace bin-by-bin of each transmits port summing can be performed maximum power density; Port X = Port X Power Density;
Inf = There's no restriction for the limit.

30/01/2026

EIRP PSD;Band:6.2G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:5955MHz;TX

CF Freq
5.955GHz

Span
30MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
20MHz

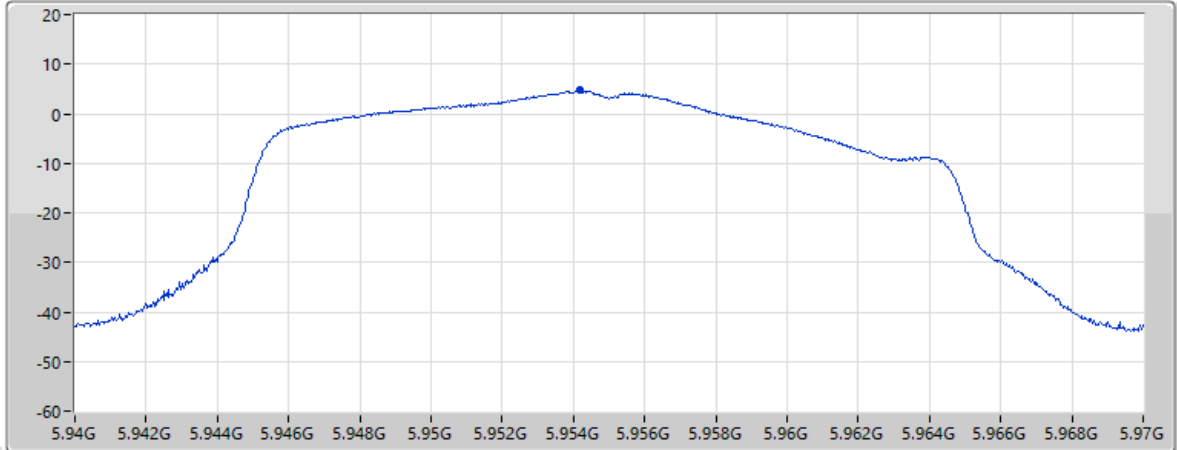

Page 5

Vertical

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
4.67		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-9.69	11.41	6.07	37.84	57.54

31/01/2026

EIRP PSD;Band:6.2G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6405MHz;TX

CF Freq
6.405GHz

Span
60MHz


RBW
1MHz

VBW
3MHz

Sweep Time
1.01ms

Detector Type
RMS

CP BW
40MHz

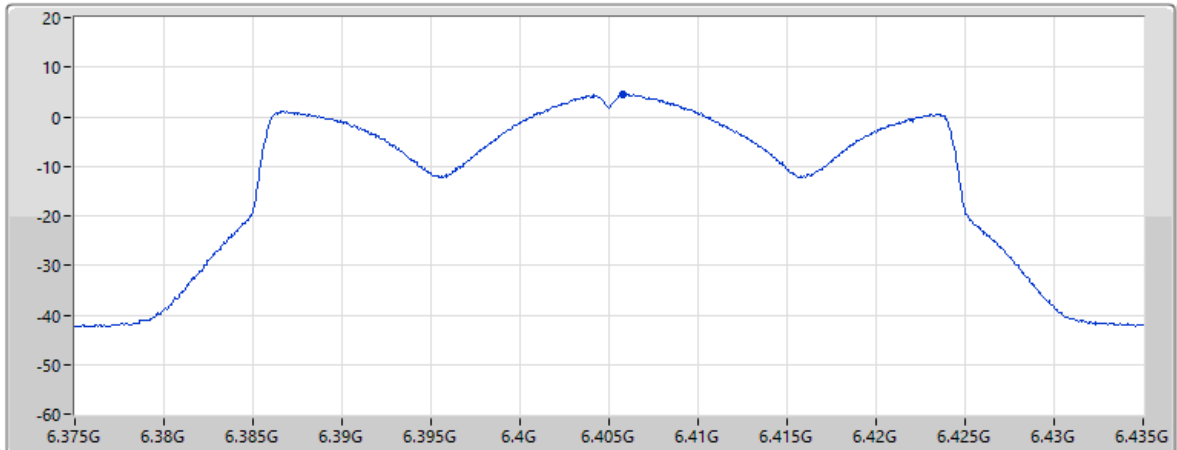


Page 5

Vertical

EIRP PSD (dBm)		EIRP=Pr+Lp [Lp Free Space Path Loss]		
4.54		Pr=Pmeas-Gr+Lc-Gamp		
Pmeas	Gr (dBi)	Lc (dB)	Gamp (dB)	Lp (dB)
-11.09	11.39	6.36	37.51	58.17


31/01/2026

EIRP PSD;Band:6.2G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6385MHz;TX

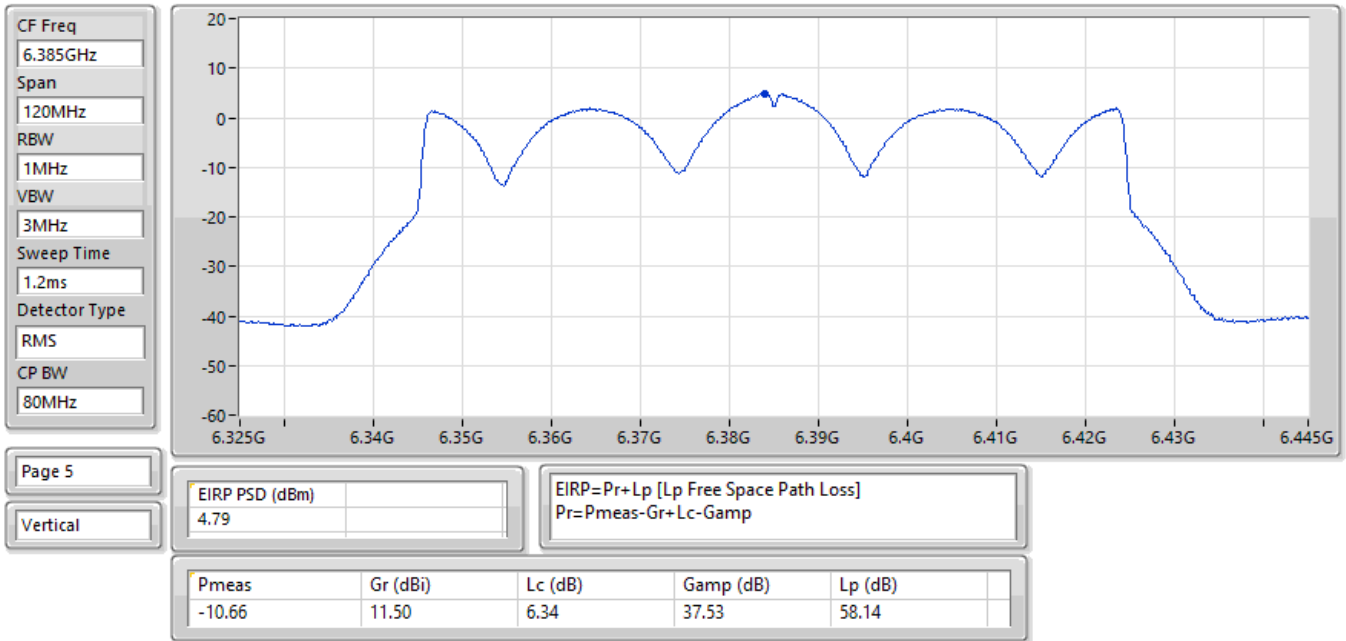


31/01/2026

EIRP PSD;Band:6.2G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6185MHz;TX

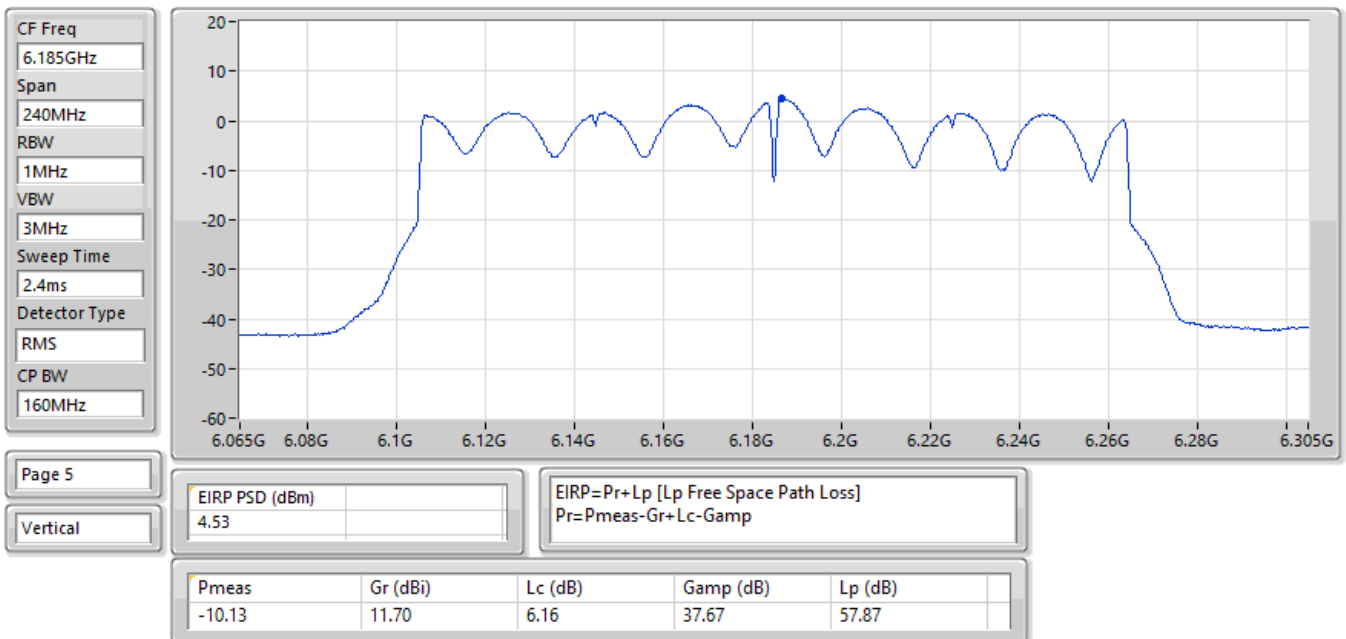


30/01/2026

EIRP PSD;Band:6.4G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6475MHz;TX

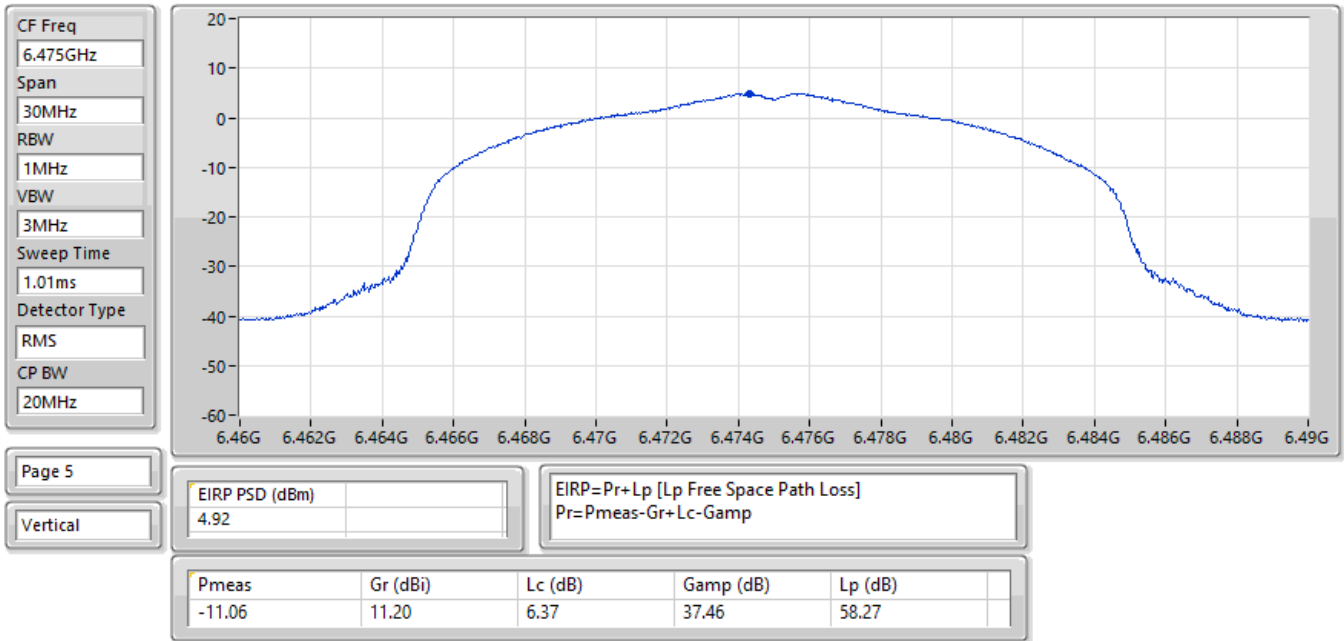


31/01/2026

EIRP PSD;Band:6.4G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6485MHz;TX

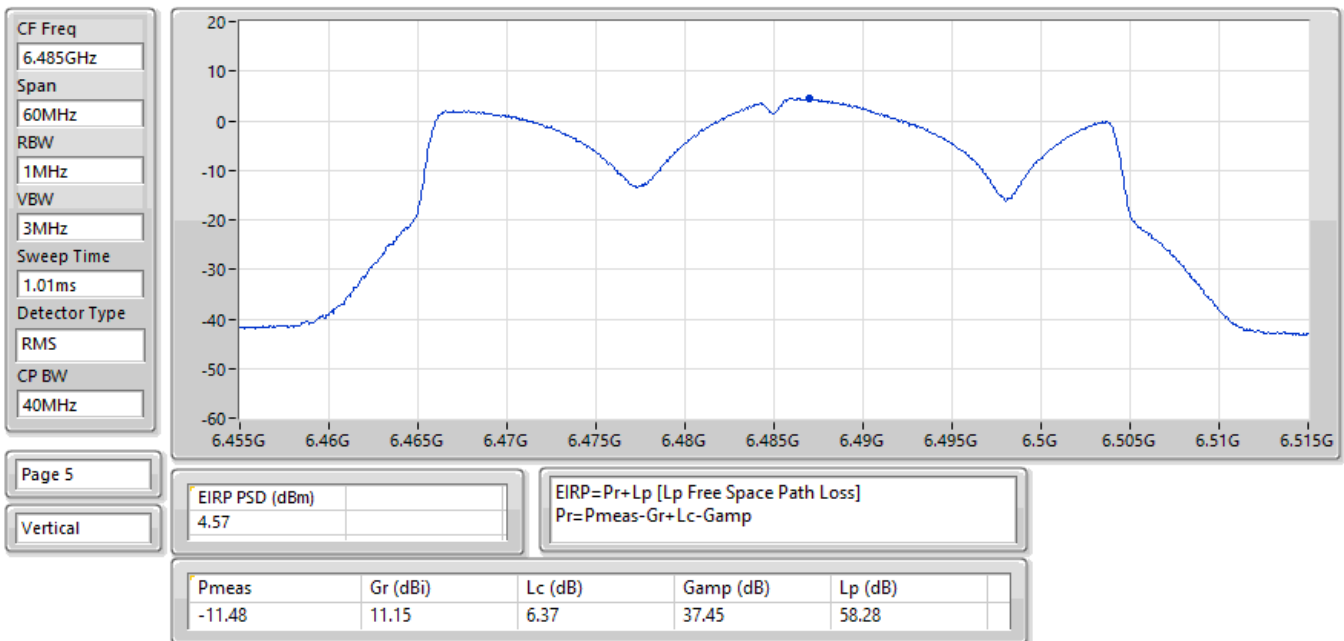


31/01/2026

EIRP PSD:Band:6.4G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6465MHz;TX

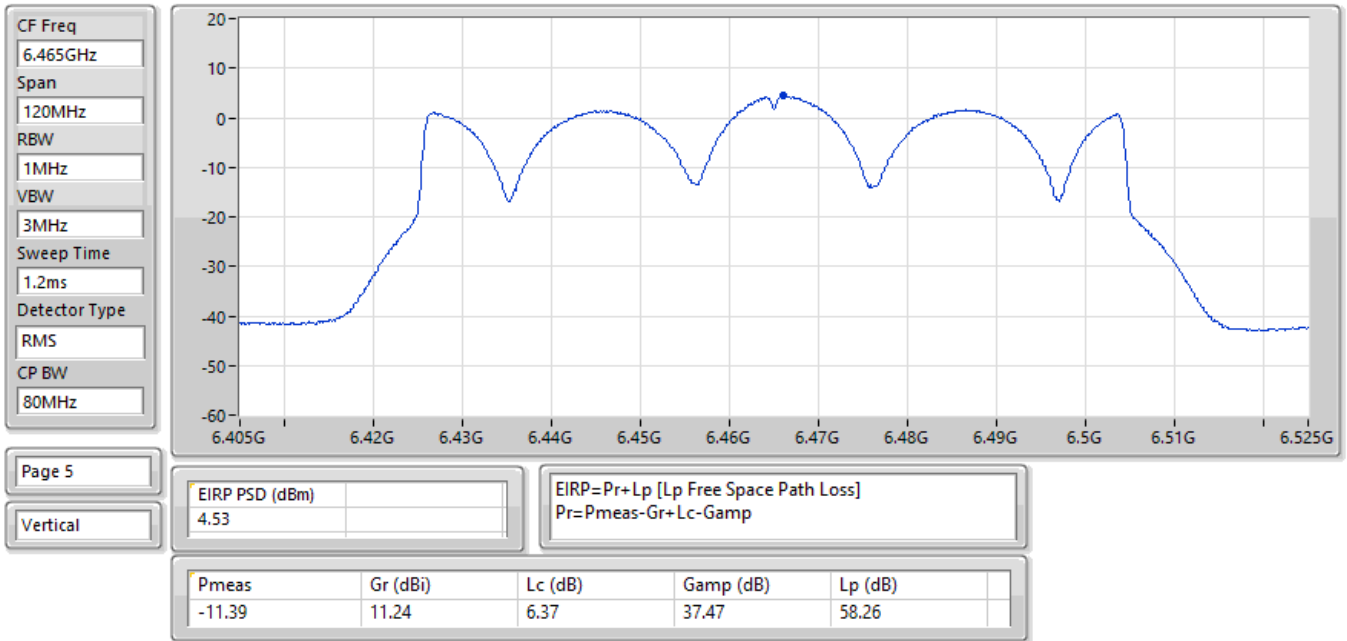


31/01/2026

EIRP PSD:Band:6.4G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6505MHz;TX

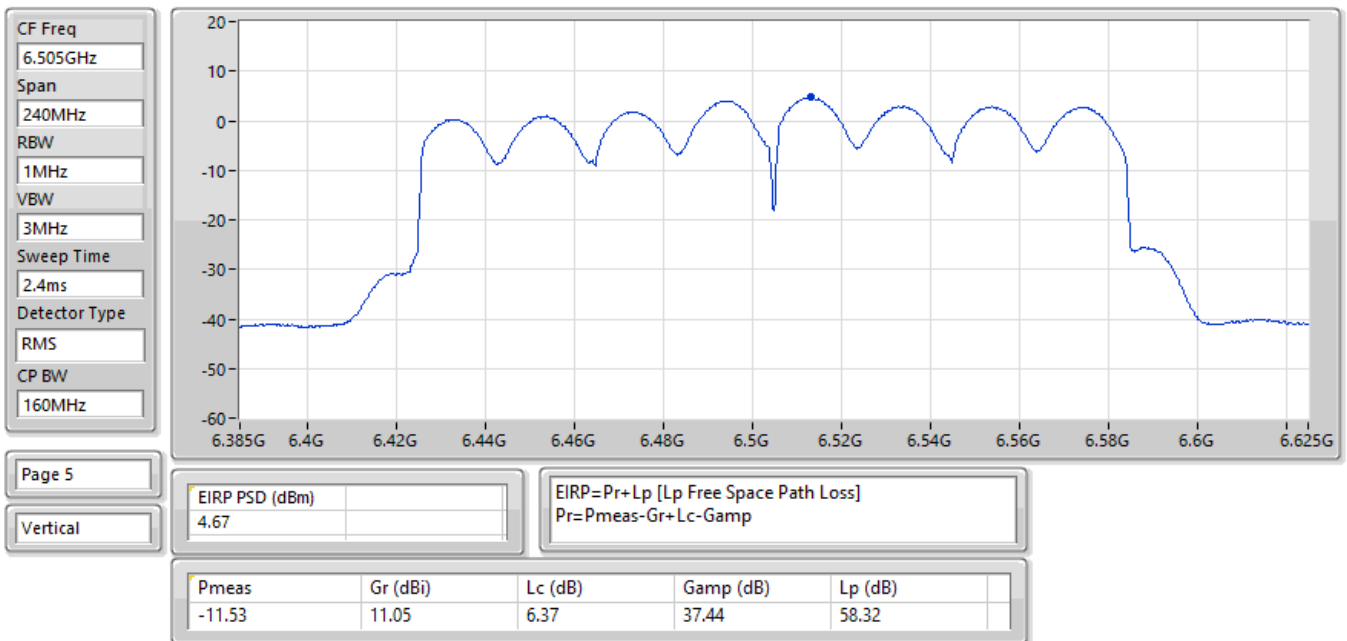


30/01/2026

EIRP PSD;Band:6.7G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6535MHz;TX

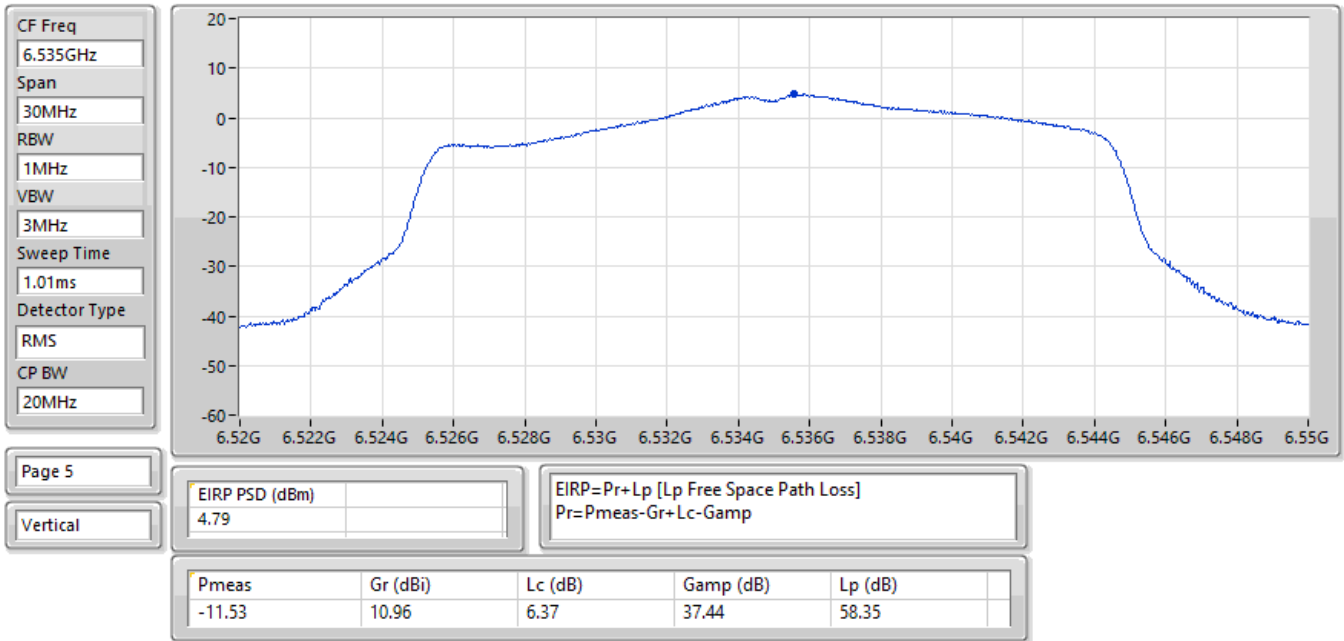


31/01/2026

EIRP PSD;Band:6.7G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:6885MHz;TX

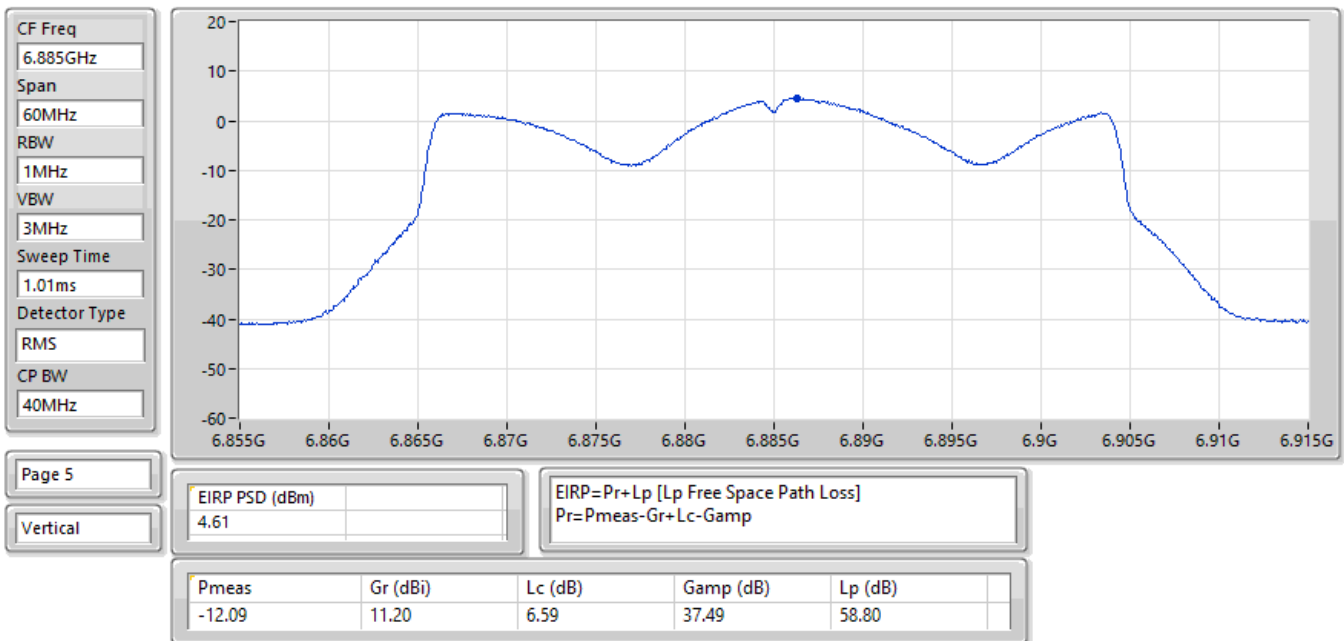


31/01/2026

EIRP PSD:Band:6.7G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:6705MHz;TX

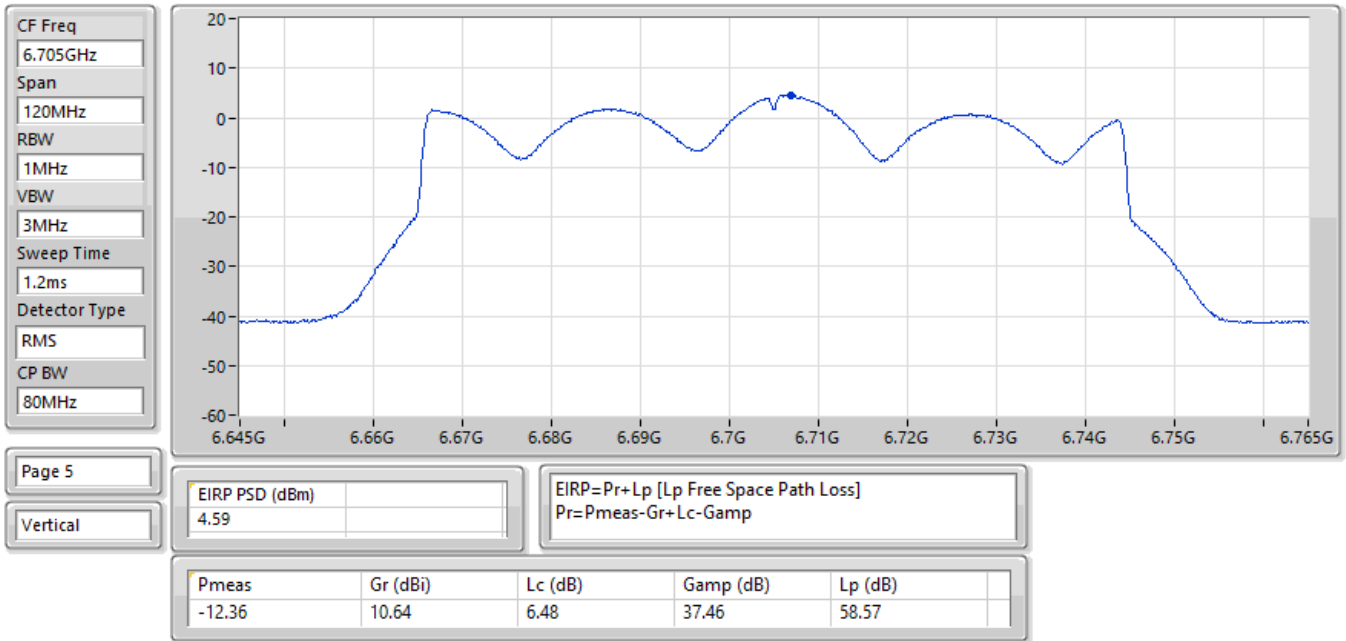


31/01/2026

EIRP PSD:Band:6.7G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6665MHz;TX

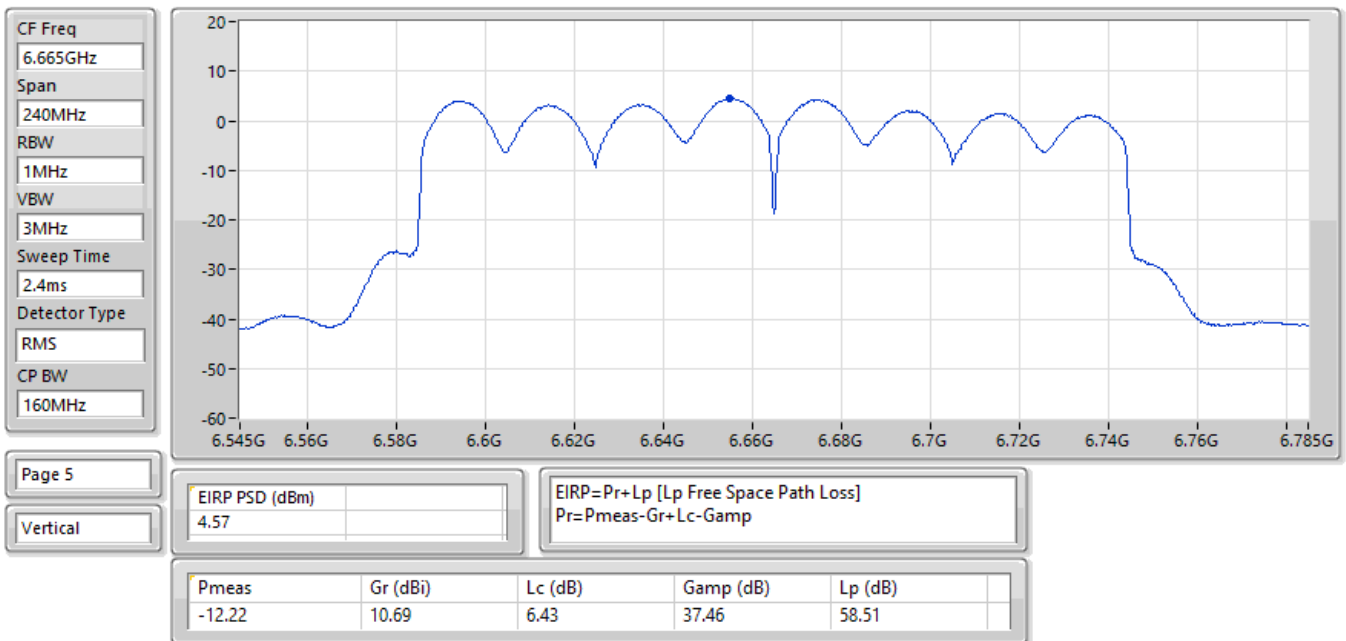


30/01/2026

EIRP PSD;Band:7.0G;be20,BF;BWch:20MHz;Nss:1,(M0);Nant:2;Ch:6895MHz;TX

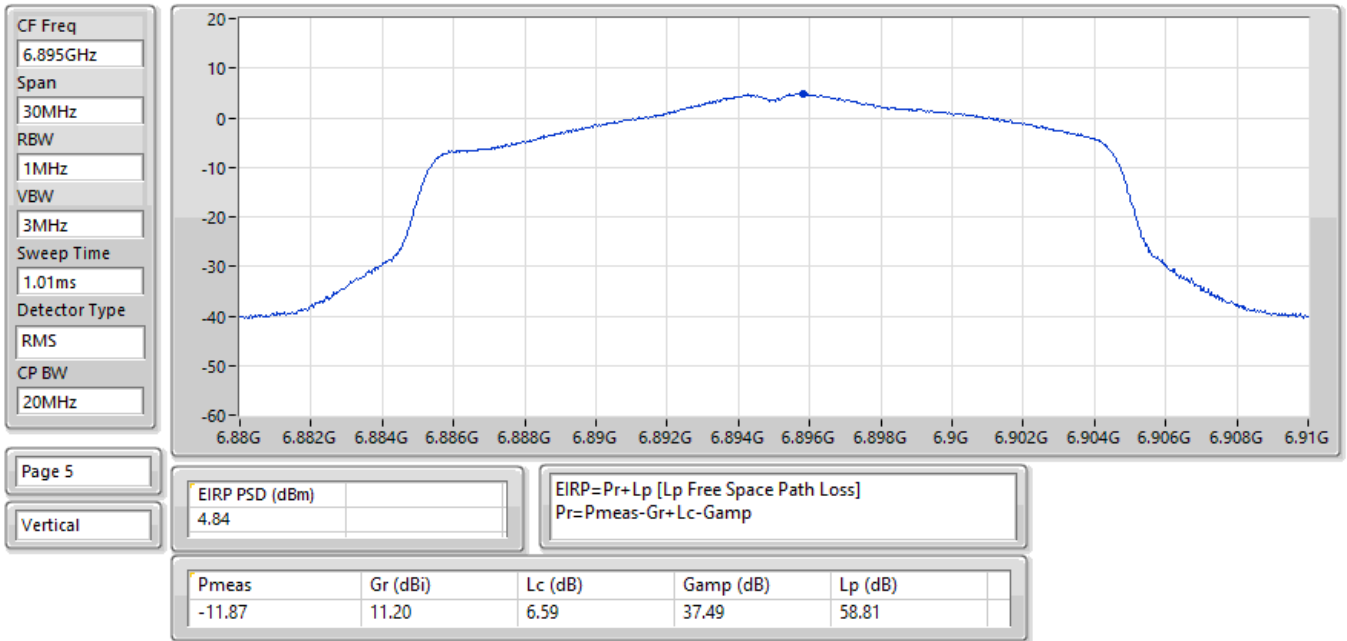


31/01/2026

EIRP PSD;Band:7.0G;be40,BF;BWch:40MHz;Nss:1,(M0);Nant:2;Ch:7085MHz;TX

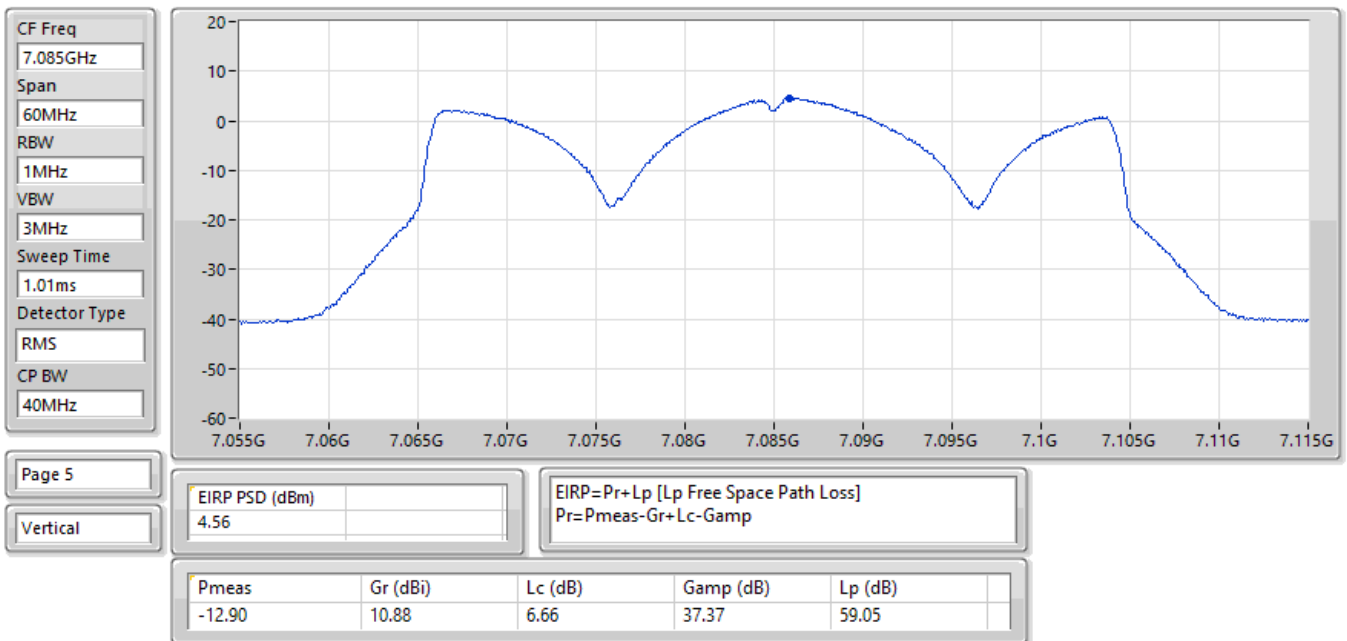


31/01/2026

EIRP PSD;Band:7.0G;be80,BF;BWch:80MHz;Nss:1,(M0);Nant:2;Ch:7025MHz;TX

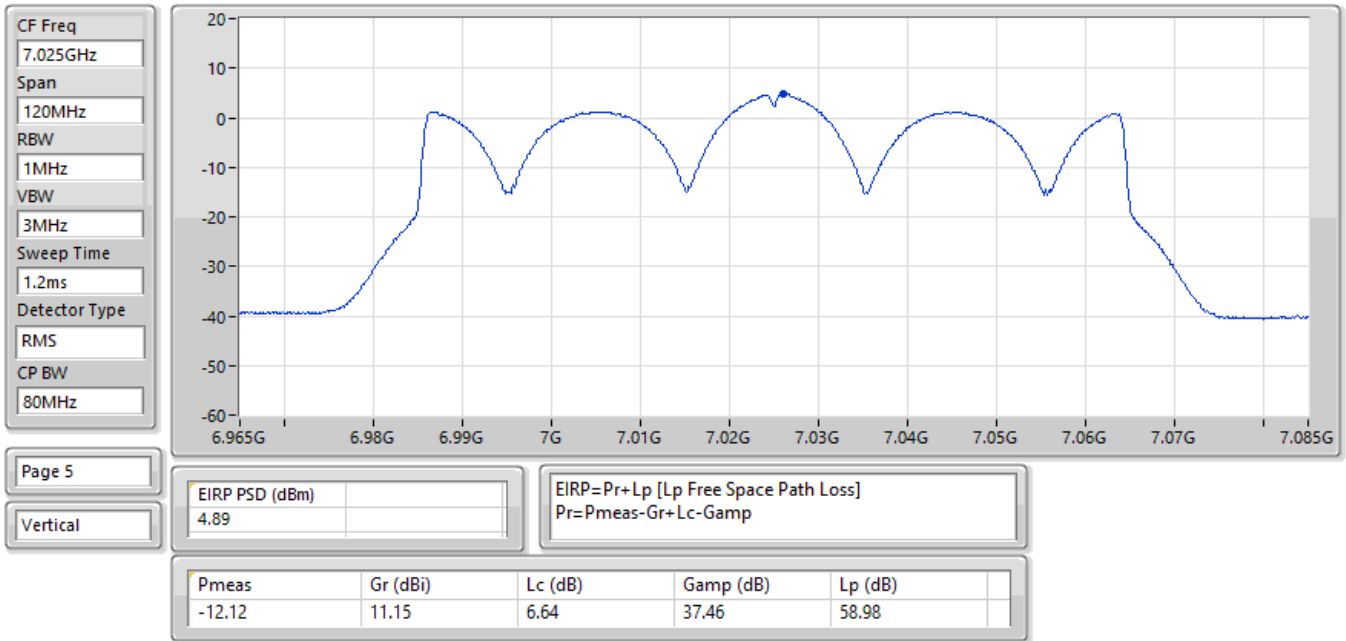

31/01/2026

EIRP PSD;Band:7.0G;be160,BF;BWch:160MHz;Nss:1,(M0);Nant:2;Ch:6985MHz;TX

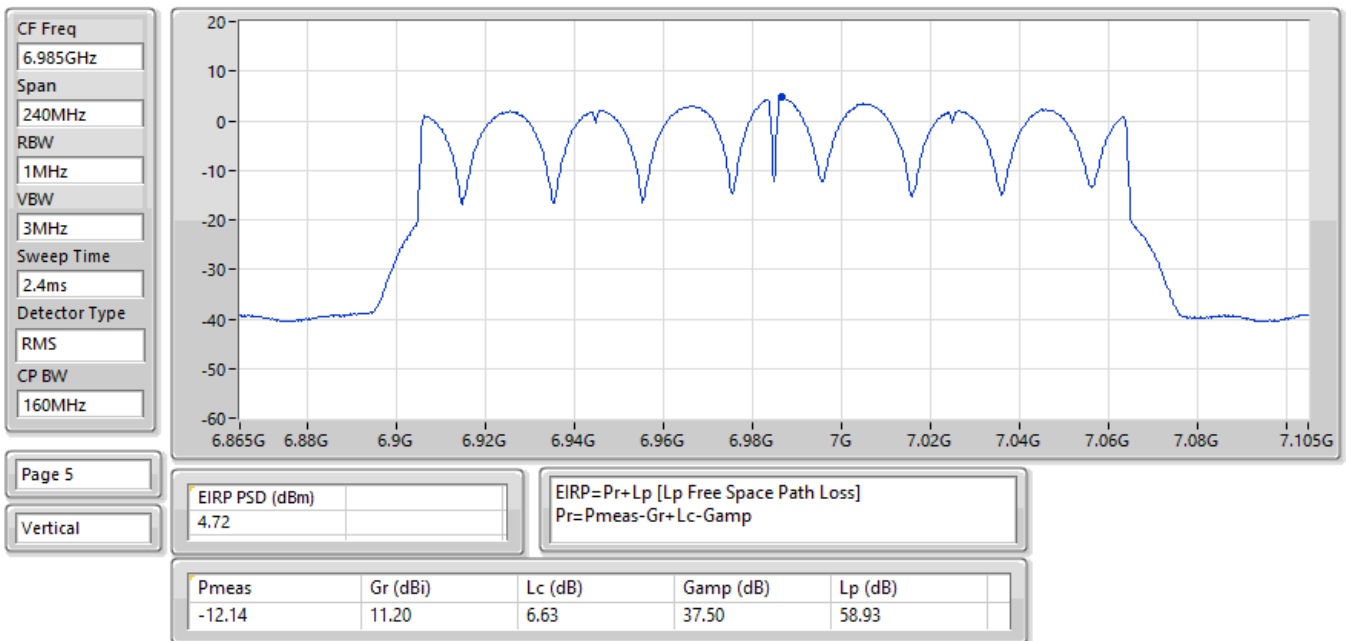

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	6.414525G	-0.86	6.4036G	-30.48	-20.46	-10.02	2
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	6.415575G	-2.80	6.449375G	-52.97	-42.80	-10.17	1
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	5.96305G	1.99	6.05835G	-48.31	-38.01	-10.30	1
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	6.3892G	2.86	6.4271G	-24.81	-17.15	-7.66	1
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	6.0214G	5.58	6.4168G	-43.13	-34.42	-8.71	1
6.425-6.525GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	6.4756G	-1.58	6.43195G	-50.21	-41.58	-8.63	1
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	6.47555G	-4.06	6.431975G	-51.33	-44.06	-7.27	1
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	6.527799G	0.97	6.61535G	-48.01	-39.03	-8.98	1
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	6.4619G	2.56	6.4229G	-25.18	-17.48	-7.70	2
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	6.4988G	4.92	6.2248G	-43.34	-35.08	-8.26	2
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	6.876075G	-3.80	6.834575G	-51.65	-43.80	-7.85	2
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	6.876G	-5.41	6.91385G	-52.82	-45.41	-7.41	2
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	6.8862G	0.48	6.98365G	-47.50	-39.52	-7.98	2
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	6.8662G	-0.00	6.9988G	-47.08	-40.00	-7.08	2
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	6.6716G	5.08	6.9924G	-42.70	-34.92	-7.78	2
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11a_Nss1,(6Mbps)_2TX	Pass	7.1146G	-10.55	7.075725G	-51.89	-50.55	-1.34	2
802.11be EHT20_Nss1,(MCS0)_2TX	Pass	7.115875G	-8.01	7.074325G	-52.60	-48.01	-4.59	1
802.11be EHT40_Nss1,(MCS0)_2TX	Pass	7.0869G	-1.45	6.99275G	-47.07	-41.45	-5.62	1
802.11be EHT80_Nss1,(MCS0)_2TX	Pass	7.0262G	-1.87	6.8415G	-48.09	-41.87	-6.22	2
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	6.988G	5.14	6.7192G	-42.60	-34.86	-7.74	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11a_Nss1,(6Mbps)_2TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.953725G	-1.21	5.989175G	-52.57	-41.21	-11.36	1
5955MHz	Pass	5.95545G	-1.12	5.967G	-32.67	-21.16	-11.51	2
6195MHz	Pass	6.19435G	-0.14	6.235075G	-51.85	-40.14	-11.71	1
6195MHz	Pass	6.19545G	-0.42	6.231425G	-52.29	-40.42	-11.87	2
6415MHz	Pass	6.415625G	-0.66	6.4553G	-52.02	-40.66	-11.36	1
6415MHz	Pass	6.414525G	-0.86	6.4036G	-30.48	-20.46	-10.02	2
6435MHz	Pass	6.435825G	-0.80	6.4001G	-51.81	-40.80	-11.01	1
6435MHz	Pass	6.434225G	-1.08	6.3979G	-52.36	-41.08	-11.28	2
6475MHz	Pass	6.4756G	-1.58	6.43195G	-50.21	-41.58	-8.63	1
6475MHz	Pass	6.474225G	-1.54	6.463425G	-31.85	-21.55	-10.30	2
6515MHz	Pass	6.516G	-2.71	6.55205G	-51.91	-42.71	-9.20	1
6515MHz	Pass	6.51435G	-2.51	6.470275G	-52.37	-42.51	-9.86	2
6535MHz	Pass	6.535825G	-2.96	6.486G	-51.83	-42.96	-8.87	1
6535MHz	Pass	6.5343G	-2.62	6.485675G	-52.38	-42.62	-9.76	2
6695MHz	Pass	6.6939G	-2.04	6.731625G	-52.06	-42.04	-10.02	1
6695MHz	Pass	6.6963G	-2.61	6.731025G	-52.28	-42.61	-9.67	2
6875MHz	Pass	6.87425G	-2.88	6.91555G	-51.33	-42.88	-8.45	1
6875MHz	Pass	6.876075G	-3.80	6.834575G	-51.65	-43.80	-7.85	2
6895MHz	Pass	6.894525G	-1.89	6.9327G	-51.23	-41.89	-9.34	1
6895MHz	Pass	6.8954G	-3.13	6.9445G	-51.40	-43.13	-8.27	2
6995MHz	Pass	6.994575G	-3.17	6.958875G	-50.99	-43.17	-7.82	1
6995MHz	Pass	6.9954G	-3.63	7.0338G	-51.24	-43.63	-7.61	2
7095MHz	Pass	7.095575G	-5.35	7.04705G	-51.15	-45.35	-5.80	1
7095MHz	Pass	7.09435G	-5.61	7.04635G	-51.43	-45.61	-5.82	2
7115MHz	Pass	7.115375G	-10.22	7.068075G	-51.72	-50.22	-1.50	1
7115MHz	Pass	7.1146G	-10.55	7.075725G	-51.89	-50.55	-1.34	2
802.11be EHT20_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.953925G	-3.09	5.99445G	-53.91	-43.09	-10.82	1
5955MHz	Pass	5.954425G	-2.58	5.988575G	-54.18	-42.58	-11.60	2
6195MHz	Pass	6.19445G	-2.06	6.231875G	-52.89	-42.06	-10.83	1
6195MHz	Pass	6.1946G	-2.14	6.229425G	-53.35	-42.14	-11.21	2
6415MHz	Pass	6.415575G	-2.80	6.449375G	-52.97	-42.80	-10.17	1
6415MHz	Pass	6.414625G	-3.09	6.448725G	-53.52	-43.09	-10.43	2
6435MHz	Pass	6.4354G	-3.34	6.474625G	-53.14	-43.34	-9.80	1
6435MHz	Pass	6.43545G	-3.45	6.471625G	-53.33	-43.45	-9.88	2
6475MHz	Pass	6.47555G	-4.06	6.431975G	-51.33	-44.06	-7.27	1
6475MHz	Pass	6.47415G	-3.54	6.425975G	-53.50	-43.54	-9.96	2
6515MHz	Pass	6.516025G	-4.70	6.5566G	-53.42	-44.70	-8.72	1
6515MHz	Pass	6.51455G	-4.25	6.55085G	-53.41	-44.25	-9.16	2
6535MHz	Pass	6.535875G	-4.61	6.49305G	-53.21	-44.61	-8.60	1
6535MHz	Pass	6.534375G	-4.01	6.5758G	-53.50	-44.01	-9.49	2
6695MHz	Pass	6.694375G	-4.48	6.73345G	-52.84	-44.48	-8.36	1
6695MHz	Pass	6.695425G	-4.49	6.734725G	-53.40	-44.49	-8.91	2
6875MHz	Pass	6.87445G	-4.09	6.9242G	-52.40	-44.09	-8.31	1
6875MHz	Pass	6.876G	-5.41	6.91385G	-52.82	-45.41	-7.41	2
6895MHz	Pass	6.8955G	-3.91	6.9426G	-52.09	-43.91	-8.18	1
6895MHz	Pass	6.894275G	-5.15	6.9432G	-52.66	-45.15	-7.51	2
6995MHz	Pass	6.994375G	-4.51	7.0394G	-51.95	-44.51	-7.44	1
6995MHz	Pass	6.995375G	-5.48	7.029925G	-52.12	-45.48	-6.64	2
7095MHz	Pass	7.09545G	-7.08	7.049375G	-52.29	-47.08	-5.21	1
7095MHz	Pass	7.094625G	-7.30	7.048575G	-52.74	-47.30	-5.44	2
7115MHz	Pass	7.115875G	-8.01	7.074325G	-52.60	-48.01	-4.59	1
7115MHz	Pass	7.115375G	-7.40	7.08245G	-52.71	-47.40	-5.31	2
802.11be EHT40_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5965MHz	Pass	5.96305G	1.99	6.05835G	-48.31	-38.01	-10.30	1
5965MHz	Pass	5.966G	2.31	6.0387G	-48.92	-37.69	-11.23	2
6205MHz	Pass	6.204G	2.79	6.28875G	-48.25	-37.21	-11.04	1
6205MHz	Pass	6.20605G	2.23	6.2916G	-48.59	-37.77	-10.82	2
6405MHz	Pass	6.4069G	2.56	6.4994G	-48.11	-37.44	-10.67	1
6405MHz	Pass	6.40325G	2.01	6.50115G	-48.32	-37.99	-10.33	2
6445MHz	Pass	6.44695G	2.45	6.52525G	-48.27	-37.55	-10.72	1
6445MHz	Pass	6.4432G	2.08	6.5378G	-48.53	-37.92	-10.61	2
6485MHz	Pass	6.487749G	2.46	6.39135G	-48.32	-37.54	-10.78	1
6485MHz	Pass	6.482901G	2.34	6.3922G	-48.45	-37.66	-10.79	2
6525MHz	Pass	6.527799G	0.97	6.61535G	-48.01	-39.03	-8.98	1
6525MHz	Pass	6.52335G	1.54	6.43535G	-48.58	-38.46	-10.12	2
6565MHz	Pass	6.568649G	0.08	6.46625G	-48.36	-39.92	-8.44	1
6565MHz	Pass	6.562301G	0.68	6.63205G	-48.66	-39.32	-9.34	2
6685MHz	Pass	6.6831G	0.85	6.7784G	-48.02	-39.15	-8.87	1
6685MHz	Pass	6.687549G	0.66	6.78205G	-48.27	-39.34	-8.93	2
6885MHz	Pass	6.884G	1.52	6.98315G	-46.99	-38.48	-8.51	1
6885MHz	Pass	6.8862G	0.48	6.98365G	-47.50	-39.52	-7.98	2
6925MHz	Pass	6.9259G	1.17	6.9919G	-46.79	-38.83	-7.96	1
6925MHz	Pass	6.92625G	0.30	6.99745G	-47.08	-39.70	-7.38	2
7005MHz	Pass	7.00595G	-1.13	6.93295G	-47.56	-41.13	-6.43	1
7005MHz	Pass	7.0058G	-1.82	6.92805G	-48.02	-41.82	-6.20	2
7085MHz	Pass	7.0869G	-1.45	6.99275G	-47.07	-41.45	-5.62	1
7085MHz	Pass	7.08565G	-1.51	6.9922G	-47.49	-41.51	-5.98	2
802.11be EHT80_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	5.9819G	1.10	6.1776G	-47.87	-38.90	-8.97	1
5985MHz	Pass	5.9869G	1.68	6.0278G	-27.20	-18.32	-8.88	2
6225MHz	Pass	6.2238G	2.67	6.1821G	-26.35	-17.13	-9.22	1
6225MHz	Pass	6.2262G	2.40	6.2676G	-26.56	-17.60	-8.96	2
6385MHz	Pass	6.3892G	2.86	6.4271G	-24.81	-17.15	-7.66	1
6385MHz	Pass	6.3821G	2.11	6.2127G	-48.05	-37.89	-10.16	2
6465MHz	Pass	6.4687G	2.71	6.6236G	-47.93	-37.29	-10.64	1
6465MHz	Pass	6.4619G	2.56	6.4229G	-25.18	-17.48	-7.70	2
6545MHz	Pass	6.5519G	0.59	6.7196G	-47.68	-39.41	-8.27	1
6545MHz	Pass	6.5399G	0.39	6.415G	-48.34	-39.61	-8.73	2
6625MHz	Pass	6.6167G	1.45	6.8164G	-47.64	-38.55	-9.09	1
6625MHz	Pass	6.6279G	1.03	6.8239G	-48.16	-38.97	-9.19	2
6705MHz	Pass	6.7G	1.71	6.8749G	-47.67	-38.29	-9.38	1
6705MHz	Pass	6.7091G	0.84	6.843G	-48.07	-39.16	-8.91	2
6785MHz	Pass	6.7815G	1.97	6.9765G	-46.83	-38.03	-8.80	1
6785MHz	Pass	6.7896G	1.57	6.9801G	-47.21	-38.43	-8.78	2
6865MHz	Pass	6.8637G	0.85	6.9992G	-46.79	-39.15	-7.64	1
6865MHz	Pass	6.8662G	-0.00	6.9988G	-47.08	-40.00	-7.08	2
6945MHz	Pass	6.9434G	-0.20	7.0774G	-47.87	-40.20	-7.67	1
6945MHz	Pass	6.9463G	-0.48	7.0708G	-48.19	-40.48	-7.71	2
7025MHz	Pass	7.0268G	-1.30	6.8717G	-47.70	-41.30	-6.40	1
7025MHz	Pass	7.0262G	-1.87	6.8415G	-48.09	-41.87	-6.22	2
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.0214G	5.58	6.4168G	-43.13	-34.42	-8.71	1
6025MHz	Pass	6.0286G	5.48	6.4056G	-43.53	-34.52	-9.01	2
6185MHz	Pass	6.1824G	6.86	6.4458G	-43.02	-33.14	-9.88	1
6185MHz	Pass	6.1876G	6.89	6.4522G	-43.32	-33.11	-10.21	2
6345MHz	Pass	6.348G	6.17	6.622G	-42.73	-33.83	-8.90	1
6345MHz	Pass	6.3418G	5.66	6.6098G	-43.14	-34.34	-8.80	2
6505MHz	Pass	6.5108G	5.40	6.8176G	-42.94	-34.60	-8.34	1
6505MHz	Pass	6.4988G	4.92	6.2248G	-43.34	-35.08	-8.26	2



Mask_Non-Beamforming

Appendix E.1


Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6665MHz	Pass	6.658G	5.76	6.9906G	-42.31	-34.24	-8.07	1
6665MHz	Pass	6.6716G	5.08	6.9924G	-42.70	-34.92	-7.78	2
6825MHz	Pass	6.8208G	6.25	6.5568G	-41.91	-33.75	-8.16	1
6825MHz	Pass	6.8286G	5.99	6.5636G	-42.25	-34.01	-8.24	2
6985MHz	Pass	6.988G	5.14	6.7192G	-42.60	-34.86	-7.74	1
6985MHz	Pass	6.9874G	4.91	6.6246G	-42.91	-35.09	-7.82	2

5.925-6.425GHz_802.11a_Nss1,(6Mbps)_2TX

MASK

6415MHz_TX

06/02/2026

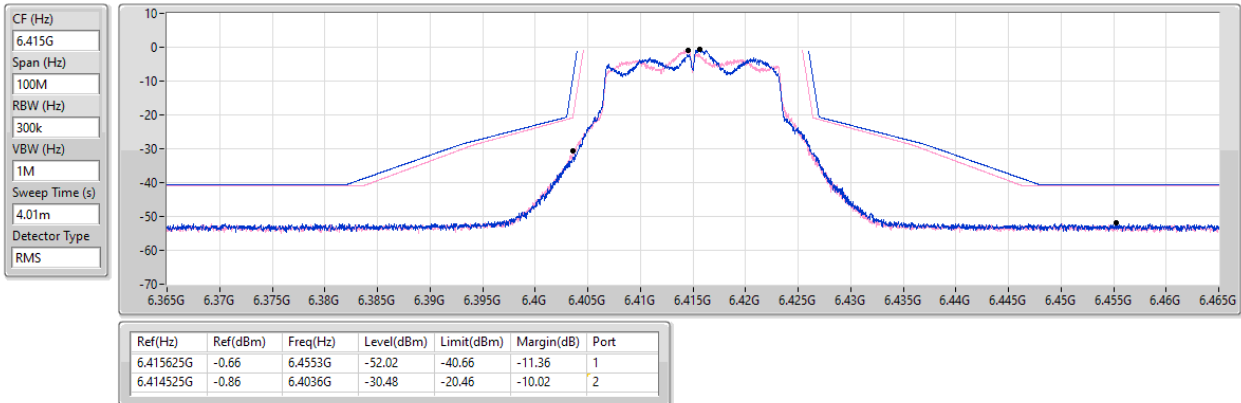


5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

6415MHz_TX

06/02/2026

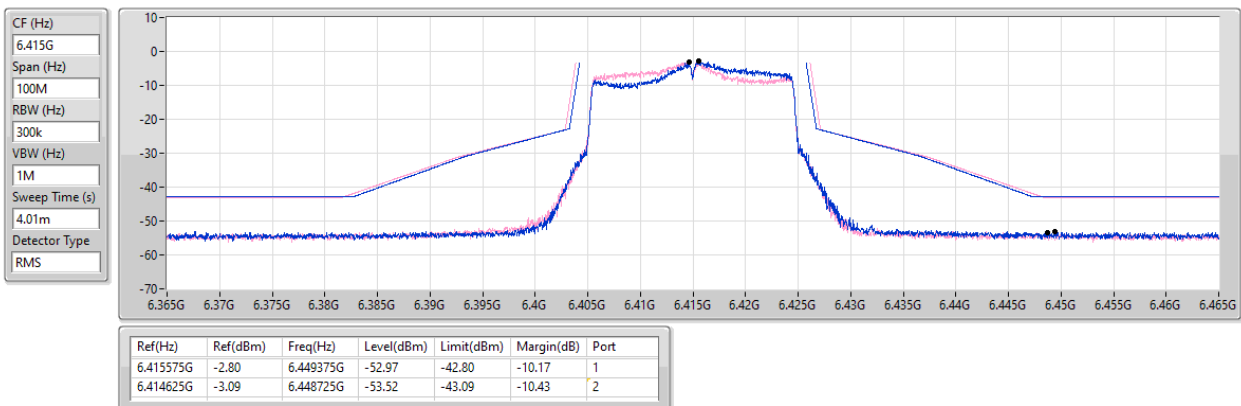


5.925-6.425GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

5965MHz_TX

06/02/2026

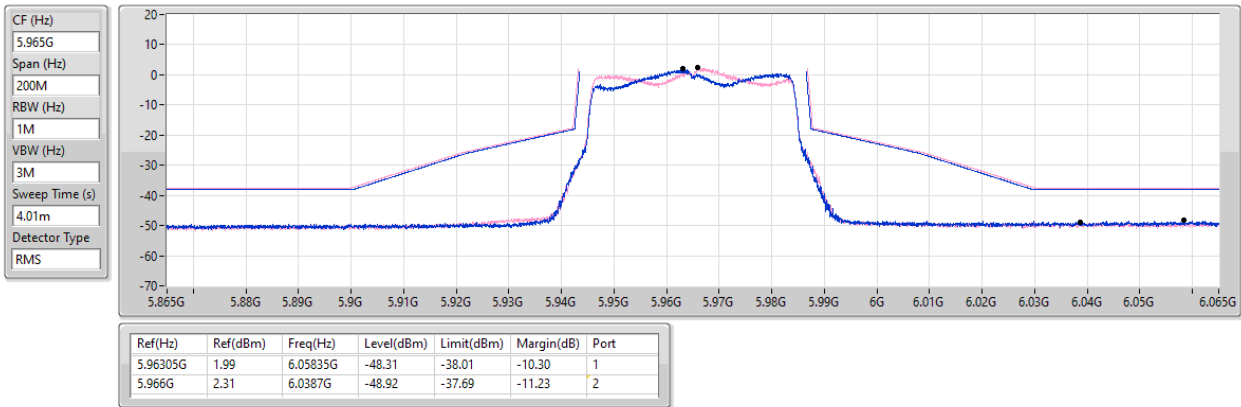


5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK

6385MHz_TX

06/02/2026

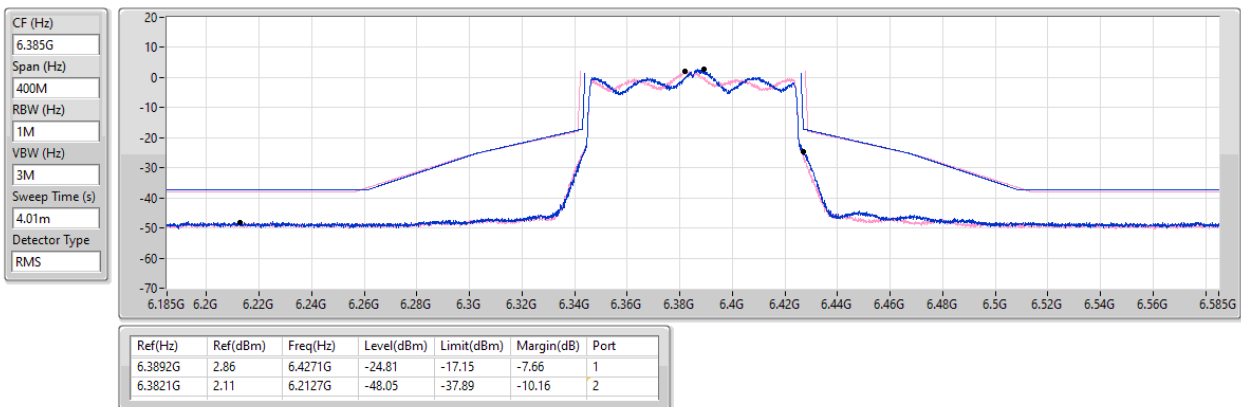


5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_2TX

MASK

6025MHz_TX

06/02/2026

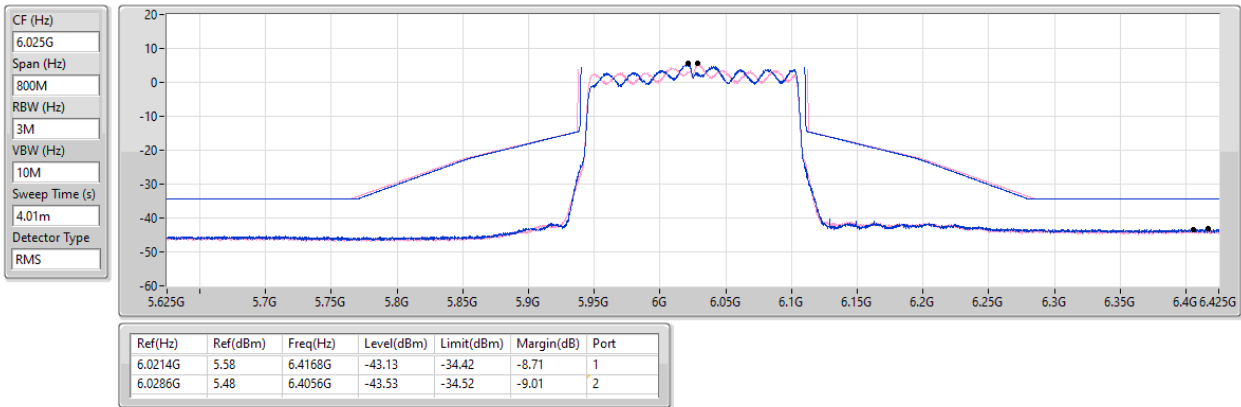


6.425-6.525GHz_802.11a_Nss1,(6Mbps)_2TX

MASK

6475MHz_TX

06/02/2026

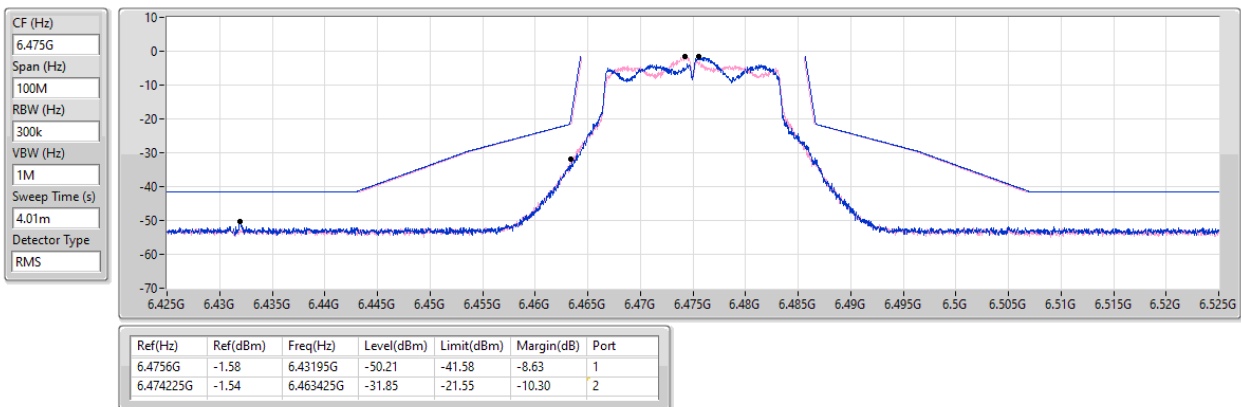


6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

6475MHz_TX

06/02/2026

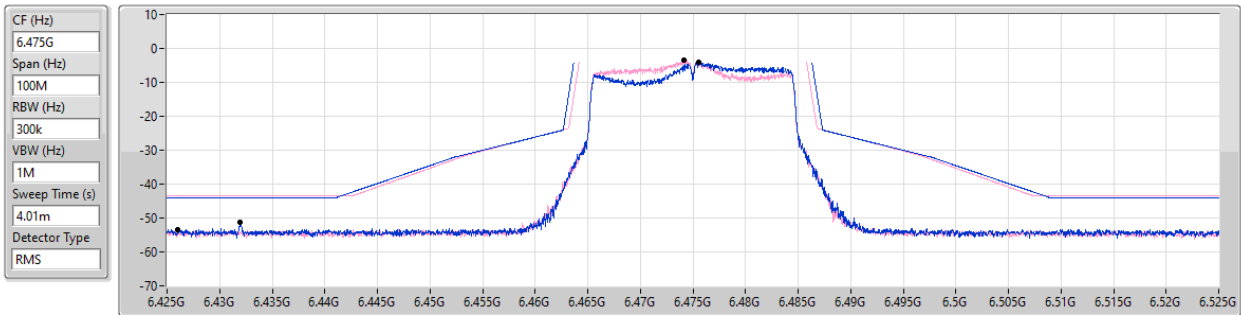


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.47555G	-4.06	6.431975G	-51.33	-44.06	-7.27	1
6.47415G	-3.54	6.425975G	-53.50	-43.54	-9.96	2

6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

6525MHz_TX

06/02/2026

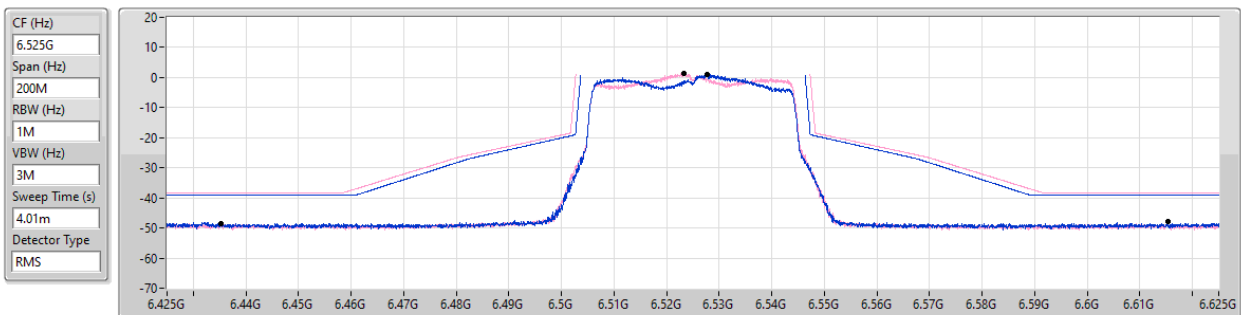


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.527799G	0.97	6.61535G	-48.01	-39.03	-8.98	1
6.52335G	1.54	6.43535G	-48.58	-38.46	-10.12	2

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK

6465MHz_TX

06/02/2026

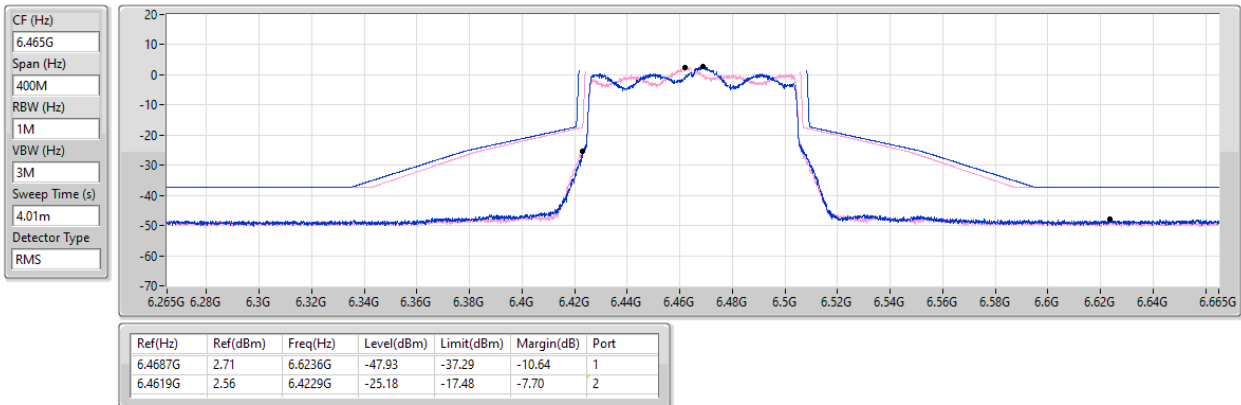


6.425-6.525GHz_802.11be EHT160_Nss1,(MCS0)_2TX

MASK

6505MHz_TX

06/02/2026

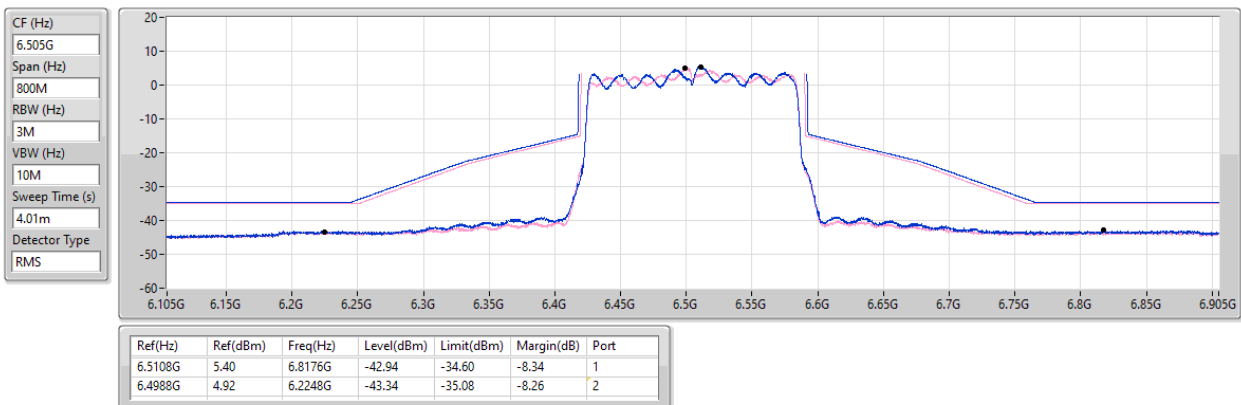


6.525-6.875GHz_802.11a_Nss1,(6Mbps)_2TX

MASK

6875MHz_TX

06/02/2026

CF (Hz)
6.875G
Span (Hz)
100M
RBW (Hz)
300k
VBW (Hz)
1M
Sweep Time (s)
4.01m
Detector Type
RMS

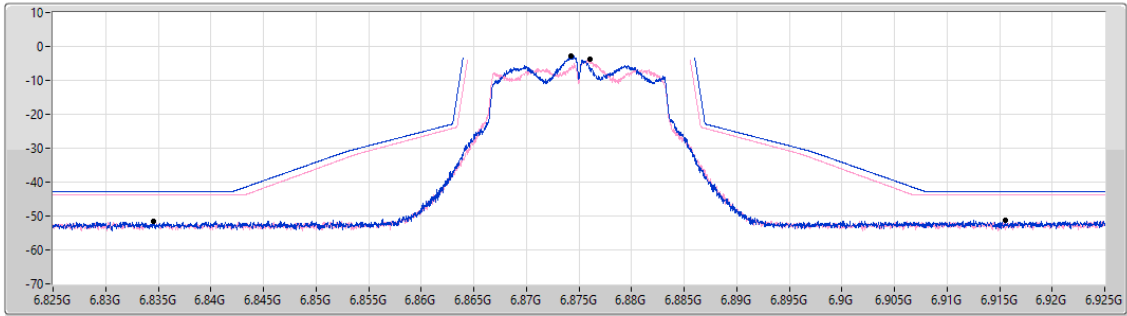

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.87425G	-2.88	6.91555G	-51.33	-42.88	-8.45	1
6.876075G	-3.80	6.834575G	-51.65	-43.80	-7.85	2


6.525-6.875GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

6875MHz_TX

06/02/2026

CF (Hz)
6.875G
Span (Hz)
100M
RBW (Hz)
300k
VBW (Hz)
1M
Sweep Time (s)
4.01m
Detector Type
RMS

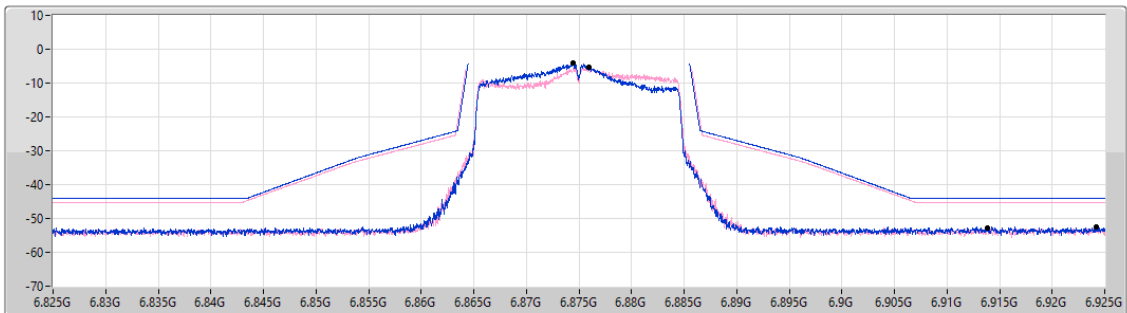


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.87445G	-4.09	6.9242G	-52.40	-44.09	-8.31	1
6.876G	-5.41	6.91385G	-52.82	-45.41	-7.41	2

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

6885MHz_TX

06/02/2026

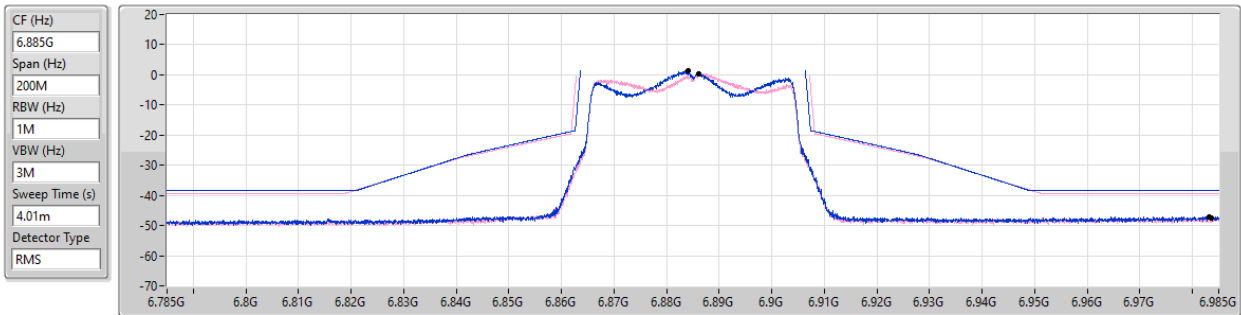


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.884G	1.52	6.98315G	-46.99	-38.48	-8.51	1
6.8862G	0.48	6.98365G	-47.50	-39.52	-7.98	2

6.525-6.875GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK

6865MHz_TX

06/02/2026

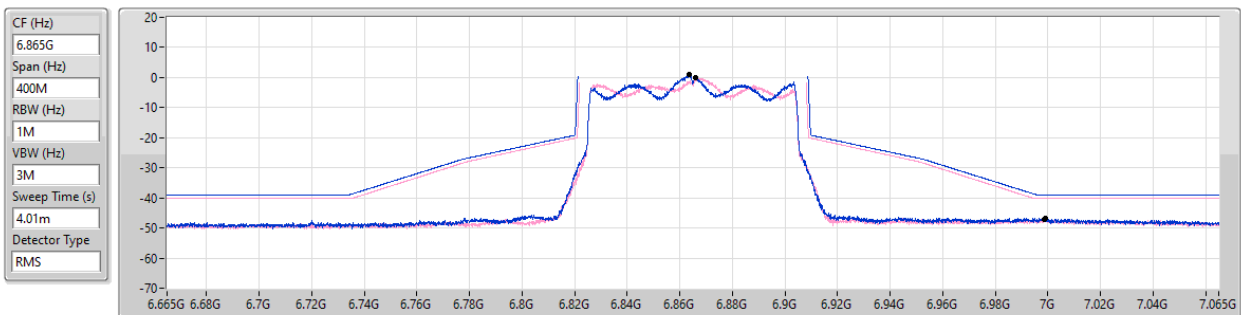

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.8637G	0.85	6.9992G	-46.79	-39.15	-7.64	1
6.8662G	-0.00	6.9988G	-47.08	-40.00	-7.08	2

6.525-6.875GHz_802.11be EHT160_Nss1,(MCS0)_2TX

MASK

6665MHz_TX

06/02/2026

CF (Hz)
6.665G


Span (Hz)
800M

RBW (Hz)
3M

VBW (Hz)
10M

Sweep Time (s)
4.01m

Detector Type
RMS

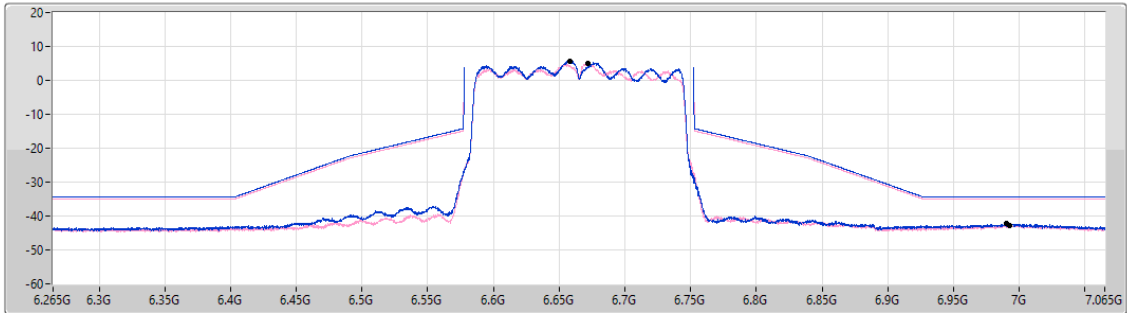

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.658G	5.76	6.9906G	-42.31	-34.24	-8.07	1
6.6716G	5.08	6.9924G	-42.70	-34.92	-7.78	2

6.875-7.125GHz_802.11a_Nss1,(6Mbps)_2TX

MASK

7115MHz_TX

06/02/2026

CF (Hz)
7.115G


Span (Hz)
100M

RBW (Hz)
300k

VBW (Hz)
1M

Sweep Time (s)
4.01m

Detector Type
RMS

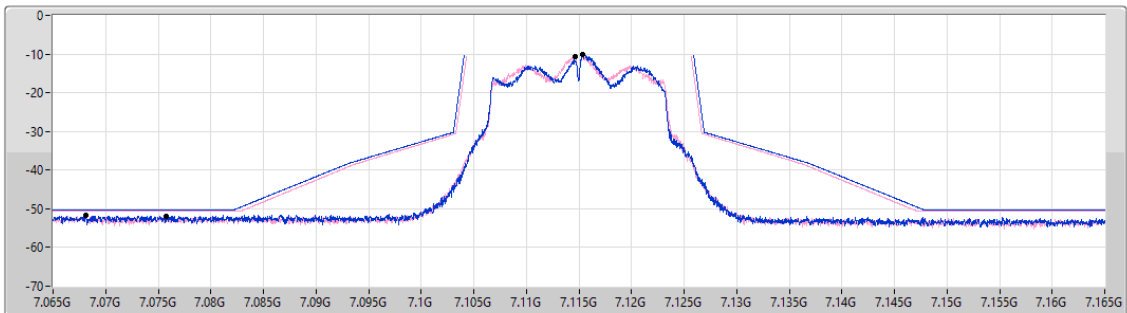


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
7.115375G	-10.22	7.068075G	-51.72	-50.22	-1.50	1
7.1146G	-10.55	7.075725G	-51.89	-50.55	-1.34	2

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_2TX

MASK

7115MHz_TX

06/02/2026

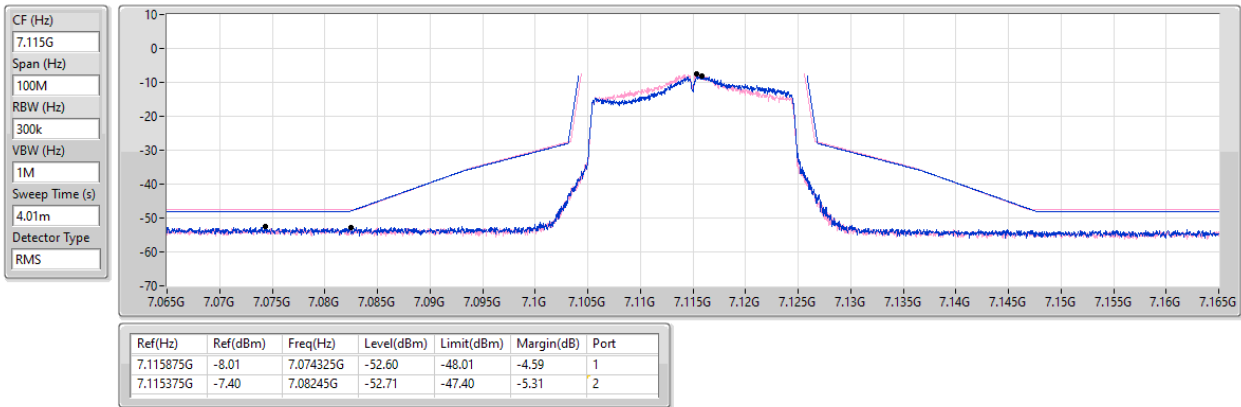


6.875-7.125GHz_802.11be EHT40_Nss1,(MCS0)_2TX

MASK

7085MHz_TX

06/02/2026

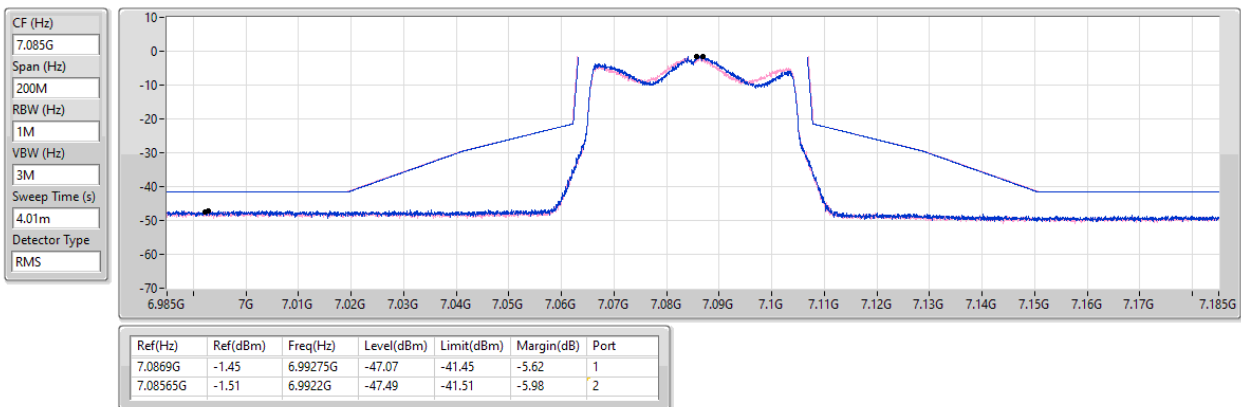


6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_2TX

MASK

7025MHz_TX

06/02/2026

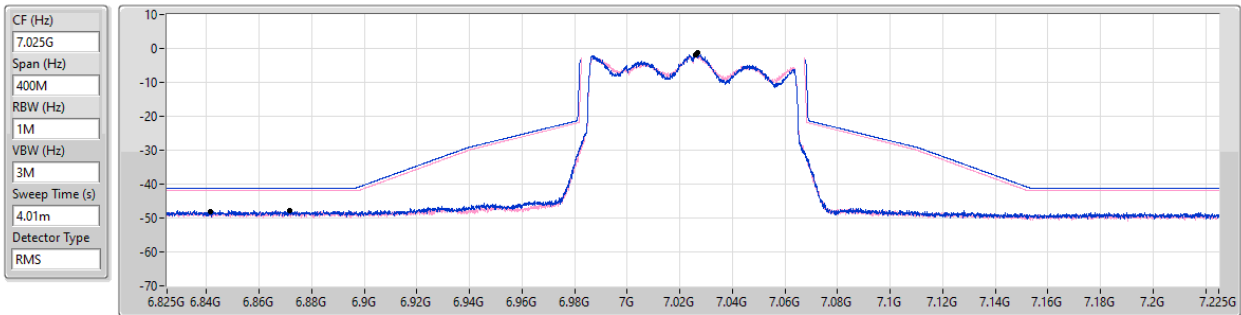


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
7.0268G	-1.30	6.8717G	-47.70	-41.30	-6.40	1
7.0262G	-1.87	6.8415G	-48.09	-41.87	-6.22	2

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_2TX

MASK

6985MHz_TX

06/02/2026

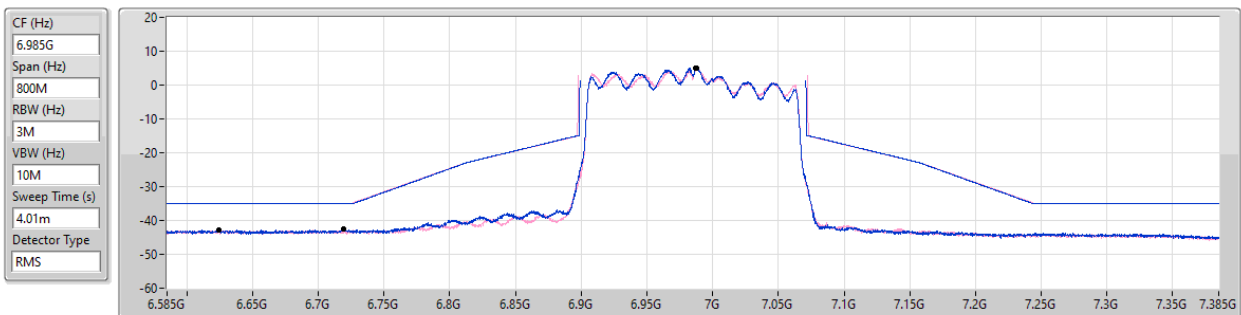

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.988G	5.14	6.7192G	-42.60	-34.86	-7.74	1
6.9874G	4.91	6.6246G	-42.91	-35.09	-7.82	2

Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	Pass	5.954375G	-2.88	5.9668G	-35.14	-22.92	-12.22	1
802.11be EHT40-BF_Nss1,(MCS0)_2TX	Pass	6.20405G	2.34	6.22785G	-30.47	-17.73	-12.74	2
802.11be EHT80-BF_Nss1,(MCS0)_2TX	Pass	5.9881G	1.48	6.0284G	-27.76	-18.53	-9.23	2
802.11be EHT160-BF_Nss1,(MCS0)_2TX	Pass	6.3484G	5.79	6.4314G	-23.43	-14.21	-9.22	1
6.425-6.525GHz	-	-	-	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	Pass	6.516G	-5.23	6.527075G	-37.60	-25.13	-12.47	1
802.11be EHT40-BF_Nss1,(MCS0)_2TX	Pass	6.48395G	2.33	6.46255G	-29.08	-17.71	-11.37	2
802.11be EHT80-BF_Nss1,(MCS0)_2TX	Pass	6.5508G	0.46	6.5878G	-28.75	-19.58	-9.17	1
802.11be EHT160-BF_Nss1,(MCS0)_2TX	Pass	6.4992G	4.66	6.5908G	-25.11	-15.35	-9.76	2
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	Pass	6.874675G	-3.98	6.86375G	-36.66	-24.02	-12.64	1
802.11be EHT40-BF_Nss1,(MCS0)_2TX	Pass	6.88615G	0.58	6.90695G	-28.78	-19.44	-9.34	2
802.11be EHT80-BF_Nss1,(MCS0)_2TX	Pass	6.8665G	0.05	6.9077G	-28.14	-19.95	-8.19	2
802.11be EHT160-BF_Nss1,(MCS0)_2TX	Pass	6.6706G	5.03	6.7514G	-24.95	-14.97	-9.98	2
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11be EHT20-BF_Nss1,(MCS0)_2TX	Pass	6.895475G	-5.04	6.88335G	-37.80	-25.04	-12.76	2
802.11be EHT40-BF_Nss1,(MCS0)_2TX	Pass	7.0065G	-1.39	6.98235G	-32.91	-21.40	-11.51	2
802.11be EHT80-BF_Nss1,(MCS0)_2TX	Pass	7.0263G	-1.28	6.9808G	-31.71	-20.68	-11.03	1
802.11be EHT160-BF_Nss1,(MCS0)_2TX	Pass	6.9882G	5.42	6.624G	-47.23	-34.58	-12.65	1

Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT20-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.954375G	-2.88	5.9668G	-35.14	-22.92	-12.22	1
5955MHz	Pass	5.9558G	-1.79	5.943025G	-36.29	-21.88	-14.41	2
6195MHz	Pass	6.19535G	-2.05	6.183025G	-38.29	-22.16	-16.13	1
6195MHz	Pass	6.1954G	-2.20	6.183025G	-38.00	-22.22	-15.78	2
6415MHz	Pass	6.4157G	-3.12	6.427G	-37.82	-21.52	-16.30	1
6415MHz	Pass	6.41455G	-3.57	6.426675G	-36.49	-23.17	-13.32	2
6435MHz	Pass	6.43585G	-3.48	6.446675G	-36.54	-23.48	-13.06	1
6435MHz	Pass	6.4346G	-3.69	6.423275G	-36.64	-22.59	-14.05	2
6475MHz	Pass	6.475425G	-3.65	6.431975G	-57.86	-43.65	-14.21	1
6475MHz	Pass	6.4741G	-3.36	6.48705G	-38.73	-23.38	-15.35	2
6515MHz	Pass	6.516G	-5.23	6.527075G	-37.60	-25.13	-12.47	1
6515MHz	Pass	6.5147G	-4.05	6.502775G	-38.81	-24.10	-14.71	2
6535MHz	Pass	6.535725G	-4.78	6.54705G	-37.65	-24.80	-12.85	1
6535MHz	Pass	6.534075G	-4.05	6.54725G	-37.97	-24.14	-13.83	2
6695MHz	Pass	6.694475G	-3.78	6.6825G	-38.75	-23.83	-14.92	1
6695MHz	Pass	6.695325G	-4.12	6.682625G	-37.88	-24.17	-13.71	2
6875MHz	Pass	6.874675G	-3.98	6.86375G	-36.66	-24.02	-12.64	1
6875MHz	Pass	6.8762G	-4.71	6.86295G	-39.79	-24.75	-15.04	2
6895MHz	Pass	6.894275G	-3.91	6.906425G	-38.54	-23.98	-14.56	1
6895MHz	Pass	6.895475G	-5.04	6.88335G	-37.80	-25.04	-12.76	2
6995MHz	Pass	6.994475G	-4.65	6.98365G	-38.53	-24.71	-13.82	1
6995MHz	Pass	6.99555G	-4.93	6.983325G	-39.82	-24.93	-14.89	2
7095MHz	Pass	7.09575G	-7.05	7.106875G	-42.20	-27.08	-15.12	1
7095MHz	Pass	7.094325G	-6.94	7.08335G	-40.90	-27.04	-13.86	2
7115MHz	Pass	7.115775G	-7.99	7.126925G	-43.22	-27.99	-15.23	1
7115MHz	Pass	7.115575G	-7.54	7.1032G	-43.45	-26.84	-16.61	2
802.11be EHT40-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5965MHz	Pass	5.961501G	1.75	5.94165G	-34.09	-18.26	-15.83	1
5965MHz	Pass	5.9661G	2.51	5.98805G	-31.36	-17.39	-13.97	2
6205MHz	Pass	6.204G	2.45	6.2281G	-31.85	-17.57	-14.28	1
6205MHz	Pass	6.20405G	2.34	6.22785G	-30.47	-17.73	-12.74	2
6405MHz	Pass	6.407G	2.13	6.4279G	-30.72	-17.92	-12.80	1
6405MHz	Pass	6.4037G	1.77	6.4278G	-31.39	-18.24	-13.15	2
6445MHz	Pass	6.44665G	2.65	6.46765G	-30.12	-17.36	-12.76	1
6445MHz	Pass	6.4431G	1.91	6.4677G	-30.88	-18.10	-12.78	2
6485MHz	Pass	6.487799G	2.32	6.50835G	-33.09	-17.73	-15.36	1
6485MHz	Pass	6.48395G	2.33	6.46255G	-29.08	-17.71	-11.37	2
6525MHz	Pass	6.52675G	1.24	6.54855G	-34.68	-18.78	-15.90	1
6525MHz	Pass	6.5233G	1.58	6.5021G	-32.01	-18.42	-13.59	2
6565MHz	Pass	6.569399G	-0.06	6.54185G	-33.57	-18.66	-14.91	1
6565MHz	Pass	6.562501G	0.60	6.542G	-32.13	-19.48	-12.65	2
6685MHz	Pass	6.6833G	1.10	6.6622G	-31.88	-18.91	-12.97	1
6685MHz	Pass	6.6863G	1.19	6.66255G	-30.41	-18.83	-11.58	2
6885MHz	Pass	6.88415G	1.57	6.8618G	-32.86	-18.49	-14.37	1
6885MHz	Pass	6.88615G	0.58	6.90695G	-28.78	-19.44	-9.34	2
6925MHz	Pass	6.9239G	1.26	6.94755G	-30.43	-17.44	-12.99	1
6925MHz	Pass	6.9264G	0.63	6.9484G	-34.99	-19.38	-15.61	2
7005MHz	Pass	7.0062G	-0.96	6.98145G	-36.58	-21.02	-15.56	1
7005MHz	Pass	7.0065G	-1.39	6.98235G	-32.91	-21.40	-11.51	2
7085MHz	Pass	7.0863G	-1.56	7.0619G	-36.39	-21.36	-15.03	1
7085MHz	Pass	7.08595G	-1.71	7.1086G	-38.52	-21.77	-16.75	2
802.11be EHT80-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
5985MHz	Pass	5.9815G	1.27	5.9416G	-29.53	-18.74	-10.79	1
5985MHz	Pass	5.9881G	1.48	6.0284G	-27.76	-18.53	-9.23	2

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6225MHz	Pass	6.2236G	2.30	6.1819G	-27.05	-17.72	-9.33	1
6225MHz	Pass	6.2238G	2.20	6.1822G	-27.06	-17.80	-9.26	2
6385MHz	Pass	6.3865G	2.54	6.4292G	-28.73	-17.48	-11.25	1
6385MHz	Pass	6.3812G	2.07	6.3407G	-28.82	-17.99	-10.83	2
6465MHz	Pass	6.4675G	2.45	6.5085G	-26.79	-17.56	-9.23	1
6465MHz	Pass	6.4621G	2.44	6.4208G	-29.29	-16.96	-12.33	2
6545MHz	Pass	6.5508G	0.46	6.5878G	-28.75	-19.58	-9.17	1
6545MHz	Pass	6.5408G	0.45	6.5014G	-29.66	-19.56	-10.10	2
6625MHz	Pass	6.6176G	1.60	6.5817G	-27.57	-18.52	-9.05	1
6625MHz	Pass	6.632G	1.36	6.6678G	-27.22	-18.68	-8.54	2
6705MHz	Pass	6.7034G	1.88	6.6619G	-27.41	-18.16	-9.25	1
6705MHz	Pass	6.7088G	1.58	6.7484G	-28.21	-18.45	-9.76	2
6785MHz	Pass	6.7819G	2.30	6.7415G	-27.54	-17.77	-9.77	1
6785MHz	Pass	6.7887G	1.81	6.8294G	-29.51	-18.24	-11.27	2
6865MHz	Pass	6.8637G	0.33	6.8218G	-28.14	-19.75	-8.39	1
6865MHz	Pass	6.8665G	0.05	6.9077G	-28.14	-19.95	-8.19	2
6945MHz	Pass	6.944G	0.12	6.9897G	-33.65	-19.89	-13.76	1
6945MHz	Pass	6.9468G	-0.54	6.9891G	-31.89	-20.56	-11.33	2
7025MHz	Pass	7.0263G	-1.28	6.9808G	-31.71	-20.68	-11.03	1
7025MHz	Pass	7.0268G	-1.88	6.9804G	-33.00	-21.91	-11.09	2
802.11be EHT160-BF_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.0218G	5.06	6.111G	-25.54	-14.95	-10.59	1
6025MHz	Pass	6.029G	5.09	6.1126G	-27.36	-14.92	-12.44	2
6185MHz	Pass	6.1818G	6.10	6.0974G	-25.25	-13.91	-11.34	1
6185MHz	Pass	6.1822G	5.85	6.0962G	-28.83	-14.15	-14.68	2
6345MHz	Pass	6.3484G	5.79	6.4314G	-23.43	-14.21	-9.22	1
6345MHz	Pass	6.3412G	5.23	6.6122G	-48.30	-34.77	-13.53	2
6505MHz	Pass	6.5122G	5.12	6.5934G	-27.47	-14.89	-12.58	1
6505MHz	Pass	6.4992G	4.66	6.5908G	-25.11	-15.35	-9.76	2
6665MHz	Pass	6.6592G	5.41	6.5768G	-26.22	-14.60	-11.62	1
6665MHz	Pass	6.6706G	5.03	6.7514G	-24.95	-14.97	-9.98	2
6825MHz	Pass	6.8224G	5.72	6.5548G	-45.72	-34.28	-11.44	1
6825MHz	Pass	6.8278G	5.66	6.5594G	-46.49	-34.34	-12.15	2
6985MHz	Pass	6.9882G	5.42	6.624G	-47.23	-34.58	-12.65	1
6985MHz	Pass	6.9886G	4.90	6.695G	-48.10	-35.10	-13.00	2


5.925-6.425GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

MASK

5955MHz_TX

06/02/2026

CF (Hz)
5.955G
Span (Hz)
100M
RBW (Hz)
300k
VBW (Hz)
1M
Sweep Time (s)
4.01m
Detector Type
RMS

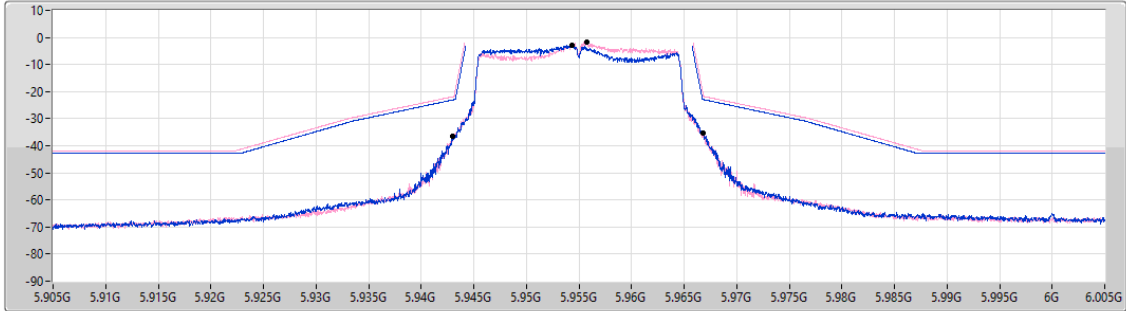

Port 1
Port 2

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
5.954375G	-2.88	5.9668G	-35.14	-22.92	-12.22	1
5.9558G	-1.79	5.943025G	-36.29	-21.88	-14.41	2


5.925-6.425GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

MASK

6205MHz_TX

06/02/2026

CF (Hz)
6.205G
Span (Hz)
200M
RBW (Hz)
1M
VBW (Hz)
3M
Sweep Time (s)
4.01m
Detector Type
RMS

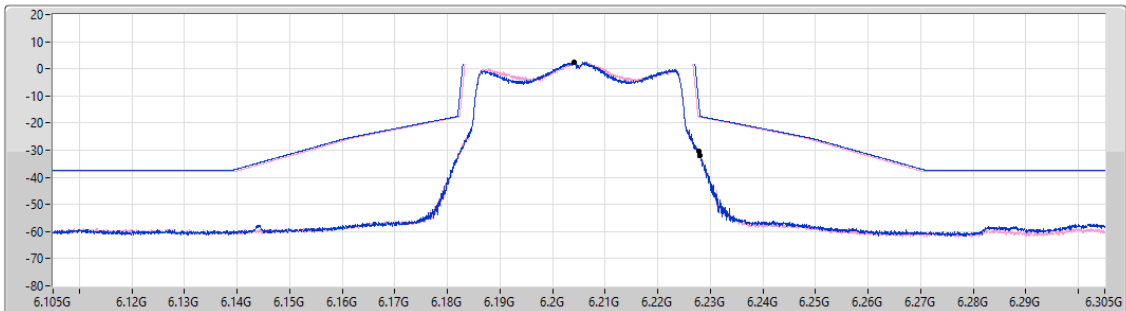

Port 1
Port 2


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.204G	2.45	6.2281G	-31.85	-17.57	-14.28	1
6.20405G	2.34	6.22785G	-30.47	-17.73	-12.74	2

5.925-6.425GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

MASK

5985MHz_TX

06/02/2026

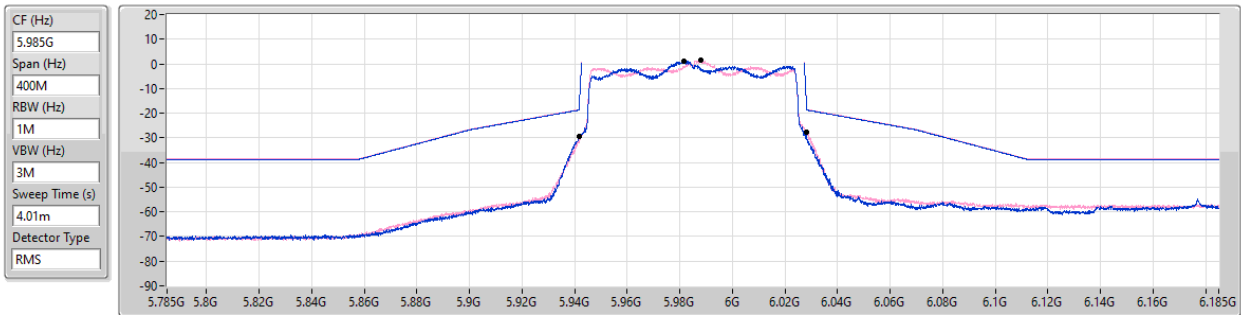


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
5.9815G	1.27	5.9416G	-29.53	-18.74	-10.79	1
5.9881G	1.48	6.0284G	-27.76	-18.53	-9.23	2

5.925-6.425GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

MASK

6345MHz_TX

06/02/2026

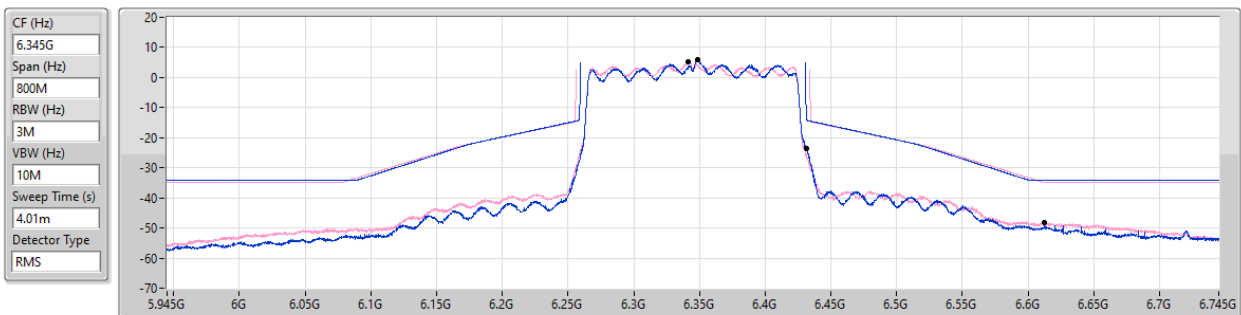


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.3484G	5.79	6.4314G	-23.43	-14.21	-9.22	1
6.3412G	5.23	6.6122G	-48.30	-34.77	-13.53	2

6.425-6.525GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

MASK

6515MHz_TX

06/02/2026

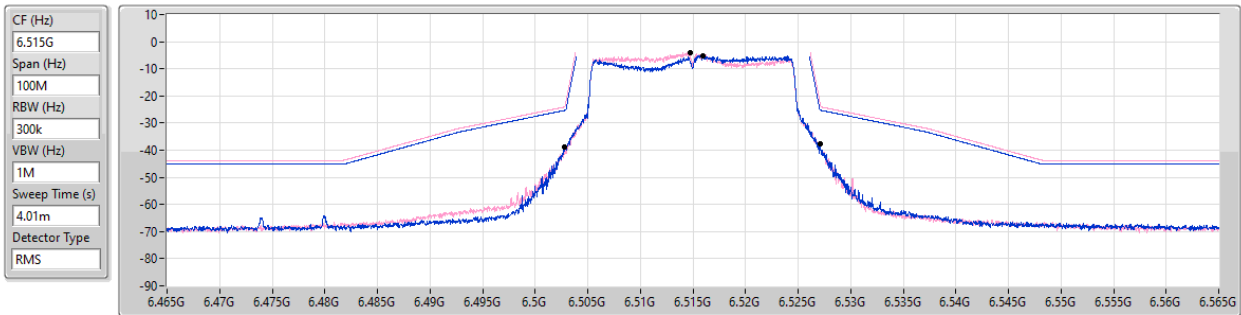


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.516G	-5.23	6.527075G	-37.60	-25.13	-12.47	1
6.5147G	-4.05	6.502775G	-38.81	-24.10	-14.71	2

6.425-6.525GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

MASK

6485MHz_TX

06/02/2026

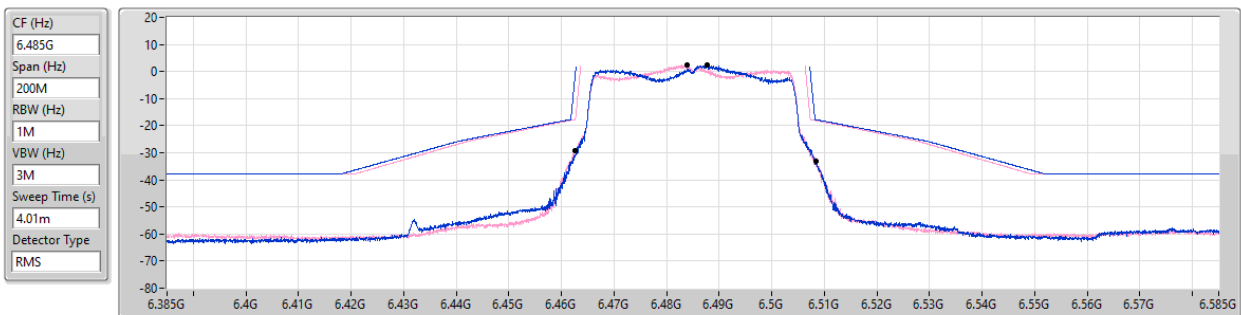


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.487799G	2.32	6.50835G	-33.09	-17.73	-15.36	1
6.48395G	2.33	6.46255G	-29.08	-17.71	-11.37	2

6.425-6.525GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

MASK

6545MHz_TX

06/02/2026

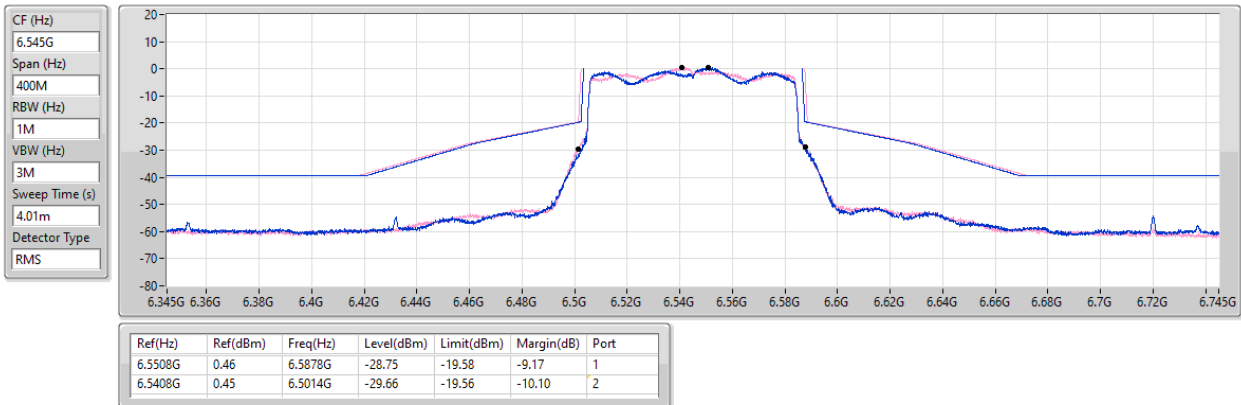


6.425-6.525GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

MASK

6505MHz_TX

06/02/2026

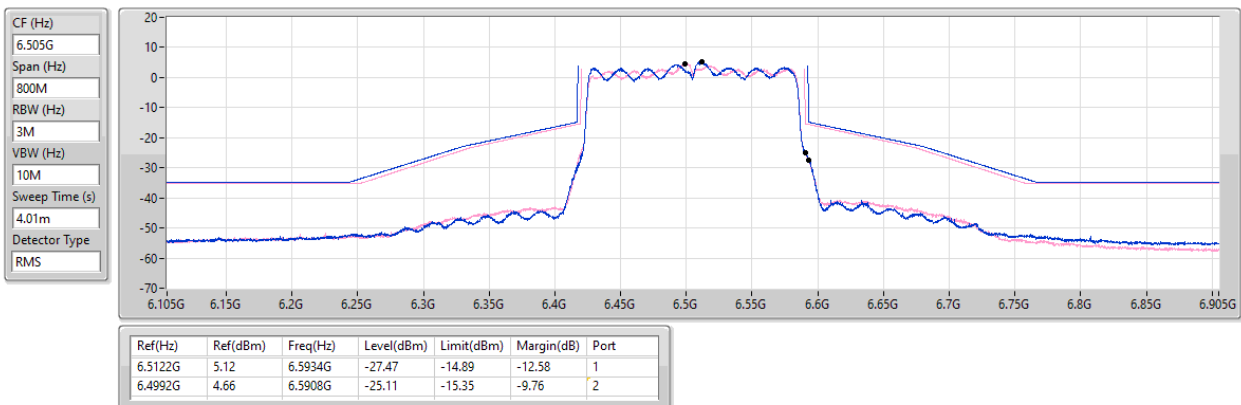


6.525-6.875GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

MASK

6875MHz_TX

06/02/2026

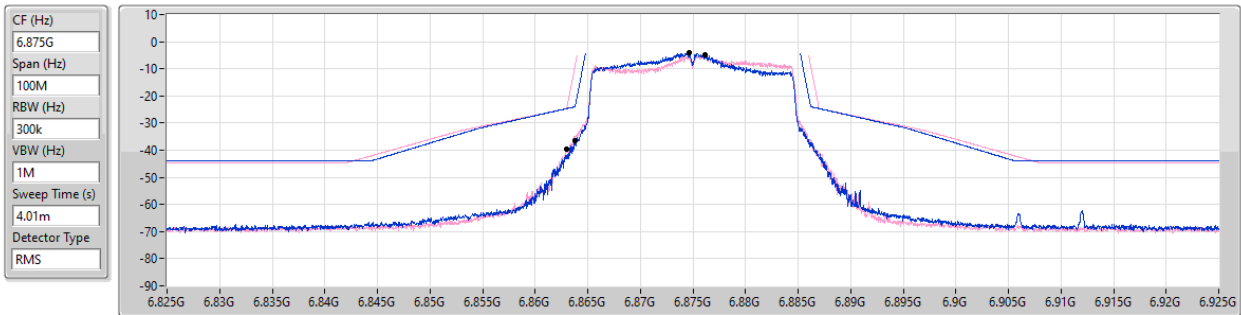


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.874675G	-3.98	6.86375G	-36.66	-24.02	-12.64	1
6.8762G	-4.71	6.86295G	-39.79	-24.75	-15.04	2

6.525-6.875GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

MASK

6885MHz_TX

06/02/2026

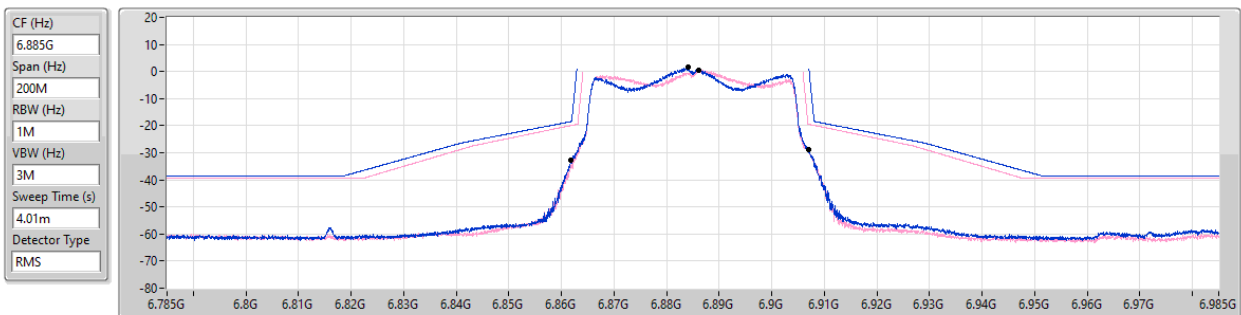


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.88415G	1.57	6.8618G	-32.86	-18.49	-14.37	1
6.88615G	0.58	6.90695G	-28.78	-19.44	-9.34	2

6.525-6.875GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

MASK

6865MHz_TX

06/02/2026

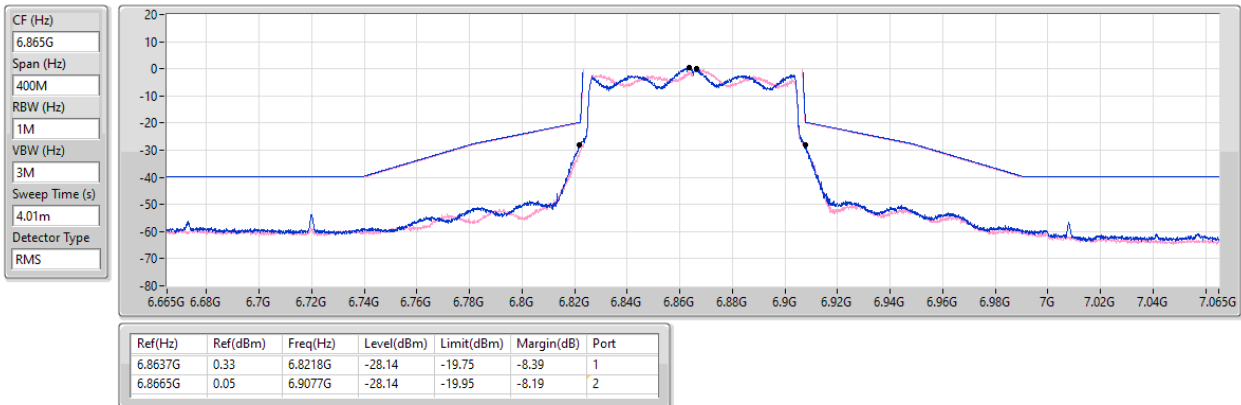


6.525-6.875GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

MASK

6665MHz_TX

06/02/2026

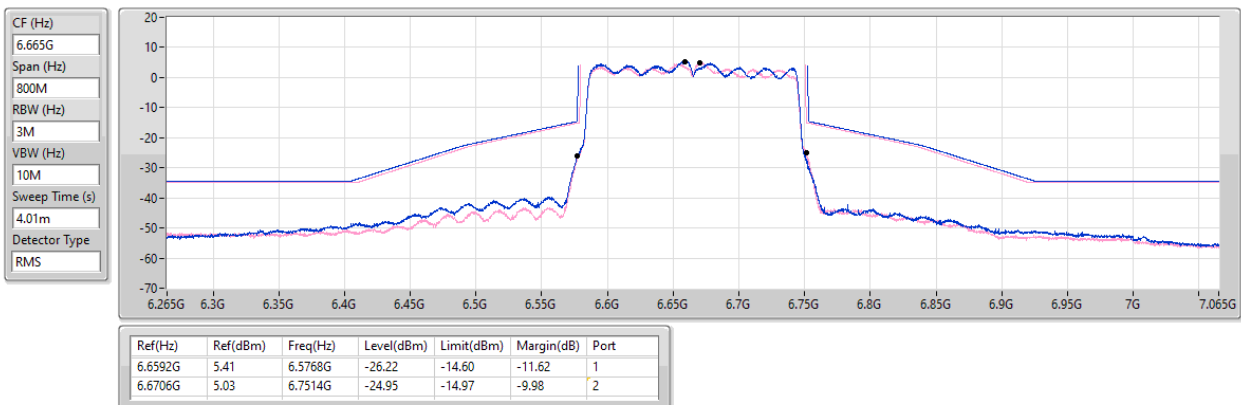


6.875-7.125GHz_802.11be EHT20-BF_Nss1,(MCS0)_2TX

MASK

6895MHz_TX

06/02/2026

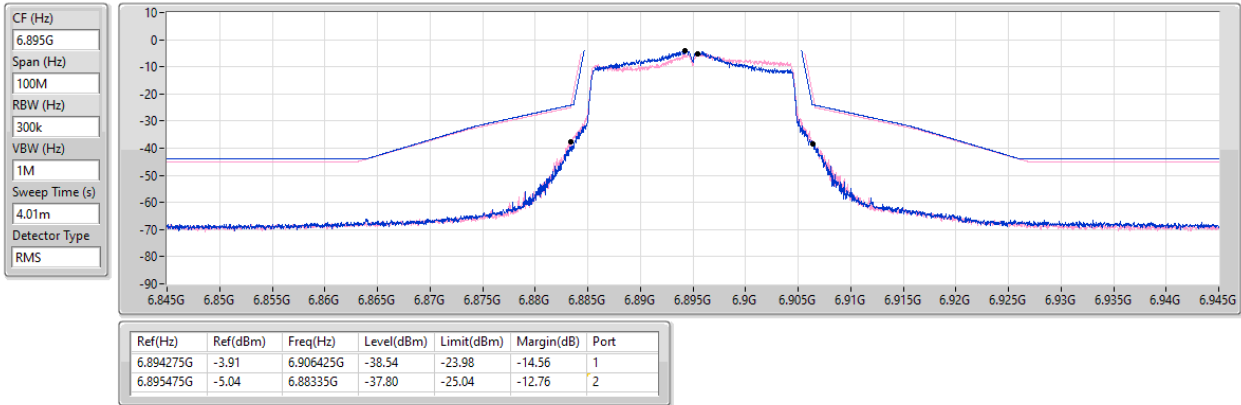


6.875-7.125GHz_802.11be EHT40-BF_Nss1,(MCS0)_2TX

MASK

7005MHz_TX

06/02/2026

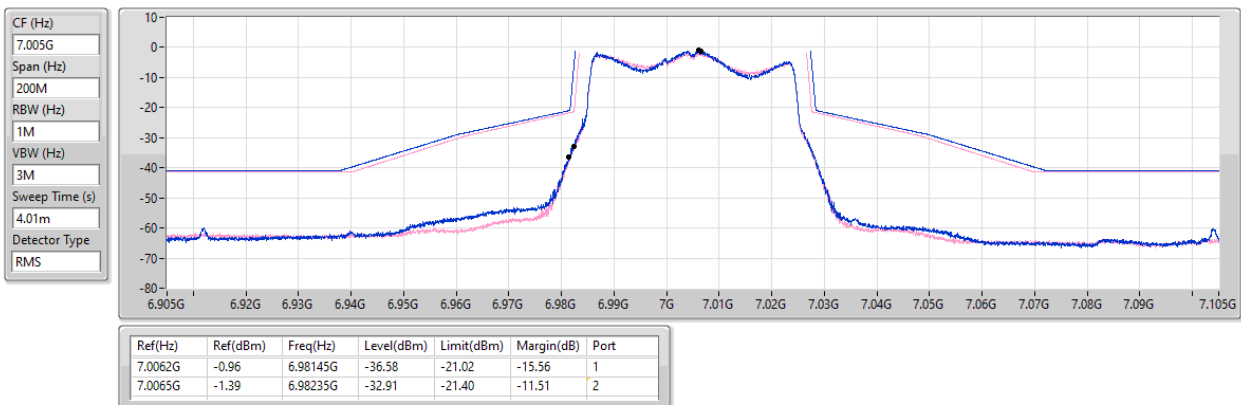


6.875-7.125GHz_802.11be EHT80-BF_Nss1,(MCS0)_2TX

MASK

7025MHz_TX

06/02/2026

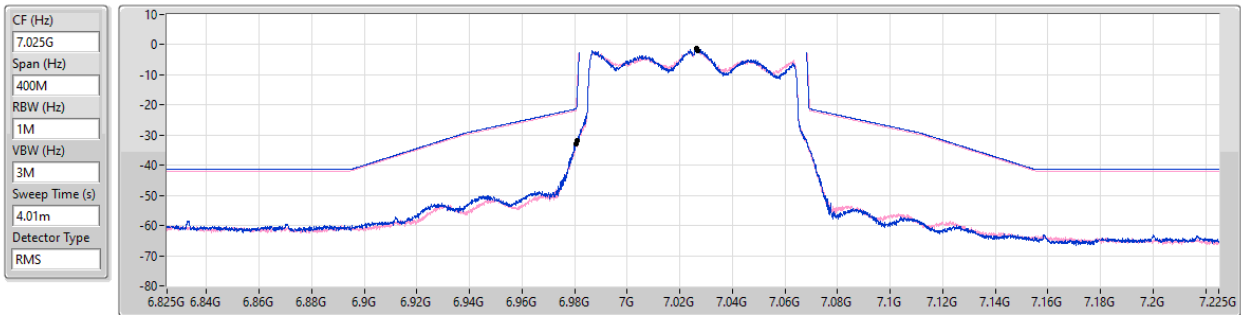


Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
7.0263G	-1.28	6.9808G	-31.71	-20.68	-11.03	1
7.0268G	-1.88	6.9804G	-33.00	-21.91	-11.09	2

6.875-7.125GHz_802.11be EHT160-BF_Nss1,(MCS0)_2TX

MASK

6985MHz_TX

06/02/2026

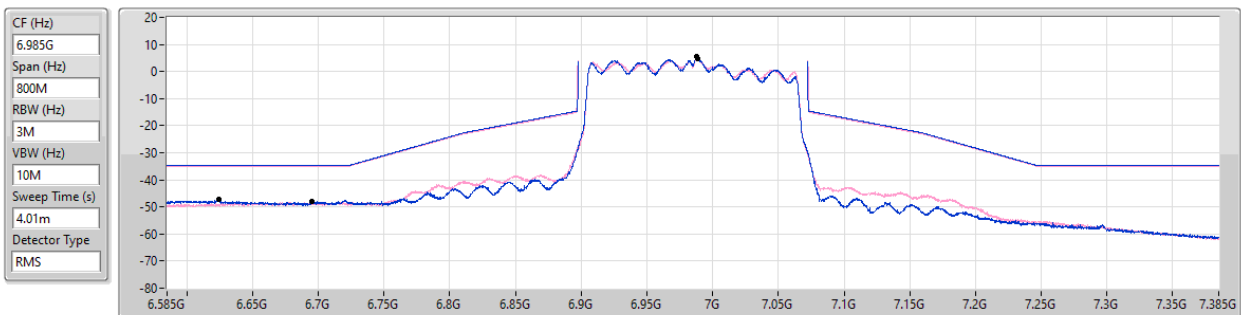

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.9882G	5.42	6.624G	-47.23	-34.58	-12.65	1
6.9886G	4.90	6.695G	-48.10	-35.10	-13.00	2



Summary


Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
6.875-7.125GHz	-	-	-	-	-	-	-	-	-	-
802.11be EHT160_Nss1,(MCS0)_2TX	Pass	QP	224.8M	44.44	46.00	-1.56	3	Vertical	360	1.00

Result

Mode	Result	Type	Freq (Hz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Dist (m)	Condition	Azimuth (°)	Height (m)
802.11be EHT160_Nss1,(MCS0)_2TX	-	-	-	-	-	-	-	-	-	-
6985MHz	Pass	PK	43.58M	36.07	40.00	-3.93	3	Vertical	0	1.00
6985MHz	Pass	PK	324.88M	39.66	46.00	-6.34	3	Vertical	0	1.00
6985MHz	Pass	PK	477.17M	38.13	46.00	-7.87	3	Vertical	0	1.00
6985MHz	Pass	QP	30.07M	37.55	40.00	-2.45	3	Vertical	360	1.00
6985MHz	Pass	QP	179.19M	40.68	43.50	-2.82	3	Vertical	348	1.00
6985MHz	Pass	QP	224.8M	44.44	46.00	-1.56	3	Vertical	360	1.00
6985MHz	Pass	PK	30M	35.33	40.00	-4.67	3	Horizontal	360	1.00
6985MHz	Pass	PK	72.68M	31.58	40.00	-8.42	3	Horizontal	360	1.00
6985MHz	Pass	PK	316.15M	42.78	46.00	-3.22	3	Horizontal	360	1.00
6985MHz	Pass	PK	477.17M	41.85	46.00	-4.15	3	Horizontal	360	1.00
6985MHz	Pass	QP	183.95M	37.34	43.50	-6.16	3	Horizontal	122	1.49
6985MHz	Pass	QP	228.25M	44.26	46.00	-1.74	3	Horizontal	99	1.42

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6985MHz_PoE

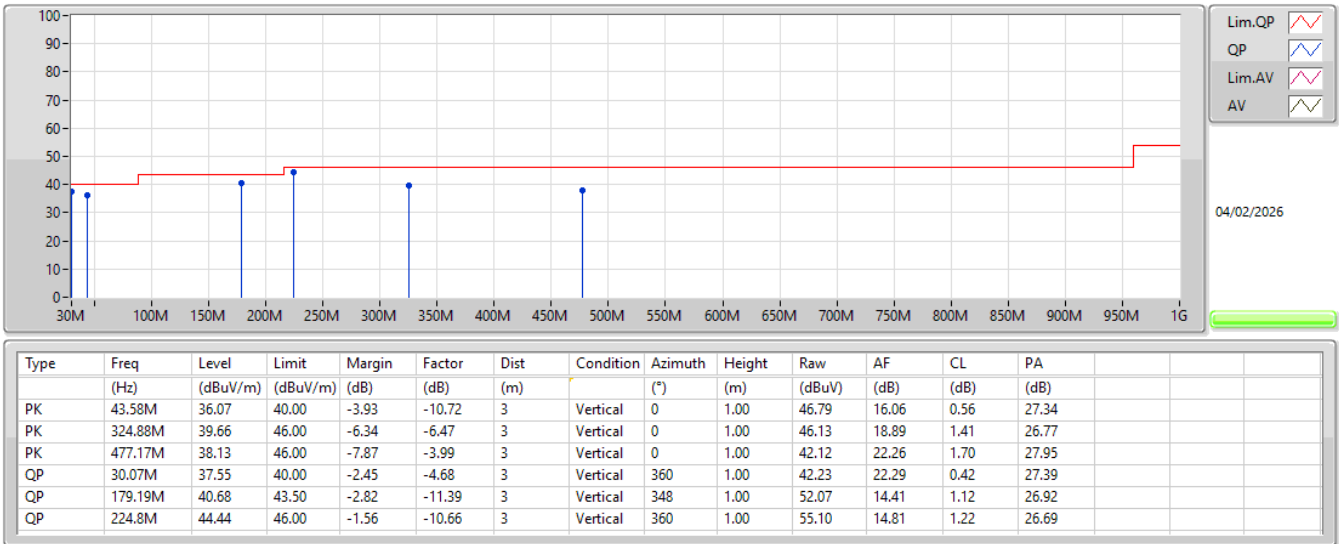

6.875-7.125GHz_802.11be EHT160_Nss1,(MCS0)_2TX

6985MHz_PoE

