







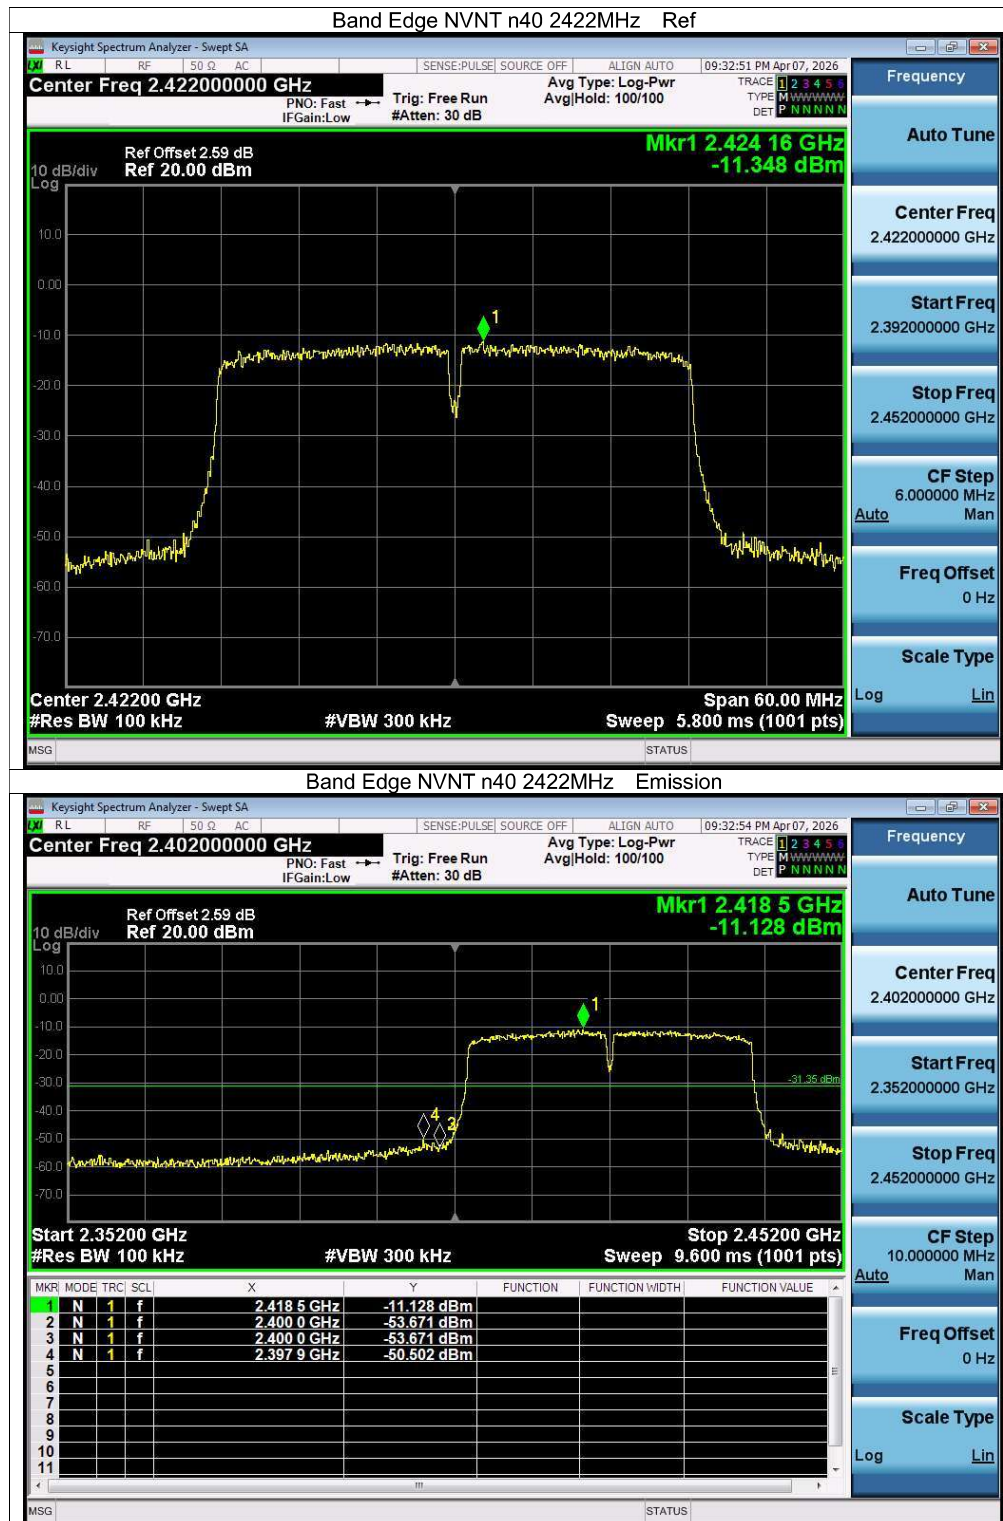


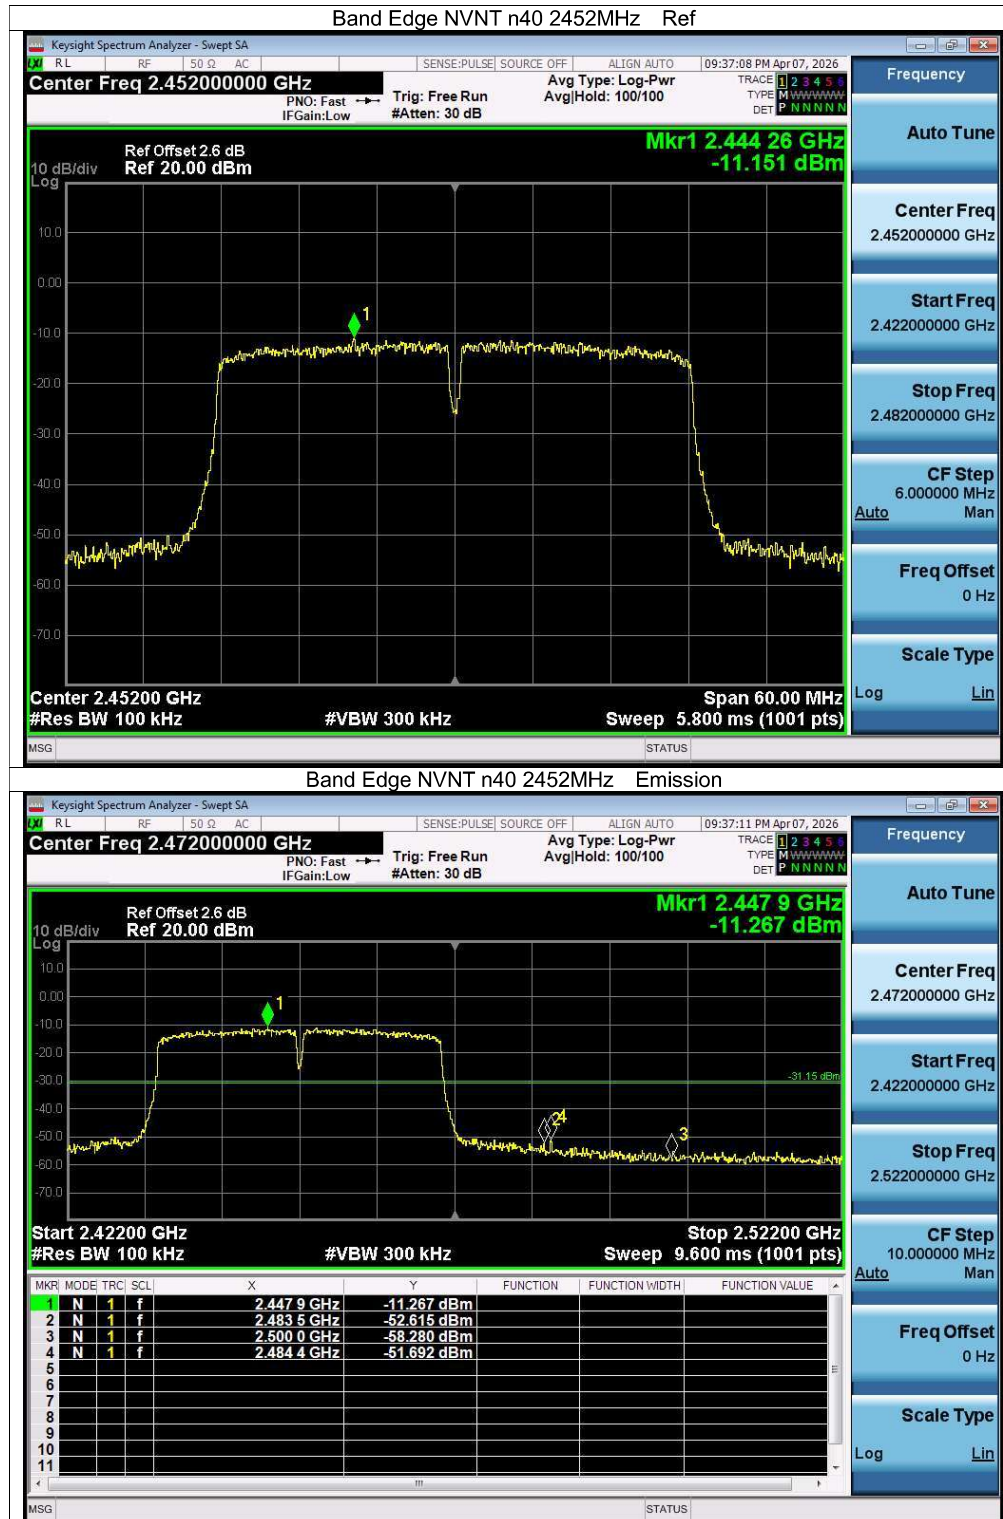


Conducted RF Spurious Emission


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	b	2412	-41.86	-20	Pass
NVNT	b	2437	-42.58	-20	Pass
NVNT	b	2462	-42.85	-20	Pass
NVNT	g	2412	-36.05	-20	Pass
NVNT	g	2437	-36.69	-20	Pass
NVNT	g	2462	-35.56	-20	Pass
NVNT	n20	2412	-34.04	-20	Pass
NVNT	n20	2437	-34.96	-20	Pass
NVNT	n20	2462	-35.29	-20	Pass
NVNT	n40	2422	-30.52	-20	Pass
NVNT	n40	2437	-31.03	-20	Pass
NVNT	n40	2452	-30.79	-20	Pass




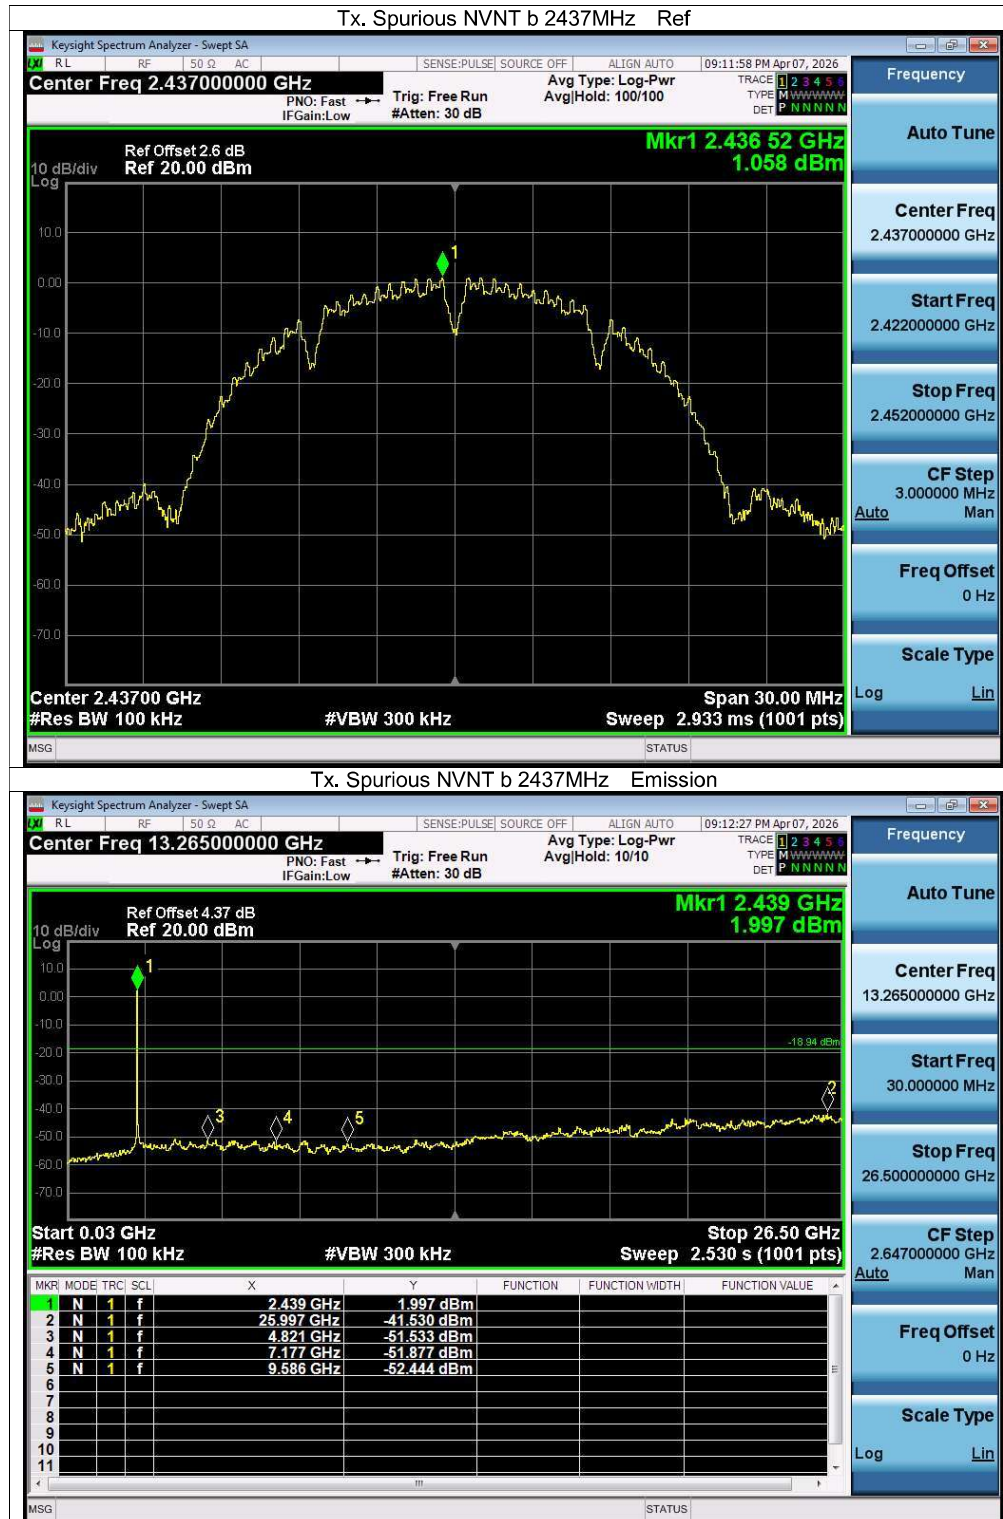




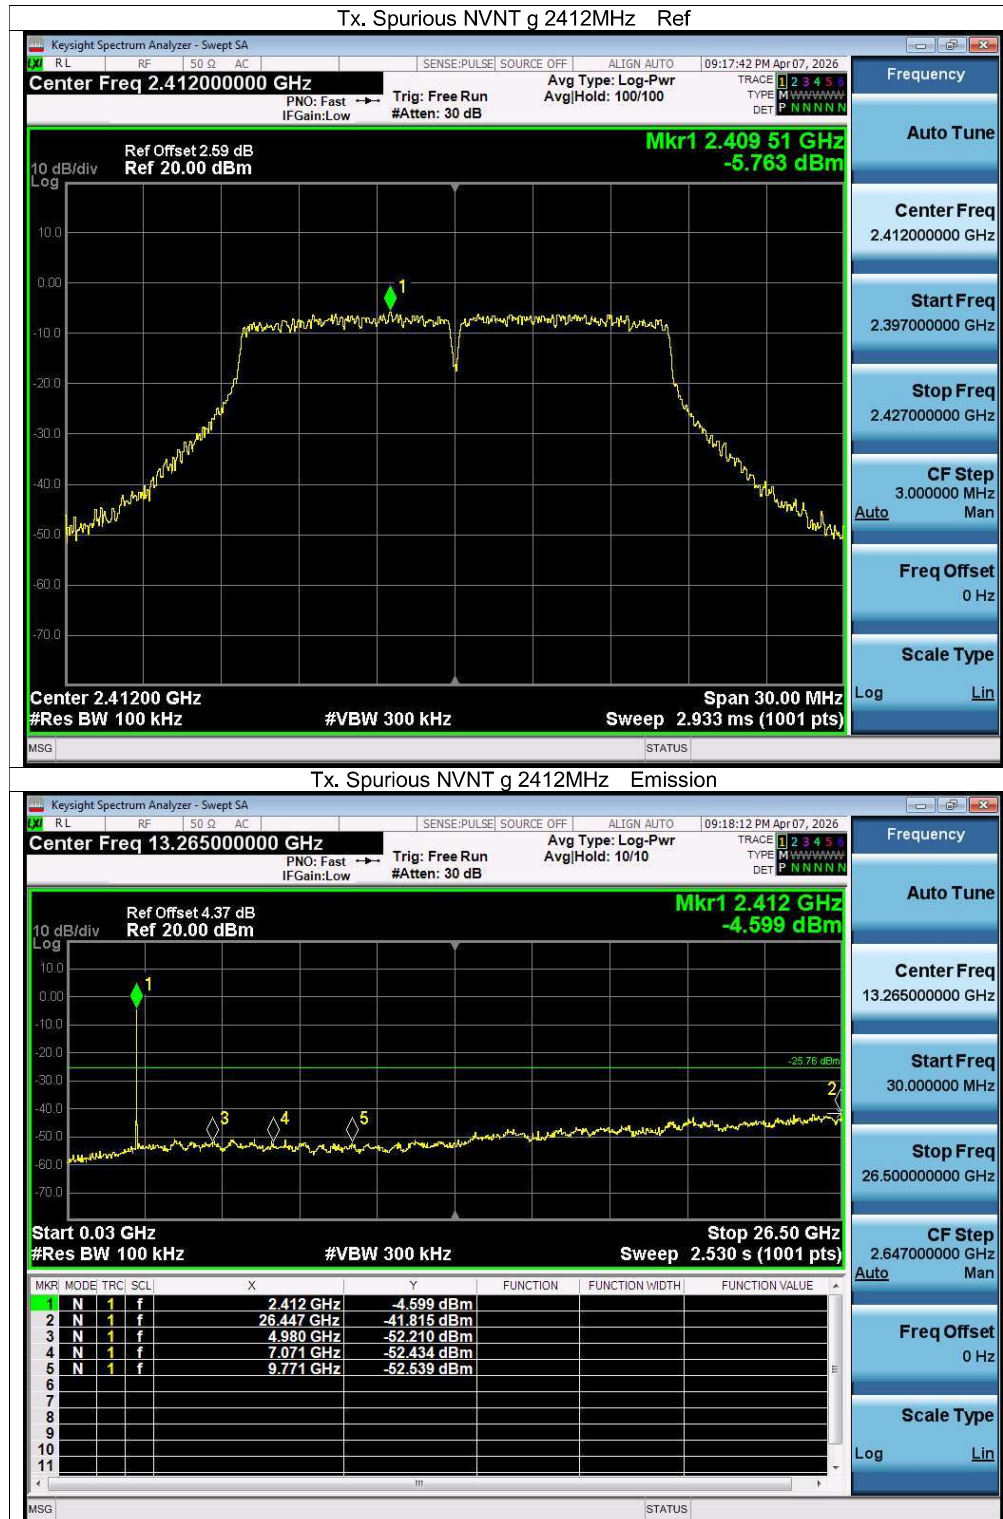


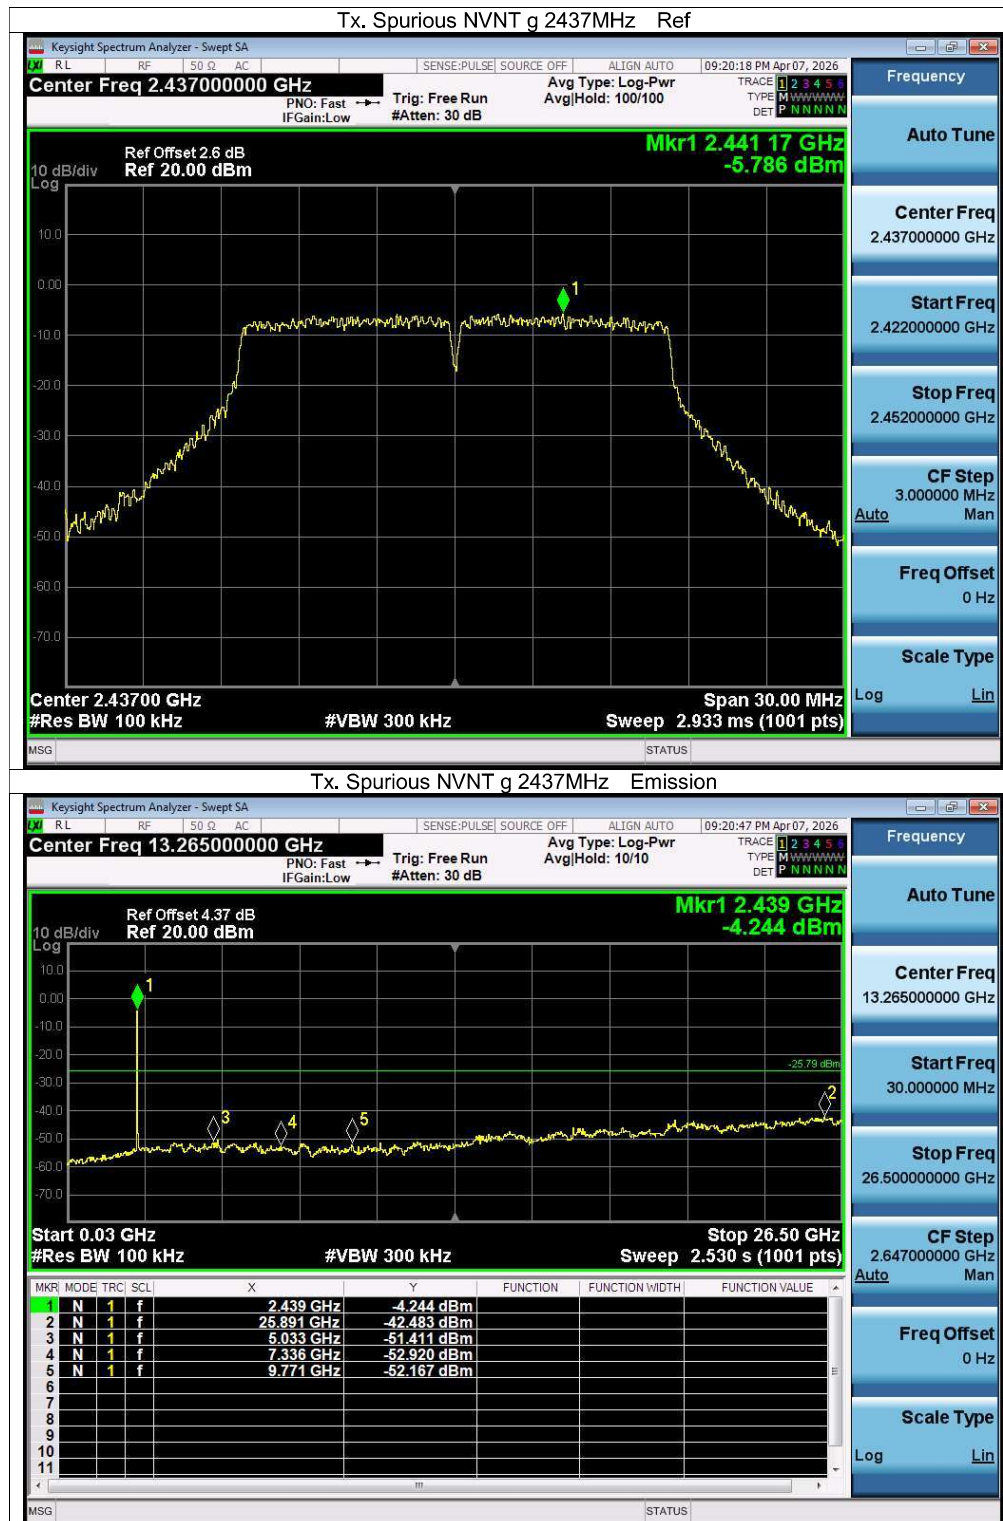


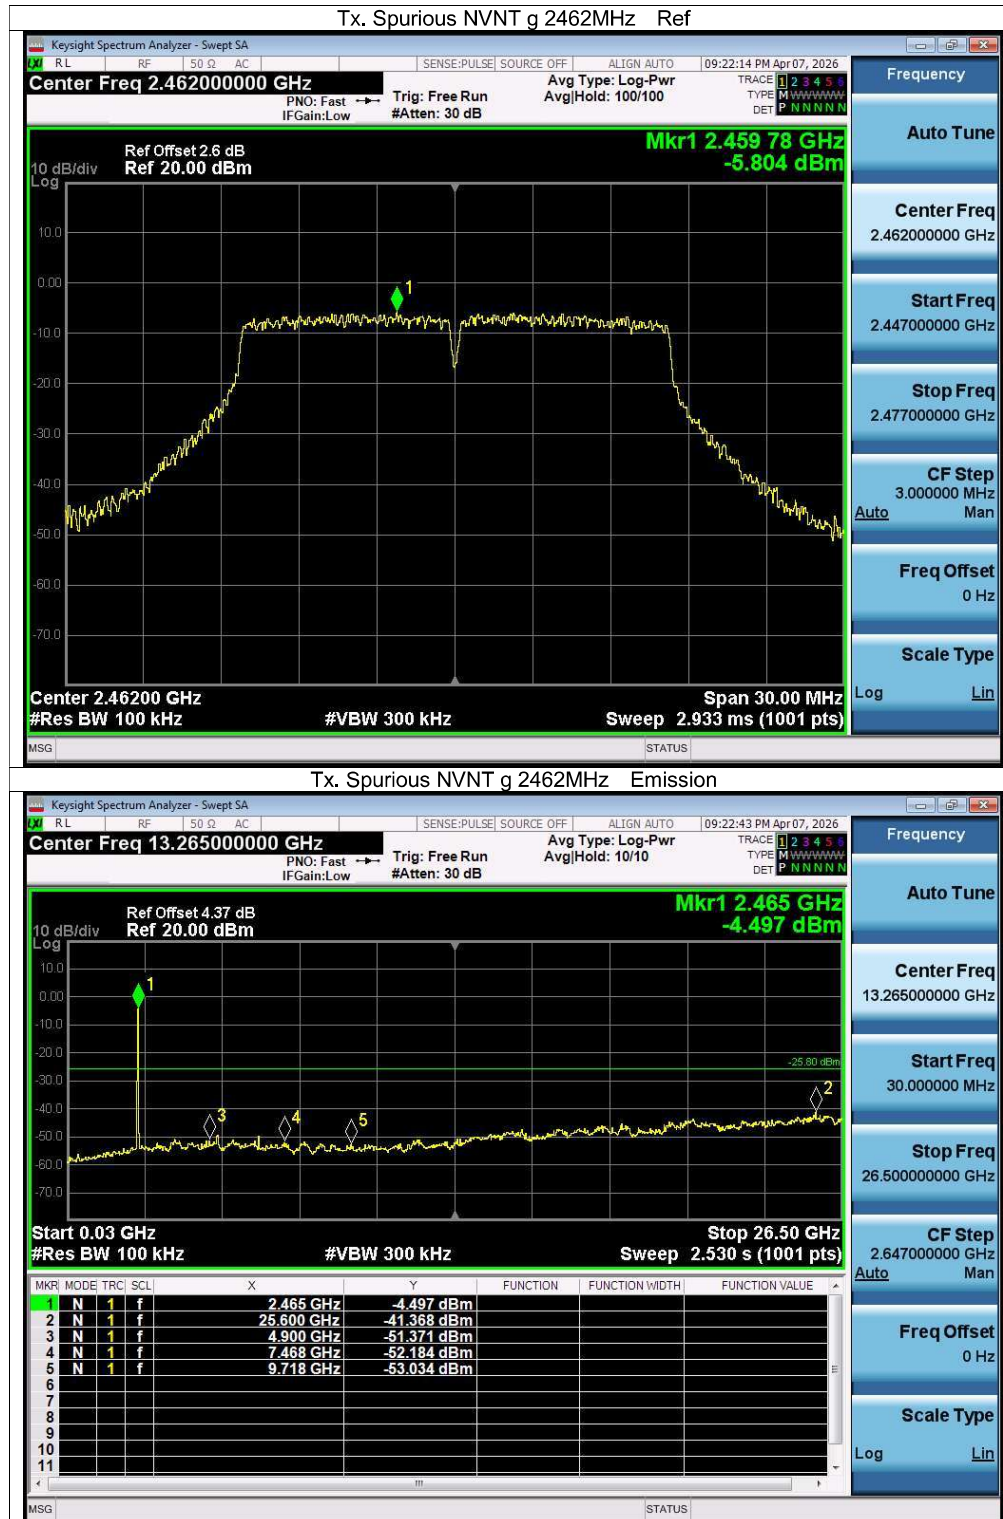





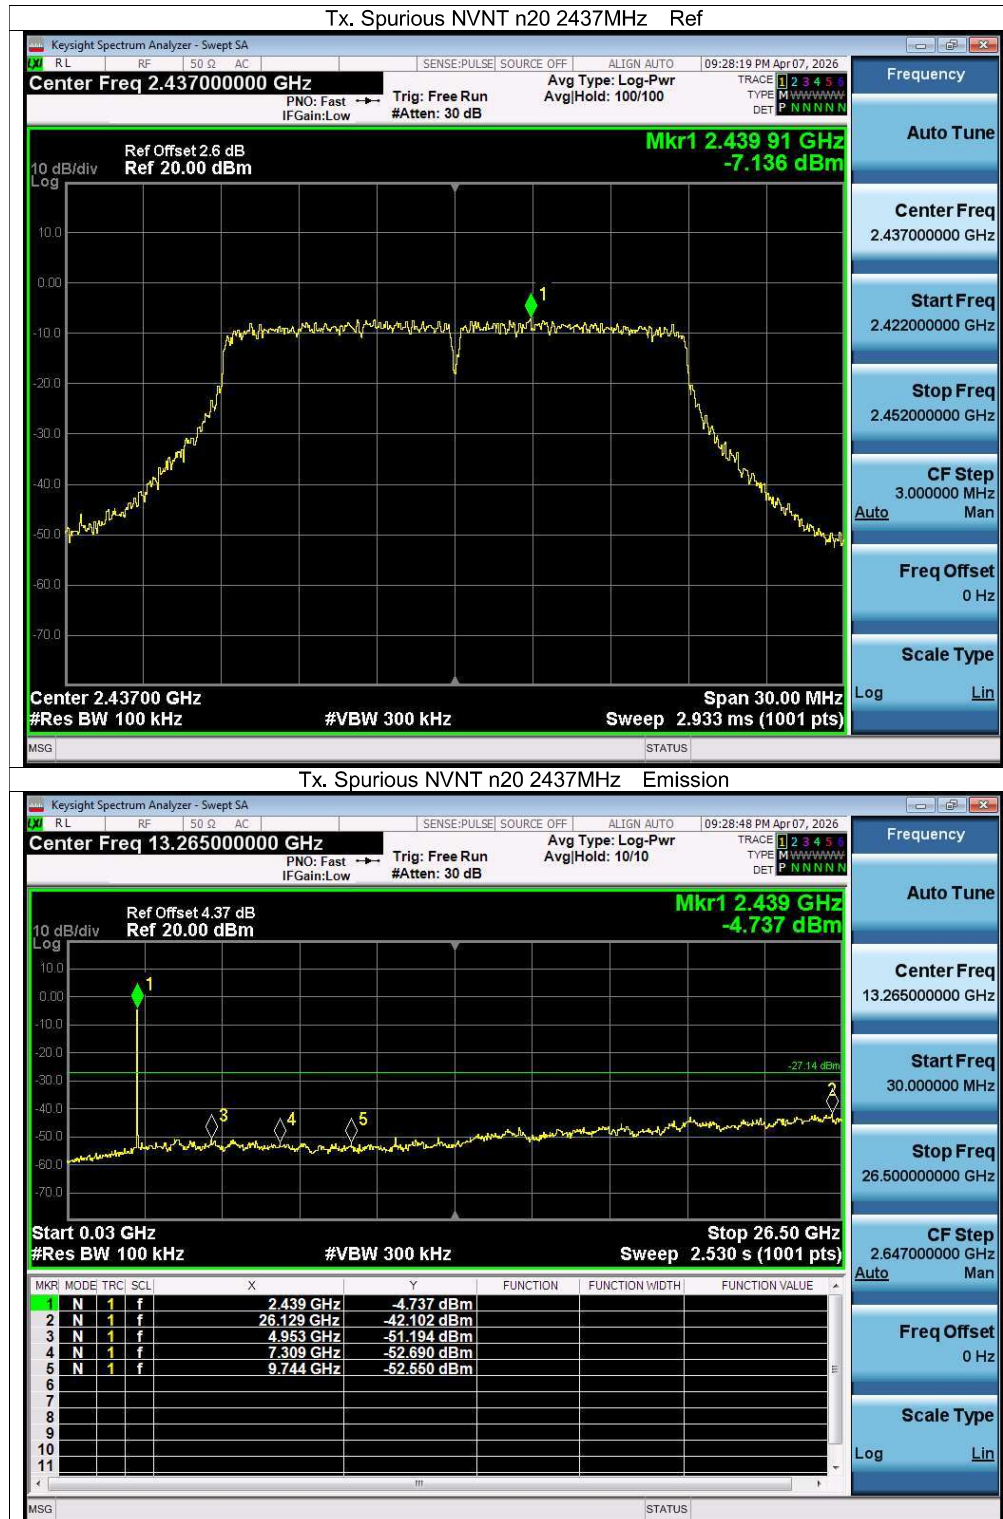

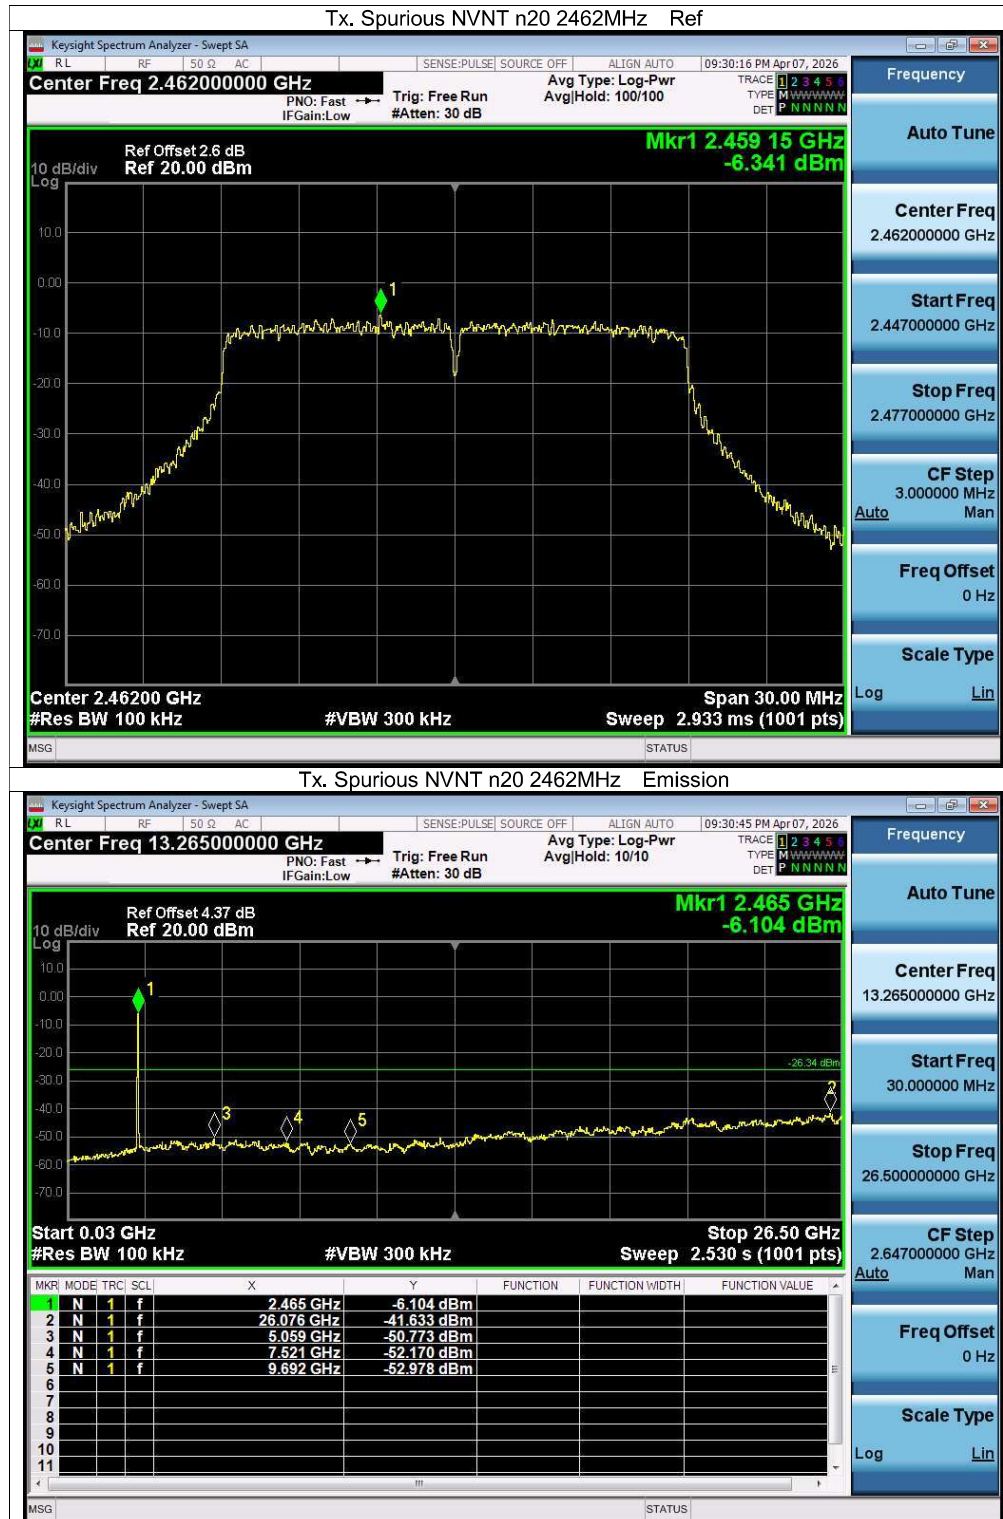

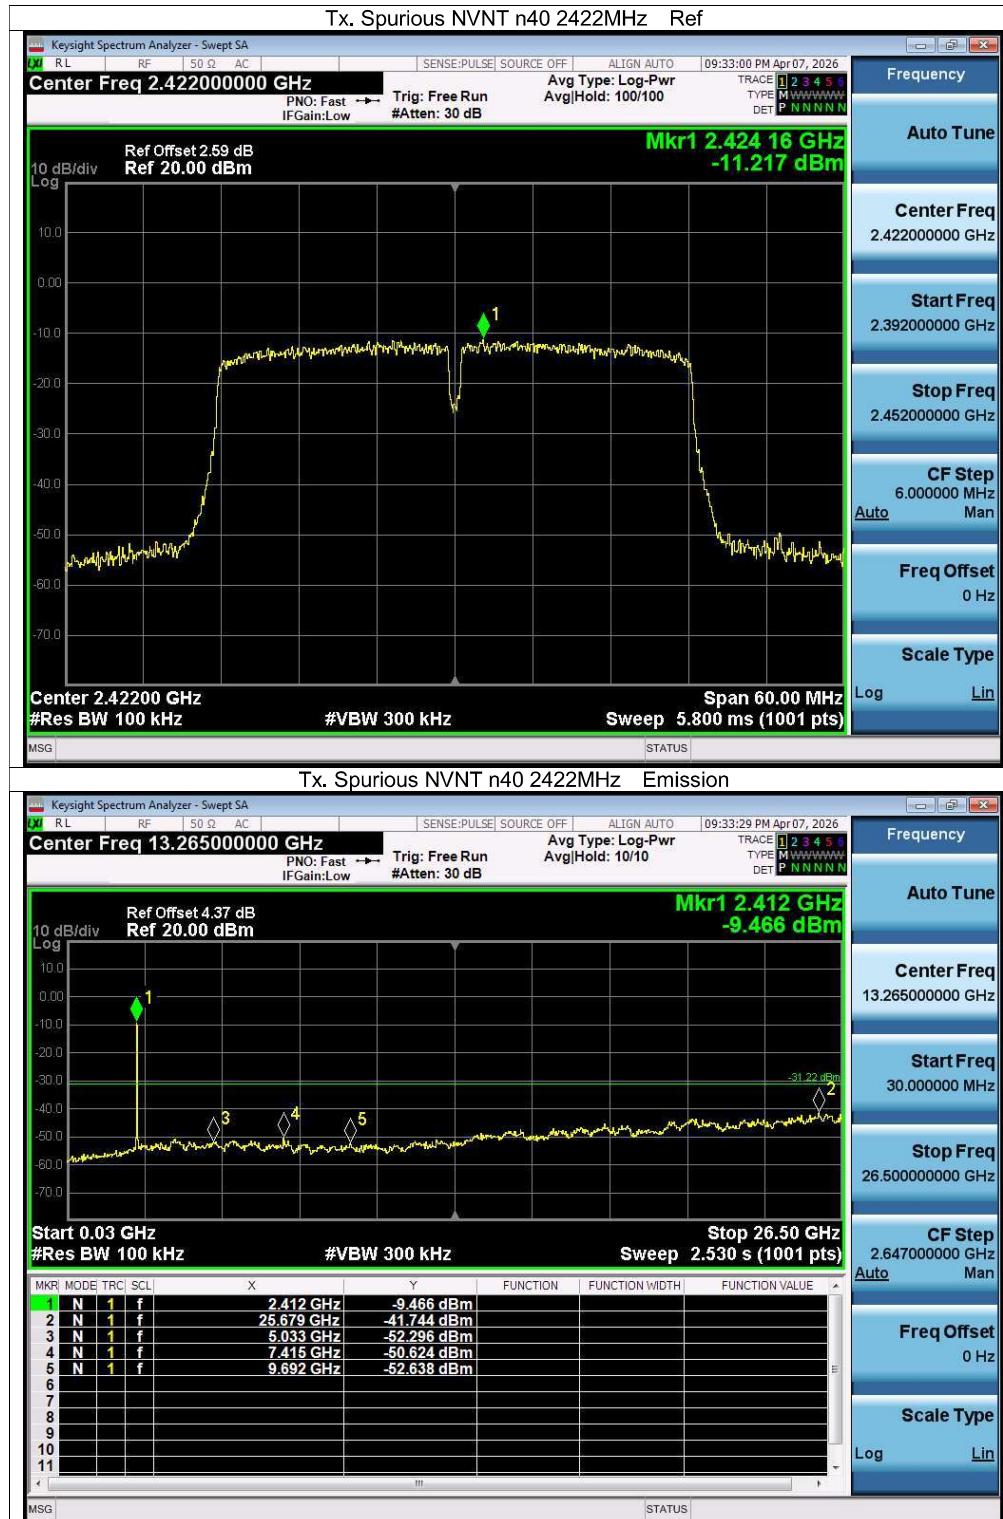

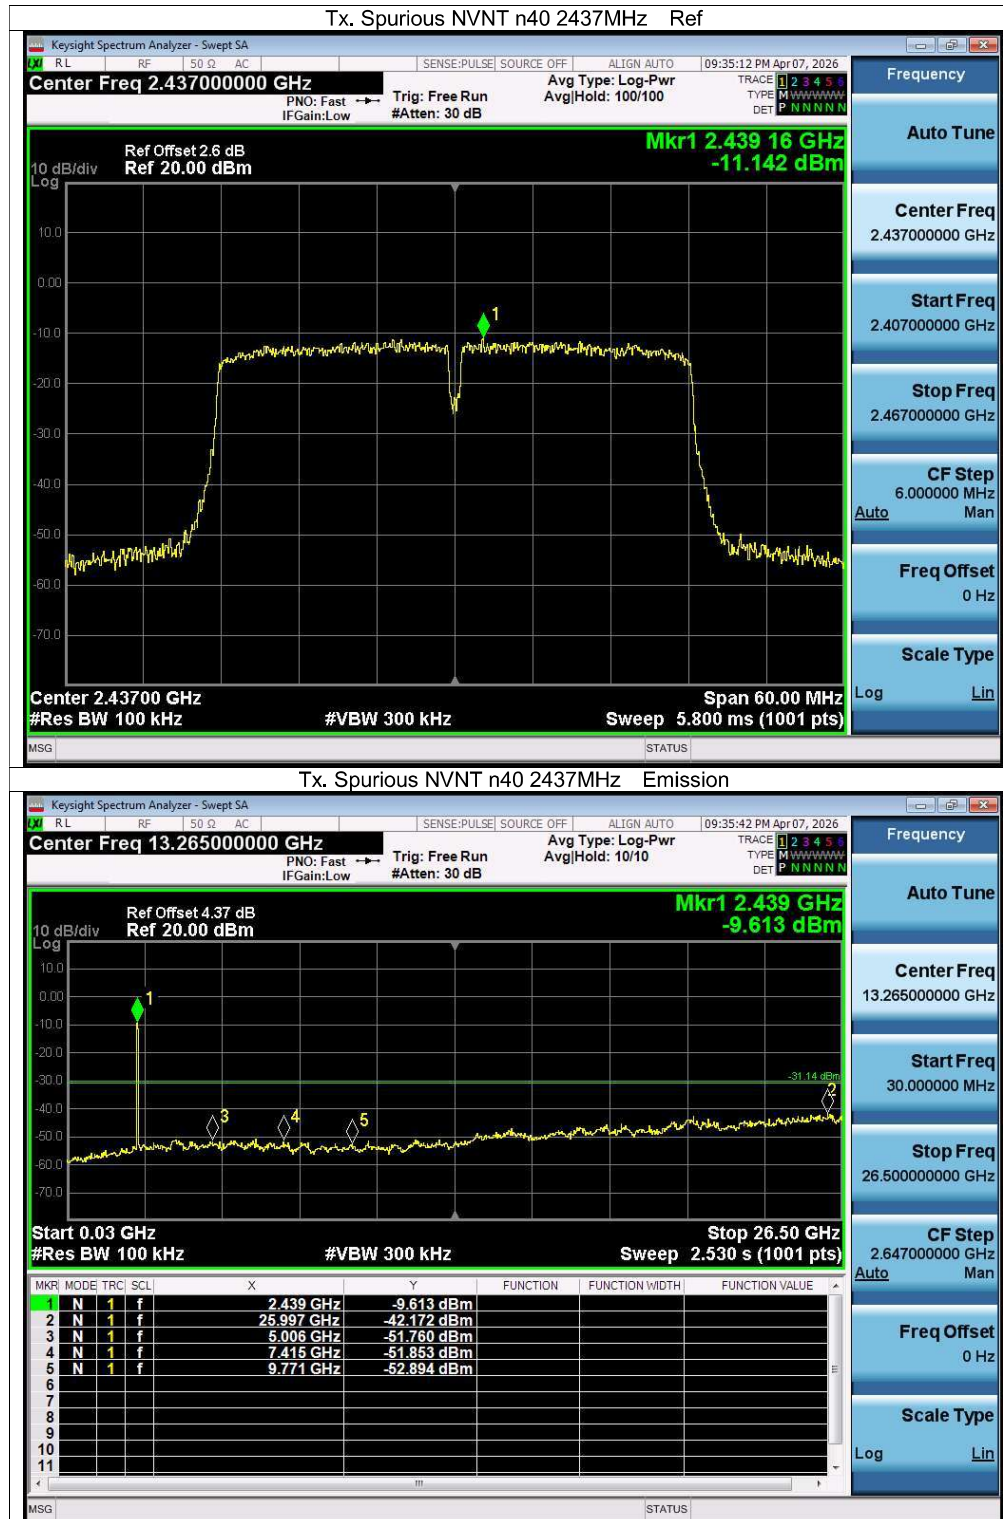

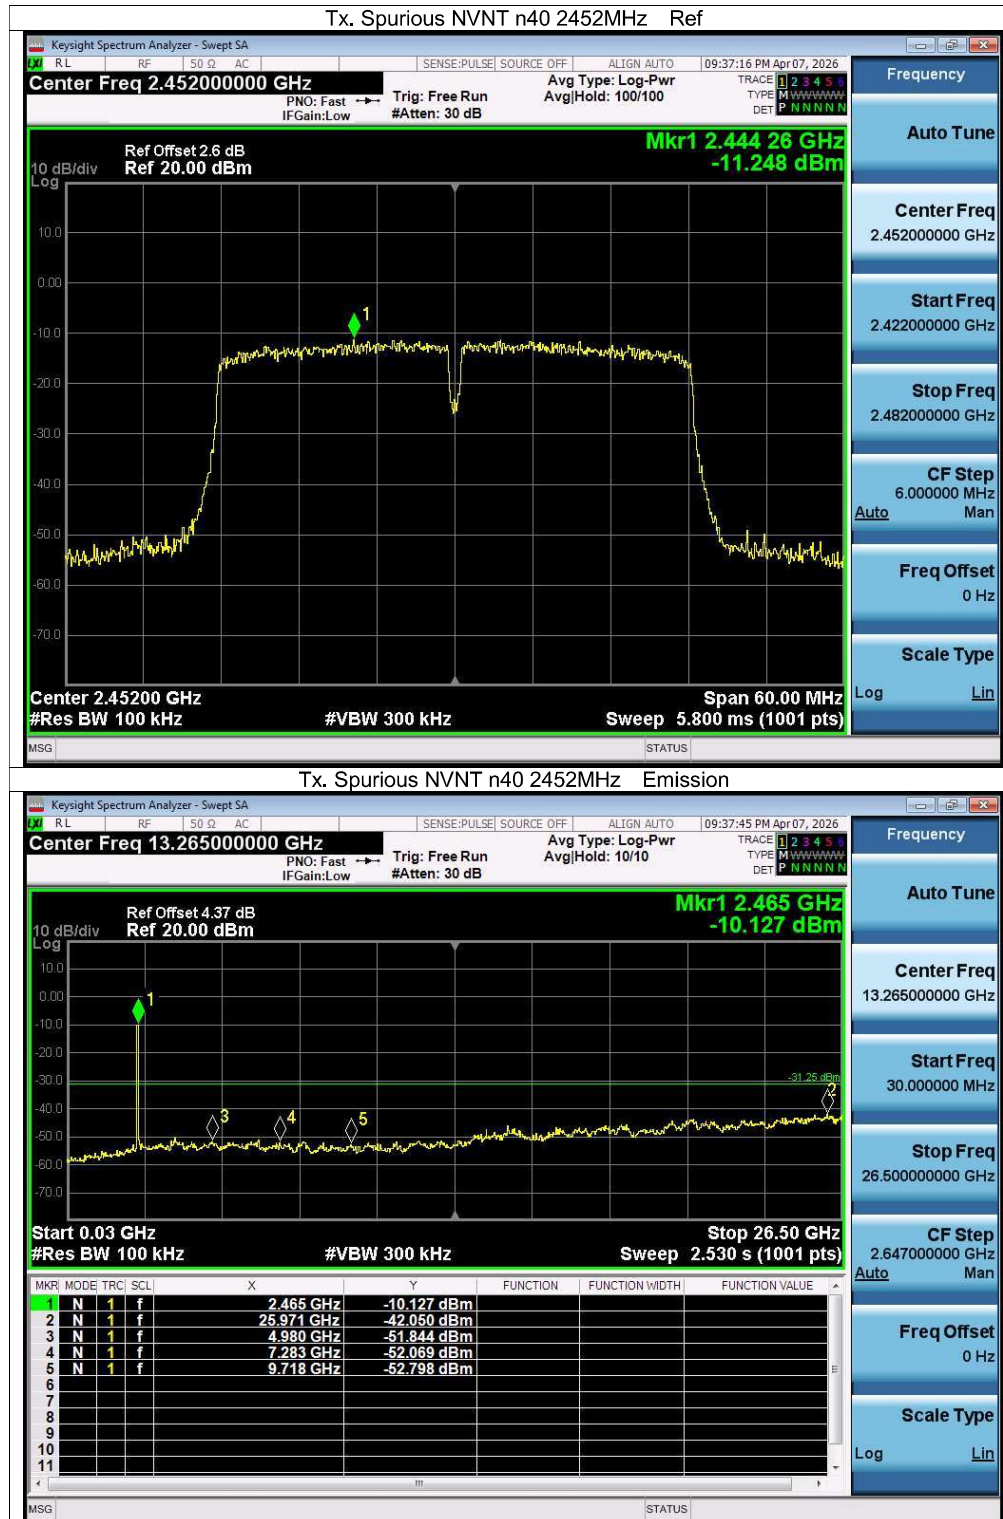



APPENDIX 2-PHOTOS OF TEST SETUP

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****