


User Manual

- The remote controller is used to control LED Light and the other wireless products

Feature

- Transmitter frequency: 433.92MHz
- Transmitter maximum current: 30mA@+10dBm
- Operation voltage: 3V
- PCB meander antenna
- Dimensions: 81.5mm*33.7mm*1.0mm
- Operation temperature: - 40°C to + 85°C
- Lead-free and RoHS compliant

Profile Drawing

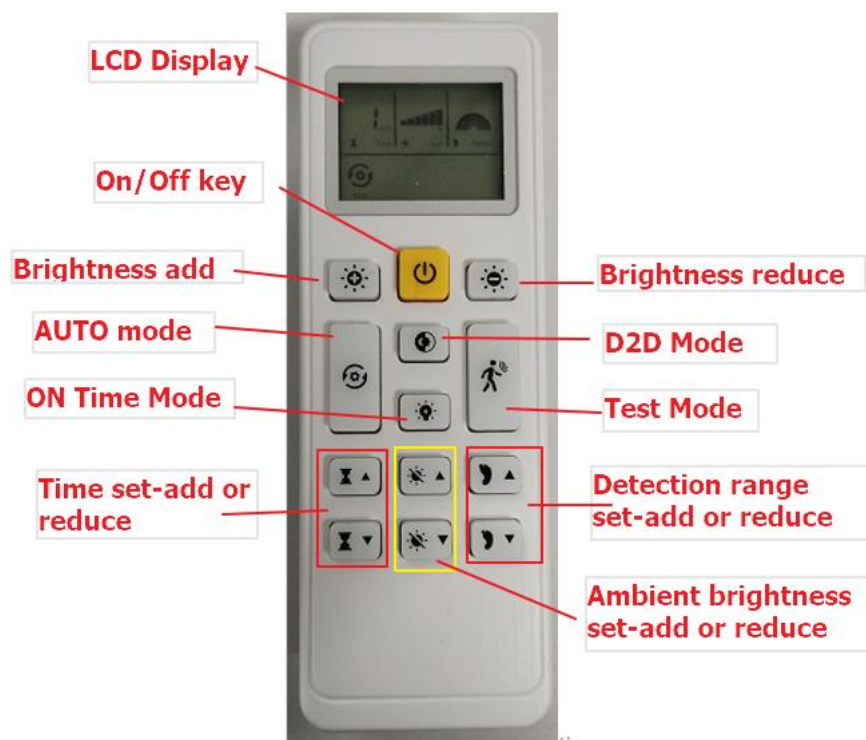

Security light remote control



Plant light remote control

Notice

- Please take attention that changes or modification not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
- This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
 - (1) This device may not cause harmful interference.
 - (2) This device must accept any interference received, including interference that may cause undesired operation.