



## Appendix G

### RF Test Data for 5.8GWIFI(Conducted Measurement)

Product Name: Translator Earbuds

Test Model: A8

#### Environmental Conditions

|                    |            |
|--------------------|------------|
| Temperature:       | 23.8° C    |
| Relative Humidity: | 52.1%      |
| ATM Pressure:      | 100.0 kPa  |
| Test Engineer:     | Paddi Chen |
| Supervised by:     | Nick Peng  |



Shenzhen LCS Compliance Testing Laboratory Ltd.  
Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China  
Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com  
Scan code to check authenticity



## G.1 -6dB Bandwidth


| Condition | Mode | Frequency (MHz) | Antenna | -6 dB Bandwidth (MHz) | Limit -6 dB Bandwidth (MHz) | Verdict |
|-----------|------|-----------------|---------|-----------------------|-----------------------------|---------|
| NVNT      | a    | 5745            | Ant1    | 16.334                | $\geq 0.5$                  | Pass    |
| NVNT      | a    | 5785            | Ant1    | 16.338                | $\geq 0.5$                  | Pass    |
| NVNT      | a    | 5825            | Ant1    | 16.336                | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 17.543                | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 5785            | Ant1    | 17.128                | $\geq 0.5$                  | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 17.567                | $\geq 0.5$                  | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 35.97                 | $\geq 0.5$                  | Pass    |
| NVNT      | n40  | 5795            | Ant1    | 36.125                | $\geq 0.5$                  | Pass    |






## Test Graphs

-6dB Bandwidth NVNT a 5745MHz Ant1

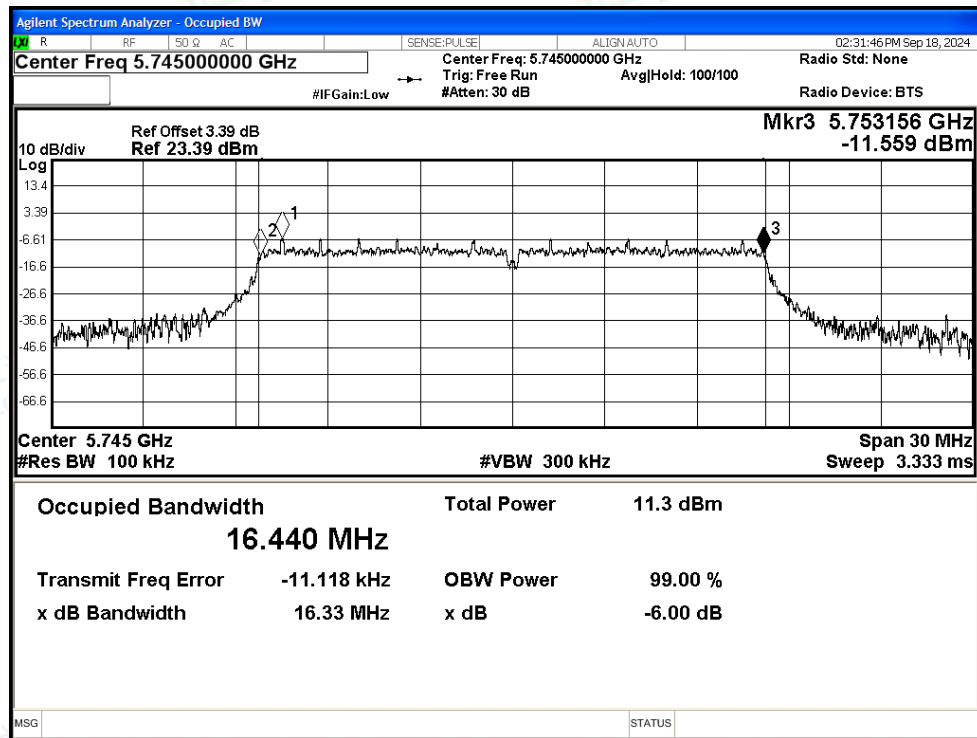

-6dB Bandwidth NVNT a 5785MHz Ant1

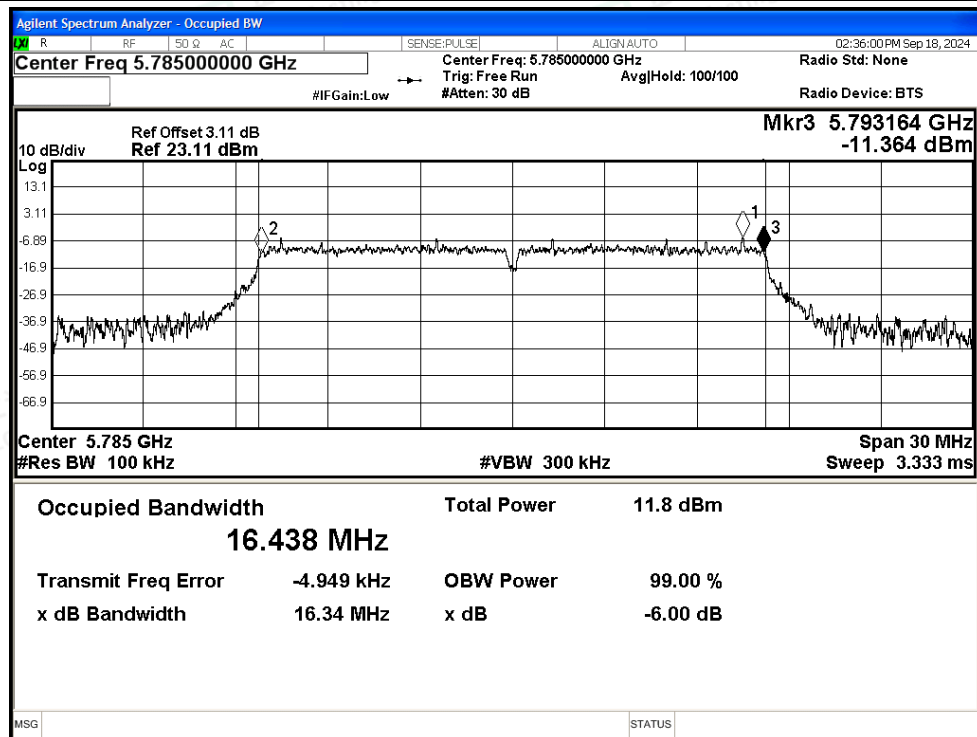

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -6dB Bandwidth NVNT a 5825MHz Ant1

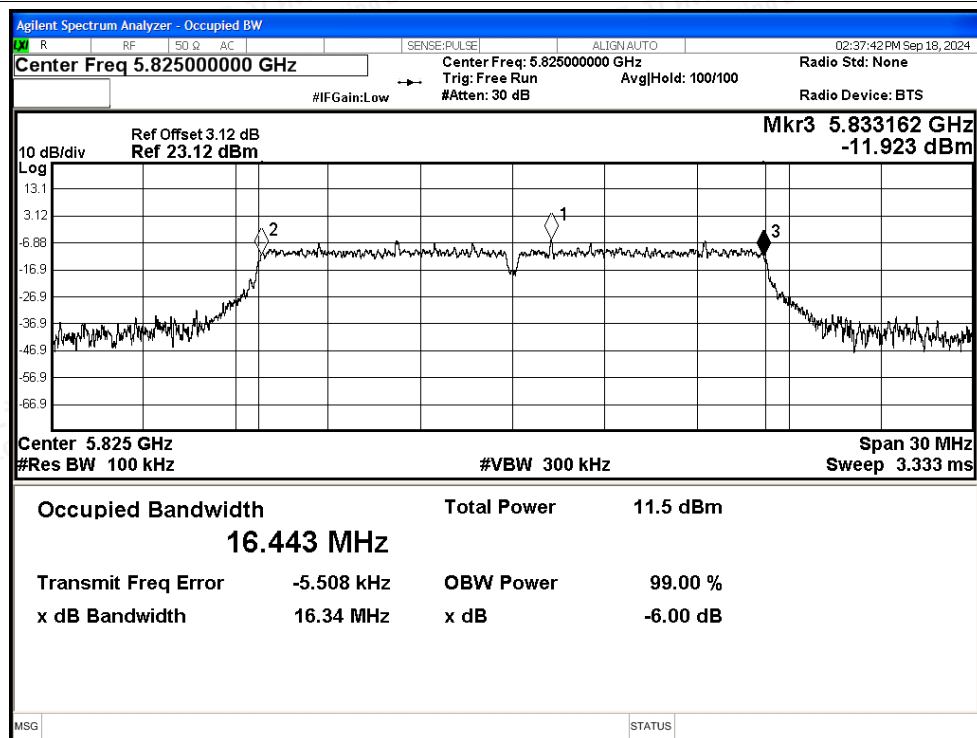

## -6dB Bandwidth NVNT n20 5745MHz Ant1

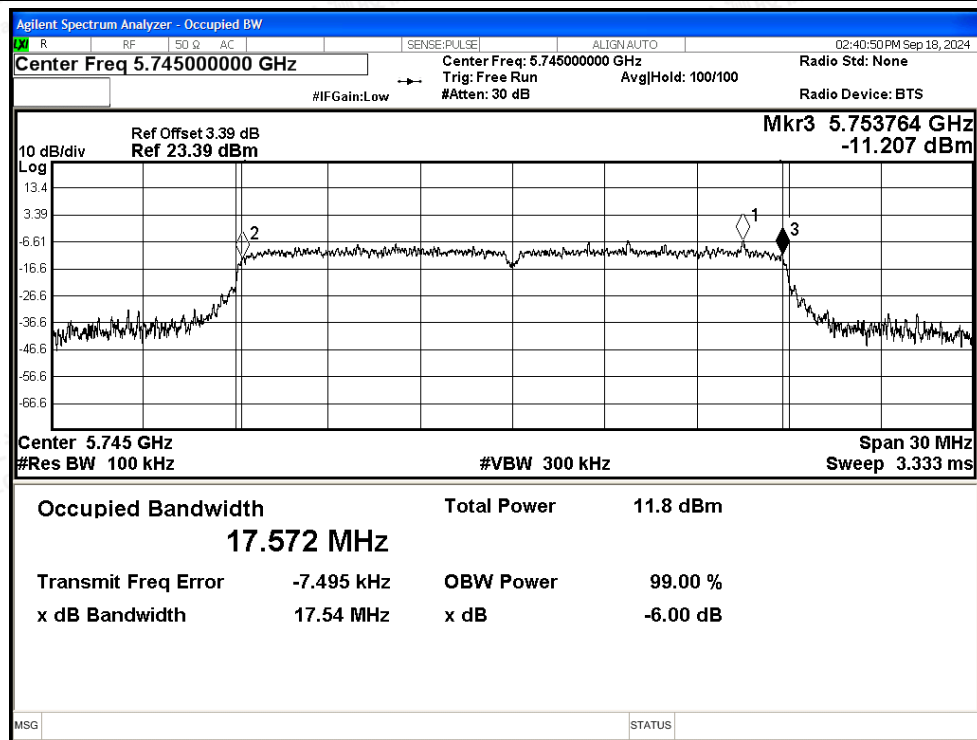

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -6dB Bandwidth NVNT n20 5785MHz Ant1

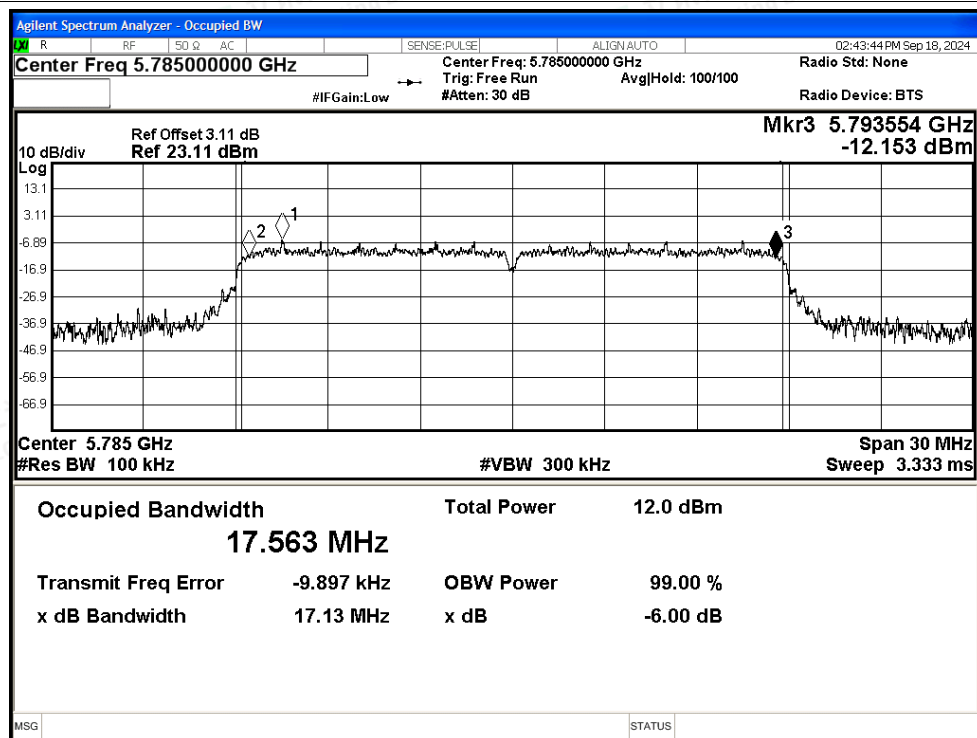

## -6dB Bandwidth NVNT n20 5825MHz Ant1

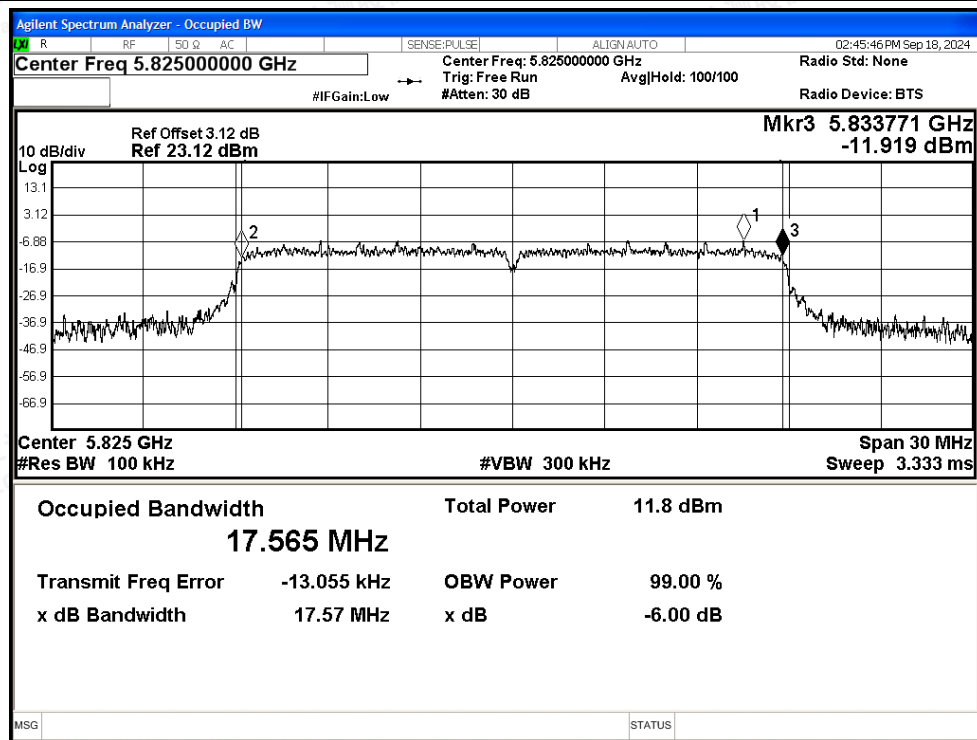

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## -6dB Bandwidth NVNT n40 5755MHz Ant1

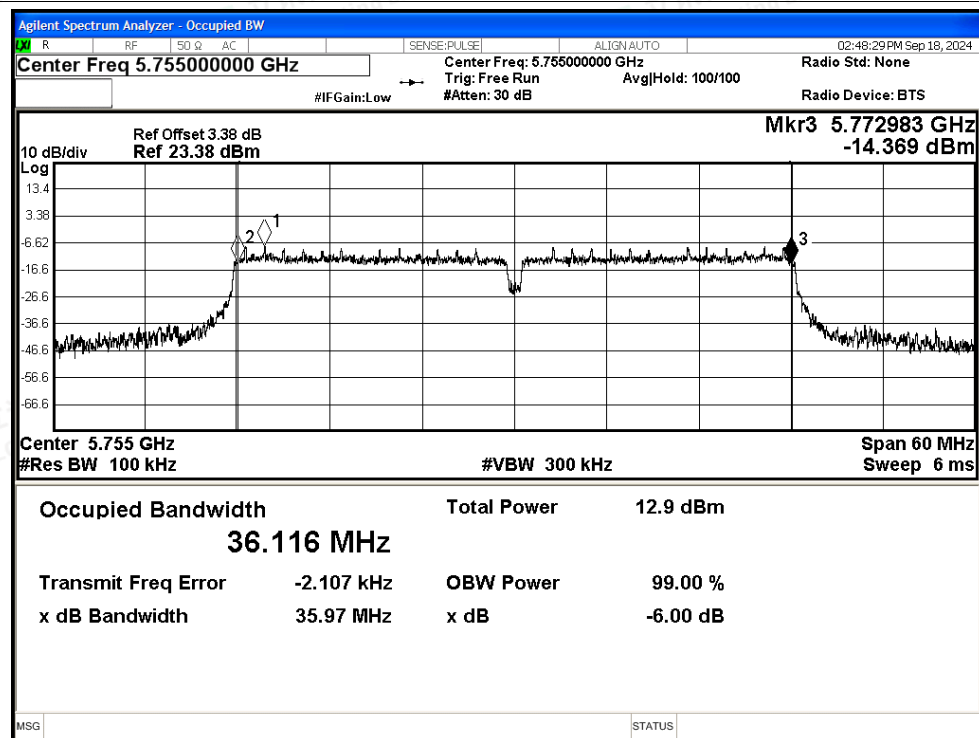

## -6dB Bandwidth NVNT n40 5795MHz Ant1

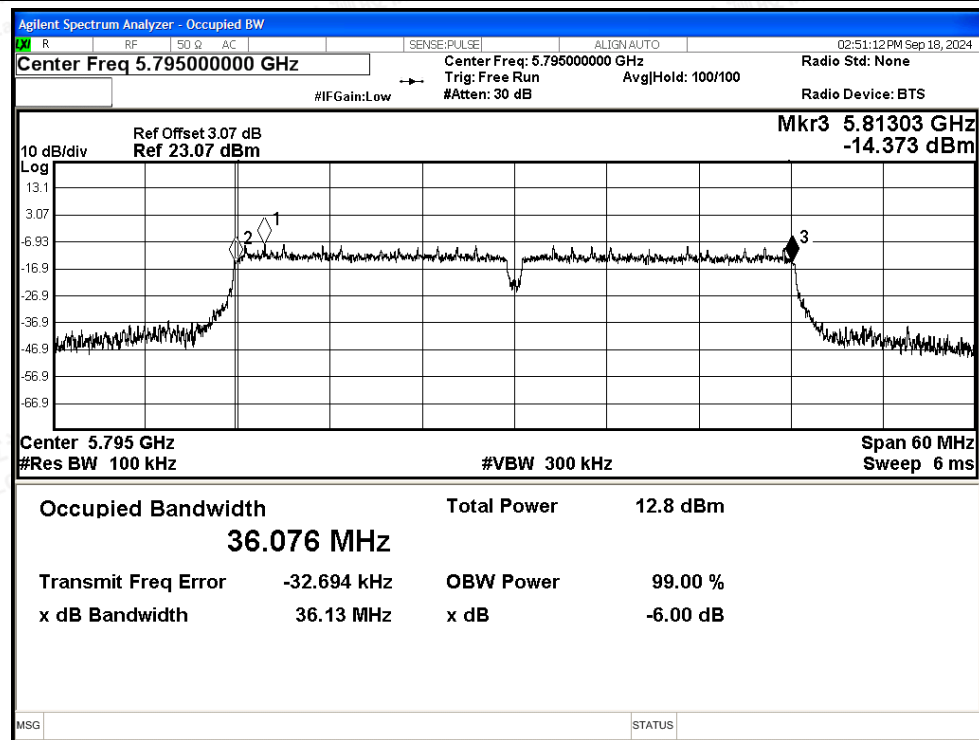

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## G.2 Maximum Conducted Output Power

| Condition | Mode | Frequency (MHz) | Antenna | Conducted Power (dBm) | Duty Factor (dB) | Total Power (dBm) | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------------|------------------|-------------------|-------------|---------|
| NVNT      | a    | 5745            | Ant1    | 5.24                  | 0.24             | 5.48              | 30          | Pass    |
| NVNT      | a    | 5785            | Ant1    | 5.89                  | 0.24             | 6.13              | 30          | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5.01                  | 0.24             | 5.25              | 30          | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5.49                  | 0.28             | 5.77              | 30          | Pass    |
| NVNT      | n20  | 5785            | Ant1    | 5.64                  | 0.28             | 5.92              | 30          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5.28                  | 0.28             | 5.56              | 30          | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 5.92                  | 0.55             | 6.47              | 30          | Pass    |
| NVNT      | n40  | 5795            | Ant1    | 5.81                  | 0.55             | 6.36              | 30          | Pass    |





### G.3 Maximum Power Spectral Density Level


| Condition | Mode | Frequency<br>(MHz) | Antenna | Conducted PSD<br>(dBm) | Duty Factor<br>(dB) | Total PSD<br>(dBm/500KHz) | Limit<br>(dBm/500KHz) | Verdict |
|-----------|------|--------------------|---------|------------------------|---------------------|---------------------------|-----------------------|---------|
| NVNT      | a    | 5745               | Ant1    | -8.17                  | 0.24                | -7.93                     | 30                    | Pass    |
| NVNT      | a    | 5785               | Ant1    | -7.58                  | 0.24                | -7.34                     | 30                    | Pass    |
| NVNT      | a    | 5825               | Ant1    | -7.75                  | 0.24                | -7.51                     | 30                    | Pass    |
| NVNT      | n20  | 5745               | Ant1    | -8.36                  | 0.28                | -8.08                     | 30                    | Pass    |
| NVNT      | n20  | 5785               | Ant1    | -8.26                  | 0.28                | -7.98                     | 30                    | Pass    |
| NVNT      | n20  | 5825               | Ant1    | -8.44                  | 0.28                | -8.16                     | 30                    | Pass    |
| NVNT      | n40  | 5755               | Ant1    | -10.82                 | 0.55                | -10.27                    | 30                    | Pass    |
| NVNT      | n40  | 5795               | Ant1    | -10.59                 | 0.55                | -10.04                    | 30                    | Pass    |






## Test Graphs

PSD NVNT a 5745MHz Ant1

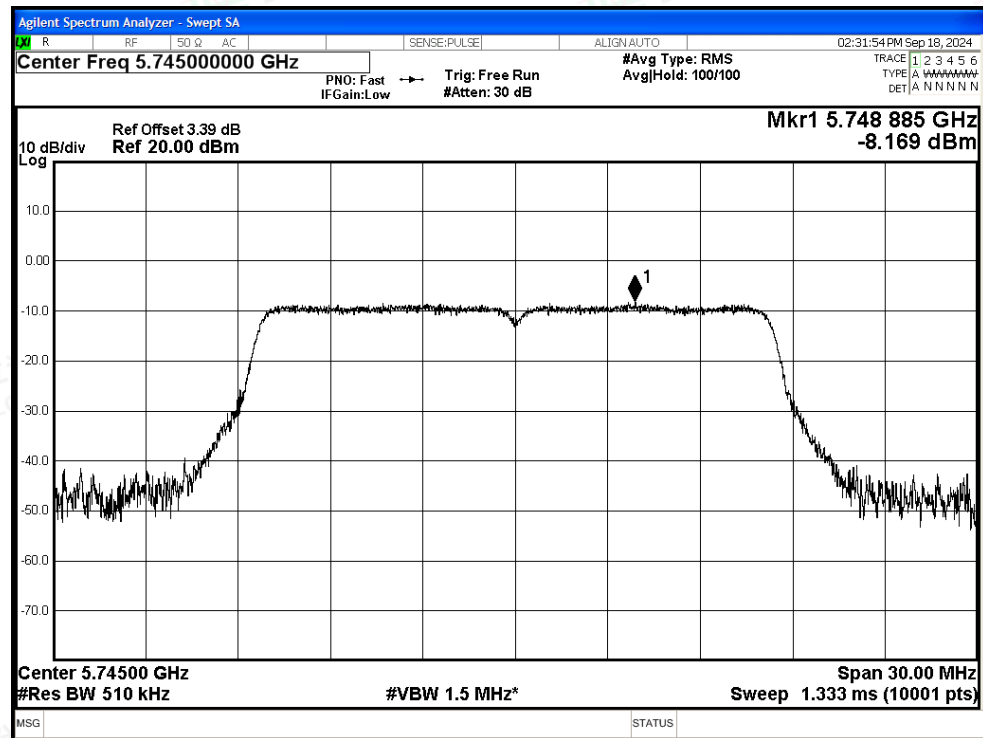

PSD NVNT a 5785MHz Ant1

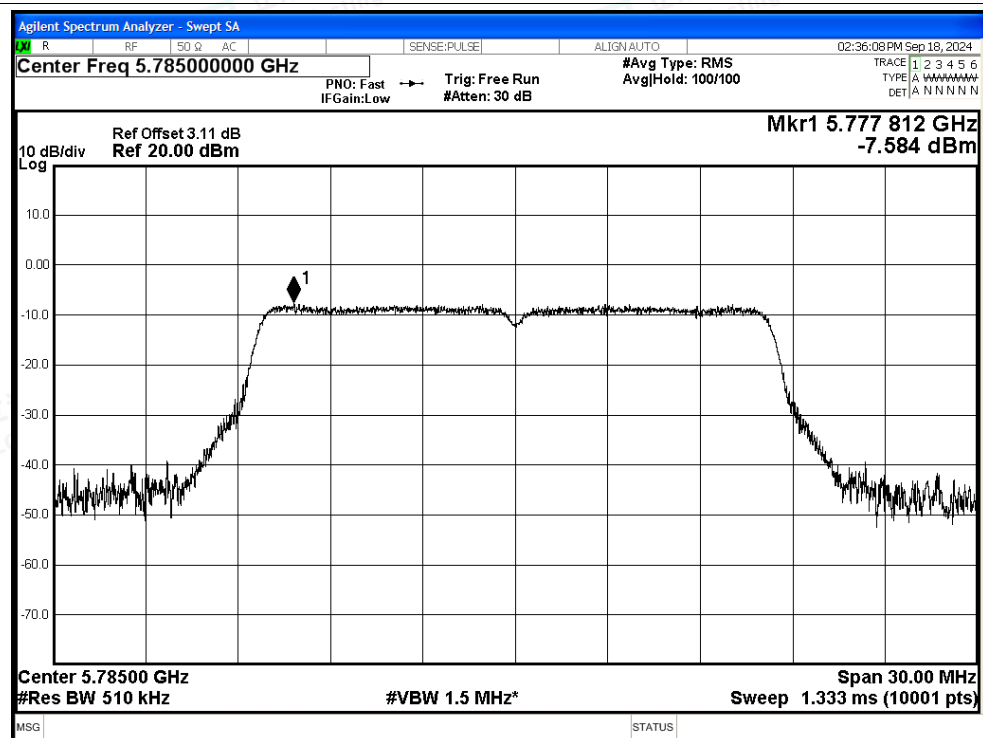

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



PSD NVNT a 5825MHz Ant1

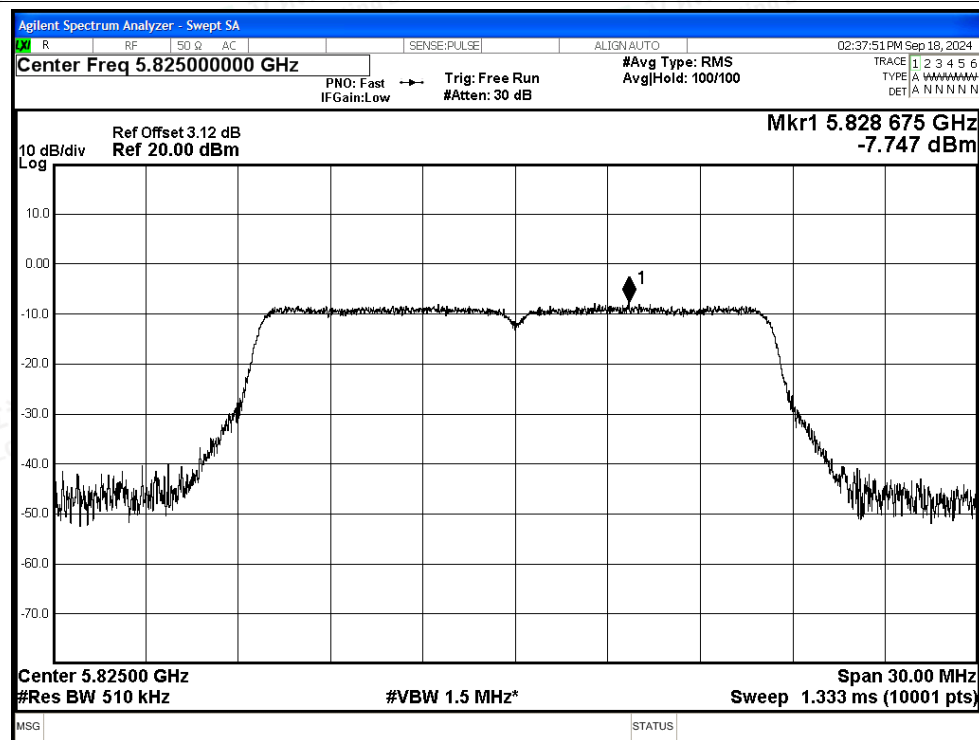

PSD NVNT n20 5745MHz Ant1


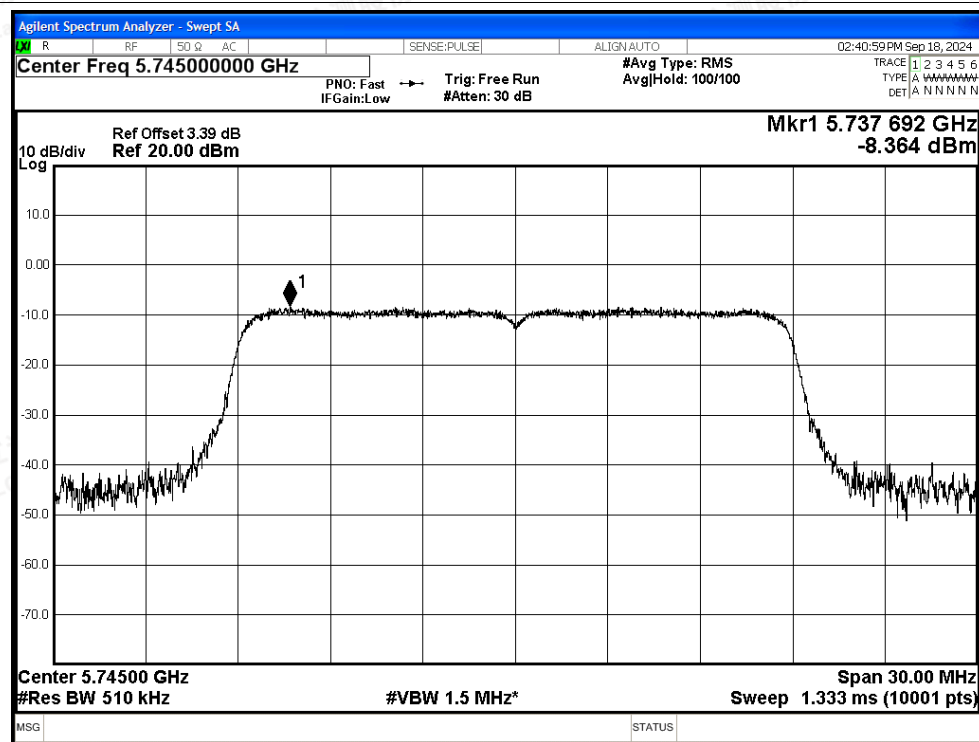


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

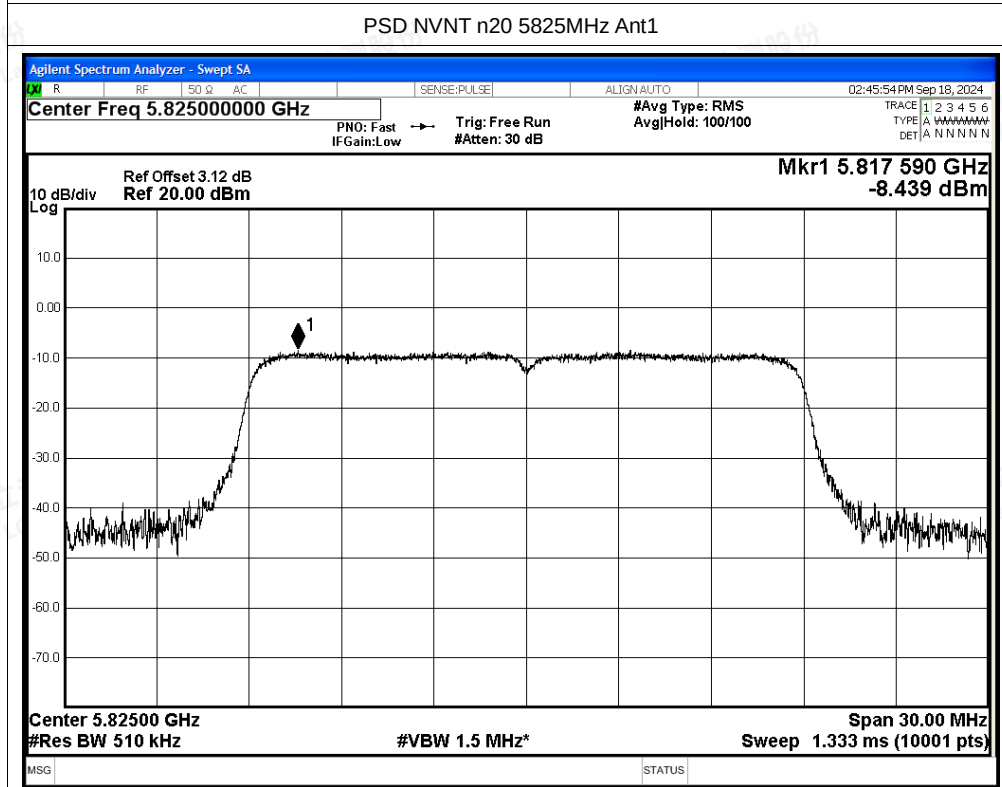
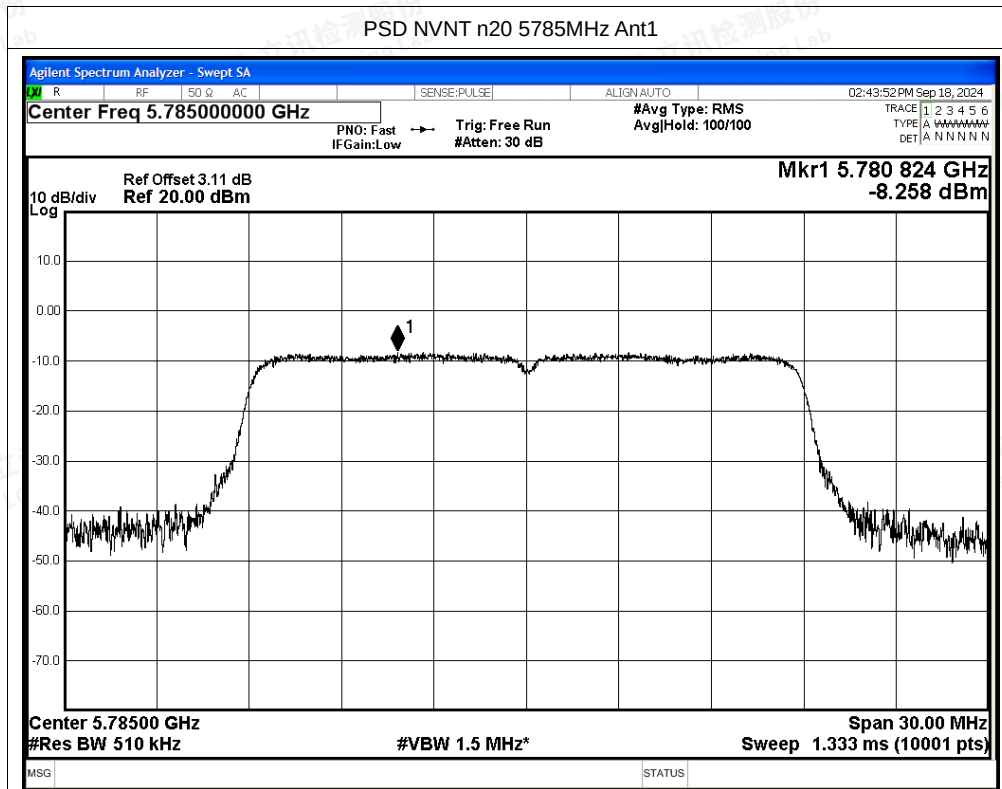


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

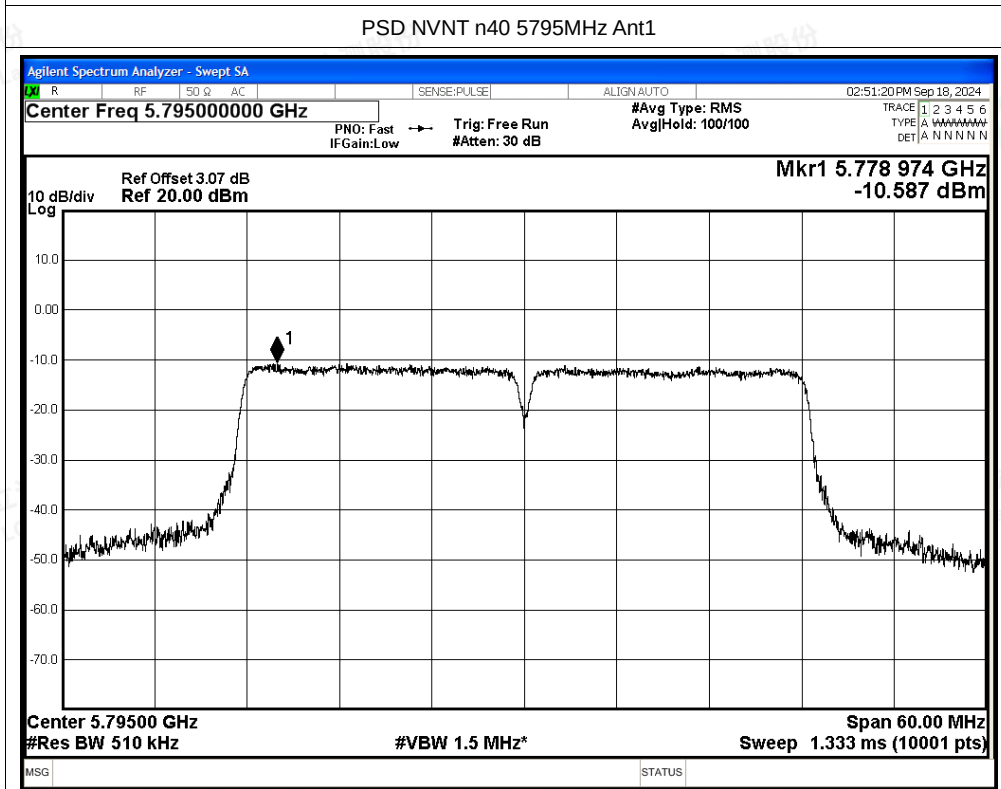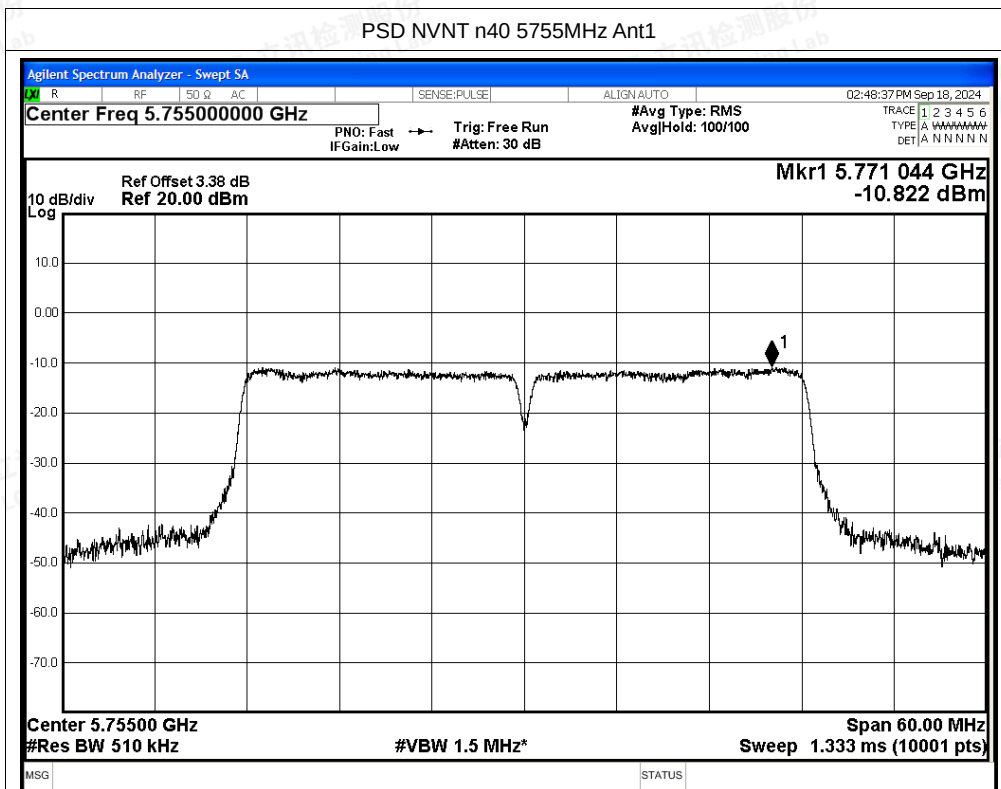

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## G.4 Restrict Band

| Condition | Mode | Frequency (MHz) | Antenna | Spur Freq (MHz) | Power (dBm) | Gain (dBi) | Duty Factor (dB) | EIRP Power (dBm) | Detector | Limit (dBm) | Verdict |
|-----------|------|-----------------|---------|-----------------|-------------|------------|------------------|------------------|----------|-------------|---------|
| NVNT      | a    | 5745            | Ant1    | 5650            | -51.03      | 4.28       | -                | -46.75           | Peak     | -27         | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5650            | -58.11      | 4.28       | 0.24             | -53.59           | Average  | -27         | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5700            | -48.47      | 4.28       | -                | -44.19           | Peak     | 10          | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5700            | -57.81      | 4.28       | 0.24             | -53.29           | Average  | 10          | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5720            | -38.02      | 4.28       | -                | -33.74           | Peak     | 15.6        | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5720            | -53.97      | 4.28       | 0.24             | -49.45           | Average  | 15.6        | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5725            | -33.5       | 4.28       | -                | -29.22           | Peak     | 27          | Pass    |
| NVNT      | a    | 5745            | Ant1    | 5725            | -48.82      | 4.28       | 0.24             | -44.30           | Average  | 27          | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5850            | -40.2       | 4.28       | -                | -35.92           | Peak     | 27          | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5850            | -53.16      | 4.28       | 0.24             | -48.64           | Average  | 27          | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5855            | -41.57      | 4.28       | -                | -37.29           | Peak     | 15.6        | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5855            | -56.55      | 4.28       | 0.24             | -52.03           | Average  | 15.6        | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5875            | -50.05      | 4.28       | -                | -45.77           | Peak     | 10          | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5875            | -57.06      | 4.28       | 0.24             | -52.54           | Average  | 10          | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5925            | -49.85      | 4.28       | -                | -45.57           | Peak     | -27         | Pass    |
| NVNT      | a    | 5825            | Ant1    | 5925            | -57.55      | 4.28       | 0.24             | -53.03           | Average  | -27         | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5650            | -49.04      | 4.28       | -                | -44.76           | Peak     | -27         | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5650            | -57.49      | 4.28       | 0.28             | -52.93           | Average  | -27         | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5700            | -49.74      | 4.28       | -                | -45.46           | Peak     | 10          | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5700            | -57.17      | 4.28       | 0.28             | -52.61           | Average  | 10          | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5720            | -40.42      | 4.28       | -                | -36.14           | Peak     | 15.6        | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5720            | -51.56      | 4.28       | 0.28             | -47.00           | Average  | 15.6        | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5725            | -27.61      | 4.28       | -                | -23.33           | Peak     | 27          | Pass    |
| NVNT      | n20  | 5745            | Ant1    | 5725            | -46.94      | 4.28       | 0.28             | -42.38           | Average  | 27          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5850            | -38.8       | 4.28       | -                | -34.52           | Peak     | 27          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5850            | -50.98      | 4.28       | 0.28             | -46.42           | Average  | 27          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5855            | -41.21      | 4.28       | -                | -36.93           | Peak     | 15.6        | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5855            | -55.3       | 4.28       | 0.28             | -50.74           | Average  | 15.6        | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5875            | -48.55      | 4.28       | -                | -44.27           | Peak     | 10          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5875            | -57.51      | 4.28       | 0.28             | -52.95           | Average  | 10          | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5925            | -49.56      | 4.28       | -                | -45.28           | Peak     | -27         | Pass    |
| NVNT      | n20  | 5825            | Ant1    | 5925            | -57.46      | 4.28       | 0.28             | -52.90           | Average  | -27         | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 5650            | -49.07      | 4.28       | -                | -44.79           | Peak     | -27         | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 5650            | -57.4       | 4.28       | 0.55             | -52.57           | Average  | -27         | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 5700            | -48.63      | 4.28       | -                | -44.35           | Peak     | 10          | Pass    |
| NVNT      | n40  | 5755            | Ant1    | 5700            | -56.93      | 4.28       | 0.55             | -52.10           | Average  | 10          | Pass    |



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity




|      |     |      |      |      |        |      |      |        |         |      |      |
|------|-----|------|------|------|--------|------|------|--------|---------|------|------|
| NVNT | n40 | 5755 | Ant1 | 5720 | -35.03 | 4.28 | -    | -30.75 | Peak    | 15.6 | Pass |
| NVNT | n40 | 5755 | Ant1 | 5720 | -50.82 | 4.28 | 0.55 | -45.99 | Average | 15.6 | Pass |
| NVNT | n40 | 5755 | Ant1 | 5725 | -29.44 | 4.28 | -    | -25.16 | Peak    | 27   | Pass |
| NVNT | n40 | 5755 | Ant1 | 5725 | -44.13 | 4.28 | 0.55 | -39.30 | Average | 27   | Pass |
| NVNT | n40 | 5795 | Ant1 | 5850 | -49.85 | 4.28 | -    | -45.57 | Peak    | 27   | Pass |
| NVNT | n40 | 5795 | Ant1 | 5850 | -57.27 | 4.28 | 0.55 | -52.44 | Average | 27   | Pass |
| NVNT | n40 | 5795 | Ant1 | 5855 | -49.99 | 4.28 | -    | -45.71 | Peak    | 15.6 | Pass |
| NVNT | n40 | 5795 | Ant1 | 5855 | -58.47 | 4.28 | 0.55 | -53.64 | Average | 15.6 | Pass |
| NVNT | n40 | 5795 | Ant1 | 5875 | -50.14 | 4.28 | -    | -45.86 | Peak    | 10   | Pass |
| NVNT | n40 | 5795 | Ant1 | 5875 | -58.27 | 4.28 | 0.55 | -53.44 | Average | 10   | Pass |
| NVNT | n40 | 5795 | Ant1 | 5925 | -50.5  | 4.28 | -    | -46.22 | Peak    | -27  | Pass |
| NVNT | n40 | 5795 | Ant1 | 5925 | -57.56 | 4.28 | 0.55 | -52.73 | Average | -27  | Pass |






## Test Graphs

## Restrict Band NVNT a 5745MHz Ant1 Peak

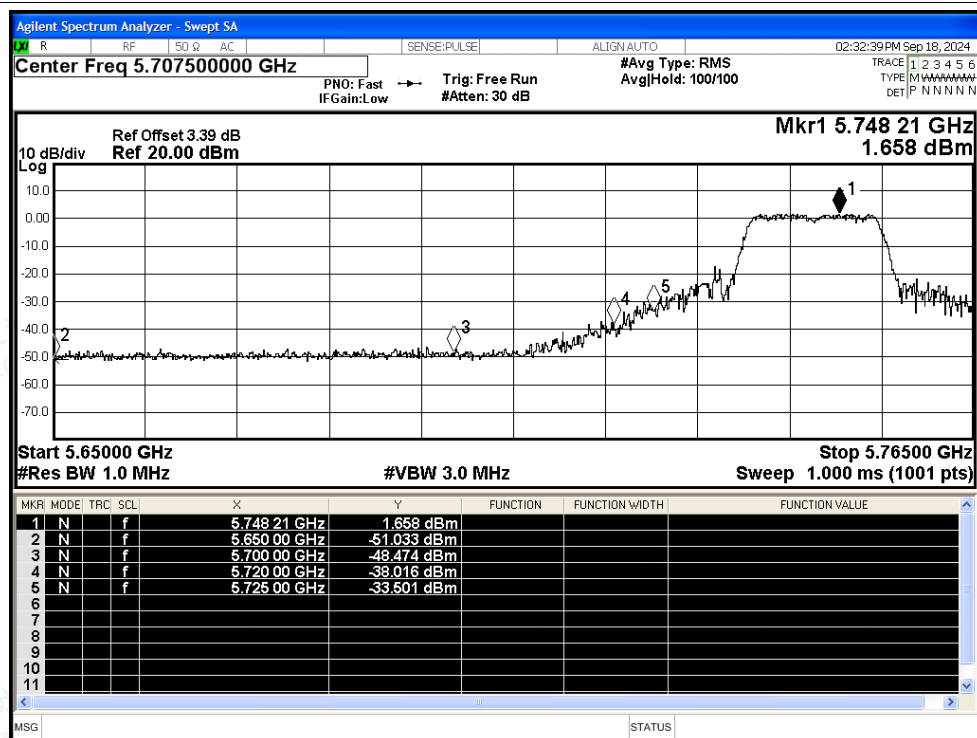

## Restrict Band NVNT a 5745MHz Ant1 Average

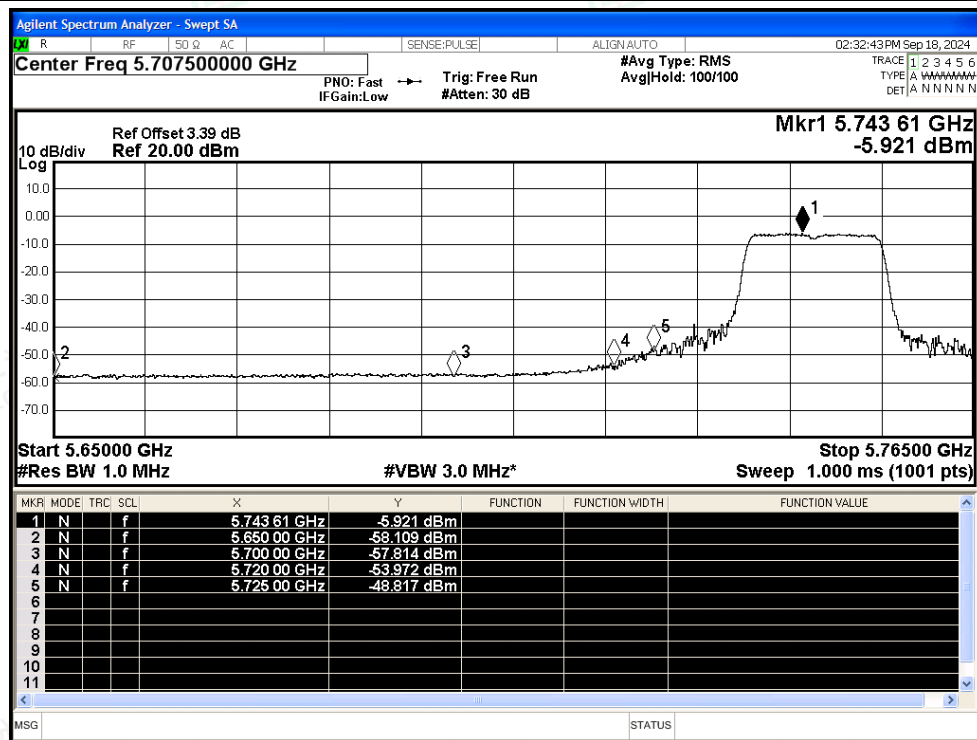

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT a 5825MHz Ant1 Peak

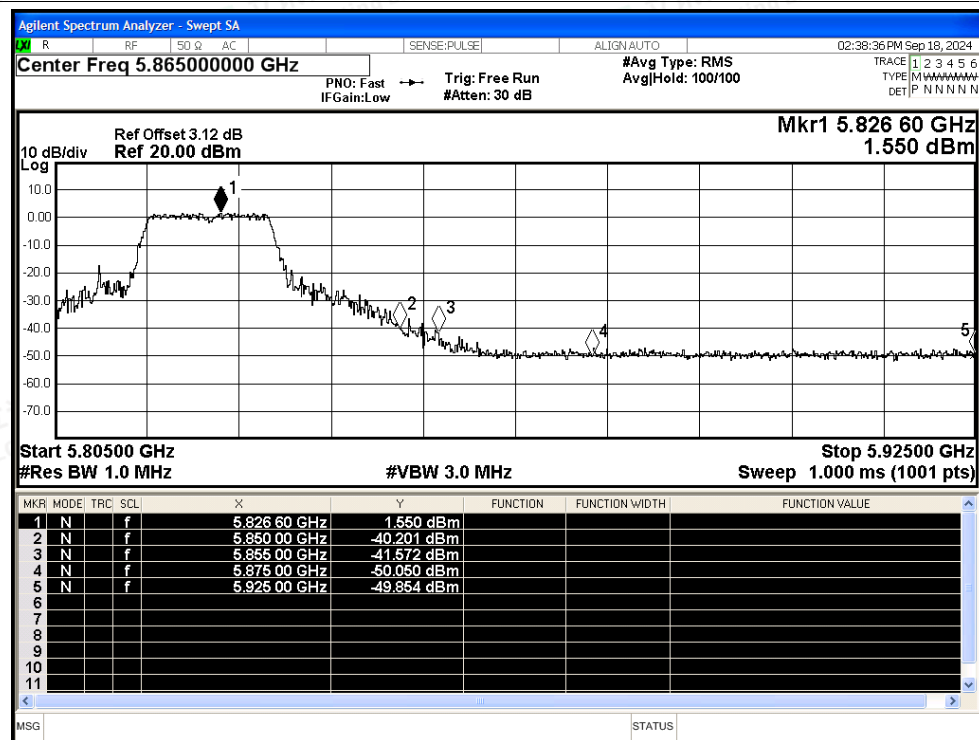

## Restrict Band NVNT a 5825MHz Ant1 Average

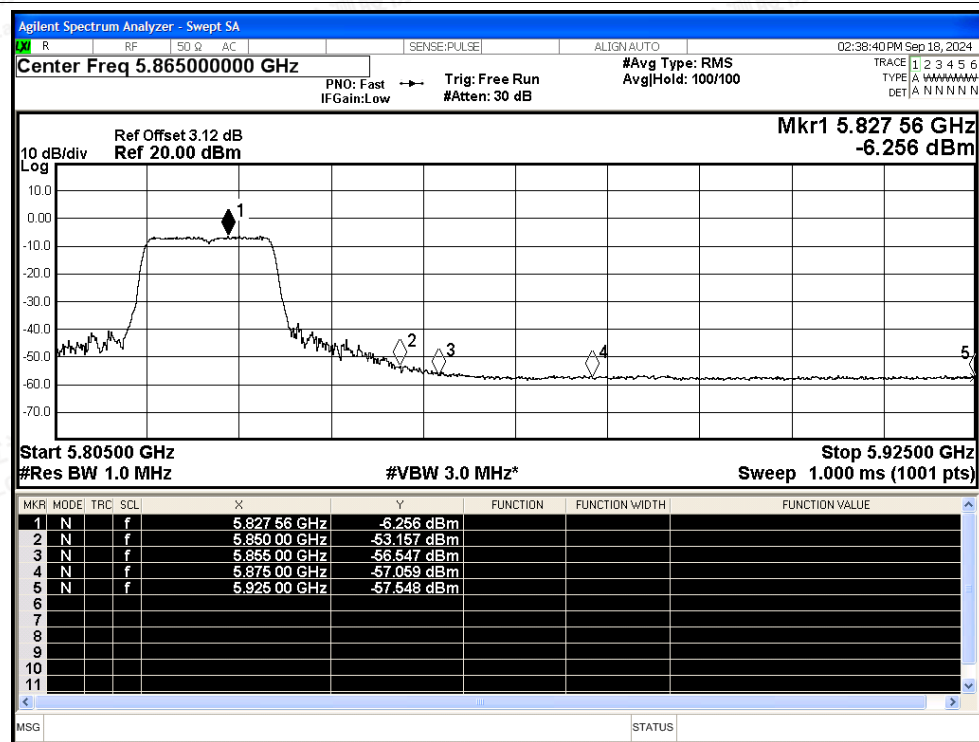

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n20 5745MHz Ant1 Peak

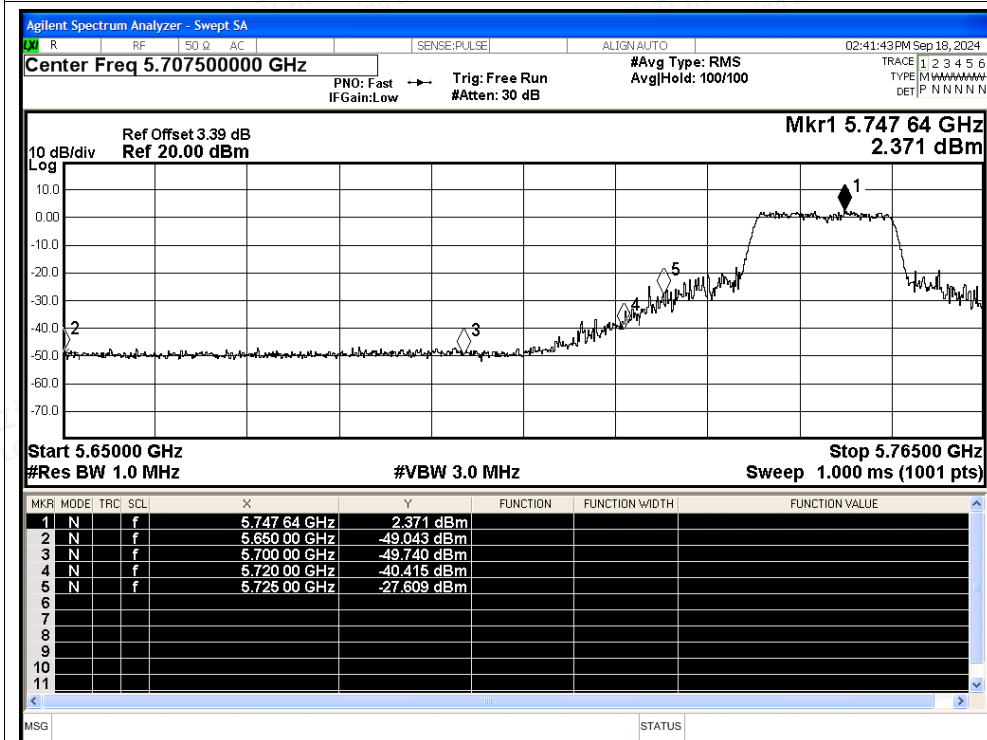

## Restrict Band NVNT n20 5745MHz Ant1 Average

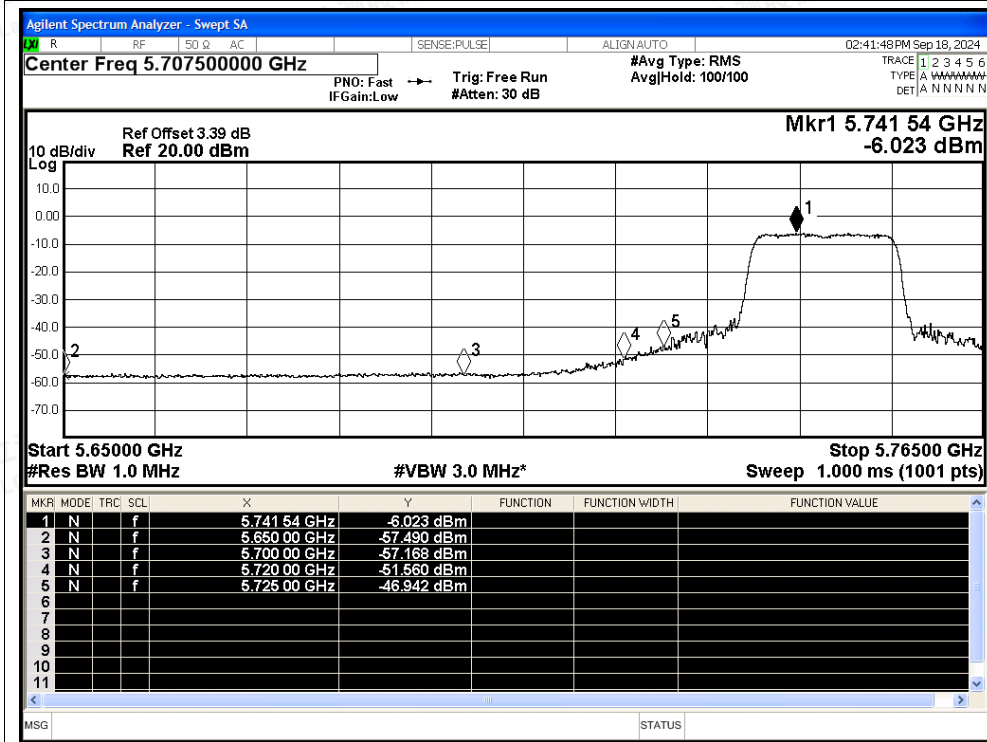

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n20 5825MHz Ant1 Peak

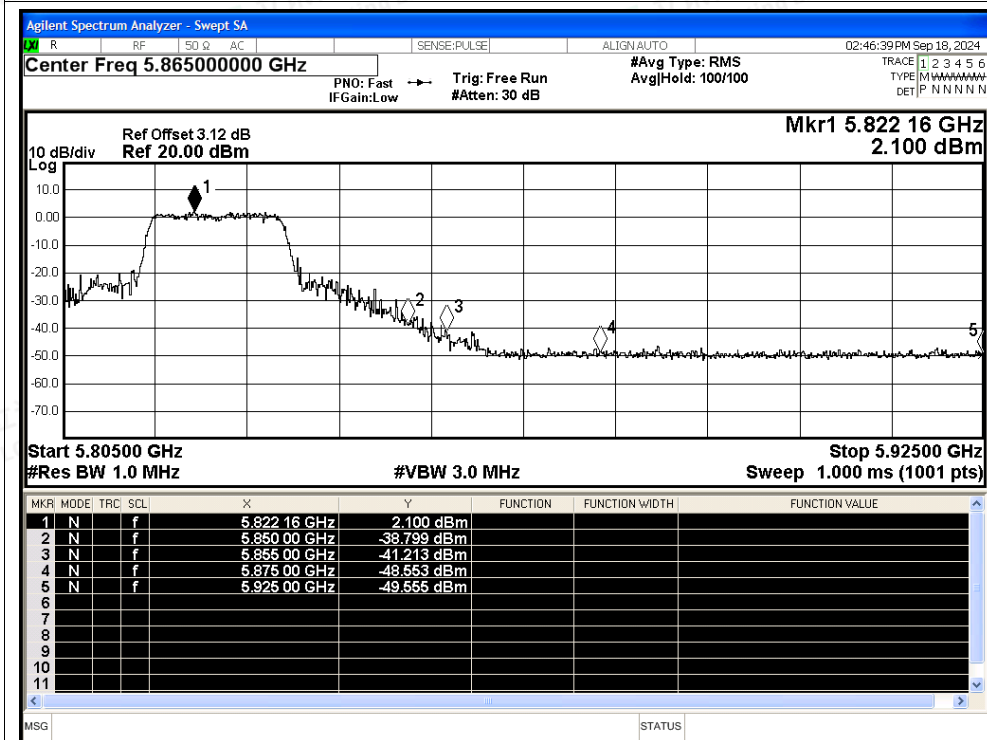

## Restrict Band NVNT n20 5825MHz Ant1 Average

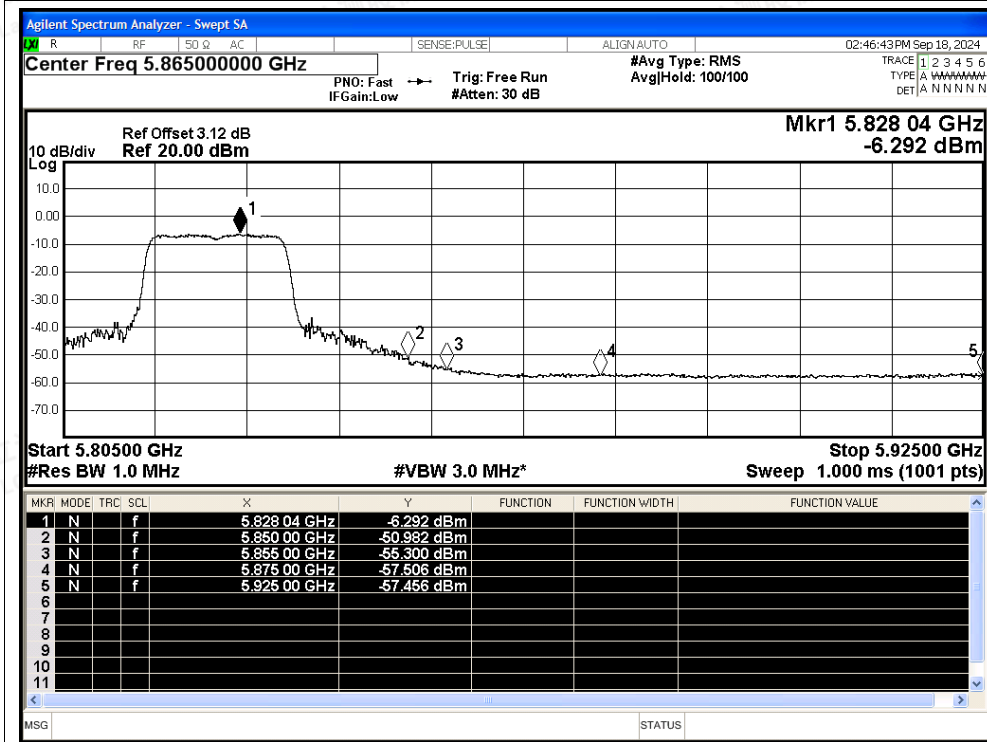

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n40 5755MHz Ant1 Peak

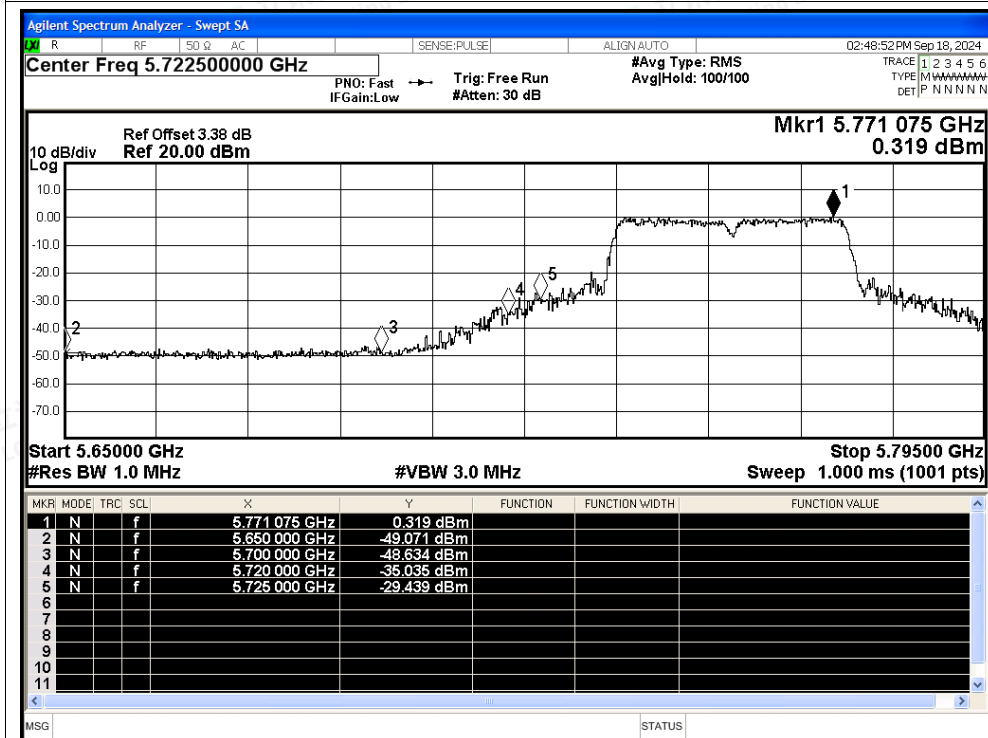

## Restrict Band NVNT n40 5755MHz Ant1 Average

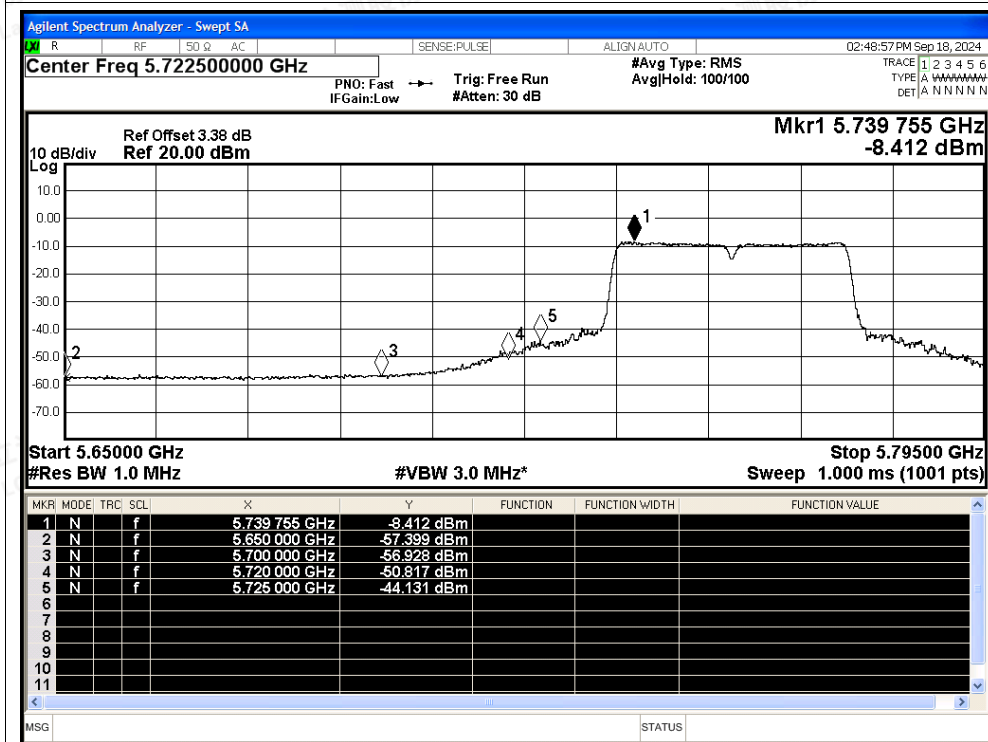

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Restrict Band NVNT n40 5795MHz Ant1 Peak

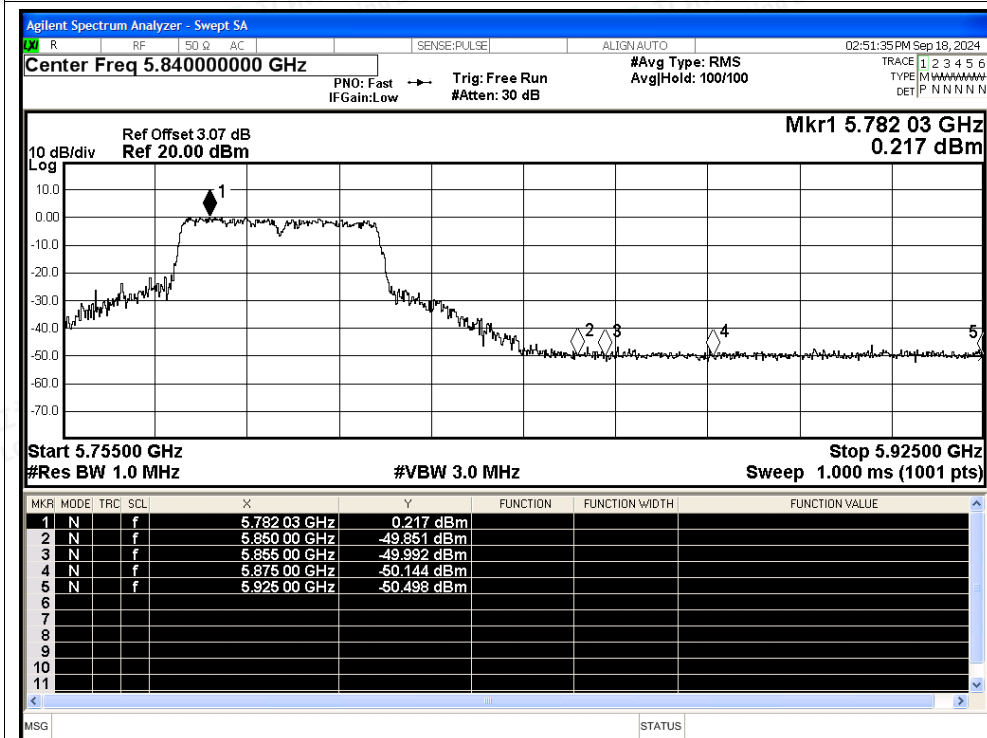

## Restrict Band NVNT n40 5795MHz Ant1 Average

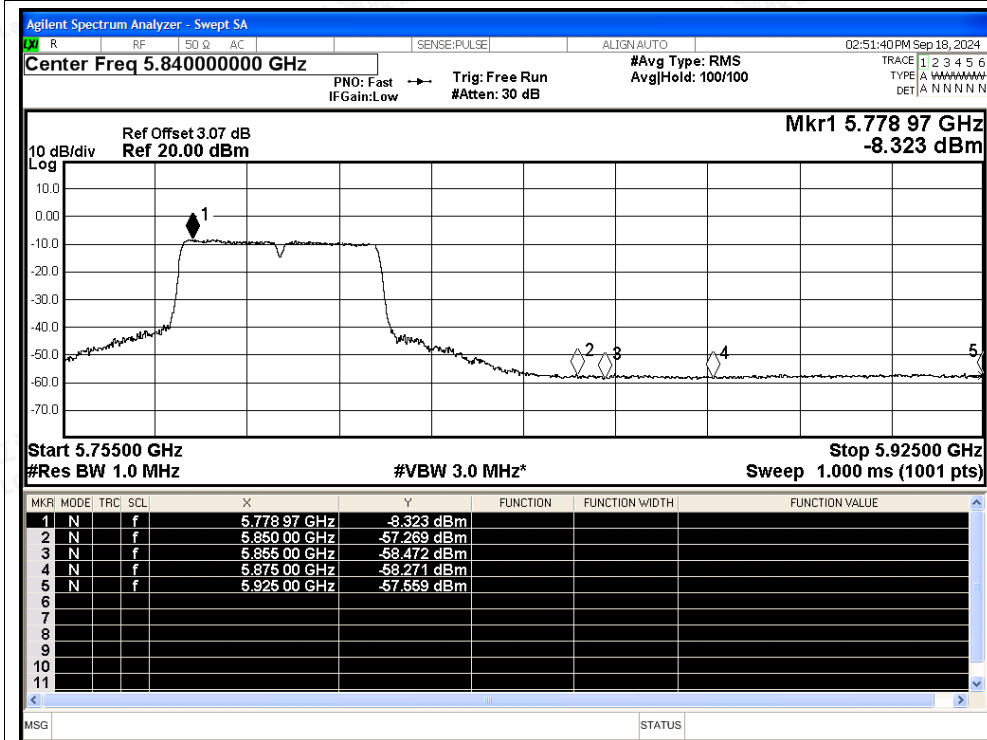

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## G.5 Frequency Stability


| Condition | Mode | Frequency<br>(MHz) | Antenna | Measured Frequency<br>(MHz) | Frequency Error<br>(Hz) | Deviation<br>(ppm) | Limit<br>(ppm) | Verdict |
|-----------|------|--------------------|---------|-----------------------------|-------------------------|--------------------|----------------|---------|
| NVNT      | a    | 5745               | Ant1    | 5745                        | 0                       | 0                  | 25             | Pass    |
| NVNT      | a    | 5785               | Ant1    | 5785                        | 0                       | 0                  | 25             | Pass    |
| NVNT      | a    | 5825               | Ant1    | 5825                        | 0                       | 0                  | 25             | Pass    |
| NVNT      | n20  | 5745               | Ant1    | 5744.98                     | -20000                  | -3.48              | 25             | Pass    |
| NVNT      | n20  | 5785               | Ant1    | 5785                        | 0                       | 0                  | 25             | Pass    |
| NVNT      | n20  | 5825               | Ant1    | 5824.98                     | -20000                  | -3.43              | 25             | Pass    |
| NVNT      | n40  | 5755               | Ant1    | 5755                        | 0                       | 0                  | 25             | Pass    |
| NVNT      | n40  | 5795               | Ant1    | 5794.96                     | -40000                  | -6.9               | 25             | Pass    |






## Test Graphs

## Freq. Stability NVNT a 5745MHz Ant1

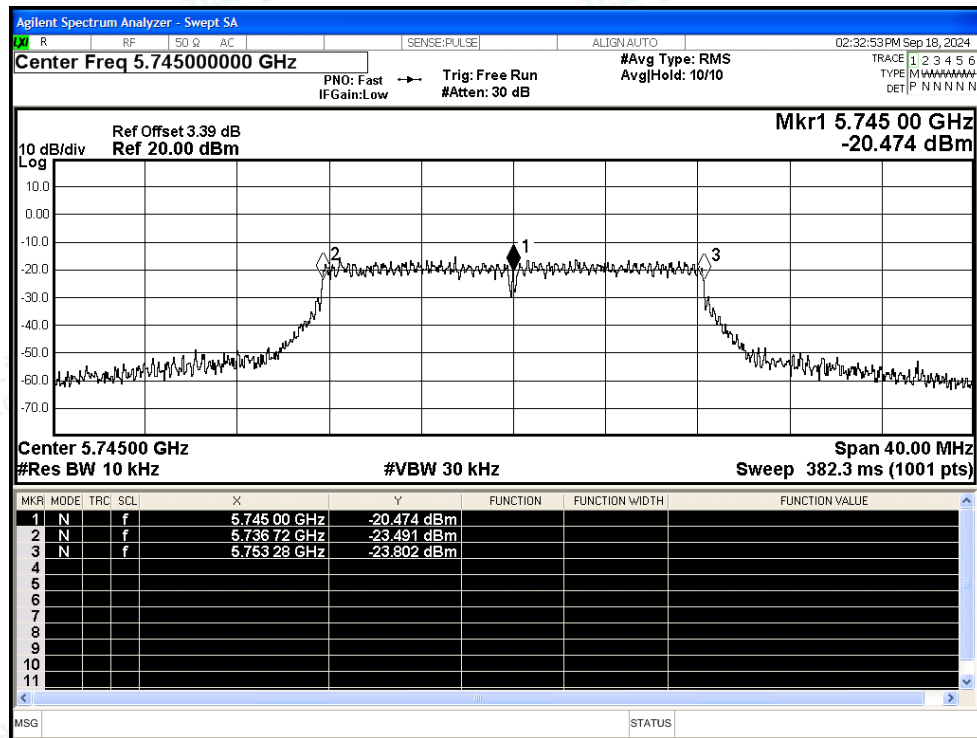

## Freq. Stability NVNT a 5785MHz Ant1


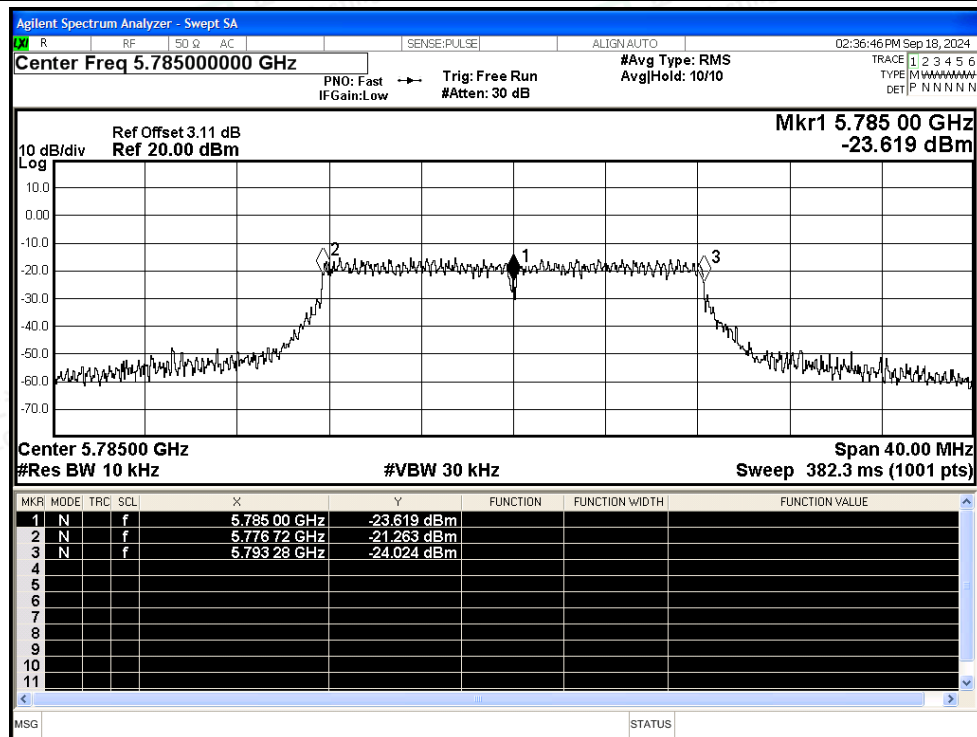


Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

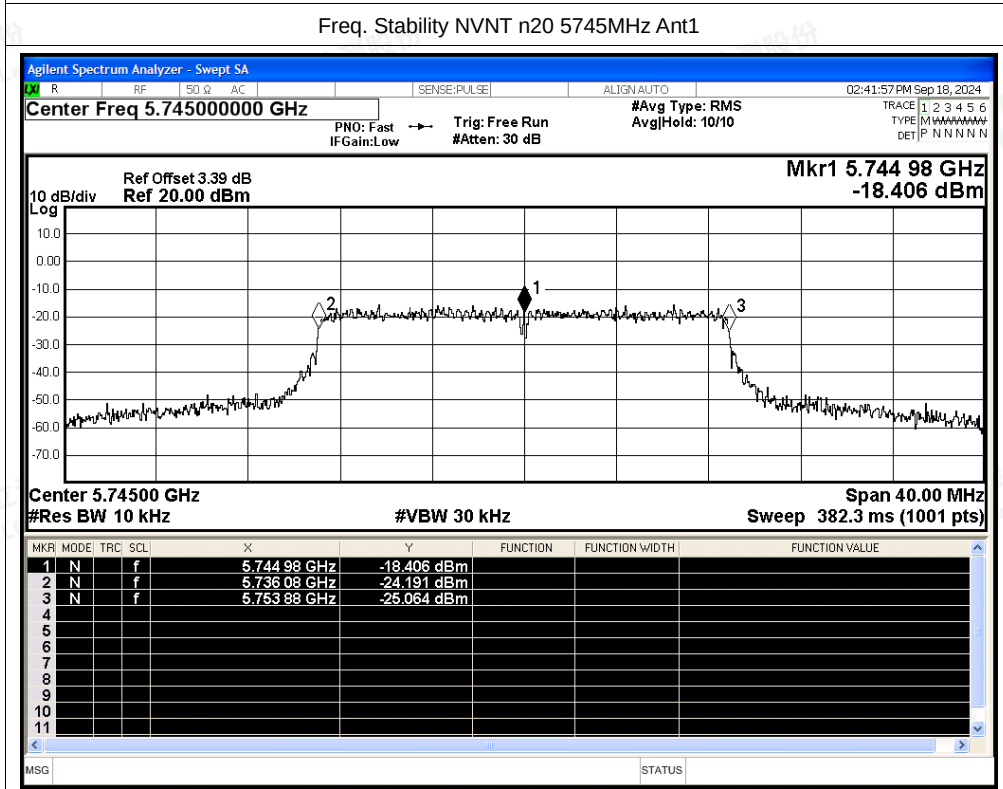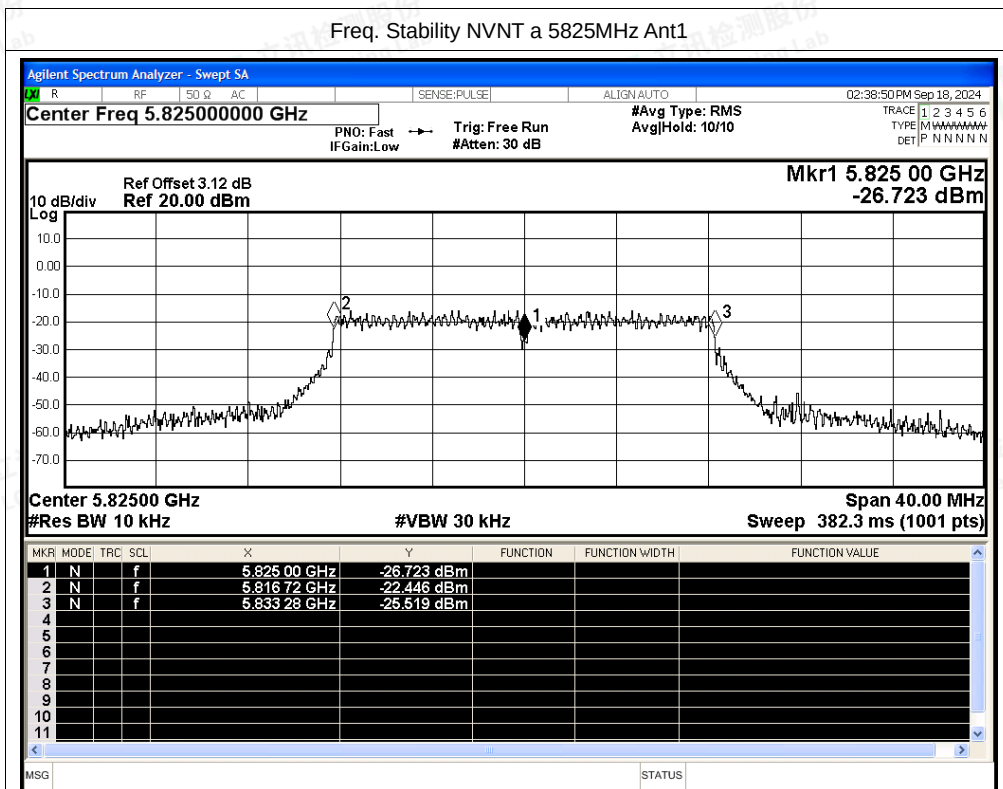

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Freq. Stability NVNT n20 5785MHz Ant1

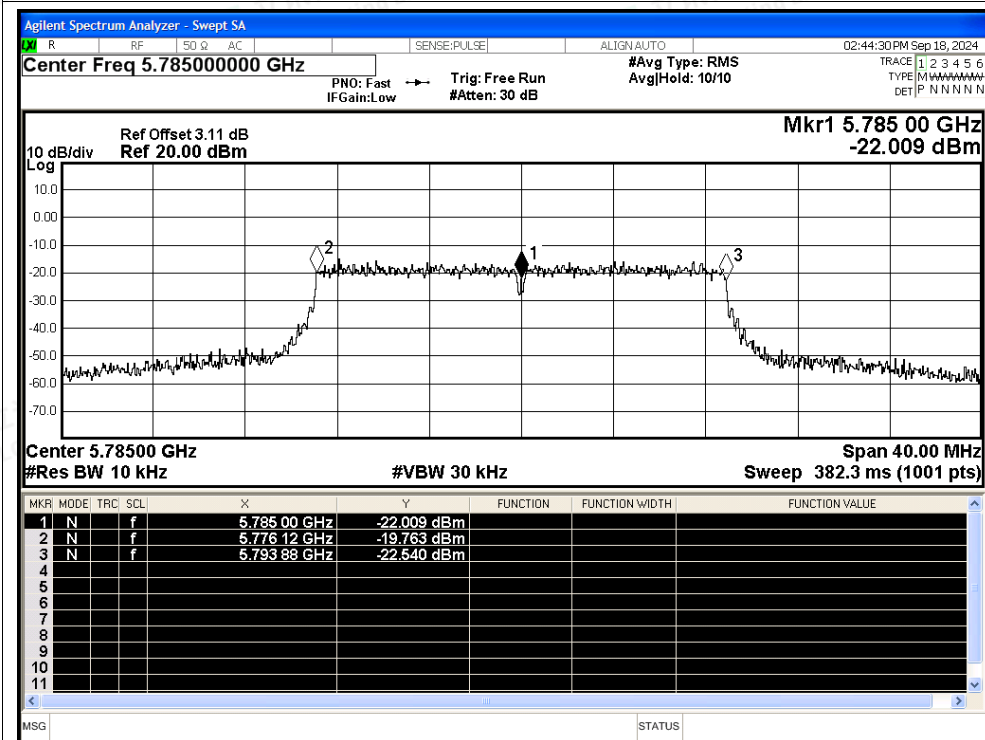

## Freq. Stability NVNT n20 5825MHz Ant1

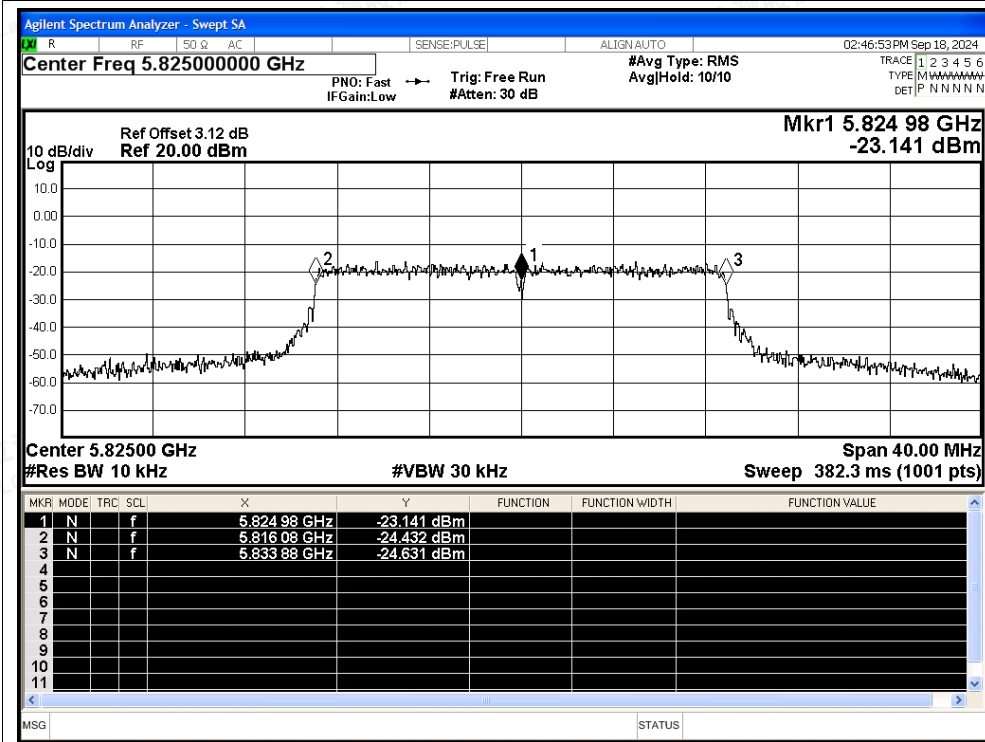

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Freq. Stability NVNT n40 5755MHz Ant1

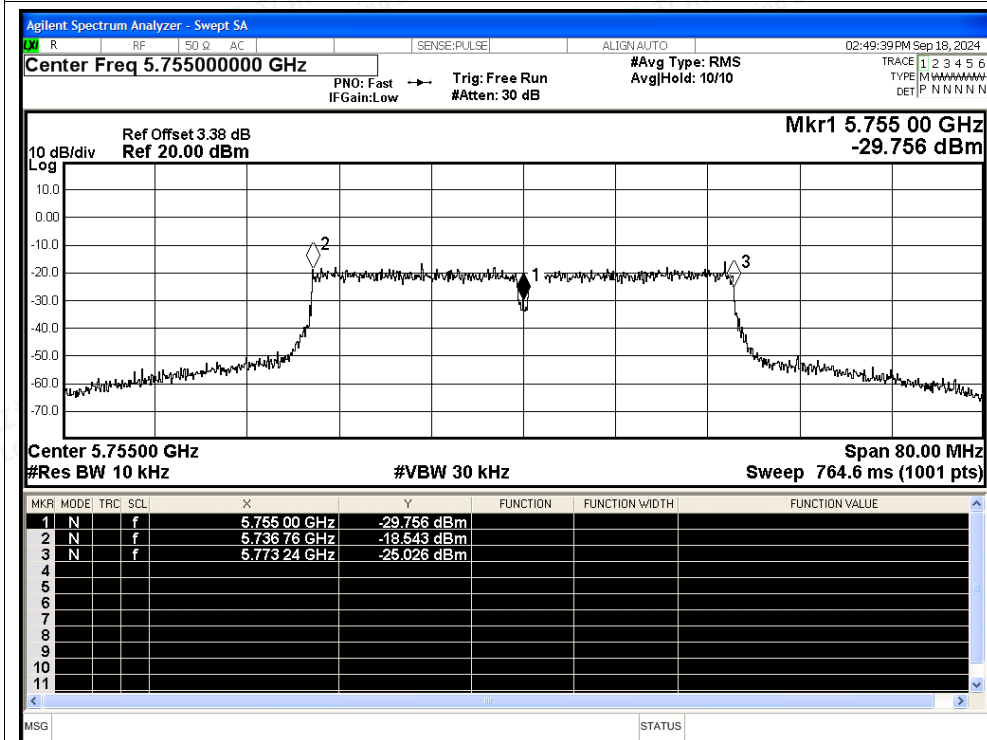

## Freq. Stability NVNT n40 5795MHz Ant1

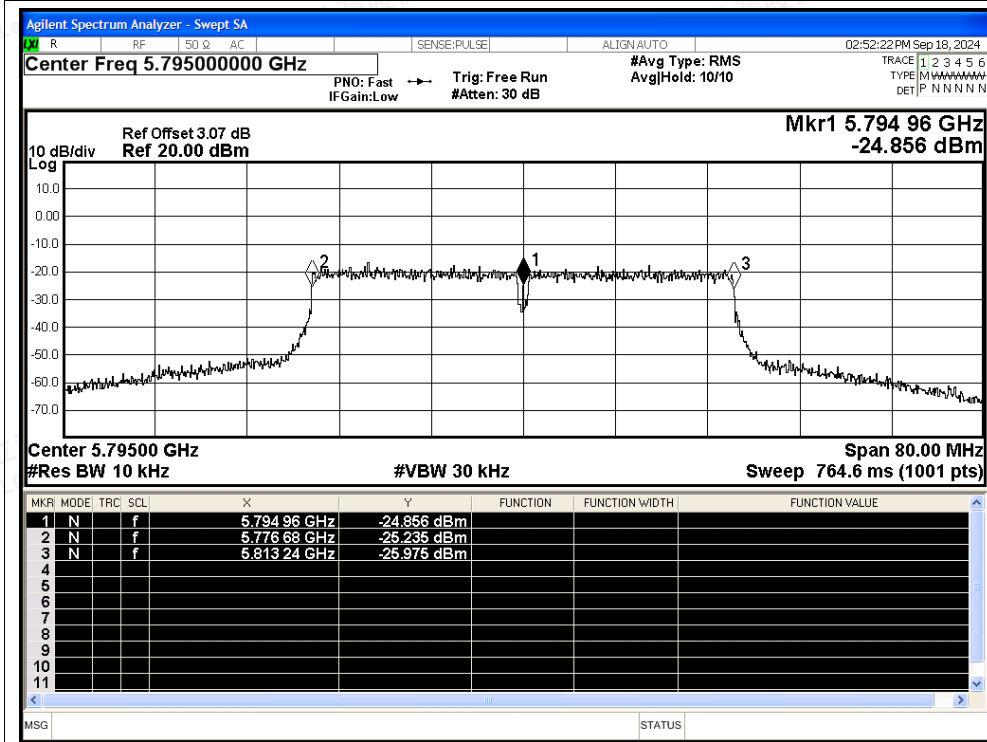

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity



## G.6 Duty Cycle


| Condition | Mode | Frequency (MHz) | Antenna | Duty Cycle (%) | Correction Factor (dB) | 1/T (kHz) |
|-----------|------|-----------------|---------|----------------|------------------------|-----------|
| NVNT      | a    | 5745            | Ant1    | 94.65          | 0.24                   | 0.91      |
| NVNT      | a    | 5785            | Ant1    | 94.56          | 0.24                   | 0.91      |
| NVNT      | a    | 5825            | Ant1    | 94.65          | 0.24                   | 0.91      |
| NVNT      | n20  | 5745            | Ant1    | 93.78          | 0.28                   | 1.07      |
| NVNT      | n20  | 5785            | Ant1    | 93.76          | 0.28                   | 1.07      |
| NVNT      | n20  | 5825            | Ant1    | 93.78          | 0.28                   | 1.07      |
| NVNT      | n40  | 5755            | Ant1    | 88.14          | 0.55                   | 2.14      |
| NVNT      | n40  | 5795            | Ant1    | 88.14          | 0.55                   | 2.14      |






## Test Graphs

## Duty Cycle NVNT a 5745MHz Ant1

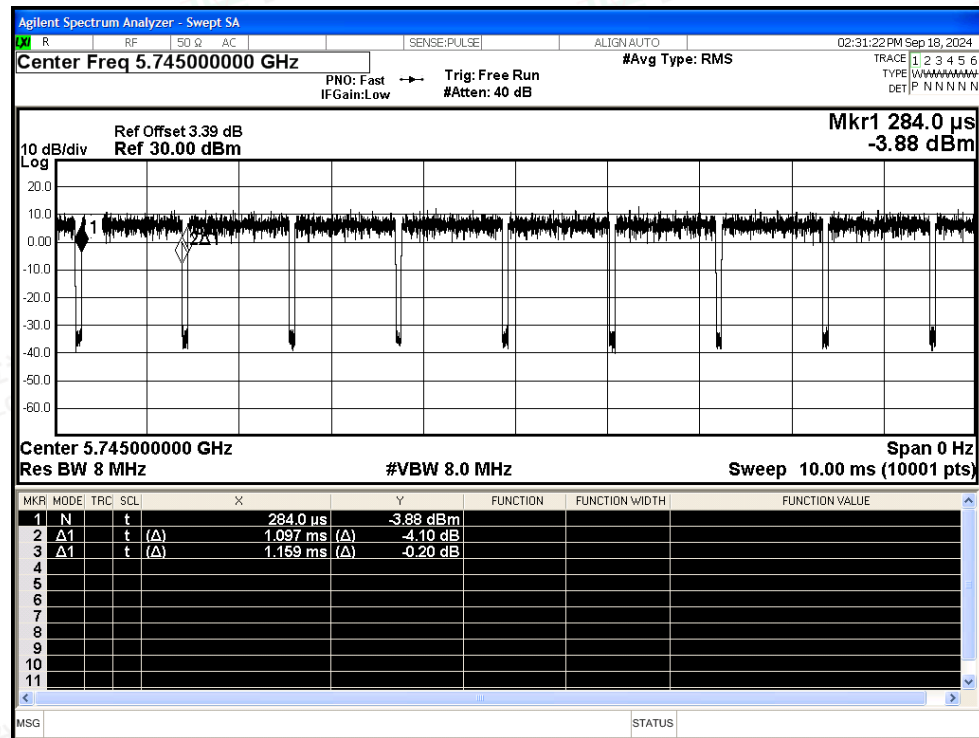

## Duty Cycle NVNT a 5785MHz Ant1

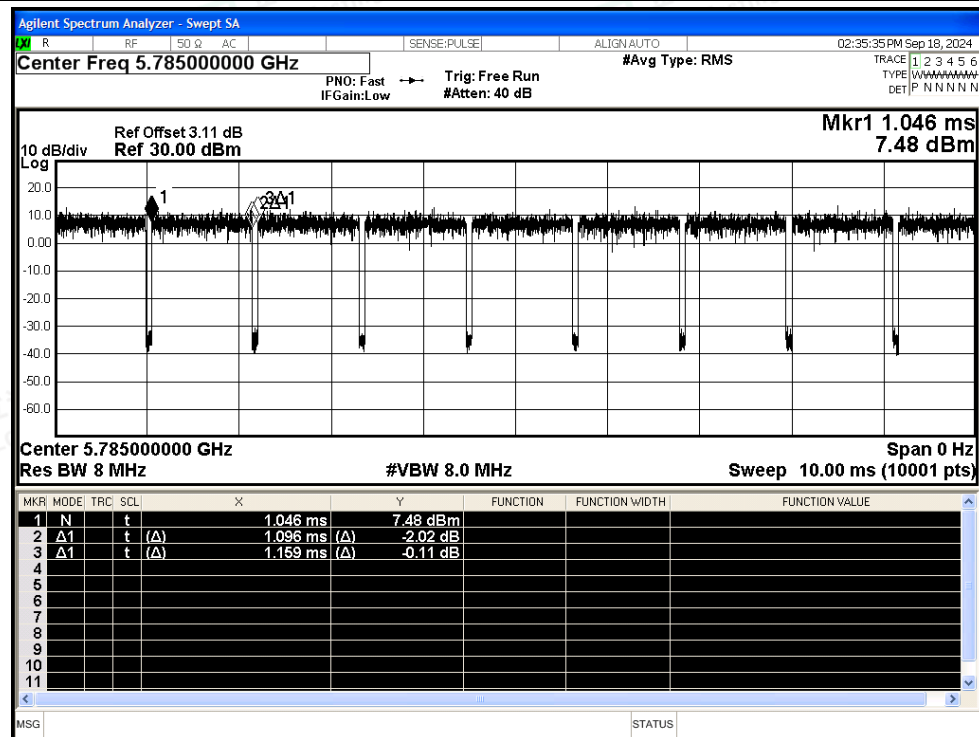

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Duty Cycle NVNT a 5825MHz Ant1

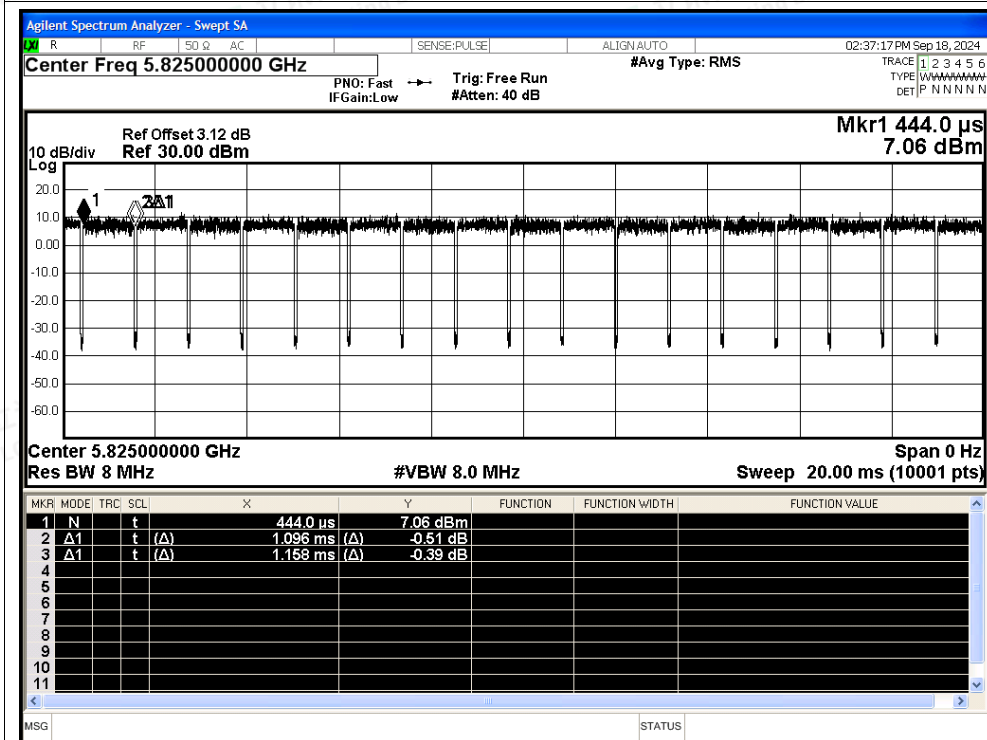

## Duty Cycle NVNT n20 5745MHz Ant1

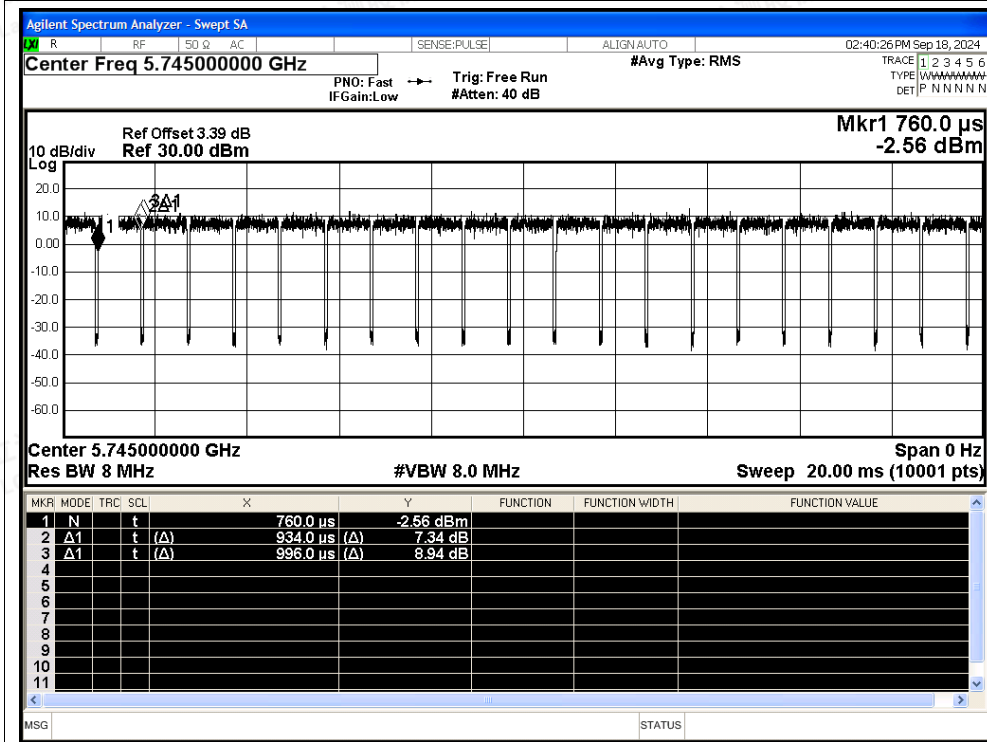

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Duty Cycle NVNT n20 5785MHz Ant1

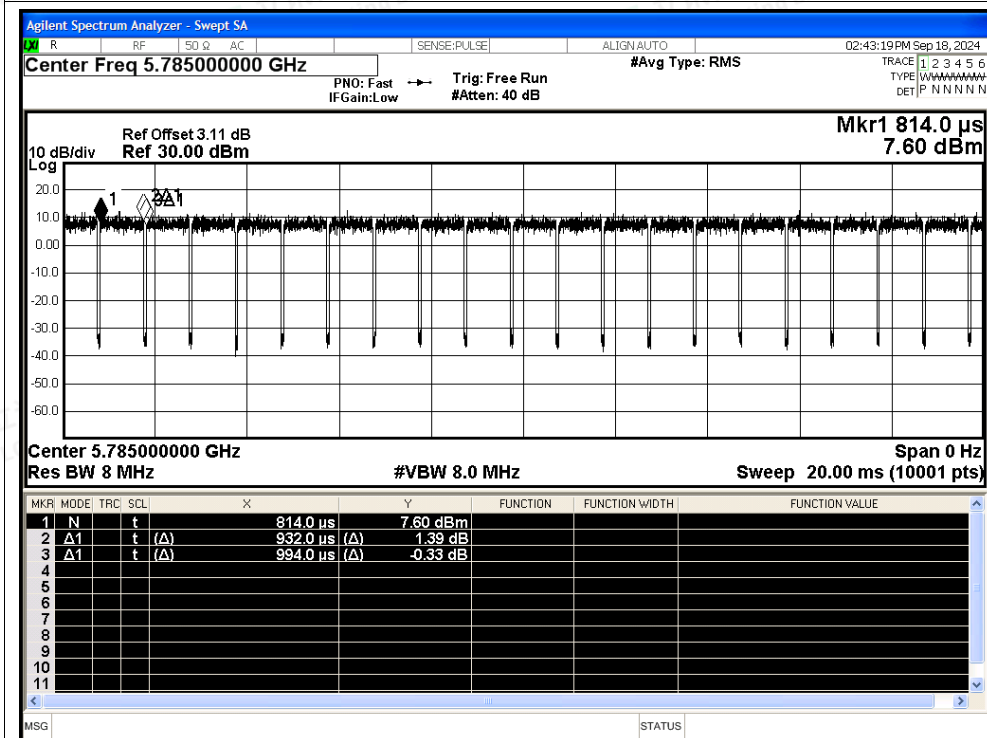

## Duty Cycle NVNT n20 5825MHz Ant1

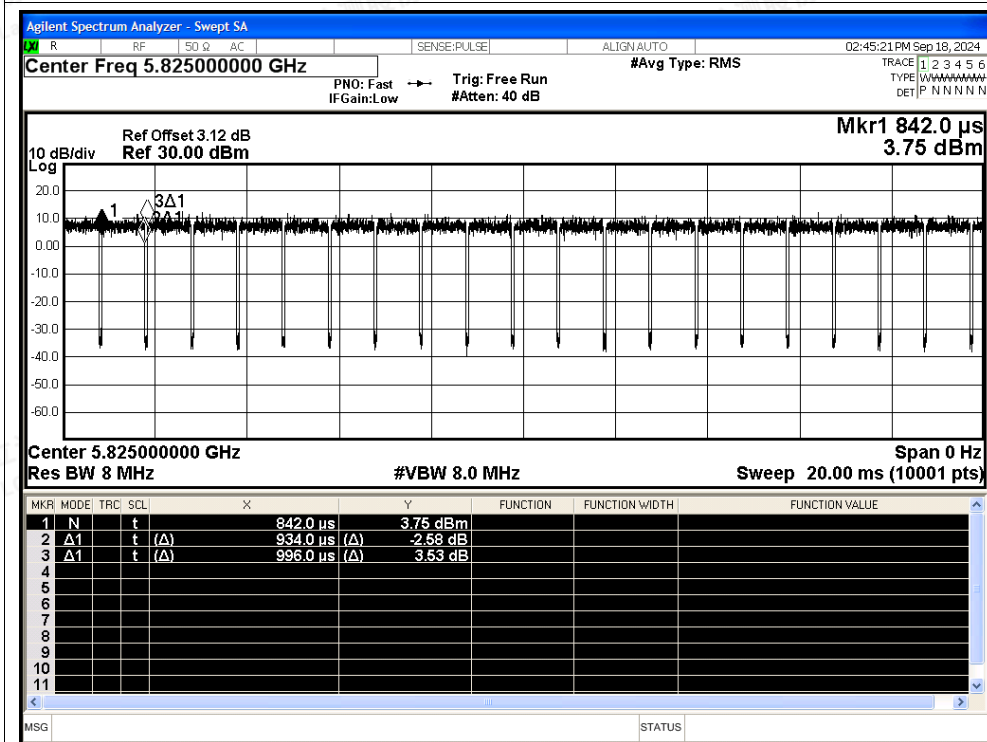

Shenzhen LCS Compliance Testing Laboratory Ltd.


Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com


Scan code to check authenticity



## Duty Cycle NVNT n40 5755MHz Ant1

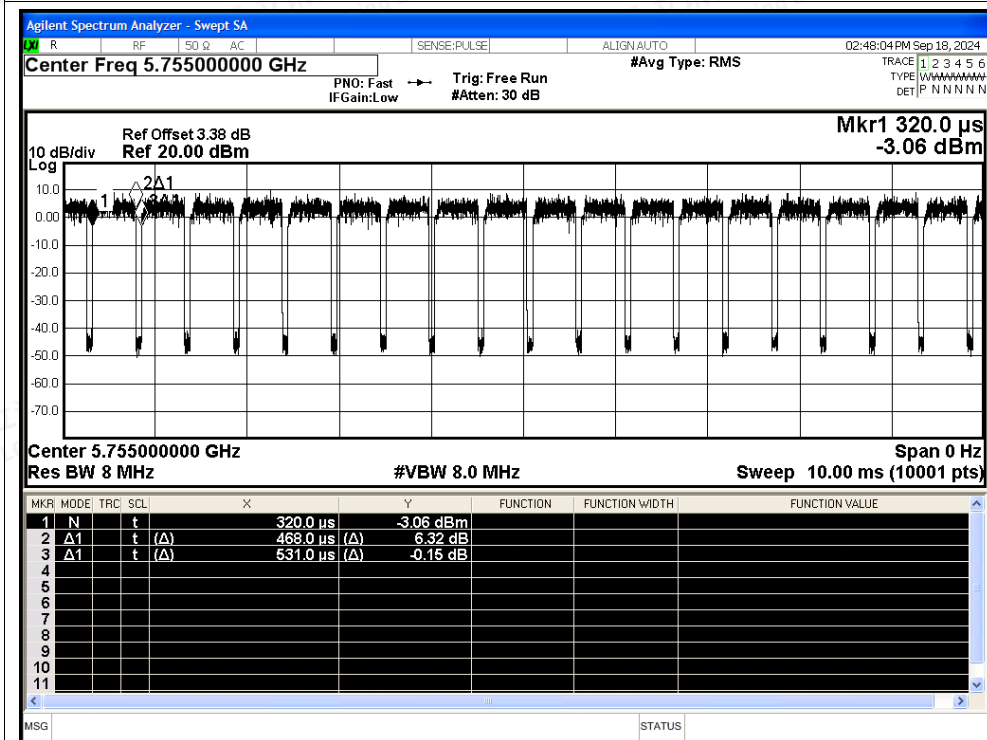

## Duty Cycle NVNT n40 5795MHz Ant1

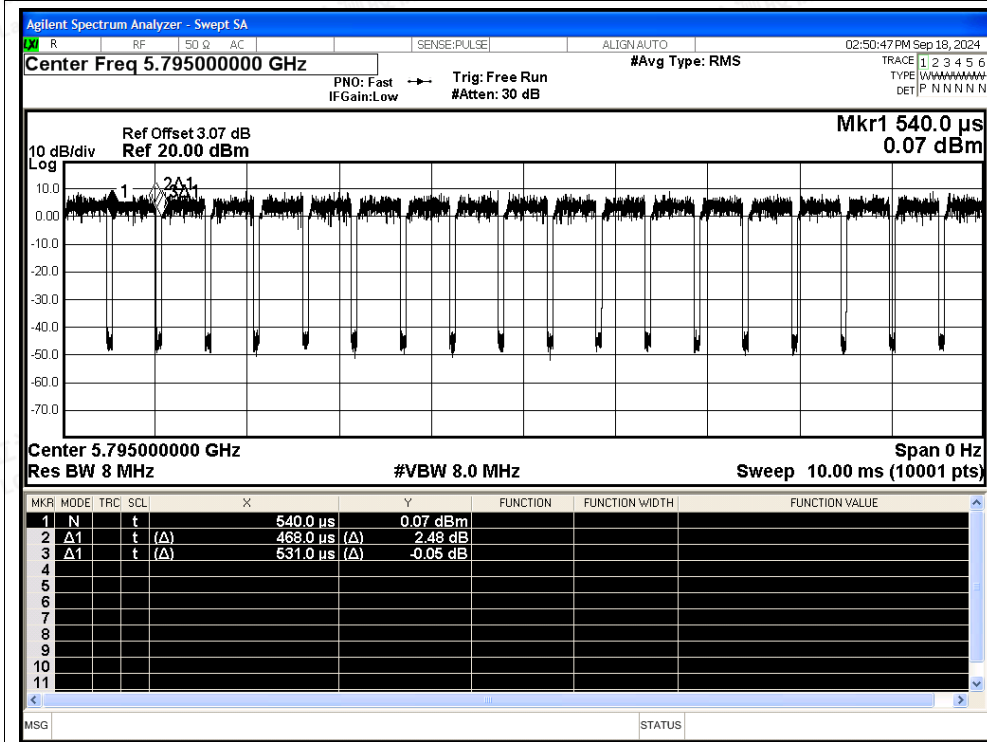

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A &amp; 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity