

FCC Appendix RF Test Data for 2.4GWIFI

FCC ID : 2AWOA-X121P5SH80STD

Company : Shenzhen CLT Electronics Co., Ltd

EUT : LED commercial display poster screen

Model Number : X121P5SH-80Std

Report No. : CTA26072002501

Reviewed By : Eric Wang

Appendix A: DTS Bandwidth

Test Result

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	10.200	2406.920	2417.120	0.5	PASS
		2437	10.200	2431.920	2442.120	0.5	PASS
		2462	10.200	2456.960	2467.160	0.5	PASS
11G	Ant1	2412	15.600	2404.080	2419.680	0.5	PASS
		2437	15.800	2429.240	2445.040	0.5	PASS
		2462	15.680	2454.320	2470.000	0.5	PASS
11N20SISO	Ant1	2412	17.000	2403.480	2420.480	0.5	PASS
		2437	16.680	2428.560	2445.240	0.5	PASS
		2462	17.120	2453.480	2470.600	0.5	PASS
11N40SISO	Ant1	2422	35.600	2404.400	2440.000	0.5	PASS
		2437	35.040	2419.880	2454.920	0.5	PASS
		2452	35.600	2434.480	2470.080	0.5	PASS

Test Graphs

11B_Ant1_2412



11B_Ant1_2437



11B_Ant1_2462



11G_Ant1_2412



11G_Ant1_2437



11G_Ant1_2462



11N20SISO_Ant1_2412




11N20SISO_Ant1_2437




11N20SISO_Ant1_2462



11N40SISO_Ant1_2422

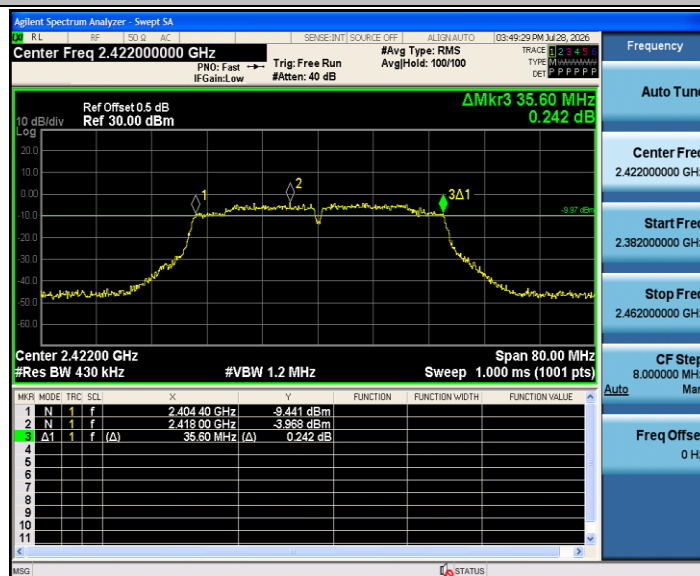

11N40SISO_Ant1_2437

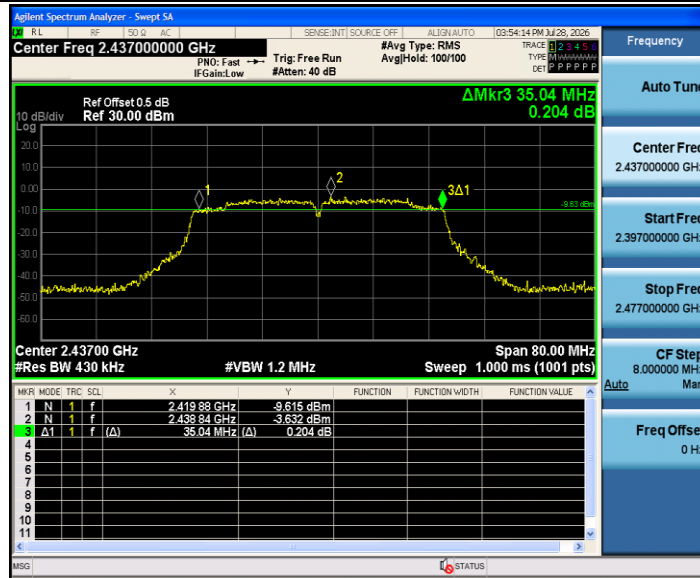

11N40SISO_Ant1_2452




Appendix B: Occupied Channel Bandwidth

Test Result


TestMode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	13.414	2405.2989	2418.7129	---	---
		2437	13.430	2430.3020	2443.7320	---	---
		2462	13.426	2455.3144	2468.7404	---	---
11G	Ant1	2412	16.947	2403.5469	2420.4939	---	---
		2437	16.787	2428.6767	2445.4637	---	---
		2462	16.841	2453.6235	2470.4645	---	---
11N20SISO	Ant1	2412	17.917	2403.0154	2420.9324	---	---
		2437	17.954	2428.0437	2445.9977	---	---
		2462	17.959	2452.9966	2470.9556	---	---
11N40SISO	Ant1	2422	36.132	2404.0557	2440.1877	---	---
		2437	36.078	2419.1268	2455.2048	---	---
		2452	36.048	2434.0935	2470.1415	---	---

Test Graphs


11B_Ant1_2412

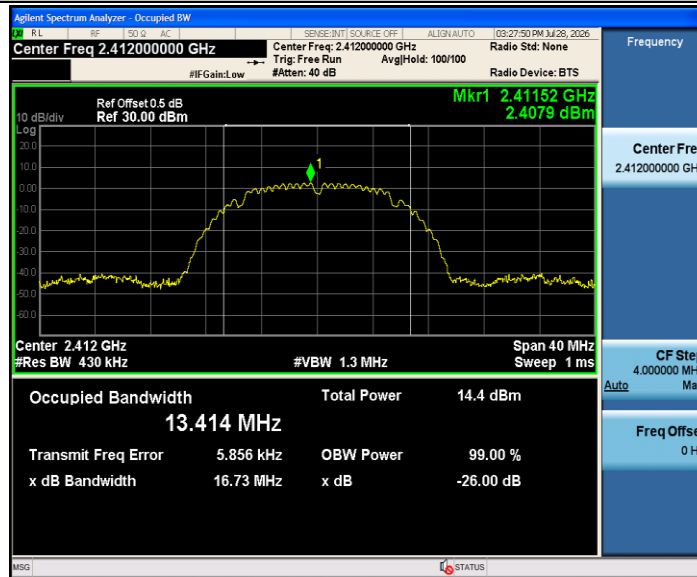


11B_Ant1_2437

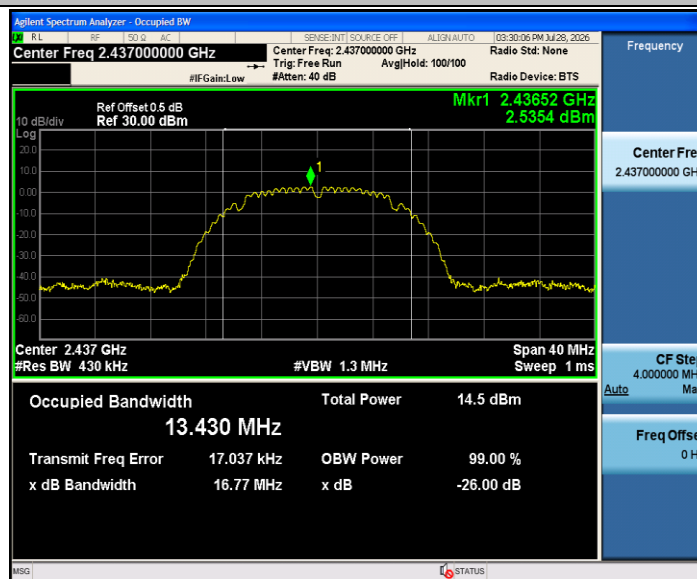


11B_Ant1_2462

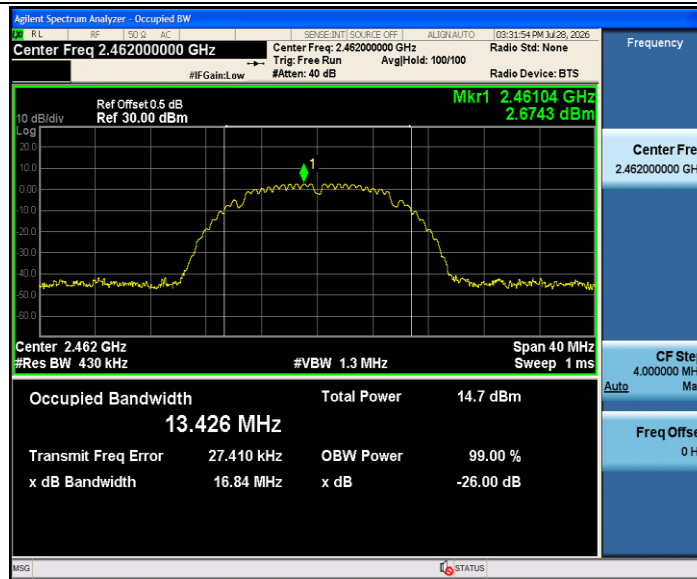


11G_Ant1_2412

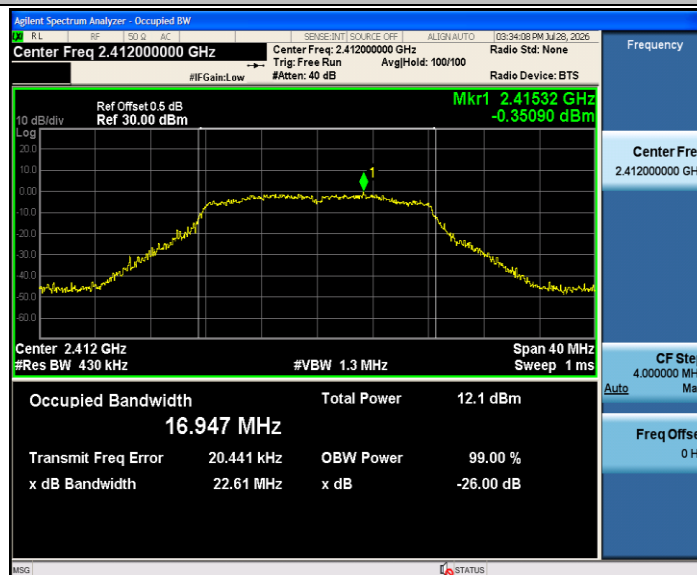


11G_Ant1_2437

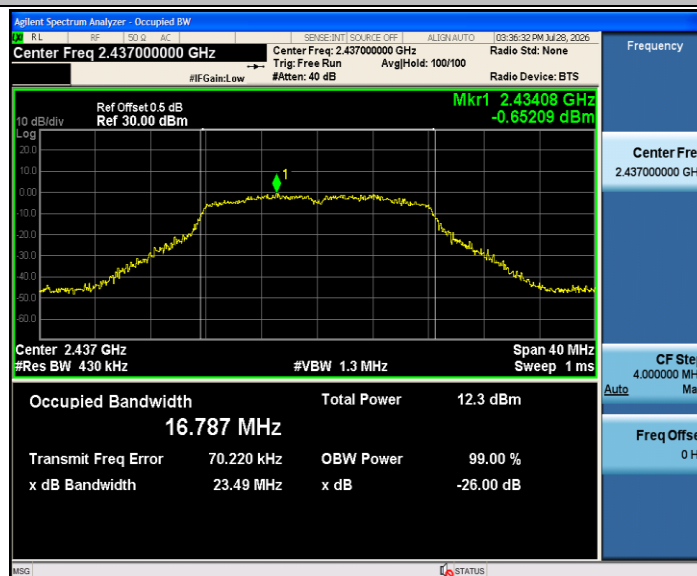

11G_Ant1_2462

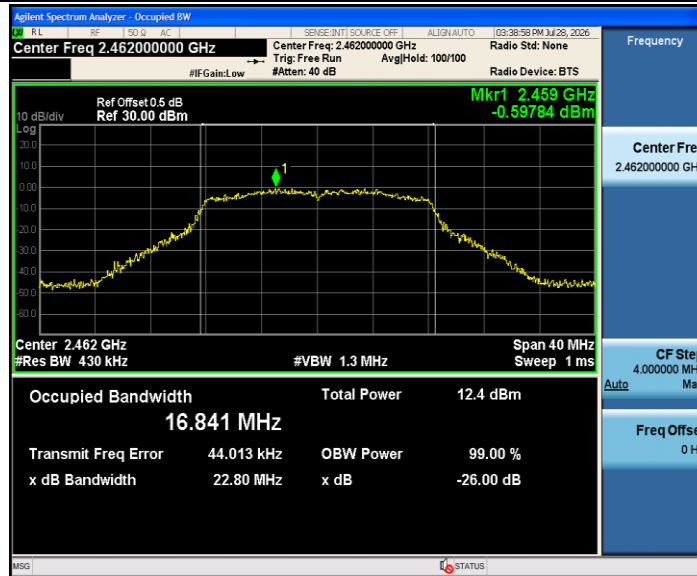


11N20SISO_Ant1_2412

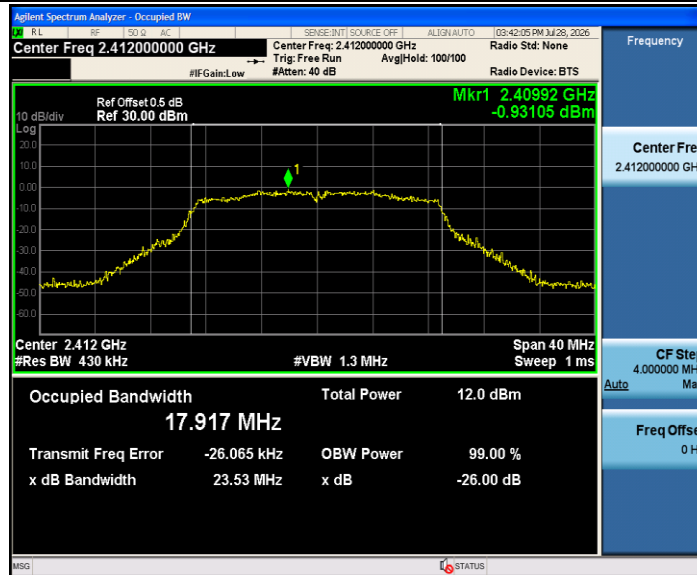


11N20SISO_Ant1_2437




11N20SISO_Ant1_2462

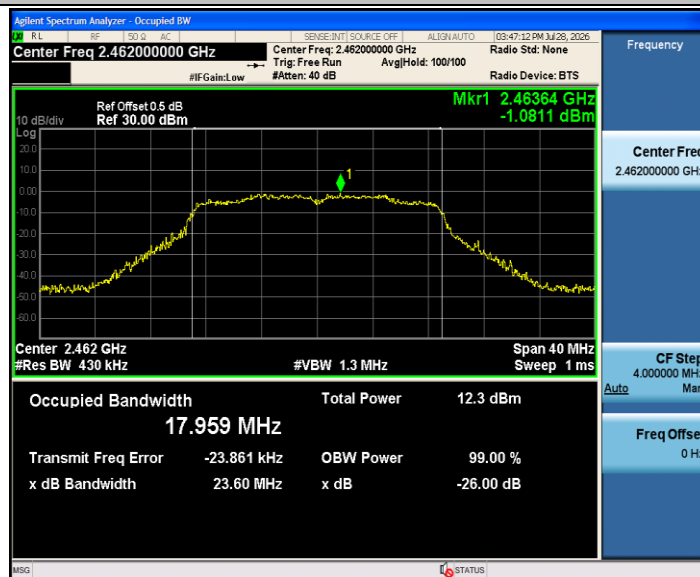


11N40SISO_Ant1_2422

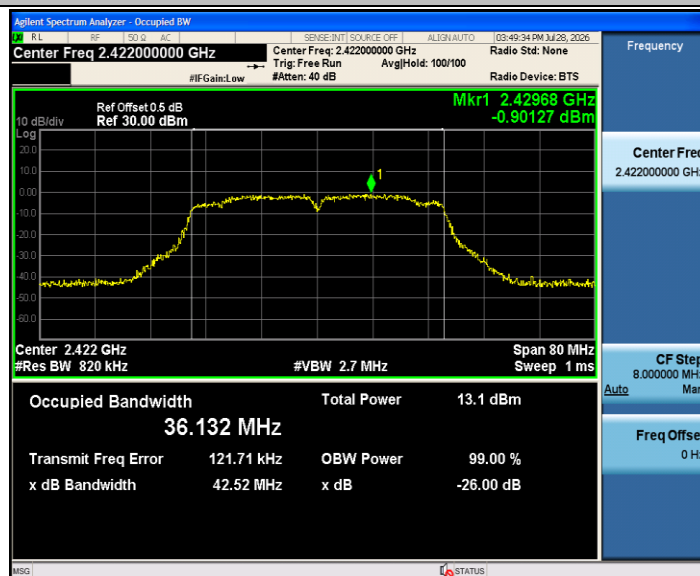

11N40SISO_Ant1_2437

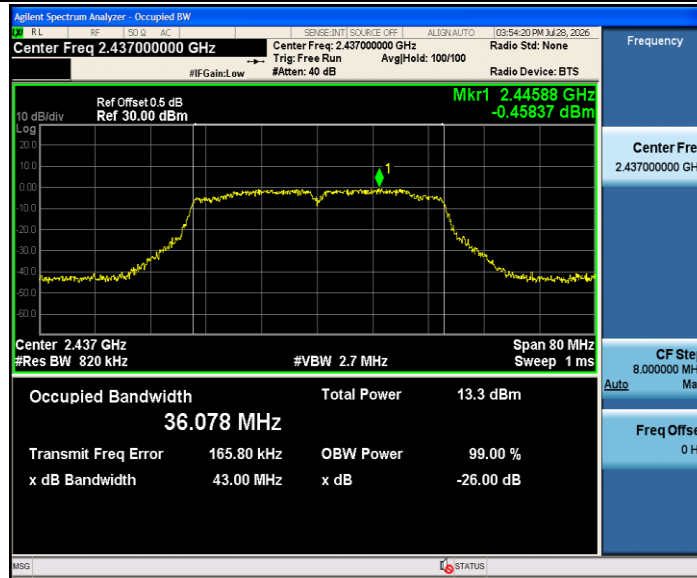

11N40SISO_Ant1_2452

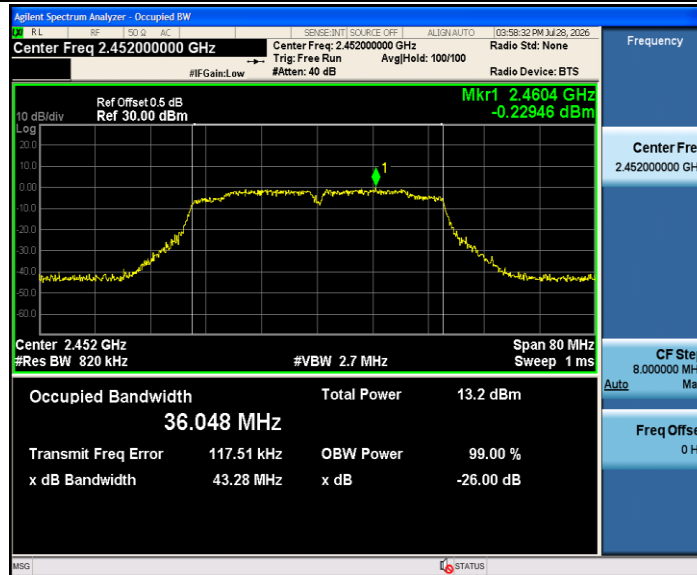

Appendix C: Maximum conducted output power

Test Result

Test Mode	Antenna	Frequency[M Hz]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	13.97	≤30.00	PASS
		2437	14.18	≤30.00	PASS
		2462	14.32	≤30.00	PASS
11G	Ant1	2412	13.02	≤30.00	PASS
		2437	13.18	≤30.00	PASS
		2462	13.27	≤30.00	PASS
11N20SISO	Ant1	2412	12.91	≤30.00	PASS
		2437	12.99	≤30.00	PASS
		2462	13.18	≤30.00	PASS
11N40SISO	Ant1	2422	13.29	≤30.00	PASS
		2437	13.51	≤30.00	PASS
		2452	13.26	≤30.00	PASS

Appendix D: Maximum power spectral density

Test Result


TestMode	Antenna	Frequency[MHz]	Result[dBm/3-100kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-12.15	≤8.00	PASS
		2437	-10.99	≤8.00	PASS
		2462	-12.02	≤8.00	PASS
11G	Ant1	2412	-18.16	≤8.00	PASS
		2437	-18.77	≤8.00	PASS
		2462	-18.61	≤8.00	PASS
11N20SISO	Ant1	2412	-19.02	≤8.00	PASS
		2437	-18.28	≤8.00	PASS
		2462	-18.00	≤8.00	PASS
11N40SISO	Ant1	2422	-21.13	≤8.00	PASS
		2437	-20.67	≤8.00	PASS
		2452	-20.98	≤8.00	PASS

Test Graphs

11B_Ant1_2412




11B_Ant1_2437

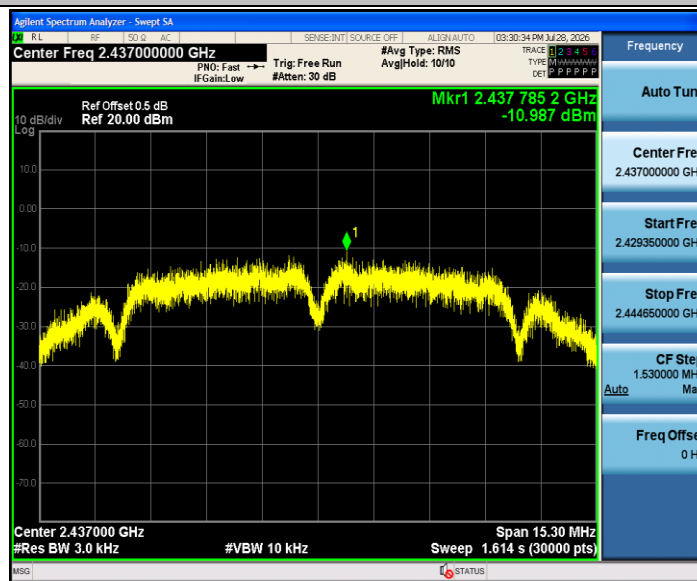


11B_Ant1_2462




11G_Ant1_2412

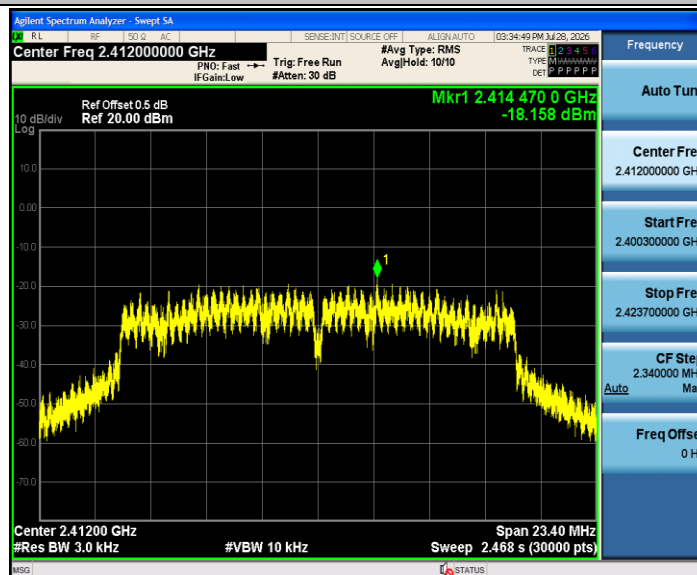


11G_Ant1_2437

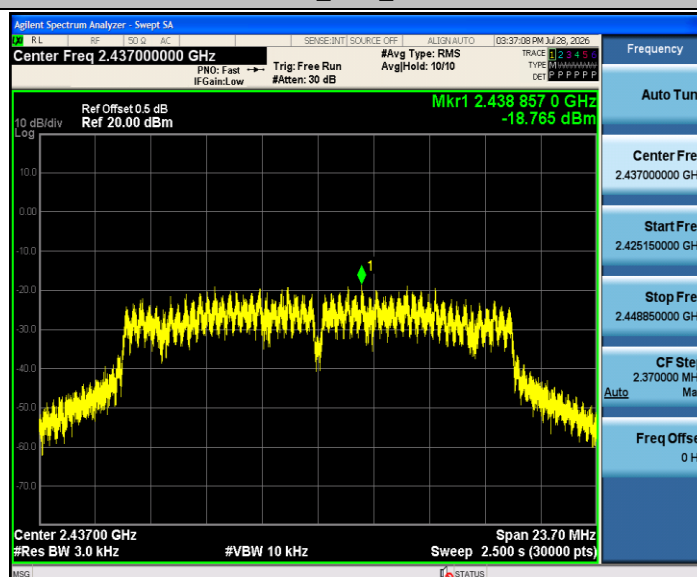


11G_Ant1_2462

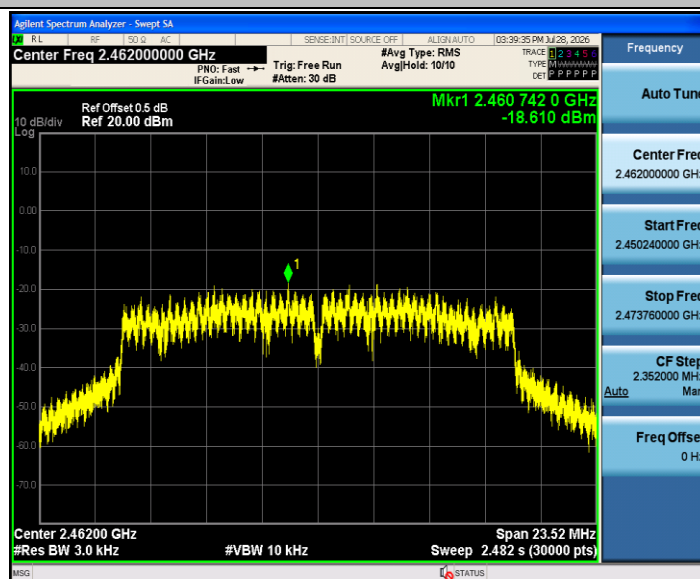


11N20SISO_Ant1_2412

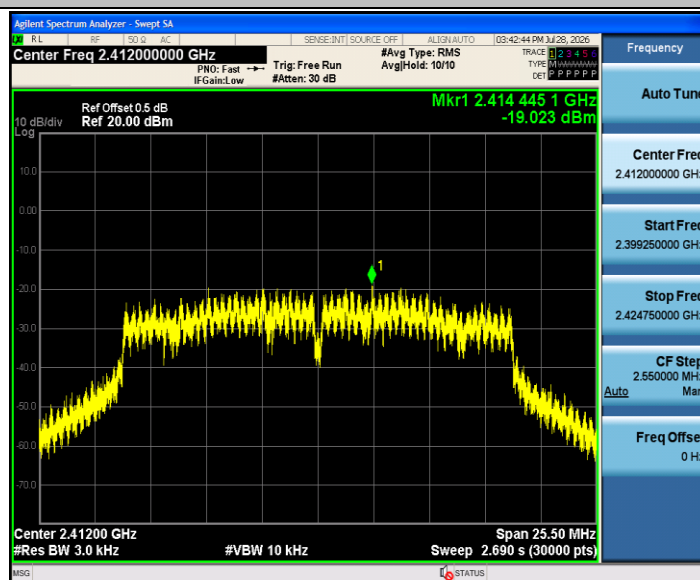


11N20SISO_Ant1_2437

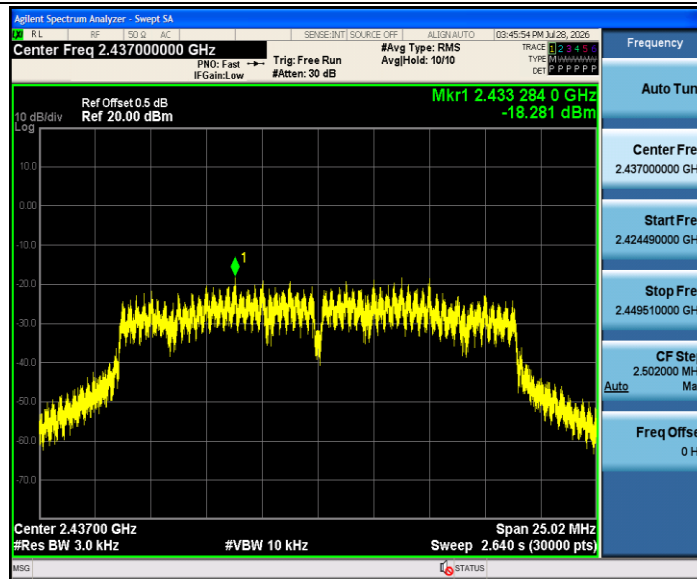


11N20SISO_Ant1_2462

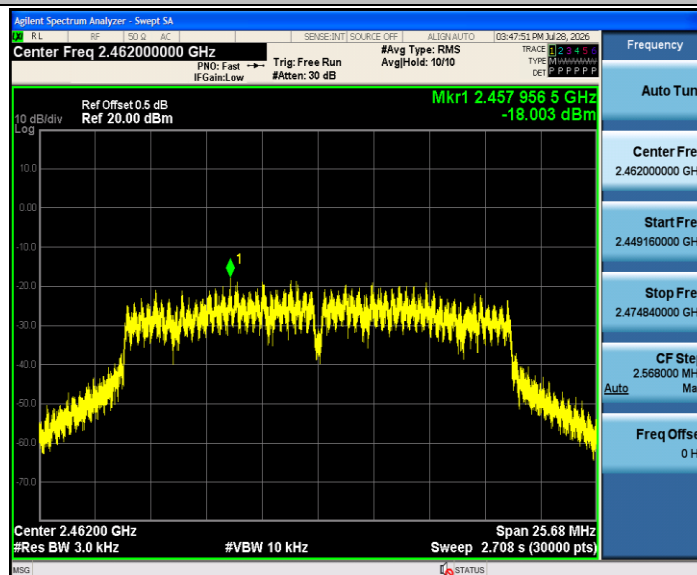


11N40SISO_Ant1_2422

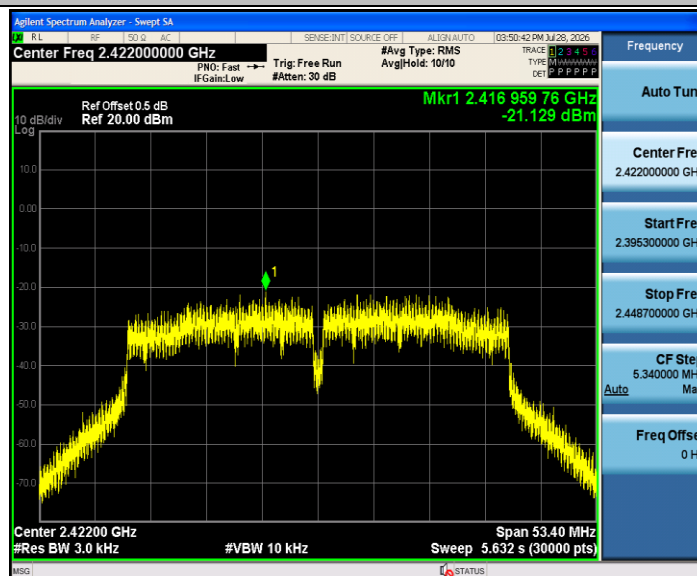

11N40SISO_Ant1_2437

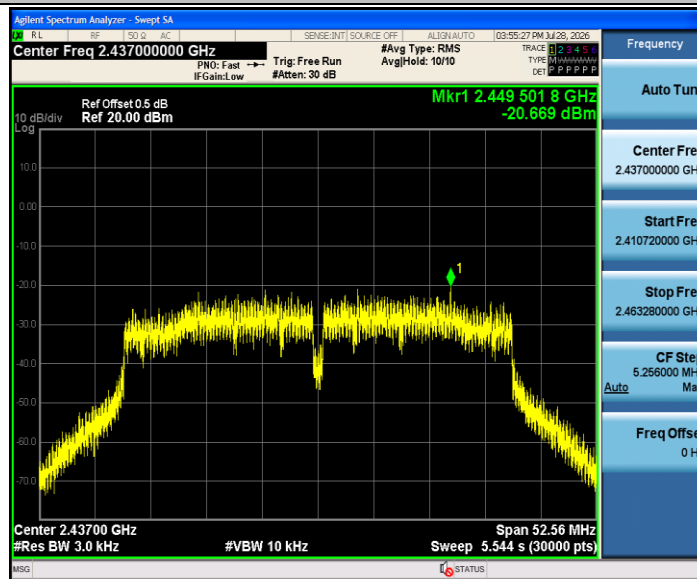

11N40SISO_Ant1_2452

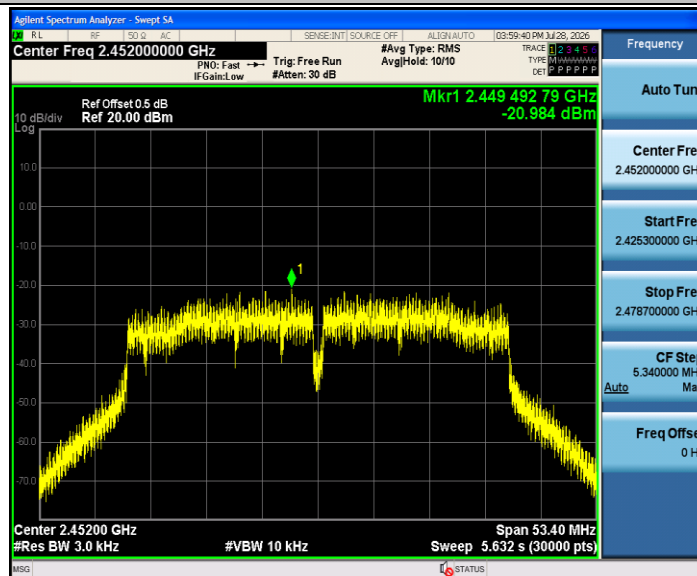


Appendix E: Band edge measurements

Test Result


TestMode	Antenna	Channel Name	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	1.75	-45.38	≤-18.25	PASS
		High	2462	1.95	-53.02	≤-18.05	PASS
11G	Ant1	Low	2412	-3.73	-35.07	≤-23.73	PASS
		High	2462	-3.07	-57.98	≤-23.07	PASS
11N20SISO	Ant1	Low	2412	-3.85	-33.86	≤-23.85	PASS
		High	2462	-3.18	-57.46	≤-23.18	PASS
11N40SISO	Ant1	Low	2422	-6.69	-36.11	≤-26.69	PASS
		High	2452	-6.43	-57.87	≤-26.43	PASS

Test Graphs


11B_Ant1_Low_2412

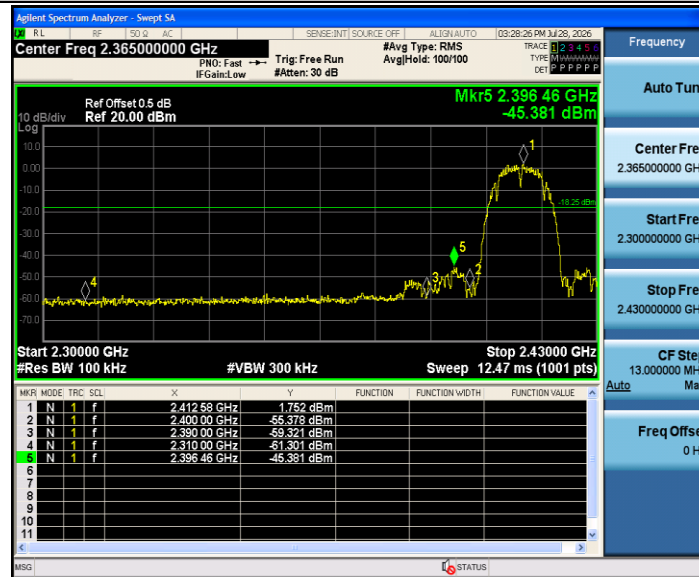


11B_Ant1_High_2462

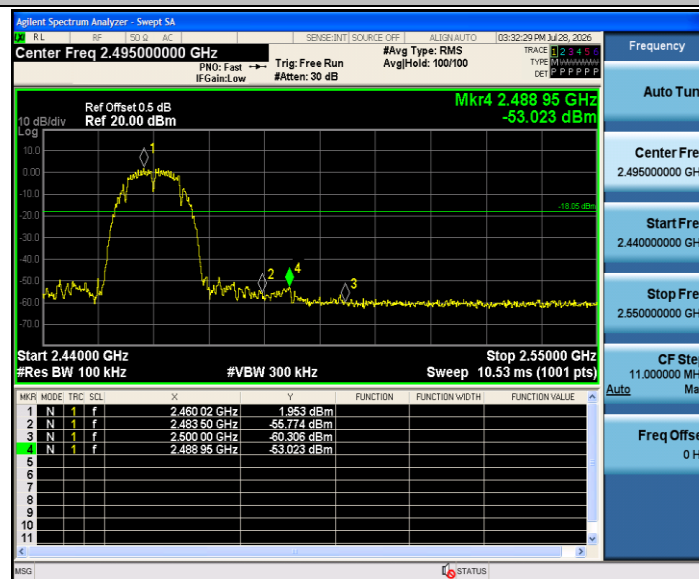


11G_Ant1_Low_2412

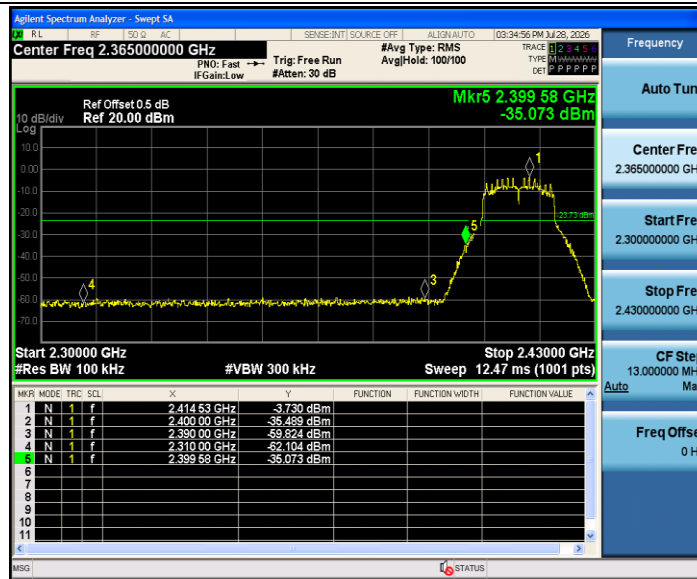


11G_Ant1_High_2462

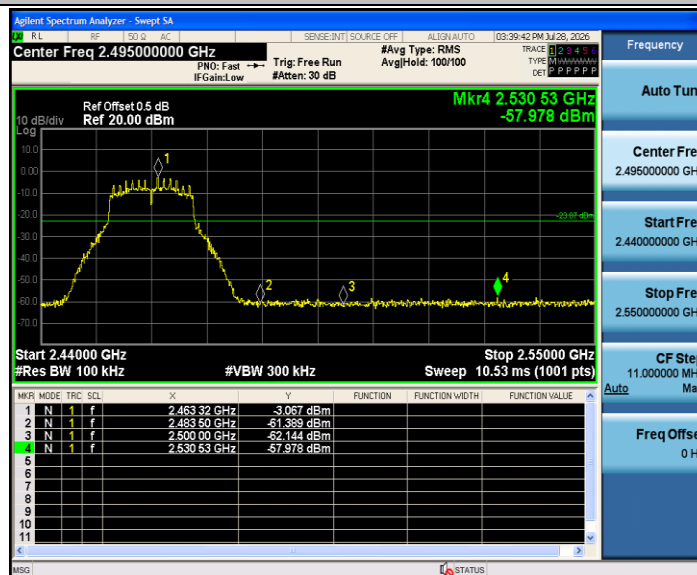


11N20SISO_Ant1_Low_2412

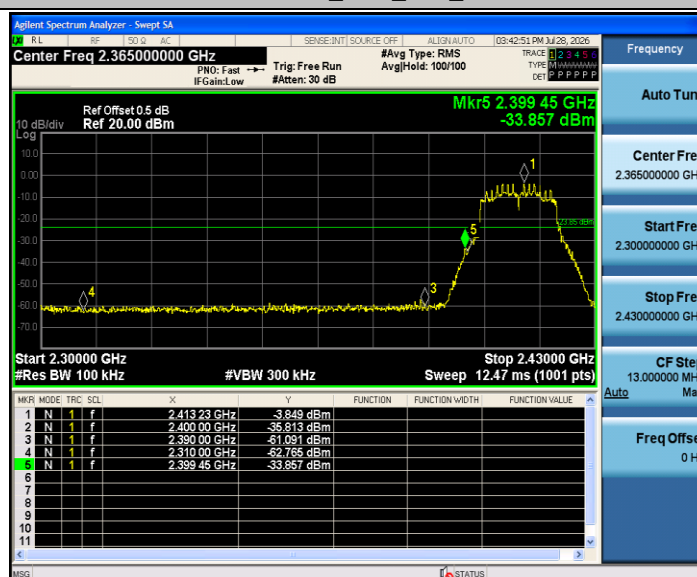


11N20SISO_Ant1_High_2462

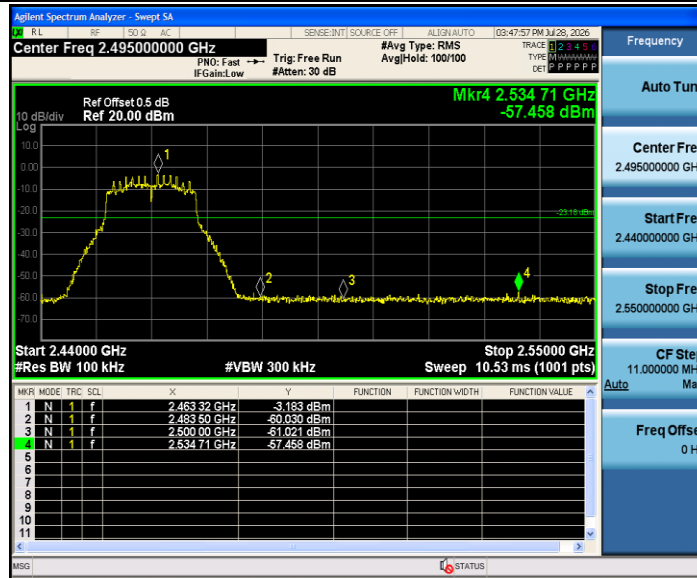

11N40SISO_Ant1_Low_2422

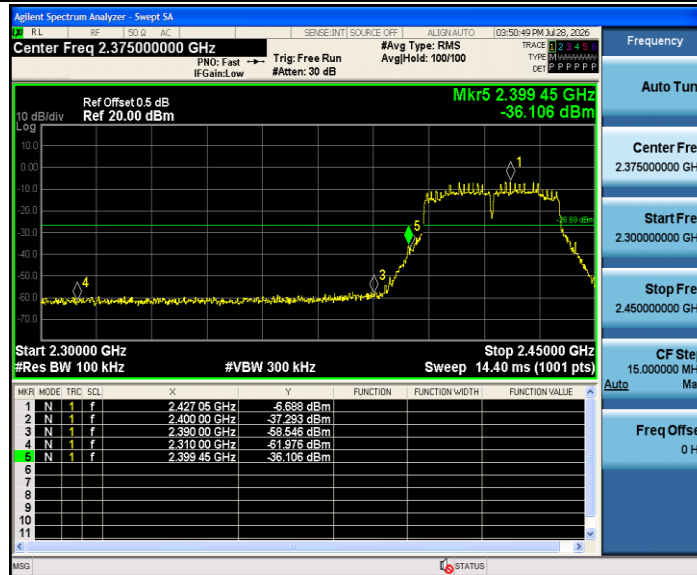

11N40SISO_Ant1_High_2452

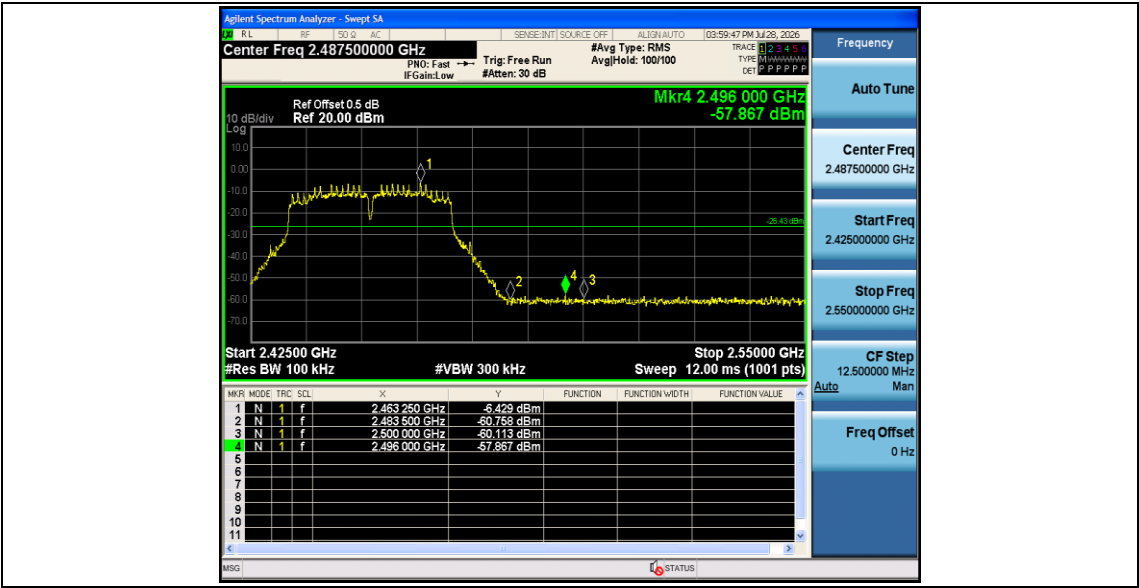

Appendix F: Conducted Spurious Emission

Test Result


TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	1.32	1.32	---	PASS
			30~1000	1.32	-68.13	≤-18.68	PASS
			1000~26500	1.32	-46.34	≤-18.68	PASS
		2437	Reference	1.06	1.06	---	PASS
			30~1000	1.06	-68.6	≤-18.94	PASS
			1000~26500	1.06	-46.45	≤-18.94	PASS
		2462	Reference	1.13	1.13	---	PASS
			30~1000	1.13	-67.66	≤-18.87	PASS
			1000~26500	1.13	-46.45	≤-18.87	PASS
11G	Ant1	2412	Reference	-3.72	-3.72	---	PASS
			30~1000	-3.72	-68.41	≤-23.72	PASS
			1000~26500	-3.72	-46.76	≤-23.72	PASS
		2437	Reference	-3.85	-3.85	---	PASS
			30~1000	-3.85	-68.33	≤-23.85	PASS
			1000~26500	-3.85	-46.54	≤-23.85	PASS
		2462	Reference	-3.44	-3.44	---	PASS
			30~1000	-3.44	-68.48	≤-23.44	PASS
			1000~26500	-3.44	-46.1	≤-23.44	PASS
11N20SISO	Ant1	2412	Reference	-4.08	-4.08	---	PASS
			30~1000	-4.08	-68.66	≤-24.08	PASS
			1000~26500	-4.08	-46.78	≤-24.08	PASS
		2437	Reference	-5.31	-5.31	---	PASS
			30~1000	-5.31	-67.95	≤-25.31	PASS
			1000~26500	-5.31	-47.42	≤-25.31	PASS
		2462	Reference	-3.93	-3.93	---	PASS
			30~1000	-3.93	-68.48	≤-23.93	PASS
			1000~26500	-3.93	-46.93	≤-23.93	PASS
11N40SISO	Ant1	2422	Reference	-6.97	-6.97	---	PASS
			30~1000	-6.97	-67.47	≤-26.97	PASS
			1000~26500	-6.97	-46.93	≤-26.97	PASS
		2437	Reference	-7.03	-7.03	---	PASS
			30~1000	-7.03	-68.16	≤-27.03	PASS
			1000~26500	-7.03	-46.57	≤-27.03	PASS
		2452	Reference	-7.14	-7.14	---	PASS
			30~1000	-7.14	-68.48	≤-27.14	PASS
			1000~26500	-7.14	-46.62	≤-27.14	PASS

Test Graphs


11B_Ant1_2412_0~Reference



11B_Ant1_2412_30~1000

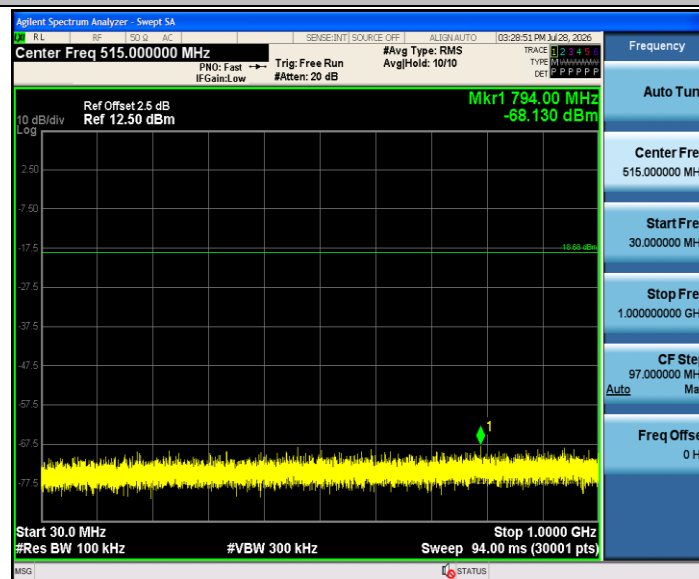


11B_Ant1_2412_1000~26500

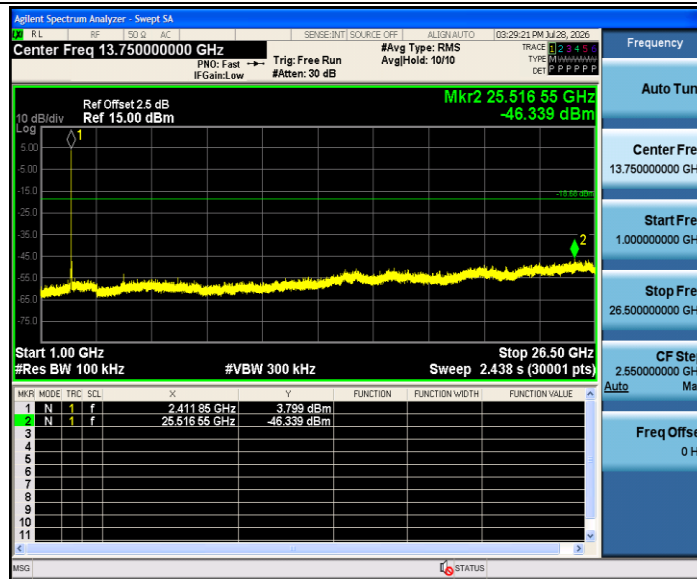


11B_Ant1_2437_0~Reference



11B_Ant1_2437_30~1000

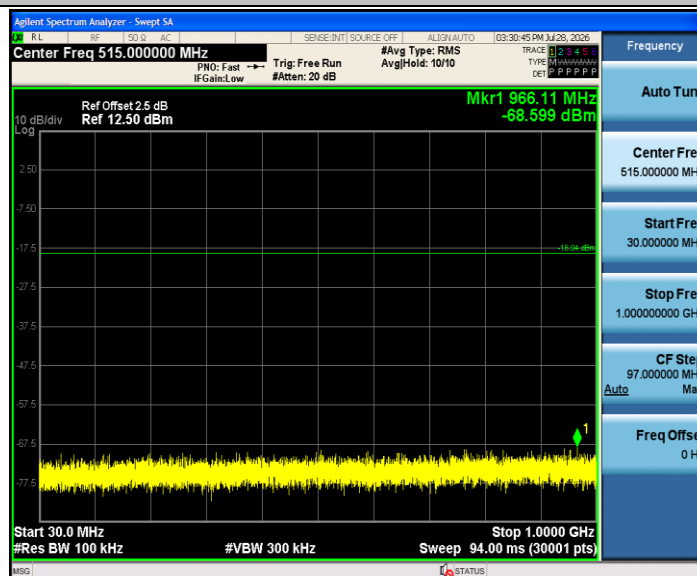


11B_Ant1_2437_1000~26500

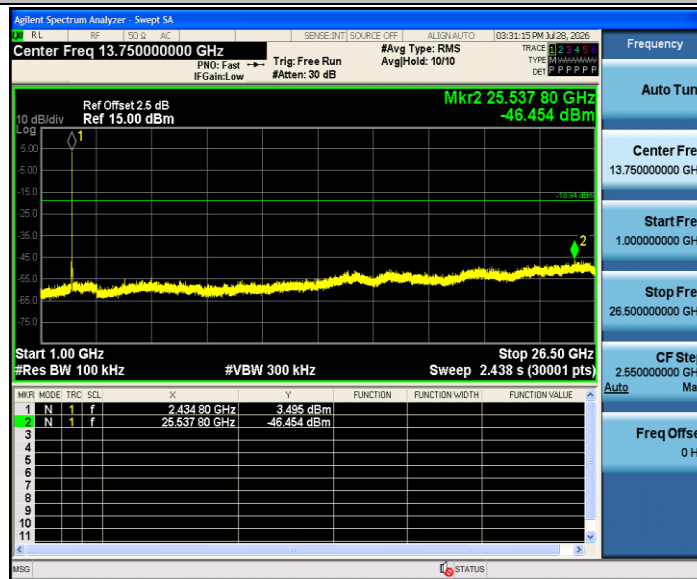

11B_Ant1_2462_0~Reference




11B_Ant1_2462_30~1000

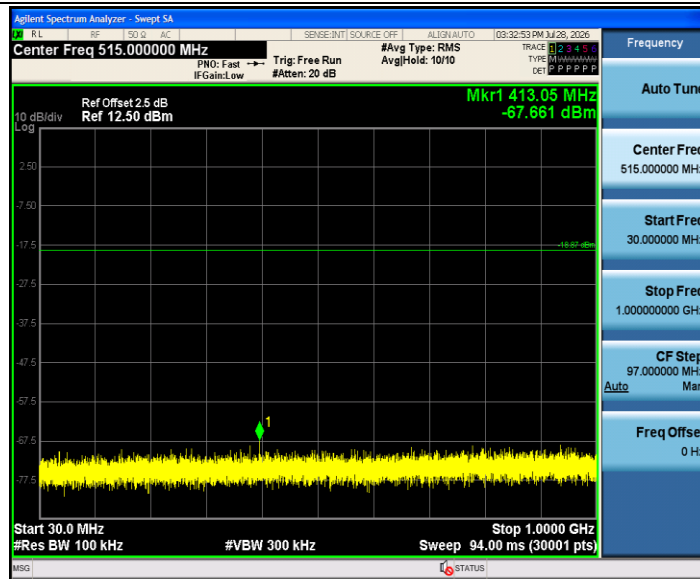


11B_Ant1_2462_1000~26500




11G_Ant1_2412_0~Reference

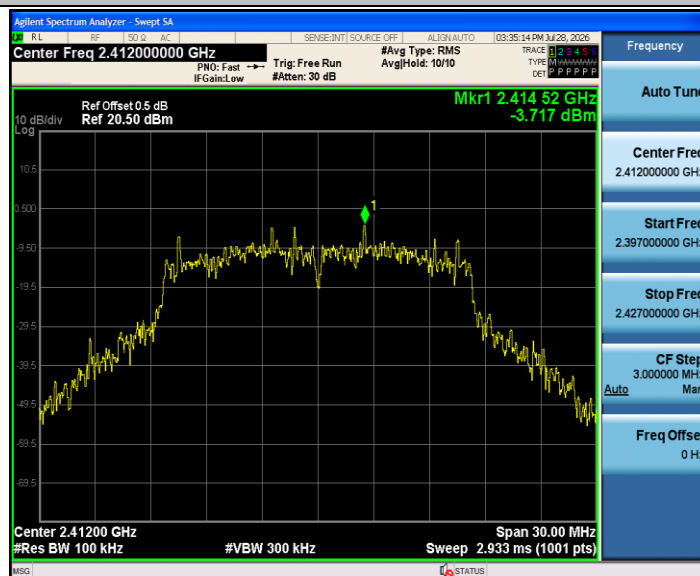

11G_Ant1_2412_30~1000

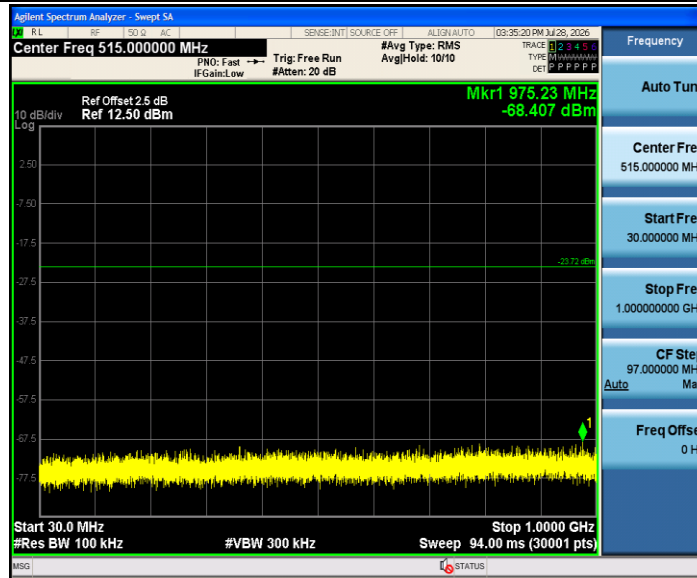


11G_Ant1_2412_1000~26500

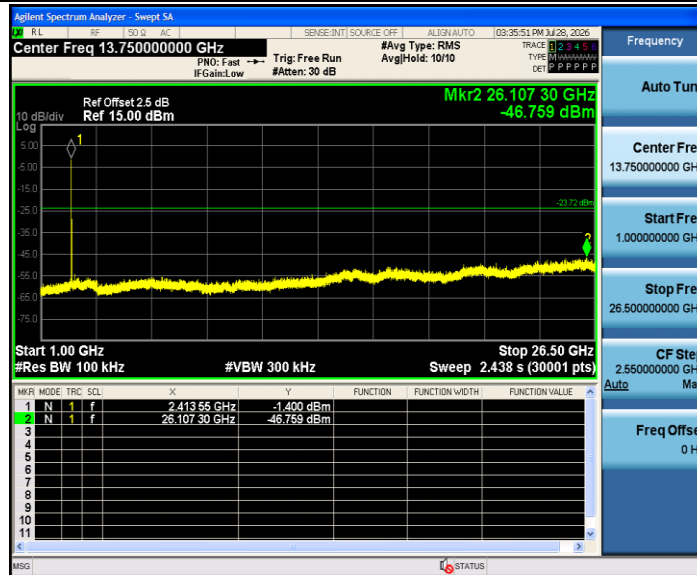


11G_Ant1_2437_0~Reference



11G_Ant1_2437_30~1000

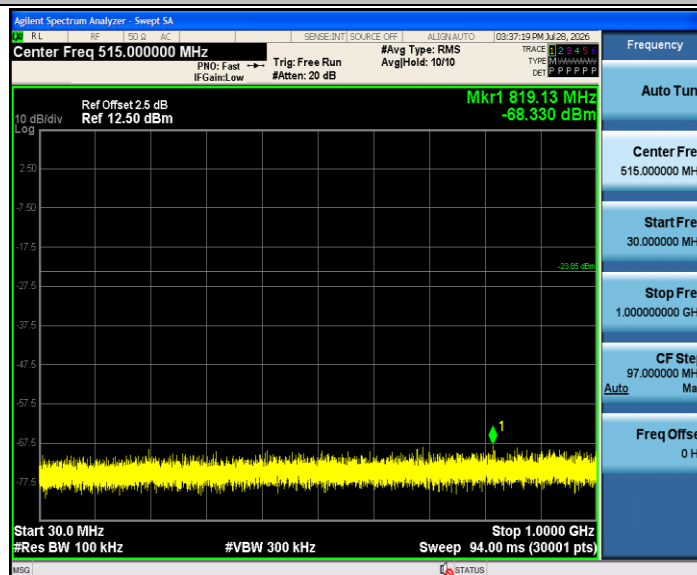


11G_Ant1_2437_1000~26500

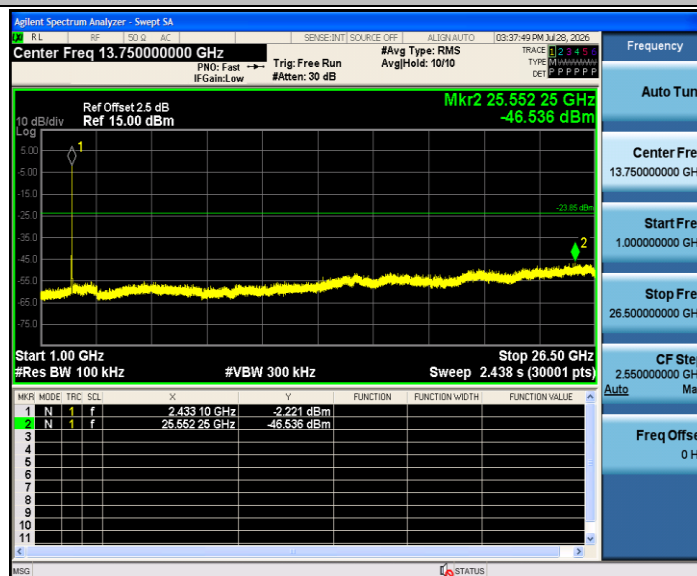


11G_Ant1_2462_0~Reference




11G_Ant1_2462_30~1000

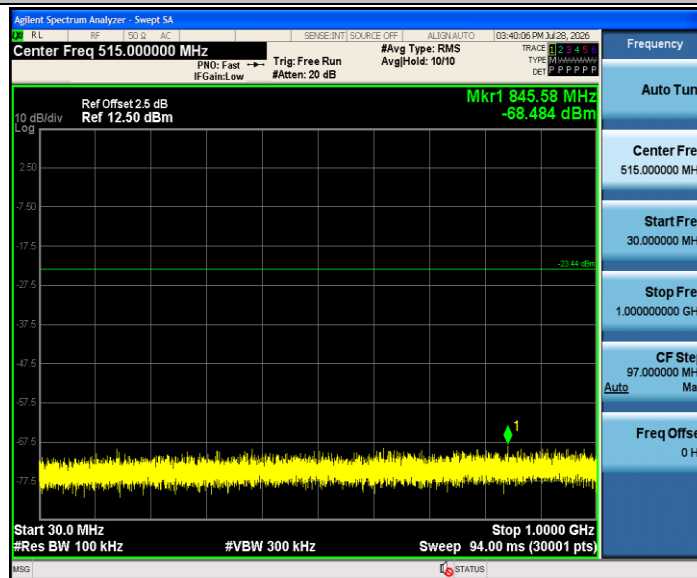

11G_Ant1_2462_1000~26500

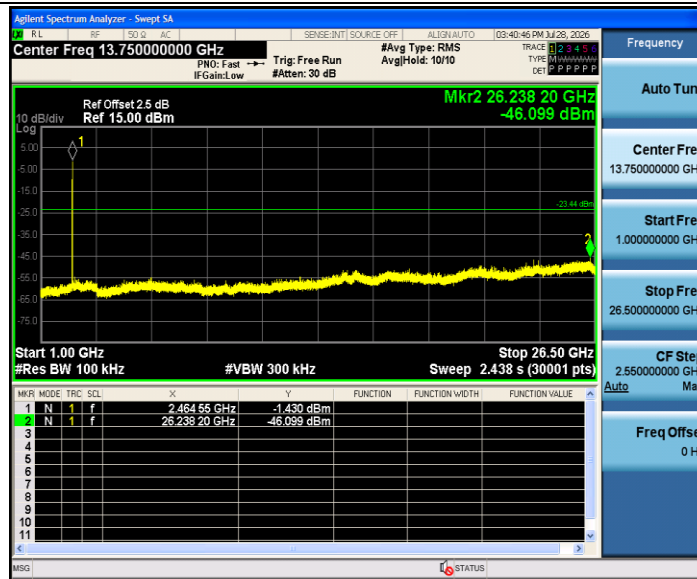

11N20SISO_Ant1_2412_0~Reference

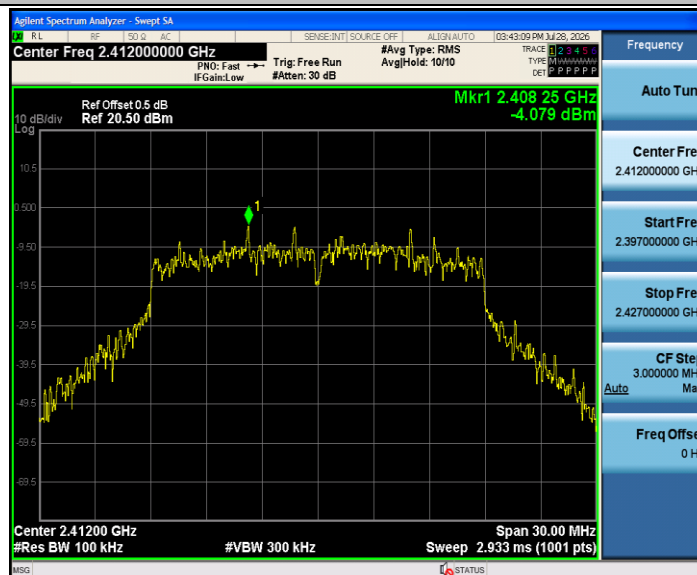

11N20SISO_Ant1_2412_30~1000

