

Bluetooth[®] Handsfree Speakerphone Kits

BC966C User Manual




www.sunitec.net


About Bluetooth Carkit

The Handsfree car kit enables to make and receive phone calls leaving your hands free while driving. Eco reduction system and surrounding noise reduction. Enhanced talking experience. 20/22 talking hours / 1000 hours stand-by (high volume setting reduces the autonomy of the battery)

ILLUSTRATION

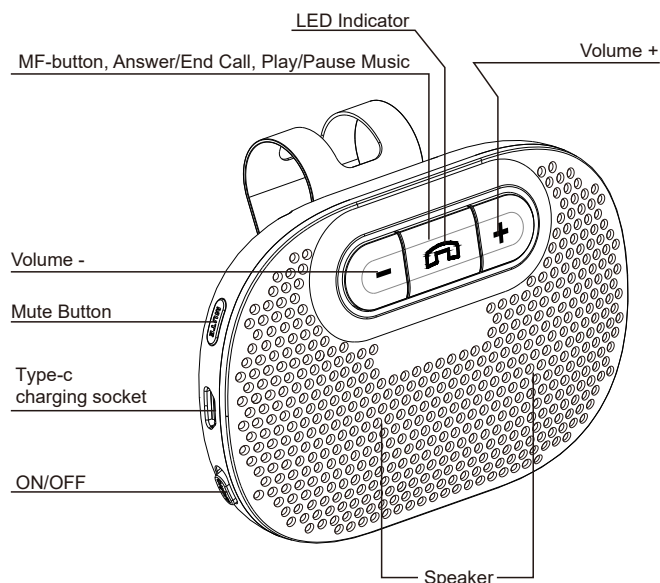

ACCESSORIES

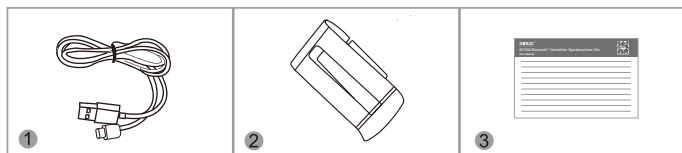

① Type-C charging cable ② Sun visor clip ③ User Manual

POWER ON-OFF

Power on BC966C Handsfree car kit by setting the toggles switch to ON. (the LED will flash Blue)

Power off BC966C Handsfree car kit by setting the toggles switch to OFF (the LED will flash Red)

Automatic shutdown:

- 1) in pairing mode if no device is connected within 2minutes,
- 2) when disconnected from the phone for more than 30 minutes

PAIRING

Keep pressed the multi-function button until the led starts flashing red and blue to activate the scan function. Enter into the Bluetooth setting of your phone, scan the area and selected BC966C to connect (some phones require a password, press "0000" and confirm to complete the pairing process). The speaker will shut down automatically if no device is paired within 2 minutes.

MULTI POINT: the Bluetooth phonespeaker can keep paired up to 2 phones simultaneously. If you want to pair the second phone, switch off the Bluetooth of the first one and repeat the procedure with the second phone. Once the second phone is connected, turn on the Bluetooth of the first one so that the speaker connects automatically with both.

When the Bluetooth kit is turned on it will automatically search and connect to the last 2 mobile phones paired.

VOLUME

To increase volume short press "V+" once

To decrease volume short press and "V-" once.

MUTE

While on phone call press MUTE button to deactivate the microphone. Press again the MUTE button to activate the microphone.

PHONE CALLS ON PRIMARY PHONE

Incoming calls:

-press the function button to answer; keep pressed 2 seconds to reject.

End a call:

during a conversation press once the function button in standby mode press twice the function button to redial the last outgoing number.

PHONE CALLS ON SECONDARY PHONE

If during a phone call with the 1st phone you received a call also on the 2nd phone the device will BEEP.

-press twice the functional button to keep on hold the 1st phone call and answer to the 2nd one, to get back to the 1st phone call press again twice the function button.

-press once the function button to end the current phone call and move to the other one.

LED INDICATOR

RED: continuous LED flashing when low in battery.

LED light on while charging the battery.

LED light on when in MUTE mode.

BLUE: continuous blue LED flashing while in standby or talking mode.

RED/BLUE: Red and blue flashing alternative when in pairing mode.

MICROPHONE

Make sure to keep the microphone at a distance of 30-50cm from your mouth and that there are no obstacles in front of it.

MUSIC

Once your mobile phone is connected to the device, it is possible to stream your music. The music will be muted automatically during a call.

DEFAULT SETTING

Press "+" and "-" simultaneously for 10 seconds until your hear the BEEP.

Your device has now been set to default setting.

TECHNICAL DATA

- Bluetooth: V5.3, up to 10m
- Support profiles: HSP, HFP, A2DP
- Battery: 3.7V/630mAh Lithium polymer rechargeable battery
- Operating temperature: 0°C to +45°C
- Storage temperature: 0°C to +70°C
- Humidity: 5 to 75% (no condensation)

DECLARATION OF CONFORMITY

The company Sunitec Electronics Limited, declares that product BC966C complies with the essential requirement of the 2014/53/EU. The declaration of conformity in complete form is available at the headquarters of Sunitec Electronics Limited.

Product sold in the US and Product sold in the European community manufactured by Sunitec Electronics Limited.

MADE IN CHINA

Sunitec Electronics Limited

5F, A3 Block, XinGuiYuan, DaFu Ind., Zhang-Ge Village, GuanLan, LongHua, ShenZhen, China.

ZIP: 518110 – TEL.: +86-755-23770959/23770969

www.sunitec.net

FCC Caution

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction. The use distance is not more than 5mm.