

FCC TEST REPORT

FCC ID: 2AWYK-XP-420B

Product : Label Printer, Thermal Printer, Thermal Barcode Printer,
Thermal Label Printer, Thermal Transfer Barcode Printer,
Mobile Printer

Model Name : XP-420B (Please refer to page 8-13)

Brand : **Xprinter** 芯烨

Report No. : NCT2504924XE-2

Prepared for

Zuhai Xprinter Electronics Technology Co., Ltd.

5/F, 1st Workshop, No.613 Huawei Road, Qianshan Industrial Zone, Xiangzhou District,
Zhuhai City, Guangdong Province, P.R.China

Prepared by

Shenzhen NCT Testing Technology Co., Ltd.

A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District,
Shenzhen, People's Republic of China

TEL: 400-8868-419

FAX: 86-755-27790922

1 TEST RESULT CERTIFICATION

Applicant's name : Zhuhai Xprinter Electronics Technology Co., Ltd.

Address : 5/F, 1st Workshop, No.613 Huawei Road, Qianshan Industrial Zone,
Xiangzhou District, Zhuhai City, Guangdong Province, P.R.China

Manufacture's name : Zhuhai Xprinter Electronics Technology Co., Ltd.

Address : 5/F, 1st Workshop, No.613 Huawei Road, Qianshan Industrial Zone,
Xiangzhou District, Zhuhai City, Guangdong Province, P.R.China

Product name : Label Printer, Thermal Printer, Thermal Barcode Printer, Thermal
Label Printer, Thermal Transfer Barcode Printer, Mobile Printer

Model name : XP-420B (Please refer to page 8-13)

Standards : FCC CFR47 Part 15 Section 15.247

Test procedure : ANSI C63.10-2020

Test Date : Nov. 03, 2024 to Nov. 14, 2024

Date of Issue : Dec. 04, 2024

This device described above has been tested by NCT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NCT, this document may be altered or revised by NCT, personal only, and shall be noted in the revision of the document.

Test Engineer:

Keven Wu / Engineer

Technical Manager:

Henry Wang / Manager



Contents

Page

1 TEST RESULT CERTIFICATION	2
2 TEST SUMMARY	5
2.1 TEST SITE	6
3 GENERAL INFORMATION	7
3.1 GENERAL DESCRIPTION OF E.U.T.	7
3.2 CHANNEL LIST	14
3.3 TEST SETUP CONFIGURATION	14
3.4 TEST MODE	15
4 EQUIPMENT DURING TEST	16
4.1 EQUIPMENTS LIST	16
4.2 MEASUREMENT UNCERTAINTY	18
4.3 DESCRIPTION OF SUPPORT UNITS	18
5 CONDUCTED EMISSION	19
5.1 E.U.T. OPERATION	19
5.2 EUT SETUP	19
5.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	20
5.4 MEASUREMENT PROCEDURE	20
5.5 CONDUCTED EMISSION LIMIT	20
5.6 MEASUREMENT DESCRIPTION	20
5.7 CONDUCTED EMISSION TEST RESULT	20
6 RADIATED SPURIOUS EMISSIONS	20
6.1 EUT OPERATION	23
6.2 TEST SETUP	24
6.3 SPECTRUM ANALYZER SETUP	25
6.4 TEST PROCEDURE	26
6.5 SUMMARY OF TEST RESULTS	27
7 CONDUCT BAND EDGE AND SPURIOUS EMISSIONS MEASUREMENT	33
7.1 TEST PROCEDURE	33
7.2 TEST RESULT	34
8 6DB BANDWIDTH MEASUREMENT	39
8.1 TEST PROCEDURE	39

8.2 TEST RESULT	39
9 MAXIMUM PEAK OUTPUT POWER.....	42
9.1 TEST PROCEDURE.....	42
9.2 TEST RESULT	42
10 POWER SPECTRAL DENSITY	45
10.1 TEST PROCEDURE.....	45
10.2 TEST RESULT	45
11 ANTENNA APPLICATION	48
11.1 ANTENNA REQUIREMENT.....	48
11.2 RESULT	48
12 TEST SETUP PHOTOS AND EUT PHOTOS.....	49

2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	FCC part 15.207	PASS
Radiated Spurious Emissions	FCC part 15.205/15.209	PASS
Conducted Spurious Emission	FCC part 15. 247(d)	PASS
Band edge	FCC part 15.247(d)	PASS
6dB&99% Bandwidth	FCC part 15.247 (a)(2)	PASS
Maximum Peak Output Power	FCC part 15.247 (b)(3)	PASS
Power Spectral Density	FCC part 15.247 (e)	PASS
Antenna Requirement	FCC part 15.203/15.247 (c)	PASS

Remark:

1. "N/A" denotes test is not applicable in this Test Report.

2.1 Test Site

Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27

The certificate is valid until 2028.01.07

The Laboratory has been assessed and proved to be in compliance with
CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)

The Certificate Registration Number is L8251

Designation Number: CN1347

Test Firm Registration Number: 894804

Accredited by A2LA, June 14, 2023

The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018

The Conformity Assessment Body Identifier is CN0150

Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.

Site Location : A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan
District, Shenzhen, People's Republic of China

3 General Information

3.1 General Description of E.U.T.

Product Name	:	Label Printer, Thermal Printer, Thermal Barcode Printer, Thermal Label Printer, Thermal Transfer Barcode Printer, Mobile Printer
Model Name	:	XP-420B
series model	:	(Please refer to pages 8-13 for details)
Difference	:	All models are identical to each other except for product name and model name. All tests were performed on model XP-420B.
Sample ID	:	2504924-001#
Sample(s) Status	:	Engineer sample
Operating frequency	:	2402-2480MHz
Numbers of Channel	:	40 channels
Antenna Type	:	PCB antenna
Antenna Gain	:	-5.35 dBi
Type of Modulation	:	GFSK(1M)
Power supply	:	Input: 24V $\rightleftharpoons$ 2.5A
AC/DC ADAPTER Information	:	Model: YC60-2402500 Input: 100-240V~ 50/60Hz 1.5A Output: 24.0V $\rightleftharpoons$ 2.5A 60.0W Manufacturer: Zhongshan City Youchuang Electronics Technomology Co.,Ltd
Remark: The Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.		

Model list:

XP-T424B, XP-T425B, XP-T426B, XP-T427B, XP-T428B, XP-T429B, XP-T4210B, XP-T4211B, XP-T4212B, XP-T4213B, XP-T4214B, XP-T4215B, XP-T4216B, XP-T324B, XP-T325B, XP-T326B, XP-T327B, XP-T328B, XP-T329B, XP-T3210B, XP-T424B PRO, XP-T425B PRO, XP-T426B PRO, XP-T427B PRO, XP-T428B PRO, XP-T429B PRO, XP-T4210B PRO, XP-T4211B PRO, XP-T4212B PRO, XP-T4213B PRO, XP-T4214B PRO, XP-T4215B PRO, XP-T4216B PRO, XP-T324B PRO, XP-T325B PRO, XP-T326B PRO, XP-T327B PRO, XP-T328B PRO, XP-T329B PRO, XP-T3210B PRO, XP-T424B PLUS, XP-T425B PLUS, XP-T426B PLUS, XP-T427B PLUS, XP-T428B PLUS, XP-T429B PLUS, XP-T4210B PLUS, XP-T4211B PLUS, XP-T4212B PLUS, XP-T4213B PLUS, XP-T4214B PLUS, XP-T4215B PLUS, XP-T4216B PLUS, XP-T324B PLUS, XP-T325B PLUS, XP-T326B PLUS, XP-T327B PLUS, XP-T328B PLUS, XP-T329B PLUS, XP-T3210B PLUS, XP-T434B, XP-T435B, XP-T436B, XP-T437B, XP-T438B, XP-T439B, XP-T4310B, XP-T4311B, XP-T4312B, XP-T4313B, XP-T4314B, XP-T4315B, XP-T4316B, XP-T334B, XP-T335B, XP-T336B, XP-T337B, XP-T338B, XP-T339B, XP-T3310B, XP-T434B PRO, XP-T435B PRO, XP-T436B PRO, XP-T437B PRO, XP-T438B PRO, XP-T439B PRO, XP-T4310B PRO, XP-T4311B PRO, XP-T4312B PRO, XP-T4313B PRO, XP-T4314B PRO, XP-T4315B PRO, XP-T4316B PRO, XP-T334B PRO, XP-T335B PRO, XP-T336B PRO, XP-T337B PRO, XP-T338B PRO, XP-T339B PRO, XP-T3310B PRO, XP-T434B PLUS, XP-T435B PLUS, XP-T436B PLUS, XP-T437B PLUS, XP-T438B PLUS, XP-T439B PLUS, XP-T4310B PLUS, XP-T4311B PLUS, XP-T4312B PLUS, XP-T4313B PLUS, XP-T4314B PLUS, XP-T4315B PLUS, XP-T4316B PLUS, XP-T334B PLUS, XP-T335B PLUS, XP-T336B PLUS, XP-T337B PLUS, XP-T338B PLUS, XP-T339B PLUS, XP-T3310B PLUS, XP-T433B, XP-H400B, XP-H400E, XP-H500A, XP-H500B, XP-H500BC, XP-H500E, XP-H500EC, XP-TT424B, XP-T4601B, XP-T4501B, XP-TT428B, XP-420B, XP-TT325B, XP-TT435B, XP-TT425B, XP-H400A, XP-TT437B, XP-TT436B, XP-TT434B, XP-TT335B, XP-T4601B, 4B-2054TD, 4B-2054TE, 4B-2054TF, 4B-2054TG, 4B-2054TH, 4B-2054TI, 4B-2054TJ, 4B-2054TK, 4B-3044TD, 4B-3054TE, 4B-3054TF, 4B-3054TG, 4B-3054TH, 4B-3054TI, 4B-3054TJ, 4B-3054TK, 4B-3044TF, 4B-3044TG, 4B-3044TH, 4B-3044TI, 4B-3044TJ, 4B-3044TK, 4B-2044TA, 4B-2054TA, 4B-2064TA, 4B-2074TA, 4B-2084TA, 4B-2094TA, 4B-2104TA, 4B-2114TA, 4B-2124TA, 4B-2134TA, 4B-2144TA, 4B-2154TA, 4B-2164TA, 4B-2033TA, 4B-2043TA, 4B-2053TA, 4B-2063TA, 4B-2073TA, 4B-2083TA, 4B-2093TA, 4B-2103TA, 4B-2044TB, 4B-2054TB, 4B-2064TB, 4B-2074TB, 4B-2084TB, 4B-2094TB, 4B-2104TB, 4B-2114TB, 4B-2124TB, 4B-2134TB, 4B-2144TB, 4B-2154TB, 4B-2164TB, 4B-2033TB, 4B-2043TB, 4B-2053TB, 4B-2063TB, 4B-2073TB, 4B-2083TB, 4B-2093TB, 4B-2103TB, 4B-2044TC, 4B-2054TC, 4B-2064TC, 4B-2074TC, 4B-2084TC, 4B-2094TC, 4B-2104TC, 4B-2114TC, 4B-2124TC, 4B-2134TC, 4B-2144TC, 4B-2154TC, 4B-2164TC, 4B-2033TC, 4B-2043TC, 4B-2053TC, 4B-2063TC, 4B-2073TC, 4B-2083TC, 4B-2093TC, 4B-2103TC, 4B-2082TA, 4B-2072TA, 4B-2092TA, 4B-2082TB, 4B-2072TB, 4B-2092TB, 4B-2082TC, 4B-2072TC, 4B-2092TC, 4B-3034TA, 4B-3044TA, 4B-3054TA, 4B-3064TA, 4B-3074TA, 4B-3084TA, 4B-3094TA, 4B-3104TA, 4B-3114TA, 4B-3124TA, 4B-3134TA, 4B-3144TA, 4B-3154TA, 4B-3164TA, 4B-3033TA, 4B-3043TA, 4B-3053TA, 4B-3063TA, 4B-3073TA, 4B-3083TA, 4B-3093TA, 4B-3103TA, 4B-3034TB, 4B-3044TB, 4B-3054TB, 4B-3064TB, 4B-3074TB, 4B-3084TB, 4B-3094TB, 4B-3104TB, 4B-3114TB, 4B-3124TB, 4B-3134TB, 4B-3144TB, 4B-3154TB, 4B-3164TB, 4B-3033TB, 4B-3043TB, 4B-3053TB, 4B-3063TB, 4B-3073TB, 4B-3083TB, 4B-3093TB, 4B-3103TB, 4B-3034TC, 4B-3044TC, 4B-3054TC, 4B-3064TC, 4B-3074TC, 4B-3084TC, 4B-3094TC, 4B-3104TC, 4B-3114TC, 4B-3124TB, 4B-3134TC, 4B-3144TC, 4B-3154TC, 4B-3164TC, 4B-3033TC, 4B-3043TC, 4B-3053TB, 4B-3063TC, 4B-3073TC, 4B-3083TC, 4B-3093TC, 4B-3103TC, DL-TB424, DL-TB425, DL-TB426, DL-TB427, DL-TB428, DL-TB429, DL-TB4210, DL-TB4211, DL-TB4212, DL-

TB4213, DL-TB4214, DL-TB4215, DL-TB4216, DL-TB324, DL-TB325, DL-TB326, DL-TB327, DL-TB328, DL-TB329, DL-TB3210, DL-TB434, DL-TB435, DL-TB436, DL-TB437, DL-TB438, DL-TB439, DL-TB4310, DL-TB4311, DL-TB4312, DL-TB4313, DL-TB4314, DL-TB4315, DL-TB4316, DL-TB334, DL-TB335, DL-TB336, DL-TB337, DL-TB338, DL-TB339, DL-TB3310, XP-T451B, XP-T452B, XP-T453B, XP-T454B, XP-T455B, XP-T456B, XP-T457B, XP-T458B, XP-T459B, XP-T461B, XP-T462B, XP-T463B, XP-T464B, XP-T465B, XP-T466B, XP-T467B, XP-T468B, XP-T469B, XP-T451E, XP-T452E, XP-T453E, XP-T454E, XP-T455E, XP-T456E, XP-T457E, XP-T458E, XP-T459E, XP-T461E, XP-T462E, XP-T463E, XP-T464E, XP-T465E, XP-T466E, XP-T467E, XP-T468E, XP-T469E, XP-T251B, XP-T252B, XP-T253B, XP-T254B, XP-T255B, XP-T251E, XP-T252E, XP-T253E, XP-T254E, XP-T255E, XP-T261B, XP-T262B, XP-T263B, XP-T264B, XP-T265B, XP-T261E, XP-T262E, XP-T263E, XP-T264E, XP-T265E, XP-T281B, XP-T282B, XP-T283B, XP-T284B, XP-T285B, XP-T281E, XP-T282E, XP-T283E, XP-T284E, XP-T285E, XP-D251B, XP-D252B, XP-D253B, XP-D254B, XP-D255B, XP-D251E, XP-D252E, XP-D253E, XP-D254E, XP-D255E, XP-D261B, XP-D262B, XP-D263B, XP-D264B, XP-D265B, XP-D261E, XP-D262E, XP-D263E, XP-D264E, XP-D265E, XP-D281B, XP-D282B, XP-D283B, XP-D284B, XP-D285B, XP-D281E, XP-D282E, XP-D283E, XP-D284E, XP-D285E, XP-425E, XP-426E, XP-427E, XP-428E, XP-429E, XP-D28E, XP-D281E, XP-D282E, XP-D283E, XP-D284E, XP-D285E, Z1, T001, Z1Plus, T001Plus, 410B, 420B, D463B, D465B, DB401, DB402, DB403, DB404, DB405, DB406, DB407, DB408, DB409, DB410, DB411, DB412, DB413, DB414, DB415, DB416, DB417, DB418, DB419, DB420, DB421, DB422, DB423, DB424, DB425, DB426, DB427, DB428, DB429, DB430, DB301, DB302, DB303, DB304, DB305, DB306, DB307, DB308, DB309, DB310, DB201, DB202, DB203, DB204, DB205, DB206, DB207, DB208, DB209, DB210, PB201, PB202, PB203, PB204, PB205, PB301, PB302, PB303, PB304, PB305, PB401, PB402, PB403, PB404, PB405, XP-425E, XP-426E, XP-427E, XP-428E, XP-429E, XP-D28E, XP-H500BE, XP-H500ER, XP-T451BR, XP-T451ER, XP-T454BR, XP-T454ER, 4B-2054TAR, 4B-3044TAR, 4B-2054TGR, 4B-3044TGR, 4B-2054TIR, 4B-3044TIR, XP-D281E, 4B-2033A, 4B-2034A, XHT400, XHT4100, XHT1450, XHT1480, XHT2460, XHT2480, XHT420, XHT4255, XHT4266, XHT4288, XHT4200C, XHT4260C, XHT4280C, XHT430, XHT4310, XHT4360, XHT4380, XHT4300C, XHT435C, XHT4399C, XHT426, XHT428, LPK240, LPK-240, LPK240C, LPK-240C, 4B-2052TA, 4B-2052TB, 4B-2052TC, 4B-2052TD, 4B-2052TE, 4B-2052TF, 4B-2062TA, 4B-2062TB, 4B-2062TC, 4B-2062TD, 4B-2062TE, 4B-2062TF, 4B-2082TA, 4B-2082TB, 4B-2082TC, 4B-2082TD, 4B-2082TE, 4B-2082TF, 4B-3052TA, 4B-3052TB, 4B-3052TC, 4B-3052TD, 4B-3052TE, 4B-3052TF, 4B-3062TA, 4B-3062TB, 4B-3062TC, 4B-3062TD, 4B-3062TE, 4B-3062TF, 4B-3082TA, 4B-3082TB, 4B-3082TC, 4B-3082TD, 4B-3082TE, 4B-3082TF, 4B-2052A, 4B-2052B, 4B-2052C, 4B-2052D, 4B-2052E, 4B-2052F, 4B-2062A, 4B-2062B, 4B-2062C, 4B-2062D, 4B-2062E, 4B-2062F, 4B-2082A, 4B-2082B, 4B-2082C, 4B-2082D, 4B-2082E, 4B-2082F, 4B-3052A, 4B-3052B, 4B-3052C, 4B-3052D, 4B-3052E, 4B-3052F, 4B-3062A, 4B-3062B, 4B-3062C, 4B-3062D, 4B-3062E, 4B-3062F, 4B-3082A, 4B-3082B, 4B-3082C, 4B-3082D, 4B-3082E, 4B-3082F, 4B-2044PA, 4B-2044PB, 4B-2044PC, 4B-2044PD, 4B-2044PE, 4B-2054PB, 4B-2054PC, 4B-2054PD, 4B-2054PE, 4B-2033PD, 4B-2033PE, 4B-2043PD, 4B-2043PE, 4B-2053PD, 4B-2053PE, 4B-2032PA, 4B-2032PB, 4B-2032PC, 4B-2032PD, 4B-2032PE, 4B-2042PD, 4B-2042PE, 4B-2052PD, 4B-2052PE, 4B-2062PD, 4B-2062PE, GS400ZS, GS406ZS, GS410ZS, GS416ZS, GS420ZS, GS426ZS, GS430ZS, GS436ZS, GS440ZS, GS446ZS, GS450ZS, GS456ZS, XP-T7, XP-T7K, XP-T6, XP-T6K, XP-T8, XP-T9, XP-T8S, XP-T11, XP-T11K, XP-T8A, XP-T8B, XP-T8BK, XP-T8K, XP-T2L, XP-T2KL, XP-T2K, XP-T2, XP-T1, XP-T1K, XP-T3, XP-T4, XP-T4K, XP-T4KS, XP-T10, XP-T10K, XP-T3K, XP-T5, XP-T5K, XP-T12, XP-T12K, XP-T13, XP-T13K, XP-T14, XP-T14K, XP-T15, XP-T15K, XP-T16, XP-T16K, XP-T17, XP-T17K, XP-T18, XP-T18K, XP-T19, XP-T19K, XP-T20, XP-T20K, XP-T21, XP-T21K, XP-T22, XP-T22K, XP-T4201, XP-T4202, XP-T4203, XP-T4204, XP-T4205, XP-T4206, XP-T4207, XP-T4208, XP-T4209, XP-T4301, XP-T4302, XP-T4303, XP-T4304, XP-T4305, XP-T4306, XP-

T4307, XP-T4308, XP-T4309, XP-T4211, XP-T4212, XP-T4213, XP-T4214, XP-T4215, XP-T4216, XP-T4217, XP-T4218, XP-T4219, XP-T4311, XP-T4312, XP-T4313, XP-T4314, XP-T4315, XP-T4316, XP-T4317, XP-T4318, XP-T4319, XP-T4221, XP-T4222, XP-T4223, XP-T4224, XP-T4225, XP-T4226, XP-T4227, XP-T4228, XP-T4229, XP-T4321, XP-T4322, XP-T4323, XP-T4324, XP-T4325, XP-T4326, XP-T4327, XP-T4328, XP-T4329, XP-H500BR, XP-H500ER, XP-T454BR, XP-T454ER, XP-T451BR, XP-T451ER, XP-T452BR, XP-T452ER, XP-T453BR, XP-T453ER, 4B-2054TGR, 4B-3044TGR, 4B-2054TAR, 4B-3044TAR, 4B-2054TGR, 4B-3044TGR, 4B-2054TIR, 4B-3044TIR, XP-TT424B PRO, XP-TT429B, XP-TT439B, XP-H400BC, XP-H400EC, XP-420A, XP-421A, XP-422A, XP-423A, XP-424A, XP-425A, XP-426A, XP-427A, XP-428A, XP-429A, XP-D888B, XP-D666B, XP-D777B, XP-D111B, XP-D222B, XP-D333B, XP-D444B, XP-D555B, XP-D999B, XP-D888E, XP-D666E, XP-D777E, XP-D111E, XP-D222E, XP-D333E, XP-D444E, XP-D555E, XP-D999E, XP-D25B, XP-D251B, XP-D252B, XP-D253B, XP-D254B, XP-D255B, XP-D24E, XP-D241E, XP-D242E, XP-D243E, XP-D244E, XP-D245E, XP-D26B, XP-D261B, XP-D262B, XP-D263B, XP-D264B, XP-D265B, XP-D266B, XP-D267B, XP-D25E, XP-D251E, XP-D252E, XP-D253E, XP-D254E, XP-D28B, XP-D281B, XP-D282B, XP-D283B, XP-D284B, XP-D285B, XP-D35B, XP-D351B, XP-D352B, XP-D353B, XP-D354B, XP-D355B, XP-D356B, XP-D357B, XP-D358B, XP-D359B, XP-D34E, XP-D341E, XP-D342E, XP-D343E, XP-D344E, XP-D345E, XP-D346E, XP-D347E, XP-D348E, XP-D349E, XP-D32F, XP-D321F, XP-D322F, XP-D36B, XP-D361B, XP-D362B, XP-D363B, XP-D364B, XP-D365B, XP-D366B, XP-D367B, XP-D368B, XP-D369B, XP-D35E, XP-D351E, XP-D352E, XP-D353E, XP-D354E, XP-D355E, XP-D356E, XP-D357E, XP-D358E, XP-D359E, XP-D46B, XP-D461B, XP-D462B, XP-D463B, XP-D464B, XP-D465B, XP-D466B, XP-D467B, XP-D468B, XP-D469B, XP-D451E, XP-D452E, XP-D453E, XP-D454E, XP-D455E, XP-D456E, XP-D457E, XP-D458E, XP-D459E, XP-D63B, XP-D631B, XP-D632B, XP-D633B, XP-D634B, XP-D635B, XP-D63E, XP-D631E, XP-D632E, XP-D633E, XP-D634E, XP-D635E, XP-D84B, XP-D841B, XP-D842B, XP-D843B, XP-D844B, XP-D845B, XP-D84E, XP-D841E, XP-D842E, XP-D843E, XP-D844E, XP-D845E, XP-450B, XP-460B, XP-470B, XP-480B, XP-490B, XP-420B, XP-421B, XP-422B, XP-423B, XP-424B, XP-425B, XP-426B, XP-427B, XP-428B, XP-429B, XP-DT426B, XP-DT427B, XP-DT428B, XP-DT425B, XP-DT326B, XP-450E, XP-DT325B, XP-410B, XP-410E, XP-420E, XP-460E, XP-470E, XP-480E, XP-490E, XP-D3601B, XP-D4601B, XP-D4602B, XP-470BII, XP-430B, XP-421B, XP-422B, XP-423B, XP-424B, XP-421E, XP-422E, XP-423E, XP-424E, 4B-2044A, 4B-2054A, 4B-2064A, 4B-2074A, 4B-2084A, 4B-2094A, 4B-2104A, 4B-2114A, 4B-2124A, 4B-2134A, 4B-2144A, 4B-2154A, 4B-2164A, 4B-2043A, 4B-2053A, 4B-2063A, 4B-2073A, 4B-2083A, 4B-2093A, 4B-20103A, 4B-3044A, 4B-3054A, 4B-3064A, 4B-3074A, 4B-3084A, 4B-3094A, 4B-3104A, 4B-3114A, 4B-3124A, 4B-3134A, 4B-3144A, 4B-3154A, 4B-3164A, 4B-2044B, 4B-2054B, 4B-2064B, 4B-2074B, 4B-2084B, 4B-2094B, 4B-2104B, 4B-2114B, 4B-2124B, 4B-2134B, 4B-2144B, 4B-2154B, 4B-2164B, 4B-2043B, 4B-2053B, 4B-2063B, 4B-2073B, 4B-2083B, 4B-2093B, 4B-20103B, 4B-3044B, 4B-3054B, 4B-3064B, 4B-3074B, 4B-3084B, 4B-3094B, 4B-3104B, 4B-3114B, 4B-3124B, 4B-3134B, 4B-3144B, 4B-3154B, 4B-3164B, 4B-2044C, 4B-2054C, 4B-2064C, 4B-2074C, 4B-2084C, 4B-2094C, 4B-2104C, 4B-2114C, 4B-2124C, 4B-2134C, 4B-2144C, 4B-2154C, 4B-2164C, 4B-2043C, 4B-2053C, 4B-2063C, 4B-2073C, 4B-2083C, 4B-2093C, 4B-20103C, 4B-3044C, 4B-3054C, 4B-3064C, 4B-3074C, 4B-3084C, 4B-3094C, 4B-3104C, 4B-3114C, 4B-3124C, 4B-3134C, 4B-3144C, 4B-3154C, 4B-3164C, 4B-2054D, 4B-2054G, 4B-2054H, 4B-2054I, 4B-2054K, 4B-2054L, 4B-2054M, 4B-2054N, 4B-2074D, 4B-2074E, 4B-2074F, 4B-2074G, 4B-2074H, 4B-3034A, 4B-3034B, 4B-2054E, 4B-2054F, 4B-2082A, 4B-2072A, 4B-2092A, 4B-2082B, 4B-2072B, 4B-2092B, 4B-2082C, 4B-2072C, 4B-2092C, DL-DB424, DL-DB425, DL-DB426, DL-DB427, DL-DB428, DL-DB429, DL-DB4210, DL-DB4211, DL-DB4212, DL-DB4213, DL-DB4214, DL-DB4215, DL-DB4216, DL-DB324, DL-DB325, DL-DB326, DL-DB327, DL-DB328, DL-DB329, DL-DB3210, XP-D4603B, XP-D4604B, GS310Z, GS311Z, GS312Z, GS313Z, GS314Z, GS315Z, GS316Z, GS330Z, GS336Z, GS340Z, GS346Z, GS350Z, GS356Z,

GS400Z, GS406Z, GS440Z, GS446Z, GS450Z, GS456Z, GS410Z, GS416Z, GS436Z, GS430Z, GS431Z, GS432Z, GS420Z, GS426Z,

XP-D361B, XP-D362B, XP-D363B, XP-D364B, XP-D365B, XP-D366B, XP-D367B, XP-D371B, XP-D372B, XP-D373B, XP-D381B, XP-D382B, XP-D3601B, XP-D3602B, XP-DT325B, XP-D46B, XP-D461B, XP-D462B, XP-D463B, XP-D464B, XP-D465B, XP-D466B, XP-D467B, XP-D468B, XP-D469B, XP-D46E, XP-D461E, XP-D462E, XP-D463E, XP-D464E, XP-D465E, XP-D466E, XP-D467E, XP-D468E, XP-D469E, XP-DT108E, XP-DT108B, KDP300, KDP330, KDP1230, KDP1800, KDP3260, KDP6800, KDP3600, KDP3800, XP-P8, XP-P81, XP-P82, XP-P83, XP-P84, XP-P85, XP-P86, XP-P87, XP-P88, XP-P89, XP-D8, XP-D81, XP-D82, XP-D83, XP-D84, XP-D85, XP-D86, XP-D87, XP-D88, XP-D89, XP-T8, XP-T81, XP-T82, XP-T83, XP-T84, XP-T85, XP-T86, XP-T87, XP-T88, XP-T89, XP-PT8, XP-PT81, XP-PT82, XP-PT83, XP-PT84, XP-PT85, XP-PT86, XP-PT87, XP-PT88, XP-PT89, XP-PT8B, XP-PT81B, XP-PT82B, XP-PT83B, XP-PT84B, XP-PT85B, XP-PT86B, XP-PT87B, XP-PT88B, XP-PT89B, XP-PT8E, XP-PT81E, XP-PT82E, XP-PT83E, XP-PT84E, XP-PT85E, XP-PT86E, XP-PT87E, XP-PT88E, XP-PT89E, TP4, TP5, TP6, TP7, TP8, XP-P8101B, 4B-2081PA, 4B-2082PA, 4B-2083PA, 4B-2084PA, 4B-2085PA, 4B-2081PB, 4B-2082PB, 4B-2083PB, 4B-2084PB, 4B-2085PB, 4B-2081PC, 4B-2082PC, 4B-2083PC, 4B-2084PC, 4B-2085PC, 4B-2081PTA, 4B-2082PTA, 4B-2083PTA, 4B-2084PTA, 4B-2081PTB, 4B-2082PTB, 4B-2083PTB, 4B-2084PTB, 4B-2081PTC, 4B-2082PTC, 4B-2083PTC, 4B-2084PTC, 4B-2081A, 4B-2082A, 4B-2083A, 4B-2084A, 4B-2081B, 4B-2082B, 4B-2083B, 4B-2084B, 4B-2081C, 4B-2082C, 4B-2083C, 4B-2084C, MAP140, MAP420, MAP466, MAP4515, MAP-488, MAP-4570, MAP-4890E, MAP-4600, XP-P11B, XP-P111B, XP-P112B, XP-P113B, XP-P114B, XP-P115B, XP-P116B, XP-P117B, XP-P118B, XP-P119B, XP-P111C

XP-P11E, XP-P111E, XP-P112E, XP-P113E, XP-P114E, XP-P115E, XP-P12B, XP-P121B, XP-P122B, XP-P123B, XP-P124B, XP-P125B, XP-P126B, XP-P127B, XP-P128B, XP-P129B, XP-P121C, XP-P12E, XP-P121E, XP-P122E, XP-P123E, XP-P124E, XP-P125E, XP-P13B, XP-P131B, XP-P132B, XP-P133B, XP-P134B, XP-P135B, XP-P136B, XP-P137B, XP-P138B, XP-P139B, XP-P131C, XP-P14B, XP-P141B, XP-P142B, XP-P143B, XP-P144B, XP-P145B, XP-P146B, XP-P147B, XP-P148B, XP-P149B, XP-P141C, XP-P13E, XP-P131E, XP-P132E, XP-P133E, XP-P134E, XP-P135E, XP-P15B, XP-P151B, XP-P152B, XP-P153B, XP-P154B, XP-P155B, XP-P156B, XP-P157B, XP-P158B, XP-P159B, XP-P151C, XP-P16B, XP-P161B, XP-P162B, XP-P163B, XP-P164B, XP-P165B, XP-P166B, XP-P167B, XP-P168B, XP-P169B, XP-P161C, XP-P14E, XP-P141E, XP-P142E, XP-P143E, XP-P144E, XP-P145E, XP-P18B, XP-P181B, XP-P182B, XP-P183B, XP-P184B, XP-P16E, XP-P161E, XP-P162E, XP-P21B, XP-P211B, XP-P212B, XP-P213B, XP-P214B, XP-P215B, XP-P216B, XP-P217B, XP-P218B, XP-P219B, XP-P211C, XP-P21E, XP-P211E, XP-P212E, XP-P213E, XP-P214E, XP-P215E, XP-P22B, XP-P221B, XP-P222B, XP-P223B, XP-P224B, XP-P225B, XP-P226B, XP-P227B, XP-P228B, XP-P229B, XP-P221C, XP-P22E, XP-P221E, XP-P222E, XP-P223E, XP-P224E, XP-P225E, XP-P23B, XP-P231B, XP-P232B, XP-P233B, XP-P234B, XP-P235B, XP-P236B, XP-P237B, XP-P238B, XP-P239B, XP-P231C,

XP-P24B, XP-P241B, XP-P242B, XP-P243B, XP-P244B, XP-P245B, XP-P246B, XP-P247B, XP-P248B, XP-P249B, XP-P241C,

XP-P23E, XP-P231E, XP-P232E, XP-P233E, XP-P234E, XP-P235E, XP-P25B, XP-P251B, XP-P252B, XP-P253B, XP-P254B, XP-P255B, XP-P256B, XP-P257B, XP-P258B, XP-P259B, XP-P251C, XP-P26B, XP-P261B, XP-P262B, XP-P263B, XP-P264B, XP-P265B, XP-P266B, XP-P267B, XP-P268B, XP-P269B, XP-P261C, XP-P24E, XP-P241E, XP-P242E, XP-P243E, XP-P244E, XP-P245E, XP-P28B, XP-P281B, XP-P282B, XP-P283B, XP-P284B, XP-P26E, XP-P261E, XP-P262E, XP-P31B, XP-P311B, XP-P312B, XP-P313B,

XP-P314B, XP-P315B, XP-P316B, XP-P317B, XP-P318B, XP-P319B, XP-P311C, XP-P31E, XP-P311E, XP-P312E, XP-P313E, XP-P314E, XP-P315E, XP-P32B, XP-P321B, XP-P322B, XP-P323B, XP-P324B, XP-P325B, XP-P326B, XP-P327B, XP-P328B, XP-P329B, XP-P321C, XP-P32E, XP-P321E, XP-P322E, XP-P323E, XP-P324E, XP-P325E, XP-P33B, XP-P331B, XP-P332B, XP-P333B, XP-P334B, XP-P335B, XP-P336B, XP-P337B, XP-P338B, XP-P339B, XP-P331C, XP-P34B, XP-P341B, XP-P342B, XP-P343B, XP-P344B, XP-P345B, XP-P346B, XP-P347B, XP-P348B, XP-P349B, XP-P341C, XP-P341C, XP-P342C, XP-P343C, XP-P344C, XP-P345C, XP-P346C, XP-P347C, XP-P348C, XP-P349C, XP-P341D, XP-P33E, XP-P331E, XP-P332E, XP-P333E, XP-P334E, XP-P335E, XP-P336E, XP-P337E, XP-P338E, XP-P339E, XP-P331A, XP-P35B, XP-P351B, XP-P352B, XP-P353B, XP-P354B, XP-P355B, XP-P356B, XP-P357B, XP-P358B, XP-P359B, XP-P351C, XP-P351C, XP-P352C, XP-P353C, XP-P354C, XP-P355C, XP-P356C, XP-P357C, XP-P358C, XP-P359C, XP-P351D, XP-P36B, XP-P361B, XP-P362B, XP-P363B, XP-P364B, XP-P365B, XP-P366B, XP-P367B, XP-P368B, XP-P369B, XP-P361C, XP-P34E, XP-P341E, XP-P342E, XP-P343E, XP-P344E, XP-P345E, XP-P38B, XP-P381B, XP-P382B, XP-P383B, XP-P36E, XP-P361E, XP-P362E, XP-P41B, XP-P411B, XP-P412B, XP-P413B, XP-P414B, XP-P415B, XP-P416B, XP-P417B, XP-P418B, XP-P419B, XP-P411C, XP-P41E, XP-P411E, XP-P412E, XP-P413E, XP-P414E, XP-P415E, XP-P42B, XP-P421B, XP-P422B, XP-P423B, XP-P424B, XP-P425B, XP-P426B, XP-P427B, XP-P428B, XP-P429B, XP-P421C, XP-P42E, XP-P421E, XP-P422E, XP-P423E, XP-P424E, XP-P425E, XP-P426E, XP-P427E, XP-P428E, XP-P429E, XP-P421A, XP-P43B, XP-P431B, XP-P432B, XP-P433B, XP-P434B, XP-P435B, XP-P436B, XP-P437B, XP-P438B, XP-P439B, XP-P431C, XP-P431C, XP-P432C, XP-P433C, XP-P434C, XP-P435C, XP-P436C, XP-P437C, XP-P438C, XP-P439C, XP-P431D, XP-P44B, XP-P441B, XP-P442B, XP-P443B, XP-P444B, XP-P445B, XP-P446B, XP-P447B, XP-P448B, XP-P449B, XP-P441C, XP-P441C, XP-P442C, XP-P443C, XP-P444C, XP-P445C, XP-P446C, XP-P447C, XP-P448C, XP-P449C, XP-P441D, XP-P43E, XP-P431E, XP-P432E, XP-P433E, XP-P434E, XP-P435E, XP-P436E, XP-P437E, XP-P438E, XP-P439E, XP-P431A, XP-P45B, XP-P451B, XP-P452B, XP-P453B, XP-P454B, XP-P455B, XP-P456B, XP-P457B, XP-P458B, XP-P459B, XP-P451C, XP-P46B, XP-P461B, XP-P462B, XP-P463B, XP-P464B, XP-P465B, XP-P466B, XP-P467B, XP-P468B, XP-P469B, XP-P461C, XP-P44E, XP-P441E, XP-P442E, XP-P443E, XP-P444E, XP-P445E, XP-P446E, XP-P447E, XP-P448E, XP-P449E, XP-P441A, XP-P48B, XP-P481B, XP-P482B, XP-P46E, XP-P461E, XP-P462E, XP-P323B, XP-P324B, XP-P3301B, XP-P4401B, XP-P3401B, XP-P4602B, 4B-2023PA, 4B-2033PA, 4B-2043PA, 4B-2053PA, 4B-2063PA, 4B-2073PA, 4B-2083PA, 4B-2093PA, 4B-2103PA, 4B-2023PB, 4B-2033PB, 4B-2043PB, 4B-2053PB, 4B-2063PB, 4B-2073PB, 4B-2083PB, 4B-2093PB, 4B-2103PB, 4B-2023PC, 4B-2033PC, 4B-2043PC, 4B-2053PC, 4B-2063PC, 4B-2073PC, 4B-2083PC, 4B-2093PC, 4B-2103PC, 4B-2014PA, 4B-2024PA, 4B-2034PA, 4B-2044PA, 4B-2054PA, 4B-2064PA, 4B-2074PA, 4B-2084PA, 4B-2094PA, 4B-2023PB, 4B-2033PB, 4B-2043PB, 4B-2053PB, 4B-2063PB, 4B-2073PB, 4B-2083PB, 4B-2093PB, 4B-2103PB, 4B-2023PC, 4B-2033PC, 4B-2043PC, 4B-2053PC, 4B-2063PC, 4B-2073PC, 4B-2083PC, 4B-2093PC, 4B-2103PC, 4B-2128PA, 4B-2258PA, 4B-2508PA, 4B-2758PA, 4B-2108PA, 4B-2158PA, 4B-2208PA, 4B-2128PB, 4B-2258PB, 4B-2508PB, 4B-2758PB, 4B-2108PB, 4B-2158PB, 4B-2208PB, 4B-2128PC, 4B-2258PC, 4B-2508PC, 4B-2758PC, 4B-2108PC, 4B-2158PC, 4B-2208PC, 4B-3128PA, 4B-3258PA, 4B-3508PA, 4B-3758PA, 4B-3108PA, 4B-3158PA, 4B-3208PA, 4B-3128PB, 4B-2258PB, 4B-2508PB, 4B-2758PB, 4B-2108PB, 4B-2158PB, 4B-2208PB, 4B-3128PC, 4B-2258PC, 4B-2508PC, 4B-2758PC, 4B-2108PC, 4B-2158PC, 4B-2208PC, 4B-2128PTA, 4B-2258PTA, 4B-2508PTA, 4B-2758PTA, 4B-2108PTA, 4B-2158PTA, 4B-2208PTA, 4B-2128PTB, 4B-2258PTB, 4B-2508PTB, 4B-2758PTB, 4B-2108PTB, 4B-2158PTB, 4B-2208PTB, 4B-2128PTC, 4B-2258PTC, 4B-2508PTC, 4B-2758PTC, 4B-2108PTC, 4B-2158PTC, 4B-2208PTC, 4B-3128PTA, 4B-2258PTA, 4B-2508PTA, 4B-2758PTA, 4B-2108PTA, 4B-2158PTA, 4B-2208PTA, 4B-3128PTB, 4B-2258PTB, 4B-2508PTB, 4B-2758PTB, 4B-2108PTB, 4B-2158PTB, 4B-2208PTB, 4B-

3128PTC, 4B-2258PTC, 4B-2508PTC, 4B-2758PTC, 4B-2108PTC, 4B-2158PTC, 4B-2208PTC, 4B-2042PA, 4B-2052PA, 4B-2062PA, 4B-2042PB, 4B-2052PB, 4B-2062PB, 4B-2042PC, 4B-2052PC, 4B-2062PC, DL-PB322, DL-PB323, DL-PB324, DL-PB325, DL-PB326, DL-PB327, DL-PB328, DL-PB329, DL-PB3210, XP-P322B-D1, XP-D481B, XP-D482B, XP-D483B, XP-D484B, XP-D485B, XP-D486B, XP-D487B, XP-D488B, XP-D489B, XP-D481E, XP-D482E, XP-D483E, XP-D484E, XP-D485E, XP-D486E, XP-D487E, XP-D488E, XP-D489E, XP-D321C, XP-D322C, XP-D323C, XP-D324C, XP-D325C, XP-D326C, XP-D327C, XP-D328C, XP-D329C, XP-D321F, XP-D322F, XP-D323F, XP-D324F, XP-D325F, XP-D326F, XP-D327F, XP-D328F, XP-D329F, XP-D421C, XP-D422C, XP-D423C, XP-D424C, XP-D425C, XP-D426C, XP-D427C, XP-D428C, XP-D429C, XP-D421F, XP-D422F, XP-D423F, XP-D424F, XP-D425F, XP-D426F, XP-D427F, XP-D428F, XP-D429F, XP-D381B, XP-D382B, XP-D383B, XP-D384B, XP-D385B, XP-D386B, XP-D387B, XP-D388B, XP-D389B, XP-D381E, XP-D382E, XP-D383E, XP-D384E, XP-D385E, XP-D386E, XP-D387E, XP-D388E, XP-D389E,

4B-2123A, 4B-2123B, 4B-2123C, 4B-2123D, 4B-2123E, 4B-2123F, 4B-2123G, 4B-2123H, 4B-2123I, 4B-2123K, 4B-2123L, 4B-2123M, 4B-2123N, 4B-2123P, 4B-2123Q, 4B-3123A, 4B-3123B, 4B-3123C, 4B-3123D, 4B-3123E, 4B-3123F, 4B-3123G, 4B-3123H, 4B-3123I, 4B-3123K, 4B-3123L, 4B-3123M, 4B-3123N, 4B-3123P, 4B-3123Q, 4B-2084A, 4B-2084B, 4B-2084C, 4B-2084D, 4B-2084E, 4B-2084F, 4B-2084G, 4B-2084H, 4B-2084I, 4B-2084K, 4B-2084L, 4B-2084M, 4B-2084N, 4B-2084P, 4B-2084Q, 4B-3064A, 4B-3064B, 4B-3064C, 4B-3064D, 4B-3064E, 4B-3064F, 4B-3064G, 4B-3064H, 4B-3064I, 4B-3064K, 4B-3064L, 4B-3064M, 4B-3064N, 4B-3064P, 4B-3064Q, 4B-2124A, 4B-2124B, 4B-2124C, 4B-2124D, 4B-2124E, 4B-2124F, 4B-2124G, 4B-2124H, 4B-2124I, 4B-2124K, 4B-2124L, 4B-2124M, 4B-2124N, 4B-2124P, 4B-2124Q, 4B-3104A, 4B-3104B, 4B-3104C, 4B-3104D, 4B-3104E, 4B-3104F, 4B-3104G, 4B-3104H, 4B-3104I, 4B-3104K, 4B-3104L, 4B-3104M, 4B-3104N, 4B-3104P, 4B-3104Q, 4B-2164A, 4B-2164B, 4B-2164C, 4B-2164D, 4B-2164E, 4B-2164F, 4B-3124A, 4B-3124B, 4B-3124C, 4B-3124D, 4B-3124E, 4B-3124F, 4B-2083A, 4B-2083B, 4B-2083C, 4B-2083D, 4B-2083E, 4B-2083F, 4B-2083G, 4B-2083H, 4B-2083I, 4B-2083K, 4B-2083L, 4B-2083M, 4B-2083N, 4B-2083P, 4B-2083Q, 4B-3063A, 4B-3063B, 4B-3063C, 4B-3063D, 4B-3063E, 4B-3063F, 4B-3063G, 4B-3063H, 4B-3063I, 4B-3063K, 4B-3063L, 4B-3063M, 4B-3063N, 4B-3063P, 4B-3063Q

XP-G480B, XP-G480E, 4B-2084GA, 4B-3064GA, XP-G481B, XP-G481E, 4B-2084GB, 4B-3064GB, XP-G482B, XP-G482E, 4B-2084GC, 4B-3064GC, XP-G483B, XP-G483E, 4B-2084GD, 4B-3064GD

3.2 Channel List

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2020 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

The details of test channels and bandwidth were for RF conductive measurement.

Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
00	2402	14	2430	28	2458
01	2404	15	2432	29	2460
02	2406	16	2434	30	2462
03	2408	17	2436	31	2464
04	2410	18	2438	32	2466
05	2412	19	2440	33	2468
06	2414	20	2442	34	2470
07	2416	21	2444	35	2472
08	2418	22	2446	36	2474
09	2420	23	2448	37	2476
10	2422	24	2450	38	2478
11	2424	25	2452	39	2480
12	2426	26	2454		
13	2428	27	2456		

Note:

1. Test of channel was included the lowest, middle and highest frequency in highest data rate and to perform the test, then record on this report.

Test Frequency:


	Channel	Frequency(MHz)
Low Channel	0	2402
Mid Channel	19	2440
High Channel	39	2480

3.3 Test Setup Configuration


Conducted Emission

AC Line


DC Line



Radiated Emission(30MHz-1GHz)



Radiated Emission(above 1GHz)



Conducted Spurious



3.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

4 Equipment During Test

4.1 Equipments List

Conducted emission Test Equipment

Radiated emission & Radio Frequency Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2025/1/17	2028/1/16
EMI Test Receiver	ESCI	101178	Rohde & Schwarz	2025/6/10	2026/6/09
Amplifier (30MHz-1GHz)	BBV 9743 B	00374	SCHNWARZBECK	2025/6/10	2026/6/09
Bilog Antenna (30MHz-1GHz)	VULB9162	00473	SCHNWARZBECK	2025/3/08	2026/3/07
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHNWARZBECK	2025/3/10	2026/3/09
Preamplifier (1GHz-18GHz)	BBV 9718D	0024	SCHNWARZBECK	2025/6/10	2026/6/09
Spectrum Analyzer (10Hz-40GHz)	FSV 40	100952	Rohde & Schwarz	2025/6/10	2026/6/09
Preamplifier (18GHz-40GHz)	BBV 9721	0056	SCHNWARZBECK	2025/6/10	2026/6/09
Double Ridge Guide Horn Antenna (18GHz-40GHz)	SAS-574	588	A.H.System	2025/3/10	2026/3/09
Loop Antenna (9KHz-30MHz)	FMZB 1513-60	00115	SCHNWARZBECK	2025/6/10	2026/6/09
Amplifier (9KHz-30MHz)	BBV 9745	00109	CHNWARZBECK	2025/6/10	2026/6/09
MXG Signal Analyzer	N9020A	MY50510202	Agilent	2025/6/10	2026/6/09
MXG Vector Signal Generator	N5182A	MY50140020	Agilent	2025/6/10	2026/6/09
MXG Analog Signal Generator	N5181A	MY47420919	Agilent	2025/6/10	2026/6/09
Power Sensor	TR1029-2	512364	Techoy	2025/6/10	2026/6/09
RF Switch	TR1029-1	512364	Techoy	2025/6/10	2026/6/09
Cable	DA800- 4000MM	NA	DA	2025/6/10	2026/6/09
Cable	DA800- 11000MM	NA	DA	2025/6/10	2026/6/09
Radio frequency receiving antennae	NA	NA	Agilente	NA	NA

Conducted emission Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	944 Room	/	EMToni	2025/1/17	2028/1/16
EMI Test Receiver	ESPI	101604	Rohde & Schwarz	2025/6/10	2026/6/09
LISN	ENV 216	102796	Rohde & Schwarz	2025/6/10	2026/6/09
LISN	VN1-13S	004023	CRANAGE	2025/6/10	2026/6/09
Cable	RG223-1500MM	NA	RG	2025/6/10	2026/6/09

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	AUDIX	e3	6.120718
2	EMC radiation test system	AUDIX	e3	6.120718
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

4.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 × 10 ⁻⁶
Bandwidth	± 1.5 × 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(9kHz~30MHz)	±4.51dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Conducted Spurious Emission	±2.76dB
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%	

4.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note

Note: (1)The support equipment was authorized by Declaration of Confirmation.

(2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

5 Conducted Emission

Test Requirement	: FCC CFR 47 Part 15 Section 15.207
Test Method	: ANSI C63.10-2020
Test Result	: PASS
Frequency Range	: 150kHz to 30MHz
Class/Severity	: Class B


5.1 E.U.T. Operation

Operating Environment :


Temperature	: 25.5 °C
Humidity	: 51 % RH
Atmospheric Pressure	: 101.2kPa

5.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10-2020.

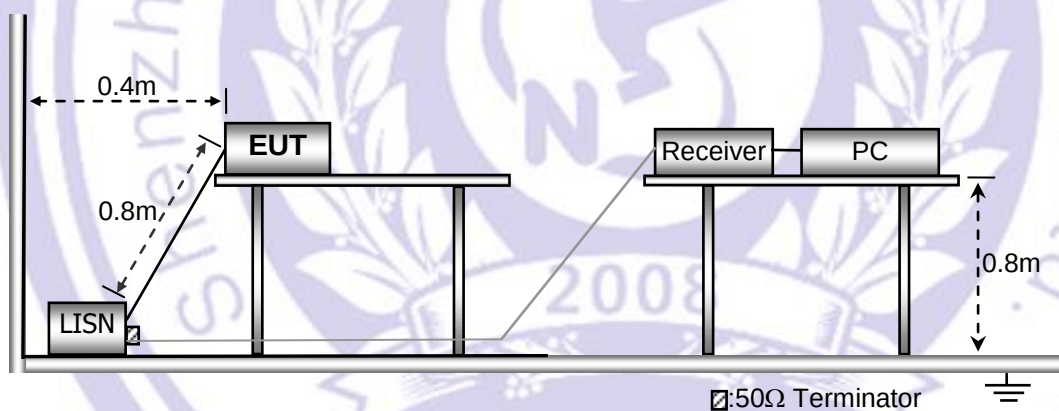

5.3 Test SET-UP (Block Diagram of Configuration)

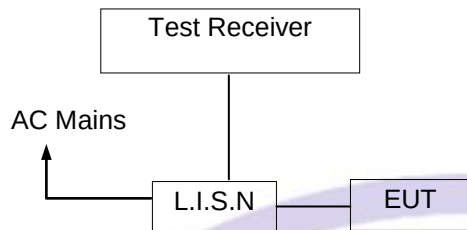

5.4 Measurement Procedure

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

5.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

5.6 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

5.7 Conducted Emission Test Result

Pass


Conducted emission at both 120V & 240V is assessed, and emission at 120V represents the worst case. All the modulation modes were tested the data of the worst mode (GFSK 1M) are recorded in the following pages and the others modulation methods do not exceed the limits.

Channel:	Middle	Phase :	L
----------	--------	---------	---

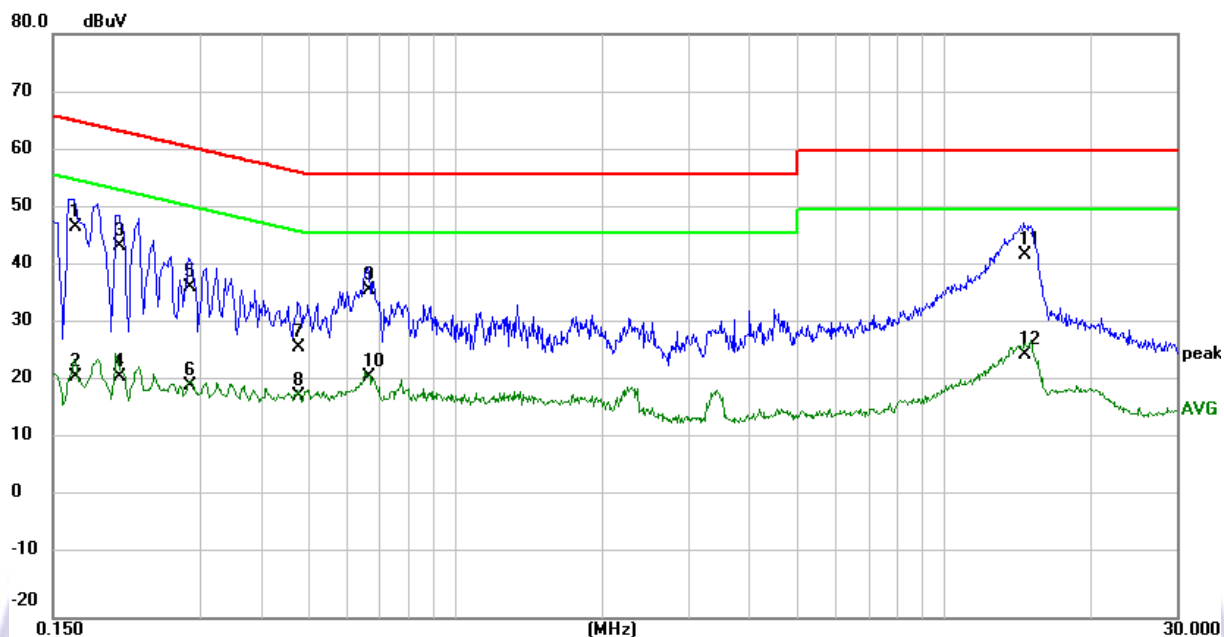

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1660	26.40	20.52	46.92	65.16	-18.24	QP
2	0.1660	0.69	20.52	21.21	55.16	-33.95	AVG
3	0.2040	21.81	21.88	43.69	63.45	-19.76	QP
4	0.2040	-0.48	21.88	21.40	53.45	-32.05	AVG
5	0.2860	14.70	21.88	36.58	60.64	-24.06	QP
6	0.2860	-2.02	21.88	19.86	50.64	-30.78	AVG
7	0.4780	4.52	21.89	26.41	56.37	-29.96	QP
8	0.4780	-3.82	21.89	18.07	46.37	-28.30	AVG
9	0.6620	14.21	21.89	36.10	56.00	-19.90	QP
10	0.6620	-0.51	21.89	21.38	46.00	-24.62	AVG
11	14.6340	22.40	19.88	42.28	60.00	-17.72	QP
12	14.6340	5.14	19.88	25.02	50.00	-24.98	AVG

Channel:	Middle	Phase :	N
----------	--------	---------	---

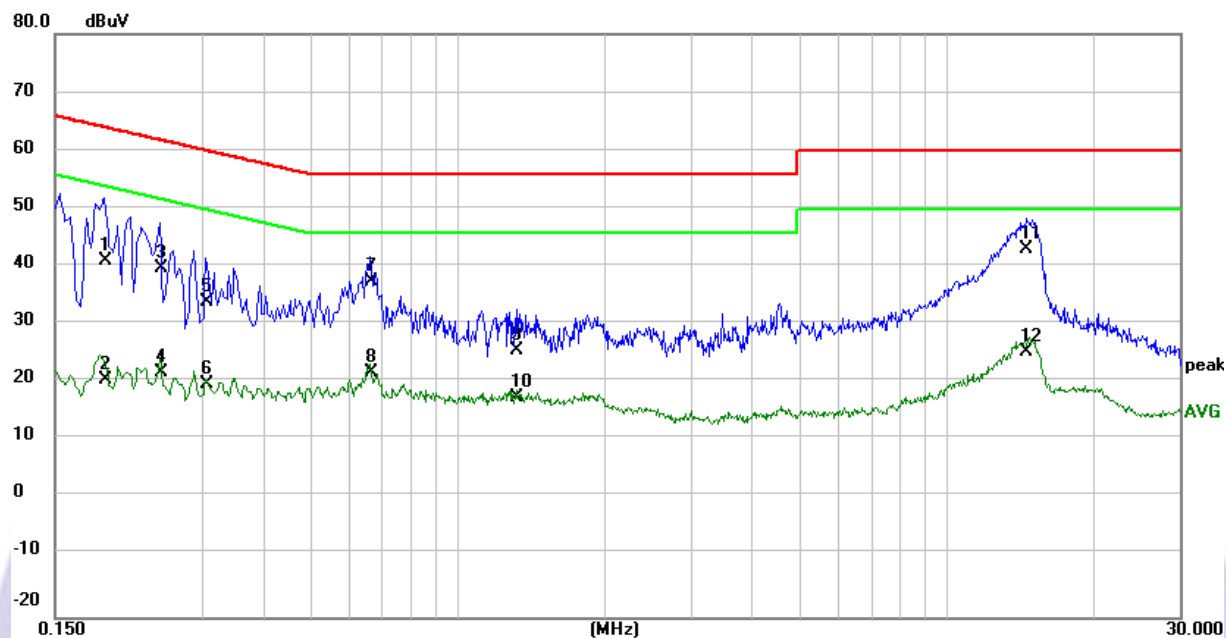

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measure-ment(dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1900	19.79	21.48	41.27	64.04	-22.77	QP
2	0.1900	-0.55	21.48	20.93	54.04	-33.11	AVG
3	0.2460	18.03	21.88	39.91	61.89	-21.98	QP
4	0.2460	0.11	21.88	21.99	51.89	-29.90	AVG
5	0.3060	12.37	21.88	34.25	60.08	-25.83	QP
6	0.3060	-1.70	21.88	20.18	50.08	-29.90	AVG
7	0.6620	15.67	21.89	37.56	56.00	-18.44	QP
8	0.6620	0.17	21.89	22.06	46.00	-23.94	AVG
9	1.3180	3.88	21.88	25.76	56.00	-30.24	QP
10	1.3180	-3.95	21.88	17.93	46.00	-28.07	AVG
11	14.5860	23.34	19.88	43.22	60.00	-16.78	QP
12	14.5860	5.78	19.88	25.66	50.00	-24.34	AVG

6 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247,
 Test Method : ANSI C63.10-2020
 Test Result : PASS
 Measurement Distance : 3m
 Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

6.1 EUT Operation


Operating Environment :

Temperature : 23.5 °C
 Humidity : 51.1 % RH
 Atmospheric Pressure : 101.2kPa


6.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz

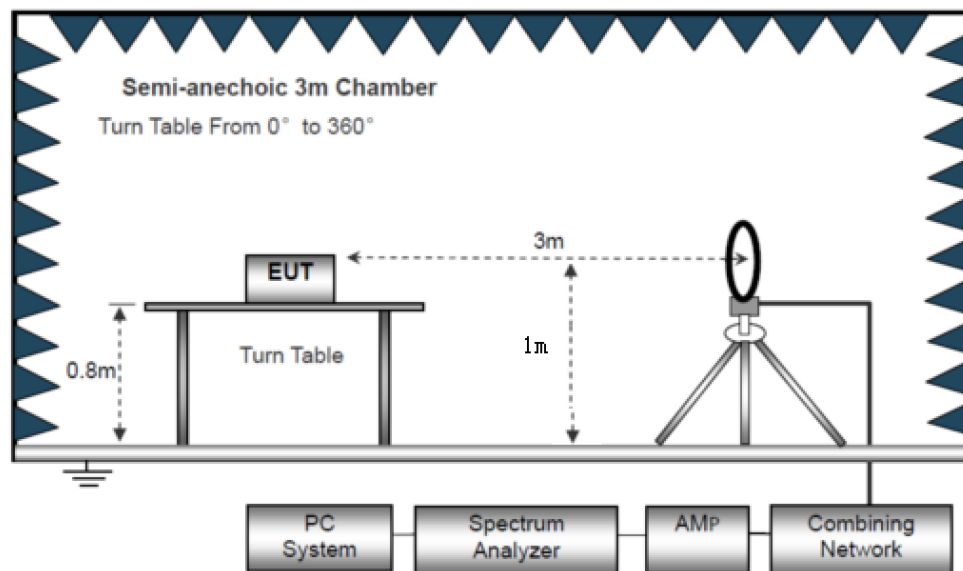

The test setup for emission measurement from 30 MHz to 1 GHz.

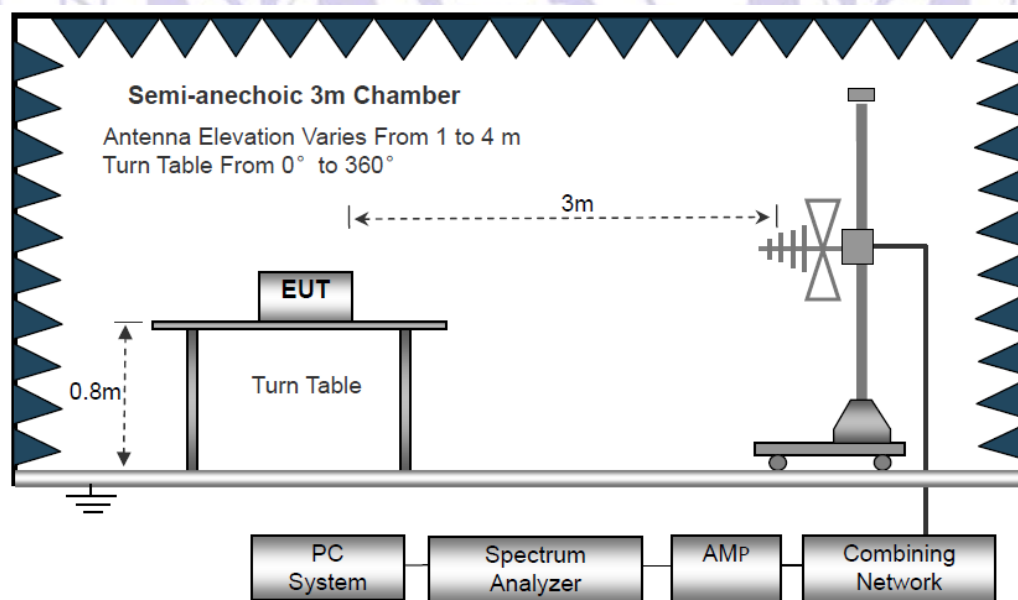

The test setup for emission measurement above 1 GHz

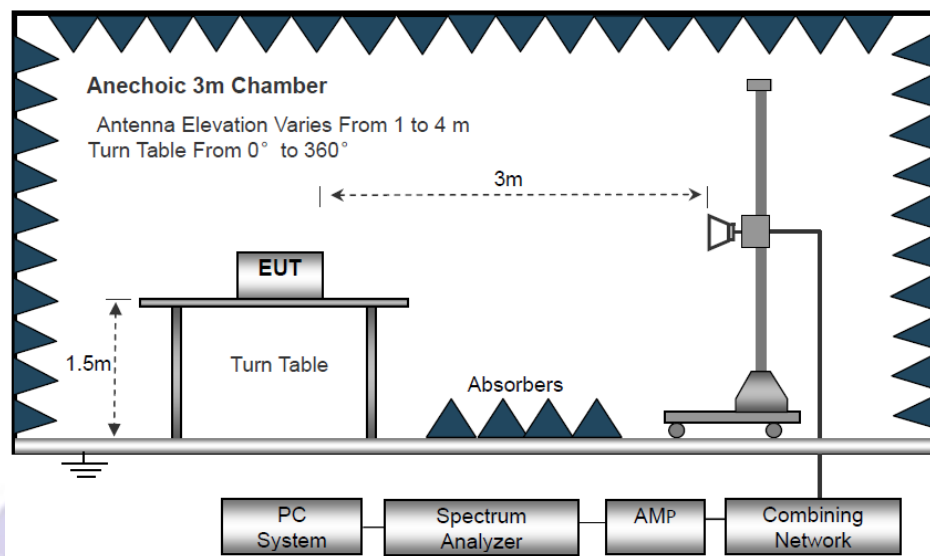

6.3 Spectrum Analyzer Setup

	Frequency	Detector	RBW	VBW	Remark
Receiver Setup	Below 30MHz	--	10kHz	10kHz	--
	30MHz ~ 1GHz	Quasi-peak	120kHz	300kHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value

6.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2020.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
8. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

6.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


Distance extrapolation factor = $40\log(\text{Specific distance} / \text{test distance})$ (dB);
Limit line = Specific limits (dBuV) + distance extrapolation factor.

Test Frequency: 30MHz ~ 1GHz

Pass.


BLE mode have been tested, and the worst result (GFSK_2402MHz) was report as below:

Phase:	Vertical
Test Power :	AC 120V 60Hz

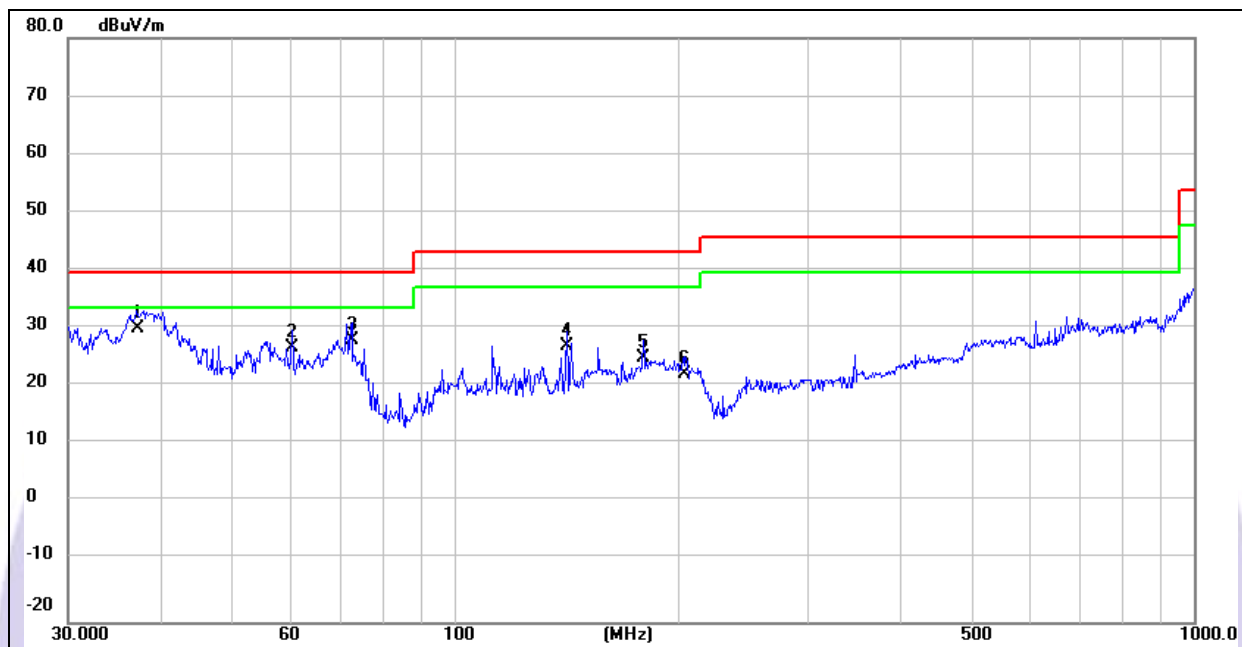

No.	Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark			
1	37.1550	32.42	-2.05	30.37	40.00	-9.63	QP			
2	60.2800	36.90	-9.81	27.09	40.00	-12.91	QP			
3	72.5913	39.09	-10.62	28.47	40.00	-11.53	QP			
4	141.8262	30.03	-2.73	27.30	43.50	-16.20	QP			
5	180.0164	32.27	-6.96	25.31	43.50	-18.19	QP			
6	204.9550	29.66	-6.97	22.69	43.50	-20.81	QP			

Phase:	Horizontal
Test Power :	AC 120V 60Hz

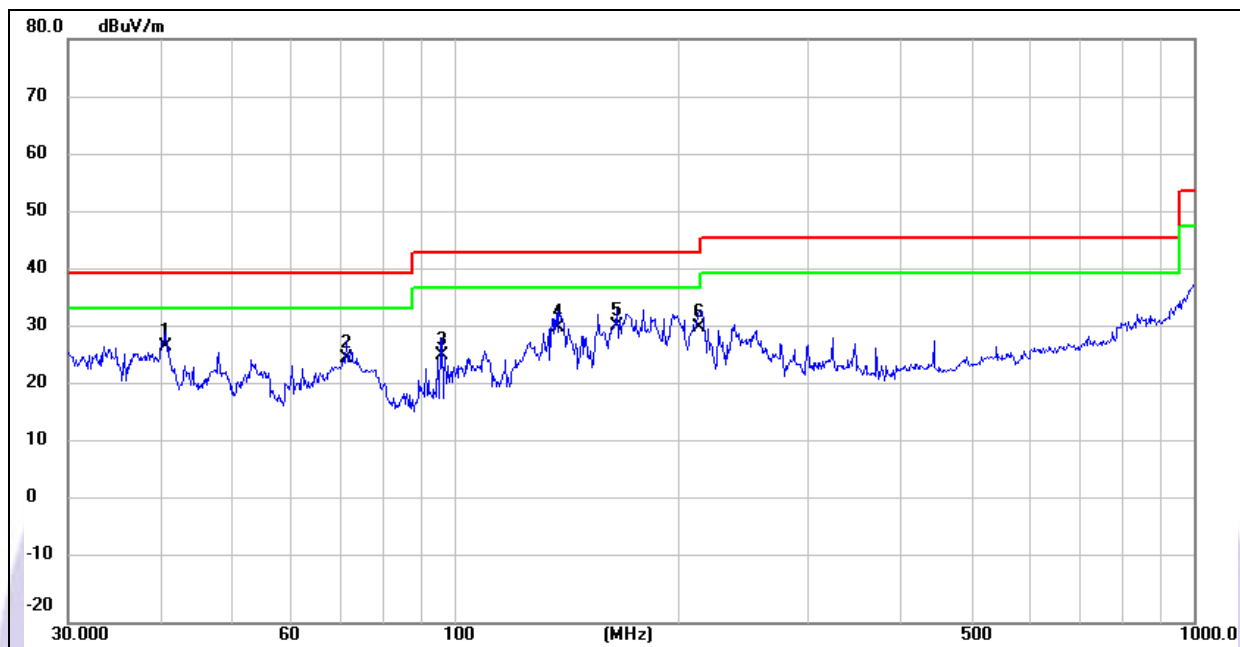

No.	Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark			
1	40.7014	29.55	-2.30	27.25	40.00	-12.75	QP			
2	71.5805	35.95	-10.59	25.36	40.00	-14.64	QP			
3	96.0985	32.14	-6.38	25.76	43.50	-17.74	QP			
4	138.3873	33.30	-2.69	30.61	43.50	-12.89	QP			
5	166.0680	35.76	-4.95	30.81	43.50	-12.69	QP			
6	214.5141	37.38	-6.75	30.63	43.50	-12.87	QP			

Test Frequency 1GHz-25GHz:

BLE mode have been tested, and the worst result (GFSK_2402MHz) was report as below:

Test mode:		GFSK(1M)		Frequency:		Channel 0: 2402MHz	
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4804.00	V	51.30	37.29	74.00	54.00	-22.70	-16.71
7206.00	V	46.94	42.94	74.00	54.00	-27.06	-11.06
9608.00	V	52.54	41.70	74.00	54.00	-21.46	-12.30
12010.00	V	57.20	36.97	74.00	54.00	-16.80	-17.03
14412.00	V	47.91	41.80	74.00	54.00	-26.09	-12.20
4804.00	H	49.99	39.84	74.00	54.00	-24.01	-14.16
7206.00	H	54.37	36.24	74.00	54.00	-19.63	-17.76
9608.00	H	52.77	37.90	74.00	54.00	-21.23	-16.10
12010.00	H	46.17	43.71	74.00	54.00	-27.83	-10.29
14412.00	H	48.71	37.64	74.00	54.00	-25.29	-16.36

Test mode:		GFSK(1M)		Frequency:		Channel 19: 2440MHz	
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4880.00	V	51.92	35.07	74.00	54.00	-22.08	-18.93
7320.00	V	55.48	44.26	74.00	54.00	-18.52	-9.74
9760.00	V	52.76	44.35	74.00	54.00	-21.24	-9.65
12200.00	V	58.07	35.42	74.00	54.00	-15.93	-18.58
14640.00	V	50.79	44.04	74.00	54.00	-23.21	-9.96
4880.00	H	59.12	41.86	74.00	54.00	-14.88	-12.14
7320.00	H	55.24	44.22	74.00	54.00	-18.76	-9.78
9760.00	H	51.22	37.68	74.00	54.00	-22.78	-16.32
12200.00	H	45.02	36.20	74.00	54.00	-28.98	-17.80
14640.00	H	58.65	39.60	74.00	54.00	-15.35	-14.40

Test mode: GFSK(1M)		Frequency:		Channel 39: 2480MHz			
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4960.00	V	47.20	37.62	74.00	54.00	-26.80	-16.38
7440.00	V	59.93	35.19	74.00	54.00	-14.07	-18.81
9920.00	V	59.50	44.69	74.00	54.00	-14.50	-9.31
12400.00	V	55.11	35.34	74.00	54.00	-18.89	-18.66
14880.00	V	53.47	37.04	74.00	54.00	-20.53	-16.96
4960.00	H	56.99	40.60	74.00	54.00	-17.01	-13.40
7440.00	H	59.93	36.22	74.00	54.00	-14.07	-17.78
9920.00	H	53.14	44.64	74.00	54.00	-20.86	-9.36
12400.00	H	54.33	44.36	74.00	54.00	-19.67	-9.64
14880.00	H	45.79	38.17	74.00	54.00	-28.21	-15.83

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Test mode: GFSK		Frequency:		Channel 0: 2402MHz	
Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2310.0000	H	49.34	74.00	37.41	54.00
2390.0000	H	57.22	74.00	31.07	54.00
2310.0000	V	55.91	74.00	29.34	54.00
2390.0000	V	43.31	74.00	35.56	54.00

Test mode: GFSK		Frequency:		Channel 39: 2480MHz	
Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2483.5000	H	50.64	74.00	24.38	54.00
2500.0000	H	58.29	74.00	36.27	54.00
2483.5000	V	46.10	74.00	22.65	54.00
2500.0000	V	58.35	74.00	22.15	54.00

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

7 Conduct Band Edge And Spurious Emissions Measurement



Test Requirement	: Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method	: ANSI C63.10-2020
Test Limit	: Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.1 Test Procedure



1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto
Detector function = peak, Trace = max hold

7.2 Test Result



GFSK: Band Edge, Left Side

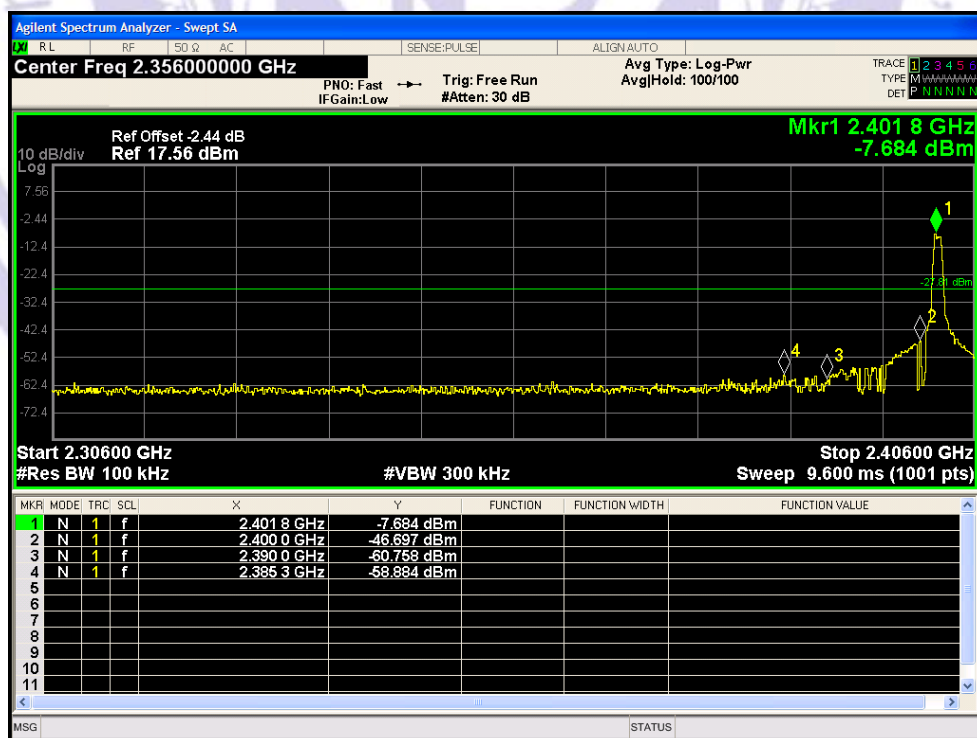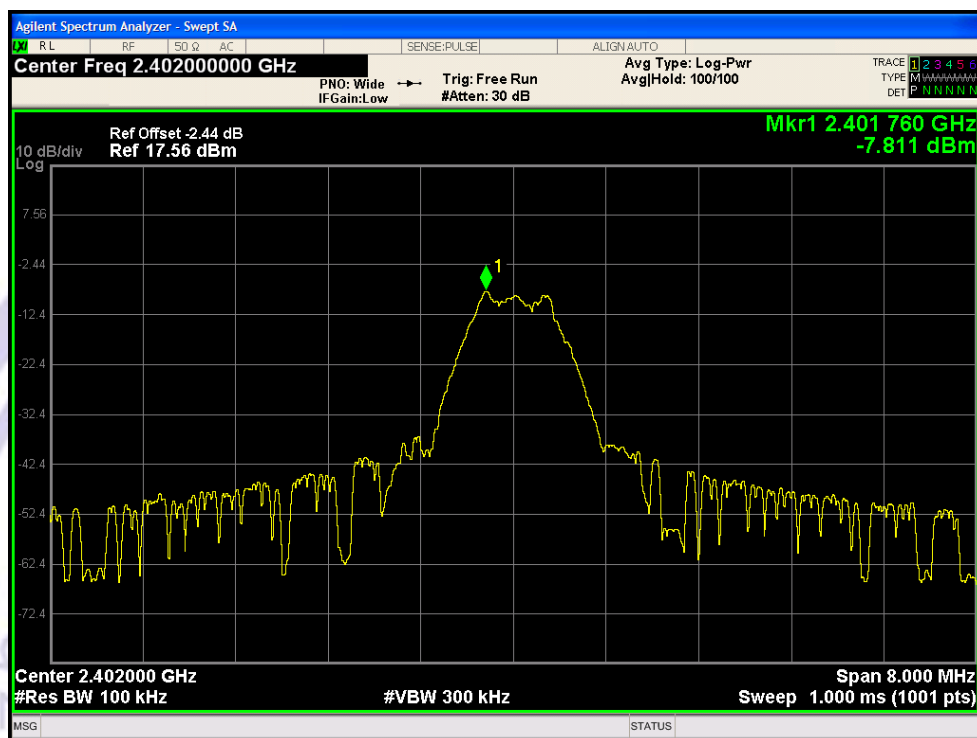



GFSK: Band Edge, Right Side

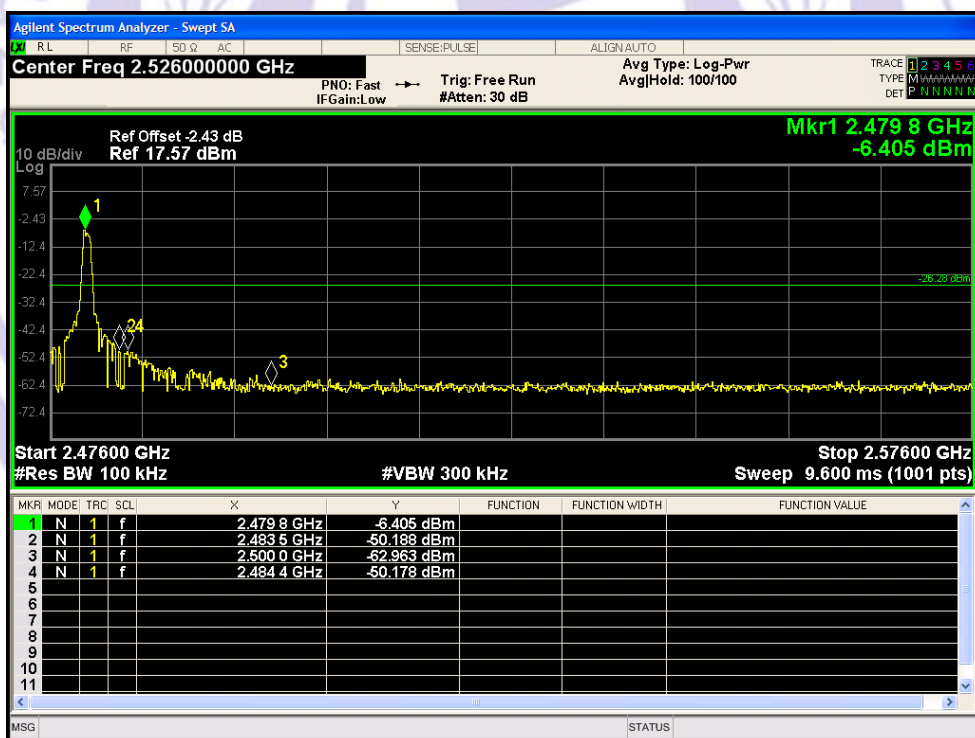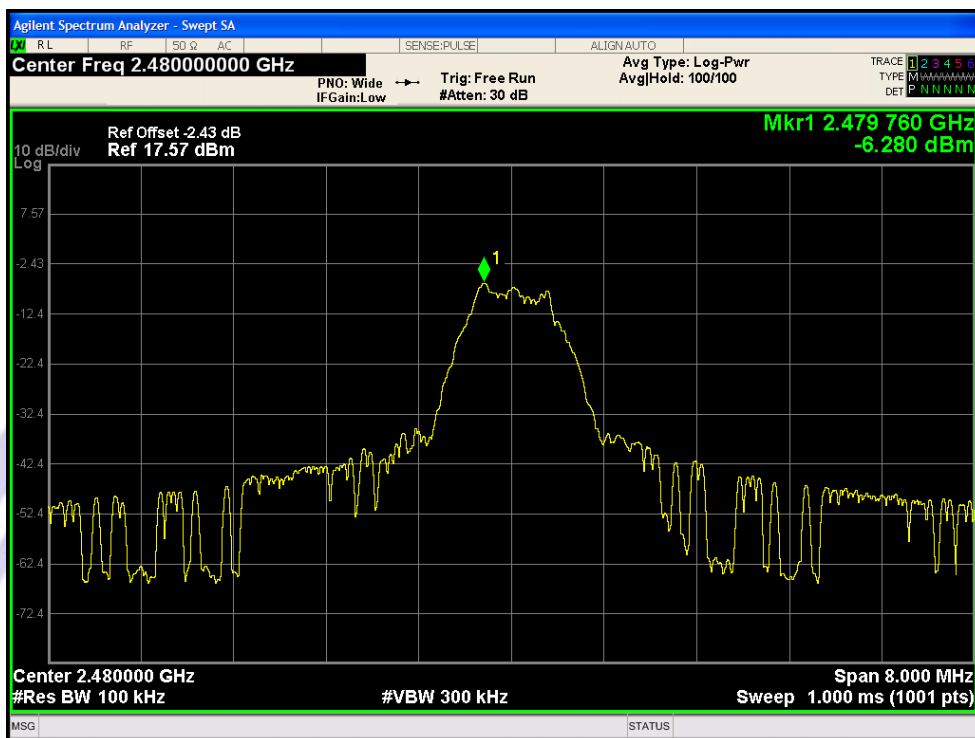



Lowest channel

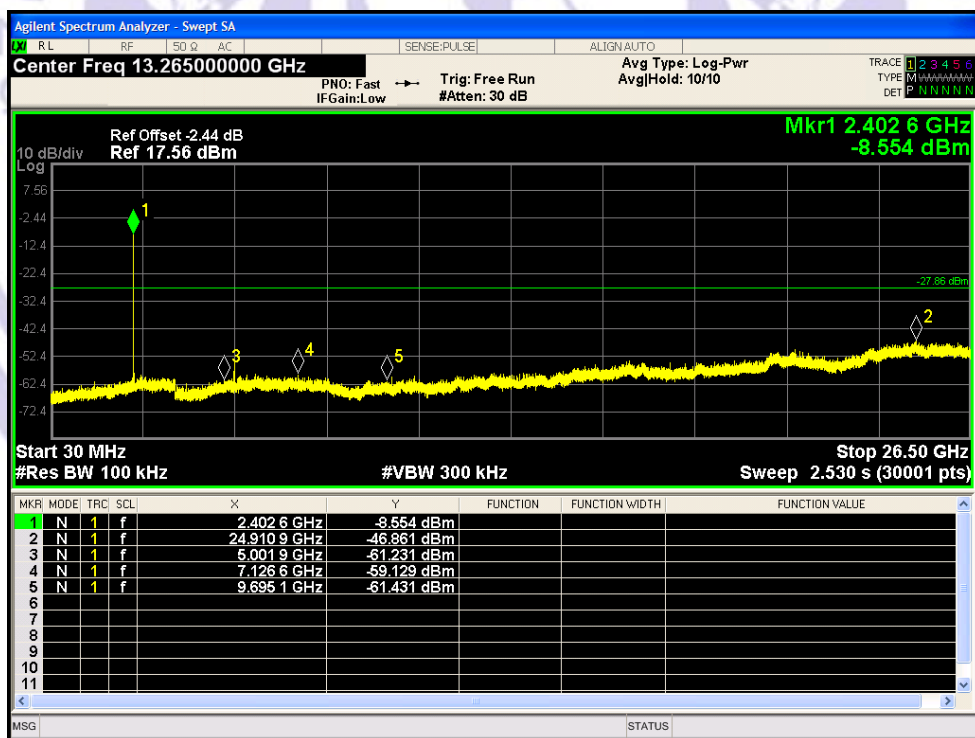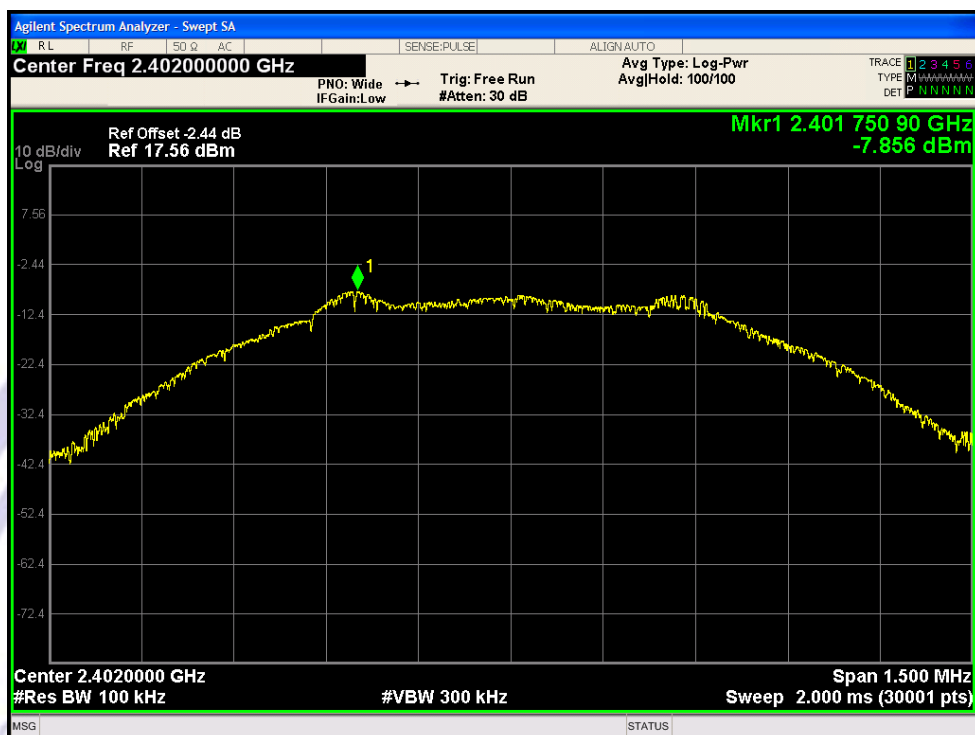

Mid channel

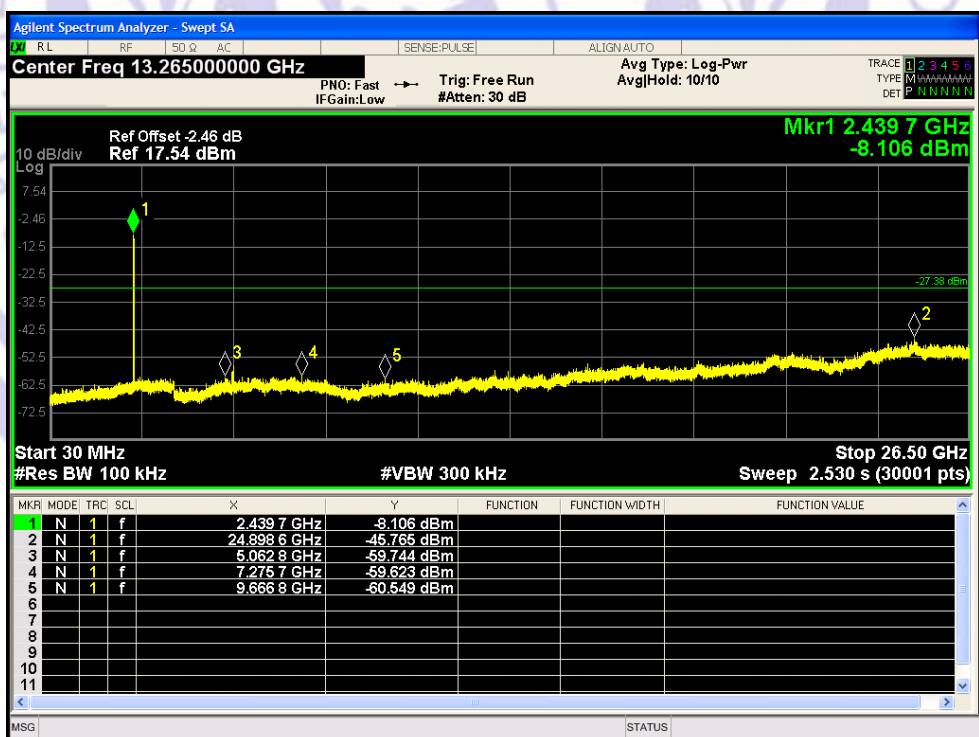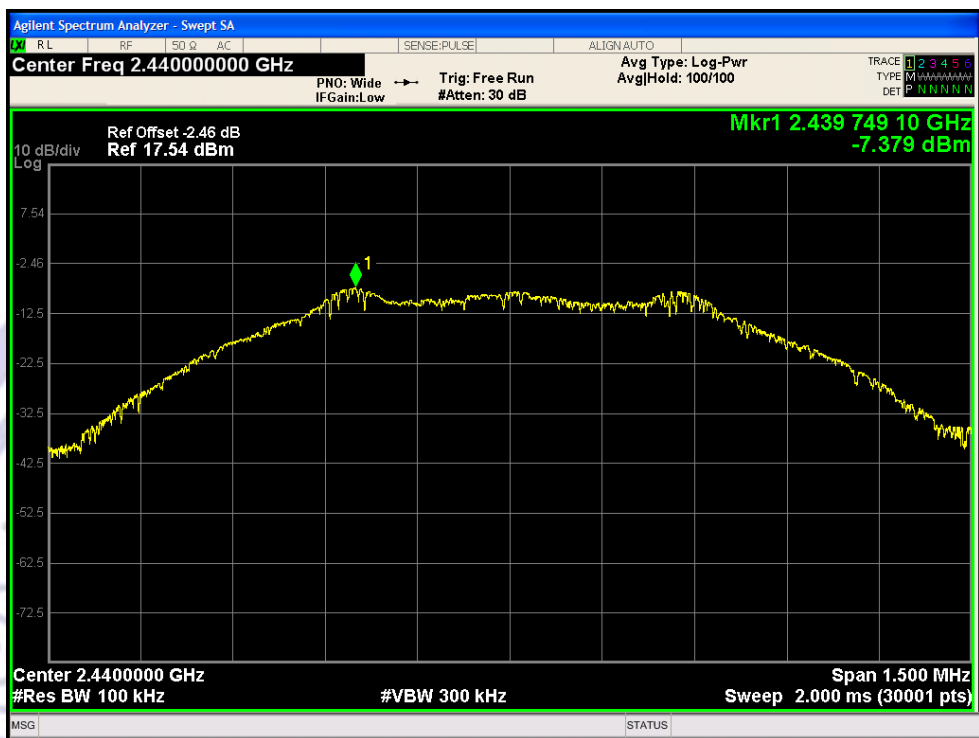

Highest channel

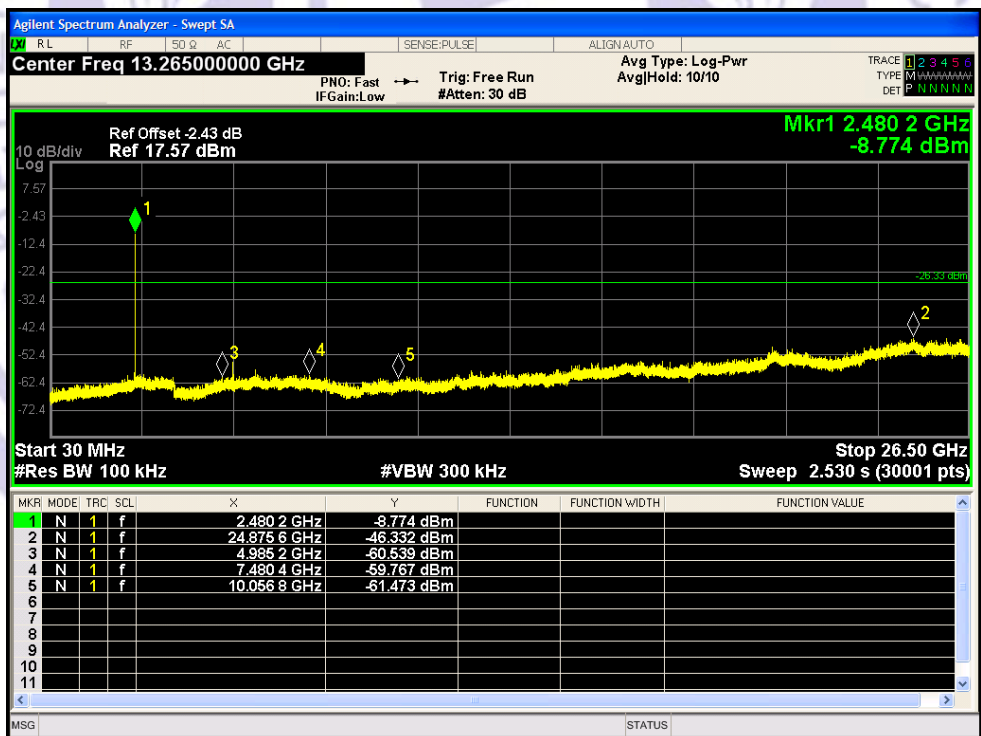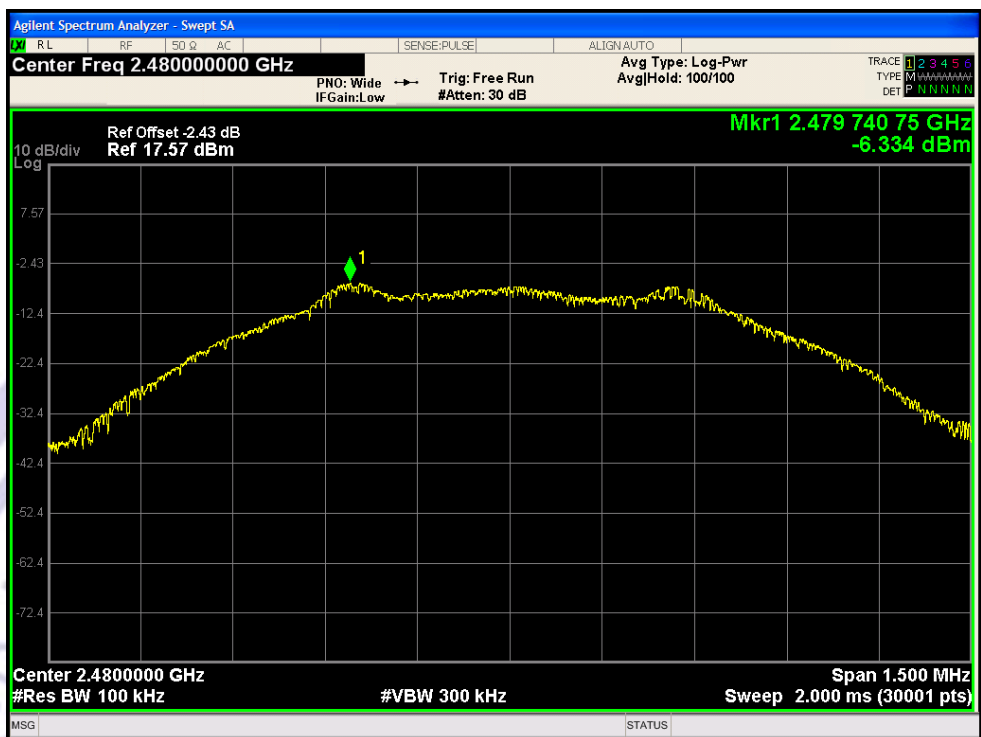

8 6dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10-2020

Test Limit Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

8.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz

8.2 Test Result


Channel number	Channel frequency (MHz)	-6dB Occupy Bandwidth (KHz)	Limit (KHz)	99% Occupy Bandwidth (KHz)	Limit (KHz)
00	2402	696.4	>500	/	/
19	2440	702.7	>500	/	/
39	2480	700.4	>500	/	/

-6dB Occupy Bandwidth


CH00

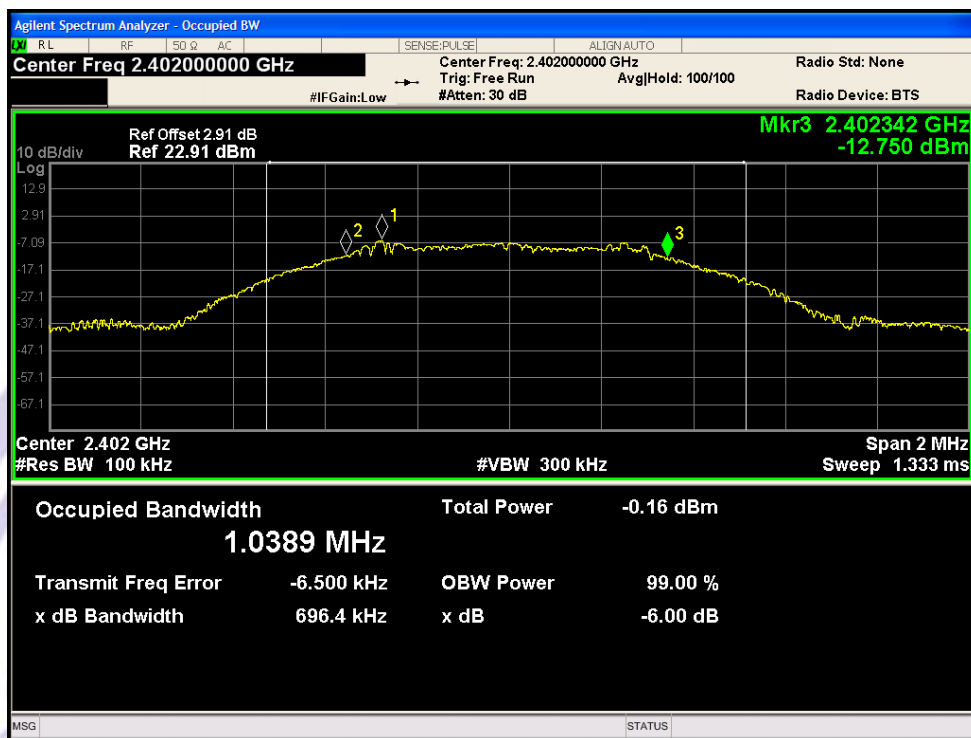

CH19

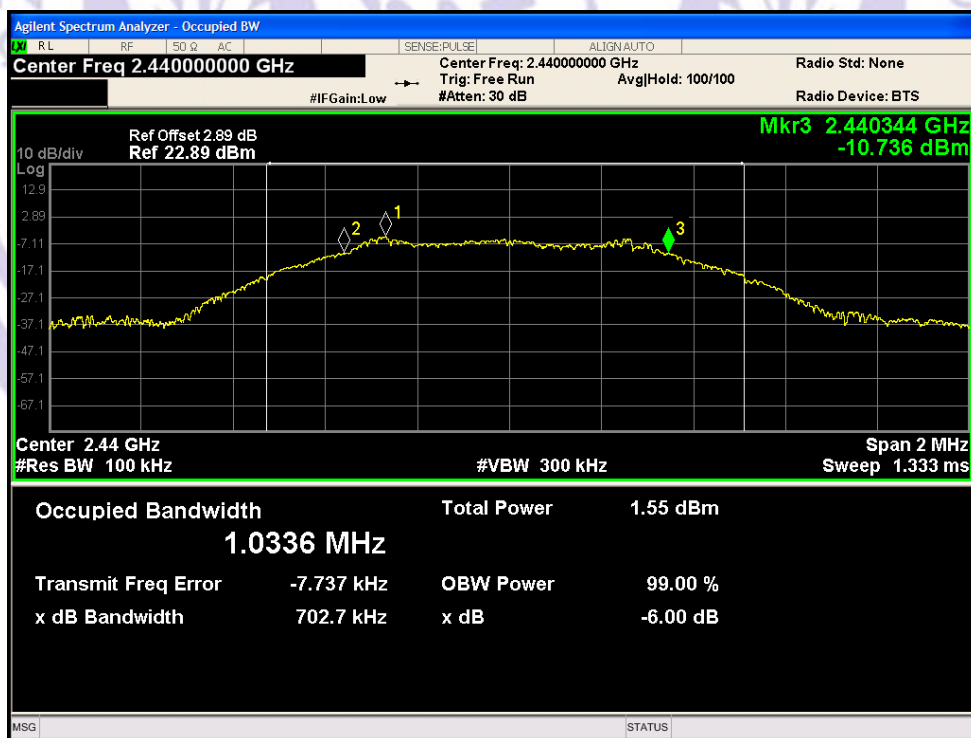

CH39

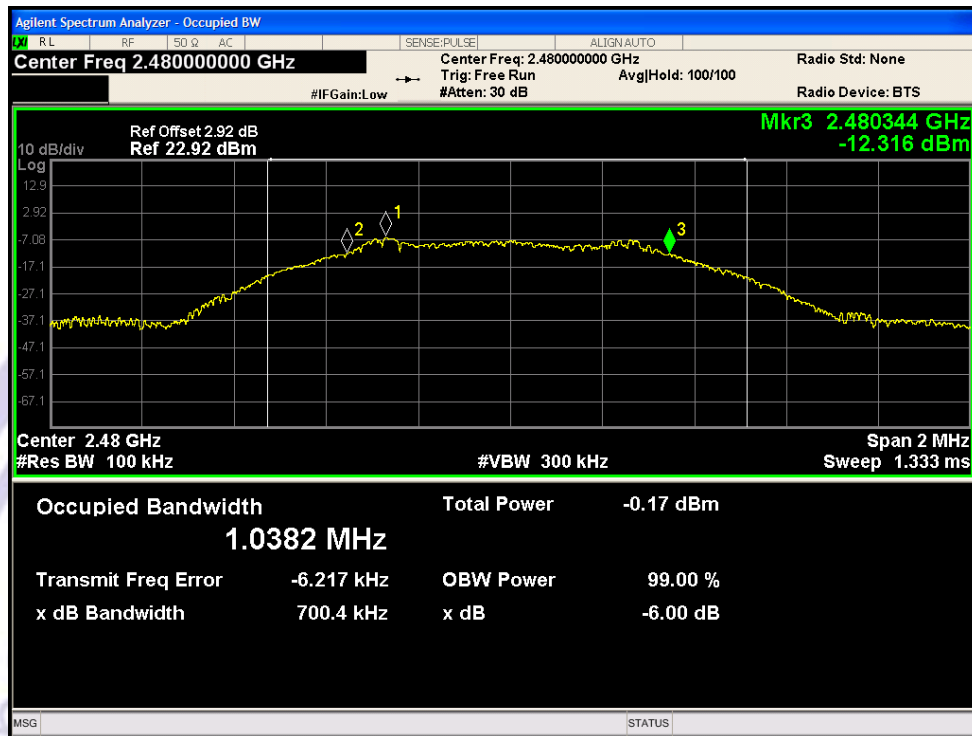

9 Maximum Peak Output Power

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10-2020

Test Limit : Regulation 15.247 (b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power.


9.1 Test Procedure

1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously.
3. Measure the conducted output power and record the results in the test report.


9.2 Test Result

Channel number	Channel Frequency (MHz)	Peak Power Output(dBm)	Peak Power Limit(dBm)	Verdict
00	2402	-1.93	30	PASS
19	2440	-1.44	30	PASS
39	2480	-0.33	30	PASS


CH00

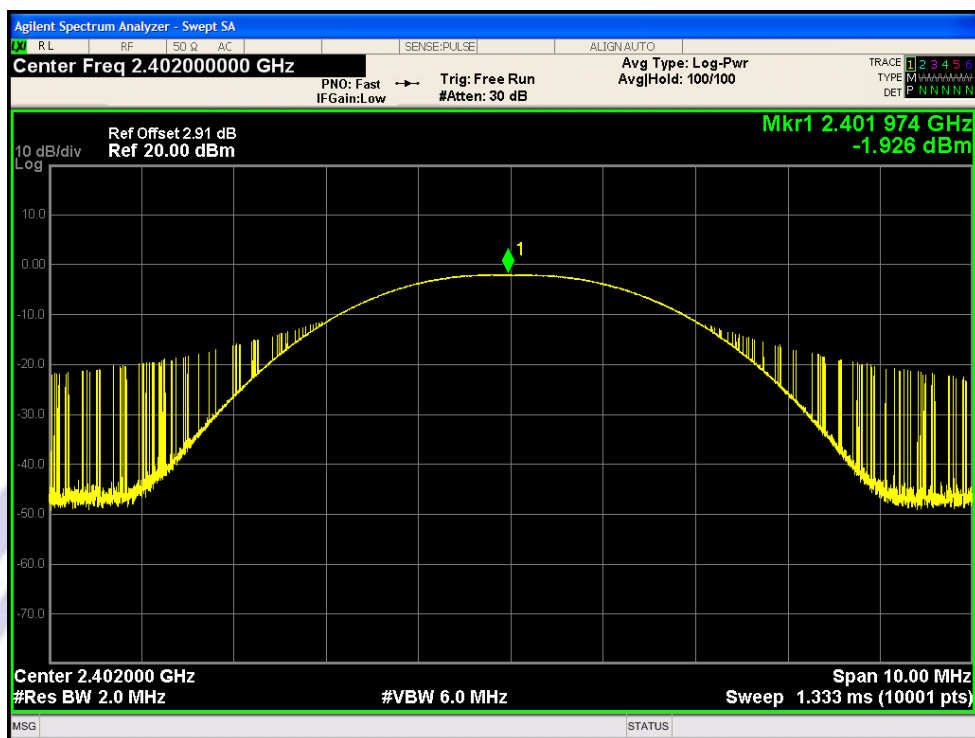

CH19

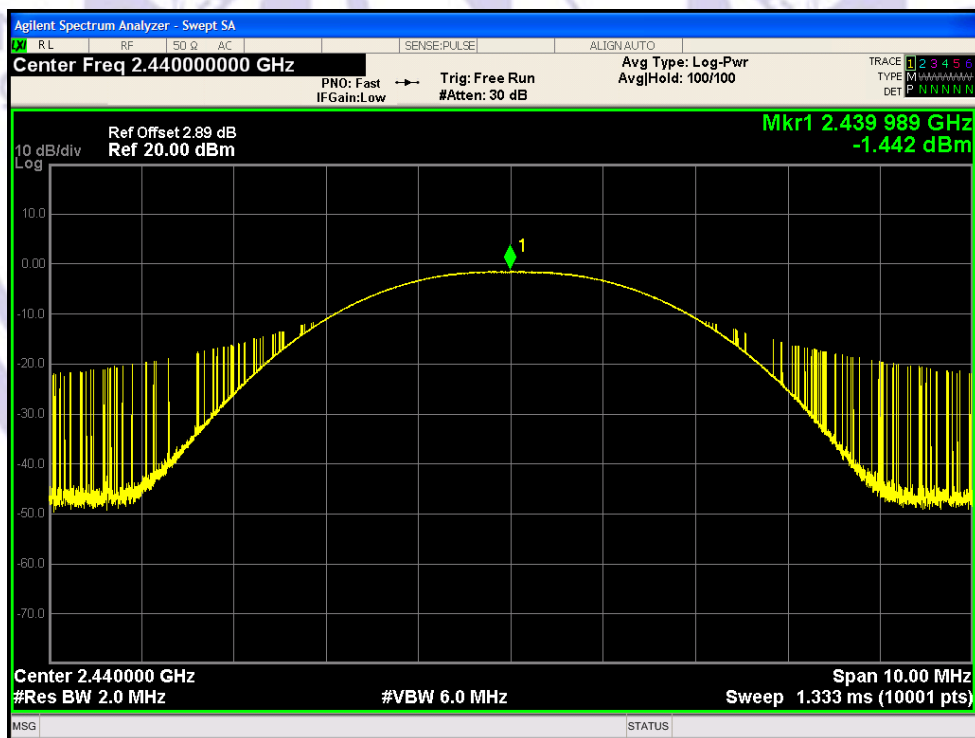

CH39

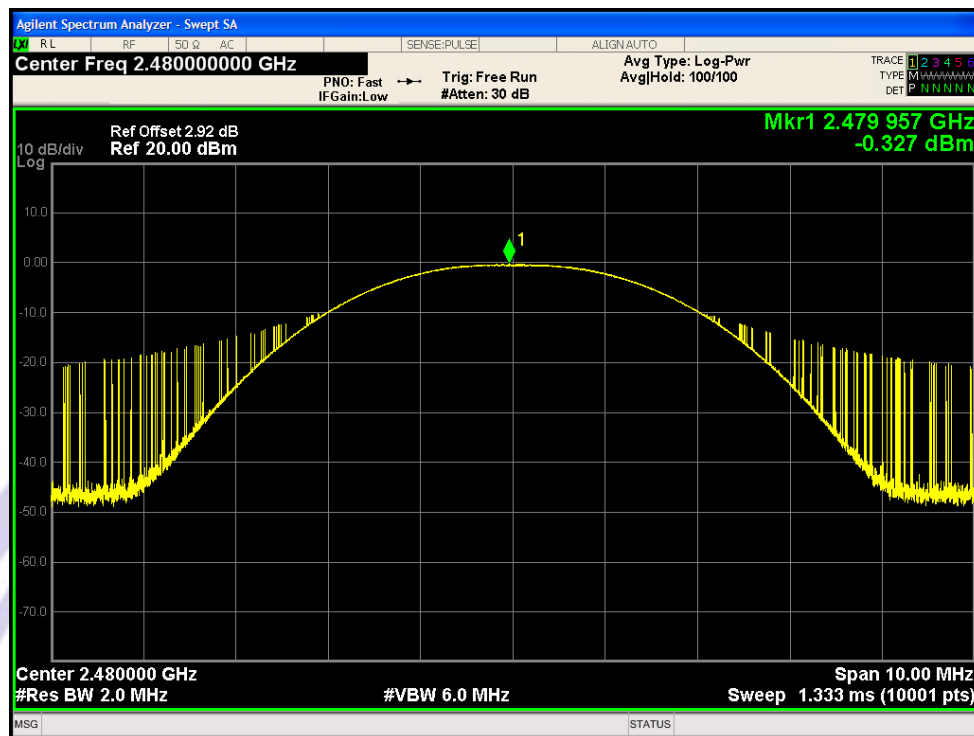

10 Power Spectral density

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10-2020
Test Limit	: Regulation 15.247(f) The power spectral density conducted from the intentional radiator to the antenna due to the digital modulation operation of the hybrid system, with the frequency hopping operation turned off, shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.


10.2 Test Result

Channel number	Channel frequency (MHz)	Measurement level (dBm)	Required Limit (dBm/3kHz)	Pass/Fail
		PSD/3kHz		
00	2402	-17.06	8	PASS
19	2440	-16.6	8	PASS
39	2480	-15.52	8	PASS


CH00

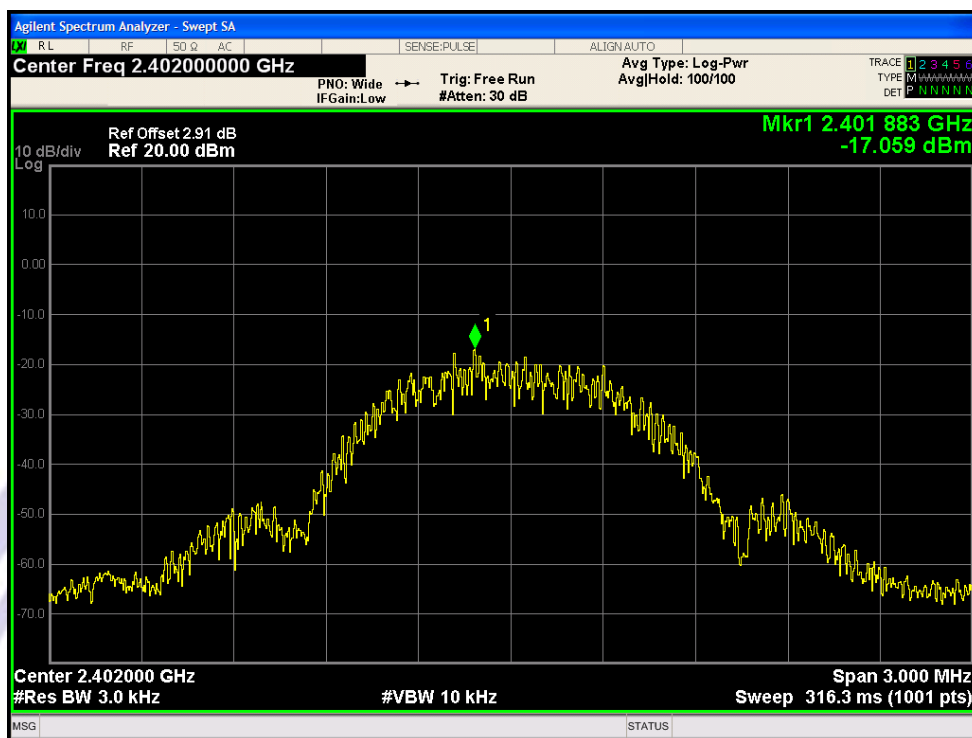

CH19

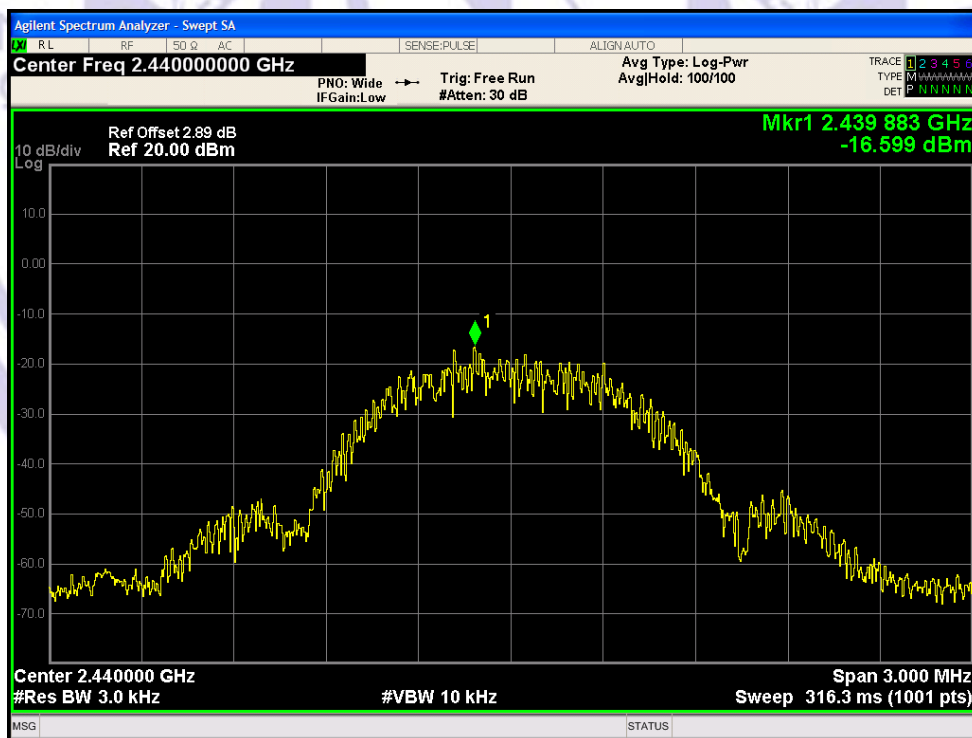

CH39

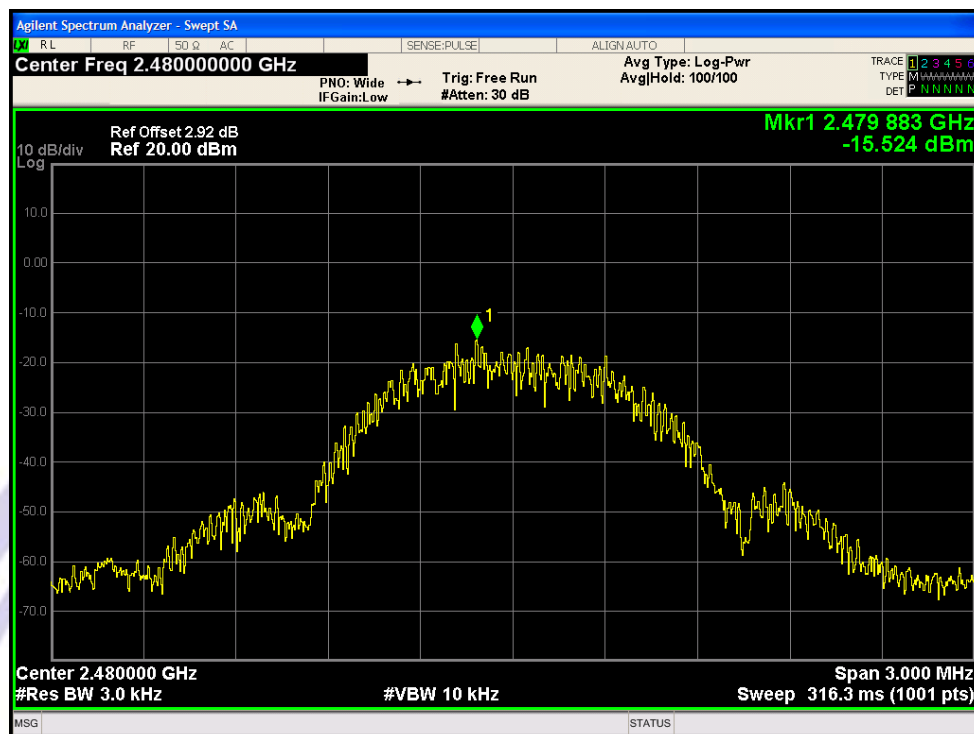

11 Antenna Application

11.1 Antenna Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(c) (1)(i) requirement:

Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

11.2 Result

The antenna is PCB antenna, the best case gain of the antennas is -5.35 dBi, reference to the attachment for details.

12 Test Setup Photos and EUT Photos

Please see the attachment for details.

*****THE END REPORT*****

