

FCC TEST REPORT

FCC ID: 2AWYK-XP-TT426B

Product : Label Printer, Thermal Printer, Thermal Barcode Printer,
Thermal Label Printer, Thermal Transfer Barcode Printer,
Mobile Printer

Model Name : XP-TT426B (Please refer to page 8-13)

Brand : **Xprinter** 芯烨

Report No. : NCT25049244XE-1

Prepared for

Zhuhai Xprinter Electronics Technology Co., Ltd.

**5/F, 1st Workshop, No.613 Huawei Road, Qianshan Industrial Zone, Xiangzhou District,
Zhuhai City, Guangdong Province, P.R.China**

Prepared by

Shenzhen NCT Testing Technology Co., Ltd.

**A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan District,
Shenzhen, People's Republic of China**

TEL: 400-8868-419

FAX: 86-755-27790922

1 TEST RESULT CERTIFICATION

Applicant's name : Zhuhai Xprinter Electronics Technology Co., Ltd.

Address : 5/F, 1st Workshop, No.613 Huawei Road, Qianshan Industrial Zone,
Xiangzhou District, Zhuhai City, Guangdong Province, P.R.China

Manufacture's name : Zhuhai Xprinter Electronics Technology Co., Ltd.

Address : 5/F, 1st Workshop, No.613 Huawei Road, Qianshan Industrial Zone,
Xiangzhou District, Zhuhai City, Guangdong Province, P.R.China

Product name : Label Printer, Thermal Printer, Thermal Barcode Printer, Thermal
Label Printer, Thermal Transfer Barcode Printer, Mobile Printer

Model name : XP-TT426B (Please refer to page 8-13)

Standards : FCC CFR47 Part 15 Section 15.247

Test procedure : ANSI C63.10-2020

Test Date : Nov. 03, 2024 to Nov. 14, 2024

Date of Issue : Dec. 04, 2024

This device described above has been tested by NCT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of NCT, this document may be altered or revised by NCT, personal only, and shall be noted in the revision of the document.

Test Engineer:


Keven Wu / Engineer

Technical Manager:


Henry Wang / Manager



Contents

Page

1 TEST RESULT CERTIFICATION	2
2 TEST SUMMARY	5
3 TEST FACILITY	6
4 GENERAL INFORMATION	7
4.1 GENERAL DESCRIPTION OF E.U.T.....	7
4.2 CHANNEL LIST	14
4.3 TEST SETUP CONFIGURATION	15
4.4 TEST MODE	15
5 EQUIPMENT DURING TEST	16
5.1 EQUIPMENTS LIST.....	16
5.2 MEASUREMENT UNCERTAINTY.....	18
5.3 DESCRIPTION OF SUPPORT UNITS.....	18
6 CONDUCTED EMISSION	19
6.1 E.U.T. OPERATION.....	19
6.2 EUT SETUP	19
6.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION).....	20
6.4 MEASUREMENT PROCEDURE:.....	20
6.5 CONDUCTED EMISSION LIMIT.....	20
6.6 MEASUREMENT DESCRIPTION.....	20
6.7 CONDUCTED EMISSION TEST RESULT	20
7 RADIATED SPURIOUS EMISSIONS	23
7.1 EUT OPERATION	23
7.2 TEST SETUP	24
7.3 SPECTRUM ANALYZER SETUP.....	24
7.4 TEST PROCEDURE.....	26
7.5 SUMMARY OF TEST RESULTS	27
8 MAXIMUM PEAK OUTPUT POWER TEST	30
8.1 TEST STANDARD AND LIMIT.....	33
8.2 TEST SETUP	33
8.3 TEST PROCEDURE.....	33
8.4 TEST DATA.....	33

9 20DB OCCUPY BANDWIDTH TEST	34
9.1 TEST STANDARD	34
9.2 TEST SETUP	34
9.3 TEST PROCEDURE	34
9.4 TEST DATA	34
10 CARRIER FREQUENCY SEPARATION TEST	35
10.1 TEST STANDARD AND LIMIT	35
10.2 TEST SETUP	35
10.3 TEST PROCEDURE	35
10.4 TEST DATA	35
11 NUMBER OF HOPPING CHANNEL TEST	36
11.1 TEST STANDARD AND LIMIT	36
11.2 TEST SETUP	36
11.3 TEST PROCEDURE	36
11.4 TEST DATA	36
12 DWELL TIME TEST	37
12.1 TEST STANDARD AND LIMIT	37
12.2 TEST SETUP	37
12.3 TEST PROCEDURE	37
12.4 TEST DATA	37
13 100KHZ BANDWIDTH OF FREQUENCY BAND EDGE REQUIREMENT	38
13.1 TEST STANDARD AND LIMIT	38
13.2 TEST SETUP	38
13.3 TEST PROCEDURE	38
13.4 TEST DATA	38
14 ANTENNA REQUIREMENT	39
14.1 TEST STANDARD AND REQUIREMENT	39
14.2 ANTENNA CONNECTED CONSTRUCTION	39
15 TEST SETUP & EUT PHOTOGRAPH	40

2 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
Conduct Emission	15.207	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Antenna Requirement	15.203	PASS

Remark:

1. "N/A" denotes test is not applicable in this Test report.

3 TEST FACILITY

Site Description

EMC Lab. : Accredited by CNAS, 2022-09-27

The certificate is valid until 2028.01.07

The Laboratory has been assessed and proved to be in compliance with
CNAS-CL01:2006 (identical to ISO/IEC 17025:2017)

The Certificate Registration Number is L8251

Designation Number: CN1347

Test Firm Registration Number: 894804

Accredited by A2LA, June 14, 2023

The Certificate Registration Number is 6837.01

Accredited by Industry Canada, November 09, 2018

The Conformity Assessment Body Identifier is CN0150

Company Number: 30806

Name of Firm : Shenzhen NCT Testing Technology Co., Ltd.

Site Location : A101&2F B2, Fuqiao 6th Area, Xintian Community, Fuhai Street, Baoan
District, Shenzhen, People's Republic of China

4 General Information

4.1 General Description of E.U.T.

Product Name	:	Label Printer, Thermal Printer, Thermal Barcode Printer, Thermal Label Printer, Thermal Transfer Barcode Printer, Mobile Printer
Model Name	:	XP-TT426B
series model	:	(Please refer to pages 8-13 for details)
Difference	:	All models are identical to each other except for product name and model name. All tests were performed on model XP-TT426B.
Sample ID	:	25049244-001#
Sample(s) Status	:	Engineer sample
Operating frequency	:	2402-2480MHz
Numbers of Channel	:	79 channels
Antenna Type	:	PCB antenna
Antenna Gain	:	4.85 dBi
Type of Modulation	:	GFSK
Power supply	:	Input: 24V $\overline{\sim}$ 2.5A
AC/DC ADAPTER Information	:	Model: YC60-2402500 Input: 100-240V~ 2.0A 50/60Hz Output: 24V 2.5A Manufacturer: ZHONGSHAN CITY YOUCHUANG ELECTRONICS TECHNOLOGY CO.,LTD
Remark: The Antenna gain is provided by customer from Antenna spec. and the laboratory will not be responsible for the accumulated calculation results, which covers the information provided by the applicant.		

Model list:

XP-T424B, XP-T425B, XP-T426B, XP-T427B, XP-T428B, XP-T429B, XP-T4210B, XP-T4211B, XP-T4212B, XP-T4213B, XP-T4214B, XP-T4215B, XP-T4216B, XP-T324B, XP-T325B, XP-T326B, XP-T327B, XP-T328B, XP-T329B, XP-T3210B, XP-T424B PRO, XP-T425B PRO, XP-T426B PRO, XP-T427B PRO, XP-T428B PRO, XP-T429B PRO, XP-T4210B PRO, XP-T4211B PRO, XP-T4212B PRO, XP-T4213B PRO, XP-T4214B PRO, XP-T4215B PRO, XP-T4216B PRO, XP-T324B PRO, XP-T325B PRO, XP-T326B PRO, XP-T327B PRO, XP-T328B PRO, XP-T329B PRO, XP-T3210B PRO, XP-T424B PLUS, XP-T425B PLUS, XP-T426B PLUS, XP-T427B PLUS, XP-T428B PLUS, XP-T429B PLUS, XP-T4210B PLUS, XP-T4211B PLUS, XP-T4212B PLUS, XP-T4213B PLUS, XP-T4214B PLUS, XP-T4215B PLUS, XP-T4216B PLUS, XP-T324B PLUS, XP-T325B PLUS, XP-T326B PLUS, XP-T327B PLUS, XP-T328B PLUS, XP-T329B PLUS, XP-T3210B PLUS, XP-T434B, XP-T435B, XP-T436B, XP-T437B, XP-T438B, XP-T439B, XP-T4310B, XP-T4311B, XP-T4312B, XP-T4313B, XP-T4314B, XP-T4315B, XP-T4316B, XP-T334B, XP-T335B, XP-T336B, XP-T337B, XP-T338B, XP-T339B, XP-T3310B, XP-T434B PRO, XP-T435B PRO, XP-T436B PRO, XP-T437B PRO, XP-T438B PRO, XP-T439B PRO, XP-T4310B PRO, XP-T4311B PRO, XP-T4312B PRO, XP-T4313B PRO, XP-T4314B PRO, XP-T4315B PRO, XP-T4316B PRO, XP-T334B PRO, XP-T335B PRO, XP-T336B PRO, XP-T337B PRO, XP-T338B PRO, XP-T339B PRO, XP-T3310B PRO, XP-T434B PLUS, XP-T435B PLUS, XP-T436B PLUS, XP-T437B PLUS, XP-T438B PLUS, XP-T439B PLUS, XP-T4310B PLUS, XP-T4311B PLUS, XP-T4312B PLUS, XP-T4313B PLUS, XP-T4314B PLUS, XP-T4315B PLUS, XP-T4316B PLUS, XP-T334B PLUS, XP-T335B PLUS, XP-T336B PLUS, XP-T337B PLUS, XP-T338B PLUS, XP-T339B PLUS, XP-T3310B PLUS, XP-T433B, XP-H400B, XP-H400E, XP-H500A, XP-H500B, XP-H500BC, XP-H500E, XP-H500EC, XP-TT424B, XP-T4601B, XP-T4501B, XP-TT428B, XP-TT426B, XP-TT325B, XP-TT435B, XP-TT425B, XP-H400A, XP-TT437B, XP-TT436B, XP-TT434B, XP-TT335B, XP-T4601B, 4B-2054TD, 4B-2054TE, 4B-2054TF, 4B-2054TG, 4B-2054TH, 4B-2054TI, 4B-2054TJ, 4B-2054TK, 4B-3044TD, 4B-3054TE, 4B-3054TF, 4B-3054TG, 4B-3054TH, 4B-3054TI, 4B-3054TJ, 4B-3054TK, 4B-3044TF, 4B-3044TG, 4B-3044TH, 4B-3044TI, 4B-3044TJ, 4B-3044TK, 4B-2044TA, 4B-2054TA, 4B-2064TA, 4B-2074TA, 4B-2084TA, 4B-2094TA, 4B-2104TA, 4B-2114TA, 4B-2124TA, 4B-2134TA, 4B-2144TA, 4B-2154TA, 4B-2164TA, 4B-2033TA, 4B-2043TA, 4B-2053TA, 4B-2063TA, 4B-2073TA, 4B-2083TA, 4B-2093TA, 4B-2103TA, 4B-2044TB, 4B-2054TB, 4B-2064TB, 4B-2074TB, 4B-2084TB, 4B-2094TB, 4B-2104TB, 4B-2114TB, 4B-2124TB, 4B-2134TB, 4B-2144TB, 4B-2154TB, 4B-2164TB, 4B-2033TB, 4B-2043TB, 4B-2053TB, 4B-2063TB, 4B-2073TB, 4B-2083TB, 4B-2093TB, 4B-2103TB, 4B-2044TC, 4B-2054TC, 4B-2064TC, 4B-2074TC, 4B-2084TC, 4B-2094TC, 4B-2104TC, 4B-2114TC, 4B-2124TC, 4B-2134TC, 4B-2144TC, 4B-2154TC, 4B-2164TC, 4B-2033TC, 4B-2043TC, 4B-2053TC, 4B-2063TC, 4B-2073TC, 4B-2083TC, 4B-2093TC, 4B-2103TC, 4B-2082TA, 4B-2072TA, 4B-2092TA, 4B-2082TB, 4B-2072TB, 4B-2092TB, 4B-2082TC, 4B-2072TC, 4B-2092TC, 4B-3034TA, 4B-3044TA, 4B-3054TA, 4B-3064TA, 4B-3074TA, 4B-3084TA, 4B-3094TA, 4B-3104TA, 4B-3114TA, 4B-3124TA, 4B-3134TA, 4B-3144TA, 4B-3154TA, 4B-3164TA, 4B-3033TA, 4B-3043TA, 4B-3053TA, 4B-3063TA, 4B-3073TA, 4B-3083TA, 4B-3093TA, 4B-3103TA, 4B-3034TB, 4B-3044TB, 4B-3054TB, 4B-3064TB, 4B-3074TB, 4B-3084TB, 4B-3094TB, 4B-3104TB, 4B-3114TB, 4B-3124TB, 4B-3134TB, 4B-3144TB, 4B-3154TB, 4B-3164TB, 4B-3033TB, 4B-3043TB, 4B-3053TB, 4B-3063TB, 4B-3073TB, 4B-3083TB, 4B-3093TB, 4B-3103TB, 4B-3034TC, 4B-3044TC, 4B-3054TC, 4B-3064TC, 4B-3074TC, 4B-3084TC, 4B-3094TC, 4B-3104TC, 4B-3114TC, 4B-3124TB, 4B-3134TC, 4B-3144TC, 4B-3154TC, 4B-3164TC, 4B-3033TC, 4B-3043TC, 4B-3053TB, 4B-3063TC, 4B-3073TC, 4B-3083TC, 4B-3093TC, 4B-3103TC, DL-TB424, DL-TB425, DL-TB426, DL-TB427, DL-TB428, DL-TB429, DL-TB4210, DL-TB4211, DL-TB4212, DL-TB4213, DL-TB4214, DL-TB4215, DL-TB4216, DL-TB324, DL-TB325, DL-TB326, DL-TB327, DL-TB328, DL-TB329, DL-TB3210, DL-TB434, DL-TB435, DL-TB436, DL-TB437, DL-TB438, DL-TB439, DL-TB4310, DL-TB4311, DL-TB4312, DL-TB4313, DL-TB4314, DL-TB4315, DL-

TB4316, DL-TB334, DL-TB335, DL-TB336, DL-TB337, DL-TB338, DL-TB339, DL-TB3310, XP-T451B, XP-T452B, XP-T453B, XP-T454B, XP-T455B, XP-T456B, XP-T457B, XP-T458B, XP-T459B, XP-T461B, XP-T462B, XP-T463B, XP-T464B, XP-T465B, XP-T466B, XP-T467B, XP-T468B, XP-T469B, XP-T451E, XP-T452E, XP-T453E, XP-T454E, XP-T455E, XP-T456E, XP-T457E, XP-T458E, XP-T459E, XP-T461E, XP-T462E, XP-T463E, XP-T464E, XP-T465E, XP-T466E, XP-T467E, XP-T468E, XP-T469E, XP-T251B, XP-T252B, XP-T253B, XP-T254B, XP-T255B, XP-T251E, XP-T252E, XP-T253E, XP-T254E, XP-T255E, XP-T261B, XP-T262B, XP-T263B, XP-T264B, XP-T265B, XP-T261E, XP-T262E, XP-T263E, XP-T264E, XP-T265E, XP-T281B, XP-T282B, XP-T283B, XP-T284B, XP-T285B, XP-T281E, XP-T282E, XP-T283E, XP-T284E, XP-T285E, XP-D251B, XP-D252B, XP-D253B, XP-D254B, XP-D255B, XP-D251E, XP-D252E, XP-D253E, XP-D254E, XP-D255E, XP-D261B, XP-D262B, XP-D263B, XP-D264B, XP-D265B, XP-D261E, XP-D262E, XP-D263E, XP-D264E, XP-D265E, XP-D281B, XP-D282B, XP-D283B, XP-D284B, XP-D285B, XP-D281E, XP-D282E, XP-D283E, XP-D284E, XP-D285E, XP-425E, XP-426E, XP-427E, XP-428E, XP-429E, XP-D28E, XP-D281E, XP-D282E, XP-D283E, XP-D284E, XP-D285E, Z1, T001, Z1Plus, T001Plus, 410B, 420B, D463B, D465B, DB401, DB402, DB403, DB404, DB405, DB406, DB407, DB408, DB409, DB410, DB411, DB412, DB413, DB414, DB415, DB416, DB417, DB418, DB419, DB420, DB421, DB422, DB423, DB424, DB425, DB426, DB427, DB428, DB429, DB430, DB301, DB302, DB303, DB304, DB305, DB306, DB307, DB308, DB309, DB310, DB201, DB202, DB203, DB204, DB205, DB206, DB207, DB208, DB209, DB210, PB201, PB202, PB203, PB204, PB205, PB301, PB302, PB303, PB304, PB305, PB401, PB402, PB403, PB404, PB405, XP-425E, XP-426E, XP-427E, XP-428E, XP-429E, XP-D28E, XP-H500BE, XP-H500ER, XP-T451BR, XP-T451ER, XP-T454BR, XP-T454ER, 4B-2054TAR, 4B-3044TAR, 4B-2054TGR, 4B-3044TGR, 4B-2054TIR, 4B-3044TIR, XP-D281E, 4B-2033A, 4B-2034A, XHT400, XHT4100, XHT1450, XHT1480, XHT2460, XHT2480, XHT420, XHT4255, XHT4266, XHT4288, XHT4200C, XHT4260C, XHT4280C, XHT430, XHT4310, XHT4360, XHT4380, XHT4300C, XHT435C, XHT4399C, XHT426, XHT428, LPK240, LPK-240, LPK240C, LPK-240C, 4B-2052TA, 4B-2052TB, 4B-2052TC, 4B-2052TD, 4B-2052TE, 4B-2052TF, 4B-2062TA, 4B-2062TB, 4B-2062TC, 4B-2062TD, 4B-2062TE, 4B-2062TF, 4B-2082TA, 4B-2082TB, 4B-2082TC, 4B-2082TD, 4B-2082TE, 4B-2082TF, 4B-3052TA, 4B-3052TB, 4B-3052TC, 4B-3052TD, 4B-3052TE, 4B-3052TF, 4B-3062TA, 4B-3062TB, 4B-3062TC, 4B-3062TD, 4B-3062TE, 4B-3062TF, 4B-3082TA, 4B-3082TB, 4B-3082TC, 4B-3082TD, 4B-3082TE, 4B-3082TF, 4B-2052A, 4B-2052B, 4B-2052C, 4B-2052D, 4B-2052E, 4B-2052F, 4B-2062A, 4B-2062B, 4B-2062C, 4B-2062D, 4B-2062E, 4B-2062F, 4B-2082A, 4B-2082B, 4B-2082C, 4B-2082D, 4B-2082E, 4B-2082F, 4B-3052A, 4B-3052B, 4B-3052C, 4B-3052D, 4B-3052E, 4B-3052F, 4B-3062A, 4B-3062B, 4B-3062C, 4B-3062D, 4B-3062E, 4B-3062F, 4B-3082A, 4B-3082B, 4B-3082C, 4B-3082D, 4B-3082E, 4B-3082F, 4B-2044PA, 4B-2044PB, 4B-2044PC, 4B-2044PD, 4B-2044PE, 4B-2054PB, 4B-2054PC, 4B-2054PD, 4B-2054PE, 4B-2033PD, 4B-2033PE, 4B-2043PD, 4B-2043PE, 4B-2053PD, 4B-2053PE, 4B-2032PA, 4B-2032PB, 4B-2032PC, 4B-2032PD, 4B-2032PE, 4B-2042PD, 4B-2042PE, 4B-2052PD, 4B-2052PE, 4B-2062PD, 4B-2062PE, GS400ZS, GS406ZS, GS410ZS, GS416ZS, GS420ZS, GS426ZS, GS430ZS, GS436ZS, GS440ZS, GS446ZS, GS450ZS, GS456ZS, XP-T7, XP-T7K, XP-T6, XP-T6K, XP-T8, XP-T9, XP-T8S, XP-T11, XP-T11K, XP-T8A, XP-T8B, XP-T8BK, XP-T8K, XP-T2L, XP-T2KL, XP-T2K, XP-T2, XP-T1, XP-T1K, XP-T3, XP-T4, XP-T4K, XP-T4KS, XP-T10, XP-T10K, XP-T3K, XP-T5, XP-T5K, XP-T12, XP-T12K, XP-T13, XP-T13K, XP-T14, XP-T14K, XP-T15, XP-T15K, XP-T16, XP-T16K, XP-T17, XP-T17K, XP-T18, XP-T18K, XP-T19, XP-T19K, XP-T20, XP-T20K, XP-T21, XP-T21K, XP-T22, XP-T22K, XP-T4201, XP-T4202, XP-T4203, XP-T4204, XP-T4205, XP-T4206, XP-T4207, XP-T4208, XP-T4209, XP-T4301, XP-T4302, XP-T4303, XP-T4304, XP-T4305, XP-T4306, XP-T4307, XP-T4308, XP-T4309, XP-T4211, XP-T4212, XP-T4213, XP-T4214, XP-T4215, XP-T4216, XP-T4217, XP-T4218, XP-T4219, XP-T4311, XP-T4312, XP-

T4313, XP-T4314, XP-T4315, XP-T4316, XP-T4317, XP-T4318, XP-T4319, XP-T4221, XP-T4222, XP-T4223, XP-T4224, XP-T4225, XP-T4226, XP-T4227, XP-T4228, XP-T4229, XP-T4321, XP-T4322, XP-T4323, XP-T4324, XP-T4325, XP-T4326, XP-T4327, XP-T4328, XP-T4329, XP-H500BR, XP-H500ER, XP-T454BR, XP-T454ER, XP-T451BR, XP-T451ER, XP-T452BR, XP-T452ER, XP-T453BR, XP-T453ER, 4B-2054TGR, 4B-3044TGR, 4B-2054TAR, 4B-3044TAR, 4B-2054TGR, 4B-3044TGR, 4B-2054TIR, 4B-3044TIR, XP-TT424B PRO, XP-TT429B, XP-TT439B, XP-H400BC, XP-H400EC, XP-420A, XP-421A, XP-422A, XP-423A, XP-424A, XP-425A, XP-426A, XP-427A, XP-428A, XP-429A, XP-D888B, XP-D666B, XP-D777B, XP-D111B, XP-D222B, XP-D333B, XP-D444B, XP-D555B, XP-D999B, XP-D888E, XP-D666E, XP-D777E, XP-D111E, XP-D222E, XP-D333E, XP-D444E, XP-D555E, XP-D999E, XP-D25B, XP-D251B, XP-D252B, XP-D253B, XP-D254B, XP-D255B, XP-D24E, XP-D241E, XP-D242E, XP-D243E, XP-D244E, XP-D245E, XP-D26B, XP-D261B, XP-D262B, XP-D263B, XP-D264B, XP-D265B, XP-D266B, XP-D267B, XP-D25E, XP-D251E, XP-D252E, XP-D253E, XP-D254E, XP-D28B, XP-D281B, XP-D282B, XP-D283B, XP-D284B, XP-D285B, XP-D35B, XP-D351B, XP-D352B, XP-D353B, XP-D354B, XP-D355B, XP-D356B, XP-D357B, XP-D358B, XP-D359B, XP-D34E, XP-D341E, XP-D342E, XP-D343E, XP-D344E, XP-D345E, XP-D346E, XP-D347E, XP-D348E, XP-D349E, XP-D32F, XP-D321F, XP-D322F, XP-D36B, XP-D361B, XP-D362B, XP-D363B, XP-D364B, XP-D365B, XP-D366B, XP-D367B, XP-D368B, XP-D369B, XP-D35E, XP-D351E, XP-D352E, XP-D353E, XP-D354E, XP-D355E, XP-D356E, XP-D357E, XP-D358E, XP-D359E, XP-D46B, XP-D461B, XP-D462B, XP-D463B, XP-D464B, XP-D465B, XP-D466B, XP-D467B, XP-D468B, XP-D469B, XP-D451E, XP-D452E, XP-D453E, XP-D454E, XP-D455E, XP-D456E, XP-D457E, XP-D458E, XP-D459E, XP-D63B, XP-D631B, XP-D632B, XP-D633B, XP-D634B, XP-D635B, XP-D63E, XP-D631E, XP-D632E, XP-D633E, XP-D634E, XP-D635E, XP-D84B, XP-D841B, XP-D842B, XP-D843B, XP-D844B, XP-D845B, XP-D84E, XP-D841E, XP-D842E, XP-D843E, XP-D844E, XP-D845E, XP-450B, XP-460B, XP-470B, XP-480B, XP-490B, XP-420B, XP-421B, XP-422B, XP-423B, XP-424B, XP-425B, XP-426B, XP-427B, XP-428B, XP-429B, XP-DT426B, XP-DT427B, XP-DT428B, XP-DT425B, XP-DT326B, XP-450E, XP-DT325B, XP-410B, XP-410E, XP-420E, XP-460E, XP-470E, XP-480E, XP-490E, XP-D3601B, XP-D4601B, XP-D4602B, XP-470BII, XP-430B, XP-421B, XP-422B, XP-423B, XP-424B, XP-421E, XP-422E, XP-423E, XP-424E, 4B-2044A, 4B-2054A, 4B-2064A, 4B-2074A, 4B-2084A, 4B-2094A, 4B-2104A, 4B-2114A, 4B-2124A, 4B-2134A, 4B-2144A, 4B-2154A, 4B-2164A, 4B-2043A, 4B-2053A, 4B-2063A, 4B-2073A, 4B-2083A, 4B-2093A, 4B-20103A, 4B-3044A, 4B-3054A, 4B-3064A, 4B-3074A, 4B-3084A, 4B-3094A, 4B-3104A, 4B-3114A, 4B-3124A, 4B-3134A, 4B-3144A, 4B-3154A, 4B-3164A, 4B-2044B, 4B-2054B, 4B-2064B, 4B-2074B, 4B-2084B, 4B-2094B, 4B-2104B, 4B-2114B, 4B-2124B, 4B-2134B, 4B-2144B, 4B-2154B, 4B-2164B, 4B-2043B, 4B-2053B, 4B-2063B, 4B-2073B, 4B-2083B, 4B-2093B, 4B-20103B, 4B-3044B, 4B-3054B, 4B-3064B, 4B-3074B, 4B-3084B, 4B-3094B, 4B-3104B, 4B-3114B, 4B-3124B, 4B-3134B, 4B-3144B, 4B-3154B, 4B-3164B, 4B-2044C, 4B-2054C, 4B-2064C, 4B-2074C, 4B-2084C, 4B-2094C, 4B-2104C, 4B-2114C, 4B-2124C, 4B-2134C, 4B-2144C, 4B-2154C, 4B-2164C, 4B-2043C, 4B-2053C, 4B-2063C, 4B-2073C, 4B-2083C, 4B-2093C, 4B-20103C, 4B-3044C, 4B-3054C, 4B-3064C, 4B-3074C, 4B-3084C, 4B-3094C, 4B-3104C, 4B-3114C, 4B-3124C, 4B-3134C, 4B-3144C, 4B-3154C, 4B-3164C, 4B-2054D, 4B-2054G, 4B-2054H, 4B-2054I, 4B-2054K, 4B-2054L, 4B-2054M, 4B-2054N, 4B-2074D, 4B-2074E, 4B-2074F, 4B-2074G, 4B-2074H, 4B-3034A, 4B-3034B, 4B-2054E, 4B-2054F, 4B-2082A, 4B-2072A, 4B-2092A, 4B-2082B, 4B-2072B, 4B-2092B, 4B-2082C, 4B-2072C, 4B-2092C, DL-DB424, DL-DB425, DL-DB426, DL-DB427, DL-DB428, DL-DB429, DL-DB4210, DL-DB4211, DL-DB4212, DL-DB4213, DL-DB4214, DL-DB4215, DL-DB4216, DL-DB324, DL-DB325, DL-DB326, DL-DB327, DL-DB328, DL-DB329, DL-DB3210, XP-D4603B, XP-D4604B, GS310Z, GS311Z, GS312Z, GS313Z, GS314Z, GS315Z, GS316Z,

GS330Z, GS336Z, GS340Z, GS346Z, GS350Z, GS356Z, GS400Z, GS406Z, GS440Z, GS446Z, GS450Z, GS456Z, GS410Z, GS416Z, GS436Z, GS430Z, GS431Z, GS432Z, GS420Z, GS426Z,

XP-D361B, XP-D362B, XP-D363B, XP-D364B, XP-D365B, XP-D366B, XP-D367B, XP-D371B, XP-D372B, XP-D373B, XP-D381B, XP-D382B, XP-D3601B, XP-D3602B, XP-DT325B, XP-D46B, XP-D461B, XP-D462B, XP-D463B, XP-D464B, XP-D465B, XP-D466B, XP-D467B, XP-D468B, XP-D469B, XP-D46E, XP-D461E, XP-D462E, XP-D463E, XP-D464E, XP-D465E, XP-D466E, XP-D467E, XP-D468E, XP-D469E, XP-DT108E, XP-DT108B, KDP300, KDP330, KDP1230, KDP1800, KDP3260, KDP6800, KDP3600, KDP3800, XP-P8, XP-P81, XP-P82, XP-P83, XP-P84, XP-P85, XP-P86, XP-P87, XP-P88, XP-P89, XP-D8, XP-D81, XP-D82, XP-D83, XP-D84, XP-D85, XP-D86, XP-D87, XP-D88, XP-D89, XP-T8, XP-T81, XP-T82, XP-T83, XP-T84, XP-T85, XP-T86, XP-T87, XP-T88, XP-T89, XP-PT8, XP-PT81, XP-PT82, XP-PT83, XP-PT84, XP-PT85, XP-PT86, XP-PT87, XP-PT88, XP-PT89, XP-PT8B, XP-PT81B, XP-PT82B, XP-PT83B, XP-PT84B, XP-PT85B, XP-PT86B, XP-PT87B, XP-PT88B, XP-PT89B, XP-PT8E, XP-PT81E, XP-PT82E, XP-PT83E, XP-PT84E, XP-PT85E, XP-PT86E, XP-PT87E, XP-PT88E, XP-PT89E, TP4, TP5, TP6, TP7, TP8, XP-P8101B, 4B-2081PA, 4B-2082PA, 4B-2083PA, 4B-2084PA, 4B-2085PA, 4B-2081PB, 4B-2082PB, 4B-2083PB, 4B-2084PB, 4B-2085PB, 4B-2081PC, 4B-2082PC, 4B-2083PC, 4B-2084PC, 4B-2085PC, 4B-2081PTA, 4B-2082PTA, 4B-2083PTA, 4B-2084PTA, 4B-2081PTB, 4B-2082PTB, 4B-2083PTB, 4B-2084PTB, 4B-2081PTC, 4B-2082PTC, 4B-2083PTC, 4B-2084PTC, 4B-2081A, 4B-2082A, 4B-2083A, 4B-2084A, 4B-2081B, 4B-2082B, 4B-2083B, 4B-2084B, 4B-2081C, 4B-2082C, 4B-2083C, 4B-2084C, MAP140, MAP420, MAP466, MAP4515, MAP-488, MAP-4570, MAP-4890E, MAP-4600, XP-P11B, XP-P111B, XP-P112B, XP-P113B, XP-P114B, XP-P115B, XP-P116B, XP-P117B, XP-P118B, XP-P119B, XP-P111C

XP-P11E, XP-P111E, XP-P112E, XP-P113E, XP-P114E, XP-P115E, XP-P12B, XP-P121B, XP-P122B, XP-P123B, XP-P124B, XP-P125B, XP-P126B, XP-P127B, XP-P128B, XP-P129B, XP-P121C, XP-P12E, XP-P121E, XP-P122E, XP-P123E, XP-P124E, XP-P125E, XP-P13B, XP-P131B, XP-P132B, XP-P133B, XP-P134B, XP-P135B, XP-P136B, XP-P137B, XP-P138B, XP-P139B, XP-P131C, XP-P14B, XP-P141B, XP-P142B, XP-P143B, XP-P144B, XP-P145B, XP-P146B, XP-P147B, XP-P148B, XP-P149B, XP-P141C, XP-P13E, XP-P131E, XP-P132E, XP-P133E, XP-P134E, XP-P135E, XP-P15B, XP-P151B, XP-P152B, XP-P153B, XP-P154B, XP-P155B, XP-P156B, XP-P157B, XP-P158B, XP-P159B, XP-P151C, XP-P16B, XP-P161B, XP-P162B, XP-P163B, XP-P164B, XP-P165B, XP-P166B, XP-P167B, XP-P168B, XP-P169B, XP-P161C, XP-P14E, XP-P141E, XP-P142E, XP-P143E, XP-P144E, XP-P145E, XP-P18B, XP-P181B, XP-P182B, XP-P183B, XP-P184B, XP-P16E, XP-P161E, XP-P162E, XP-P21B, XP-P211B, XP-P212B, XP-P213B, XP-P214B, XP-P215B, XP-P216B, XP-P217B, XP-P218B, XP-P219B, XP-P211C, XP-P21E, XP-P211E, XP-P212E, XP-P213E, XP-P214E, XP-P215E, XP-P22B, XP-P221B, XP-P222B, XP-P223B, XP-P224B, XP-P225B, XP-P226B, XP-P227B, XP-P228B, XP-P229B, XP-P221C, XP-P22E, XP-P221E, XP-P222E, XP-P223E, XP-P224E, XP-P225E, XP-P23B, XP-P231B, XP-P232B, XP-P233B, XP-P234B, XP-P235B, XP-P236B, XP-P237B, XP-P238B, XP-P239B, XP-P231C,

XP-P24B, XP-P241B, XP-P242B, XP-P243B, XP-P244B, XP-P245B, XP-P246B, XP-P247B, XP-P248B, XP-P249B, XP-P241C,

XP-P23E, XP-P231E, XP-P232E, XP-P233E, XP-P234E, XP-P235E, XP-P25B, XP-P251B, XP-P252B, XP-P253B, XP-P254B, XP-P255B, XP-P256B, XP-P257B, XP-P258B, XP-P259B, XP-P251C, XP-P26B, XP-P261B, XP-P262B, XP-P263B, XP-P264B, XP-P265B,

XP-P266B, XP-P267B, XP-P268B, XP-P269B, XP-P261C, XP-P24E, XP-P241E, XP-P242E, XP-P243E, XP-P244E, XP-P245E, XP-P28B, XP-P281B, XP-P282B, XP-P283B, XP-P284B, XP-P26E, XP-P261E, XP-P262E, XP-P31B, XP-P311B, XP-P312B, XP-P313B, XP-P314B, XP-P315B, XP-P316B, XP-P317B, XP-P318B, XP-P319B, XP-P311C, XP-P31E, XP-P311E, XP-P312E, XP-P313E, XP-P314E, XP-P315E, XP-P32B, XP-P321B, XP-P322B, XP-P323B, XP-P324B, XP-P325B, XP-P326B, XP-P327B, XP-P328B, XP-P329B, XP-P321C, XP-P32E, XP-P321E, XP-P322E, XP-P323E, XP-P324E, XP-P325E, XP-P33B, XP-P331B, XP-P332B, XP-P333B, XP-P334B, XP-P335B, XP-P336B, XP-P337B, XP-P338B, XP-P339B, XP-P331C, XP-P34B, XP-P341B, XP-P342B, XP-P343B, XP-P344B, XP-P345B, XP-P346B, XP-P347B, XP-P348B, XP-P349B, XP-P341C, XP-P341C, XP-P342C, XP-P343C, XP-P344C, XP-P345C, XP-P346C, XP-P347C, XP-P348C, XP-P349C, XP-P341D, XP-P33E, XP-P331E, XP-P332E, XP-P333E, XP-P334E, XP-P335E, XP-P336E, XP-P337E, XP-P338E, XP-P339E, XP-P331A, XP-P35B, XP-P351B, XP-P352B, XP-P353B, XP-P354B, XP-P355B, XP-P356B, XP-P357B, XP-P358B, XP-P359B, XP-P351C, XP-P351C, XP-P352C, XP-P353C, XP-P354C, XP-P355C, XP-P356C, XP-P357C, XP-P358C, XP-P359C, XP-P351D, XP-P36B, XP-P361B, XP-P362B, XP-P363B, XP-P364B, XP-P365B, XP-P366B, XP-P367B, XP-P368B, XP-P369B, XP-P361C, XP-P34E, XP-P341E, XP-P342E, XP-P343E, XP-P344E, XP-P345E, XP-P38B, XP-P381B, XP-P382B, XP-P383B, XP-P36E, XP-P361E, XP-P362E, XP-P41B, XP-P411B, XP-P412B, XP-P413B, XP-P414B, XP-P415B, XP-P416B, XP-P417B, XP-P418B, XP-P419B, XP-P411C, XP-P41E, XP-P411E, XP-P412E, XP-P413E, XP-P414E, XP-P415E, XP-P42B, XP-P421B, XP-P422B, XP-P423B, XP-P424B, XP-P425B, XP-P426B, XP-P427B, XP-P428B, XP-P429B, XP-P421C, XP-P42E, XP-P421E, XP-P422E, XP-P423E, XP-P424E, XP-P425E, XP-P426E, XP-P427E, XP-P428E, XP-P429E, XP-P421A, XP-P43B, XP-P431B, XP-P432B, XP-P433B, XP-P434B, XP-P435B, XP-P436B, XP-P437B, XP-P438B, XP-P439B, XP-P431C, XP-P431C, XP-P432C, XP-P433C, XP-P434C, XP-P435C, XP-P436C, XP-P437C, XP-P438C, XP-P439C, XP-P431D, XP-P44B, XP-P441B, XP-P442B, XP-P443B, XP-P444B, XP-P445B, XP-P446B, XP-P447B, XP-P448B, XP-P449B, XP-P441C, XP-P441C, XP-P442C, XP-P443C, XP-P444C, XP-P445C, XP-P446C, XP-P447C, XP-P448C, XP-P449C, XP-P441D, XP-P43E, XP-P431E, XP-P432E, XP-P433E, XP-P434E, XP-P435E, XP-P436E, XP-P437E, XP-P438E, XP-P439E, XP-P431A, XP-P45B, XP-P451B, XP-P452B, XP-P453B, XP-P454B, XP-P455B, XP-P456B, XP-P457B, XP-P458B, XP-P459B, XP-P451C, XP-P46B, XP-P461B, XP-P462B, XP-P463B, XP-P464B, XP-P465B, XP-P466B, XP-P467B, XP-P468B, XP-P469B, XP-P461C, XP-P44E, XP-P441E, XP-P442E, XP-P443E, XP-P444E, XP-P445E, XP-P446E, XP-P447E, XP-P448E, XP-P449E, XP-P441A, XP-P48B, XP-P481B, XP-P482B, XP-P46E, XP-P461E, XP-P462E, XP-P323B, XP-P324B, XP-P3301B, XP-P4401B, XP-P3401B, XP-P4602B, 4B-2023PA, 4B-2033PA, 4B-2043PA, 4B-2053PA, 4B-2063PA, 4B-2073PA, 4B-2083PA, 4B-2093PA, 4B-2103PA, 4B-2023PB, 4B-2033PB, 4B-2043PB, 4B-2053PB, 4B-2063PB, 4B-2073PB, 4B-2083PB, 4B-2093PB, 4B-2103PB, 4B-2023PC, 4B-2033PC, 4B-2043PC, 4B-2053PC, 4B-2063PC, 4B-2073PC, 4B-2083PC, 4B-2093PC, 4B-2103PC, 4B-2014PA, 4B-2024PA, 4B-2034PA, 4B-2044PA, 4B-2054PA, 4B-2064PA, 4B-2074PA, 4B-2084PA, 4B-2094PA, 4B-2023PB, 4B-2033PB, 4B-2043PB, 4B-2053PB, 4B-2063PB, 4B-2073PB, 4B-2083PB, 4B-2093PB, 4B-2103PB, 4B-2023PC, 4B-2033PC, 4B-2043PC, 4B-2053PC, 4B-2063PC, 4B-2073PC, 4B-2083PC, 4B-2093PC, 4B-2103PC, 4B-2128PA, 4B-2258PA, 4B-2508PA, 4B-2758PA, 4B-2108PA, 4B-2158PA, 4B-2208PA, 4B-2128PB, 4B-2258PB, 4B-2508PB, 4B-2758PB, 4B-2108PB, 4B-2158PB, 4B-2208PB, 4B-2128PC, 4B-2258PC, 4B-2508PC, 4B-2758PC, 4B-2108PC, 4B-2158PC, 4B-2208PC, 4B-3128PA, 4B-3258PA, 4B-3508PA, 4B-3758PA, 4B-3108PA, 4B-3158PA, 4B-3208PA, 4B-3128PB, 4B-2258PB, 4B-2508PB, 4B-2758PB, 4B-2108PB, 4B-2158PB, 4B-2208PB, 4B-3128PC, 4B-2258PC, 4B-2508PC, 4B-2758PC, 4B-2108PC, 4B-2158PC, 4B-2208PC, 4B-2128PTA, 4B-2258PTA, 4B-2508PTA, 4B-2758PTA, 4B-2108PTA, 4B-

2158PTA, 4B-2208PTA, 4B-2128PTB, 4B-2258PTB, 4B-2508PTB, 4B-2758PTB, 4B-2108PTB, 4B-2158PTB, 4B-2208PTB, 4B-2128PTC, 4B-2258PTC, 4B-2508PTC, 4B-2758PTC, 4B-2108PTC, 4B-2158PTC, 4B-2208PTC, 4B-3128PTA, 4B-2258PTA, 4B-2508PTA, 4B-2758PTA, 4B-2108PTA, 4B-2158PTA, 4B-2208PTA, 4B-3128PTB, 4B-2258PTB, 4B-2508PTB, 4B-2758PTB, 4B-2108PTB, 4B-2158PTB, 4B-2208PTB, 4B-3128PTC, 4B-2258PTC, 4B-2508PTC, 4B-2758PTC, 4B-2108PTC, 4B-2158PTC, 4B-2208PTC, 4B-2042PA, 4B-2052PA, 4B-2062PA, 4B-2042PB, 4B-2052PB, 4B-2062PB, 4B-2042PC, 4B-2052PC, 4B-2062PC, DL-PB322, DL-PB323, DL-PB324, DL-PB325, DL-PB326, DL-PB327, DL-PB328, DL-PB329, DL-PB3210, XP-P322B-D1, XP-D481B, XP-D482B, XP-D483B, XP-D484B, XP-D485B, XP-D486B, XP-D487B, XP-D488B, XP-D489B, XP-D481E, XP-D482E, XP-D483E, XP-D484E, XP-D485E, XP-D486E, XP-D487E, XP-D488E, XP-D489E, XP-D321C, XP-D322C, XP-D323C, XP-D324C, XP-D325C, XP-D326C, XP-D327C, XP-D328C, XP-D329C, XP-D321F, XP-D322F, XP-D323F, XP-D324F, XP-D325F, XP-D326F, XP-D327F, XP-D328F, XP-D329F, XP-D421C, XP-D422C, XP-D423C, XP-D424C, XP-D425C, XP-D426C, XP-D427C, XP-D428C, XP-D429C, XP-D421F, XP-D422F, XP-D423F, XP-D424F, XP-D425F, XP-D426F, XP-D427F, XP-D428F, XP-D429F, XP-D381B, XP-D382B, XP-D383B, XP-D384B, XP-D385B, XP-D386B, XP-D387B, XP-D388B, XP-D389B, XP-D381E, XP-D382E, XP-D383E, XP-D384E, XP-D385E, XP-D386E, XP-D387E, XP-D388E, XP-D389E,

4B-2123A, 4B-2123B, 4B-2123C, 4B-2123D, 4B-2123E, 4B-2123F, 4B-2123G, 4B-2123H, 4B-2123I, 4B-2123K, 4B-2123L, 4B-2123M, 4B-2123N, 4B-2123P, 4B-2123Q, 4B-3123A, 4B-3123B, 4B-3123C, 4B-3123D, 4B-3123E, 4B-3123F, 4B-3123G, 4B-3123H, 4B-3123I, 4B-3123K, 4B-3123L, 4B-3123M, 4B-3123N, 4B-3123P, 4B-3123Q, 4B-2084A, 4B-2084B, 4B-2084C, 4B-2084D, 4B-2084E, 4B-2084F, 4B-2084G, 4B-2084H, 4B-2084I, 4B-2084K, 4B-2084L, 4B-2084M, 4B-2084N, 4B-2084P, 4B-2084Q, 4B-3064A, 4B-3064B, 4B-3064C, 4B-3064D, 4B-3064E, 4B-3064F, 4B-3064G, 4B-3064H, 4B-3064I, 4B-3064K, 4B-3064L, 4B-3064M, 4B-3064N, 4B-3064P, 4B-3064Q, 4B-2124A, 4B-2124B, 4B-2124C, 4B-2124D, 4B-2124E, 4B-2124F, 4B-2124G, 4B-2124H, 4B-2124I, 4B-2124K, 4B-2124L, 4B-2124M, 4B-2124N, 4B-2124P, 4B-2124Q, 4B-3104A, 4B-3104B, 4B-3104C, 4B-3104D, 4B-3104E, 4B-3104F, 4B-3104G, 4B-3104H, 4B-3104I, 4B-3104K, 4B-3104L, 4B-3104M, 4B-3104N, 4B-3104P, 4B-3104Q, 4B-2164A, 4B-2164B, 4B-2164C, 4B-2164D, 4B-2164E, 4B-2164F, 4B-3124A, 4B-3124B, 4B-3124C, 4B-3124D, 4B-3124E, 4B-3124F, 4B-2083A, 4B-2083B, 4B-2083C, 4B-2083D, 4B-2083E, 4B-2083F, 4B-2083G, 4B-2083H, 4B-2083I, 4B-2083K, 4B-2083L, 4B-2083M, 4B-2083N, 4B-2083P, 4B-2083Q, 4B-3063A, 4B-3063B, 4B-3063C, 4B-3063D, 4B-3063E, 4B-3063F, 4B-3063G, 4B-3063H, 4B-3063I, 4B-3063K, 4B-3063L, 4B-3063M, 4B-3063N, 4B-3063P, 4B-3063Q

XP-G480B, XP-G480E, 4B-2084GA, 4B-3064GA, XP-G481B, XP-G481E, 4B-2084GB, 4B-3064GB, XP-G482B, XP-G482E, 4B-2084GC, 4B-3064GC, XP-G483B, XP-G483E, 4B-2084GD, 4B-3064GD

4.2 Channel List

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2020 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonics of the highest fundamental frequency or to 40 GHz, whichever is lower).

The EUT has been tested under TX operating condition.

This EUT is a FHSS system, were conducted to determine the final configuration from all possible combinations. We use software control the EUT, Let EUT hopping on and transmit with highest power, all the modes GFSK have been tested. 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.

Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-

Channel	Frequency(MHz)
---------	----------------


0	2402
39	2441
78	2480

4.3 Test Setup Configuration

Conducted Emission



Radiated Emission(30MHz-1GHz)



Radiated Emission(above 1GHz)



Conducted Spurious



4.4 Test Mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.	

5 Equipment During Test

5.1 Equipments List

Radiated emission & Radio Frequency Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
966 Shielded Room	966 Room	/	EMToni	2025/1/17	2028/1/16
EMI Test Receiver	ESCI	101178	Rohde & Schwarz	2025/6/10	2026/6/09
Amplifier (30MHz-1GHz)	BBV 9743 B	00374	SCHNWARZBECK	2025/6/10	2026/6/09
Bilog Antenna (30MHz-1GHz)	VULB9162	00473	SCHNWARZBECK	2025/3/08	2026/3/07
Horn antenna (1GHz-18GHz)	BBHA 9120 D	02622	SCHNWARZBECK	2025/3/10	2026/3/09
Pream plifier (1GHz-18GHz)	BBV 9718D	0024	SCHNWARZBECK	2025/6/10	2026/6/09
Spectrum Analyze (10Hz-40GHz)	FSV 40	100952	Rohde & Schwarz	2025/6/10	2026/6/09
Pream plifier (18GHz-40GHz)	BBV 9721	0056	SCHNWARZBECK	2025/6/10	2026/6/09
Double Ridge Guide Horn Antenna (18GHz-40GHz)	SAS-574	588	A.H.System	2025/3/10	2026/3/09
Loop Antenna (9KHz-30MHz)	FMZB 1513-60	00115	SCHNWARZBECK	2025/6/10	2026/6/09
Amplifier (9KHz-30MHz)	BBV 9745	00109	CHNWARZBECK	2025/6/10	2026/6/09
MXG Signal Analyzer	N9020A	MY50510202	Agilent	2025/6/10	2026/6/09
MXG Vector Signal Generator	N5182A	MY50140020	Agilent	2025/6/10	2026/6/09
MXG Analog Signal Generator	N5181A	MY47420919	Agilent	2025/6/10	2026/6/09
Power Sensor	TR1029-2	512364	Techoy	2025/6/10	2026/6/09
RF Swith	TR1029-1	512364	Techoy	2025/6/10	2026/6/09
Cable	DA800- 4000MM	NA	DA	2025/6/10	2026/6/09
Cable	DA800- 11000MM	NA	DA	2025/6/10	2026/6/09

Radio frequency receiving antennae	NA	NA	Agilente	NA	NA
------------------------------------	----	----	----------	----	----

Conducted emission Test Equipment

Name	Model No.	Serial No.	Manufacturer	Date of Cal.	Due Date
944 Shielded Room	944 Room	/	EMToni	2025/1/17	2028/1/16
EMI Test Receiver	ESPI	101604	Rohde & Schwarz	2025/6/10	2026/6/09
LISN	ENV 216	102796	Rohde & Schwarz	2025/6/10	2026/6/09
LISN	VN1-13S	004023	CRANAGE	2025/6/10	2026/6/09
Cable	RG223-1500MM	NA	RG	2025/6/10	2026/6/09

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	AUDIX	e3	6.120718
2	EMC radiation test system	AUDIX	e3	6.120718
3	RF test system	TACHOY	RFTest	V1.0.0
4	RF communication test system	TACHOY	RFTest	V1.0.0

5.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 × 10 ⁻⁶
Bandwidth	± 1.5 × 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(9KHz~30MHz)	±4.51dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Conducted Spurious Emission	±2.76dB

5.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
1	AC/DC ADAPTER	YC Friends™	YC60-2402500	/	/

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

6 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207
Test Method: : ANSI C63.10-2020
Test Result: : N/A
Frequency : : 150kHz to 30MHz
Class/Severity: : Class B
Detector: : Peak for pre-scan (9kHz Resolution Bandwidth)


6.1 E.U.T. Operation

Operating Environment :


Temperature: : 23.2°C
Humidity: : 51 % RH
Atmospheric Pressure: : 101.12 kPa

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10-2020

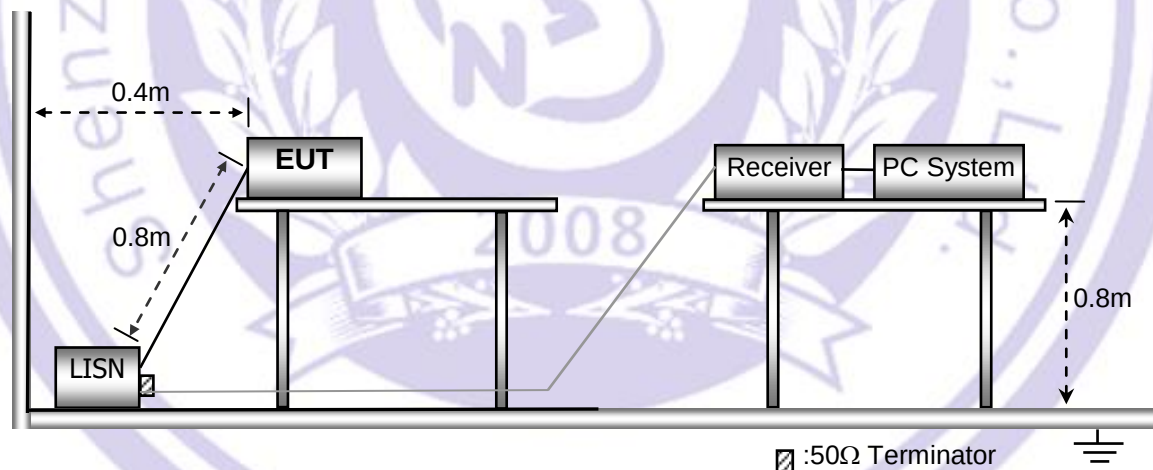

6.3 Test SET-UP (Block Diagram of Configuration)

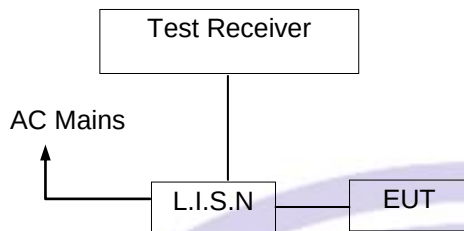

6.4 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

6.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

6.6 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.7 Conducted Emission Test Result

Pass


Conducted emission at both 120V & 240V is assessed, and emission at 120V represents the worst case. All the modulation modes were tested the data of the worst mode (GFSK) are recorded in the following pages and the others modulation methods do not exceed the limits.

Channel:	Middle	Phase :	L
----------	--------	---------	---

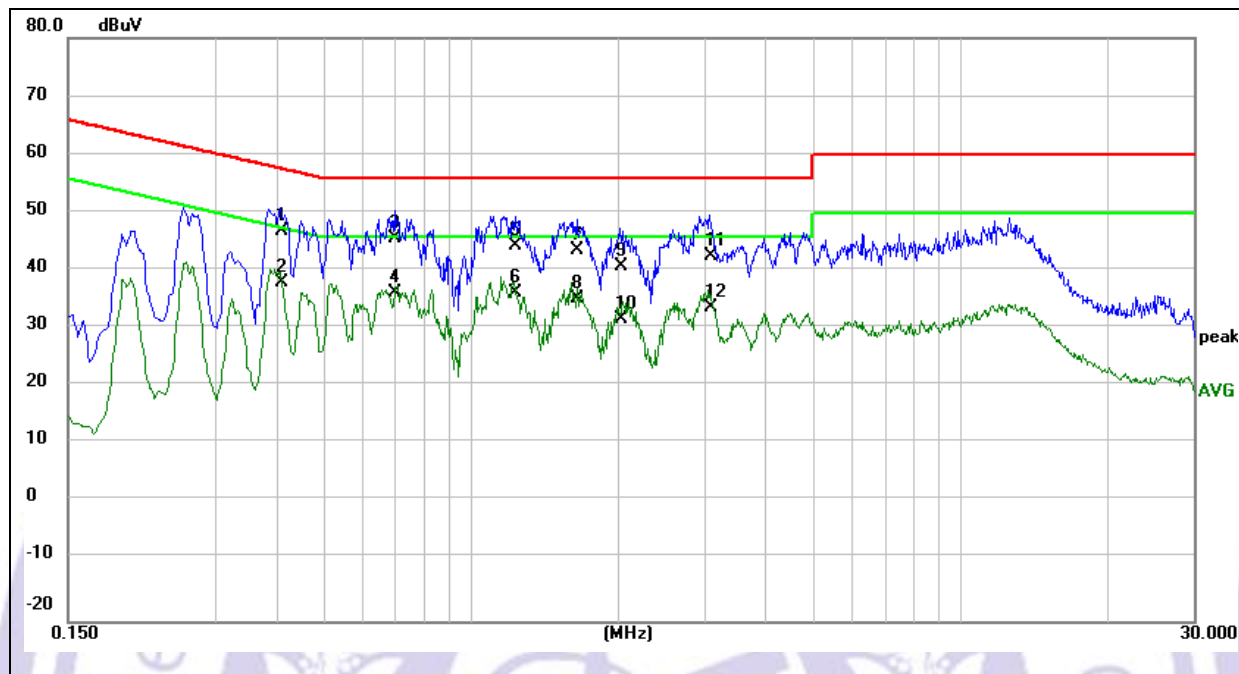

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4100	35.13	11.89	47.02	57.65	-10.63	QP
2	0.4100	26.29	11.89	38.18	47.65	-9.47	AVG
3	0.6980	33.86	11.89	45.75	56.00	-10.25	QP
4	0.6980	24.42	11.89	36.31	46.00	-9.69	AVG
5	1.2300	32.84	11.65	44.49	56.00	-11.51	QP
6	1.2300	24.88	11.65	36.53	46.00	-9.47	AVG
7	1.6500	32.45	11.23	43.68	56.00	-12.32	QP
8	1.6500	24.29	11.23	35.52	46.00	-10.48	AVG
9	2.0140	30.16	10.87	41.03	56.00	-14.97	QP
10	2.0140	20.96	10.87	31.83	46.00	-14.17	AVG
11	3.0860	32.66	9.92	42.58	56.00	-13.42	QP
12	3.0860	23.99	9.92	33.91	46.00	-12.09	AVG

Channel:	Middle	Phase :	N
----------	--------	---------	---

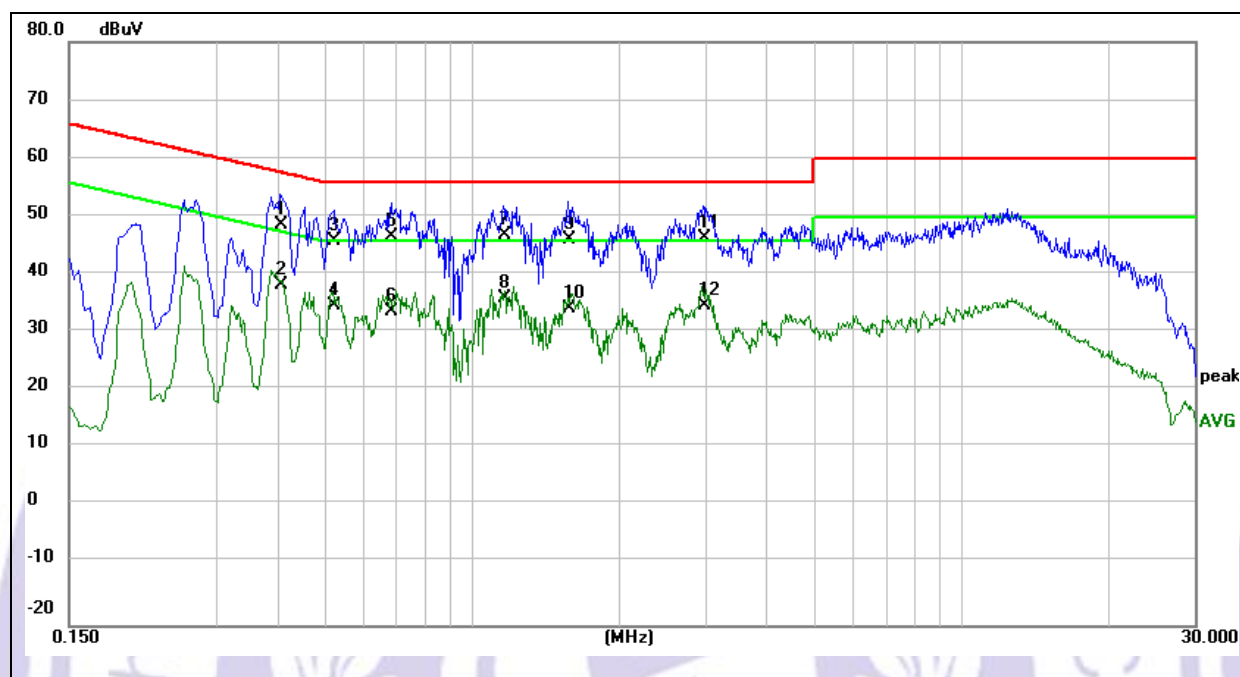

No.	Frequency (MHz)	Reading Level(dBuV)	Factor (dB)	Measurement(dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.4060	36.90	11.89	48.79	57.73	-8.94	QP
2	0.4060	26.61	11.89	38.50	47.73	-9.23	AVG
3	0.5220	34.11	11.89	46.00	56.00	-10.00	QP
4	0.5220	22.94	11.89	34.83	46.00	-11.17	AVG
5	0.6860	34.85	11.89	46.74	56.00	-9.26	QP
6	0.6860	22.03	11.89	33.92	46.00	-12.08	AVG
7	1.1620	35.13	11.72	46.85	56.00	-9.15	QP
8	1.1620	24.34	11.72	36.06	46.00	-9.94	AVG
9	1.5740	34.80	11.31	46.11	56.00	-9.89	QP
10	1.5740	22.98	11.31	34.29	46.00	-11.71	AVG
11	2.9620	36.59	9.95	46.54	56.00	-9.46	QP
12	2.9620	25.02	9.95	34.97	46.00	-11.03	AVG

7 Radiated Spurious Emissions

Test Requirement : FCC CFR47 Part 15 Section 15.209 & 15.247
Test Method : ANSI C63.10-2020
Test Result : PASS
Measurement Distance : 3m
Limit : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation


Operating Environment :

Temperature : 24.5 °C
Humidity : 55.5% RH
Atmospheric Pressure : 101.3kPa
Test Voltage : 3.7V DC


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz.

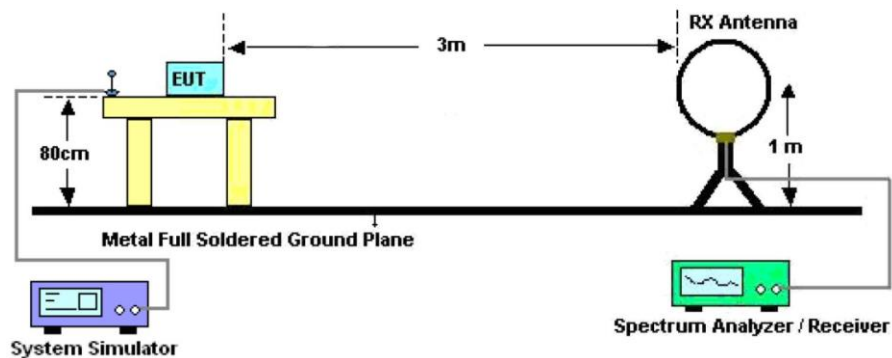

The test setup for emission measurement from 30 MHz to 1 GHz.

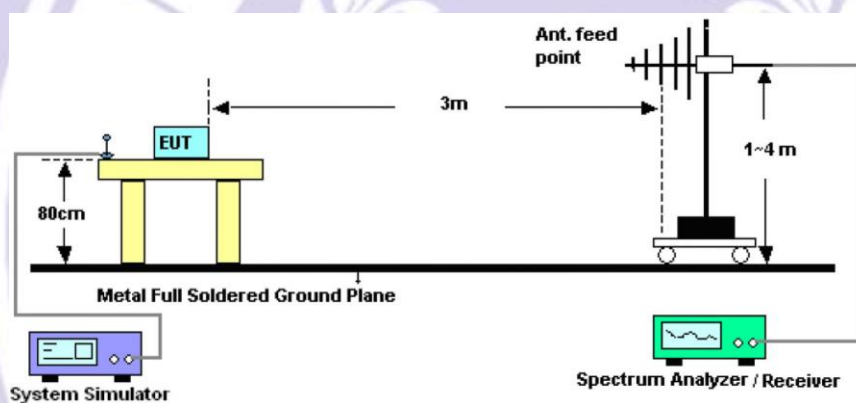

The test setup for emission measurement above 1 GHz.

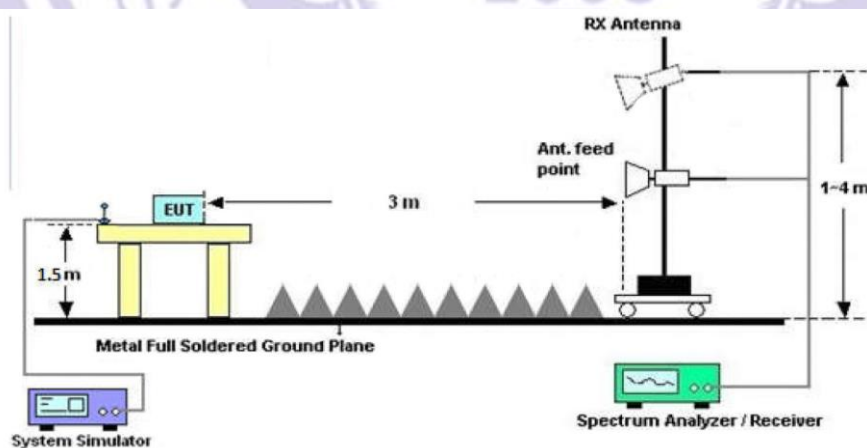

7.3 Spectrum Analyzer Setup

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 3 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

7.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2020.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

7.5 Summary of Test Results

Test Frequency: 9KHz-30MHz

Freq. (MHz)	Ant.Pol. H/V	Emission Level (dBuV/m)	Limit 3m (dBuV/m)	Over (dB)
--	--	--	--	>20

Note:

The amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.


Distance extrapolation factor = $40\log(\text{Specific distance} / \text{test distance})$ (dB);

Limit line = Specific limits (dBuV) + distance extrapolation factor.

Test Frequency: 30MHz ~ 1GHz

Please refer to the following test plots, Low Channel (2402MHz) Worst case GFSK for record:


Phase:	Vertical
Test Power :	AC 120V 60Hz

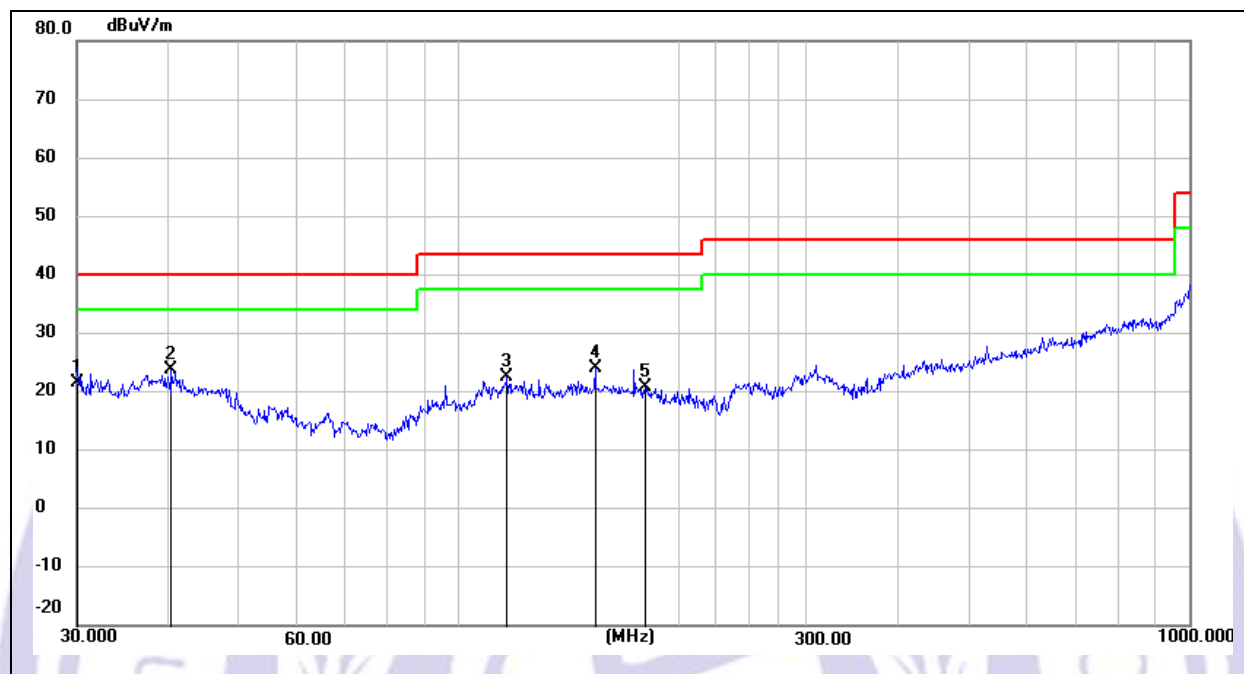

No.	Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark			
1	30.1051	21.20	0.26	21.46	40.00	-18.54	QP			
2	40.4170	28.86	-5.20	23.66	40.00	-16.34	QP			
3	116.5400	25.99	-3.52	22.47	43.50	-21.03	QP			
4	153.7384	27.87	-3.85	24.02	43.50	-19.48	QP			
5	180.0164	27.84	-6.96	20.88	43.50	-22.62	QP			
6	30.1051	21.20	0.26	21.46	40.00	-18.54	QP			

Remark: Emission Level = Reading Level + Correct Factor

Phase:	Horizontal
Test Power :	AC 120V 60Hz

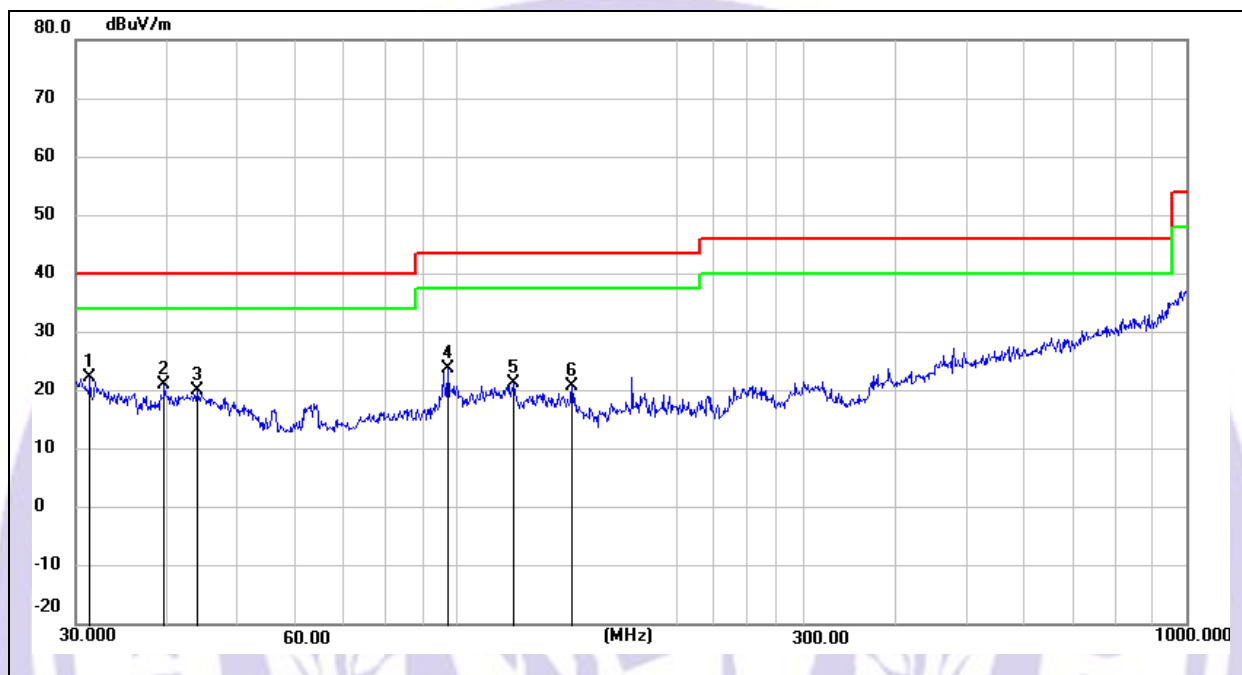

No.	Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark			
1	31.3992	23.40	-1.15	22.25	40.00	-17.75	QP			
2	39.7146	25.95	-5.02	20.93	40.00	-19.07	QP			
3	44.1200	26.61	-6.64	19.97	40.00	-20.03	QP			
4	97.1148	29.73	-5.96	23.77	43.50	-19.73	QP			
5	119.8555	24.58	-3.19	21.39	43.50	-22.11	QP			
6	143.8291	23.62	-2.91	20.71	43.50	-22.79	QP			

Remark: Emission Level=Reading+ Correct Factor + Reading Level

Test Frequency 1GHz-25GHz

BT mode have been tested, and the worst (GFSK_2402MHz) result was report as below:

Test mode:		GFSK		Frequency:		Channel 0: 2402MHz	
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4804.00	V	48.73	36.71	74.00	54.00	-25.27	-17.29
7206.00	V	52.67	40.49	74.00	54.00	-21.33	-13.51
9608.00	V	51.12	39.37	74.00	54.00	-22.88	-14.63
12010.00	V	48.54	36.58	74.00	54.00	-25.46	-17.42
14412.00	V	48.20	40.83	74.00	54.00	-25.80	-13.17
4804.00	H	51.47	36.26	74.00	54.00	-22.53	-17.74
7206.00	H	50.37	39.16	74.00	54.00	-23.63	-14.84
9608.00	H	52.24	36.59	74.00	54.00	-21.76	-17.41
12010.00	H	52.81	39.46	74.00	54.00	-21.19	-14.54
14412.00	H	49.86	40.81	74.00	54.00	-24.14	-13.19

Test mode:		GFSK		Frequency:		Channel 39: 2441MHz	
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4882.00	V	48.29	40.12	74.00	54.00	-25.71	-13.88
7323.00	V	52.89	40.37	74.00	54.00	-21.11	-13.63
9764.00	V	51.12	39.09	74.00	54.00	-22.88	-14.91
12205.00	V	52.80	40.06	74.00	54.00	-21.20	-13.94
14646.00	V	51.08	38.60	74.00	54.00	-22.92	-15.40
4882.00	H	52.79	36.78	74.00	54.00	-21.21	-17.22
7323.00	H	49.99	40.06	74.00	54.00	-24.01	-13.94
9764.00	H	51.29	39.89	74.00	54.00	-22.71	-14.11
12205.00	H	48.54	36.72	74.00	54.00	-25.46	-17.28
14646.00	H	51.04	39.38	74.00	54.00	-22.96	-14.62

Test mode: GFSK		Frequency:		Channel 78: 2480MHz			
Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
	H/V	PK	AV	PK	AV	PK	AV
4960.00	V	48.43	38.89	74.00	54.00	-25.57	-15.11
7440.00	V	47.65	36.89	74.00	54.00	-26.35	-17.11
9920.00	V	46.23	36.67	74.00	54.00	-27.77	-17.33
12400.00	V	47.72	38.30	74.00	54.00	-26.28	-15.70
14880.00	V	47.73	39.25	74.00	54.00	-26.27	-14.75
4960.00	H	46.16	38.42	74.00	54.00	-27.84	-15.58
7440.00	H	45.44	39.39	74.00	54.00	-28.56	-14.61
9920.00	H	46.90	38.20	74.00	54.00	-27.10	-15.80
12400.00	H	47.11	39.44	74.00	54.00	-26.89	-14.56
14880.00	H	45.37	39.01	74.00	54.00	-28.63	-14.99

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Test mode: GFSK		Frequency:		Channel 0: 2402MHz	
Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2310.0000	H	45.80	74.00	37.33	54.00
2390.0000	H	46.00	74.00	39.11	54.00
2310.0000	V	46.86	74.00	36.04	54.00
2390.0000	V	47.00	74.00	36.32	54.00

Test mode: GFSK		Frequency:		Channel 78: 2480MHz	
Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2483.5000	H	45.76	74.00	38.23	54.00
2500.0000	H	45.40	74.00	36.91	54.00
2483.5000	V	48.87	74.00	36.59	54.00
2500.0000	V	48.54	74.00	39.68	54.00

Test mode: GFSK		Frequency:		Hopping	
Frequency (MHz)	Polarity H/V	PK(dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	AV(dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)
2390.0000	H	48.36	74.00	38.47	54.00
2400.0000	H	48.05	74.00	38.28	54.00
2483.5000	H	48.51	74.00	38.91	54.00
2500.0000	H	45.51	74.00	37.15	54.00
2390.0000	V	46.40	74.00	39.06	54.00
2400.0000	V	46.98	74.00	38.17	54.00
2483.5000	V	45.99	74.00	39.41	54.00
2500.0000	V	46.52	74.00	37.47	54.00


Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

8 Maximum Peak Output Power Test

8.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (b)(3)
Test Limit	For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. For FHSs operating in the band 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1.0 W if the hopset uses 75 or more hopping channels; the maximum peak conducted output power shall not exceed 0.125 W if the hopset uses less than 75 hopping channels. The e.i.r.p. shall not exceed 4 W.

8.2 Test Setup



8.3 Test Procedure

1. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram above,
2. Spectrum Setting:
 - RBW > the 20 dB bandwidth of the emission being measured
 - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 - VBW $\geq$ RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold

8.4 Test Data


Please see the attachment for data.

9 20DB Occupy Bandwidth Test

9.1 Test Standard

Test Standard	FCC Part15 C Section 15.247 (a)(1)
---------------	------------------------------------

9.2 Test Setup

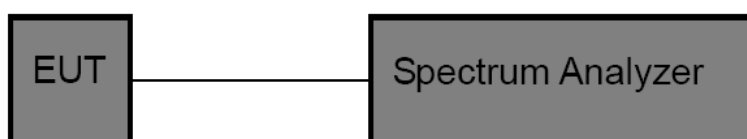

9.3 Test Procedure

Using the following spectrum analyzer settings:

1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

9.4 Test Data


Please see the attachment for data.

10 Carrier Frequency Separation Test

10.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>25KHz or >two-thirds of the 20 dB bandwidth

10.2 Test Setup

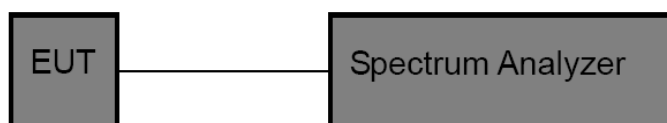

10.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

10.4 Test Data


Please see the attachment for data.

11 Number of Hopping Channel Test

11.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>15 channels

11.2 Test Setup

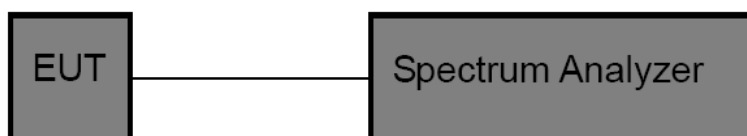

11.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:

1. Span= the frequency band of operation
2. Set the RBW = 100kHz.
3. Set the VBW = 300kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

11.4 Test Data


Please see the attachment for data.

12 Dwell Time Test

12.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	0.4 sec

12.2 Test Setup



12.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 1 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

12.4 Test Data


Please see the attachment for data.

13 100kHz Bandwidth of Frequency Band Edge Requirement

13.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (d)
Test Limit	in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

13.2 Test Setup

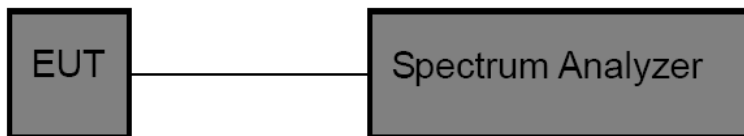

13.3 Test Procedure

The EUT must have its hopping/Non-hopping function enabled. Using the following spectrum analyzer setting:

1. Set the RBW = 100kHz.
2. Set the VBW = 300kHz.
3. Sweep time = auto couple.
4. Detector function = peak.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.

13.4 Test Data

Please see the attachment for data.

14 Antenna Requirement

14.1 Test Standard and Requirement

Test Standard	FCC Part15 Section 15.203 /247(c)
Requirement	1) 15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 2) 15.247(c) (1)(i) requirement: Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

14.2 Antenna Connected Construction

The antenna is PCB antenna which permanently attached, and the Max. gain of the antenna is 4.85 dBi. It complies with the standard requirement.

15 TEST SETUP & EUT PHOTOGRAPH

Please see the attachment for details.

----- End of Report -----

