



FCC RF Test Report

APPLICANT : Rolling Wireless S.à r.l.
EQUIPMENT : RN941R
BRAND NAME : Rolling Wireless
MODEL NAME : RN941R
FCC ID : 2AX2URN941R
STANDARD : 47 CFR Part 96
CLASSIFICATION : Citizens Band End User Devices (CBE)
EQUIPMENT TYPE : End User Equipment
TEST DATE(S) : Jan. 05, 2026 ~ Jan. 19, 2026

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Fly Liang

Approved by: Fly Liang



Sporton International Inc. (ShenZhen)

***1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China***



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Feature of Equipment Under Test.....	5
1.4 Maximum Conducted Power and Emission Designator	6
1.5 Testing Site.....	6
1.6 Test Software	6
1.7 Applied Standards	7
2 Test Configuration of Equipment Under Test	8
2.1 Test Mode.....	8
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration	9
2.4 Measurement Results Explanation Example	10
2.5 Frequency List of Low/Middle/High Channels.....	10
3 Conducted Test Items.....	11
3.1 Measuring Instruments.....	11
3.2 Conducted Output Power	12
3.3 Peak-to-Average Ratio	13
3.4 EIRP	14
3.5 Occupied Bandwidth	15
3.6 Conducted Band Edge	16
3.7 Conducted Spurious Emission	17
3.8 Frequency Stability	18
4 Radiated Test Items	19
4.1 Measuring Instruments.....	19
4.2 Test Setup	19
4.3 Test Result of Radiated Test.....	20
4.4 Radiated Spurious Emission	21
5 List of Measuring Equipment.....	22
6 Measurement Uncertainty	23
Appendix A. Test Results of Conducted Test	
Appendix B. Test Results of Radiated Test	
Appendix C. Test Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FG5D3103P	01	Initial issue of report	Mar. 25, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.2	§2.1046	Conducted Output Power	Reporting only	-
3.3	§96.41	Peak-to-Average Ratio	Not Applicable	Not applicable for End User Devices
3.4	§96.41	Maximum E.I.R.P	Pass	-
		Maximum Power Spectral Density	Not Applicable	Not applicable for End User Devices
3.5	§2.1049 §96.41	Occupied Bandwidth	Reporting only	-
3.6	§2.1051 §96.41	Conducted Band Edge Measurement Adjacent Channel Leakage Ratio	Pass	-
3.7	§2.1051 §96.41	Conducted Spurious Emission	Pass	
3.8	§2.1055	Frequency Stability for Temperature & Voltage	Pass	-
4.4	§2.1051 §96.41	Radiated Spurious Emission	Pass	Under limit 6.69 dB at 10818.00 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

Rolling Wireless S.à r.l.
8-10 rue Mathias Hardt 1717 Luxembourg

1.2 Manufacturer

Rolling Wireless S.à r.l.
8-10 rue Mathias Hardt 1717 Luxembourg

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	RN941R
Brand Name	Rolling Wireless
Model Name	RN941R
FCC ID	2AX2URN941R
Tx Frequency	5G NR n48: 3550 MHz ~ 3700 MHz
Rx Frequency	5G NR n48: 3550 MHz ~ 3700 MHz
SCS	30kHz
Bandwidth	10MHz / 20MHz / 30MHz / 40MHz
Inter Band CA (Uplink)	n2A-n48A, n5A-n48A, n12A-n48A, n25A-n48A n48A-n66A, n48A-n71A
Antenna Gain	-3.0 dBi
Type of Modulation	DFT-s-OFDM (PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM) CP-OFDM (QPSK / 16QAM / 64QAM / 256QAM)
IMEI Code	Conducted : 357887770000148 Radiation : 357887770000098
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. 5G NR n48 supports SA mode and NSA mode. According to the maximum power between SA and NSA mode, SA covers NSA mode.
3. The EN-DC mode combination could be referred to the Operational Description.
4. The test items of inter band CA were cover by 5G NR single carrier due to the CA power is reduced according to 3GPP MPR.



1.4 Maximum Conducted Power and Emission Designator

5G NR n48		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum Conducted power (W)	Emission Designator (99%OBW)	Maximum Conducted power (W)	Emission Designator (99%OBW)
10	3555.00~3694.98	0.2328	8M56G7D	0.1871	8M58W7D
20	3560.01~3690.00	0.2388	18M2G7D	0.1879	18M2W7D
30	3565.02~3684.99	0.2438	27M9G7D	0.1950	27M9W7D
40	3570.00~3679.98	0.2541	38M0G7D	0.1897	37M9W7D

Note: All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

1.5 Testing Site

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ 03CH02-SZ	CN1256	421272

1.6 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH02-SZ	AUDIX	E3	6.2009-8-24a



1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ ANSI C63.26-2015
- ♦ 47 CFR Part 96
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v03r01
- ♦ FCC KDB 940660 D01 Part 96 CBRS v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test


2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report.

Test Items	Band	Bandwidth (MHz)						Modulation					RB #		Test Channel		
		5	10	15	20	30	40	PI/2 BPSK	QPSK	16QAM	64QAM	256 QAM	1	Full	L	M	H
Max. Output Power	n48	-	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v
26dB and 99% Bandwidth	n48	-	v	-	v	v	v		v	v	v	v		v		v	
Adjacent Channel Leakage Ratio	n48	-	v	-	v	v	v	v	v				v	v	v	v	v
Conducted Band Edge	n48	-	v	-	v	v	v	v	v				v	v	v	v	v
Conducted Spurious Emission	n48	-	v	-	v		v	v	v				v		v	v	v
E.I.R.P	n48	-	v	-	v	v	v	v	v	v	v	v	v	v	v	v	v
Frequency Stability	n48	-		-	v				v					v		v	
Radiated Spurious Emission	n48	Worst Case													v	v	v
Remark	1. The mark “v” means that this configuration is chosen for testing 2. The mark “-” means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. All test items are based on engineering evaluation. 5. Frequency Stability: Normal Voltage = 4.0V ; Low Voltage =3.40V; High Voltage =4.20V																

2.2 Connection Diagram of Test System

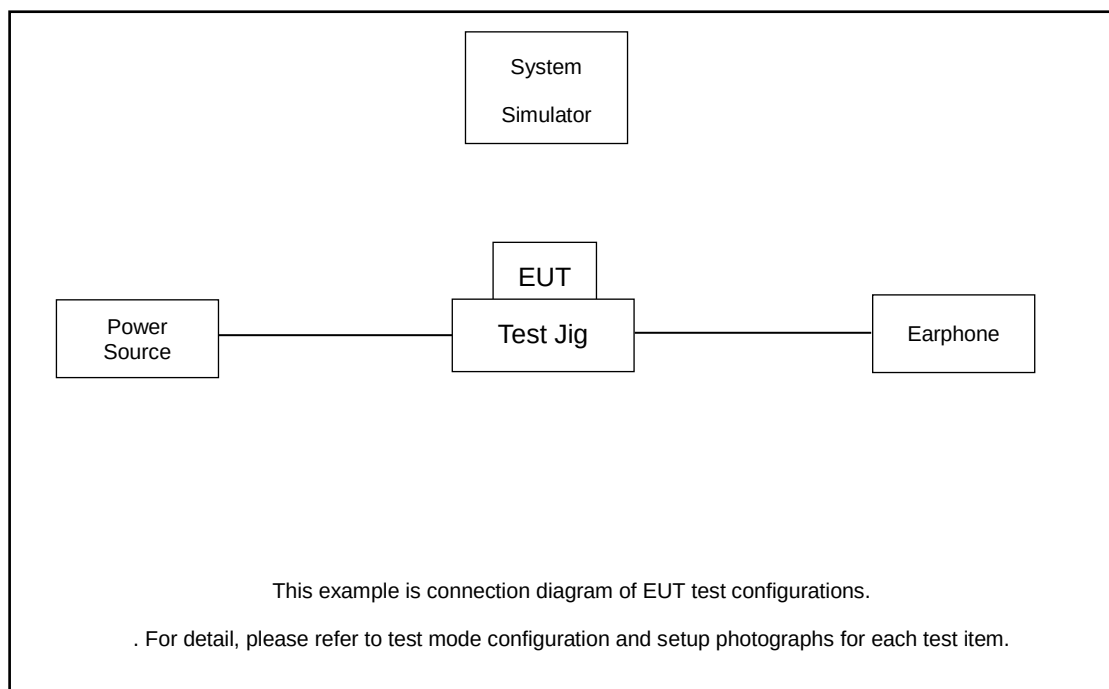

2.3 Support Unit used in test configuration

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power supply	N/A	N/A	N/A	N/A	N/A
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded,1.8m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded,1.8m
4.	Test Jig	N/A	N/A	N/A	N/A	N/A
5.	Antenna	N/A	N/A	N/A	N/A	N/A
6.	Earphone	N/A	N/A	N/A	N/A	N/A

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 5.85 dB and 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 5.85 + 10 = 15.85 \text{ (dB)} \end{aligned}$$

2.5 Frequency List of Low/Middle/High Channels

5G NR n48 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	638000	641666	645332
	Frequency	3570	3624.99	3679.98
30	Channel	637668	641666	645666
	Frequency	3565.02	3624.99	3684.99
20	Channel	637334	641666	646000
	Frequency	3560.01	3624.99	3690
10	Channel	637000	641666	646332
	Frequency	3555	3624.99	3694.98


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.1.1 Test Setup


3.1.2 Conducted Output Power / ACLR

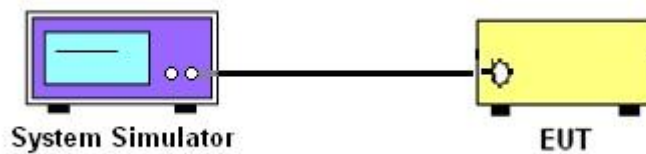

3.1.3 Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

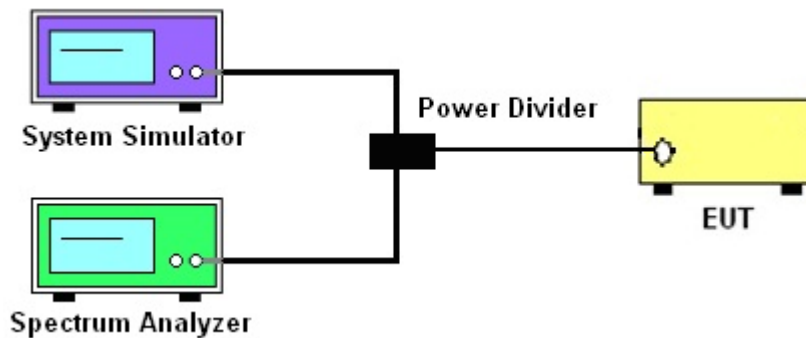

3.1.4 Frequency Stability

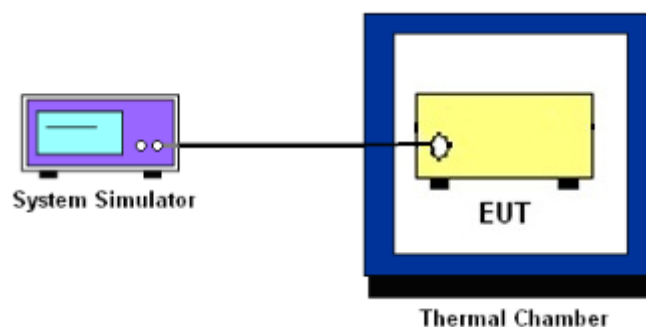

3.1.5 Test Result of Conducted Test

Please refer to Appendix A.



3.2 Conducted Output Power

3.2.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.2.2 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through the system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.



3.3 Peak-to-Average Ratio

3.3.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.3.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.2.6

1. The EUT was connected to spectrum and system simulator via a power divider.
2. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
3. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
4. Record the deviation as Peak to Average Ratio

3.4 EIRP

3.4.1 Description of the EIRP Measurement

EIRP limits for CBRS equipment as below table:

Device		Maximum EIRP (dBm/10 MHz)	Maximum PSD (dBm/MHz)
Applied	End User Device	23	n/a
☐	Category A CBSD	30	20
☐	Category B CBSD	47	37

Remark: The worst case EIRP shown in this section is found with NR operating only using 1RB. As such, the EIRP/10MHz and full channel EIRP values will be identical since 1RB is fully contained within all available channel bandwidths for n48 (i.e. 10, 15, 20, 40MHz)

3.4.2 Test Procedures for EIRP

1. Establishing a communications link with the call box (Base station) to measure the Maximum conducted power, the parameters were set to force the EUT transmitting at maximum output power level. Use the average power measurement function to measure total channel power of each channel bandwidth (per ANSI C63.26-2015 Section 5.2.1)
2. Determining ERP and/or EIRP from conducted RF output power measurements (Per ANSI C63.26-2015 Section 5.2.5.5)

$EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where
 P_T = transmitter output power in dBm
 G_T = gain of the transmitting antenna in dBi
 L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB



3.5 Occupied Bandwidth

3.5.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.5.2 Test Procedures

The testing follows ANSI C63.26-2015 Section 5.4.3 (26dB) and Section 5.4.4 (99OB)

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
3. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
4. Set the detection mode to peak, and the trace mode to max hold.
5. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
6. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
7. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
8. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.6 Conducted Band Edge

3.6.1 Description of Conducted Band Edge Measurement

Part 96.41 (e) (1) (ii)

For End User Devices the emission limits outside the fundamental are as follows:

Within 0 MHz to B MHz above and below the assigned channel ≤ -13 dBm/MHz

Greater than B MHz above and below the assigned channel ≤ -25 dBm/MHz

where B is the bandwidth in megahertz of the assigned channel or multiple contiguous channels of the End User Device.

Notwithstanding the emission limits in this paragraph, the Adjacent Channel Leakage Ratio for End User Devices shall be at least 30 dB.

Part 96.41 (e) (2)

For CBSDs and End User Devices, the conducted power of emissions below 3540 MHz or above 3710 MHz shall not exceed -25 dBm/MHz, and the conducted power of emissions below 3530 MHz or above 3720 MHz shall not exceed -40 dBm/MHz

3.6.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The band edges of low and high channels for the highest RF powers were measured.
3. Set RBW $\geq 1\%$ EBW in the 1MHz band immediately outside and adjacent to the band edge.
4. Beyond the 1 MHz band from the band edge, RBW=1MHz was used
5. Offset has included the duty factor for LTE Band 48. Duty factor $=10 \log (1/x)$, where x is the measured duty cycle.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



3.7 Conducted Spurious Emission

3.7.1 Description of Conducted Spurious Emission Measurement

96.41 (e)(2)

The conducted power of any emissions below 3530 MHz or above 3720 MHz shall not exceed -40dBm/MHz.

3.7.2 Test Procedures

The testing follows FCC KDB 971168 D01 v03r01 Section 6.1.

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.
The path loss was compensated to the results for each measurement.
3. The middle channel for the highest RF power within the transmitting frequency was measured.
4. The conducted spurious emission for the whole frequency range was taken.
5. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
6. Set spectrum analyzer with RMS detector.
7. Taking the record of maximum spurious emission.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. The limit line is -40dBm/MHz.

3.8 Frequency Stability

3.8.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.8.2 Test Procedures for Temperature Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was set up in the thermal chamber and connected with the system simulator.
2. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
3. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.8.3 Test Procedures for Voltage Variation

The testing follows FCC KDB 971168 D01 v03r01 Section 9.0.

1. The EUT was placed in a temperature chamber at 25±5° C and connected with the system simulator.
2. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value measured at the input to the EUT.
3. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup


4.2.1 For radiated test below 30MHz

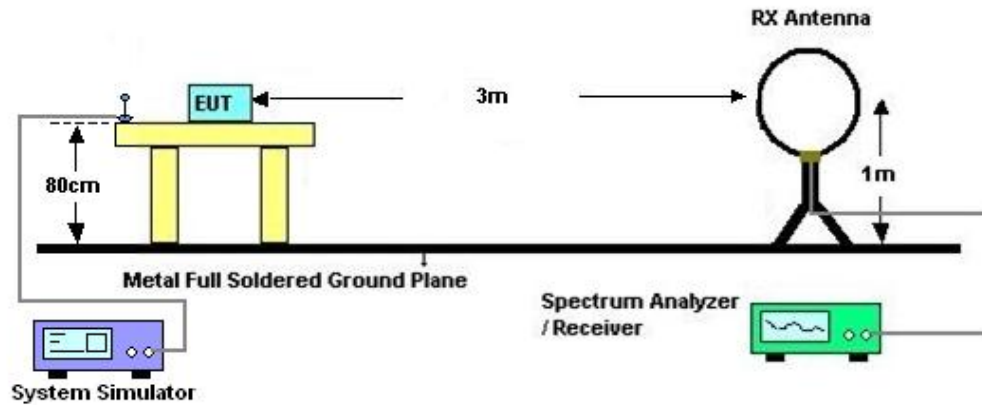

4.2.2 For radiated test from 30MHz to 1GHz

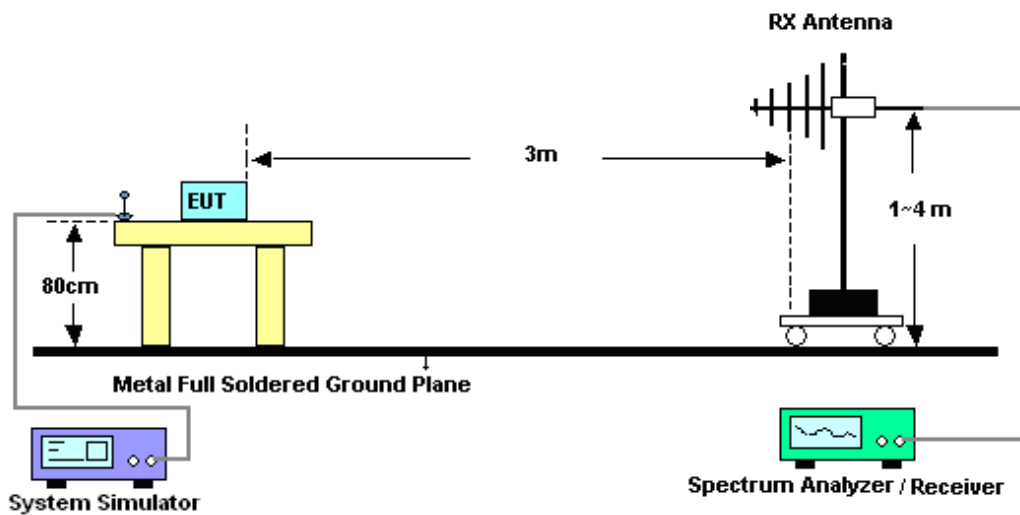

4.2.3 For radiated test above 1GHz

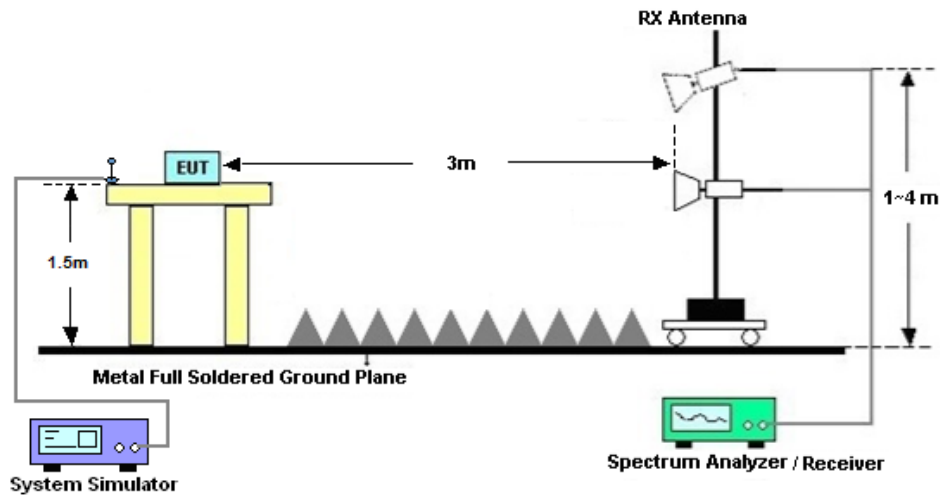

4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



4.4 Radiated Spurious Emission

4.4.1 Description of Radiated Spurious Emission Measurement

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least -40dBm / MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
2. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest spurious emission.
4. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
5. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
7. A horn antenna was substituted in place of the EUT and was driven by a signal generator. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is -40dBm/MHz



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 02, 2025	Jan. 05, 2026~ Jan. 19, 2026	Apr. 01, 2026	Conducted (TH01-SZ)
DC Power Supply	TTI	PL330P	290070	Max 32V, 3A	Oct. 13, 2025	Jan. 05, 2026~ Jan. 19, 2026	Oct. 12, 2026	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04265	60.06.020.0077	0.4GHz~26.5GHz	Dec. 24, 2025	Jan. 05, 2026~ Jan. 19, 2026	Dec. 23, 2026	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 02, 2025	Jan. 05, 2026~ Jan. 19, 2026	Jul. 01, 2026	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2025	Jan. 13, 2026	Jul. 02, 2026	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 25, 2025	Jan. 13, 2026	Dec. 24, 2026	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Dec. 23, 2025	Jan. 13, 2026	Dec. 22, 2027	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2025	Jan. 13, 2026	Jul. 03, 2026	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2025	Jan. 13, 2026	Jul. 02, 2026	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 03, 2025	Jan. 13, 2026	Apr. 02, 2027	Radiation (03CH02-SZ)
LF Amplifier	EM Electronics	EM330	060788	20MHz~3GHz	Dec. 25, 2025	Jan. 13, 2026	Dec. 24, 2026	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 13, 2025	Jan. 13, 2026	Oct. 12, 2026	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010003043	N/A	Oct. 13, 2025	Jan. 13, 2026	Oct. 12, 2026	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Jan. 13, 2026	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Jan. 13, 2026	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required

6 Measurement Uncertainty

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 1.34 dB
Occupied Channel Bandwidth	± 0.012 MHz
Conducted Power	± 1.34 dB
Peak to Average Ratio	± 1.34 dB
Frequency Stability	± 1.3 Hz

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.47 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.31 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.72 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Khan Zhen	Temperature :	22~23℃
		Relative Humidity :	40~42%



Software Version: 23.06.1602

FR1 N48

Transmitter Conducted Output Power And EIRP, ($G_T - L_C$)=-3.0dB

NR Band	SCS	Band Width	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
48	30	10	637000	3555	DFT-s-OFDM QPSK	12@6	23.38	20.38	0.1091
48	30	10	637000	3555	DFT-s-OFDM QPSK	1@1	23.39	20.39	0.1094
48	30	10	637000	3555	DFT-s-OFDM QPSK	1@22	23.4	20.4	0.1096
48	30	10	637000	3555	DFT-s-OFDM 16 QAM	12@6	22.27	19.27	0.0845
48	30	10	637000	3555	DFT-s-OFDM 16 QAM	1@1	22.4	19.4	0.0871
48	30	10	637000	3555	DFT-s-OFDM 16 QAM	1@22	22.21	19.21	0.0834
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	12@6	23.65	20.65	0.1161
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	1@1	23.67	20.67	0.1167
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	1@22	23.61	20.61	0.1151
48	30	10	641666	3624.99	DFT-s-OFDM 16 QAM	12@6	22.59	19.59	0.0910
48	30	10	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	22.69	19.69	0.0931
48	30	10	641666	3624.99	DFT-s-OFDM 16 QAM	1@22	22.63	19.63	0.0918
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	12@6	23.56	20.56	0.1138
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	1@1	23.6	20.6	0.1148
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	1@22	23.53	20.53	0.1130
48	30	10	646332	3694.98	DFT-s-OFDM 16 QAM	12@6	22.56	19.56	0.0904
48	30	10	646332	3694.98	DFT-s-OFDM 16 QAM	1@1	22.72	19.72	0.0938
48	30	10	646332	3694.98	DFT-s-OFDM 16 QAM	1@22	22.5	19.5	0.0891
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	25@12	23.32	20.32	0.1076
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@1	23.09	20.09	0.1021
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@49	23.12	20.12	0.1028
48	30	20	637334	3560.01	DFT-s-OFDM 16 QAM	25@12	22.23	19.23	0.0838
48	30	20	637334	3560.01	DFT-s-OFDM 16 QAM	1@1	22.18	19.18	0.0828
48	30	20	637334	3560.01	DFT-s-OFDM 16 QAM	1@49	22.14	19.14	0.0820
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	25@12	23.77	20.77	0.1194
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@1	23.74	20.74	0.1186
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@49	23.52	20.52	0.1127
48	30	20	641666	3624.99	DFT-s-OFDM 16 QAM	25@12	22.68	19.68	0.0929
48	30	20	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	22.74	19.74	0.0942
48	30	20	641666	3624.99	DFT-s-OFDM 16 QAM	1@49	22.55	19.55	0.0902
48	30	20	646000	3690	DFT-s-OFDM QPSK	25@12	23.78	20.78	0.1197
48	30	20	646000	3690	DFT-s-OFDM QPSK	1@1	23.75	20.75	0.1189
48	30	20	646000	3690	DFT-s-OFDM QPSK	1@49	23.51	20.51	0.1125
48	30	20	646000	3690	DFT-s-OFDM 16 QAM	25@12	22.65	19.65	0.0923
48	30	20	646000	3690	DFT-s-OFDM 16 QAM	1@1	22.68	19.68	0.0929



48	30	20	646000	3690	DFT-s-OFDM 16 QAM	1@49	22.56	19.56	0.0904
48	30	30	637668	3565.02	DFT-s-OFDM QPSK	36@18	23.43	20.43	0.1104
48	30	30	637668	3565.02	DFT-s-OFDM QPSK	1@1	23.41	20.41	0.1099
48	30	30	637668	3565.02	DFT-s-OFDM QPSK	1@76	23.43	20.43	0.1104
48	30	30	637668	3565.02	DFT-s-OFDM 16 QAM	36@18	22.32	19.32	0.0855
48	30	30	637668	3565.02	DFT-s-OFDM 16 QAM	1@1	22.31	19.31	0.0853
48	30	30	637668	3565.02	DFT-s-OFDM 16 QAM	1@76	22.38	19.38	0.0867
48	30	30	641666	3624.99	DFT-s-OFDM QPSK	36@18	23.87	20.87	0.1222
48	30	30	641666	3624.99	DFT-s-OFDM QPSK	1@1	23.71	20.71	0.1178
48	30	30	641666	3624.99	DFT-s-OFDM QPSK	1@76	23.68	20.68	0.1169
48	30	30	641666	3624.99	DFT-s-OFDM 16 QAM	36@18	22.7	19.7	0.0933
48	30	30	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	22.66	19.66	0.0925
48	30	30	641666	3624.99	DFT-s-OFDM 16 QAM	1@76	22.61	19.61	0.0914
48	30	30	645666	3684.99	DFT-s-OFDM QPSK	36@18	23.83	20.83	0.1211
48	30	30	645666	3684.99	DFT-s-OFDM QPSK	1@1	23.82	20.82	0.1208
48	30	30	645666	3684.99	DFT-s-OFDM QPSK	1@76	23.51	20.51	0.1125
48	30	30	645666	3684.99	DFT-s-OFDM 16 QAM	36@18	22.66	19.66	0.0925
48	30	30	645666	3684.99	DFT-s-OFDM 16 QAM	1@1	22.9	19.9	0.0977
48	30	30	645666	3684.99	DFT-s-OFDM 16 QAM	1@76	22.48	19.48	0.0887
48	30	40	638000	3570	DFT-s-OFDM PI/2 BPSK	50@25	23.7	20.7	0.1175
48	30	40	638000	3570	DFT-s-OFDM PI/2 BPSK	1@1	23.51	20.51	0.1125
48	30	40	638000	3570	DFT-s-OFDM PI/2 BPSK	1@104	23.54	20.54	0.1132
48	30	40	638000	3570	DFT-s-OFDM QPSK	50@25	23.57	20.57	0.1140
48	30	40	638000	3570	DFT-s-OFDM QPSK	1@1	23.4	20.4	0.1096
48	30	40	638000	3570	DFT-s-OFDM QPSK	1@104	23.47	20.47	0.1114
48	30	40	638000	3570	DFT-s-OFDM 16 QAM	50@25	22.42	19.42	0.0875
48	30	40	638000	3570	DFT-s-OFDM 16 QAM	1@1	22.32	19.32	0.0855
48	30	40	638000	3570	DFT-s-OFDM 16 QAM	1@104	22.47	19.47	0.0885
48	30	40	638000	3570	DFT-s-OFDM 64 QAM	50@25	20.99	17.99	0.0630
48	30	40	638000	3570	DFT-s-OFDM 64 QAM	1@1	20.89	17.89	0.0615
48	30	40	638000	3570	DFT-s-OFDM 64 QAM	1@104	20.91	17.91	0.0618
48	30	40	638000	3570	DFT-s-OFDM 256 QAM	50@25	19.01	16.01	0.0399
48	30	40	638000	3570	DFT-s-OFDM 256 QAM	1@1	18.99	15.99	0.0397
48	30	40	638000	3570	DFT-s-OFDM 256 QAM	1@104	18.97	15.97	0.0395
48	30	40	638000	3570	CP-OFDM QPSK	53@26	21.99	18.99	0.0793
48	30	40	638000	3570	CP-OFDM QPSK	1@1	22.04	19.04	0.0802
48	30	40	638000	3570	CP-OFDM QPSK	1@104	22.06	19.06	0.0805
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	50@25	23.97	20.97	0.1250
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@1	23.8	20.8	0.1202



48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@104	23.7	20.7	0.1175
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	50@25	23.9	20.9	0.1230
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@1	23.75	20.75	0.1189
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@104	23.65	20.65	0.1161
48	30	40	641666	3624.99	DFT-s-OFDM 16 QAM	50@25	22.78	19.78	0.0951
48	30	40	641666	3624.99	DFT-s-OFDM 16 QAM	1@1	22.73	19.73	0.0940
48	30	40	641666	3624.99	DFT-s-OFDM 16 QAM	1@104	22.52	19.52	0.0895
48	30	40	641666	3624.99	DFT-s-OFDM 64 QAM	50@25	21.31	18.31	0.0678
48	30	40	641666	3624.99	DFT-s-OFDM 64 QAM	1@1	21.22	18.22	0.0664
48	30	40	641666	3624.99	DFT-s-OFDM 64 QAM	1@104	21.19	18.19	0.0659
48	30	40	641666	3624.99	DFT-s-OFDM 256 QAM	50@25	19.34	16.34	0.0431
48	30	40	641666	3624.99	DFT-s-OFDM 256 QAM	1@1	19.18	16.18	0.0415
48	30	40	641666	3624.99	DFT-s-OFDM 256 QAM	1@104	19.28	16.28	0.0425
48	30	40	641666	3624.99	CP-OFDM QPSK	53@26	22.3	19.3	0.0851
48	30	40	641666	3624.99	CP-OFDM QPSK	1@1	22.35	19.35	0.0861
48	30	40	641666	3624.99	CP-OFDM QPSK	1@104	22.26	19.26	0.0843
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	50@25	24.05	21.05	0.1274
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@1	23.94	20.94	0.1242
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@104	23.57	20.57	0.1140
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	50@25	23.91	20.91	0.1233
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@1	23.84	20.84	0.1213
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@104	23.48	20.48	0.1117
48	30	40	645332	3679.98	DFT-s-OFDM 16 QAM	50@25	22.74	19.74	0.0942
48	30	40	645332	3679.98	DFT-s-OFDM 16 QAM	1@1	22.76	19.76	0.0946
48	30	40	645332	3679.98	DFT-s-OFDM 16 QAM	1@104	22.56	19.56	0.0904
48	30	40	645332	3679.98	DFT-s-OFDM 64 QAM	50@25	21.38	18.38	0.0689
48	30	40	645332	3679.98	DFT-s-OFDM 64 QAM	1@1	21.19	18.19	0.0659
48	30	40	645332	3679.98	DFT-s-OFDM 64 QAM	1@104	21.02	18.02	0.0634
48	30	40	645332	3679.98	DFT-s-OFDM 256 QAM	50@25	19.24	16.24	0.0421
48	30	40	645332	3679.98	DFT-s-OFDM 256 QAM	1@1	19.27	16.27	0.0424
48	30	40	645332	3679.98	DFT-s-OFDM 256 QAM	1@104	18.95	15.95	0.0394
48	30	40	645332	3679.98	CP-OFDM QPSK	53@26	22.33	19.33	0.0857
48	30	40	645332	3679.98	CP-OFDM QPSK	1@1	22.5	19.5	0.0891
48	30	40	645332	3679.98	CP-OFDM QPSK	1@104	22.1	19.1	0.0813

Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (Hz)	Verdict	Environment
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	11.1	PASS	NV
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	17.1	PASS	LV
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	11.6	PASS	HV
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	11.5	PASS	-30°C
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	13	PASS	-20°C
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	11.4	PASS	-10°C
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	15.5	PASS	0°C
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	16.7	PASS	10°C
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	11.1	PASS	20°C
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	15.8	PASS	30°C
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	10.5	PASS	40°C
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	15.4	PASS	50°C

$|\text{MAX}(\Delta f)| = 17.1 \text{ Hz}$

Frequency Stability	Frequency (MHz)	Limit Line	Result
$f_L - \text{MAX}(\Delta f) $	3550.859183	$\geq 3550 \text{ MHz}$	PASS
$f_H + \text{MAX}(\Delta f) $	3699.141817	$\leq 3700 \text{ MHz}$	

Occupied Bandwidth


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
48	30	10	641666	3624.99	CP-OFDM QPSK	24@0	8.5635	9.557
48	30	10	641666	3624.99	CP-OFDM 16 QAM	24@0	8.5645	9.542
48	30	10	641666	3624.99	CP-OFDM 64 QAM	24@0	8.581	9.439
48	30	10	641666	3624.99	CP-OFDM 256 QAM	24@0	8.5694	9.378
48	30	20	641666	3624.99	CP-OFDM QPSK	51@0	18.159	19.67
48	30	20	641666	3624.99	CP-OFDM 16 QAM	51@0	18.162	19.32
48	30	20	641666	3624.99	CP-OFDM 64 QAM	51@0	18.241	19.38
48	30	20	641666	3624.99	CP-OFDM 256 QAM	51@0	18.196	19.52
48	30	30	641666	3624.99	CP-OFDM QPSK	78@0	27.915	29.18
48	30	30	641666	3624.99	CP-OFDM 16 QAM	78@0	27.837	28.95
48	30	30	641666	3624.99	CP-OFDM 64 QAM	78@0	27.853	29.24
48	30	30	641666	3624.99	CP-OFDM 256 QAM	78@0	27.733	29.08
48	30	40	641666	3624.99	CP-OFDM QPSK	106@0	37.953	39.38
48	30	40	641666	3624.99	CP-OFDM 16 QAM	106@0	37.79	39.38
48	30	40	641666	3624.99	CP-OFDM 64 QAM	106@0	37.853	39.3
48	30	40	641666	3624.99	CP-OFDM 256 QAM	106@0	37.849	39.13




N48(10M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH




N48(10M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

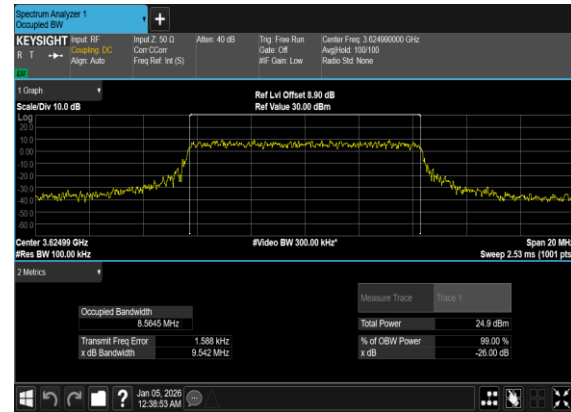

N48(10M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

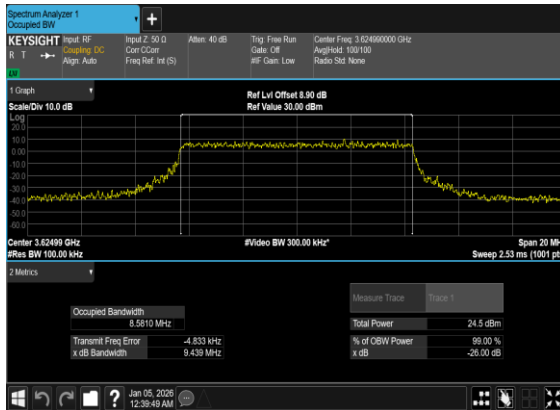


N48(10M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

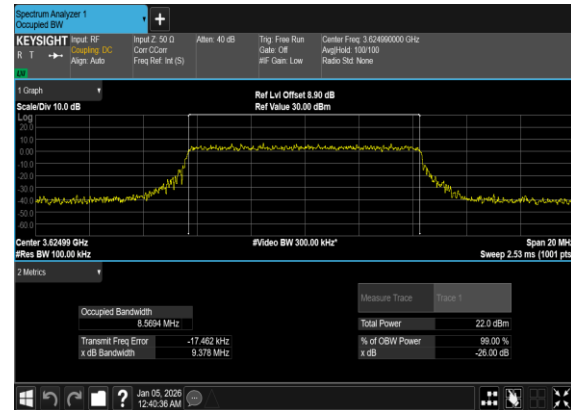





N48(20M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

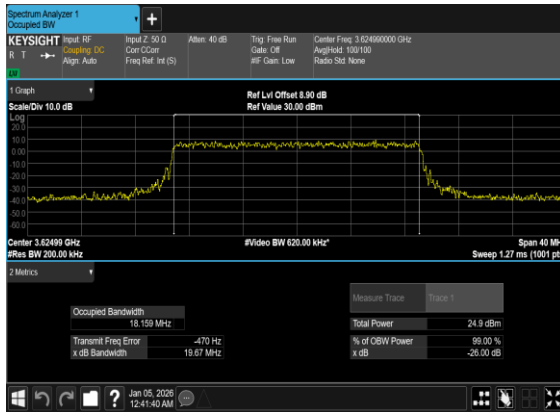


N48(20M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

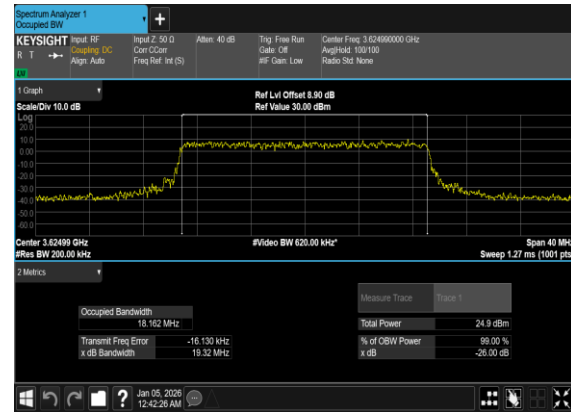

N48(20M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

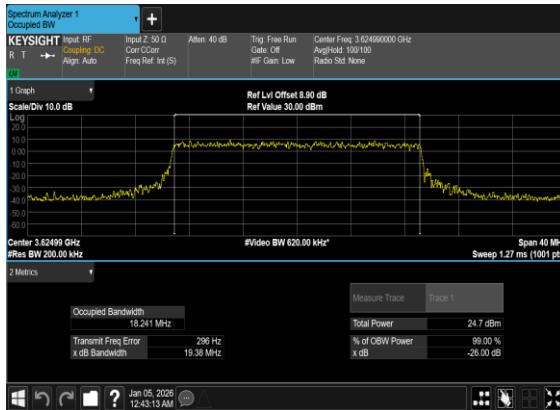


N48(20M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

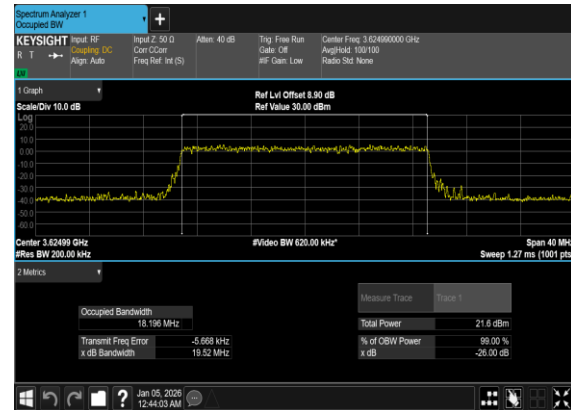





N48(30M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

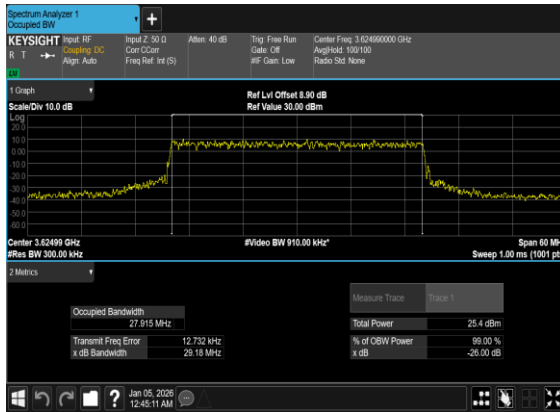


N48(30M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

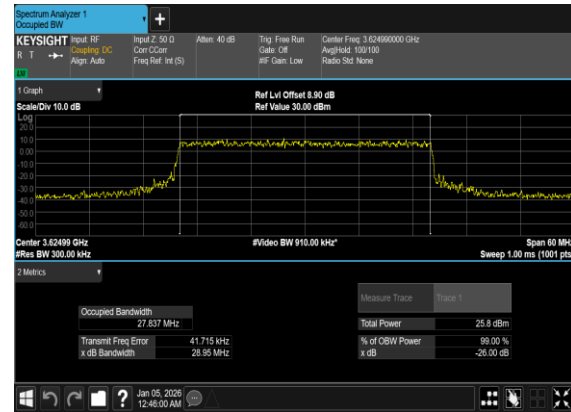

N48(30M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

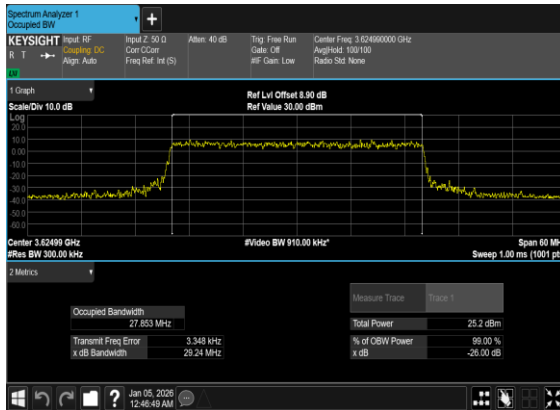


N48(30M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

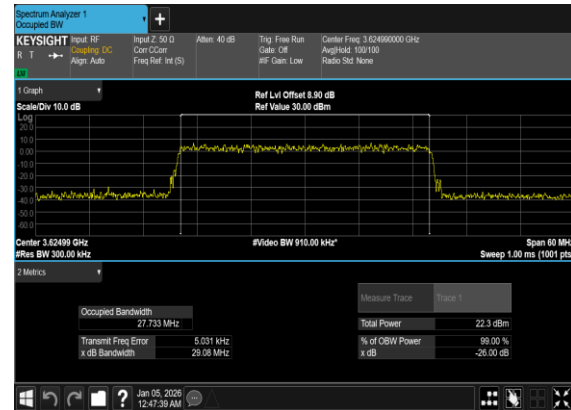





N48(40M)_CP-
OFDM_QPSK_Outer_Full_Mid_CH

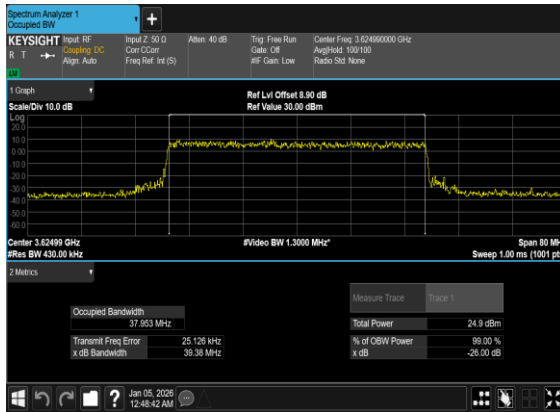


N48(40M)_CP-OFDM_16
QAM_Outer_Full_Mid_CH

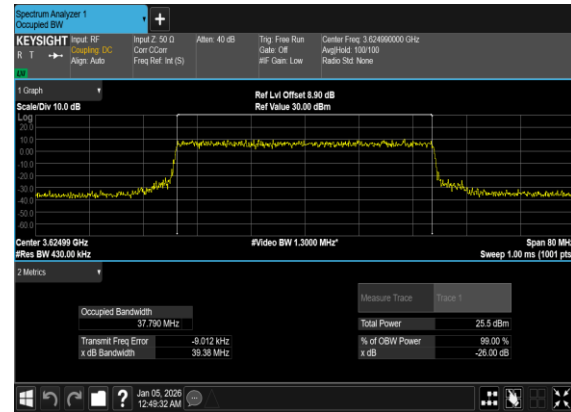

N48(40M)_CP-OFDM_64
QAM_Outer_Full_Mid_CH

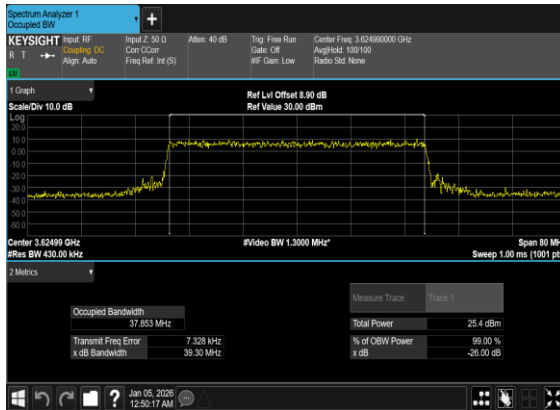

N48(40M)_CP-OFDM_256
QAM_Outer_Full_Mid_CH

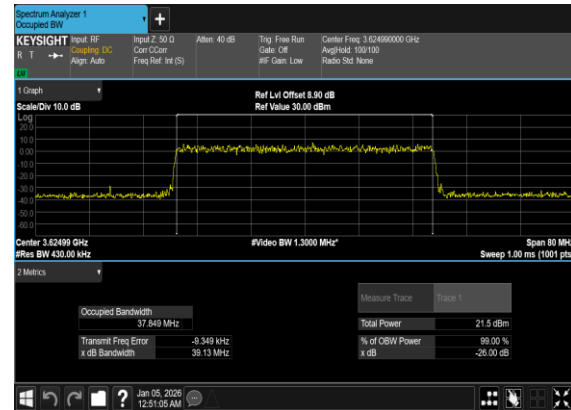

Adjacent Channel Leakage Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Lower Margin	Upper Margin	Result	Verdict
48	30	10	637000	3555.0	DFT-s-OFDM PI/2 BPSK	24@0	-15.73	-14.84	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM PI/2 BPSK	1@0	-10.29	-27.02	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM PI/2 BPSK	1@23	-27.13	-11.22	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM QPSK	24@0	-13.66	-14.16	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM QPSK	1@0	-9.86	-26.5	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM QPSK	1@23	-26.32	-11.2	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM PI/2 BPSK	24@0	-13.14	-12.79	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@0	-14.06	-23.7	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@23	-24.85	-14.72	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	24@0	-13.66	-13.51	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	1@0	-10.32	-21.29	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	1@23	-24.88	-14.35	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM PI/2 BPSK	24@0	-12.77	-11.52	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM PI/2 BPSK	1@0	-10.73	-22.06	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM PI/2 BPSK	1@23	-23.39	-11.78	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	24@0	-13.31	-13.63	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	1@0	-10.66	-22.08	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	1@23	-21.68	-12.21	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	50@0	-16.66	-16.62	see graph	PASS




48	30	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	1@0	-10.2	-22.78	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM PI/2 BPSK	1@50	-24.25	-13.03	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	50@0	-15.0	-15.98	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	-10.15	-24.65	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@50	-23.12	-12.46	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	50@0	-13.33	-13.06	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@0	-12.14	-20.53	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@50	-21.25	-11.61	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	50@0	-13.8	-13.93	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	-11.41	-20.18	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@50	-19.84	-12.2	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM PI/2 BPSK	50@0	-11.77	-11.78	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM PI/2 BPSK	1@0	-10.64	-18.74	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM PI/2 BPSK	1@50	-19.9	-12.2	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	50@0	-13.58	-13.51	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@0	-11.37	-19.27	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@50	-19.5	-11.7	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM PI/2 BPSK	100@0	-12.41	-11.62	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM PI/2 BPSK	1@0	-13.07	-17.82	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM PI/2 BPSK	1@105	-17.64	-12.53	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	100@0	-11.6	-11.62	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	1@0	-13.04	-17.56	see graph	PASS




48	30	40	638000	3570.0	DFT-s-OFDM QPSK	1@105	-17.77	-13.53	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	100@0	-12.04	-10.89	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@0	-13.41	-17.34	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM PI/2 BPSK	1@105	-13.78	-10.08	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	100@0	-11.84	-11.45	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	-12.96	-17.34	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@105	-18.82	-14.0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	100@0	-10.77	-10.25	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@0	-13.34	-17.05	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM PI/2 BPSK	1@105	-18.64	-13.8	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	100@0	-11.92	-11.19	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	-12.85	-16.34	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@105	-17.0	-11.97	see graph	PASS




N48(10M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Low_CH

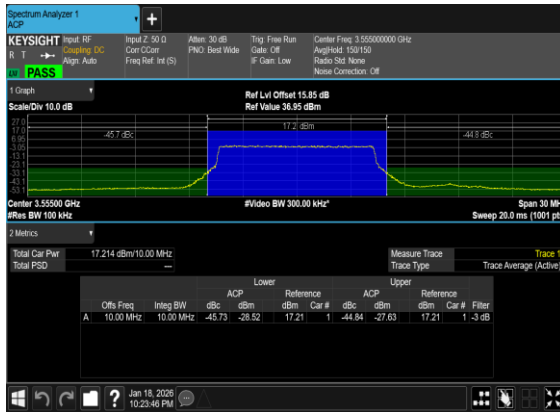


N48(10M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Left_Low_CH

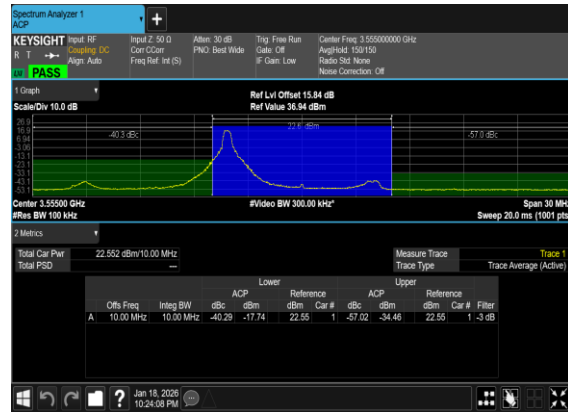

N48(10M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Right_Low_CH

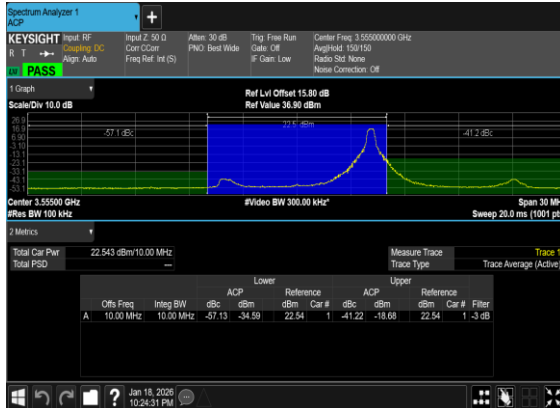


N48(10M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

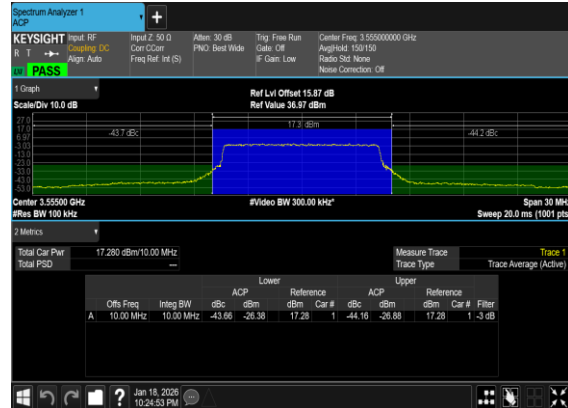





N48(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

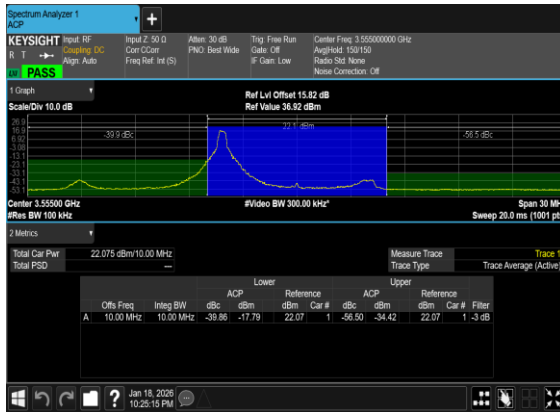


N48(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_Low_CH

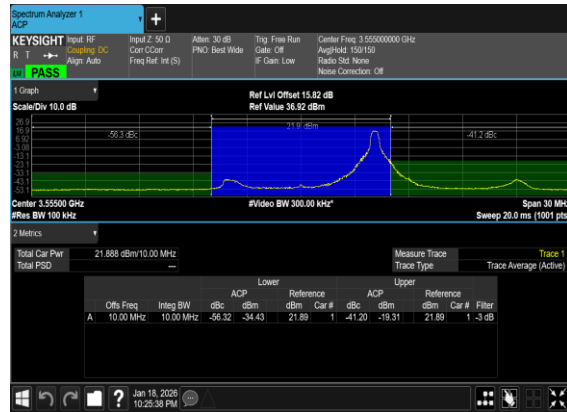

N48(10M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Mid_CH

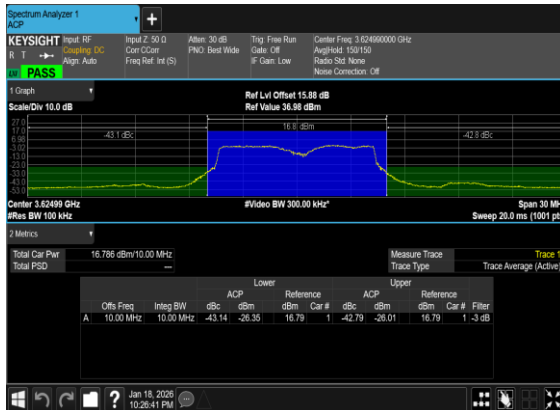


N48(10M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Left_Mid_CH

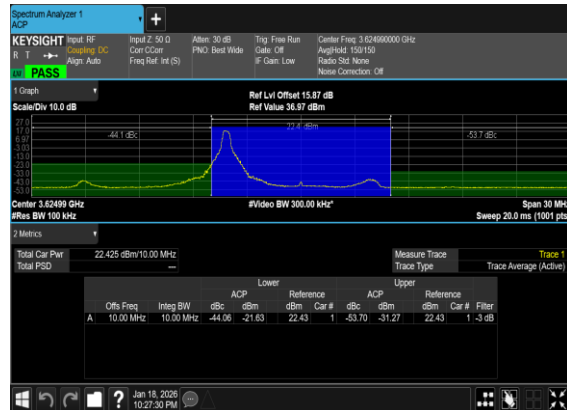





N48(10M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Right_Mid_CH

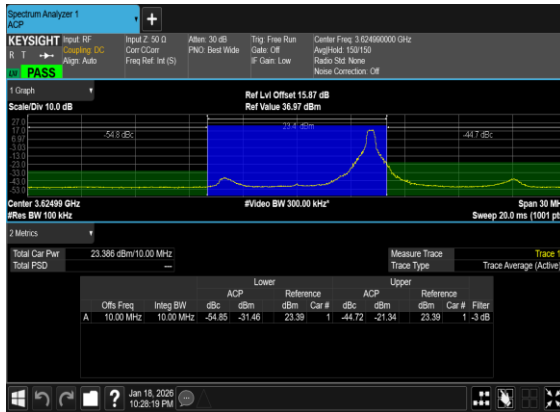


N48(10M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

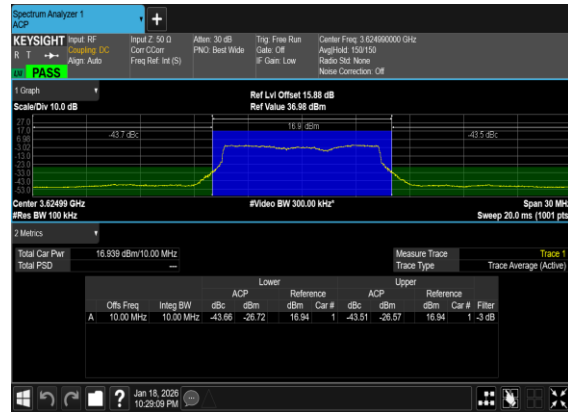

N48(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

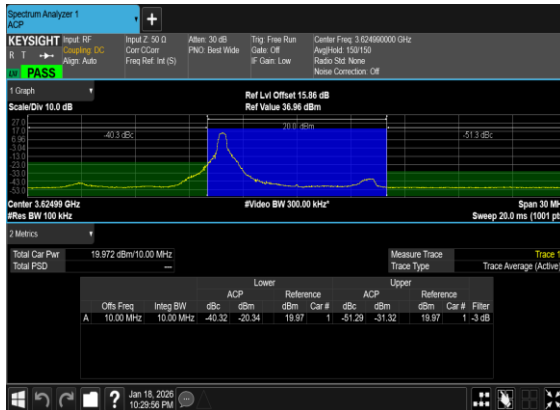


N48(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_Mid_CH

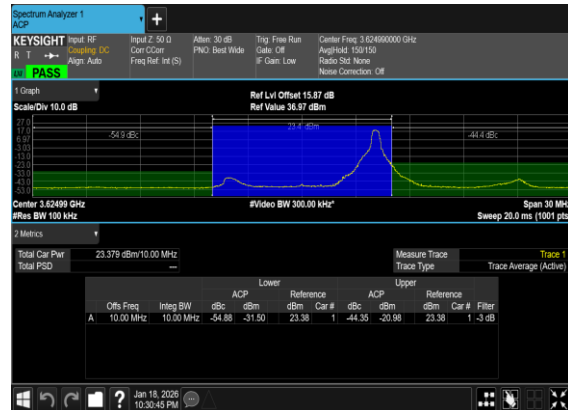





N48(10M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_High_CH

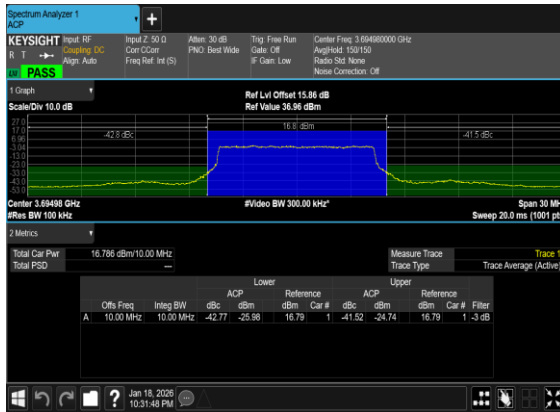


N48(10M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_High_CH

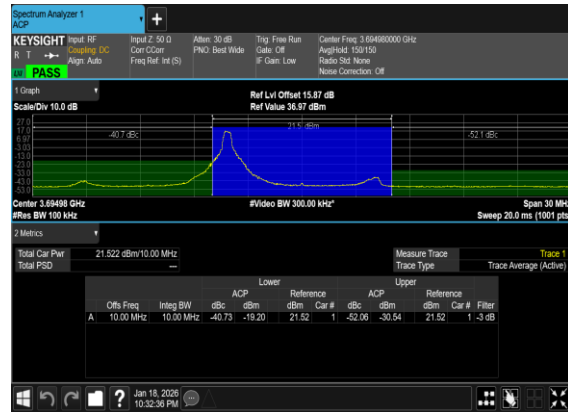

N48(10M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_High_CH

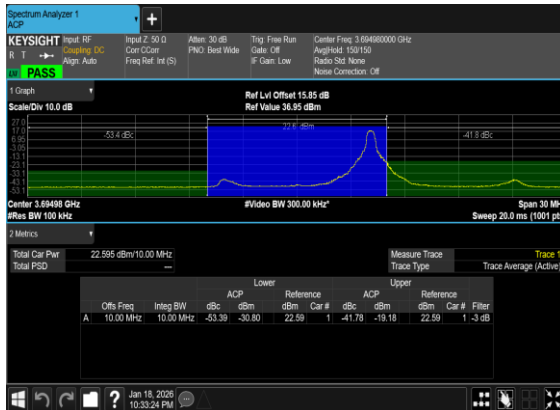


N48(10M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

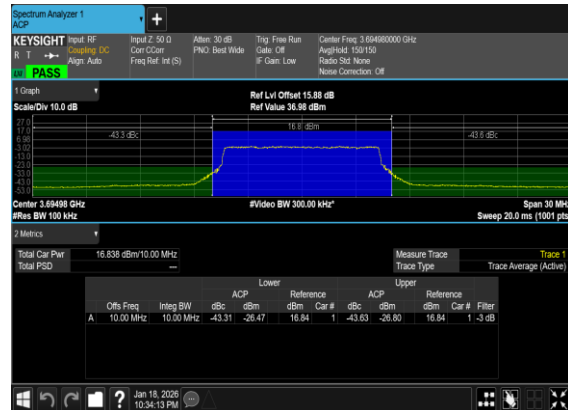





N48(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

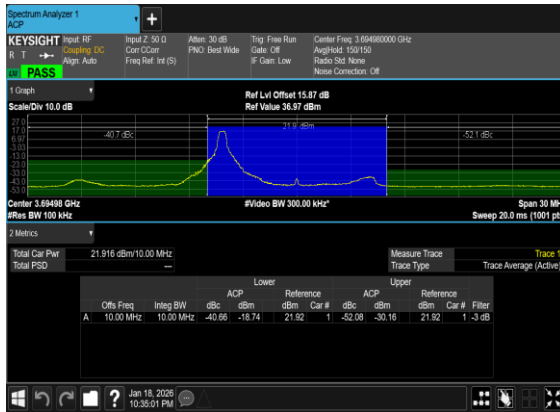


N48(10M)_DFT-s-OFDM_QPSK
_Edge_1RB_Right_High_CH

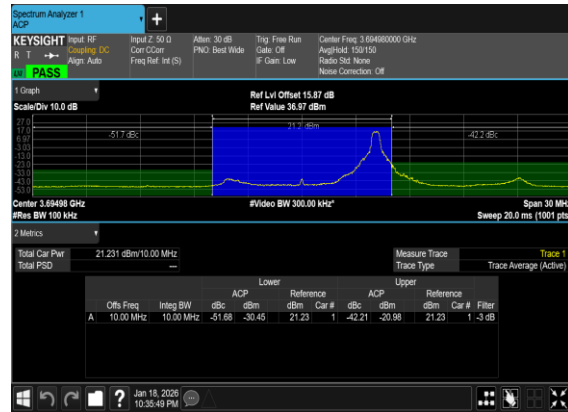

N48(20M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Low_CH

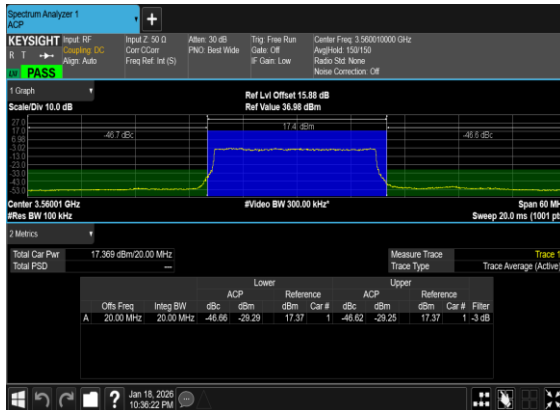

N48(20M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Left_Low_CH

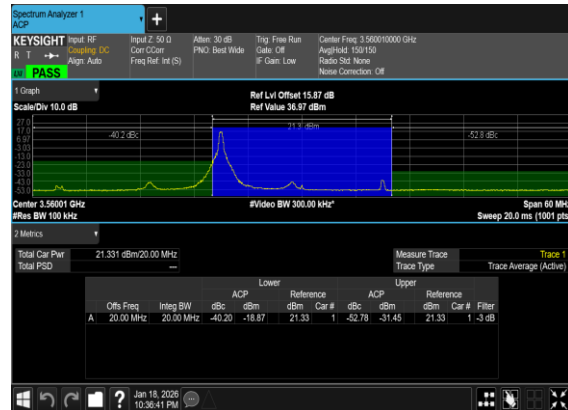





N48(20M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Right_Low_CH




N48(20M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

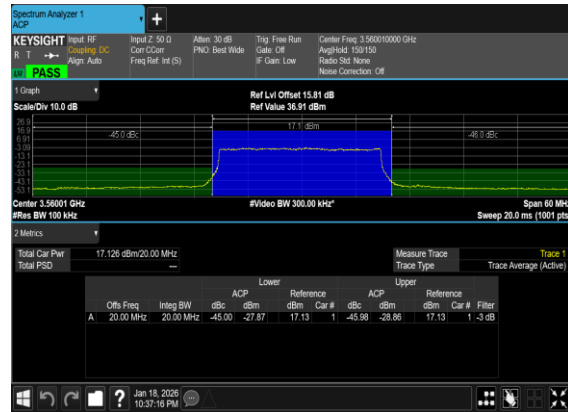

N48(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

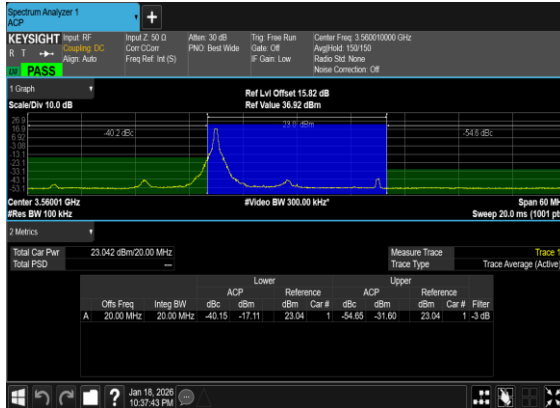


N48(20M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_Low_CH

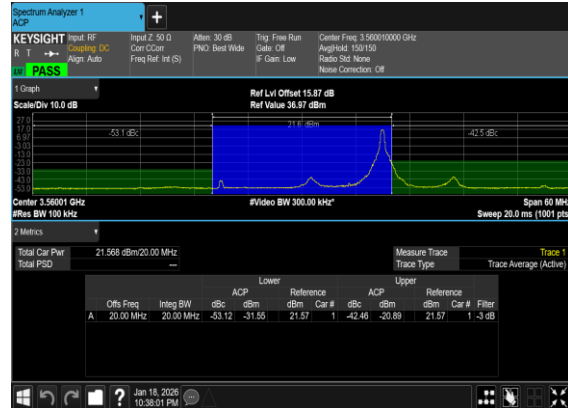





N48(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

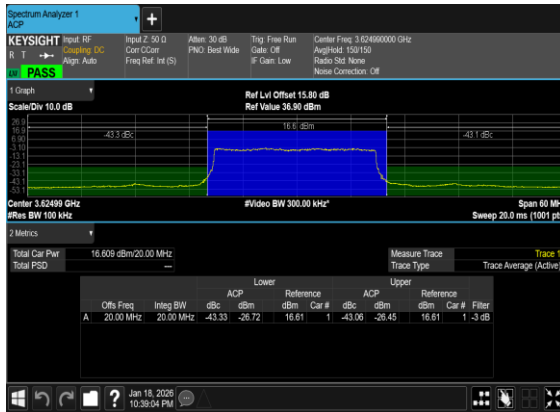


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH



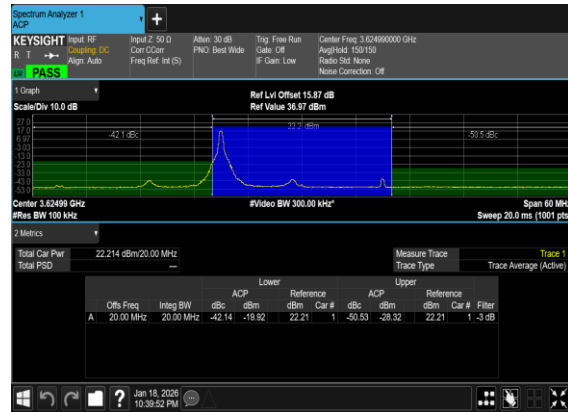


N48(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_Mid_CH

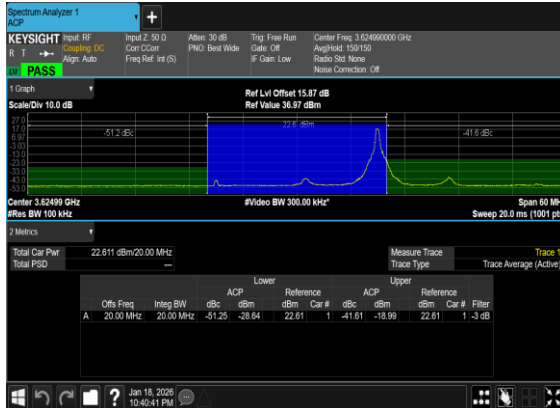

N48(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

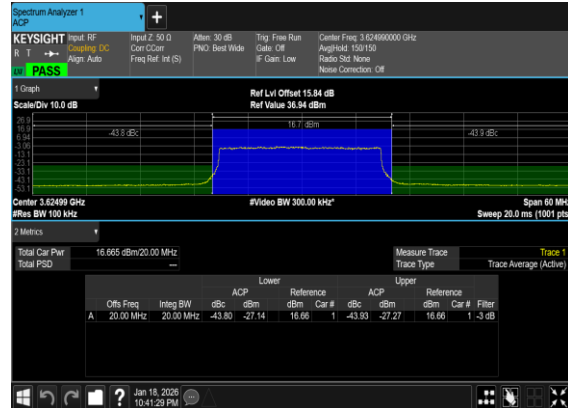







N48(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Right_High_CH




N48(20M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH

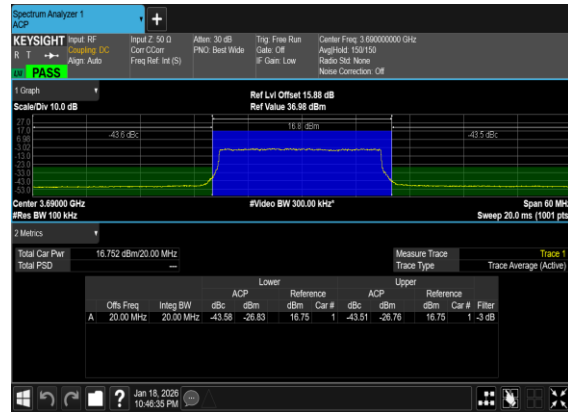

N48(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

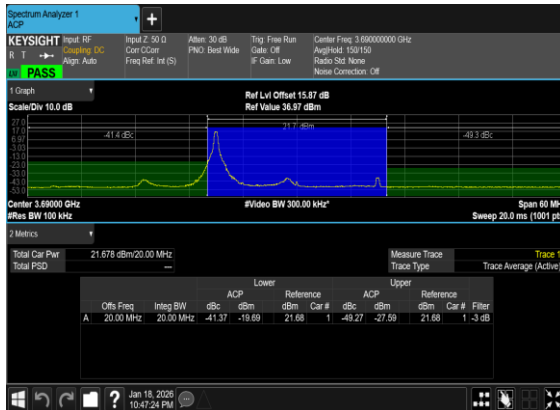


N48(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_High_CH

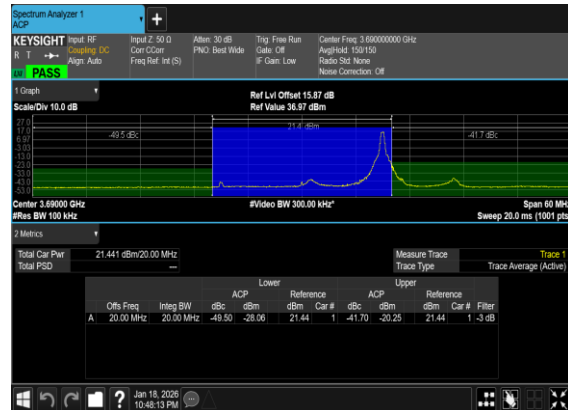





N48(40M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_Low_CH

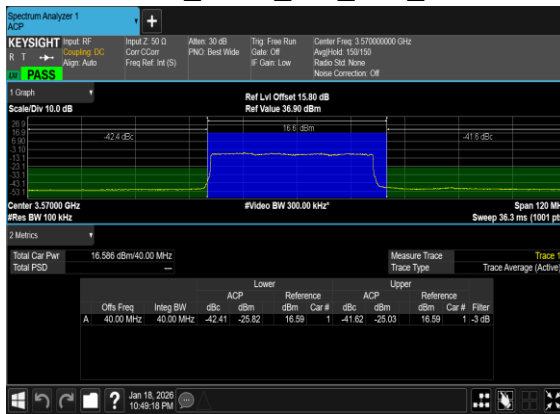


N48(40M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Left_Low_CH

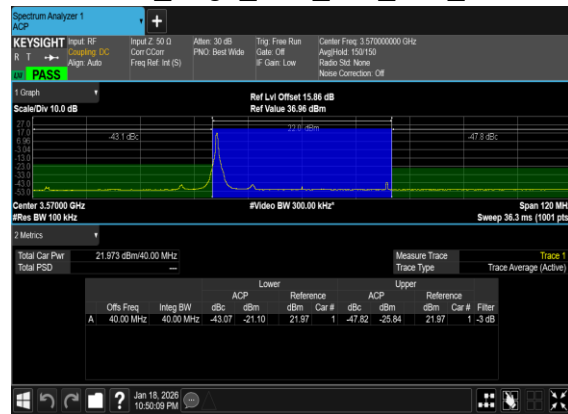

N48(40M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Right_Low_CH

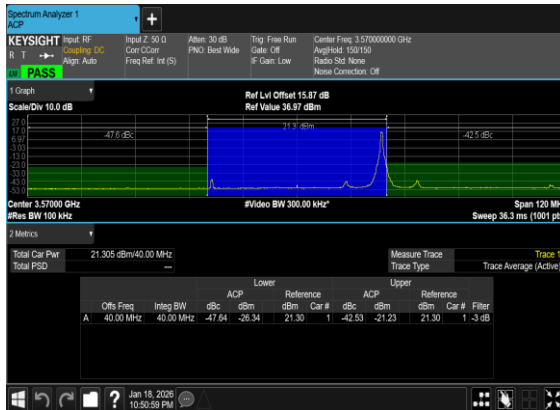


N48(40M)_DFT-s-
OFDM_QPSK_Outer_Full_Low_CH

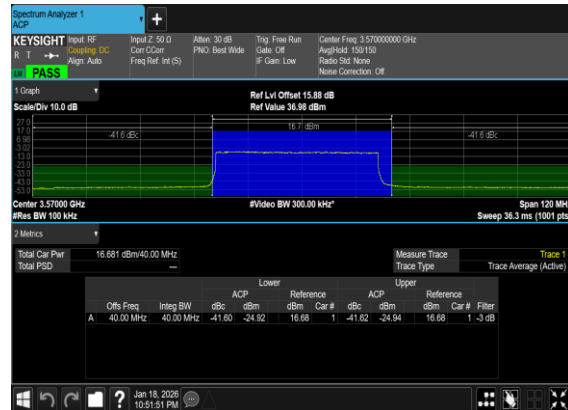





N48(40M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

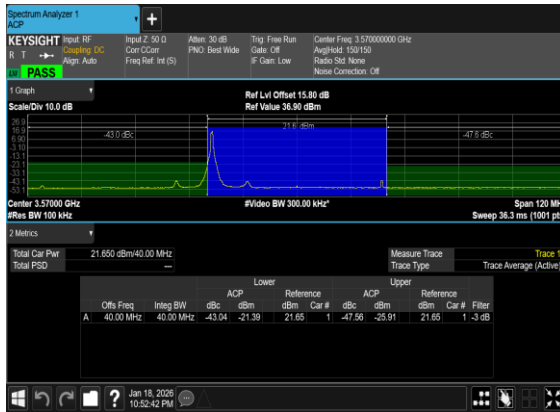


N48(40M)_DFT-s-OFDM_QPSK_Edge_1RB_Right_Low_CH

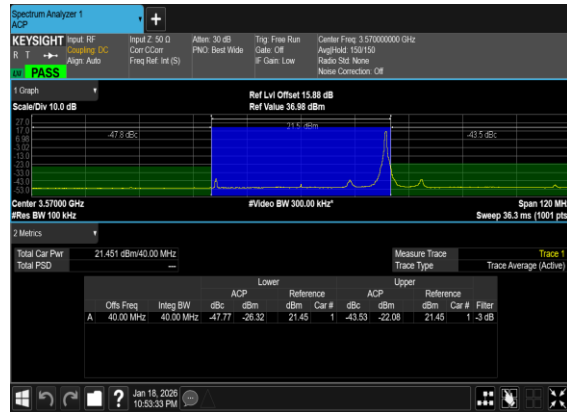

N48(40M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

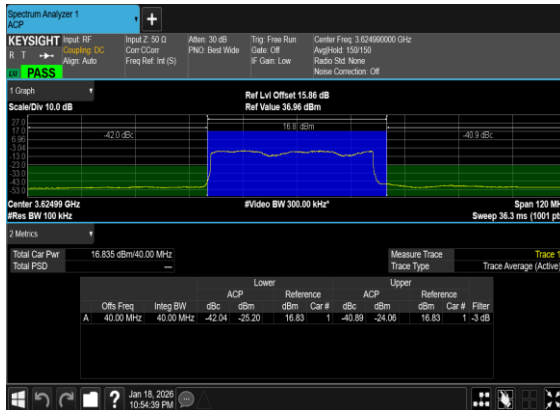


N48(40M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH

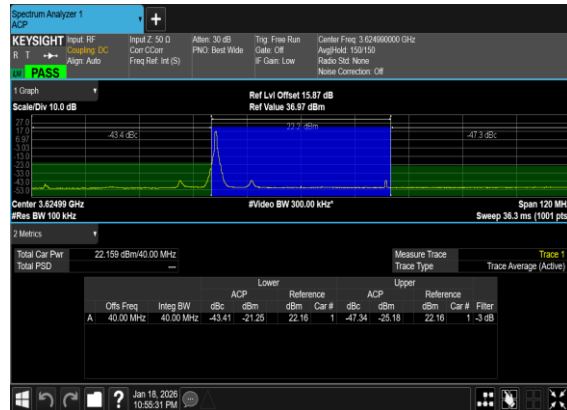





N48(40M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Right_Mid_CH

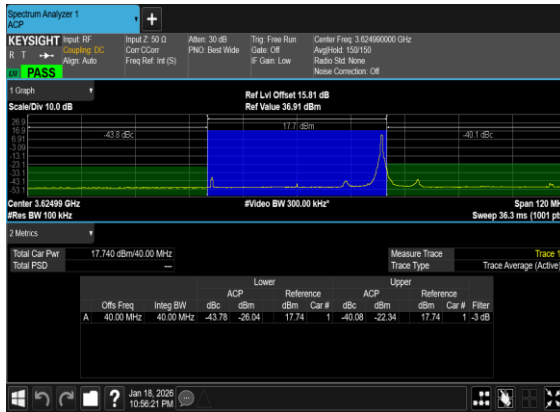


N48(40M)_DFT-s-
OFDM_QPSK_Outer_Full_Mid_CH

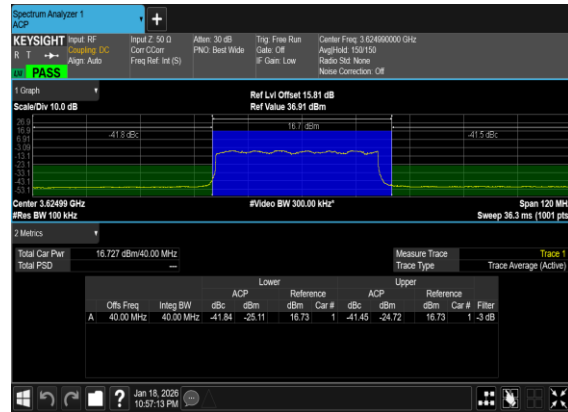

N48(40M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

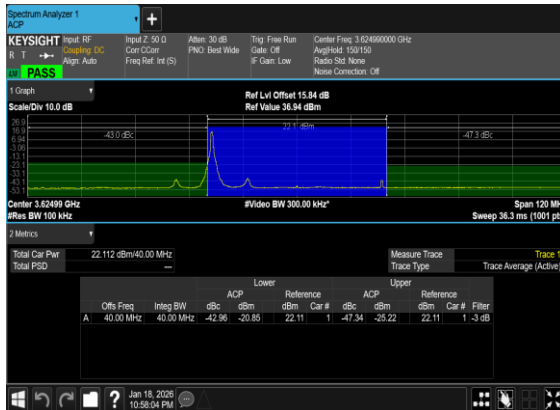


N48(40M)_DFT-s-
OFDM_QPSK_Edge_1RB_Right_Mid_CH

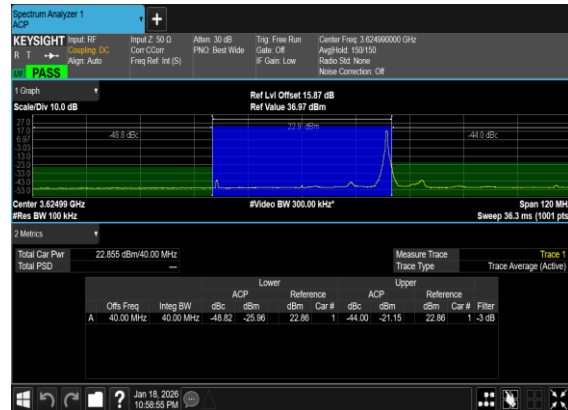





N48(40M)_DFT-s-OFDM_PI_2-
BPSK_Outer_Full_High_CH

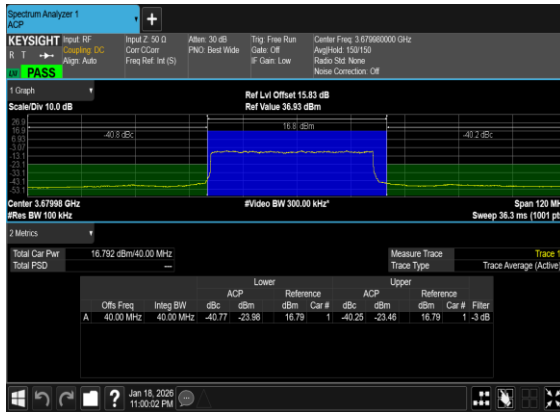


N48(40M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Left_High_CH

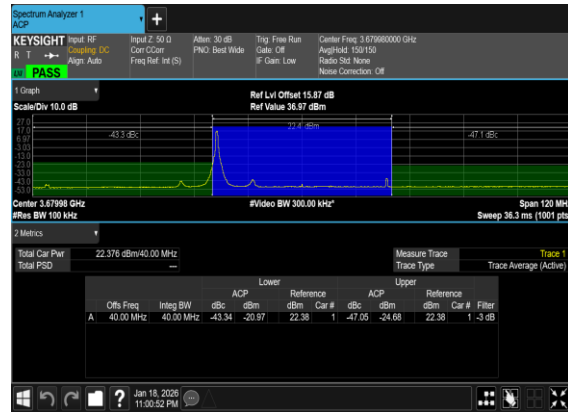

N48(40M)_DFT-s-OFDM_PI_2-
BPSK_Edge_1RB_Right_High_CH

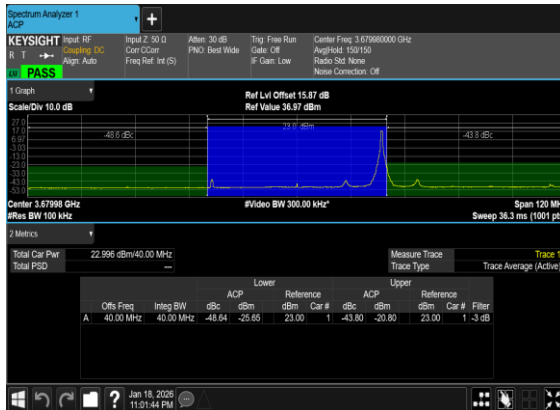


N48(40M)_DFT-s-
OFDM_QPSK_Outer_Full_High_CH

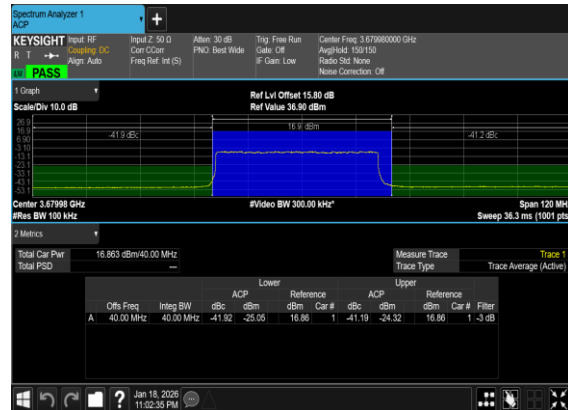




N48(40M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_High_CH

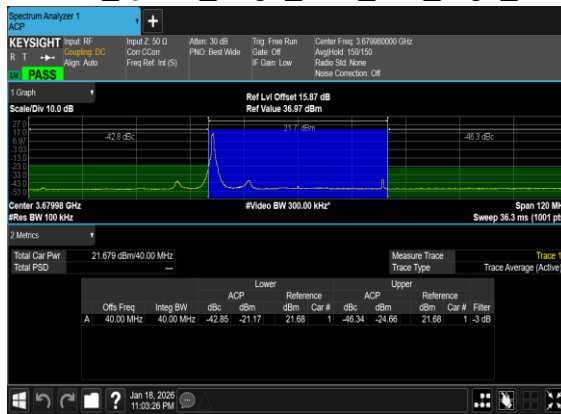

N48(40M)_DFT-s-OFDM_QPSK
_Edge_1RB_Right_High_CH

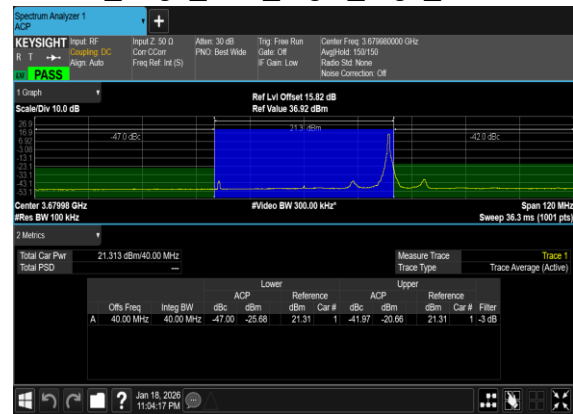



Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
48	30	10	637000	3555.0	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	10	637000	3555.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	10	637000	3555.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	10	637000	3555.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	10	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	10	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	10	646332	3694.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	10	646332	3694.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	20	637334	3560.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	637334	3560.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	20	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS



48	30	20	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	20	646000	3690.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	20	646000	3690.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	40	638000	3570.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	638000	3570.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	40	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	641666	3624.99	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM BPSK	1@0	see graph	---
48	30	40	645332	3679.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	see graph	---
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
48	30	40	645332	3679.98	DFT-s-OFDM QPSK	1@0	see graph	PASS




N48(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH




N48(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Low_CH



N48(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

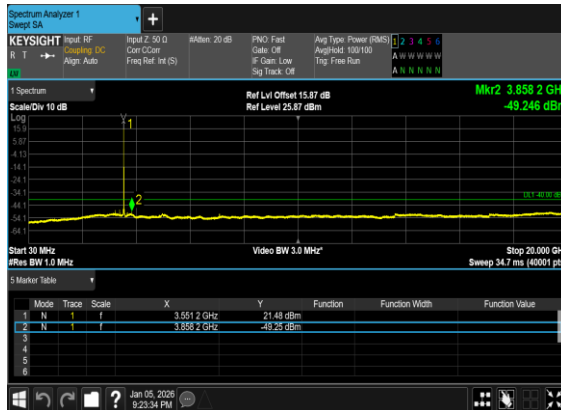

N48(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Low_CH

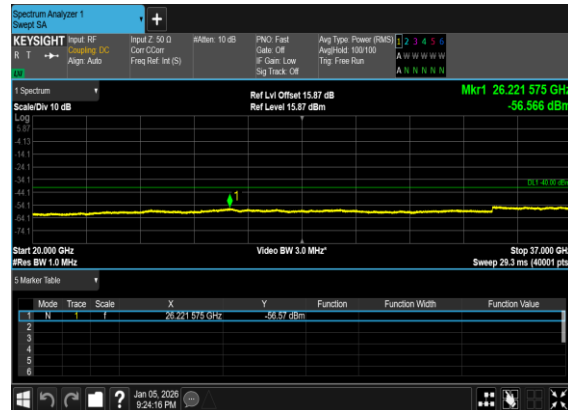




N48(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH



N48(10M)_DFT-s-
OFDM_BPSK_Edge_1RB_Left_Mid_CH



N48(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

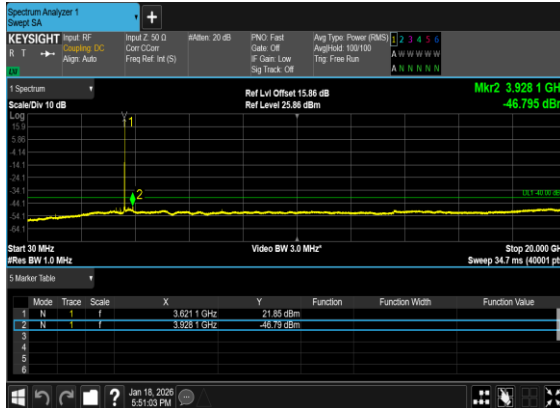

N48(10M)_DFT-s-
OFDM_QPSK_Edge_1RB_Left_Mid_CH

