

承 認 書

SPECIFICATION FOR APPROVAL

客 戶: CUSTOMER:	Deliwa
客 戶 料 號: CUST P/N:	74-8736-0000-27
线 艺 料 號: Xianyi P/N:	XY00069
產 品 型 號: DESC:	Φ 20.5x38-10Ts-0.08Gx*65P-8mm-42.5COLB
日 期: DATE:	2026/08/21
版 本: Version:	A.0

擬制 PREPARED BY	審核 CHECKED BY	批准 APPROVED BY	客戶承認 CUSTOMER APPROVE
Deng Yanan	Cai Jiyu	Xie Xiaozai	

东莞线艺科技有限公司

Dongguan Xianyi Technology Co., Ltd.

工厂地址：东莞市大岭山镇渭溪路8号福林工业园J栋5楼

Factory Address: 5th Floor, Building J, Fulin Industrial
Park, WeiXi Road, Dali Mountain Town, Dongguan City


TEL: 18688713269

E-mail: 1330470898@qq.com

SPECIFICATION

產品型號: DESC	$\phi 20.5 \times 38-10Ts-0.08Gx*65P-8mm-42.5COLB$	版本 Rev: A.0	客戶 CUST:	Deliwa
			线艺料号 Xianyi P/N:	XY00069
			客户料号 CUST P/N:	74-8736-0000-27

一、尺寸 DIMENSION:(mm)

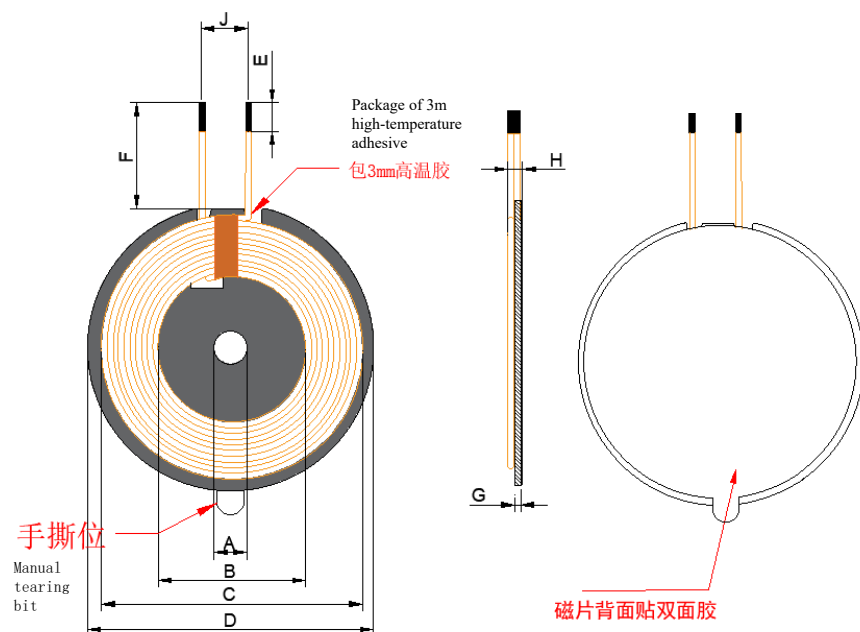

A	5.3±0.5
B	20.5±0.5
C	38±1.5
D	42.5±1
E	3±1
F	8 ± 1
G	0.8±0.1
H	1.65-1.8
J	Line spacing 6.5MAX

Note:

1. Place the coil facing the hard magnetic sheet. The size of the magnetic sheet is $\phi 42.5 \times 5.3mm$, with a thickness of 0.8mm and two slots.
2. Adhere the back of the magnetic sheet with a $\phi 41 \times 0.1mm$ (ref) strip with a tearable backing adhesive.
3. Wrap the outlet position with 3mm thick heat-resistant tape (ultra-thin heat-resistant tape).

二、原理图 SCHEMATIC DIAGRAM:



三、绕线参数 Winding Specification:

序号 NO.	端子 TERMINAL	线径 WIRE	圈数 Turns	绕线方向 Winding Direction
1	S F	2RS-N0.08*65P	10Ts	CCW

四、电气特性 ELECTRICAL CHARACTERISTICS:

温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%

序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
1	IND.	S-F	6.5uH ±10%	100KHz/1.0V	LCZMETERUT2830E
2	DCR	S-F	<90mΩ		LCZMETERUT2830E


擬制/日期 PREPARED BY/DATE	審核/日期 CHECKED BY/DATE
Deng Yanan 2026/08/21	Cai Jiyu 2026/08/21

SPECIFICATION

產品型號: DESC	Φ 20.5x38-10Ts-0.08Gx*65P-8mm-42.5COLB	版本 Rev: A.0	客戶 CUST:	德立华
			线艺料号 Xianyi P/N:	XY00069
			客户料号 CUST P/N:	74-8736-0000-27

五、包装 PACKING:

5.1 包装图片 Packing pictures:

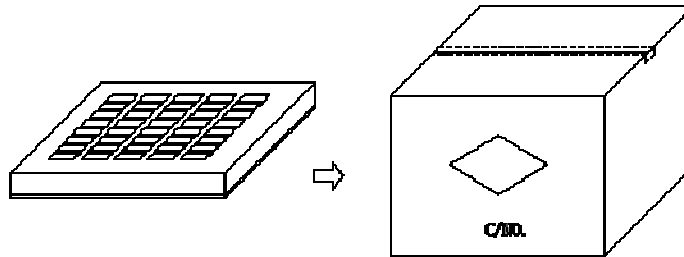

5.2 包装数量及规格 Packing Quantity:

项目 Item	数量 Quantity	材料规格 Material
盒 Box	800 Pcs	370*265*55mm
箱 Big Carton	3200 Pcs	400*280*310mm

5.3 包装以现有包装盘为参照标准，以实际出货包装为准,如有特要求可以定制。

The packaging shall be based on the existing packing plate and the actual delivery package shall prevail. If there is any requirement, we can customize it.

六、材料清单 Material list:

序号 number	材料名称 Material name	品名描述 Description	制造商 Manufacturer
1	Enamel-coated wire	0.08*65P	Fushi or weifeng
2	Lead-free tin rod	Lead-free tin rod	Yuxing
3	magnetic sheet	The size of the hard magnetic sheet is Φ42.5 x 5.3 mm, with a thickness of 0.8 mm and a slot.	
4	Double-sided adhesive tape	Φ 41*0.1 mm With tearable tabs	

擬制/日期 PREPARED BY/DATE	審核/日期 CHECKED BY/DATE
Deng Yanan 2026/08/21	Cai Jiyu 2026/08/21