

User Manual

Office Headset OHR690

WHAT'S IN THE BOX


OHR690 Headset


Charging Base


USB Cable


User Manual

OHR690 dongle_USB-C

USB-C/A Adapter



Storage Bag

TECH SPEC

Model	OHR690
Battery Capacity	300mAh/3.7V
Charging Time	2 ± 0.5 Hours
Working Hours	About 36 Hours
Standby Time	About 100 Hours
Product Input	Type-C DC 5V/0.25A
Drive Unit Diameter	30mm
Frequency Response	20Hz - 20KHz
Speaker Impedance	32Ω ± 15%
Microphone Sensitivity	-45 ± 2dB


POWER ON/OFF

Hold the Power button for 3 seconds to power the headset **ON/OFF**.



CONNECT - BLUETOOTH MODE

Pair to mobile device



Move the connectivity mode slider to BT (Bluetooth)
Voice Prompt: "Bluetooth mode"

Voice Prompt: "Pairing"
Headset LED: Blue and red lights flash alternately




Choose " OHR690 " to connect

Voice Prompt: "Bluetooth Connected"
Headset LED: Blue flash every 10 seconds


To connect another device or re-enter pairing mode, turn off the headset, switch to Bluetooth mode, and hold the Multi-Function Button/ for 7 seconds until pairing begins.

CONNECT - USB MODE

Connect to PC



Insert the USB dongle into your laptop or PC
USB dongle LED: Flashing blue




Move the connectivity mode slider to 2.4GHz
Voice Prompt: "USB mode"
The headset and the USB dongle are pre-paired



Voice Prompt: "USB Connected"
Headset LED: Blue flash every 10 seconds
USB dongle LED: Constant blue

MULTI-POINT CONNECTION

Supports Bluetooth and USB dual-mode connection.




Dual-mode (Bluetooth + 2.4 GHz) –Mode switching
When both Bluetooth and USB (2.4 GHz) connections are active, use the Mode Switch to select the audio source:
BT — use the paired Bluetooth device.
2.4G — use the USB dongle (2.4 GHz).

Tip: If audio does not switch automatically, select this headset as the output device in your computer or mobile device sound settings.


ONE-PORT DUAL CONNECT

What if my device doesn't have enough USB ports?




1. Plug the USB dongle into the base's USB port.
2. Use USB-C cable to connect the base with transmitter connect to your device
3. You can now connect your headphones to the device for use, while also being able to use the charging function of the base station as normal.

CONTROLS

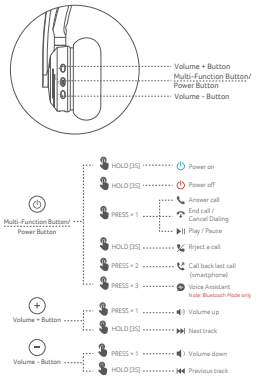

CONTROLS

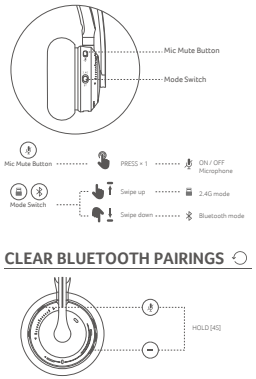

CLEAR BLUETOOTH PAIRINGS

SLEEP MODE


After the headphones are power on and connected, they will automatically enter sleep mode after 10 minutes of inactivity to conserve battery power. To exit sleep mode, simply resume playback from the source or press the multi-function button.



After 30 minutes in sleep mode, the headphones will power off.
To turn them back on, press and hold the multi-function button for 3 seconds.


CHARGING

1. Direct Charging via Headset USB-C Port




* The headset's built-in USB-C port is charge-only and cannot be used for wired audio connections.

2. Dock Charging Via Charging Base



LED BEHAVIORS

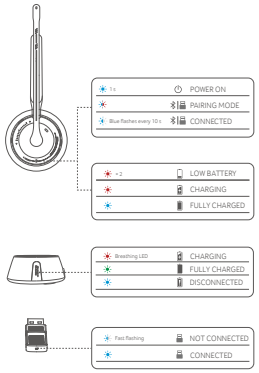

IMPORTANT INFORMATION

1. Read the user manual before use.
2. Fully charge the headset for the first time, but do not exceed 12 hours.
3. If not used for a long time, charge the headset every 2 weeks.
4. Use a charger and USB-C cable that meet safety specifications.
5. Do not disassemble or repair the headset yourself.
6. Avoid using it in extremely high or low temperatures.
7. Do not use charging bases from other brands.
8. Avoid prolonged use at high volume.

AFTER-SALES POLICY

- **30-Day Free Repair or Replacement**
- **1-Year Comprehensive Warranty**
- **24/7 Online Customer Service**

We provide 24/7 online customer service to assist you anytime. Please note that message reception may be slightly delayed on weekends or holidays. Some emails may also end up in your spam folder, so if you don't receive a reply, please try sending your message again.

FCC ID: 2AXCY-OHR690

yb_headset.service@acergadget.com
Warranty and technical support.

Made in China

FCC STATEMENT

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference,and
(2) This device must accept any interference received, including interference that may cause undesired operation.
2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.
This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
Reorient or relocate the receiving antenna.
Increase the separation between the equipment and receiver.
Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
Consult the dealer or an experienced radio/TV technician for help.

RF warning statement:
The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

OHR690说明书文档

单页尺寸: 90*135mm

材质: 128g双铜+四色印刷+风琴折

字体: Acer Foco