


Appendix D: Time of occupancy


Test Result


TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH1	Ant1	Hop	0.383	150	0.057	≤0.4	PASS
DH3	Ant1	Hop	1.630	102	0.166	≤0.4	PASS
DH5	Ant1	Hop	2.870	93	0.267	≤0.4	PASS
2DH1	Ant1	Hop	0.393	152	0.06	≤0.4	PASS
2DH3	Ant1	Hop	1.630	94	0.153	≤0.4	PASS
2DH5	Ant1	Hop	2.880	72	0.207	≤0.4	PASS
3DH1	Ant1	Hop	0.393	160	0.063	≤0.4	PASS
3DH3	Ant1	Hop	1.620	97	0.157	≤0.4	PASS
3DH5	Ant1	Hop	2.880	70	0.202	≤0.4	PASS





Test Graphs

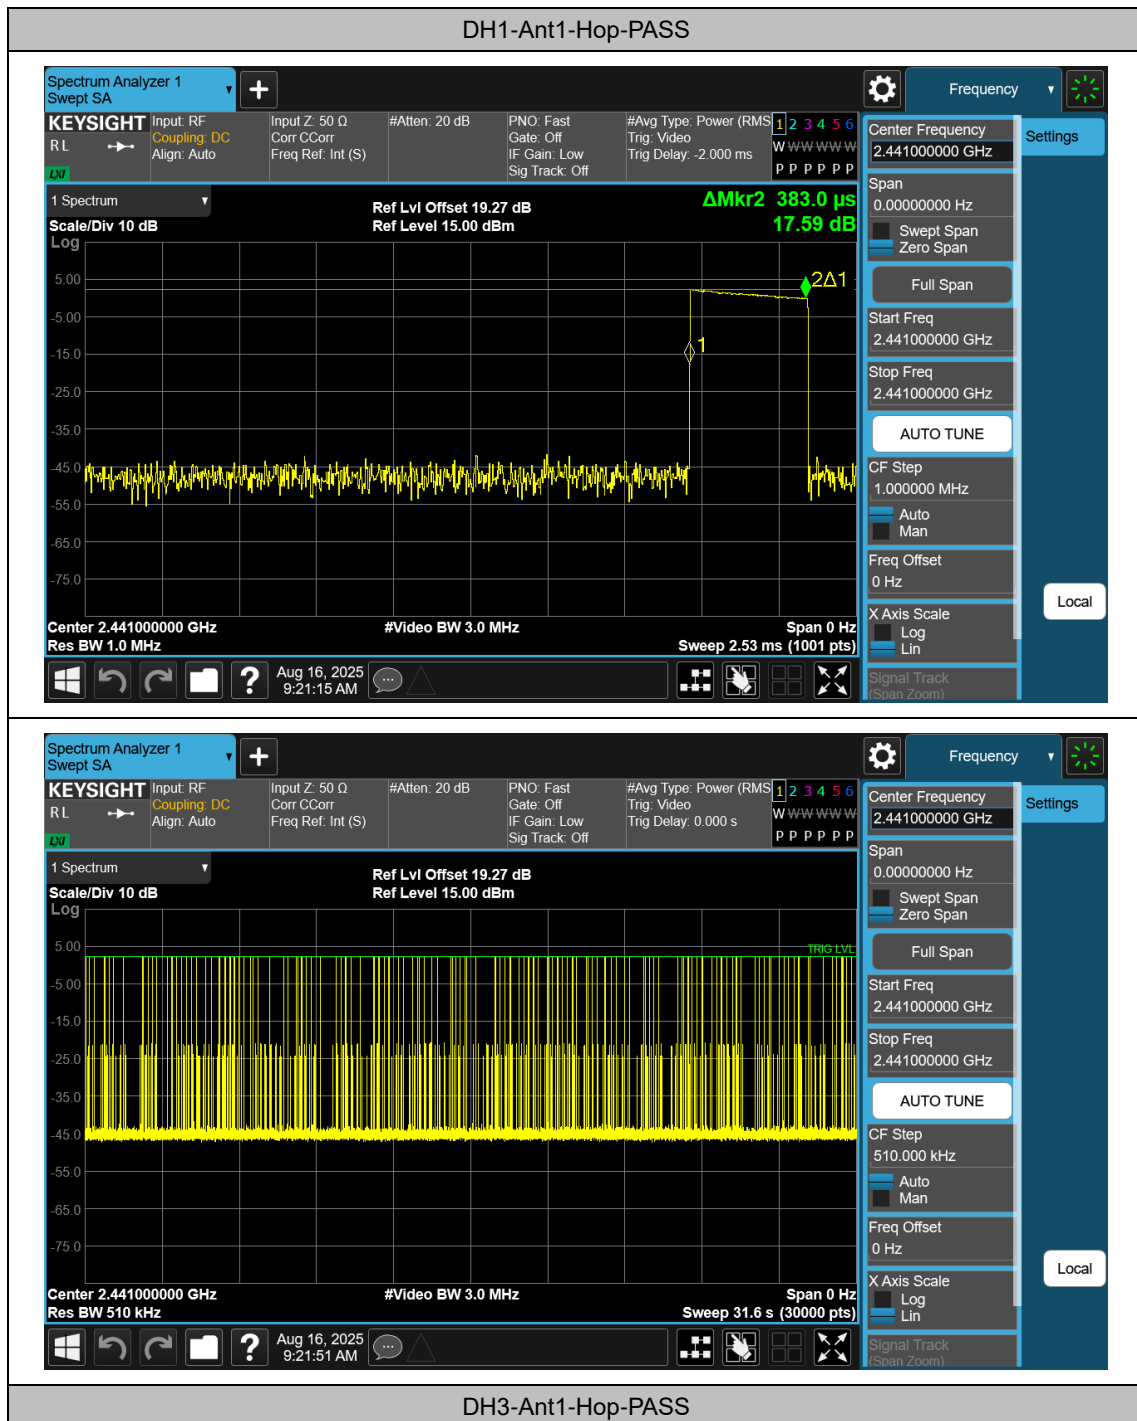


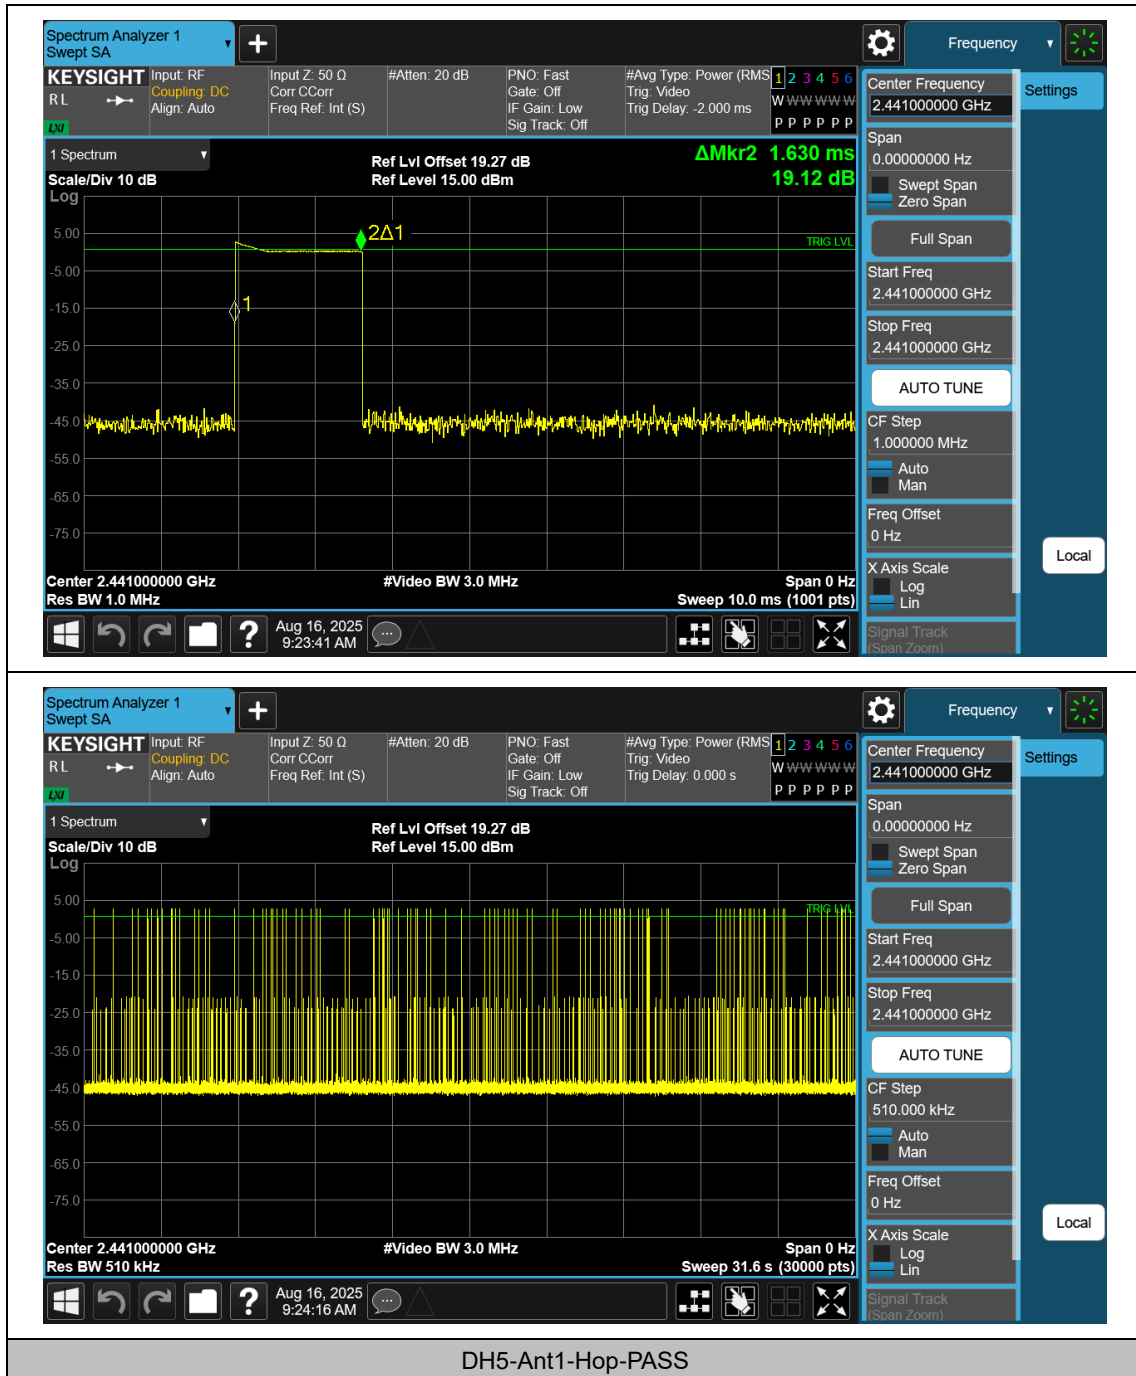


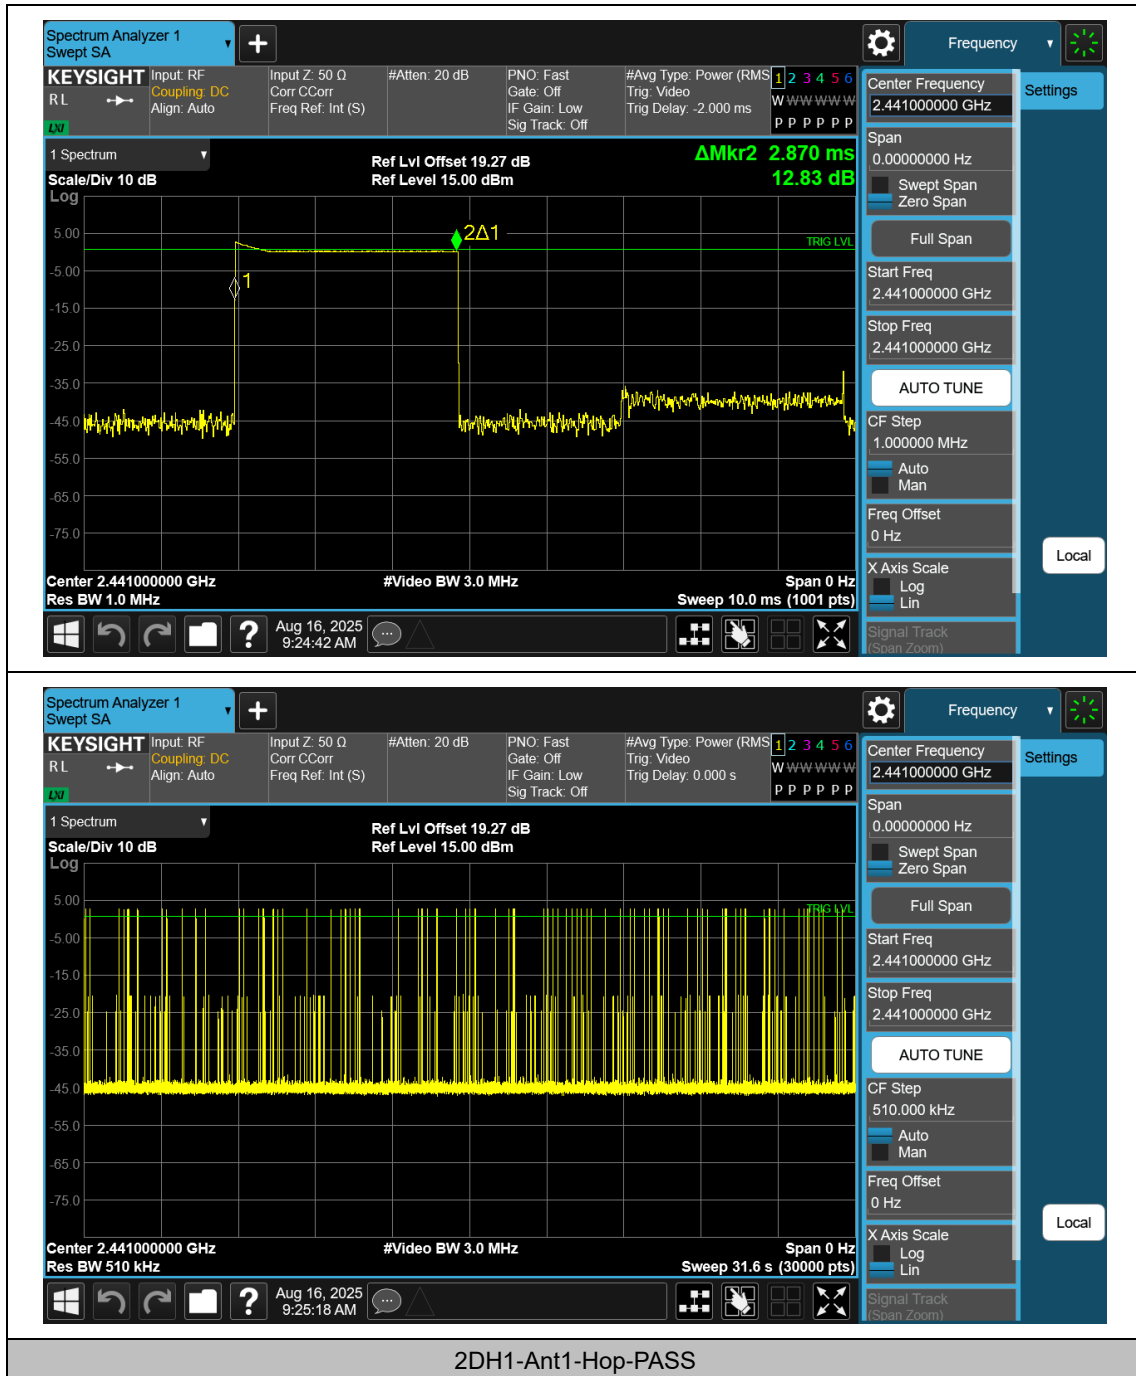


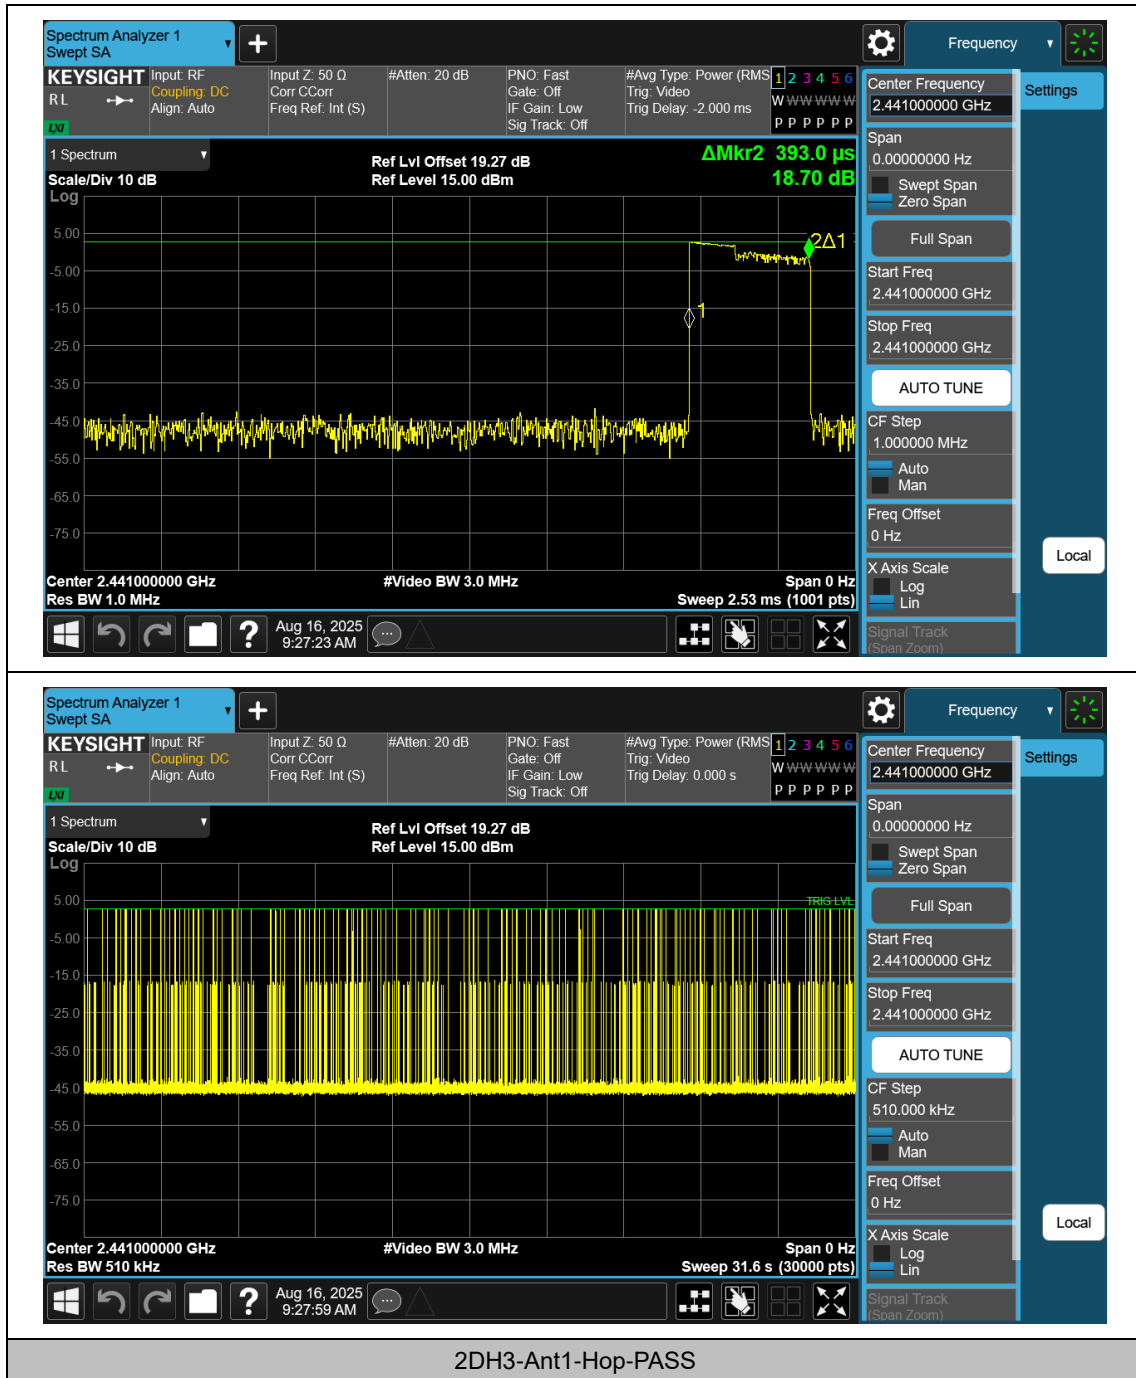


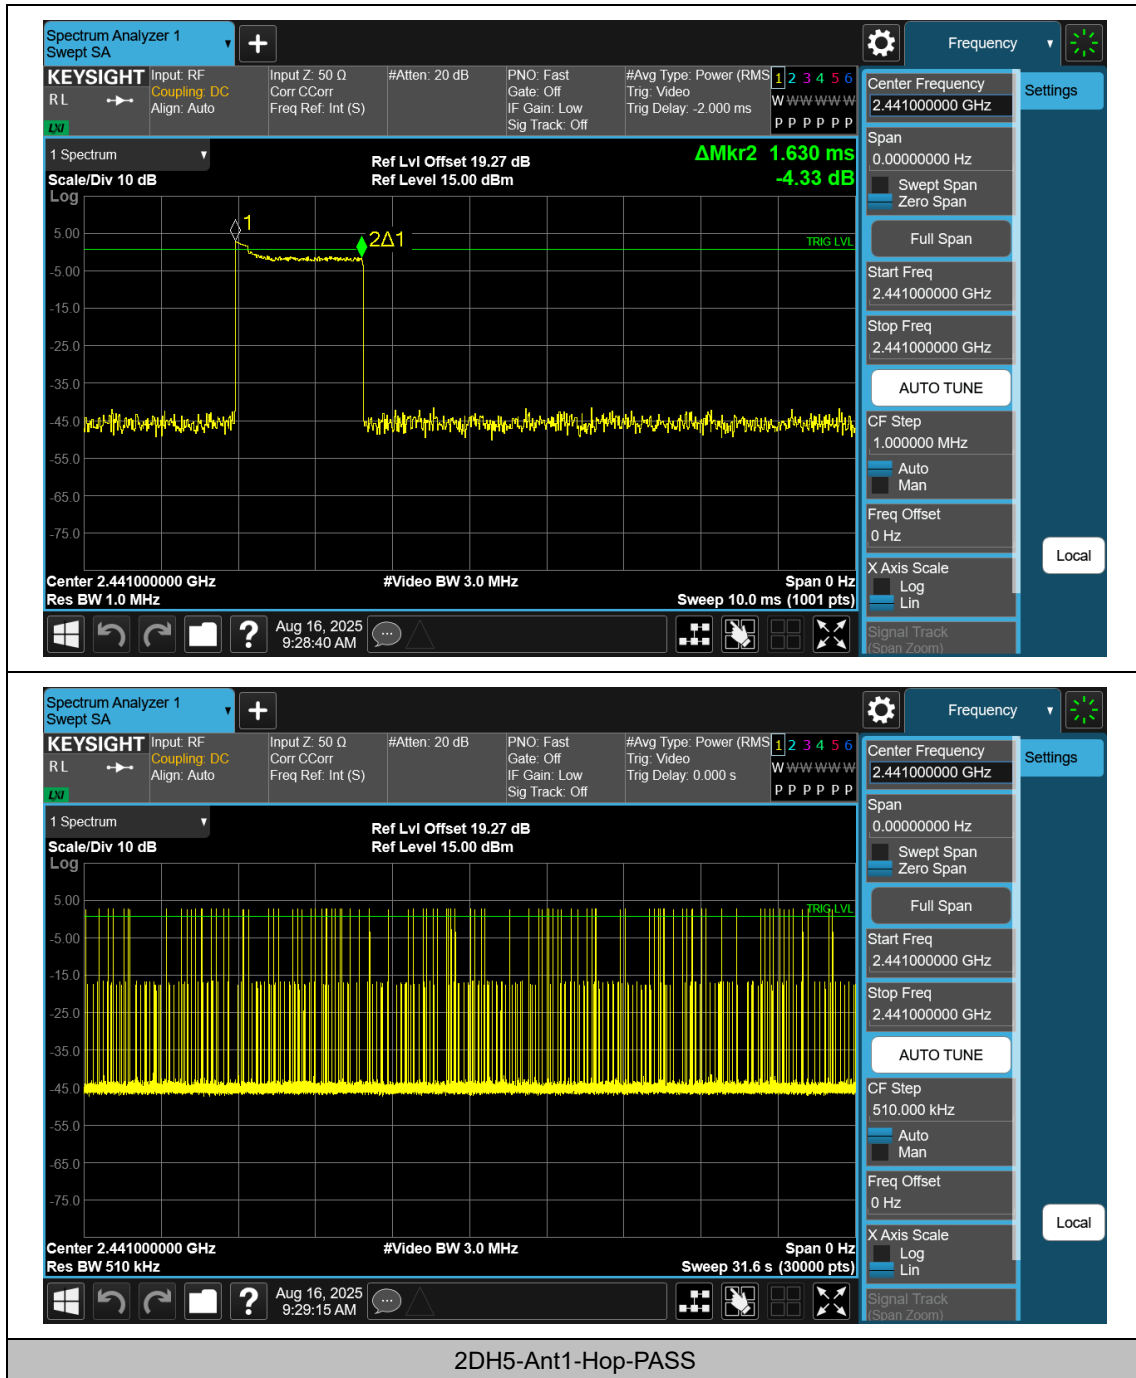

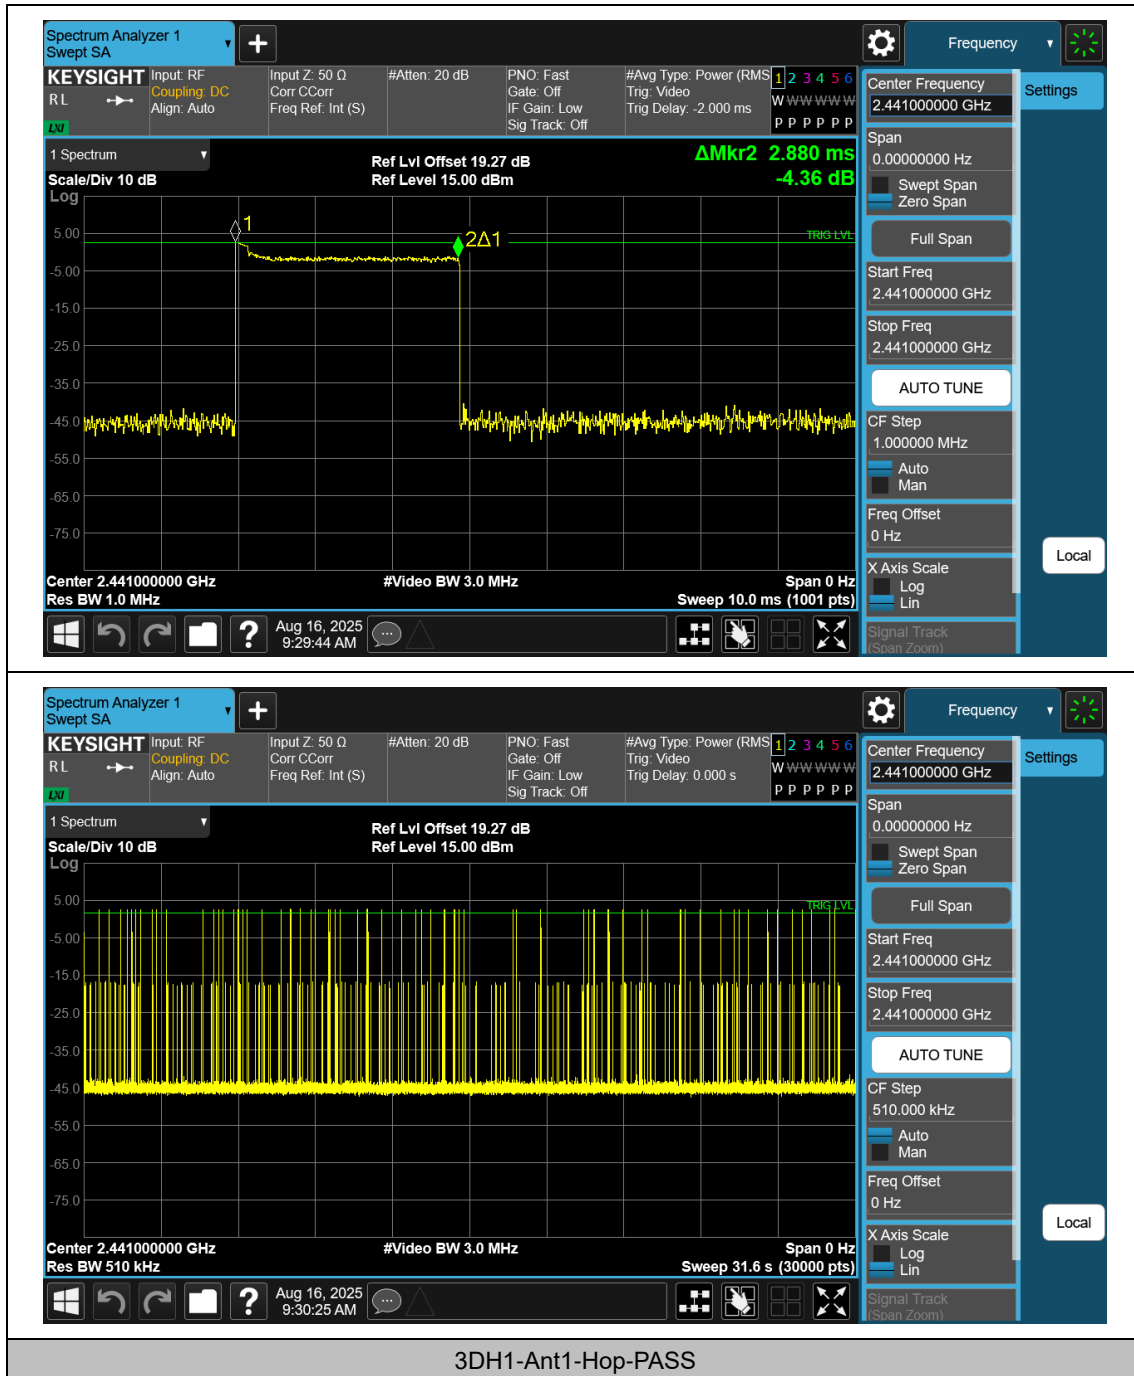

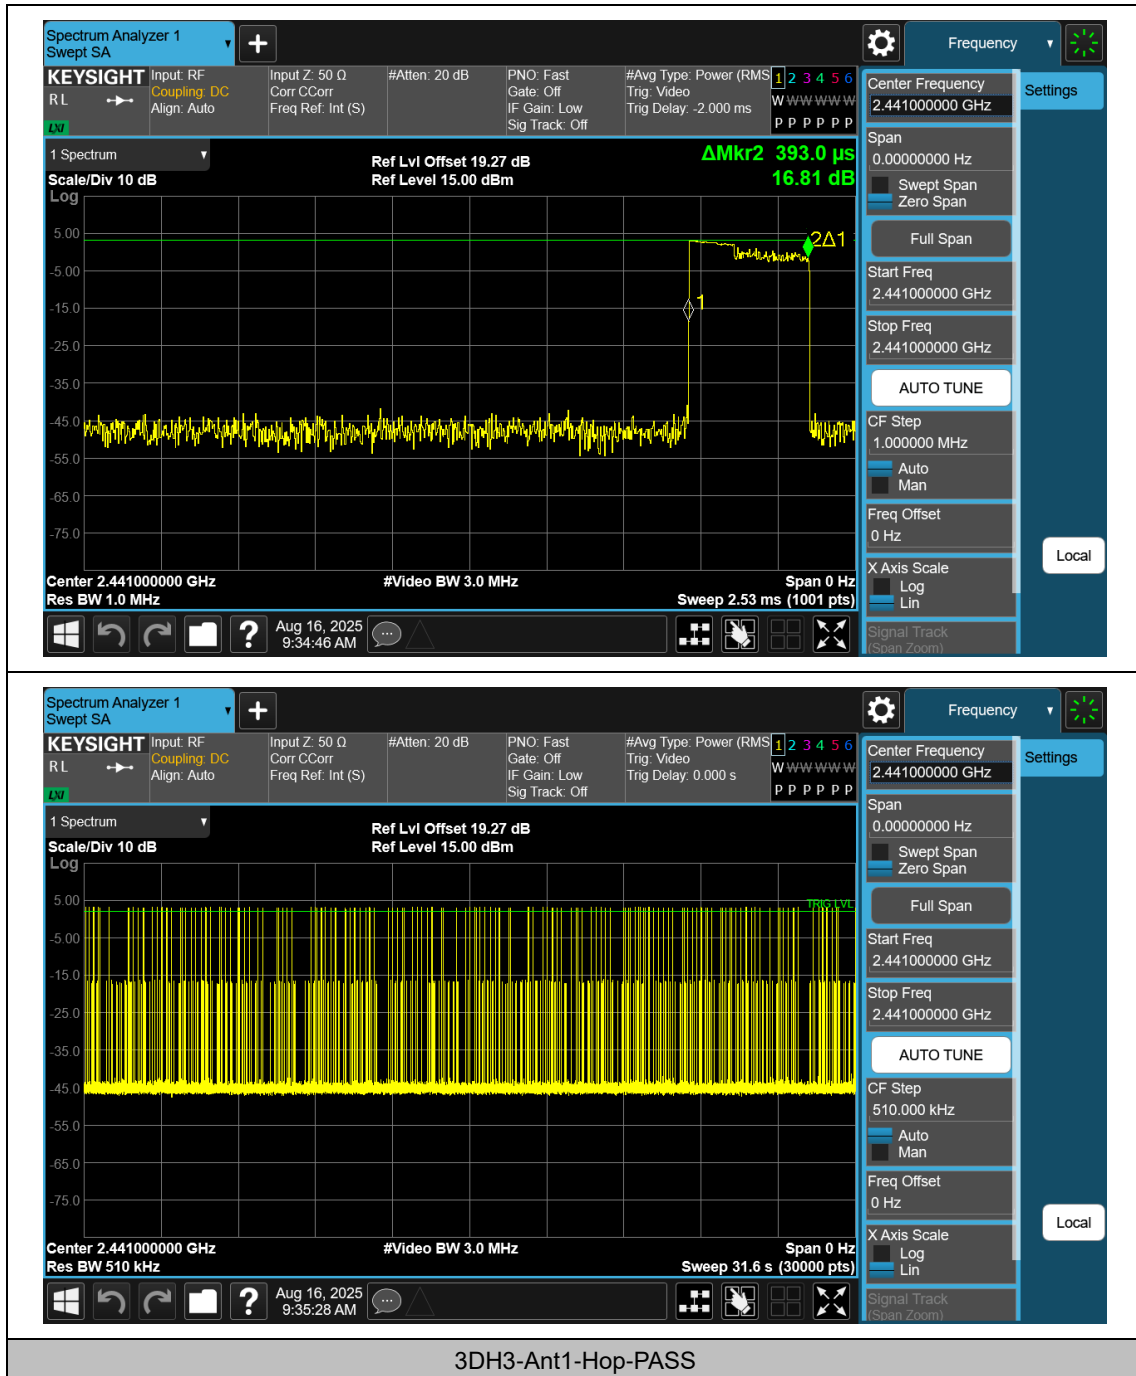

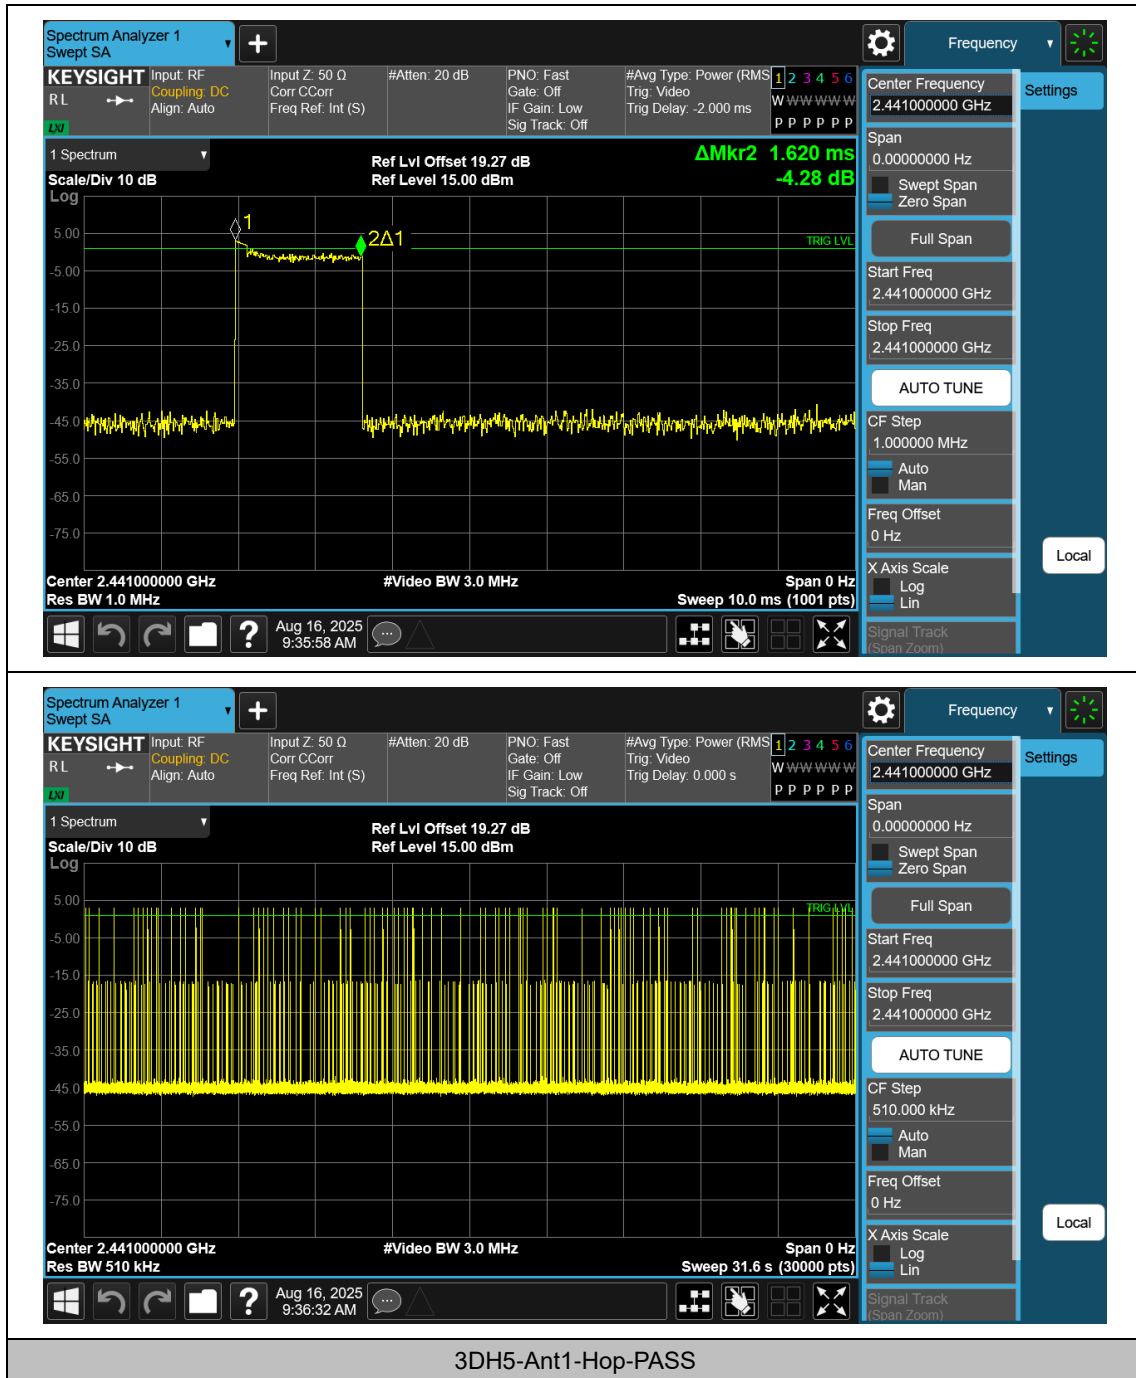

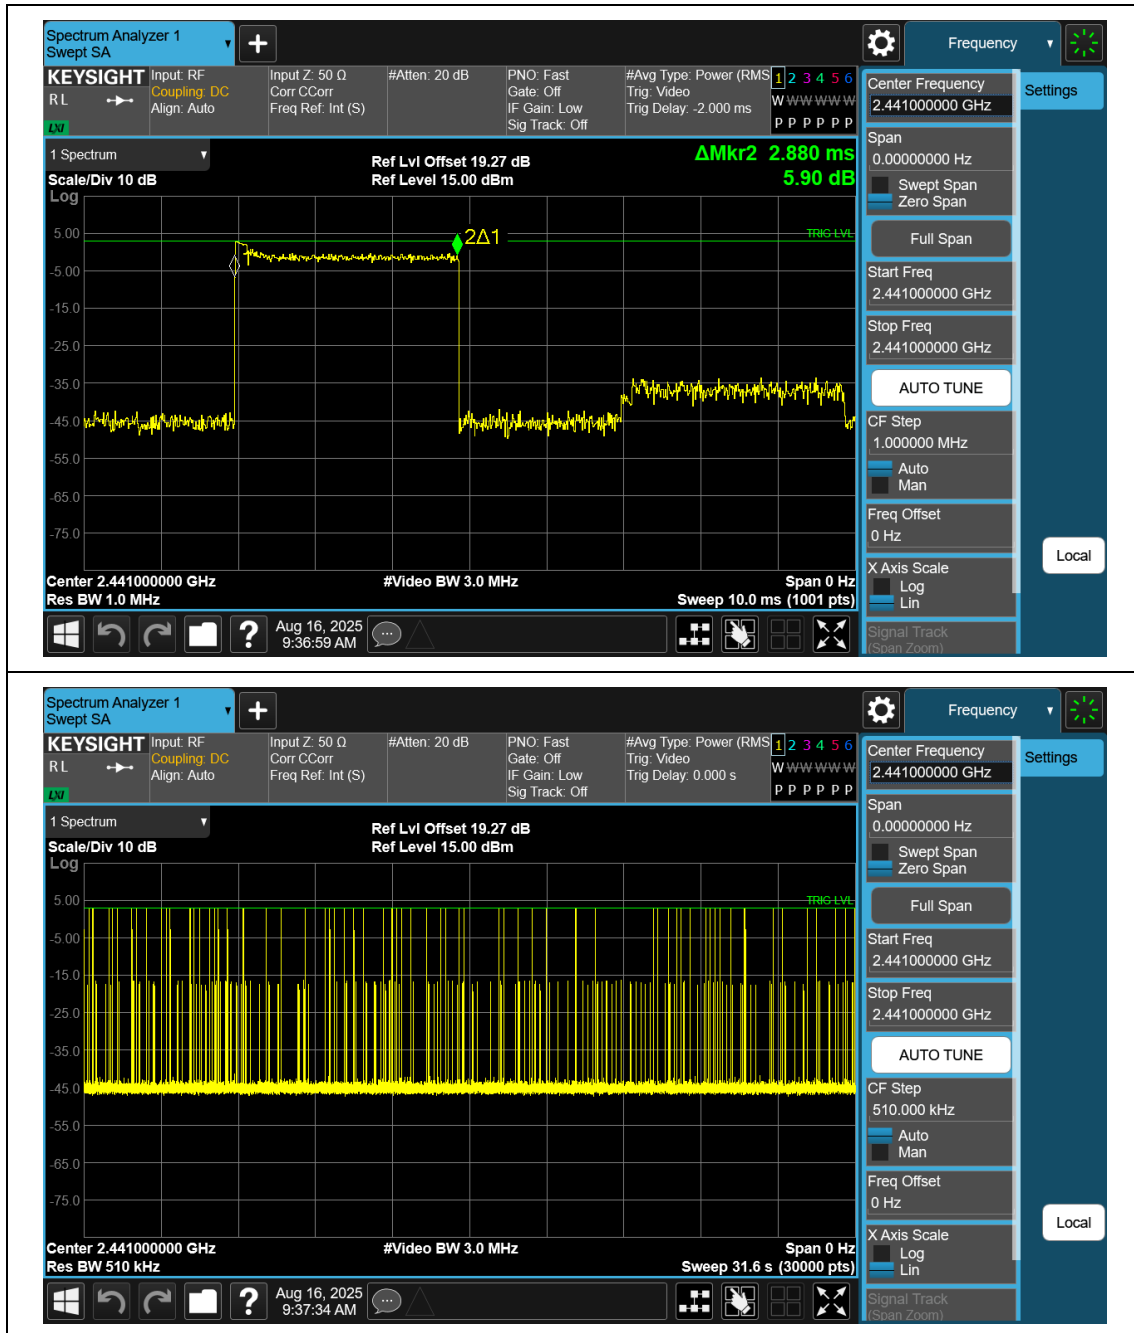



Appendix E: Number of hopping channels

Test Result

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

Test Graphs

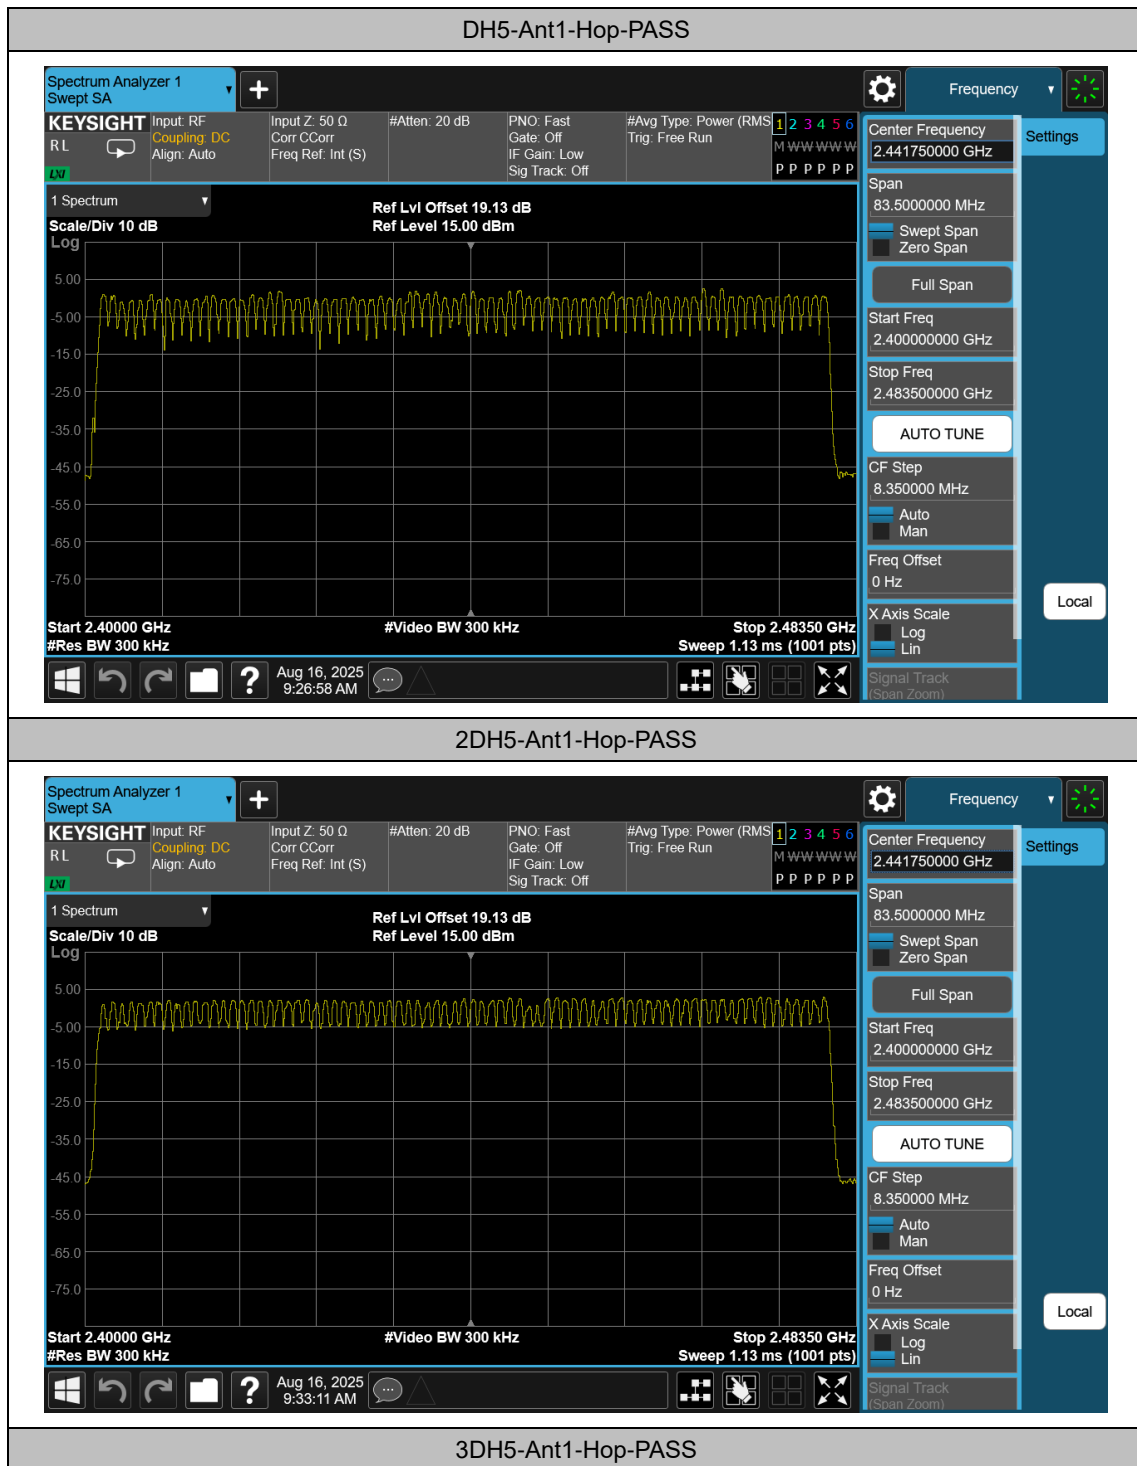

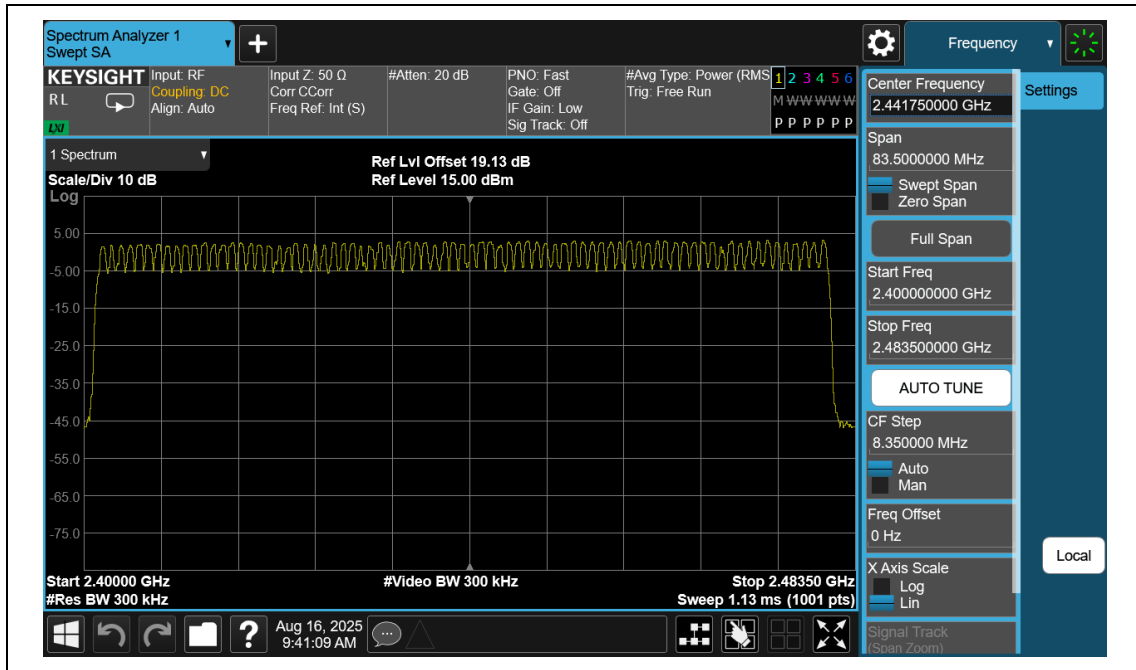


Appendix F: Band edge measurements


Test Result


TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	0.54	-50.03	≤ -19.46	PASS
DH5	Ant1	High	2480	2.15	-48.76	≤ -17.85	PASS
DH5	Ant1	Low	Hop_2402	-0.75	-48.72	≤ -20.75	PASS
DH5	Ant1	High	Hop_2480	2.29	-48.71	≤ -17.71	PASS
2DH5	Ant1	Low	2402	0.88	-48.98	≤ -19.12	PASS
2DH5	Ant1	High	2480	2.13	-49.15	≤ -17.87	PASS
2DH5	Ant1	Low	Hop_2402	1.05	-49.16	≤ -18.95	PASS
2DH5	Ant1	High	Hop_2480	2.52	-48.87	≤ -17.48	PASS
3DH5	Ant1	Low	2402	1.00	-49.6	≤ -19	PASS
3DH5	Ant1	High	2480	2.36	-49.47	≤ -17.64	PASS
3DH5	Ant1	Low	Hop_2402	-0.94	-49.06	≤ -20.94	PASS
3DH5	Ant1	High	Hop_2480	3.08	-48.67	≤ -16.92	PASS





Test Graphs

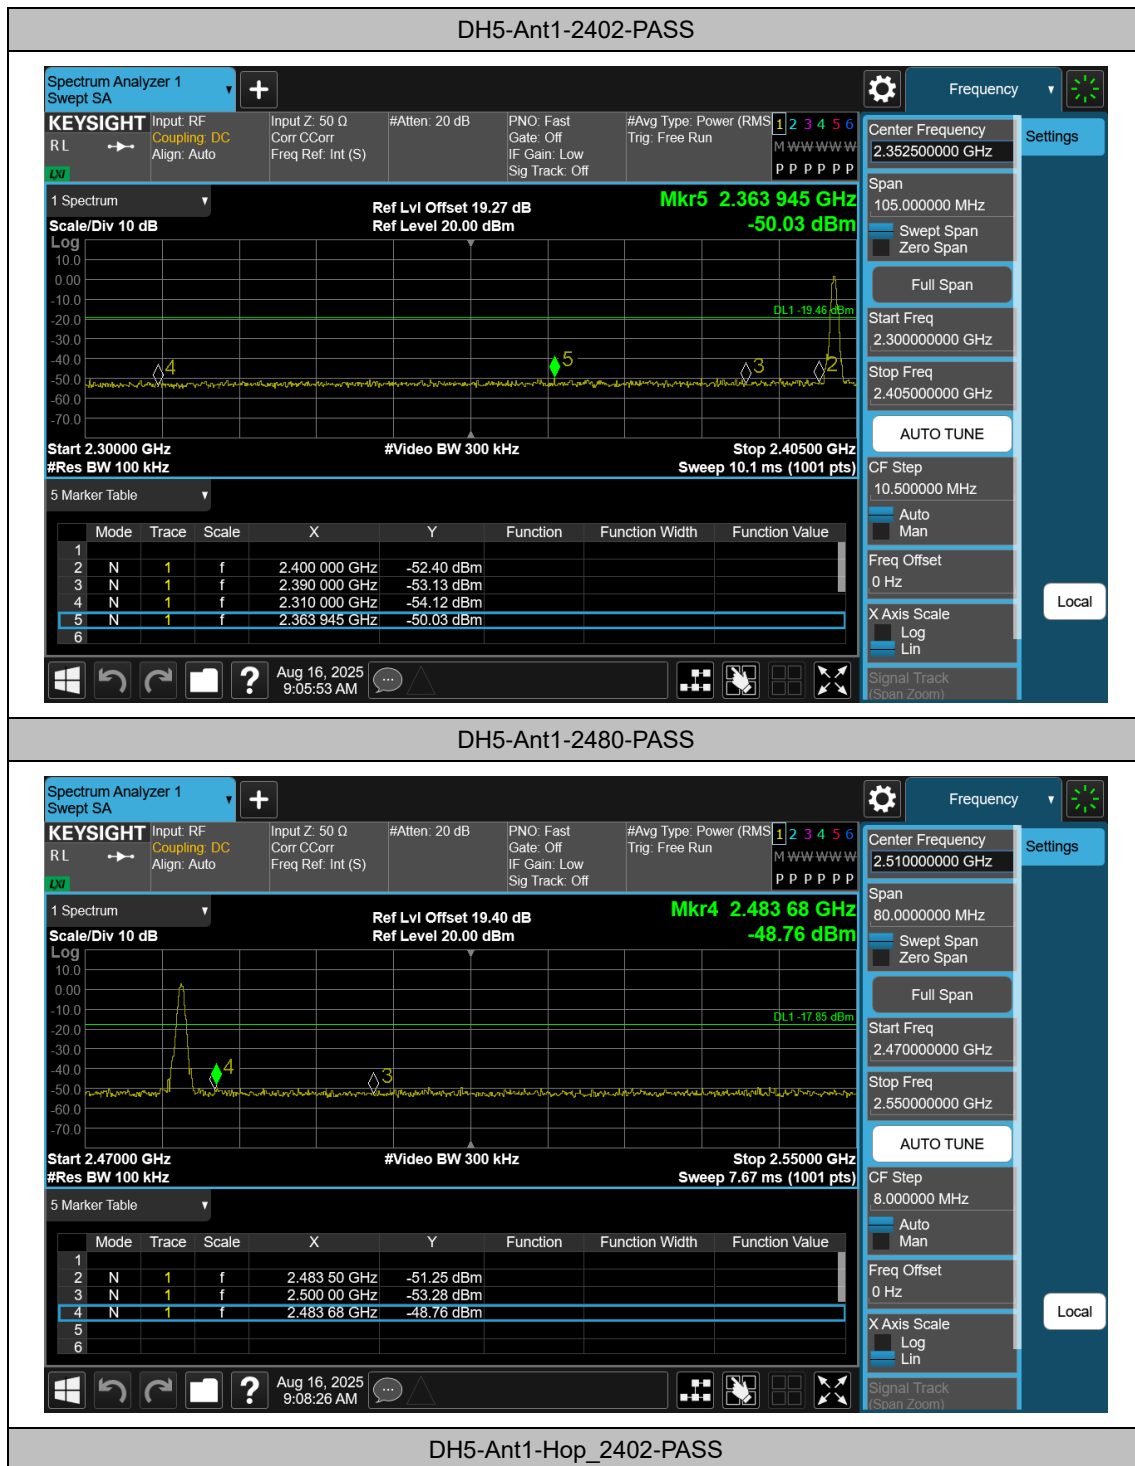

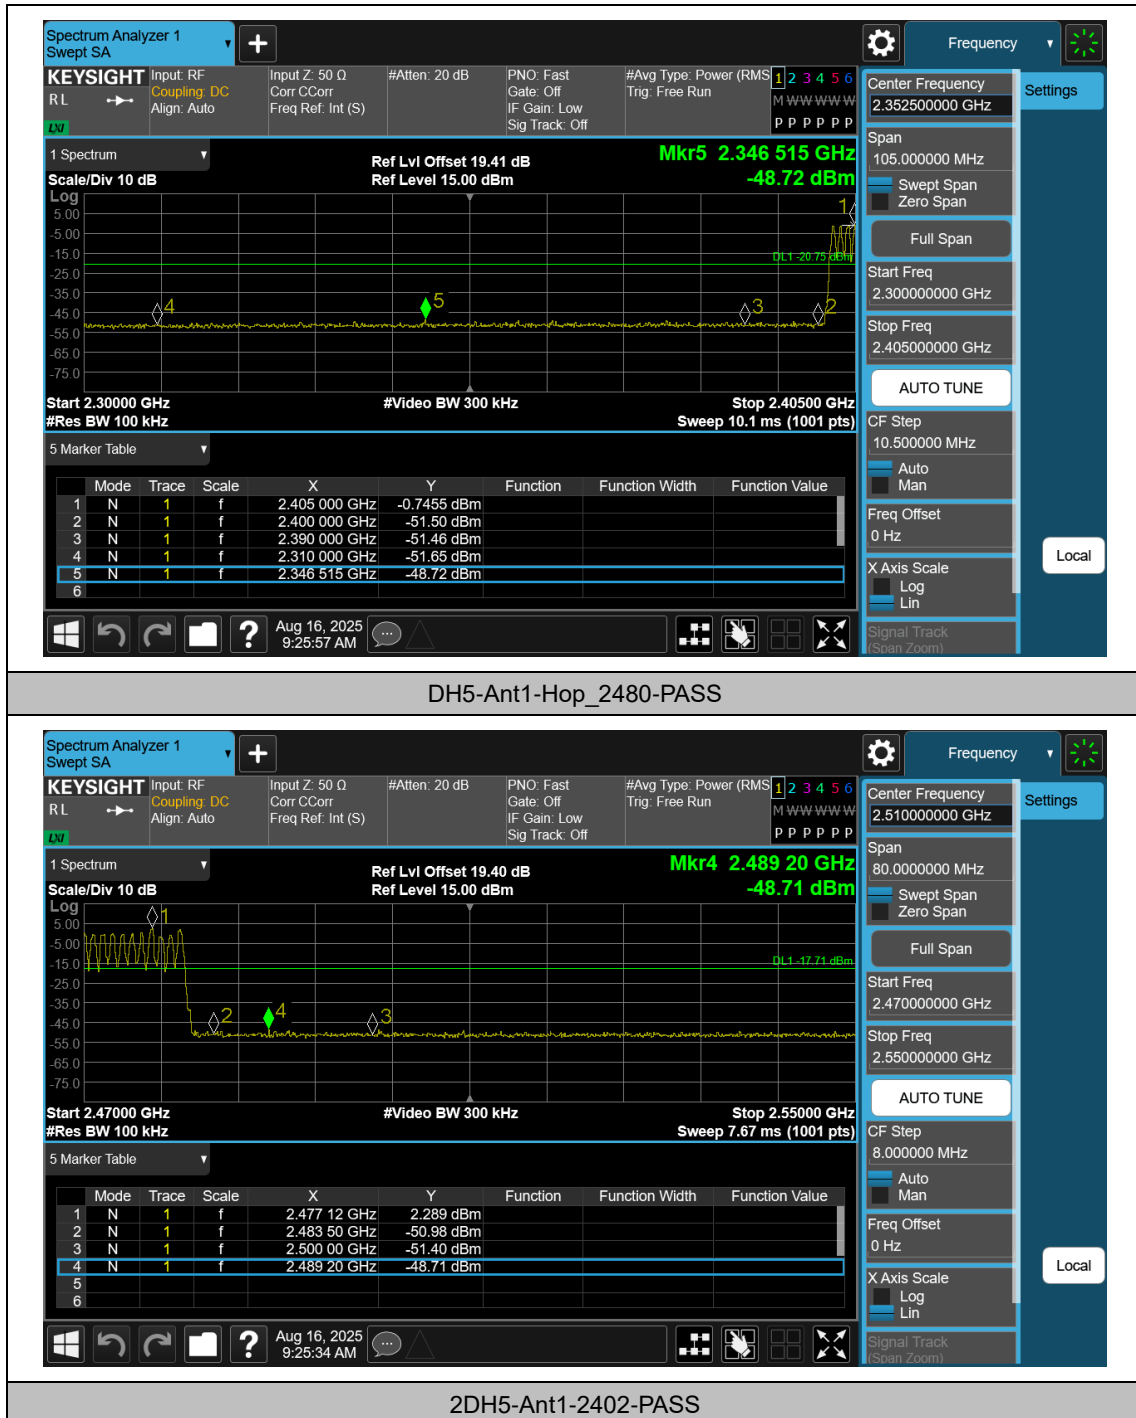


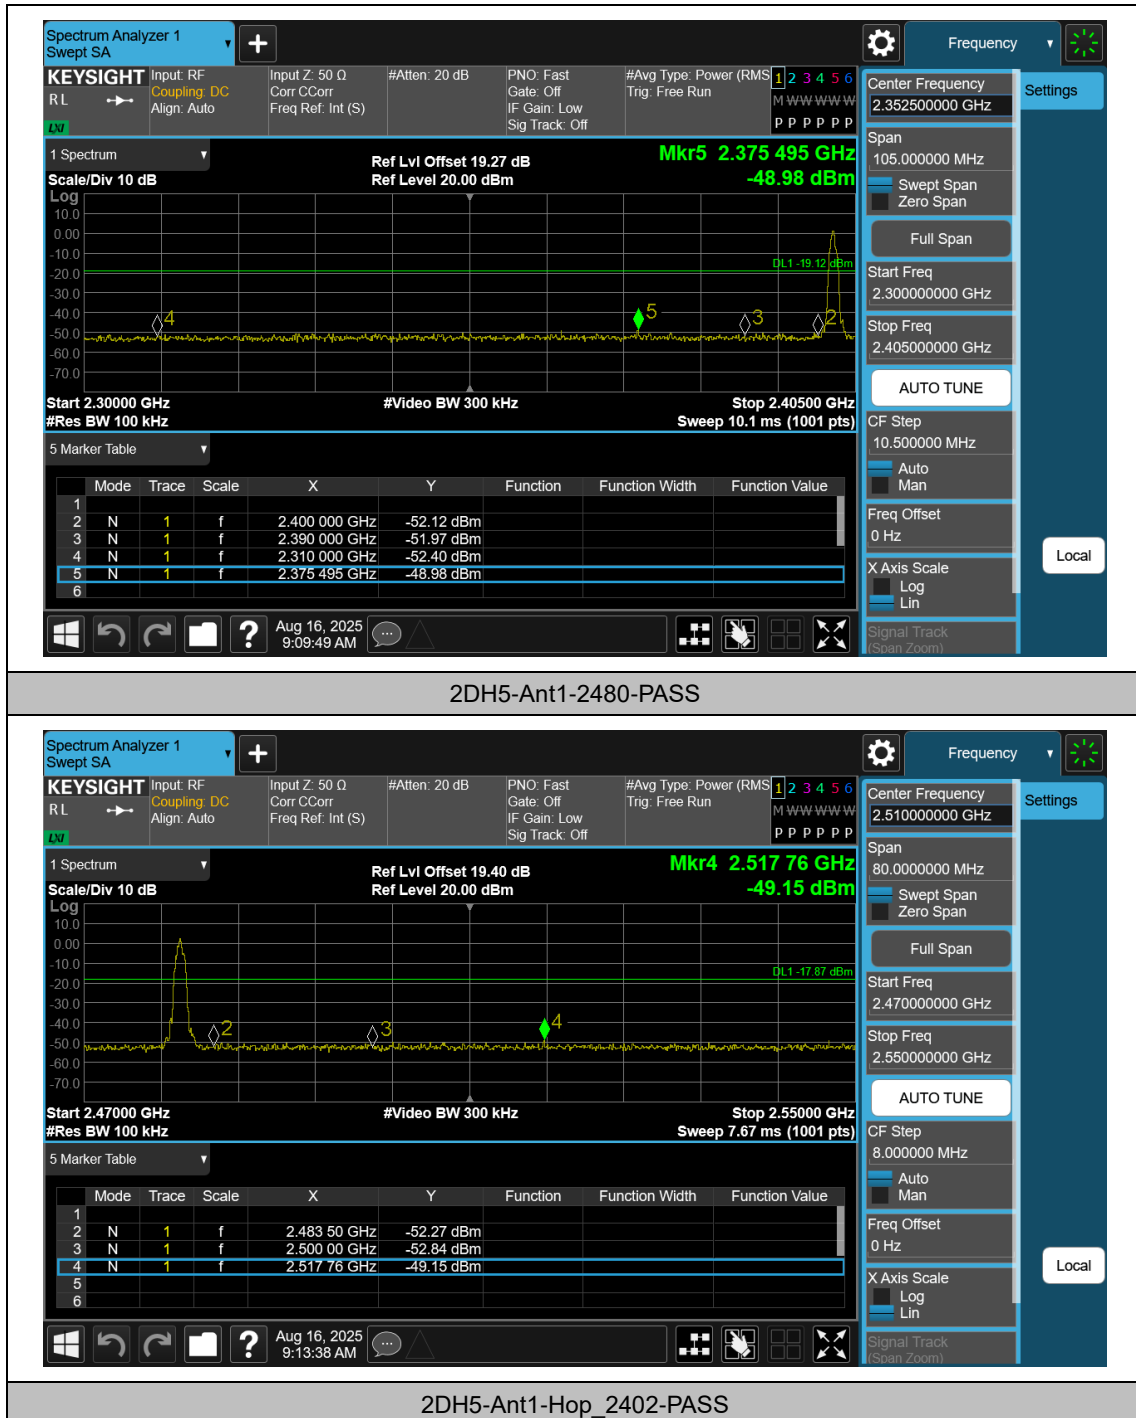

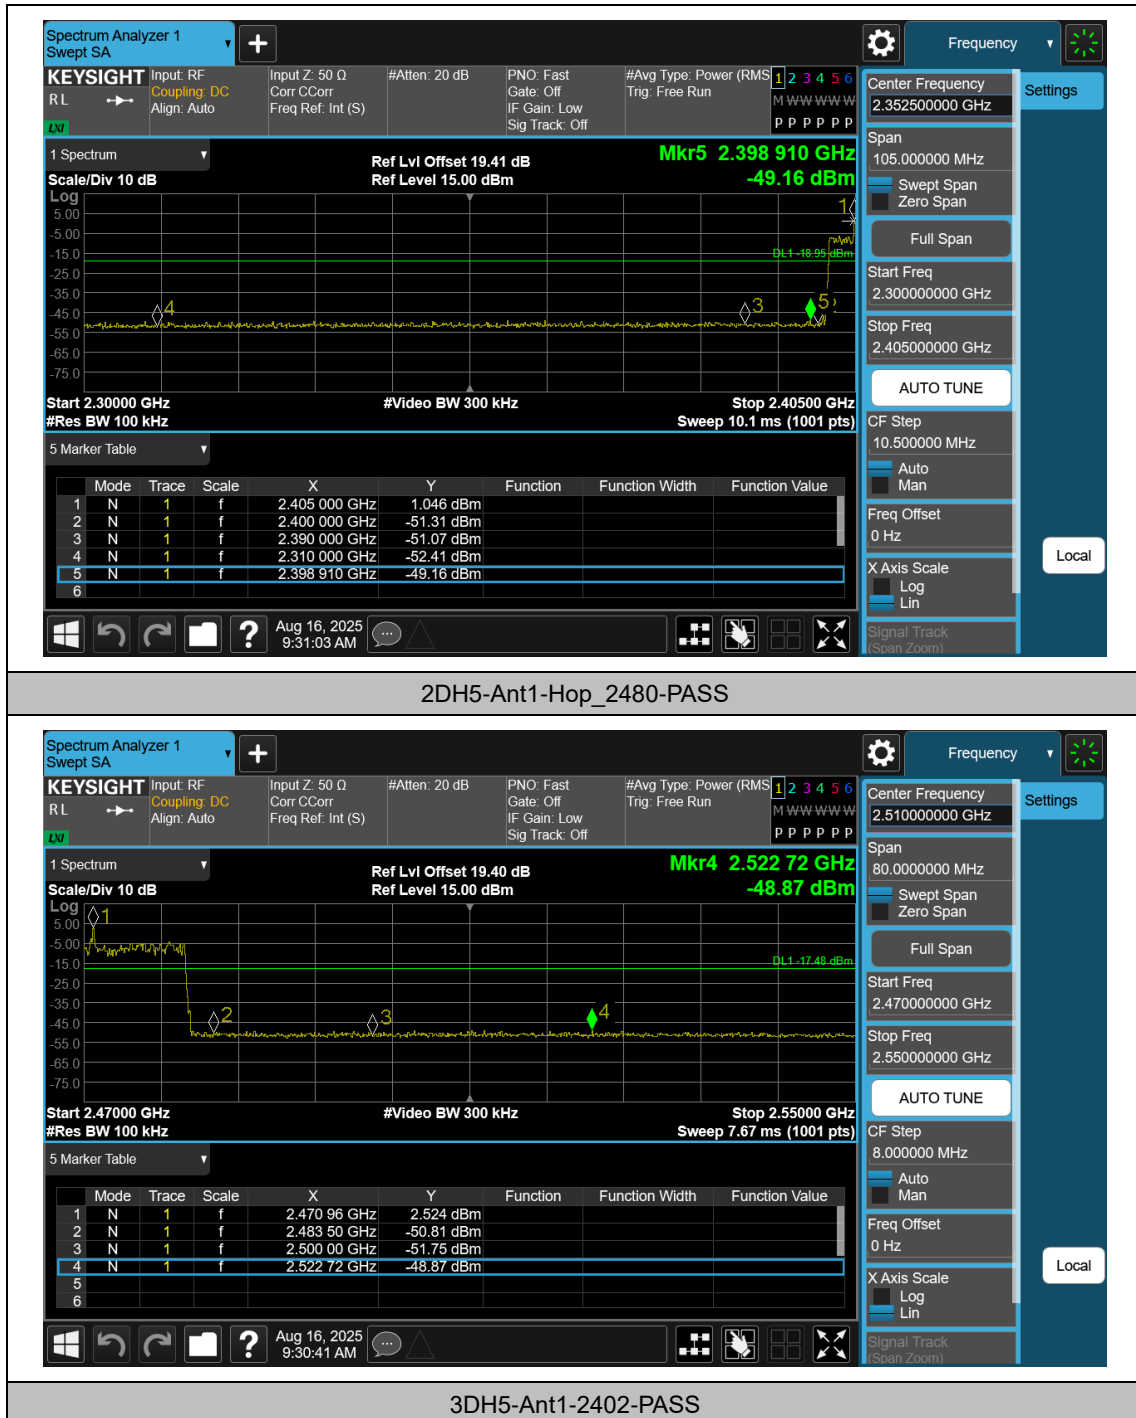


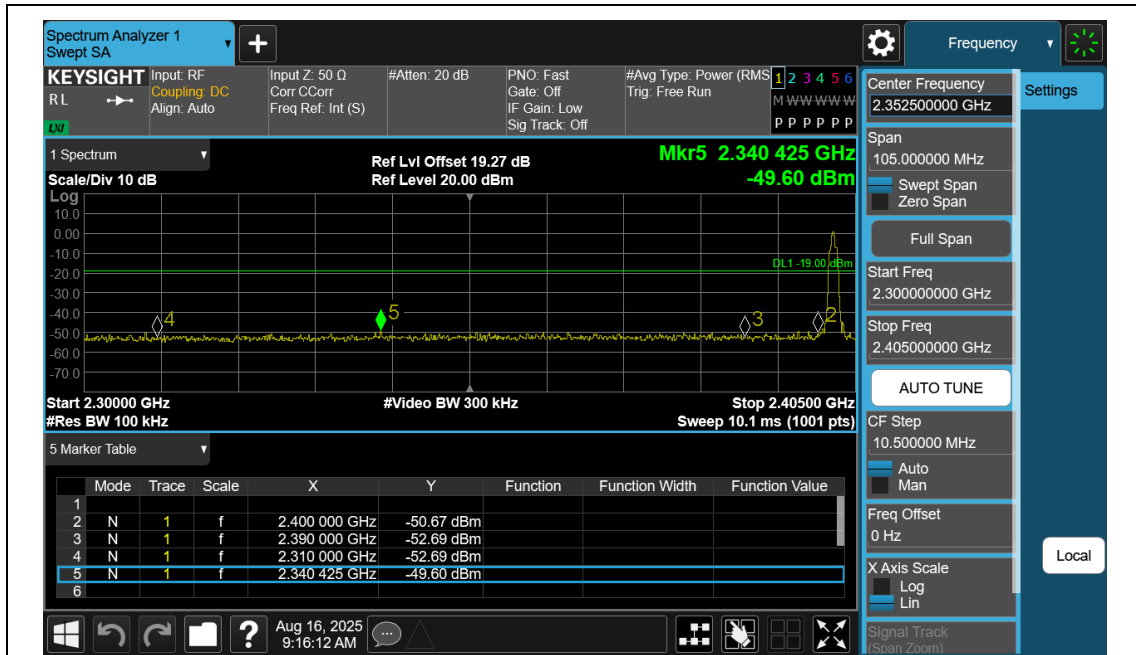


3DH5-Ant1-2480-PASS

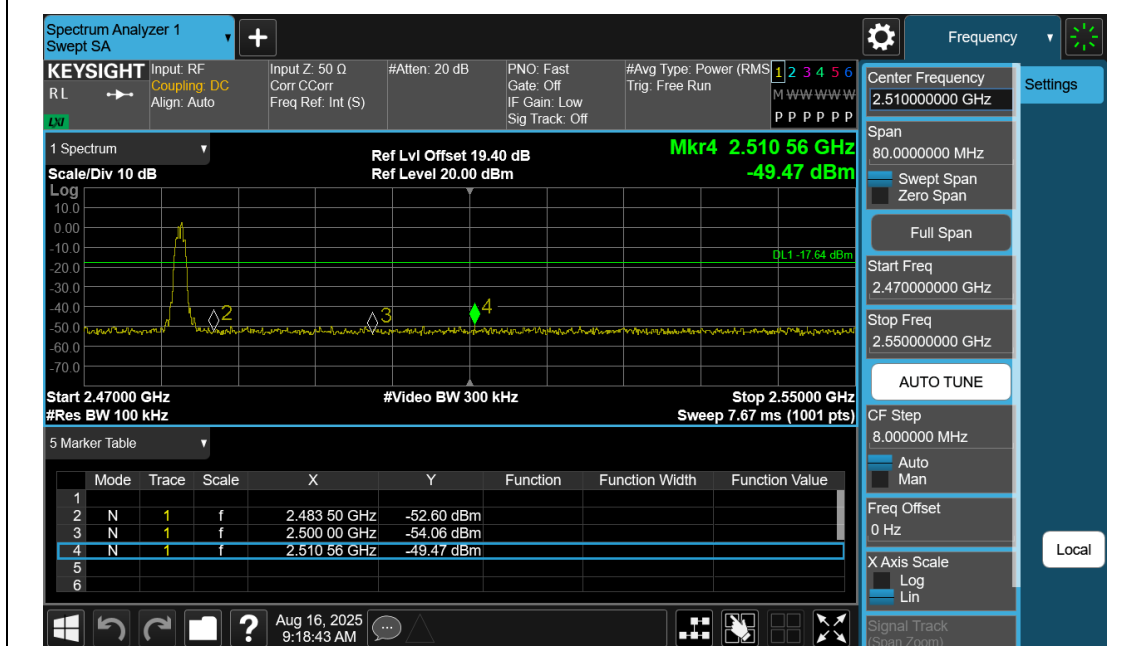

3DH5-Ant1-Hop_2402-PASS

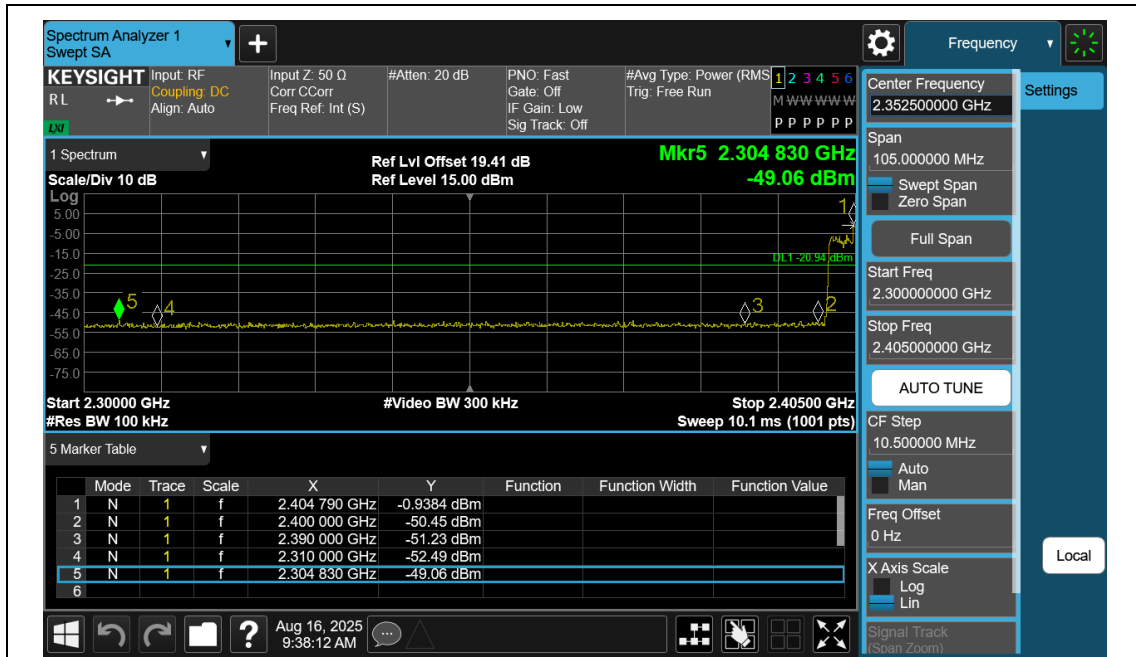

3DH5-Ant1-Hop_2480-PASS

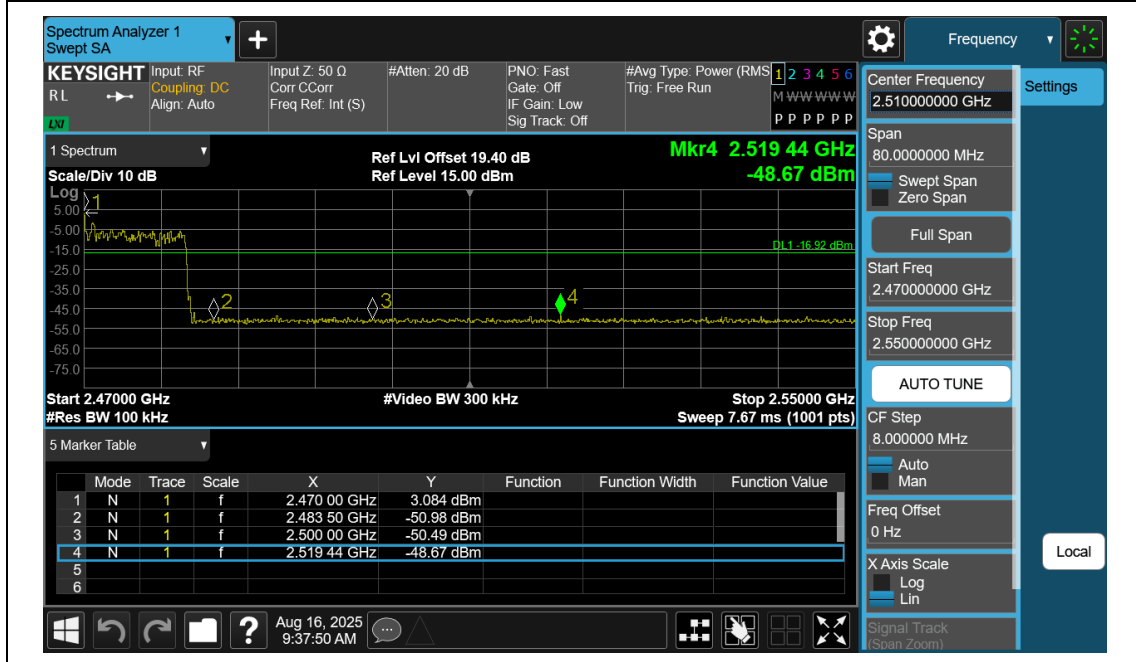


Appendix G: Conducted Spurious Emission


Test Result

TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	30~26500	0.54	-41.83	≤-19.46	PASS
DH5	Ant1	2441	30~26500	2.27	-41.92	≤-17.73	PASS
DH5	Ant1	2480	30~26500	2.15	-42.08	≤-17.85	PASS
2DH5	Ant1	2402	30~26500	0.88	-42.1	≤-19.12	PASS
2DH5	Ant1	2441	30~26500	2.16	-41.14	≤-17.84	PASS
2DH5	Ant1	2480	30~26500	2.13	-42.32	≤-17.87	PASS
3DH5	Ant1	2402	30~26500	1.00	-40.89	≤-19	PASS
3DH5	Ant1	2441	30~26500	2.16	-42.02	≤-17.84	PASS
3DH5	Ant1	2480	30~26500	2.36	-41.74	≤-17.64	PASS




Test Graphs

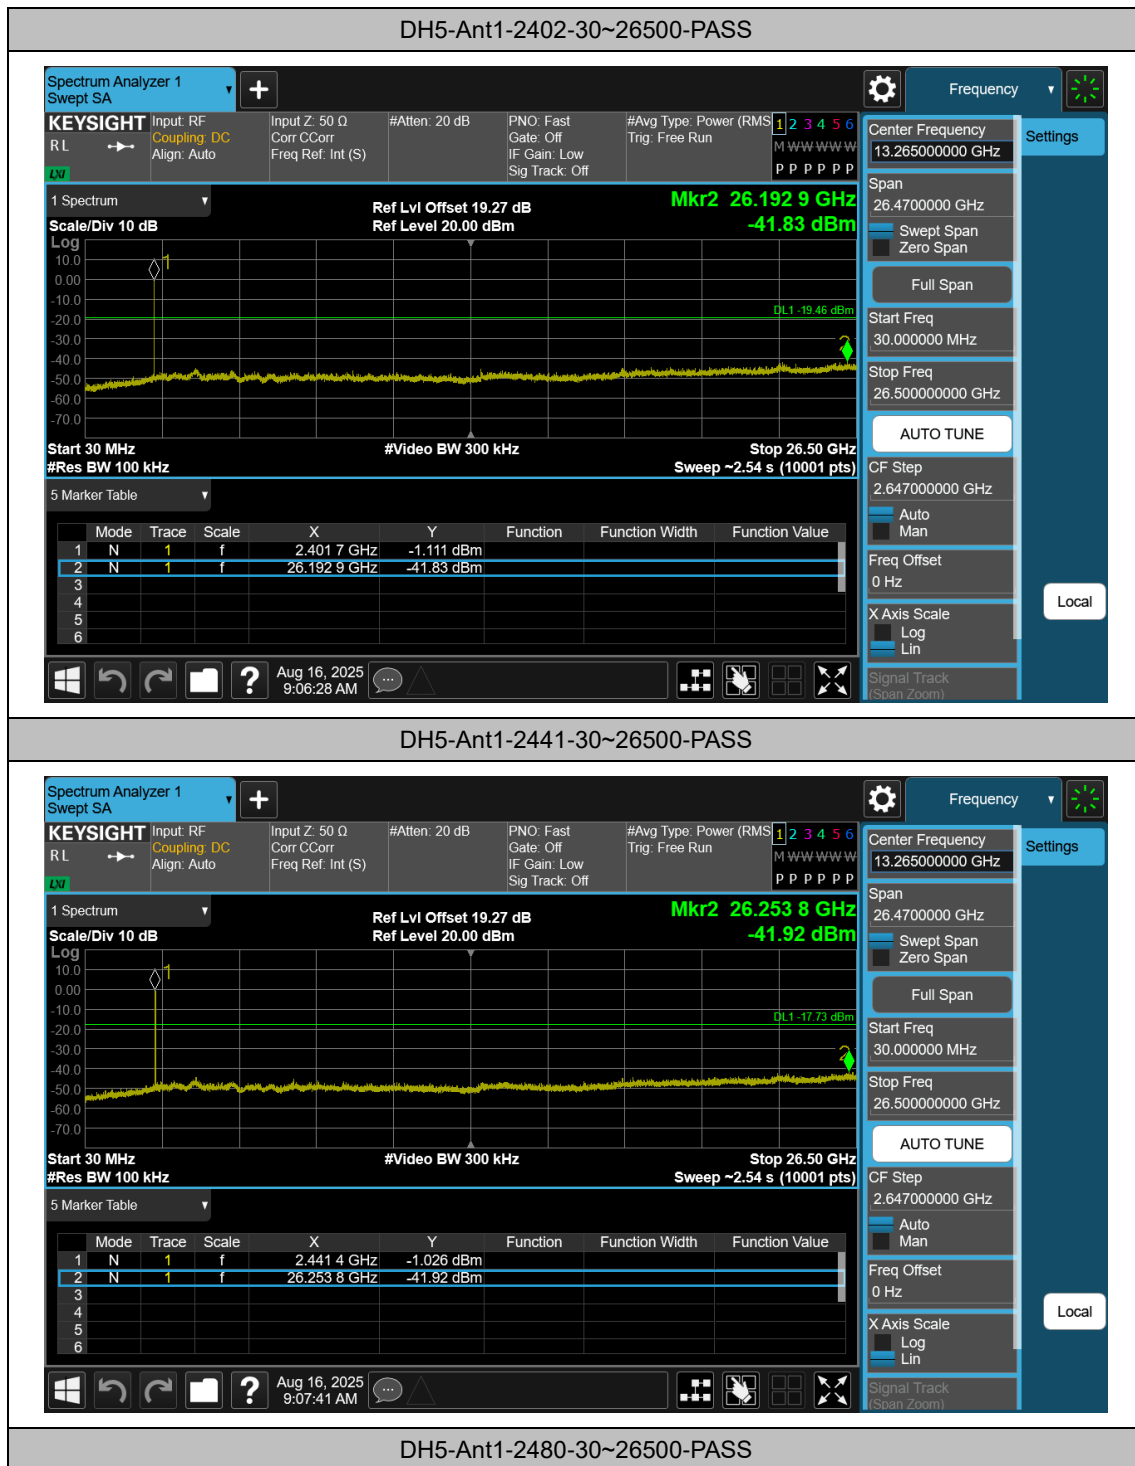


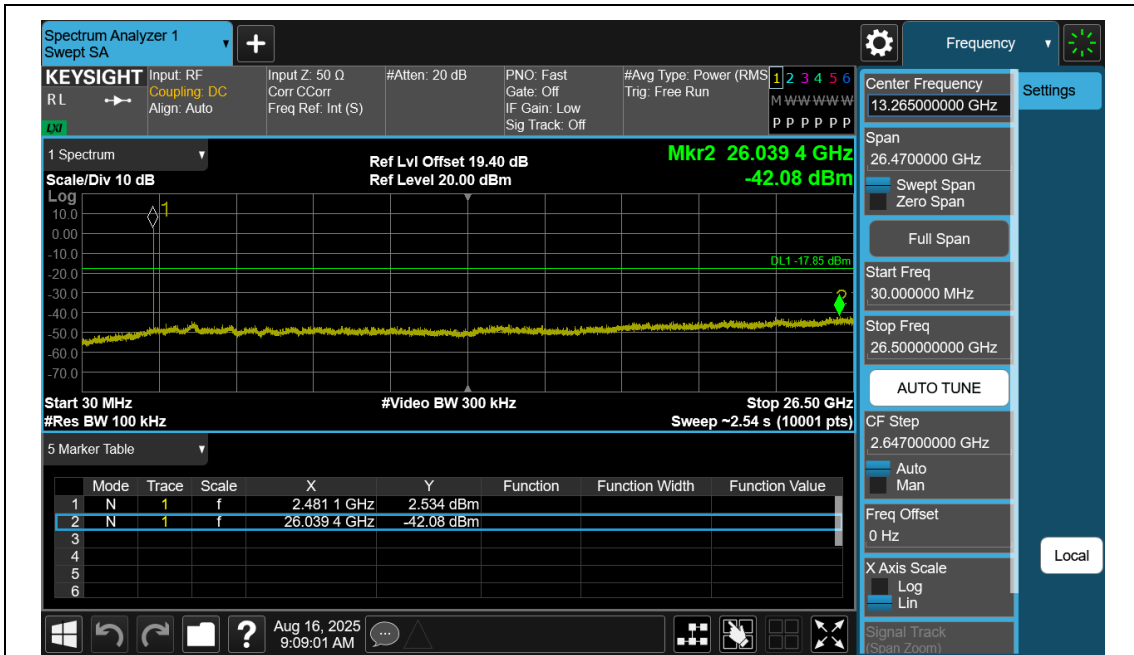


2DH5-Ant1-2402-30~26500-PASS

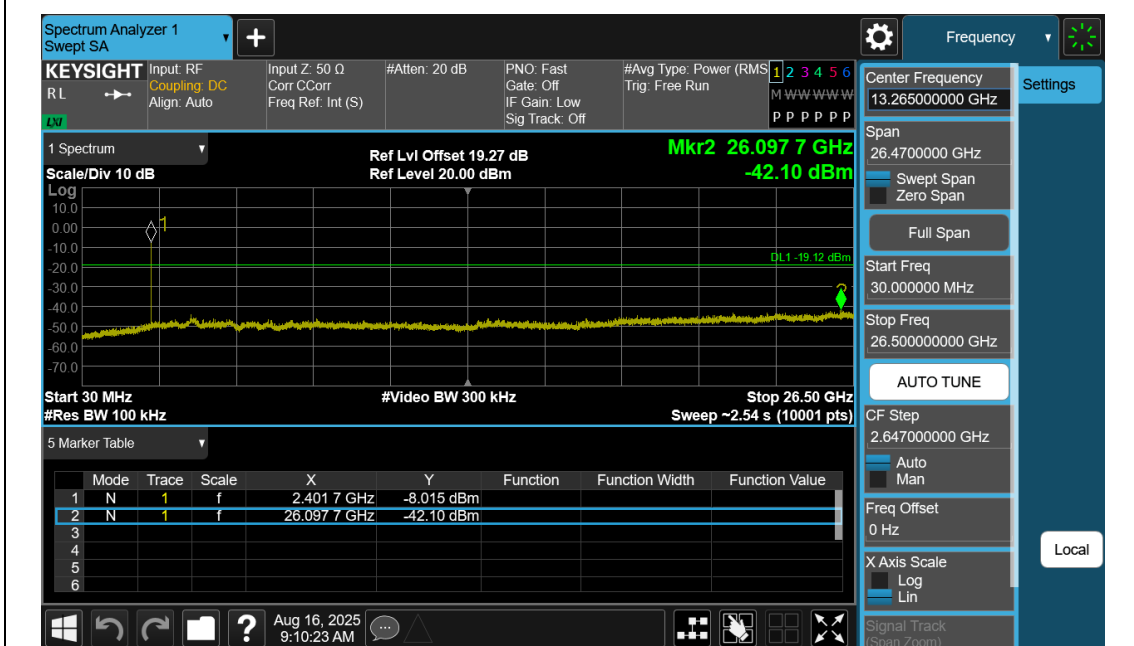


2DH5-Ant1-2441-30~26500-PASS

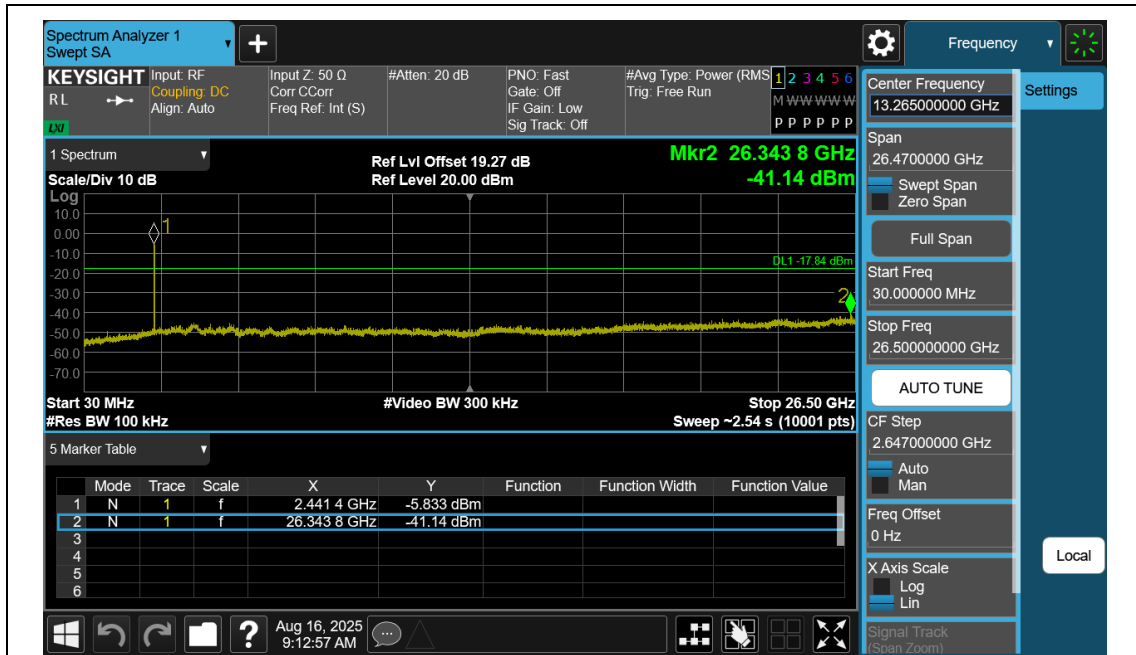


2DH5-Ant1-2480-30~26500-PASS

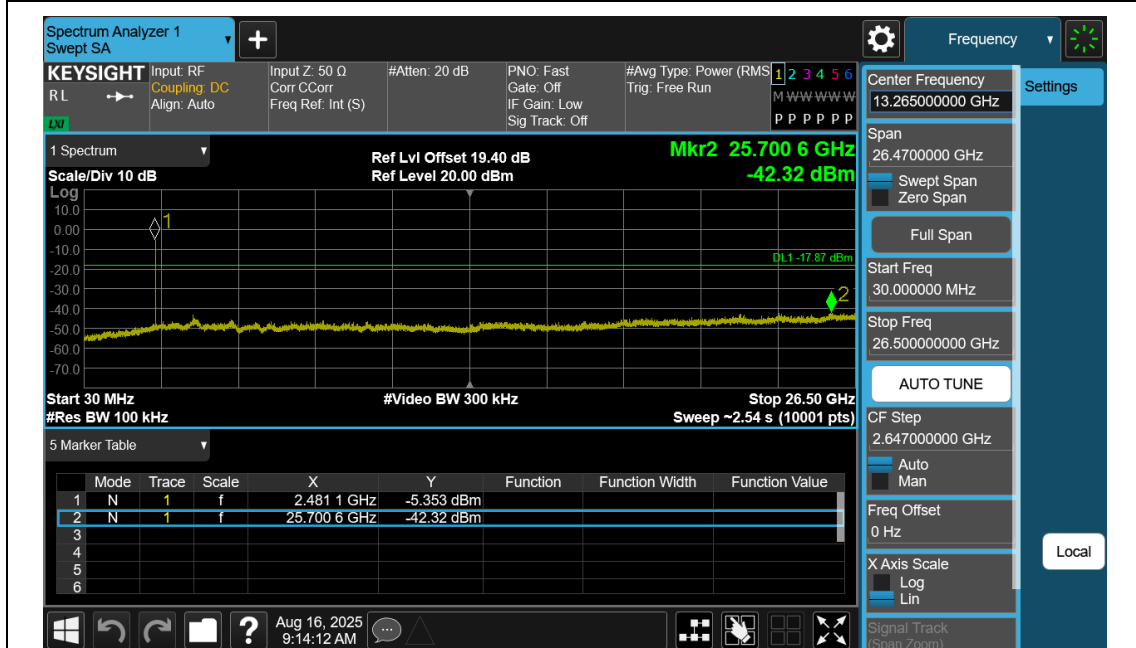

3DH5-Ant1-2402-30~26500-PASS

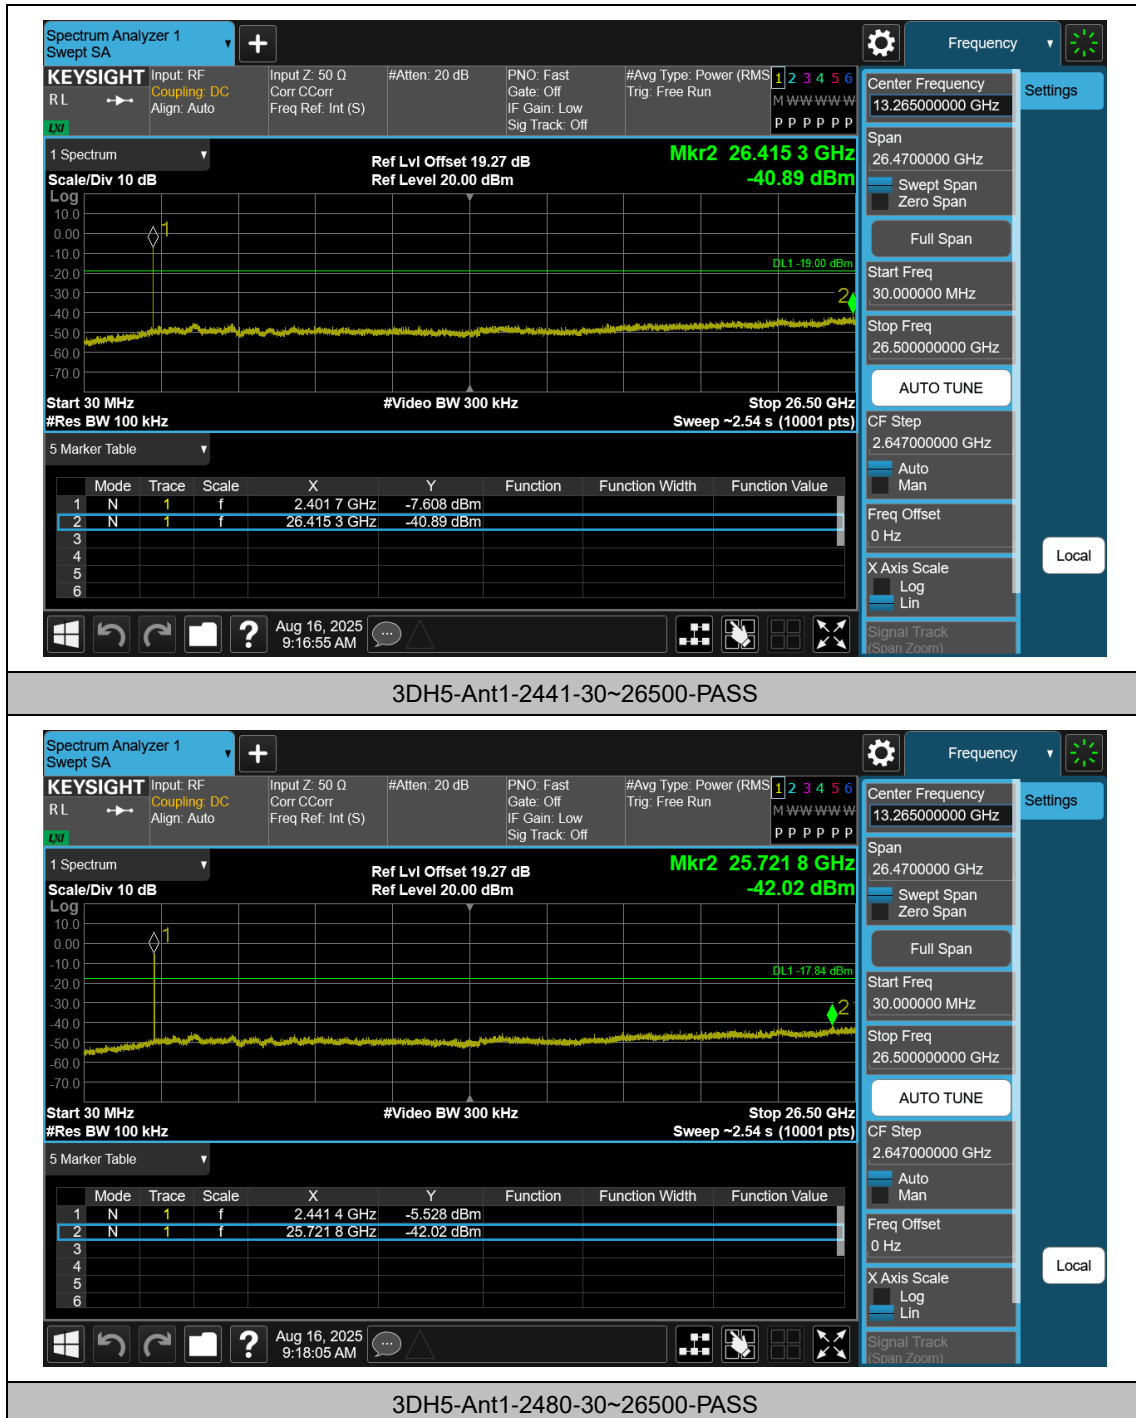

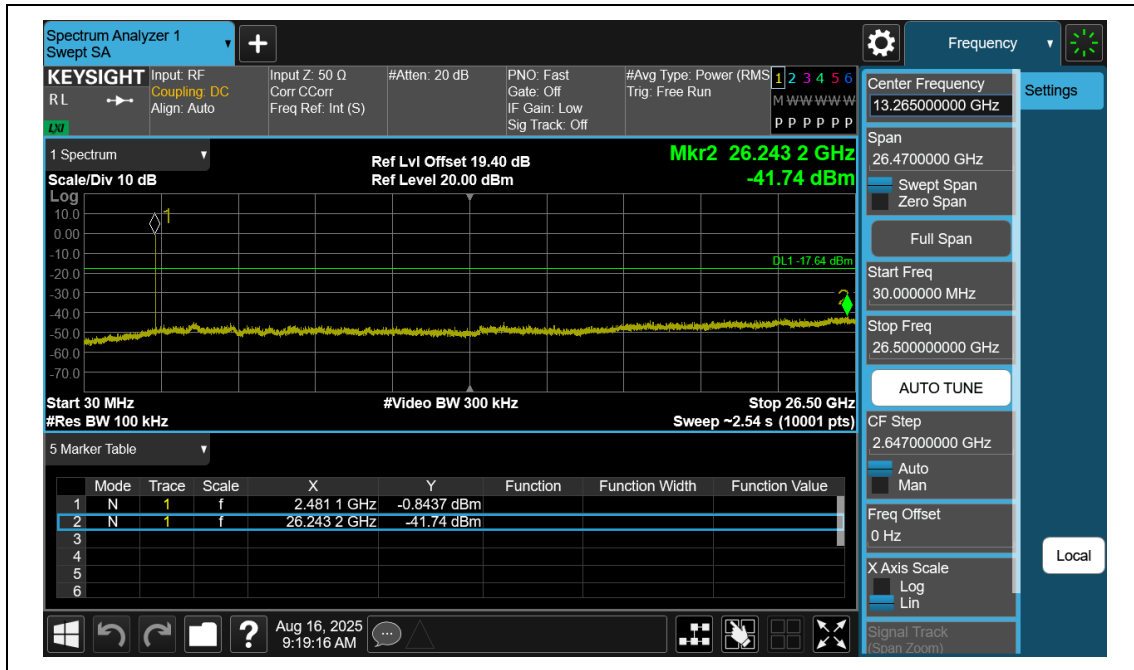


Appendix H: Reference level measurement

Test Result


TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm]
DH5	Ant1	2402	2402.10	0.54
DH5	Ant1	2441	2440.99	2.27
DH5	Ant1	2480	2480.00	2.15
2DH5	Ant1	2402	2402.00	0.88
2DH5	Ant1	2441	2441.00	2.16
2DH5	Ant1	2480	2479.99	2.13
3DH5	Ant1	2402	2401.98	1.00
3DH5	Ant1	2441	2441.00	2.16
3DH5	Ant1	2480	2479.98	2.36

Test Graphs

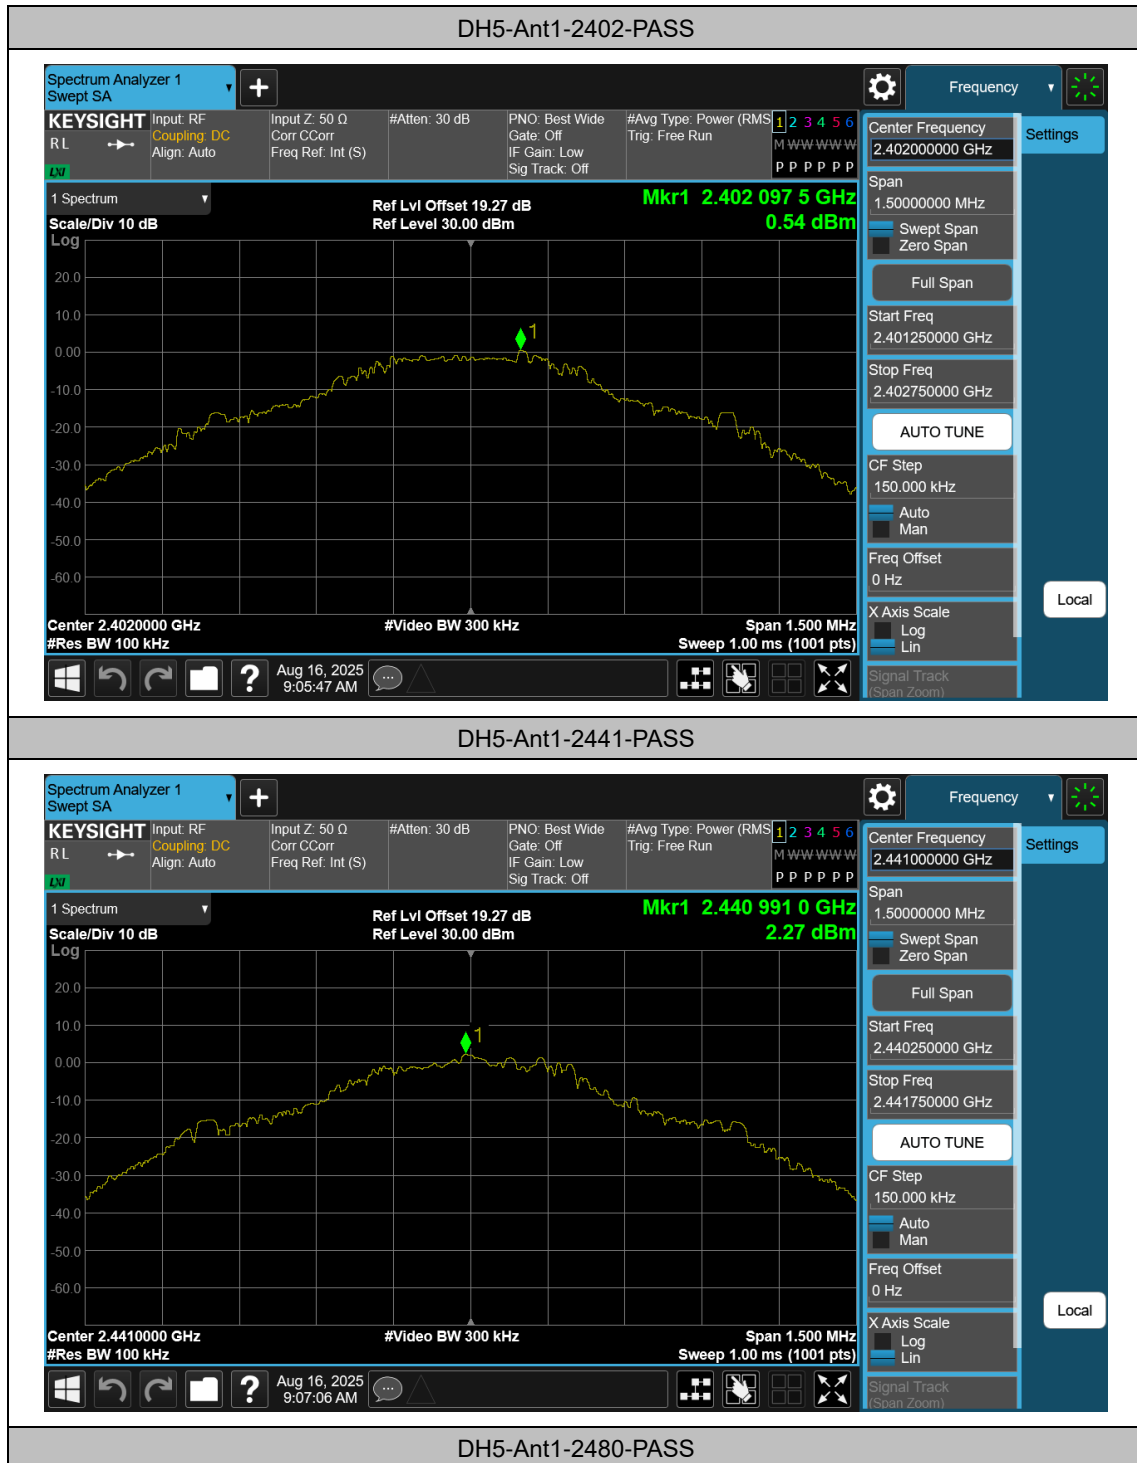




2DH5-Ant1-2402-PASS

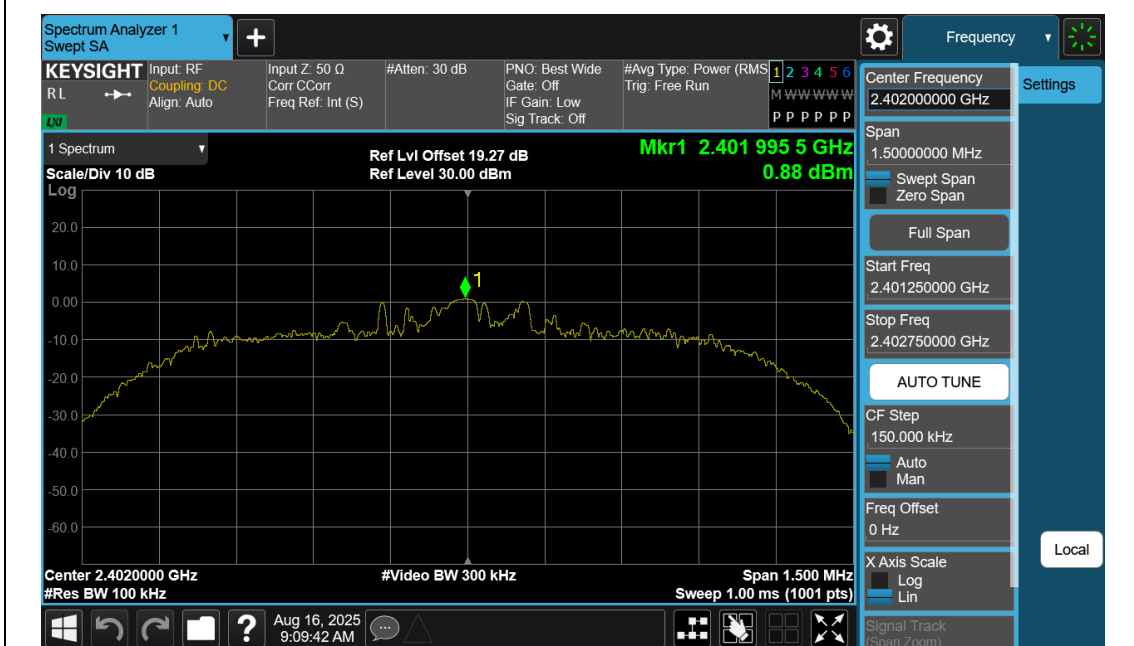

2DH5-Ant1-2441-PASS




2DH5-Ant1-2480-PASS

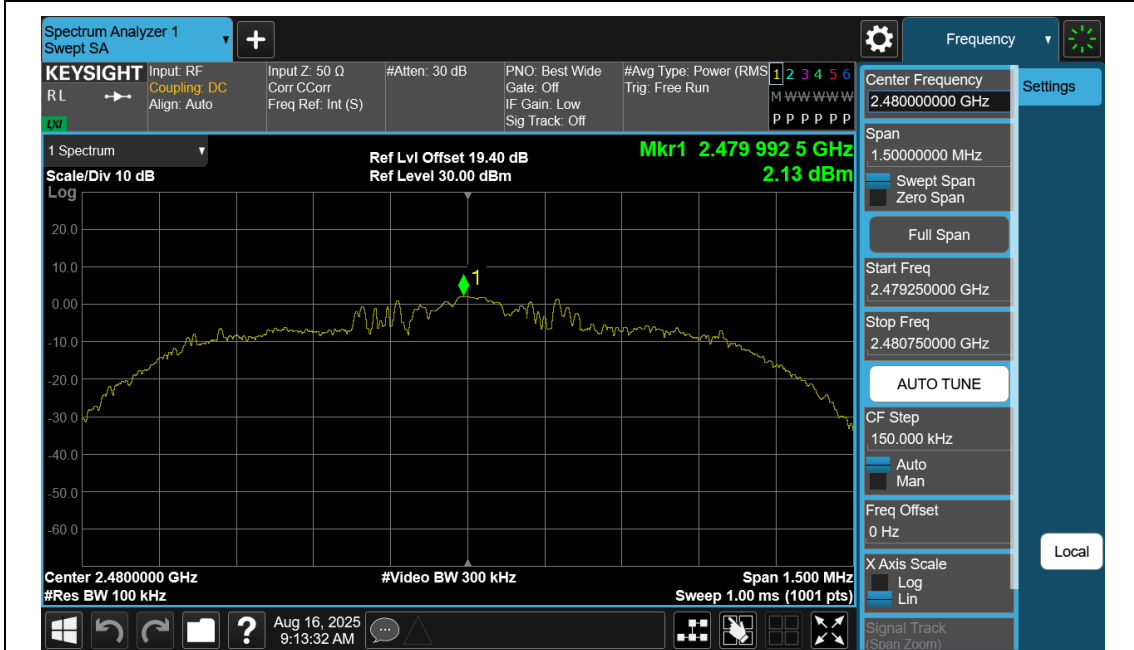

3DH5-Ant1-2402-PASS



3DH5-Ant1-2441-PASS

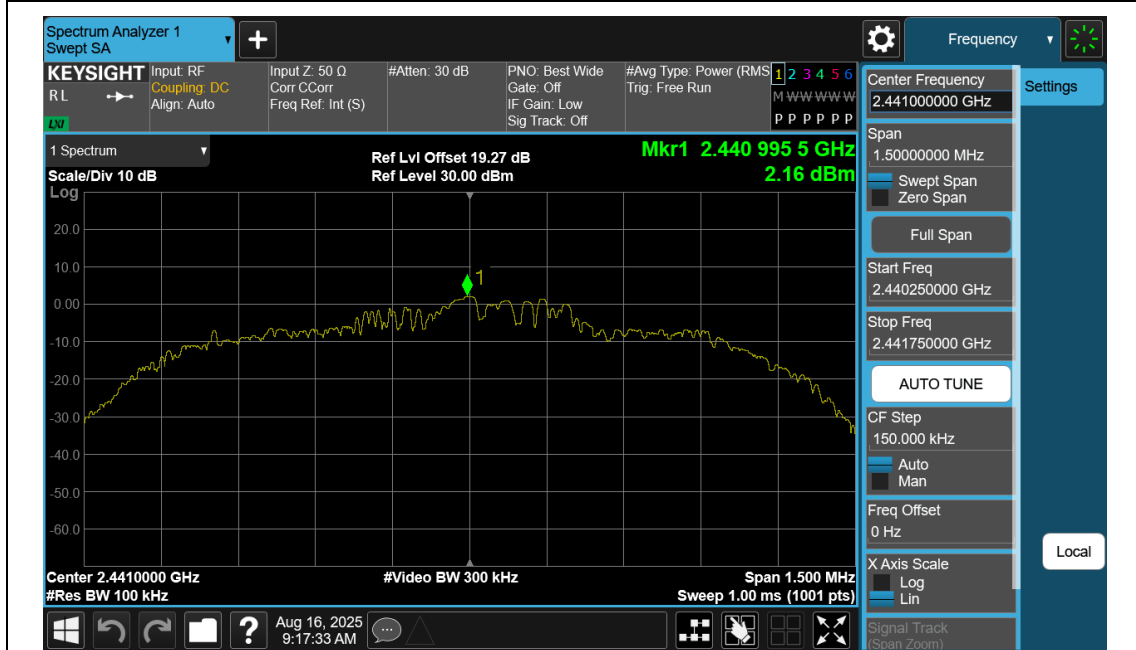

3DH5-Ant1-2480-PASS

