


HiDock

Quick Start Guide



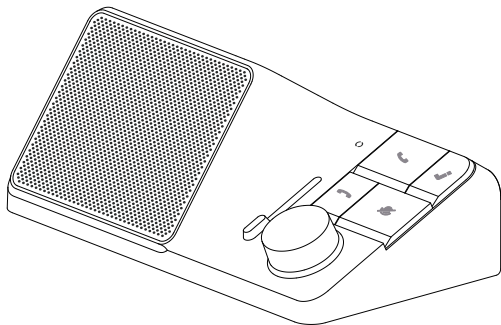

User Manual



Trouble Shoot Guide



ユーザーマニュアル



トラブルシューティングガイド

Introduction

The HiDock H1 series is an AI-powered audio dock designed for personal desktops. It connects to computers via a USB Type-C interface and can also connect to smartphones using Bluetooth technology. Users can rely on HiDock for various communication applications, thanks to HiDock's proprietary Bi-directional Noise Cancellation (BNC) technology. BNC reduces noise from both the user's side and the caller's side, ensuring clear communication. Additionally, its built-in recorder can store up to 1,000 hours of audio (32GB).

HiDock features a range of powerful interfaces, including 4K/60Hz HDMI port, Ethernet, Power Delivery, and USB-A/USB-C ports and etc.

HiDock is designed to provide a clean desktop setup and clear communication experience.

What's In The Box

HiDock H1


 × 1	HiDock H1
 × 1	Power Adapter(150W)
 × 1	USB C-C Cable
 × 1	USB A-C Cable
 × 1	Quick Start Guide
 × 1	HiDock E1

HiDock H1E



 × 1	HiDock H1E
 × 1	Power Adapter(100W)
 × 1	USB C-C Cable
 × 1	Quick Start Guide
 × 1	HiDock E1

Overview

Front View


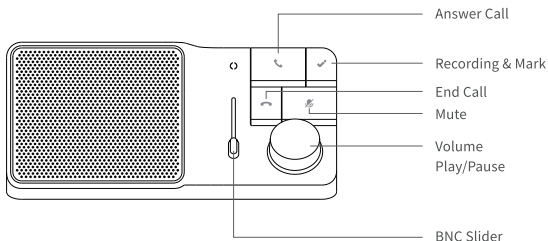


Rear and Side View - HiDock H1



- ① Power Input
- ② USB-C Upstream
- ③ HDMI (2.0) 4K/60Hz
- ④ USB 3.2 Gen2
- ⑤ USB 3.2 Gen1
- ⑥ 2.5 Gbps Ethernet
- ⑦ Bluetooth Pairing
- ⑧ USB 3.2 Gen 2, PD Out 18W
- ⑨ MicroSD 4.0 (UHS-II)
- ⑩ SD 4.0 (UHS-II)

Rear and Side View - HiDock H1E




- | | | |
|---------------------|----------------------------|-------------------|
| ① Power Switch | ② Power Input | ③ USB-C Upstream |
| ④ HDMI(2.0) 4K/60Hz | ⑤ USB 3.2 Gen 1 | ⑥ 1 Gbps Ethernet |
| ⑦ Bluetooth Pairing | ⑧ USB 3.2 Gen1, PD Out 18W | |

Set Up


Connecting to power

1. Connect one end of the AC power cord to the power supply, and connect the other end to an outlet.
2. Connect the power supply to the DC IN port on HiDock.
3. For HiDock H1, it will power on automatically. For HiDock H1E, press the Power switch to turn it on.

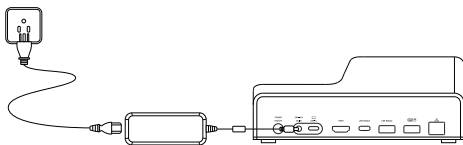

Connecting via USB-C Cable

1. Connect one end of the USB-C Cable to the USB-C upstream port on HiDock, and connect another end to the USB-C port on your laptop.

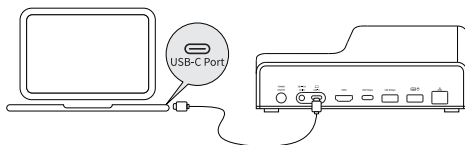


2. In the audio settings of your laptop, select "HiDock H1" or "HiDock H1E" as the sound input and output.
3. To use HiDock for your meeting, select "HiDock H1" or "HiDock H1E" as both the microphone and speaker in the audio settings of your video conference software (Zoom, Microsoft Teams, etc.).

Set Up

Connecting via Bluetooth

1. Press and hold the Bluetooth pairing button on the left side for 3 seconds to enter pairing mode. There will be a voice prompt.



2. When you hear the voice prompt, go to the Bluetooth settings and select "HiDock H1" or "HiDock H1E" on your smartphone.

3. To use HiDock for your meeting, select "HiDock H1" or "HiDock H1E" as both the microphone and speaker in the audio settings of your video conference software (Zoom, Microsoft Teams, etc.).

ZeroOops™ Control Panel

Introducing the ZeroOops™ Control Panel, an ongoing innovation by HiDock to empower users in managing meetings and communications with ease.

The design of the H1 device has been enhanced from our generation 1 model, featuring improved ergonomic design and intuitive elements like the knob and slider. These refinements, including the addition of the knob and slider, contribute to a more user-friendly experience for seamless control during meetings and communication sessions.

ZeroOops™ Control Panel

Icon	Buttons	Feature
	Volume Up Volume Down	Scroll the knob clock-wise to turn computer or smartphone volume up. Scroll the knob anti-clock-wise to turn computer or smartphone volume down.
	Play/Pause	Press the knob to pause current music play. Press the knob again to resume current music play.
	Bi-directional Noise Level Control	Bi-directional Noise Level Control Slide this button up to increase the noise reduction level, and slide down to disable noise reduction. This feature allows users to control the noise reduction level from both their side and the far-end side of the call. If either end of the call anticipates noise (e.g., in a cafe or airport), it is recommended to slide the button up to reduce as much noise as possible. In quiet environments such as offices or meeting rooms, it is recommended to keep the button in the lower position.
	Microphone Mute	Press to turn off microphone, LED Ring will show red color. Press again to turn microphone back on, LED Ring will stop showing red color.
	Answer Call	Press to answer a meeting call or phone call.
	End Call	Press to end current call.
	HiDock Key	This is a multifunction key. Long press 1.5 seconds to start recording. Long press 1.5 seconds again to stop recording. During recording, quick press once to mark the current recording position.

Specifications - HiDock H1

System Compatibility

Works with Windows, macOS based computers via USB-C Alt Mode, and iOS or Android Bluetooth enabled devices.

Platform Compatibility

Works with Zoom, Teams, Google Meet, Discord, FaceTime, Skype, WhatsApp, etc.

Audio

AI base Bi-directional noise cancelling for both microphone and speaker.

Noise cancelling type: Keyboard clicking, dog barking, street noise, background noise, kitchen noise, etc.
Sound quality: Crystal-clear sound by 5W tweeter, 7W full band driver and 1 passive-vibration diaphragm

Control and Indicator

Controls: Slider to adjust BNC level, record, VoiceMark, volume/mute/answer call/end call, Bluetooth pairing.
Visual: Light indicator for record, VoiceMark, mute, incoming call, Bluetooth pairing.

Dimension and Weight

Height x Width x Depth: 72.4 x 178 x 93.5 mm

Weight: 520g

Docking Station

Power to laptop: Up to 100 watt charging
Power to cellphone: Supports 18W sleep power charge

1 x SD 4.0 and 1 x microSD 4.0 (SD, SDHC, miniSD, microSD (T-Flash), MMC, RS-MMC, MMCmicro, MMCmobile, SDXC, SD 3.0 UHS-I, SD 4.0 UHS-II)

2 x display/video - HDMI v 2.0 (4K@60Hz HDR)

2 x USB-A
- 1 x USB 3.2 Gen2 (10Gbps)
- 1 x USB 3.2 Gen1 (5Gbps)
2 x USB-C
- 1 x USB 3.2 Gen2 (10Gbps)
- 1 x USB 3.2 Gen2 (10Gbps) with PD support up to 18W charging
1 x USB-C Upstream
1 x DC power (20V, 7.5A)
1 x 2.5 Gigabit ethernet

Specifications - HiDock H1E

System Compatibility

Works with Windows and macOS computers via USB-C Alt Mode, and iOS or Android Bluetooth enabled devices.

Platform Compatibility

Works with Zoom, Teams, Google Meet, Discord, FaceTime, Skype, WhatsApp and etc.

Audio

Microphone: Bi-directional noise cancelling
Noise cancelling type: Keyboard clicking, dog barking, street noise, background noise, kitchen noise.
Sound quality: Crystal-clear sound by 10W full band driver and 1 passive-vibration diaphragm

Control and Indicator

Controls: Slider to adjust BNC level, record, VoiceMark, volume/mute/answer call/end call, Bluetooth pairing.
Visual: Light indicator for record, VoiceMark, mute, incoming call, Bluetooth pairing.

Dimension and Weight

Height x Width x Depth: 72.4 x 178 x 93.5 mm

Weight: 470g

Docking Station

Power to laptop: Up to 65 watt charging

Power to cellphone: Supports 18W sleep power charge

1 x display/video - HDMI v 2.0 (4K@60Hz HDR)

1 x 1 Gigabit ethernet

2 x USB-A - USB 3.2 Gen1 (5Gbps)

2 x USB-C

- 1 x USB 3.2 Gen1 (5Gbps)

- 1 x USB 3.2 Gen1 (5Gbps) with PD support up to 18W charging


1 x USB-C Upstream

1 x DC power (20V, 5A)

HiDock E1

Use HiDock E1

Take HiDock E1 out from the case, the audio will switch from HiDock to earphone when you wear it well on your ear.

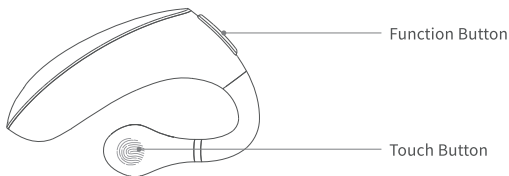

Function Button

Long press 2 seconds the function button to start recording.
During the recording, short press the function button to add a mark.
Long press again to stop the recording.

Touch Button

Long touch for 2 seconds to mute/unmute the microphone.
Double click it to answer/hang up the call.

HiDock E1


Charge HiDock E1

HiDock E1 charges while in the case. Ensure the case is connected well with HiDock.

Pairing Between Case and Earphone

The case and earphone are paired when they come out of the factory, you don't need to pair them when using them.

However, if they need to be paired again, there is a pairing button on the back of the case. Press it simultaneously with the record button on the earphone for 6 times. It will reset and pair with each other again.

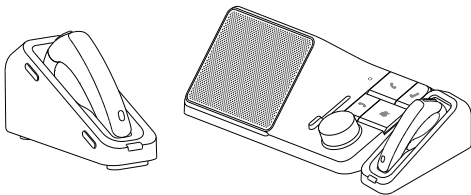


Talk Time	Up to 8 hours
Wireless Range	10 meters
Delay	≤ 30ms

HiDock E1

Connection

Connect your HiDock Earphone to the HiDock via Pogo Pins and magnetic attachments. You will see the indicator light of the case will illuminate in green.

It can work within a 10m / 33inch range in regular home or office space. If you have a wall in the middle, range could be reduced.

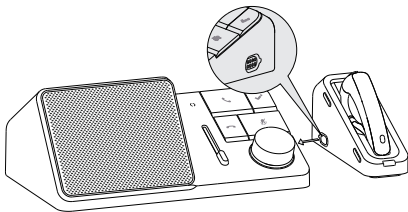

Force Switch the Sound In/Out

Sometimes you may still hear the sound playing in the HiDock while wearing the E1 and glasses, as E1 may not effectively detect your skin in this case. Apart from getting the E1 as attached as possible to your ear, you also have the option to force switch the sound output manually from the HiDock to E1 by quickly double-pressing the function button. If you need audio playback from the speaker, just simply put the E1 back into the case.

HiNotes

HiNotes is a powerful AI tool for transcribing meetings, interviews, and conversations. It serves as a great companion software to HiDock. Simply connect HiDock to your laptop, and you can choose to manually or automatically upload your recordings to HiNotes. It will then automatically analyze them, providing you with accurate transcripts and well-structured notes for your review.

Registering for a HiNotes Account


1. Go to the HiNotes website: <https://hinotes.hidock.com/>
2. Sign up using your Google account or any other email address.
3. We recommend using the email associated with your HiDock purchase to register.

How to install HiNotes as an App

Install HiNotes in a few seconds — directly from your browser. This app is available on Windows (with Chrome or Edge), macOS (with Chrome), iOS (with Chrome) and Android (with Chrome) .


Install HiNotes on Your Computer with Chrome

1. On your computer, open Chrome
2. Go to <https://hinotes.hidock.com/>
3. At the top right of the address bar, click Install icon

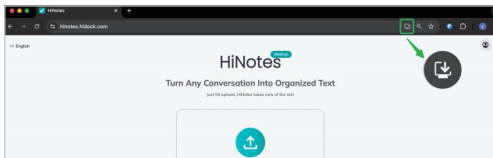


HiNotes

4. Follow the onscreen instructions to install HiNotes.

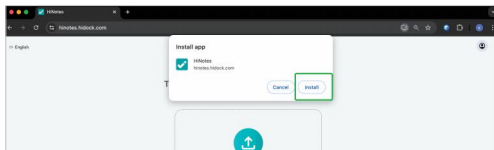


5. After installation, it will be as below, you can open and use it as an App.

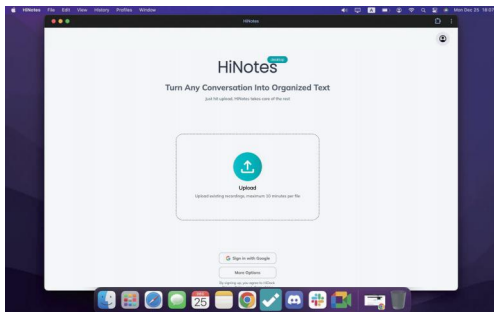

HiNotes


Install HiNotes on Your iPhone/iPad

1. On your iPhone or iPad, open Chrome.
2. Go to <https://hinotes.hidock.com/>
3. At the top right of the address bar, tap Share.
4. Find and tap "Add to Home Screen".
5. Confirm or edit the website details and tap Add.
6. The HiNotes App is saved to your iPhone/iPad, you can open it from the home screen.



Install HiNotes on Your Android Phone

1. On your Android device, open Chrome
2. Go to <https://hinotes.hidock.com/>
3. Find and tap "Add to Home Screen".
4. Follow the on-screen instructions.

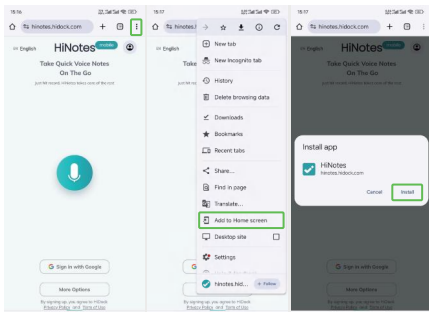

Special Requirements

System and Port Requirements

A host laptop with an available USB-C port (to ensure full functionality of the adapter, the host USB-C port must support PD 3.0 and DP Alternative mode).

Important Notice:

Not all USB-C ports support all features of the USB Type-C standard. Please ensure that your host USB-C port supports PD 3.0 and DP Alternative mode. A display supporting 4K resolution is required to achieve 3840 x 2160p resolution. A computer supporting 4K resolution is required to achieve 3840 x 2160p resolution.

Your laptop may have specific charging requirements. For example, if your laptop only supports custom adapters for charging when the computer is excessively discharged and unable to power on due to low battery, your laptop may not recognize it.

For more information about power, please refer to your laptop manufacturer.

Product Warranty

Customers of HiDock enjoy an 18-month warranty service starting from the date of purchase. To avail of the warranty service, customers should provide a valid device serial number, which can be found on the bottom of the product.

For more information, please visit <https://www.hidock.com/pages/warranty-policy>.

Privacy and Safety Information

Legal Restrictions

Please strictly adhere to applicable laws and refrain from using this product unlawfully. The company does not make any commitments or assume any responsibility for the repercussions of illegal activities.

Privacy Policy

At HiDock, we put users privacy and data security as our priority. For more information, please visit <https://www.hidock.com/pages/privacy-policy>.

Data Safety

HiDock only records audio when the user presses the HiDock Key. It is a stand-alone device and does not connect to the Internet independently. It can only connect to PCs via USB or smartphones via Bluetooth. The recordings uploaded to the cloud for transcription are encrypted and protected to ensure data safety.

Safety Operation Instructions

1. Please ensure that the microphone's sound input port and the speaker's sound output port are not covered by newspapers, books, curtains, etc., during use.
2. Do not expose the product to dripping or splashing water, and do not place objects filled with liquid, such as cups, on top of the product.
3. Do not expose the product to open flames (e.g., lit candles).
4. Do not place the product on uneven surfaces to prevent it from falling.
5. Please do not place the product near medical devices. This product contains magnets.

FCC regulatory conformance

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

NOTE: The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

RF Exposure

E102

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

E101/HiDock

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance of 20 cm between the radiator and your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

EU regulatory conformance:

20cm (E101/HiDock):

RF exposure information: The Maximum Permissible Exposure (MPE) level has been calculated based on a distance of 20cm between the device and the human body. To maintain compliance with RF exposure requirement, use product that maintain a 20cm distance between the device and human body.

5mm (E102):

RF exposure information: The EIRP power of the device at maximal case is below the exempt condition, 20mW specified in EN62479: 2010. RF exposure assessment has been performed to prove that this unit will not generate the harmful EM emission above the reference level as specified in EC Council Recommendation(1999/519/EC).

CE DOC


Hereby, JingTechnologyCo.,Ltd. declares that the radio equipment type E101/E102/HiDock is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: **www.hidock.com**

Manufacturer information:

Company name: JingTechnologyCo.,Ltd.

Address: Room3002, No.36, Liuxian3rdRoad, No.72, XingdongCommunity, Xin'anStreet, Bao'anDistrict, Shenzhen

Earphone Label



導入

HiDock H1シリーズは、パソコン向けに設計されたAI連携オーディオドックです。パソコンにはUSB Type-C インターフェースで接続し、スマートフォンにはBluetooth技術を使用して接続できます。HiDockはさまざまなコミュニケーションアプリケーションで利用することができ、ユーザーの頼りになれます。更にHiDock独自の双方向ノイズキャンリング(BNC)技術はユーザー側と相手側の両方のノイズを低減します。内蔵レコーダーは最大1000時間(32GB)の音声を保存できます。

HiDockは、4K/60Hz HDMIポート、イーサネット、パワーデリバリー、USB-A/USB-C ポートなどを含む豊富なインターフェースを備えています。

HiDockは、よりキレイなデスクトップ及びよりスムーズなコミュニケーション体験をもたらす為に設計されています。

同梱物

HiDock H1


 × 1	HiDock H1
 × 1	電源アダプタ(150W)
 × 1	USB C-Cケーブル
 × 1	USB A-Cケーブル
 × 1	クイックスタートガイド
 × 1	HiDock E1

HiDock H1E



 × 1	HiDock H1E
 × 1	電源アダプタ(100W)
 × 1	USB C-Cケーブル
 × 1	クイックスタートガイド
 × 1	HiDock E1

概要

正面図


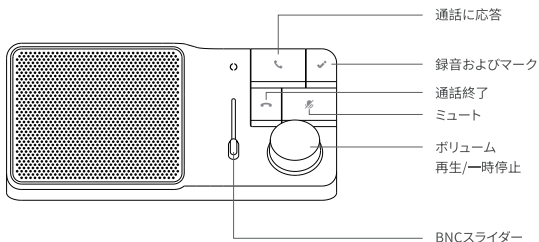


背面図と側面図 - HiDock H1



- | | | |
|-------------------|-----------------------------|------------------------|
| ① DC入力 | ② USB-C Upstream | ③ HDMI (2.0) 4K/60Hz |
| ④ USB 3.2 Gen2 | ⑤ USB 3.2 Gen1 | ⑥ 2.5Gbps イーサネット |
| ⑦ Bluetooth ペアリング | ⑧ USB 3.2 Gen 2, PD Out 18W | ⑨ MicroSD 4.0 (UHS-II) |
| ⑩ SD 4.0 (UHS-II) | | |

背面図と側面図 - HiDock H1E




- | | | |
|---------------------|----------------------------|------------------|
| ① パワースイッチ | ② DC入力 | ③ USB-C Upstream |
| ④ HDMI(2.0) 4K/60Hz | ⑤ USB 3.2 Gen 1 | ⑥ 1 Gbps イーサネット |
| ⑦ Bluetooth ペアリング | ⑧ USB 3.2 Gen1, PD Out 18W | |

セットアップ


電源に接続

1. AC電源コードの一端を電源に接続し、もう一端をコンセントに接続してください。
2. 電源をHiDockのDC入力ポートに接続してください。
3. HiDock H1は自動的電源オンになります。HiDock H1Eは、パワースイッチを押してから電源オンになります。

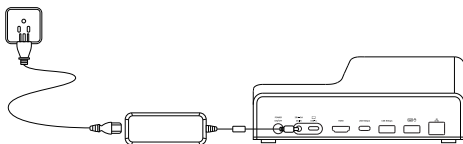

USB-Cケーブルで接続

1. USB-Cケーブルの一端をHiDockのUSB-C upstreamポートに接続し、もう一端をノートパソコンのUSB-Cポートに接続してください。

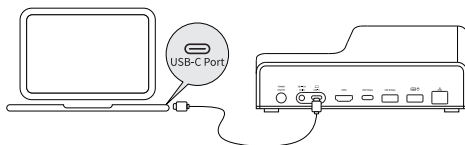


2. ノートパソコンのオーディオ設定で、「HiDock H1」又は「HiDock H1E」を音声入力および出力として選択してください。
3. 会議にHiDockを使用するには、ビデオ会議ソフト(Zoom、Microsoft Teamsなど)のオーディオ設定で「HiDock H1」又は「HiDock H1E」をマイクおよびスピーカーとして選択してください。

セットアップ

Bluetoothで接続

1. 左側のBluetoothペアリングボタンを3秒間押し続けると、通知音が鳴り、ペアリングモードを開始します。



2. 通知音が聞こえたらスマートフォンのBluetooth設定を開き、「HiDock H1」又は「HiDock H1E」を選択してください。

3. 会議にHiDockを使用するには、ビデオ会議ソフト(Zoom、Microsoft Teamsなど)のオーディオ設定で「HiDock H1」又は「HiDock H1E」をマイクおよびスピーカーとして選択してください。

ZeroOops™ コントロールパネル

「ZeroOops」のコントロールパネルをご紹介します。これは、HiDockが進化し続ける革新の一環で、ユーザーがミーティングやコミュニケーションを簡単に管理できるようにするものです。H1シリーズデバイスのデザインは、第1世代モデルから向上しており、改良された人間工学的デザインやつまみ、スライダーなどの直感的な要素が特徴です。これらの改良は、つまみやスライダーの追加を含め、ミーティングやコミュニケーションセッション中のシームレスなコントロールを可能にし、よりユーザーフレンドリーな体験に貢献しています。

ZeroOops™ コントロールパネル

アイコン	ボタン	機能
	音量アップ 音量ダウン	つまみを時計回りに回してコンピューターまたはスマートフォンの音量を上げます。 つまみの反時計回りに回してコンピューターまたはスマートフォンの音量を下げます。
	再生/一時停止	つまみを押して現在の音楽再生を一時停止します。 つまみを再度押して現在の音楽再生を再開します。
	双方向 ノイズレベル コントロール	このボタンを上スライドさせると、ノイズの低減レベルが上がります。下にスライドさせるとノイズの低減が無効になります。この機能は、ユーザーが通話相手側からのノイズ低減レベルをコントロールするためのものです。通話相手側が騒がしい環境にいる場合（例：カフェや空港など）、できるだけノイズを取り除くために上にスライドすることをお勧めします。通話相手が静かな環境にいる場合（オフィスや会議室など）、低い位置に保つことをお勧めします。
	マイクミュート	マイクをミュートするにはここを押してください。ミュート状態になるとLEDが赤色に点灯します。 もう一度押すとマイクをミュート解除し、LEDが消灯します。
	通話に応答	ミーティングの通話または電話に応答するにはここを押してください。
	通話終了	現在の通話を終了するにはここを押してください。
	HiDock Key	これは多機能ボタンです。 1.5秒間長押しして録音を開始し、再び1.5秒間長押しして録音を停止します。 録音中に一度短押しすると、現在の録音位置にマークをつけます。

仕様—HiDock H1

システムの互換性

WindowsやmacOSベースのコンピュータとUSB-C Altモードにて動作します。iOSまたはAndroidのBluetooth対応デバイスとも連携可能です。

プラットフォームの互換性

Zoom、Teams、Google Meet、Discord、FaceTime、Skype、WhatsAppなどと互換性があります。

オーディオ

AIによる双方向ノイズキャンセリングはマイクとスピーカーの両方に対して効果的です。ノイズキャンセリングの種類: キーボードの打鍵音、犬の鳴き声、街の騒音、背景騒音、キッチン騒音など
音質: 5Wツイーター、7W全帯域ドライバー、パッシブラジエーターによるクリアな音質

コントロールとインジケーター

コントロール: BNCレベルの調整用スライダー、録音、ボイスマーク、音量/ミュート/通話応答/通話終了、Bluetoothペアリング
ビジュアル: 録音、ボイスマーク、ミュート、着信通知、Bluetoothペアリングに反応するライトインジケーター

寸法と重量

高さ x 幅 x 奥行き: 72.4 x 178 x 93.5mm

重量: 520g

ドッキングステーション

ノートパソコンへの給電: 最大100ワットの充電
携帯電話への給電: 最大18Wのスリープ充電対応

1 x SD 4.0 および 1 x microSD 4.0 (SD, SDHC, miniSD, microSD (T-Flash), MMC, RS-MMC, MMCmicro, MMCmobile, SDXC, SD 3.0 UHS-I, SD 4.0 UHS-II)

2 x ディスプレイ/ビデオ - HDMI v 2.0 (4K@60Hz HDR)

2 x USB-A
- 1 x USB 3.2 Gen2 (10Gbps)
- 1 x USB 3.2 Gen1 (5Gbps)
2 x USB-C
- 1 x USB 3.2 Gen2 (10Gbps)
- 1 x USB 3.2 Gen2 (10Gbps)
PDに対応、最大18W充電可能
1 x USB-C Upstream
1 x DC入力 (20V, 7.5A)
1 x 2.5 Gbps イーサネット

仕様—HiDock H1E

システムの互換性

WindowsやmacOSベースのコンピュータとUSB-C Altモードにて動作します。iOSまたはAndroidのBluetooth対応デバイスとも連携可能です。

プラットフォームの互換性

Zoom、Teams、Google Meet、Discord、FaceTime、Skype、WhatsAppなどと互換性があります。

オーディオ

AIによる双方向ノイズキャンセリングはマイクとスピーカーの両方に対して効果的です。

ノイズキャンセリングの種類: キーボードの打鍵音、犬の鳴き声、街の騒音、背景騒音、キッチンの騒音など
音質: 10W全帯域ドライバーおよびパッシブラジエーターによるクリアな音質

コントロールとインジケーター

コントロール: BNCレベルの調整用スライダー、録音、ボイスマーク、音量/ミュート/通話応答/通話終了、Bluetoothペアリング
ビジュアル: 録音、ボイスマーク、ミュート、着信通知、Bluetoothペアリングに反応するライトインジケーター

寸法と重量

高さ x 幅 x 奥行き: 72.4 x 178 x 93.5mm

重量: 470g

ドッキングステーション

ノートパソコンへの給電: 最大65ワットの充電

携帯電話への給電: 最大18Wのスリープ充電対応

1 x ディスプレイ/ビデオ - HDMI v 2.0 (4K@60Hz HDR)

1 x 1Gbps イーサネット

2 x USB-A - USB 3.2 Gen1 (5Gbps)

2 x USB-C

- 1 x USB 3.2 Gen1 (5Gbps)

- 1 x USB 3.2 Gen1 (5Gbps) PDに対応、最大18W充電可能


1 x USB-C Upstream

1 x DC入力 (20V, 5A)

HiDock E1

HiDock E1の使用方法

HiDock E1イヤホンをケースから取り出し、耳に装着すると、オーディオの出力はHiDockからイヤホンに切り替わります。

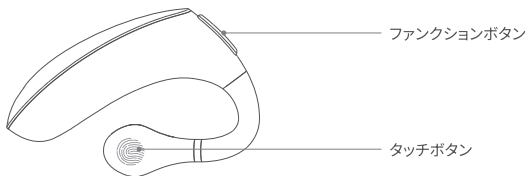

ファンクションボタン

ファンクションボタンを2秒間長押しすると録音が始まります。
録音中にファンクションボタンを短押しするとボイスマークが追加されます。
再度長押しすると録音が停止します。

タッチボタン

2秒間長押しするとマイクがミュート/ミュート解除されます。
ダブルタップで電話に応答/通話終了ができます。


HiDock E1

HiDock E1を充電する

HiDock E1はケース内で充電されます。ケースがHiDockにしっかり接続されていることを確認してください。

ケースとイヤホンのペアリング

ケースとイヤホンは工場出荷時にペアリングされていますので、通常は再ペアリングの必要がありません。再ペアリングが必要な場合は、ケースの背面にあるペアリングボタンをイヤホンのファンクションボタンと同時に6回押すと、ケースとイヤホンは工場出荷時の設定にリセットされ、再びお互いにペアリングされます。

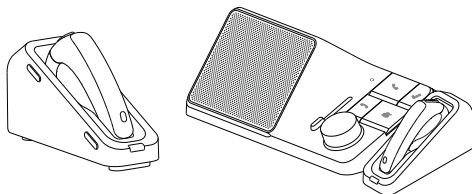


通話時間	最大8時間まで
ワイヤレス範囲	10メートル
遅延	≤30ミリ秒

HiDock E1

接続

ポゴピンと磁性アタッチメントであなたのHiDockイヤホンをHiDockに接続してください。ケースのインジケータライトが緑色に点灯します。

HiDock E1は、通常の住宅やオフィススペースで10メートル以内の範囲で動作します。使用する際、E1イヤホンとHiDockの間に壁がある場合、範囲が縮小する可能性があります。

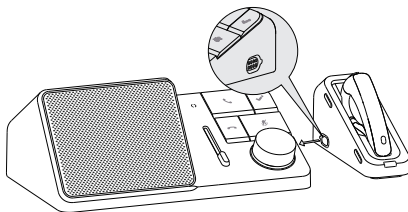

音声の強制切替

例えば眼鏡をかけながらE1イヤホンを装着の場合、イヤホンが皮膚との接触を効果的に検出できず、音声は元のままHiDockから流すことがあります。そういった場合、E1イヤホンをできるだけしっかりと耳に装着すること以外にも、ファンクションボタンを素早く2回押すことで、手動で音声出力をHiDockからE1イヤホンに強制的に切り替えるとの方法があります。もし音声を再びHiDockで再生してほしい場合、単にE1イヤホンをケースに戻すことで実現可能です。

HiNotes

HiNotesは、会議、インタビュー、会話などを文字起こしするための強力なAIツールで、HiDockのコンパニオンソフトウェアとして機能しています。HiDockをノートパソコンに接続するだけで、録音ファイルを手動または自動でHiNotesにアップロードできます。その後、HiNotesは録音を自動的に分析し、精確な文字起こしとよく構成されたノートを提供します。

HiNotesアカウントの登録方法


1. HiNotesのウェブサイト(<https://hinotes.hidock.com>)にアクセスします。
2. Googleアカウントまたはその他のメールアドレスを使用してサインアップします。
3. HiDock購入時に使用したメールアドレスで登録することをお勧めします。

HiNotesをアプリとしてインストールする方法

HiNotesは、数秒内にブラウザから直接インストールできます。このアプリは、Windows (ChromeまたはEdge)、macOS (Chrome)、iOS (Chrome)、およびAndroid(Chrome)で利用可能です。

Chrome利用時パソコンにHiNotesをインストールする方法

1. コンピュータでChromeを開きます。
2. <https://hinotes.hidock.com> にアクセスします。
3. アドレスバーの右上にあるインストールアイコンをクリックします。

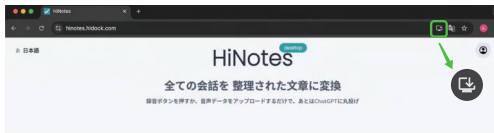

HiNotes

4. 画面の指示に従ってHiNotesをインストールします。



5. インストール後は、以下のようにアプリとして開いて使用できます。



HiNotes


iPhone/iPadにHiNotesをインストールする方法

1. iPhoneまたはiPadでChromeを開きます。
2. <https://hinotes.hidock.com>にアクセスします。
3. アドレスバーの右上にある「共有」のアイコンをタップします。
4. 「ホーム画面に追加」を探してタップします。
5. ウェブサイトの詳細を確認または編集し、「追加」をタップします。
6. HiNotesアプリがiPhone/iPadに保存されます。ホーム画面から開くことができます。



AndroidスマホにHiNotesをインストールする方法

1. AndroidデバイスでChromeを開きます。
2. <https://hinotes.hidock.com>にアクセスします。
3. 「ホーム画面に追加」を探してタップします。
4. 画面の指示に従います。

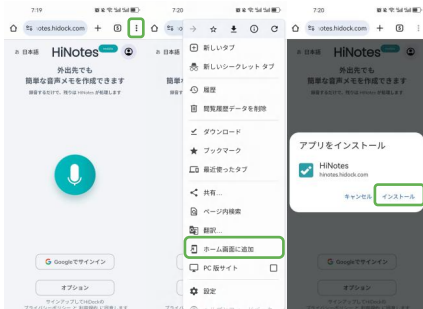

必要環境条件

システムとポート

利用可能なUSB-Cポートを備えたパソコン(アダプタの完全な機能を確保するため、USB-CポートはPD3.0およびDP オルタネートモードに対応している必要があります)。

重要事項:

すべてのUSB-CポートがUSB Type-C規格の全機能に対応しているわけではありません。ご使用されるパソコンのUSB-CポートがPD3.0およびDP オルタネートモードに対応することを確認してください。

3840x2160p解像度を実現するには、4K解像度に対応するディスプレイやパソコンが必要です。

ご使用されるパソコンに特定の充電要件がある場合があります。例えば、一部のパソコンは過放電状態になると、電池残量が少ない故に電源オンになれなく、専用の充電アダプタにのみ対応します。その場合、パソコンがHiDockを認識せず、HiDockを通して充電できない可能性があります。電源に関する詳細については、パソコンの製造元にお問い合わせください。

製品保証

HiDockのご購入日から18か月間の保証サービスを利用できます。保証サービスを利用するには、製品の底面に記載されている有効なデバイスシリアル番号を提供する必要があります。

詳細については、<https://jp.hidock.com/pages/warranty-policy> をご覧ください。

プライバシーと安全情報

法的制限

該当する法律を厳守し、本製品を不正に使用しないでください。利用者の違法行為により発生した損害及び不利益について、弊社は何らの責任も負うものではありません。

プライバシーポリシー

HiDockでは、ユーザーのプライバシーと情報セキュリティを最優先に考えております。詳細については、<https://jp.hidock.com/pages/privacy-policy>をご覧ください。

情報セキュリティ

HiDockは、ユーザーがHiDock Keyボタンを押すときにのみ音声を記録します。

HiDockはスタンドアローンのデバイスであり、単独でインターネットに接続することはできません。

PCにUSB経由で接続、スマートフォンにBluetooth経由で接続する以外にこれらのデバイスに接続する方法はありません。

情報セキュリティを確保するため、クラウドにアップロードされた録音ファイルは暗号化されています。

安全操作指示

1. 使用中にマイクの音声入力ポートやスピーカーの音声出力ポートが本、新聞、カーテンなどの障害物によって覆われていないことを確認してください。
2. 製品を水から守るために、周囲に液体を含む物を置かないでください。
3. 製品を火源（例：点火された蠟燭等）に近寄らないでください。
4. 落下防止のため、製品を平らでない表面に置かないでください。
5. 製品を医療機器の近くに置かないでください。この製品には磁石が含まれています。

介紹

HiDock 是一款專為個人桌面設計的人工智慧音訊擴充座。它透過 USB Type-C 連接埠連接到電腦，還可以使用藍牙技術連接到智慧型手機。使用者可以透過 HiDock 專有的雙向降噪 (BNC) 技術將 HiDock 用於各種通訊應用。

BNC 可減少使用者側和呼叫者側的噪音。其內建錄音機可儲存長達 1000 小時 (32GB) 的音訊。HiDock 配備了豐富且強大的接口，包括 4K/60Hz HDMI 連接埠、乙太網路、供電、USB-A/USB-C。

HiDock 旨在提供乾淨的桌面和清晰的通訊工作體驗。

包裝內容物

HiDock H1


 × 1	HiDock H1
 × 1	電源 (150W)
 × 1	USB C-C 連接線
 × 1	USB A-C 連接線
 × 1	快速入門指南
 × 1	HiDock E1

HiDock H1E



 × 1	HiDock H1E
 × 1	電源(100W)
 × 1	USB C-C 連接線
 × 1	快速入門指南
 × 1	HiDock E1

功能概述

正視圖


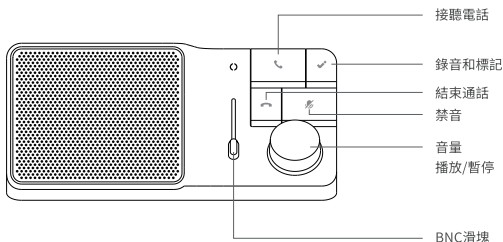


後視圖和側視圖 - HiDock H1



- ① 電源輸入
- ② USB-C 上行埠
- ③ HDMI (2.0) 4K/60Hz
- ④ USB 3.2 Gen2
- ⑤ USB 3.2 Gen1
- ⑥ 2.5 Gbps 乙太網絡
- ⑦ 藍牙配對按鈕
- ⑧ USB 3.2 Gen 2, PD Out 18W
- ⑨ MicroSD 4.0 (UHS-II)
- ⑩ SD 4.0 (UHS-II)

後視圖和側視圖 - HiDock H1E



① 電源開關

② 電源輸入

③ USB-C 上行埠

④ HDMI(2.0) 4K/60Hz

⑤ USB 3.2 Gen 1

⑥ 1 Gbps 乙太網路


⑦ 藍牙配對按鈕

⑧ USB 3.2 Gen1, PD Out 18W

設定


連接電源

1. 將交流電源線的一端連接至電源,另一端連接至插座。
2. 將電源連接到 HiDock 上的電源輸入連接埠。
3. HiDock H1會自動開機,如果使用 HiDock H1E,請按電源開關按鈕進行開機。

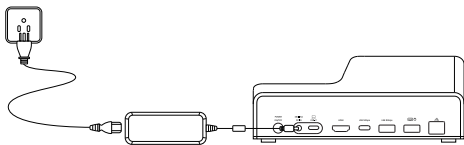

透過USB-C連接線連接

1. 將 USB-C 連接線的一端連接到 HiDock 上的 USB-C 上行埠,並將另一端連接到筆記型電腦上的 USB-C 連接埠。

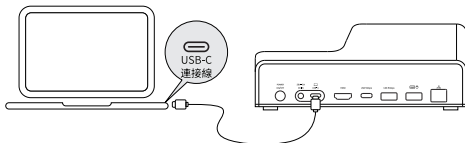


2. 在筆記型電腦的音訊設定中,選擇「HiDock H1」或「HiDock H1E」作為聲音輸入和輸出。
3. 若要使用 HiDock 進行會議,請在視訊會議軟體 (Zoom、Microsoft Teams等) 的音訊設定中選擇「HiDock H1」或「HiDock H1E」作為麥克風和揚聲器。

設定

透過藍牙連接

1. 按住左側藍牙配對按鈕 3 秒進入配對模式。會有語音提示。



2. 當您聽到語音提示時，進入藍牙設定並在智慧型手機上選擇「HiDock H1」或「HiDock H1E」。

3. 若要使用HiDockH1進行會議，請在視訊會議軟體（Zoom、Microsoft Teams等）的音訊設定中選擇「HiDock H1」或「HiDock H1E」作為麥克風和揚聲器。

ZeroOops™ 控制面板

推出 ZeroOops™ 控制面板，這是 HiDock 的一項持續創新，旨在幫助用戶管理會議和通信輕鬆。H1 設備的設計在第一代型號的基礎上得到了增強，具有改進的人體工學設計和直觀的元素，如旋鈕和滑塊。這些改進，包括添加旋鈕和滑塊，有助於在會議和通訊會話期間實現更用戶友好的無縫控制體驗。

ZeroOops™ 控制面板

圖示	按鈕	功能
	提高音量 降低音量	順時針滾動旋鈕可調高電腦或智慧型手機的音量。 逆時針滾動旋鈕可降低電腦或智慧型手機的音量。
	播放/暫停	按下旋鈕暫停目前音樂播放。 再次按下旋鈕可恢復目前音樂播放。
	雙向噪音 水平控制	向上滑動此按鈕可提升噪音的降噪等級。 滑至底部可停用降噪功能。 此功能供使用者控制自己和通話對方兩端的降噪等級。如果通話時噪音較大(例如在咖啡館或機場)，建議向上滑動以盡可能消除噪音。如果通話時比較安靜(辦公室、會議室)，建議保持較低的位置。
	麥克風靜音	按下以關閉麥克風，LED 環將顯示紅色。 再次按下以重新啟動麥克風，LED 環將停止顯示紅色。
	接聽電話	按此鍵可接聽電話會議或電話。
	結束通話	按此鍵結束目前通話。
	HiDock Key 按鍵	這是一個多功能鍵。 長按1.5秒開始錄音。再次長按1.5秒停止錄音。錄音過程中快速按一下可標記目前錄音位置。

規格 - HiDock H1

系統相容性

透過 USB-C 替代模式，可與基於Windows、macOS的電腦配合使用，也可與啟用藍牙的 iOS 或 Android 設備配對。

平台相容性

適用於 Zoom、Teams、GoogleMeet、Discord、FaceTime、Skype、WhatsApp 等。

音訊

基於 AI 的雙向降噪，適用於麥克風和揚聲器。
降噪類型：鍵盤打字聲、狗吠聲、街道噪音、背景噪音、廚房噪音等。
音質：5W 高音單元、7W 全頻單元和一個被動振膜提供清晰的音質。

控制和指示器

控制：滑塊用於調整 BNC 水平、錄音、語音
標記、音量/靜音/接聽電話/結束通話、藍牙配對。
視覺：錄音、語音標記、靜音、來電、藍牙配對的指示燈。

尺寸和重量

高 x 寬 x 深：72.4 x 178 x 93.5mm

重量：520g

擴充座

筆記型電腦充電：最高可達100瓦
手機充電：最高18W的睡眠電源充電

1 x SD 4.0 和 1 x microSD 4.0
(SD, SDHC, miniSD, microSD (T-Flash), MMC, RS-MMC, MMCmicro, MMCmobile, SDXC, SD 3.0 UHS-I, SD 4.0 UHS-II)

2 x 顯示器/視訊 - HDMI v 2.0
(4K@60Hz HDR)

USB-A X 2
- USB 3.2 Gen2 (10Gbps) X 1
- USB 3.1 Gen1 (5Gbps) X 1

USB-C X 2
- 1 x USB 3.2 Gen2 (10Gbps) X 1
- USB 3.2 Gen2 (10Gbps), 支援最高達18W的PD充電 X 1
USB-C 上行埠 X 1
直流電源端口 (20V, 7.5A) X 1
2.5Gbps 乙太網路 X 1

規格 - HiDock H1E

系統相容性

透過 USB-C 替代模式, 可與基於 Windows、macOS 的電腦配合使用, 也可與啟用藍牙的 iOS 或 Android 設備配對。

平台相容性

適用於 Zoom、Teams、GoogleMeet、Discord、FaceTime、Skype、WhatsApp 等。

音訊

基於 AI 的雙向降噪, 適用於麥克風和揚聲器。

降噪類型: 鍵盤打字聲、狗吠聲、街道噪音、背景噪音、廚房噪音等。

音質: 一個 10W 全頻單元和一個被動振膜提供清晰的音質。

控制和指示器

控制: 滑塊用於調整 BNC 水平、錄音、語音

標記、音量/靜音/接聽電話/結束通話、藍牙配對。

視覺: 錄音、語音標記、靜音、來電、藍牙配對的指示燈。

尺寸和重量

高 x 寬 x 深: 72.4 x 178 x 93.5mm

重量: 470g

擴充座

筆記型電腦充電: 最高可達 65 瓦

手機充電: 最高 18W 的睡眠電源充電

1 x 顯示器/視訊 - HDMI v 2.0 (4K@60Hz HDR)

1 x 1Gbps 乙太網路

2 x USB-A - USB 3.2 Gen1 (5Gbps)

2 X USB-C

- USB 3.2 Gen1 (5Gbps) X 1

- USB 3.2 Gen1 (5Gbps) 支援最高達 18W 的 PD 充電 X 1


USB-C 上行埠 X 1

直流電源端口 (20V , 5A) X 1

HiDock E1

使用HiDock E1

從耳機充電座中取出 HiDock E1, 當你戴上耳機時, 音訊將從 HiDock 切換到耳機上。

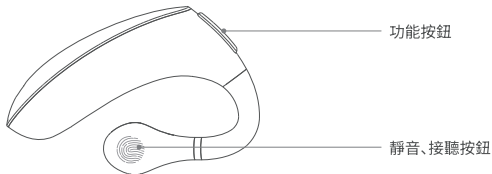

功能按鈕

長按功能鍵 2 秒鐘開始錄音。
錄音過程中短按功能鍵可新增標記。
再次長按可停止錄音。

靜音、接聽按鈕

長按 2 秒可將麥克風靜音/取消靜音。
雙擊可接聽/掛斷電話。

HiDock E1


為HiDock E1充電

HiDock E1 在耳機充電座中時會自動充電。請確保充電座與 HiDock 連接良好。

耳機充電座和耳機之間的配對

耳機充電座和耳機在出廠時已經配對好，使用時無需再次配對。

但是，如果需要重新配對，在耳機充電座背面有一個配對按鈕，將其與耳機上的功能按鈕同時連續點按 6 下，耳機充電座和耳機將重置並重新配對。

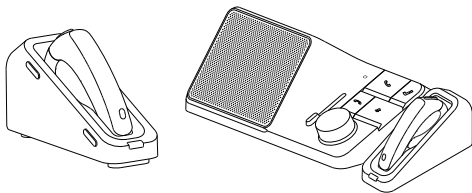

通話時間	長達 8 小時
無線範圍	10米
延遲	≤ 30ms

Model:E102
Input:DC3.7V 50mA
FCC ID:2AXGWE102



217-241267



CCA424LP7110T3




HiDock E1

連接

透過彈簧連接器和磁性附著將你的 HiDock E1 耳機和 HiDock 進行連接。耳機充電座上的指示燈會呈綠色亮起。

在通常的居家或辦公環境里，耳機可以在 10 米 / 33 英尺的範圍內使用。如果耳機和 HiDock 之間有障礙物，如牆壁，這個範圍可能會縮小。

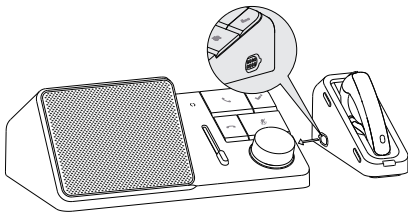

強製切換音訊的輸入/輸出

當你同時佩戴眼鏡和 E1 耳機時，耳機的皮膚感測功能可能會受到影響，音訊還是在 HiDock 進行播放。這種情況下，除了盡可能地將耳機和你的皮膚進行貼合以外，你還可以通過快速連續點按兩下耳機上的功能按鈕的方式，手動的將音訊的輸出設備切換為 E1 耳機。如果你需要音訊重新從 HiDock 進行播放，只需要將 E1 耳機放回充電座即可。

HiNotes

HiNotes 是 HiDock 的 AI 軟體，提供 57 種語言的語音轉文字轉錄和 GPT 支援的摘要。它可以在會議、面試、訪談時使用，幫助您在對話期間保持井然有序，並在對話後獲得結構良好的筆記，包括會議要點、待辦事項清單等。

只需將 HiDock 連接到您的筆記型電腦，您就可以選擇手動或自動將錄音上傳到 HiNotes。然後它會自動分析它們，為您提供準確的轉錄和結構良好的註釋供您審查。

若要使用 HiNotes，請造訪 <https://hinotes.hidock.com>。

註冊一個 HiNotes 賬號

1. 訪問 <https://hinotes.hidock.com>。
2. 使用 Google 郵箱賬戶或其他的郵箱賬號進行註冊。
3. 推薦使用購買 HiDock 時登記的郵箱賬號進行註冊。

如何安裝 HiNotes APP

只需幾秒，就能從瀏覽器下載 HiNotes APP。它可以在 Windows 系統 (Chrome 或者 Edge 瀏覽器)，macOS 系統 (使用 Chrome 瀏覽器)，iOS 系統 (使用 Chrome 瀏覽器) 和 Android 系統 (使用 Chrome 瀏覽器) 等情況下使用。

使用 Chrome 瀏覽器在筆記型電腦上安裝 HiNotes App

1. 在筆記型電腦上打開 Chrome 瀏覽器。
2. 訪問 <https://hinotes.hidock.com>。
3. 在瀏覽器上方的網址列，點擊下載安裝圖標。




HiNotes

4. 遵循螢幕上的指示操作。



5. 安裝完成後電腦螢幕會如下圖所示，之後即可將 HiNotes 作為App進行使用。

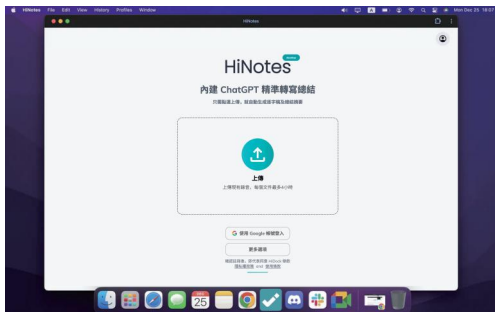

HiNotes


在 iPhone 或 iPad 上安裝 HiNotes HiNotes App

1. 在 iPhone 或 iPad 上打開 Chrome 瀏覽器。
2. 訪問 <https://hinotes.hidock.com>。
3. 在瀏覽器上方的網址列，點擊“分享”圖標。
4. 找到並點擊“添加到主畫面”。
5. 確認或編輯應用程式名稱，點擊“添加”。
6. HiNotes App 已經安裝到你的 iPhone 或 iPad 上了，可以在設備的主畫面裡打開並使用。



在 Android 手機上安裝 HiNotes HiNotes App

1. 在 Android 手機上打開 Chrome 瀏覽器。
2. 訪問 <https://hinotes.hidock.com>。
3. 找到並點擊“添加到主畫面”。
4. 遵循螢幕上的指示操作。

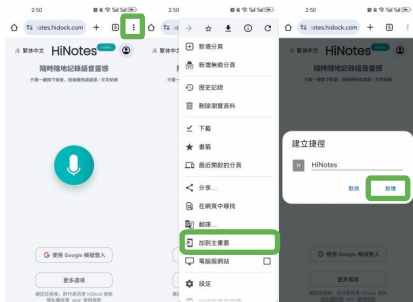

特殊要求

系統和連接埠要求

與 HiDock 連接使用的筆記型電腦需具有可用的 USB-C 連接埠 (為了確保適配器的全部功能, 使用時筆記型電腦用於連接的 USB-C 連接埠必須支援 PD 3.0 和 DP 替代模式)。

重要通知:

並非所有 USB-C 連接埠都支援 USB Type-C 標準的所有功能。請確保您的主機 USB-C 連接埠支援 PD 3.0 和 DP 替代模式。

需要支援 4K 解析度的顯示器才能實現 3840 x 2160p 的解析度。需要支援 4K 解析度的電腦才能實現 3840 x 2160P 的解析度。您的筆記型電腦可能具有特定的充電要求。例如, 如果您的筆記型電腦僅在電池電量過低且無法開機時支援定製適配器進行充電, 您的筆記型電腦可能無法識別它。有關電源的更多信息, 請參考您的筆記型電腦製造商的資訊。

產品品質保證

HiDock 的客戶從購買日期開始享有 18 個月的保修服務。為了享有保修服務，客戶應提供有效的設備序列號，該序列號可在產品底部找到。

欲了解更多信息，請訪問 <https://www.hidock.com/pages/warranty-policy>。

限用物質含有情況標示聲明書

Declaration of the Presence Condition of the Restricted Substances Marking

設備名稱:音頻擴展塢 Equipment name		型號 (型式): HiDock H1 Type designation (Type)				
單元 Unit	限用物質及其化學符號 Restricted substances and its chemical symbols					
	鉛Lead (Pb)	汞Mercury (Hg)	鎘Cadmium (Cd)	六價鉻 Hexavalent chromium (Cr ⁶⁺)	多溴聯苯 Polybrominated biphenyls (PBB)	多溴二苯醚 Polybrominated diphenyl ethers (PBDE)
外殼	○	○	○	○	○	○
電路板	○	○	○	○	○	○
喇叭	○	○	○	○	○	○
連接線	○	○	○	○	○	○
金屬零件	○	○	○	○	○	○
包裝	○	○	○	○	○	○
備考1. “超出0.1 wt %”及“超出0.01 wt %”係指限用物質之百分比含量超出百分比含量基準值。 Note 1: “Exceeding 0.1 wt %” and “exceeding 0.01 wt %” indicate that the percentage content of the restricted substance exceeds the reference percentage value of presence condition.						
備考2. “○”係指該項限用物質之百分比含量未超出百分比含量基準值。 Note 2: “○” indicates that the percentage content of the restricted substance does not exceed the percentage of reference value of presence.						
備考3. “—”係指該項限用物質為排除項目。 Note 3: The “—” indicates that the restricted substance corresponds to the exemption.						

隱私和安全訊息

法律限制

請嚴格遵守適用法律，避免非法使用本產品。公司不對非法活動的後果作任何承諾 或承擔任何責任。

隱私政策

在 HiDock，我們將用戶隱私和數據安全視為首要任務。欲了解更多信息，請訪問 <https://www.hidock.com/pages/privacy-policy>。

數據安全

HiDock 只在用戶按下 HiDock 按鍵時才會錄製音頻。它是一個獨立的設備，不會獨立連接到網際網路。

它只能通過 USB 連接到個人電腦或通過藍牙連接到智能手機。上傳到雲端進行轉錄的錄音是加密的並受保護，以確保數據安全。

安全操作說明

1. 請確保麥克風的聲音輸入口和揚聲器的聲音輸出口在使用時不被報紙、書籍、窗簾等物品覆蓋。
2. 請勿將產品暴露在滴水或飛濺水的情況下，並且請勿將裝有液體的物品，如杯子，放在產品上方。
3. 請勿將產品暴露在明火(例如點燃的蠟燭)的情況下。
4. 請勿將產品放置在不平坦的表面上，以防止其掉落。
5. 請勿將產品放置在醫療設備附近。本產品含有磁鐵。

低功率電波輻射性電機管理辦法

取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。

前述合法通信，指依電信管理法規定作業之無線電通信。

低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。



WE ARE HERE FOR YOU

✉: support@hidock.com

SUBSCRIBE FOR MORE INFORMATION



www.hidock.com