




802.11b / 2412 MHz (Band Edge)

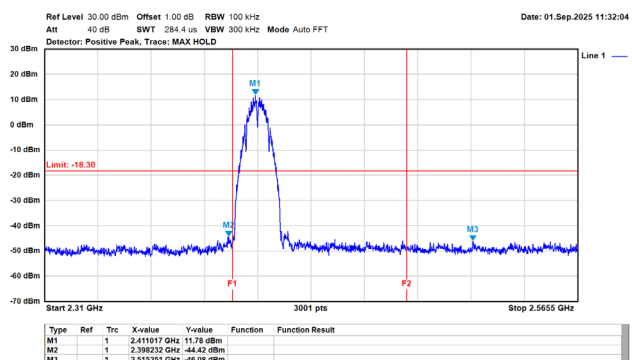


802.11b / 2437 MHz (Band Edge)

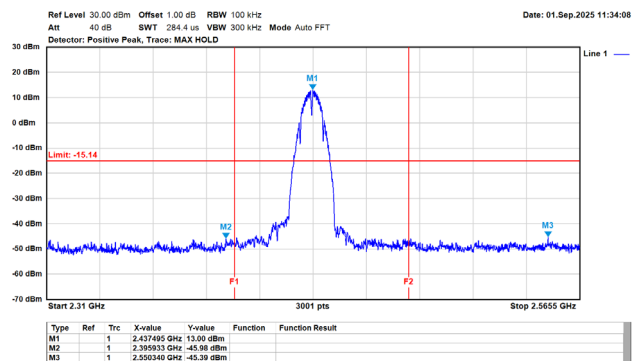


802.11b / 2462 MHz (Band Edge)

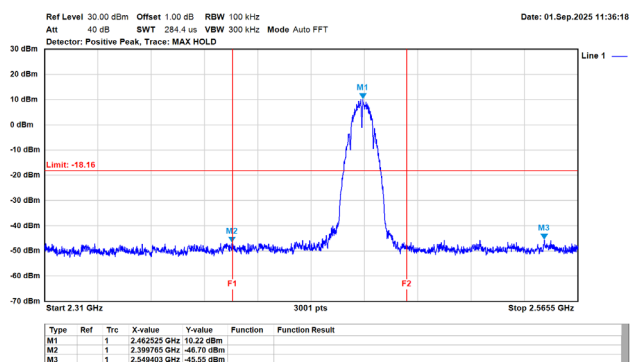


802.11g / 2412 MHz (Band Edge)






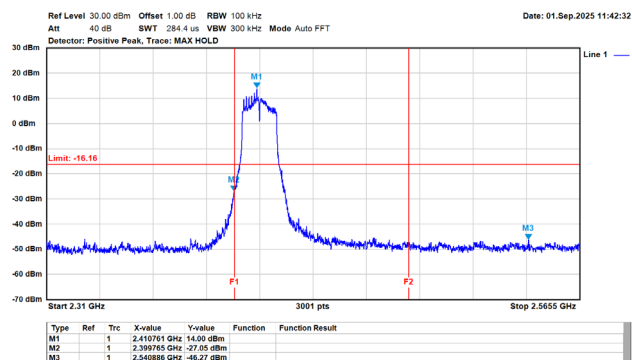


802.11g / 2437 MHz (Band Edge)

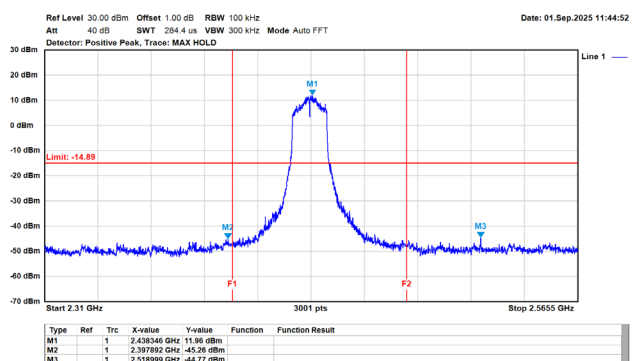

802.11g / 2462 MHz (Band Edge)

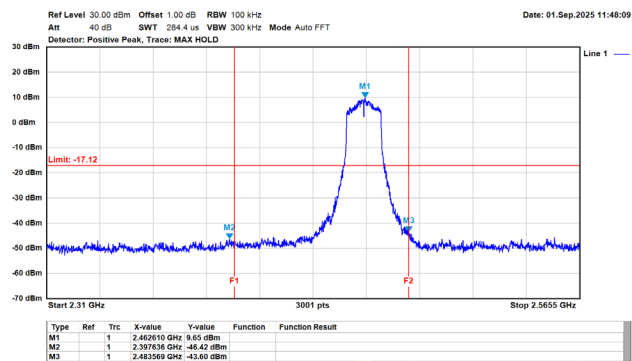

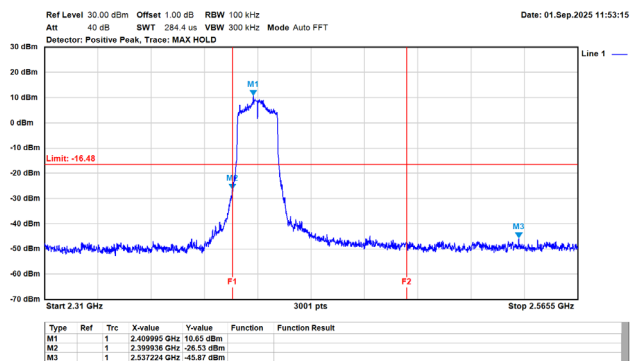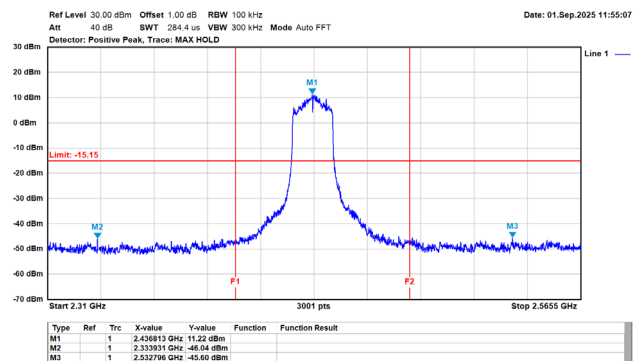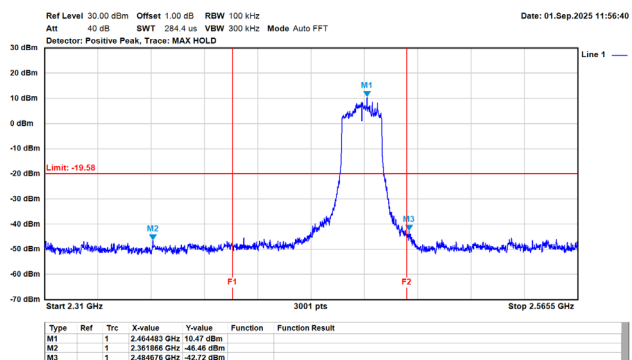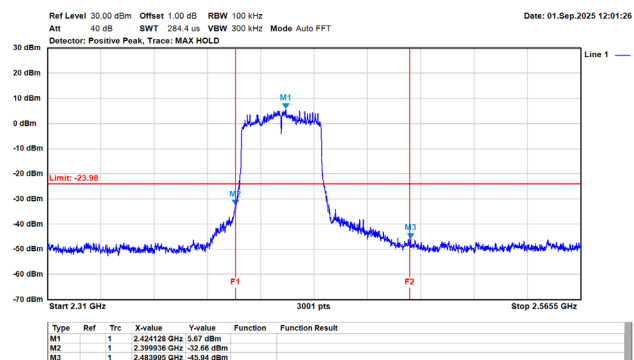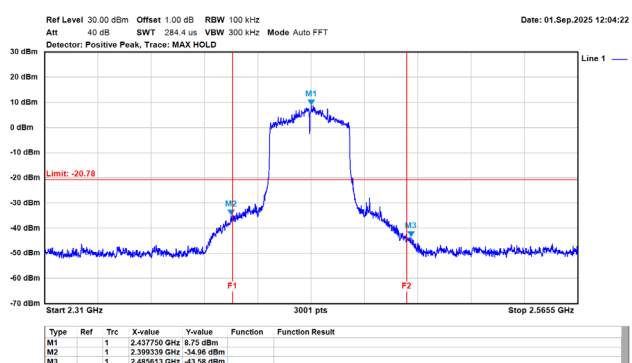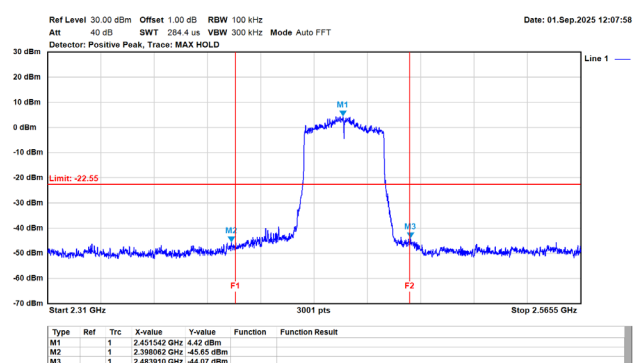
802.11ax (20 MHz) / 2412 MHz (Band Edge)**802.11ax (20 MHz) / 2437 MHz (Band Edge)****802.11ax (20 MHz) / 2462 MHz (Band Edge)****802.11ax (40 MHz) / 2422 MHz (Band Edge)****802.11ax (40 MHz) / 2437 MHz (Band Edge)****802.11ax (40 MHz) / 2452 MHz (Band Edge)**

Appendix F. Test Result of Transmitter Radiated Spurious Emission

30 MHz ~ 1 GHz

Test Mode: Mode 1

Site :HC-C802
Condition :3m Horizontal
Mode :WIFI2.4G_TX_LF
Test By :Brook Cheng

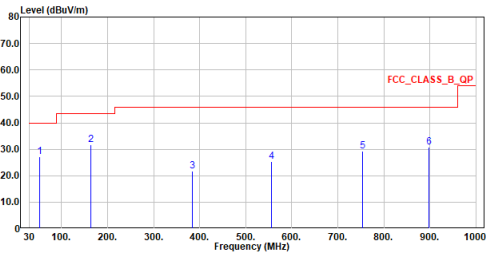


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	53.086	27.17	40.00	-12.83	28.93	-1.76	QP
2	162.987	31.67	43.50	-11.83	34.25	-2.58	QP
3	383.468	21.73	46.00	-24.27	21.54	0.19	QP
4	555.352	25.39	46.00	-20.61	21.60	3.79	QP
5	754.105	29.41	46.00	-16.59	21.31	8.10	QP
6	897.956	30.79	46.00	-15.21	21.17	9.62	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-C802
Condition :3m Vertical
Mode :WIFI2.4G_TX_LF
Test By :Brook Cheng

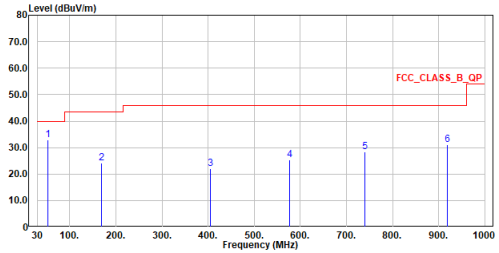


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	52.989	32.85	40.00	-7.15	34.60	-1.75	QP
2	168.128	24.28	43.50	-19.22	27.18	-2.90	QP
3	405.002	21.97	46.00	-24.03	21.27	0.70	QP
4	577.080	25.44	46.00	-20.56	20.96	4.48	QP
5	740.428	28.35	46.00	-17.65	20.66	7.69	QP
6	918.035	31.18	46.00	-14.82	21.20	9.98	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Test Mode: Mode 2

Site :HC-CB02
Condition :3m Horizontal
Mode :WIFI2.4G_TX_LF
Test By :Brook Cheng

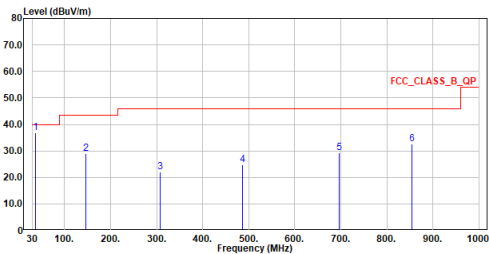


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	37.178	36.97	40.00	-3.03	39.62	-2.65	QP
2	146.206	29.02	43.50	-14.48	31.76	-2.74	QP
3	307.032	22.14	46.00	-23.86	24.00	-1.86	QP
4	485.003	24.73	46.00	-21.27	22.13	2.60	QP
5	695.905	29.41	46.00	-16.59	22.66	6.75	QP
6	854.015	32.59	46.00	-13.41	23.26	9.33	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m Vertical
Mode :WIFI2.4G_TX_LF
Test By :Brook Cheng

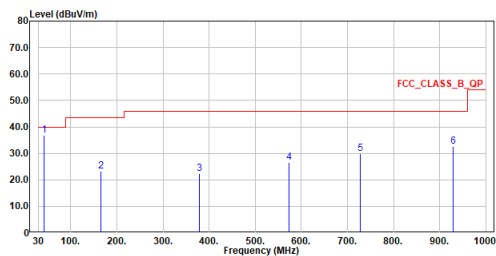


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	Line	Limit	Level	dB	
1	42.707	36.92	40.00	-3.08	38.91	-1.99	QP
2	165.703	23.17	43.50	-20.33	26.04	-2.87	QP
3	379.103	22.46	46.00	-23.54	22.39	0.07	QP
4	572.521	26.63	46.00	-19.37	22.24	4.39	QP
5	728.303	29.79	46.00	-16.21	22.37	7.42	QP
6	928.608	32.69	46.00	-13.31	22.46	10.23	QP

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.
5. The other emission levels were very low against the limit.

Above 1 GHz

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :b_TX_2412MHz
Test By :Brook Cheng

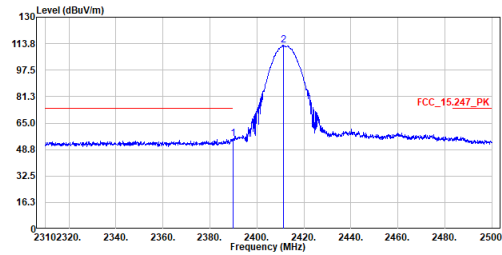


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.800	55.44	74.00	-18.56	43.71	11.73	Peak
2	2411.270	112.68	-----	-----	100.87	11.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :b_TX_2412MHz
Test By :Brook Cheng

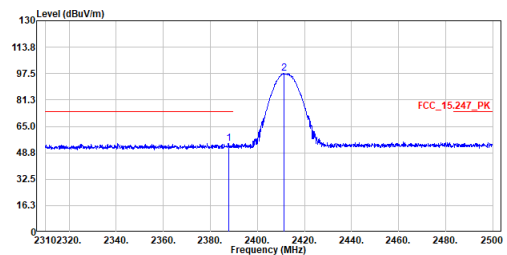


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2387.710	54.63	74.00	-19.37	42.91	11.72	Peak
2	2411.270	97.64	-----	-----	85.83	11.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3
Mode :b_TX_2412MHz
Test By :Brook Cheng

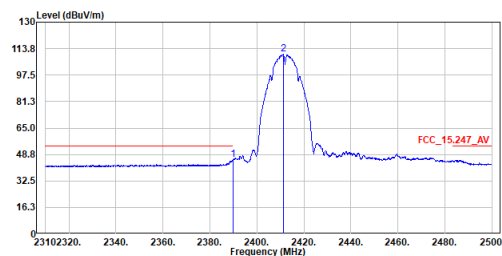


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.895	45.81	54.00	-8.19	34.08	11.73	Average
2	2411.270	110.24	-----	-----	98.43	11.81	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3
Mode :b_TX_2412MHz
Test By :Brook Cheng

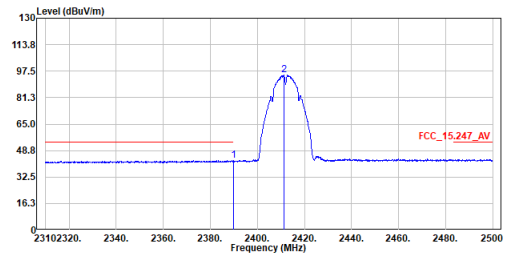


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.895	42.79	54.00	-11.21	31.06	11.73	Average
2	2411.270	95.14	-----	-----	83.33	11.81	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
Mode :b_TX_2412MHz
Test By :Brook Cheng

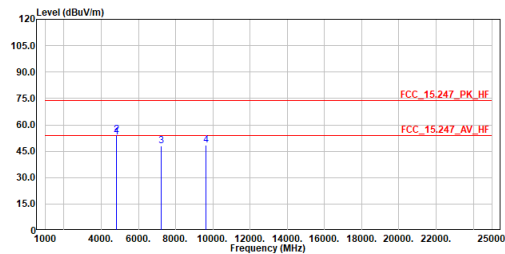


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4824.000	53.10	54.00	-0.90	68.01	-14.91	Average
2	4824.000	54.37	74.00	-19.63	69.28	-14.91	Peak
3	7236.000	47.79	74.00	-26.21	55.87	-8.08	Peak
4	9648.000	48.39	74.00	-25.61	53.28	-4.89	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
Mode :b_TX_2412MHz
Test By :Brook Cheng

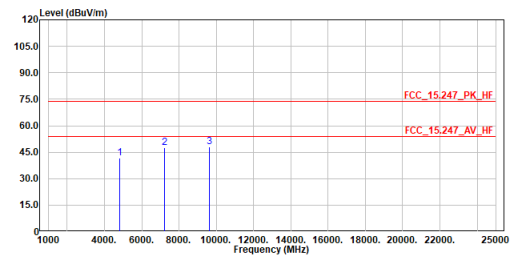


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4824.000	41.87	74.00	-32.13	56.78	-14.91	Peak
2	7236.000	47.46	74.00	-26.54	55.54	-8.08	Peak
3	9648.000	48.07	74.00	-25.93	52.96	-4.89	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :b_TX_2437MHz
Test By :Brook Cheng

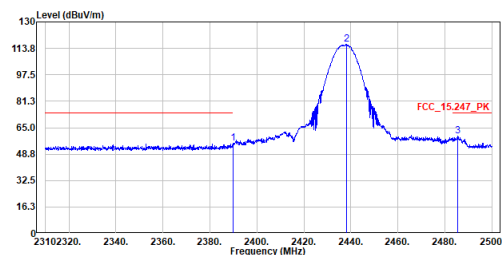


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.990	55.49	74.00	-18.51	43.76	11.73	Peak
2	2438.060	116.16	-----	-----	184.24	11.92	Peak
3	2485.465	59.68	74.00	-14.32	47.57	12.11	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :b_TX_2437MHz
Test By :Brook Cheng

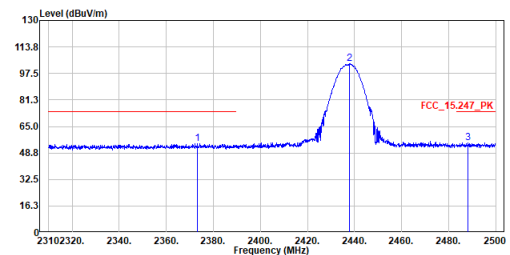


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2373.175	54.40	74.00	-19.60	42.74	11.66	Peak
2	2437.965	183.43	-----	-----	91.51	11.92	Peak
3	2488.125	54.90	74.00	-19.10	42.77	12.13	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3
Mode :b_TX_2437MHz
Test By :Brook Cheng

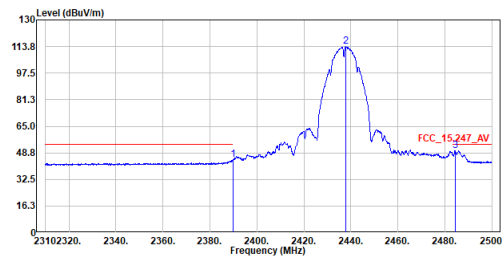


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.800	44.56	54.00	-9.44	32.83	11.73	Average
2	2437.775	113.72	-----	-----	101.80	11.92	Average
3	2484.420	50.00	54.00	-4.00	37.90	12.10	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3
Mode :b_TX_2437MHz
Test By :Brook Cheng

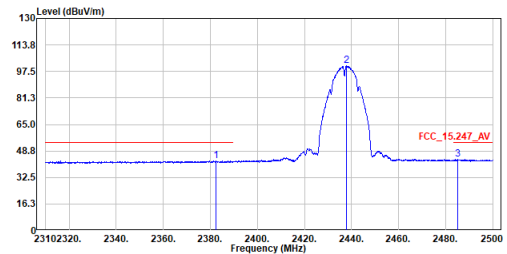


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2382.390	42.65	54.00	-11.35	30.95	11.70	Average
2	2437.775	100.88	-----	-----	88.96	11.92	Average
3	2485.180	43.74	54.00	-10.26	31.63	12.11	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
Mode :b_TX_2437MHz
Test By :Brook Cheng

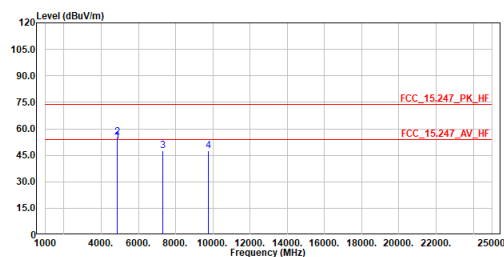


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	53.00	54.00	-1.00	67.72	-14.72	Average
2	4874.000	55.14	74.00	-18.86	69.86	-14.72	Peak
3	7311.000	47.42	74.00	-26.58	55.42	-8.00	Peak
4	9748.000	47.62	74.00	-26.38	52.33	-4.71	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
Mode :b_TX_2437MHz
Test By :Brook Cheng

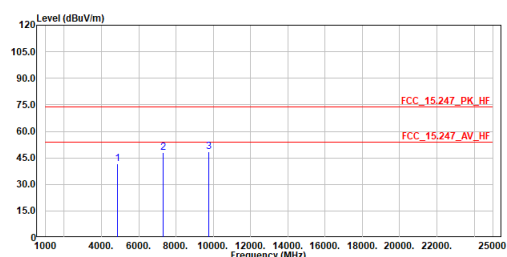


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4874.000	41.79	74.00	-32.21	56.51	-14.72	Peak
2	7311.000	47.88	74.00	-26.12	55.88	-8.00	Peak
3	9748.000	48.52	74.00	-25.48	53.23	-4.71	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :b_TX_2462MHz
Test By :Brook Cheng

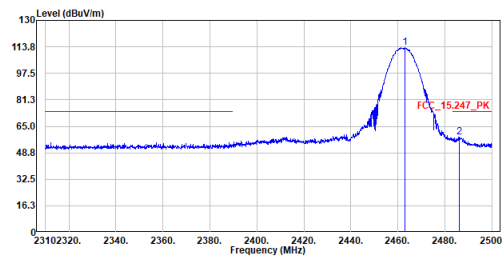


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2462.950	113.16	-----	-----	101.14	12.02	Peak
2	2486.130	58.38	74.00	-15.62	46.27	12.11	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :b_TX_2462MHz
Test By :Brook Cheng

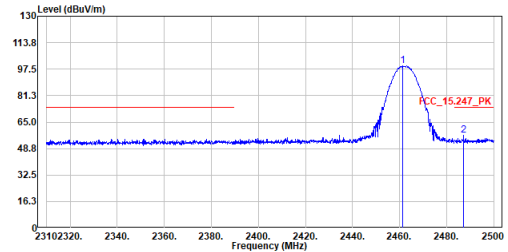


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2461.240	99.61	-----	-----	87.59	12.02	Peak
2	2487.175	57.11	74.00	-16.89	44.98	12.13	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3
Mode :b_TX_2462MHz
Test By :Brook Cheng

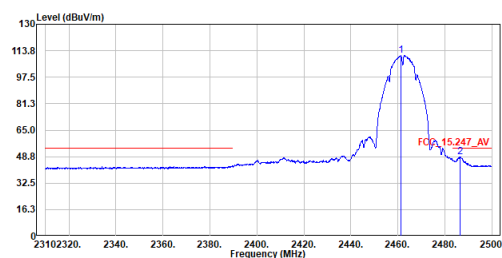


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2461.335	110.67	-----	-----	98.65	12.02	Average
2	2486.415	48.52	54.00	-5.48	36.41	12.11	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3
Mode :b_TX_2462MHz
Test By :Brook Cheng

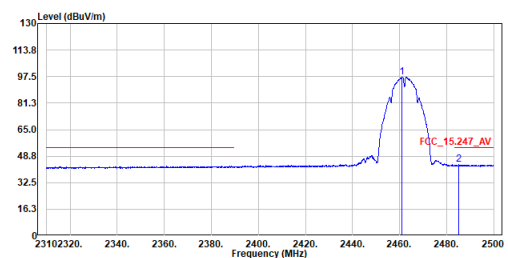


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2460.955	97.13	-----	-----	85.11	12.02	Average
2	2485.085	43.42	54.00	-10.58	31.31	12.11	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
Mode :b_TX_2462MHz
Test By :Brook Cheng

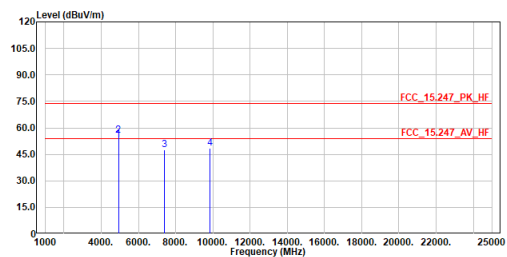


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4924.000	53.48	54.00	-0.52	68.00	-14.52	Average
2	4924.000	55.50	74.00	-18.50	70.02	-14.52	Peak
3	7386.000	47.34	74.00	-26.66	55.23	-7.89	Peak
4	9848.000	48.38	74.00	-25.62	52.91	-4.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
Mode :b_TX_2462MHz
Test By :Brook Cheng

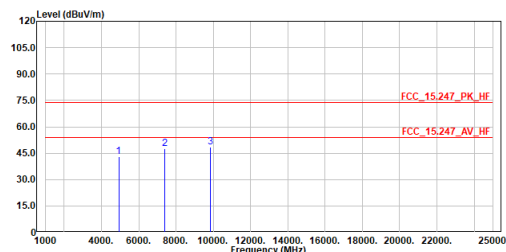


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4924.000	42.81	74.00	-31.19	57.33	-14.52	Peak
2	7386.000	47.74	74.00	-26.26	55.63	-7.89	Peak
3	9848.000	48.35	74.00	-25.65	52.88	-4.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :g_TX_2412MHz
Test By :Brook Cheng

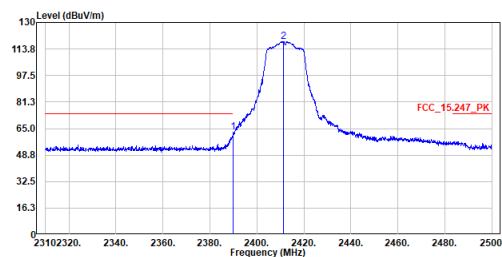


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.990	62.58	74.00	-11.42	50.85	11.73	Peak
2	2411.175	118.43	-----	-----	106.62	11.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :g_TX_2412MHz
Test By :Brook Cheng

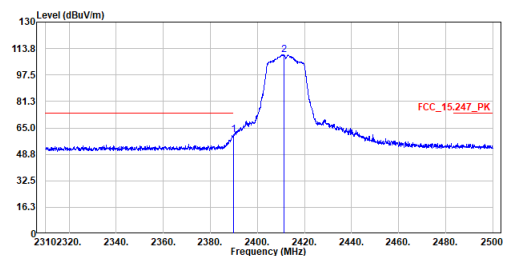


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.895	60.98	74.00	-13.02	49.25	11.73	Peak
2	2411.270	110.07	-----	-----	98.26	11.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :g_TX_2412MHz
Test By :Brook Cheng

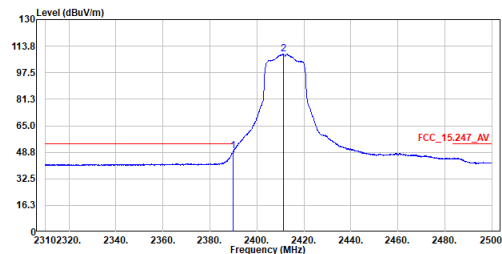


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.800	49.31	54.00	-4.69	37.58	11.73	Average
2	2411.270	109.03	-----	-----	97.22	11.81	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :g_TX_2412MHz
Test By :Brook Cheng

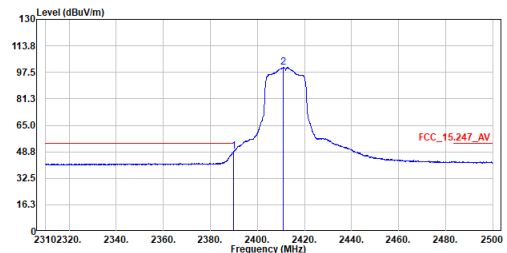


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.990	49.01	54.00	-4.99	37.28	11.73	Average
2	2411.080	100.57	-----	-----	88.76	11.81	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
Mode :g_TX_2412MHz
Test By :Brook Cheng

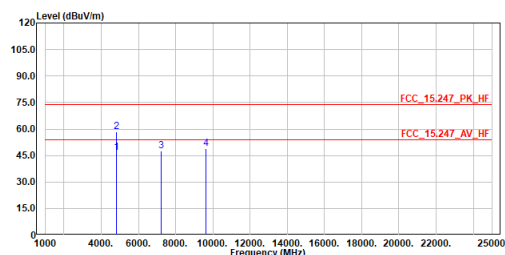


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4824.000	46.80	54.00	-7.20	61.71	-14.91	Average
2	4824.000	58.50	74.00	-15.50	73.41	-14.91	Peak
3	7236.000	47.60	74.00	-26.40	55.68	-8.08	Peak
4	9648.000	49.07	74.00	-24.93	53.96	-4.89	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
Mode :g_TX_2412MHz
Test By :Brook Cheng

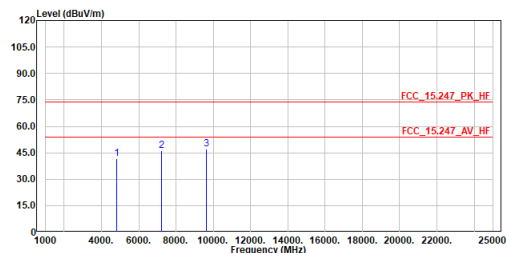


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4824.000	41.64	74.00	-32.36	56.55	-14.91	Peak
2	7236.000	46.32	74.00	-27.68	54.40	-8.08	Peak
3	9648.000	47.15	74.00	-26.85	52.04	-4.89	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :g_TX_2437MHz
Test By :Brook Cheng

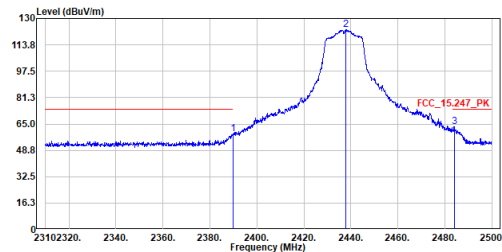


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.990	58.65	74.00	-15.35	46.92	11.73	Peak
2	2437.870	123.00	-----	-----	111.08	11.92	Peak
3	2483.945	63.21	74.00	-10.79	51.11	12.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :g_TX_2437MHz
Test By :Brook Cheng

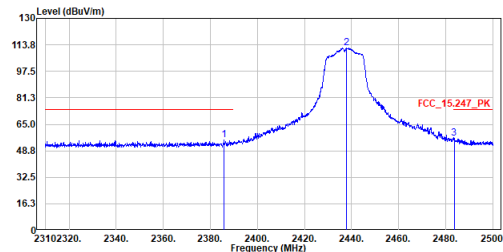


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2385.810	55.37	74.00	-18.63	43.66	11.71	Peak
2	2437.870	111.86	-----	-----	99.94	11.92	Peak
3	2483.565	56.56	74.00	-17.44	44.46	12.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :g_TX_2437MHz
Test By :Brook Cheng

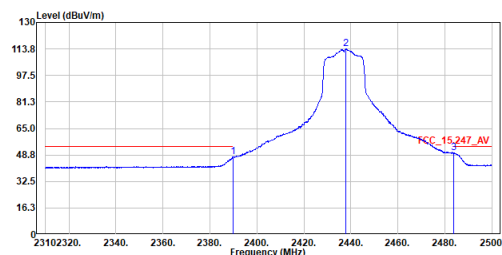


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.895	47.56	54.00	-6.44	35.83	11.73	Average
2	2437.775	113.64	-----	-----	101.72	11.92	Average
3	2483.660	50.24	54.00	-3.76	38.14	12.10	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :g_TX_2437MHz
Test By :Brook Cheng

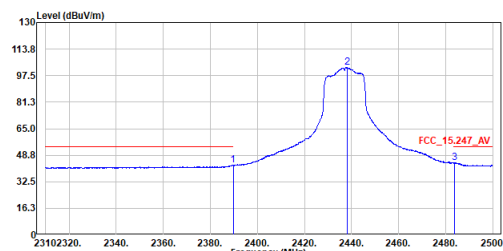


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.705	42.91	54.00	-11.09	31.18	11.73	Average
2	2438.060	102.47	-----	-----	90.55	11.92	Average
3	2483.660	43.97	54.00	-10.03	31.87	12.10	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
Mode :g_TX_2437MHz
Test By :Brook Cheng

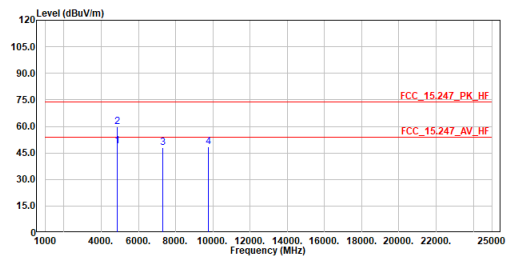


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4874.000	48.87	54.00	-5.13	63.59	-14.72	Average
2	4874.000	59.74	74.00	-14.26	74.46	-14.72	Peak
3	7311.000	48.00	74.00	-26.00	56.00	-8.00	Peak
4	9748.000	48.54	74.00	-25.46	53.25	-4.71	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
Mode :g_TX_2437MHz
Test By :Brook Cheng

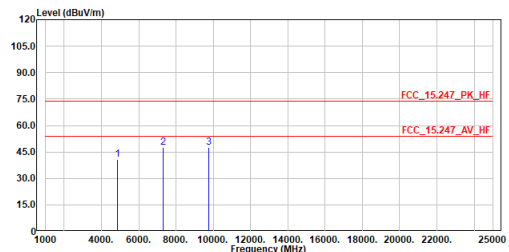


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4874.000	40.90	74.00	-33.10	55.62	-14.72	Peak
2	7311.000	47.55	74.00	-26.45	55.55	-8.00	Peak
3	9748.000	47.72	74.00	-26.28	52.43	-4.71	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :g_TX_2462MHz
Test By :Brook Cheng

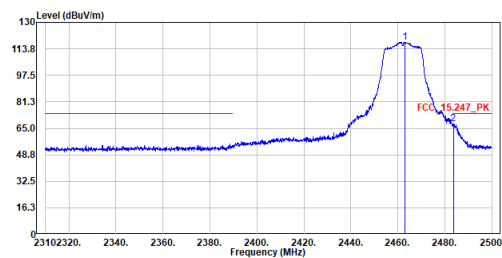


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2462.855	117.97	-----	-----	105.95	12.02	Peak
2	2483.565	67.87	74.00	-6.13	55.77	12.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :g_TX_2462MHz
Test By :Brook Cheng

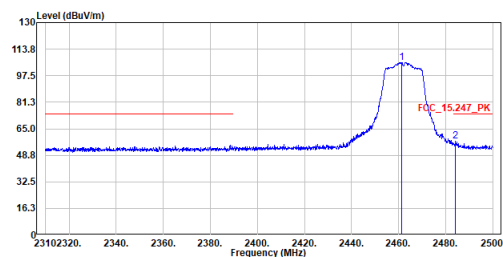


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2461.430	105.69	-----	-----	93.67	12.02	Peak
2	2484.135	57.19	74.00	-16.81	45.09	12.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :g_TX_2462MHz
Test By :Brook Cheng

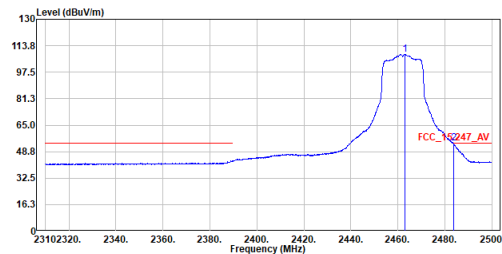


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2463.045	108.43	-----	-----	96.41	12.02	Average
2	2483.600	53.85	54.00	-0.15	41.75	12.10	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :g_TX_2462MHz
Test By :Brook Cheng

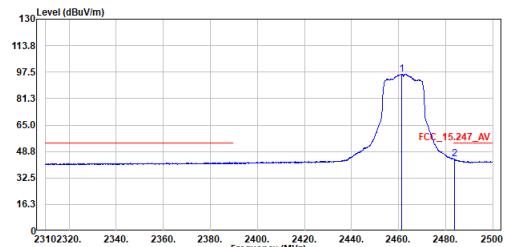


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2461.335	96.27	-----	-----	84.25	12.02	Average
2	2483.755	44.19	54.00	-9.81	32.09	12.10	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
Mode :g_TX_2462MHz
Test By :Brook Cheng

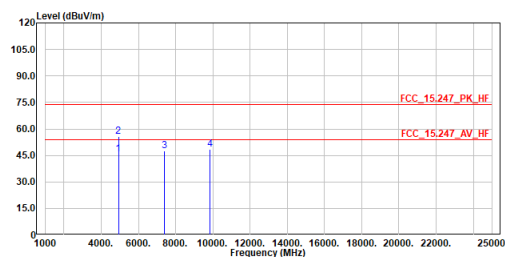


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	45.58	54.00	-8.42	60.10	-14.52	Average
2	4924.000	55.55	74.00	-18.45	70.07	-14.52	Peak
3	7386.000	47.77	74.00	-26.23	55.66	-7.89	Peak
4	9848.000	48.23	74.00	-25.77	52.76	-4.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
Mode :g_TX_2462MHz
Test By :Brook Cheng

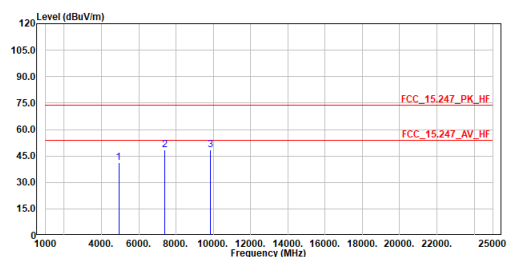


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4924.000	41.42	74.00	-32.58	55.94	-14.52	Peak
2	7386.000	48.51	74.00	-25.49	56.40	-7.89	Peak
3	9848.000	48.48	74.00	-25.52	53.01	-4.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ax20_TX_2412MHz
Test By :Brook Cheng

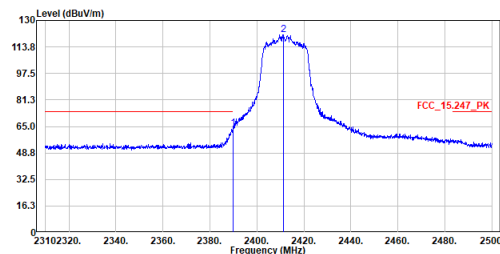


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.800	63.62	74.00	-10.38	51.89	11.73	Peak
2	2411.270	121.41	-----	-----	109.60	11.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ax20_TX_2412MHz
Test By :Brook Cheng

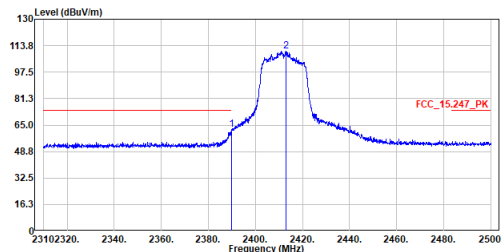


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.990	62.24	74.00	-11.76	50.51	11.73	Peak
2	2412.980	110.60	-----	-----	98.79	11.81	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :ax20_TX_2412MHz
Test By :Brook Cheng

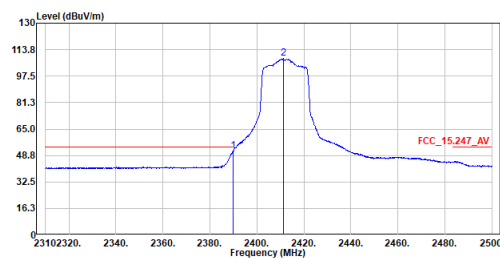


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.895	51.75	54.00	-2.25	40.02	11.73	Average
2	2411.460	108.25	-----	-----	96.44	11.81	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :ax20_TX_2412MHz
Test By :Brook Cheng

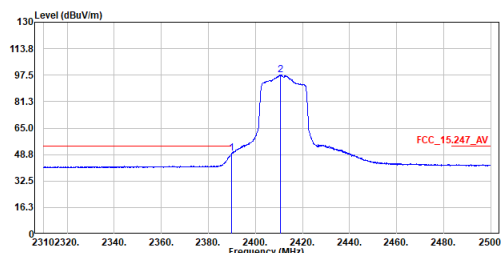


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.990	49.51	54.00	-4.49	37.78	11.73	Average
2	2410.700	97.57	-----	-----	85.76	11.81	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
Mode :ax20_TX_2412MHz
Test By :Brook Cheng

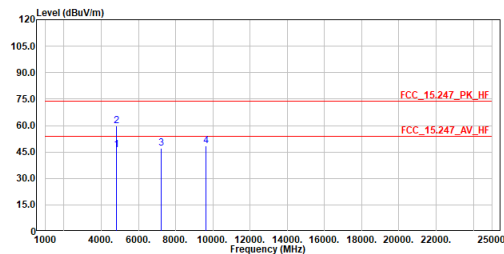


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	46.17	54.00	-7.83	61.08	-14.91	Average
2	4824.000	59.78	74.00	-14.22	74.69	-14.91	Peak
3	7236.000	46.96	74.00	-27.04	55.04	-8.08	Peak
4	9648.000	48.45	74.00	-25.55	53.34	-4.89	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
Mode :ax20_TX_2412MHz
Test By :Brook Cheng

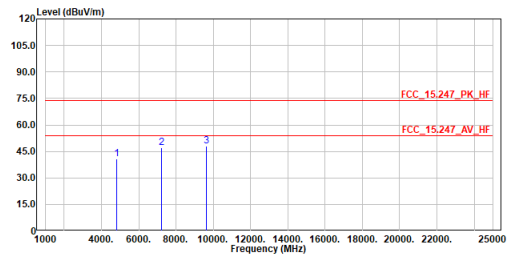


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4824.000	40.54	74.00	-33.46	55.45	-14.91	Peak
2	7236.000	46.95	74.00	-27.05	55.03	-8.08	Peak
3	9648.000	47.97	74.00	-26.03	52.86	-4.89	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ax20_TX_2437MHz
Test By :Brook Cheng

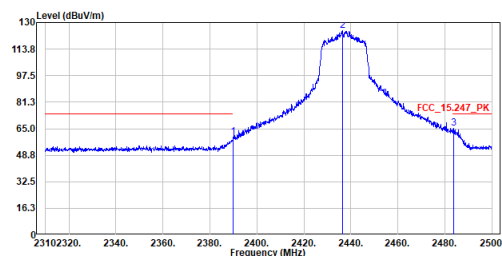


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.990	59.61	74.00	-14.39	47.88	11.73	Peak
2	2436.350	125.17	-----	-----	113.25	11.92	Peak
3	2483.660	65.19	74.00	-8.81	53.09	12.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.


Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ax20_TX_2437MHz
Test By :Brook Cheng

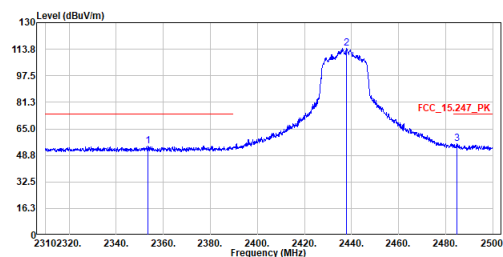


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2353.415	54.66	74.00	-19.34	43.08	11.58	Peak
2	2437.965	114.36	-----	-----	102.44	11.92	Peak
3	2484.610	55.88	74.00	-18.12	43.78	12.10	Peak

Note:


1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

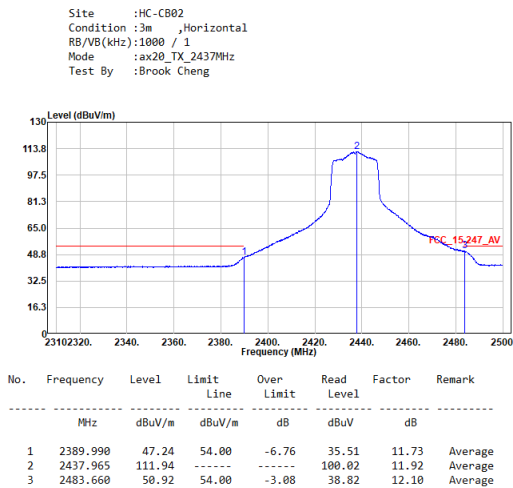


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

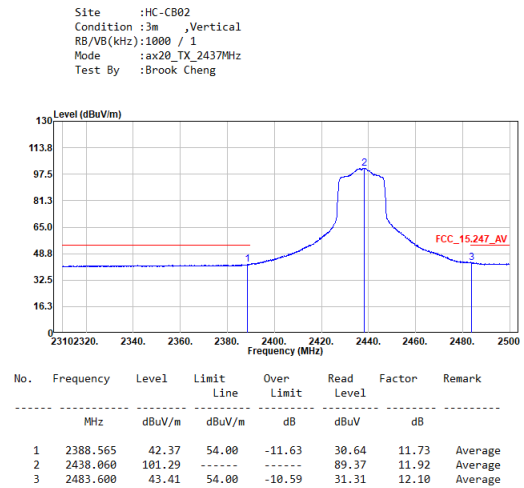

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

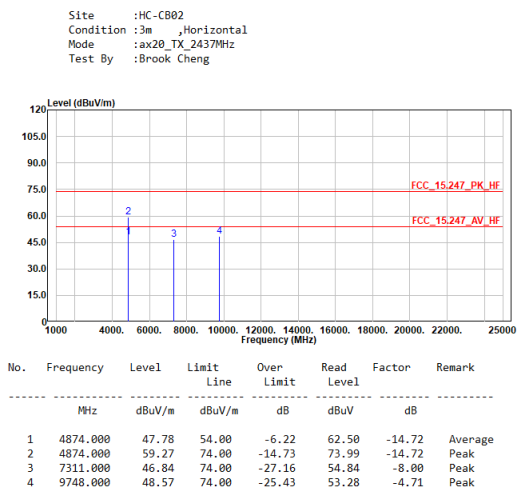


Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

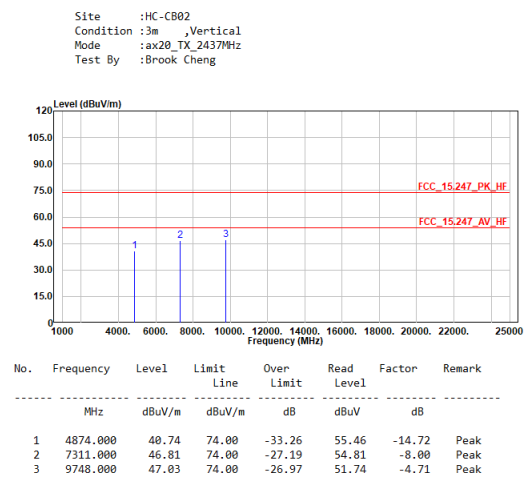

Note:
1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ax20_TX_2462MHz
Test By :Brook Cheng

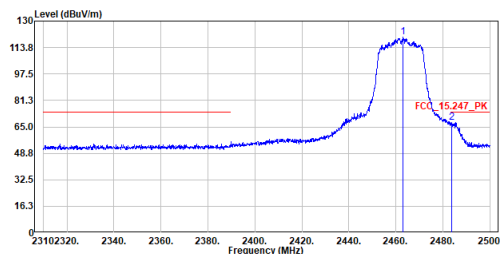


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2462.855	120.13	-----	-----	108.11	12.02	Peak
2	2483.660	67.80	74.00	-6.20	55.70	12.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ax20_TX_2462MHz
Test By :Brook Cheng

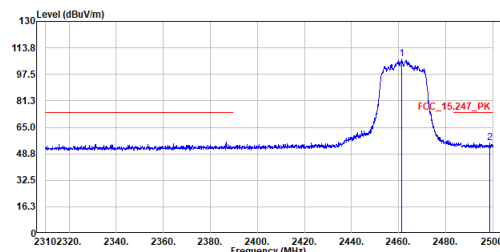


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2461.145	106.76	-----	-----	94.74	12.02	Peak
2	2498.765	55.59	74.00	-18.41	43.42	12.17	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :ax20_TX_2462MHz
Test By :Brook Cheng

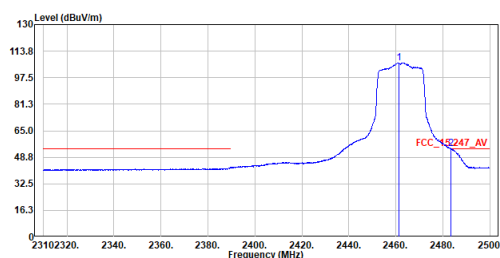


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2461.240	106.64	-----	-----	94.62	12.02	Average
2	2483.500	53.87	54.00	-0.13	41.77	12.10	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :ax20_TX_2462MHz
Test By :Brook Cheng

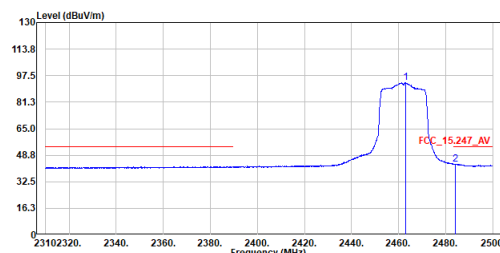


No.	Frequency MHz	Level dBuV/m	Limit dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2463.045	93.27	-----	-----	81.25	12.02	Average
2	2483.945	43.40	54.00	-10.60	31.30	12.10	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
Mode :ax20_TX_2462MHz
Test By :Brook Cheng

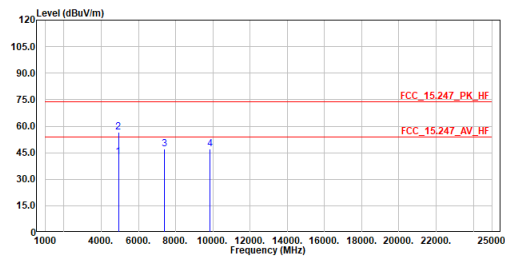


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4924.000	42.77	54.00	-11.23	57.29	-14.52	Average
2	4924.000	56.71	74.00	-17.29	71.23	-14.52	Peak
3	7386.000	47.05	74.00	-26.95	54.94	-7.89	Peak
4	9848.000	47.02	74.00	-26.98	51.55	-4.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
Mode :ax20_TX_2462MHz
Test By :Brook Cheng

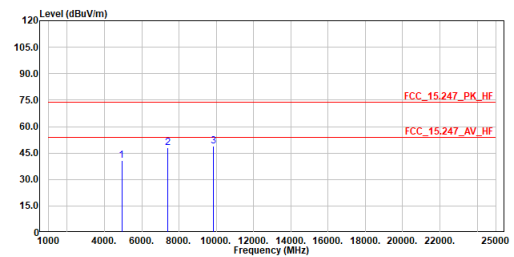


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4924.000	40.78	74.00	-33.22	55.30	-14.52	Peak
2	7386.000	48.14	74.00	-25.86	56.03	-7.89	Peak
3	9848.000	48.77	74.00	-25.23	53.30	-4.53	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ax40_TX_2422MHz
Test By :Brook Cheng

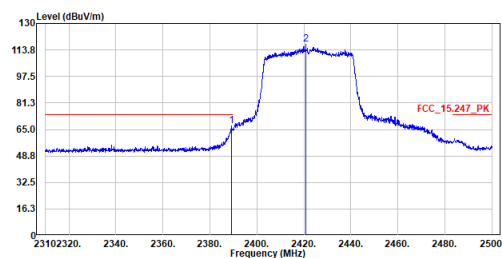


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.040	67.12	74.00	-6.88	55.39	11.73	Peak
2	2420.865	117.07	-----	-----	105.22	11.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ax40_TX_2422MHz
Test By :Brook Cheng

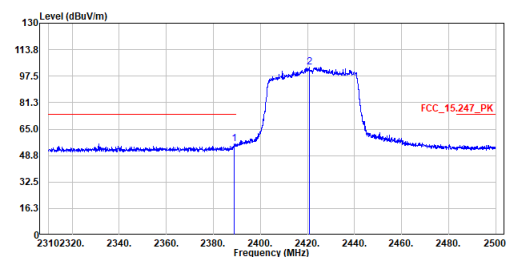


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2388.945	56.07	74.00	-17.93	44.34	11.73	Peak
2	2420.675	103.01	-----	-----	91.16	11.85	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :ax40_TX_2422MHz
Test By :Brook Cheng

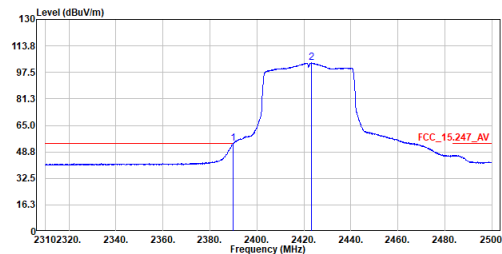


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.990	53.74	54.00	-0.26	42.01	11.73	Average
2	2423.240	103.34	-----	-----	91.49	11.85	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :ax40_TX_2422MHz
Test By :Brook Cheng

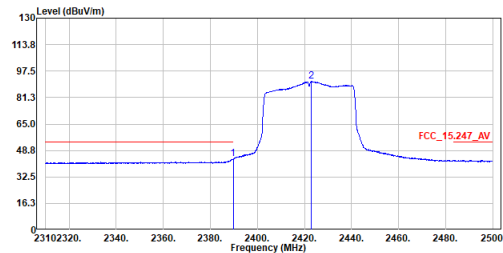


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2389.705	43.49	54.00	-10.51	31.76	11.73	Average
2	2422.955	91.18	-----	-----	79.33	11.85	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
Mode :ax40_TX_2422MHz
Test By :Brook Cheng

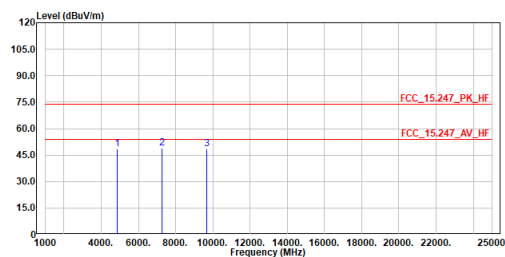


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4844.000	48.35	74.00	-25.65	63.18	-14.83	Peak
2	7266.000	49.05	74.00	-24.95	57.10	-8.05	Peak
3	9688.000	48.60	74.00	-25.40	53.42	-4.82	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
Mode :ax40_TX_2422MHz
Test By :Brook Cheng

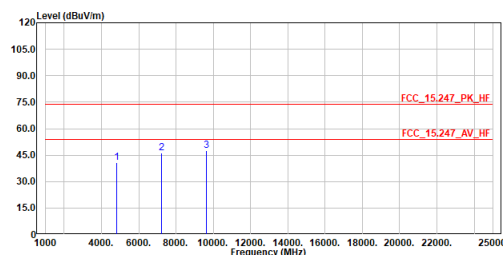


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4824.000	40.54	74.00	-33.46	55.45	-14.91	Peak
2	7236.000	46.21	74.00	-27.79	54.29	-8.08	Peak
3	9648.000	47.39	74.00	-26.61	52.28	-4.89	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ax40_TX_2437MHz
Test By :Brook Cheng

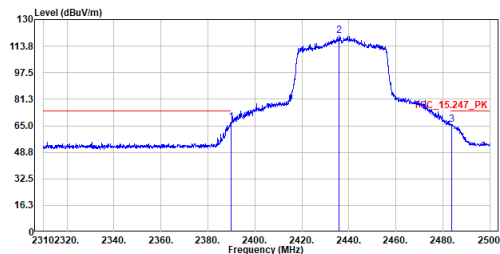


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.800	67.16	74.00	-6.84	55.43	11.73	Peak
2	2435.780	120.25	-----	-----	108.33	11.92	Peak
3	2483.850	65.82	74.00	-8.18	53.72	12.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ax40_TX_2437MHz
Test By :Brook Cheng

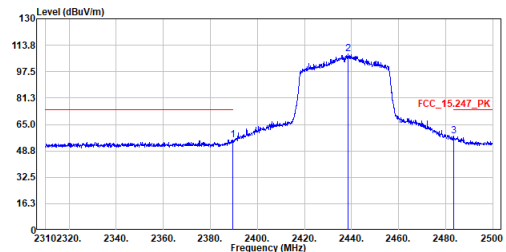


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.420	55.68	74.00	-18.32	43.95	11.73	Peak
2	2438.440	108.21	-----	-----	96.29	11.92	Peak
3	2483.470	57.87	-----	-----	45.77	12.10	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :ax40_TX_2437MHz
Test By :Brook Cheng

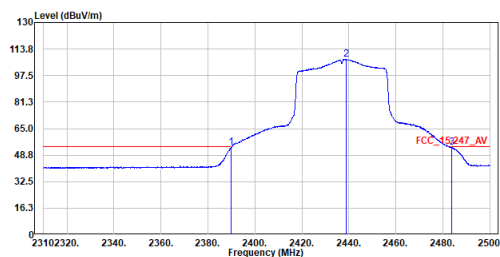


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.800	53.44	54.00	-0.56	41.71	11.73	Average
2	2438.820	107.56	-----	-----	95.64	11.92	Average
3	2483.755	53.57	54.00	-0.43	41.47	12.10	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :ax40_TX_2437MHz
Test By :Brook Cheng

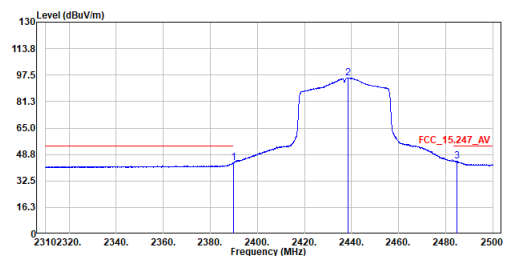


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2389.990	43.82	54.00	-10.18	32.09	11.73	Average
2	2438.630	95.82	-----	-----	83.90	11.92	Average
3	2484.705	44.76	54.00	-9.24	32.66	12.10	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
Mode :ax40_TX_2437MHz
Test By :Brook Cheng

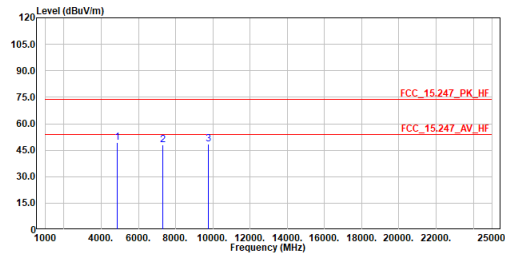


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4874.000	49.50	74.00	-24.50	64.22	-14.72	Peak
2	7311.000	48.20	74.00	-25.80	56.20	-8.00	Peak
3	9748.000	48.64	74.00	-25.36	53.35	-4.71	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
Mode :ax40_TX_2437MHz
Test By :Brook Cheng

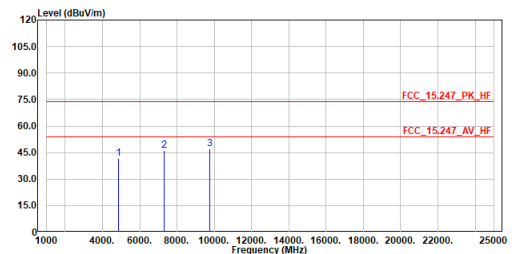


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	4874.000	41.88	74.00	-32.12	56.60	-14.72	Peak
2	7311.000	46.31	74.00	-27.69	54.31	-8.00	Peak
3	9748.000	47.16	74.00	-26.84	51.87	-4.71	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 3000
Mode :ax40_TX_2452MHz
Test By :Brook Cheng

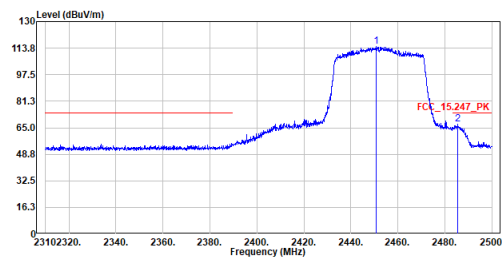


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2450.600	114.83	-----	-----	102.86	11.97	Peak
2	2485.465	67.11	74.00	-6.89	55.00	12.11	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 3000
Mode :ax40_TX_2452MHz
Test By :Brook Cheng

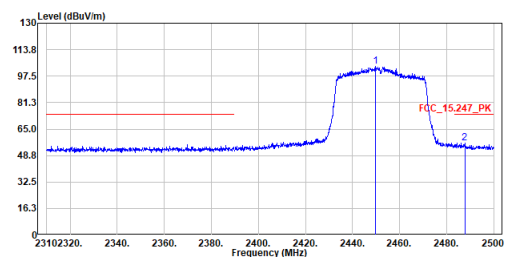


No.	Frequency	Level	Limit	Over	Read	Factor	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	
1	2449.650	103.40	-----	-----	91.44	11.96	Peak
2	2487.650	56.61	74.00	-17.39	44.48	12.13	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
RB/VB(kHz):1000 / 1
Mode :ax40_TX_2452MHz
Test By :Brook Cheng

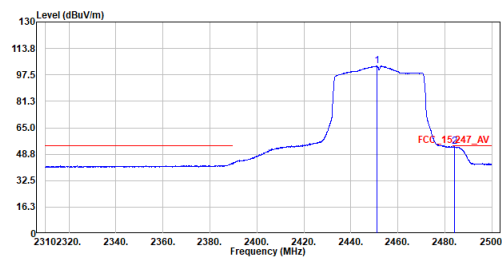


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2451.075	103.07	-----	-----	91.09	11.98	Average
2	2483.945	53.28	54.00	-0.72	41.18	12.10	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
RB/VB(kHz):1000 / 1
Mode :ax40_TX_2452MHz
Test By :Brook Cheng

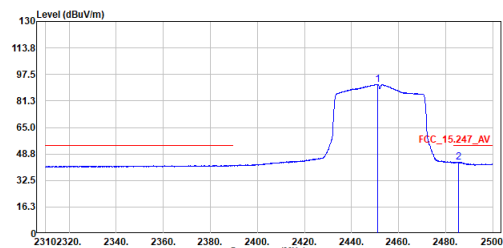


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	2450.980	91.42	-----	-----	79.44	11.98	Average
2	2485.465	43.85	54.00	-10.15	31.74	12.11	Average

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Horizontal
Mode :ax40_TX_2452MHz
Test By :Brook Cheng

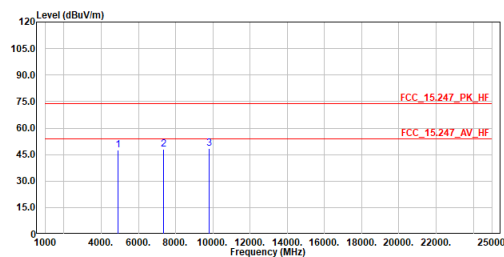


No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4904.000	47.62	74.00	-26.38	62.21	-14.59	Peak
2	7356.000	48.13	74.00	-25.87	56.06	-7.93	Peak
3	9808.000	48.55	74.00	-25.45	53.16	-4.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.

Site :HC-CB02
Condition :3m ,Vertical
Mode :ax40_TX_2452MHz
Test By :Brook Cheng

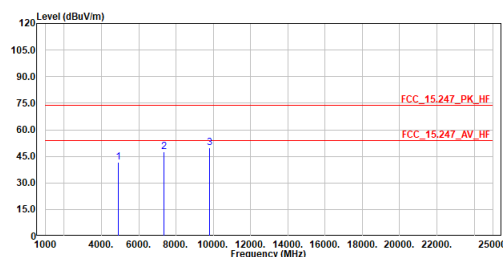

No.	Frequency MHz	Level dBuV/m	Limit Line dBuV/m	Over Limit dB	Read Level dBuV	Factor dB	Remark
1	4904.000	41.76	74.00	-32.24	56.35	-14.59	Peak
2	7356.000	47.48	74.00	-26.52	55.41	-7.93	Peak
3	9808.000	49.60	74.00	-24.40	54.21	-4.61	Peak

Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The peak result complies with AVG limit, AVG result is deemed to comply with AVG limit.
5. The other emission levels were very low against the limit.