FCC RF Test Report

APPLICANT	:	Amazon.com Services LLC
EQUIPMENT	:	Digital Media Receiver
MODEL NAME	:	H97N6S
FCC ID	:	2A4DH-1022
STANDARD	:	FCC Part 15 Subpart C §15.247
CLASSIFICATION	:	(DTS) Digital Transmission System
TEST DATE(S)	:	Nov. 08, 2022 ~ Dec. 03, 2022

We, Sporton International Inc. (ShenZhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (ShenZhen), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia

ACCREDITED
Cert #5145.01

Sporton International Inc. (ShenZhen)
1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China

TABLE OF CONTENTS

REVISION HISTORY **3**
SUMMARY OF TEST RESULT **4**
1 GENERAL DESCRIPTION **5**
1.1 Applicant 5
1.2 Product Feature of Equipment Under Test 5
1.3 Product Specification of Equipment Under Test 5
1.4 Modification of EUT 5
1.5 Testing Location 6
1.6 Test Software 6
1.7 Applicable Standards 6
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST **7**
2.1 Carrier Frequency Channel 7
2.2 Test Mode 8
2.3 Connection Diagram of Test System 9
2.4 Support Unit used in test configuration and system 10
2.5 EUT Operation Test Setup 10
2.6 Measurement Results Explanation Example 10
3 TEST RESULT **11**
3.1 6dB and 99% Bandwidth Measurement 11
3.2 Output Power Measurement 18
3.3 Power Spectral Density Measurement 19
3.4 Conducted Band Edges and Spurious Emission Measurement 26
3.5 Radiated Band Edges and Spurious Emission Measurement 35
3.6 AC Conducted Emission Measurement 39
3.7 Antenna Requirements 41
4 LIST OF MEASURING EQUIPMENT **42**
5 UNCERTAINTY OF EVALUATION **43**
APPENDIX A. CONDUCTED TEST RESULTS
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT
APPENDIX C. RADIATED SPURIOUS EMISSION
APPENDIX D. RADIATED SPURIOUS EMISSION PLOTS
APPENDIX E. DUTY CYCLE PLOTS

REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR1D0301-03B	Rev. 01	Initial issue of report	Dec. 09, 2022
FR1D0301-03B	Rev. 02	Appendix C: Modify "calculation example"	Feb. 02, 2023
FR1D0301-03B	Rev. 03	Update test mode	May 02, 2023

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Peak Output Power	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	≤ 20dBc	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 9.26 dB at 2483.52 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 18.98 dB at 0.1878 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1 General Description

1.1 Applicant

Amazon.com Services LLC
410 Terry Avenue N Seattle, WA 98109-5210 United States

1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	Digital Media Receiver
Model Name	H97N6S
FCC ID	2A4DH-1022
SN Code	Conducted: POB2RQ0121740AE3 Conduction: G092360523870021 Radiation: G092370523860039

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Average Output Power to Antenna	BLE 1 Mbps:7.70 dBm (0.0059 W) BLE 2 Mbps:7.60 dBm (0.0058 W)
99% Occupied Bandwidth	BLE 1 Mbps :1.035MHz BLE 2 Mbps :2.062MHz
Antenna Type / Gain	IFA Antenna type with gain 2.1 dBi
Type of Modulation	Bluetooth LE : GFSK

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	**Sporton Site No.**	**FCC Designation No.**	**FCC Test Firm Registration No.**
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	**Sporton Site No.**	**FCC Designation No.**	**FCC Test Firm Registration No.**
	CO02-SZ ; 03CH02-SZ	CN1256	421272

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH02-SZ	AUDIX	E3	6.2009-8-24a
2.	CO02-SZ	Rohde&Schwarz	EMC32	10.60.0.0

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2013

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

2.2 Test Mode

a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.

Summary table of Test Cases	
Test Item	**Data Rate / Modulation**
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz Mode 2: Bluetooth Tx CH19_2440 MHz Mode 3: Bluetooth Tx CH39_2480 MHz
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz Mode 2: Bluetooth Tx CH19_2440 MHz Mode 3: Bluetooth Tx CH39_2480 MHz
AC Conducted Emission	Mode 1: All Stress + Bluetooth Tx+ WLAN Tx(2.4G)+ Adapter(PA27NA)
Remark: For Radiated Test Cases, The tests were performance with Adapter	

2.3 Connection Diagram of Test System

For AC Conducted Emission:

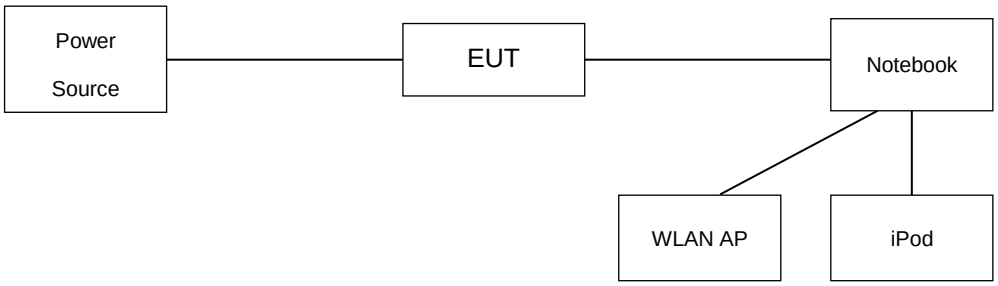

This example is connection diagram of EUT test configurations.

For detail, please refer to test mode configuration and setup photographs for each test item.

For Radiated Emission:



This example is connection diagram of EUT test configurations.

For detail, please refer to test mode configuration and setup photographs for each test item.

2.4 Support Unit used in test configuration and system

Item	Equipment	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	RT-AC66U	Fcc DoC	Shielded, 1.0m	N/A
2.	Notebook	Inspiron 15-7570	FCC DoC	N/A	shielded cable DC O/P 1.8m Unshielded AC I/P cable 1.8m
3.	iPod	MC525 ZP/A	FCC DoC	Shielded, 1.0 m	N/A

2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to Tx mode for continuous transmit.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 1.2 dB and 10dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 1.2 + 10 = 11.2 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup

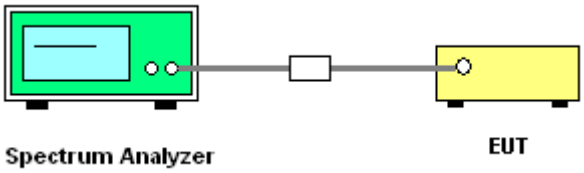

3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

Bluetooth LE 1Mbps

6 dB Bandwidth Plot on Channel 00

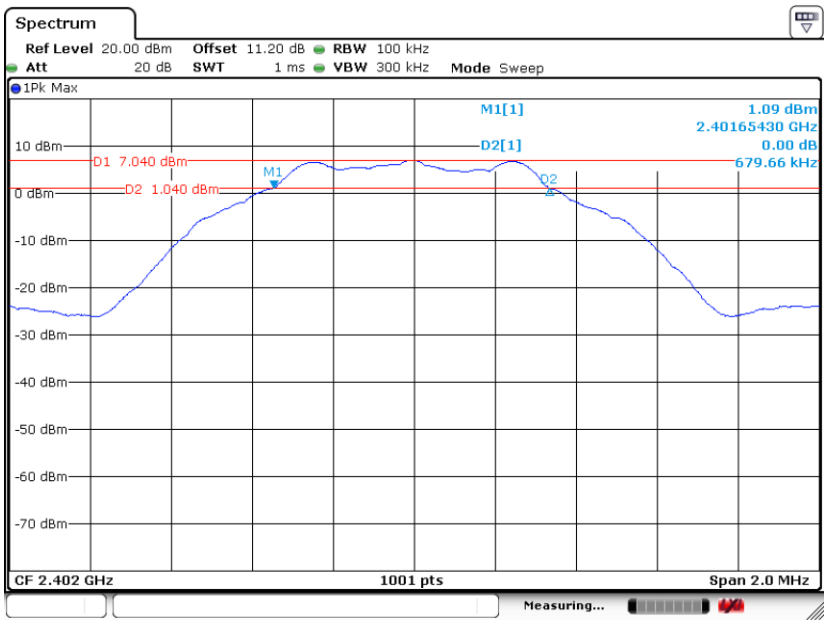

Date: 8.NOV.2022 17:25:34

6 dB Bandwidth Plot on Channel 19

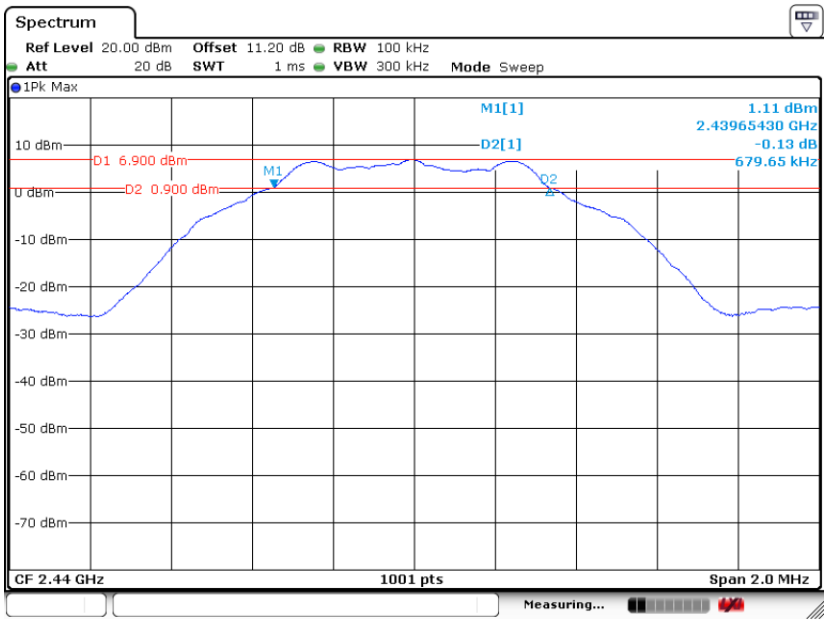

Date: 8.NOV.2022 17:29:16

6 dB Bandwidth Plot on Channel 39

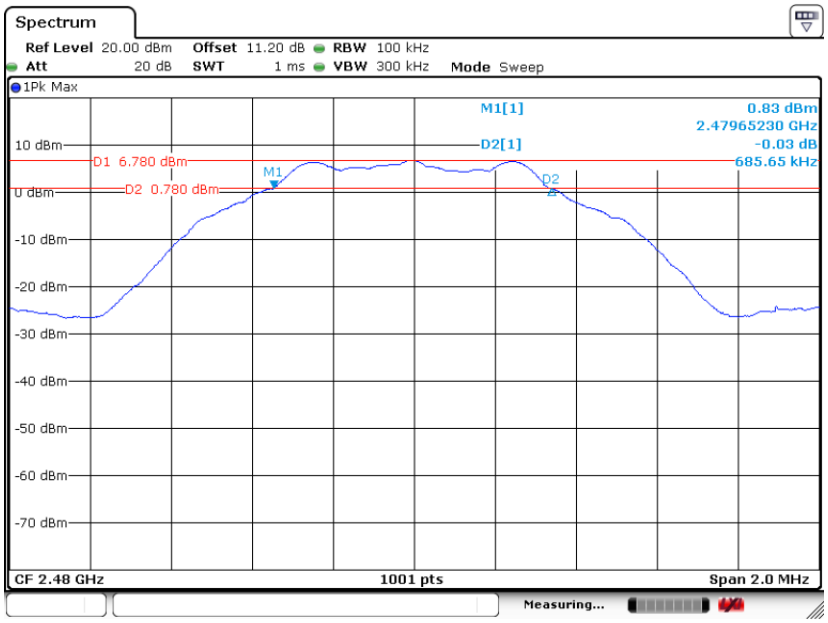

Date: 8.NOV.2022 17:32:08

Bluetooth LE 2Mbps

6 dB Bandwidth Plot on Channel 00

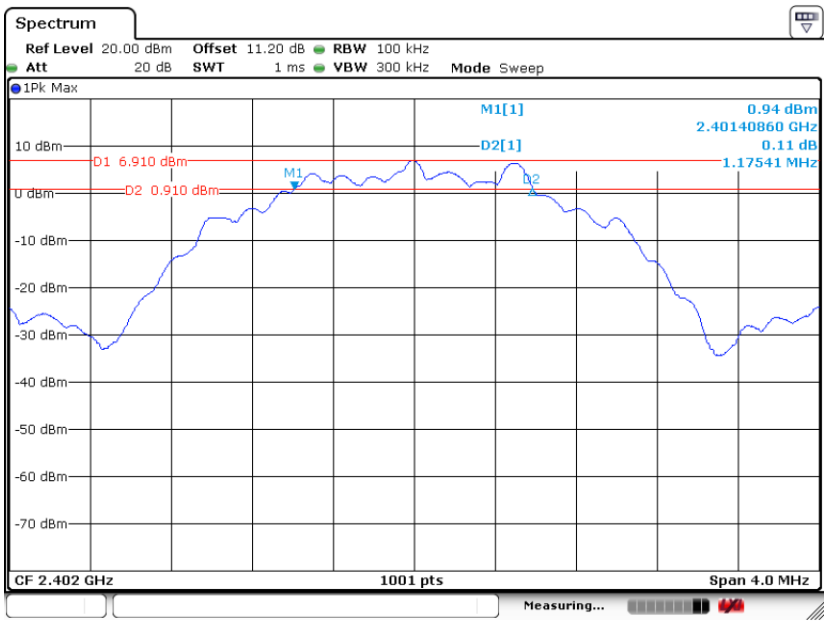

Date: 8.NOV.2022 17:36:54

6 dB Bandwidth Plot on Channel 19

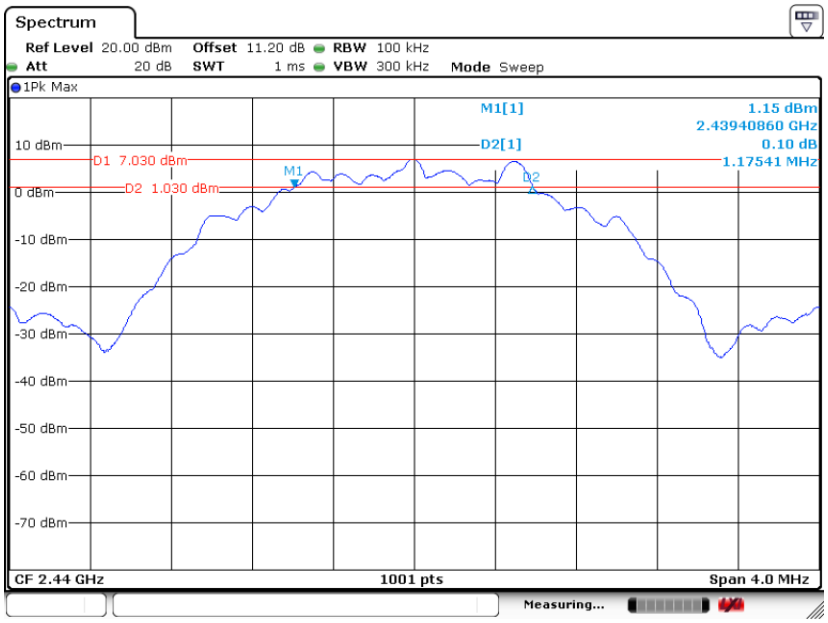

Date: 8.NOV.2022 17:43:16

6 dB Bandwidth Plot on Channel 39

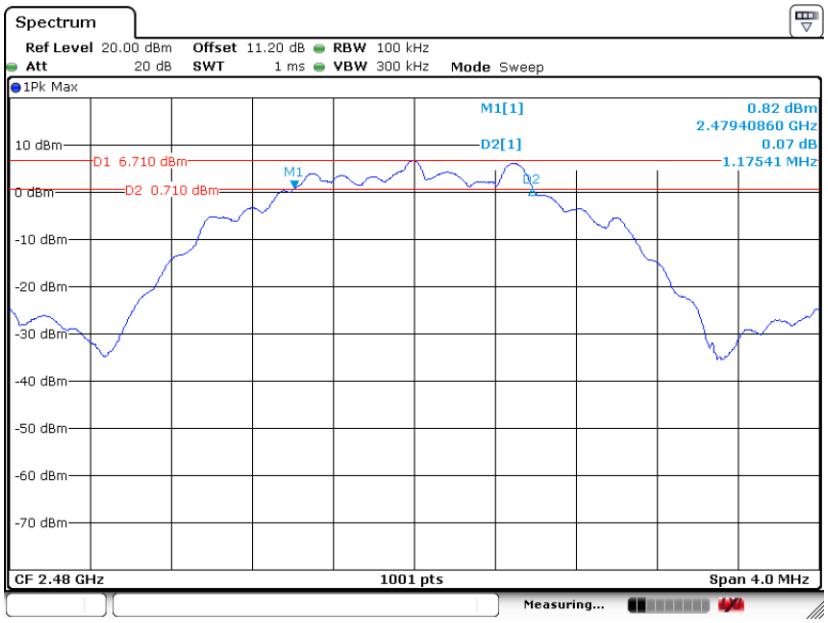

Date: 8.NOV.2022 17:47:32

3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

Bluetooth LE 1Mbps

99% Occupied Bandwidth Plot on Channel 00

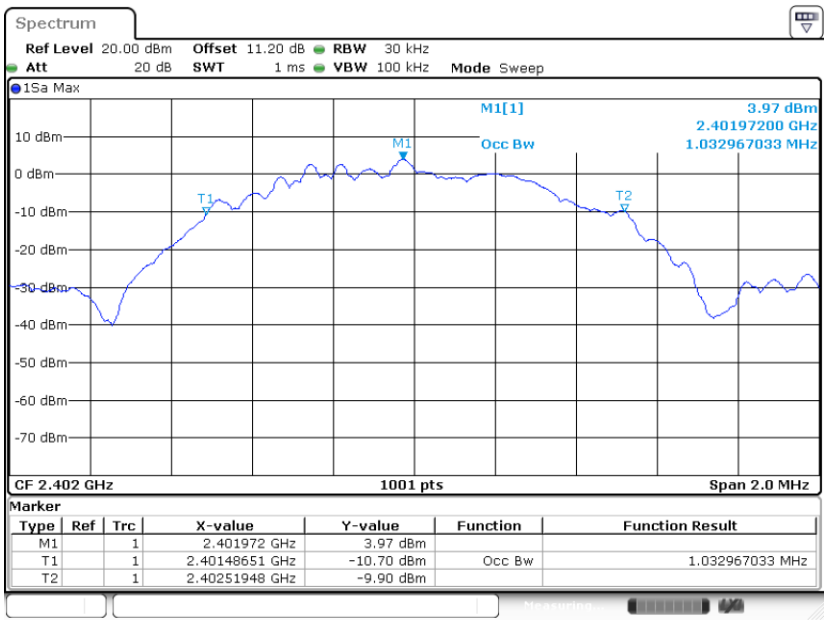

Date: 8.NOV.2022 17:28:13

99% Occupied Bandwidth Plot on Channel 19

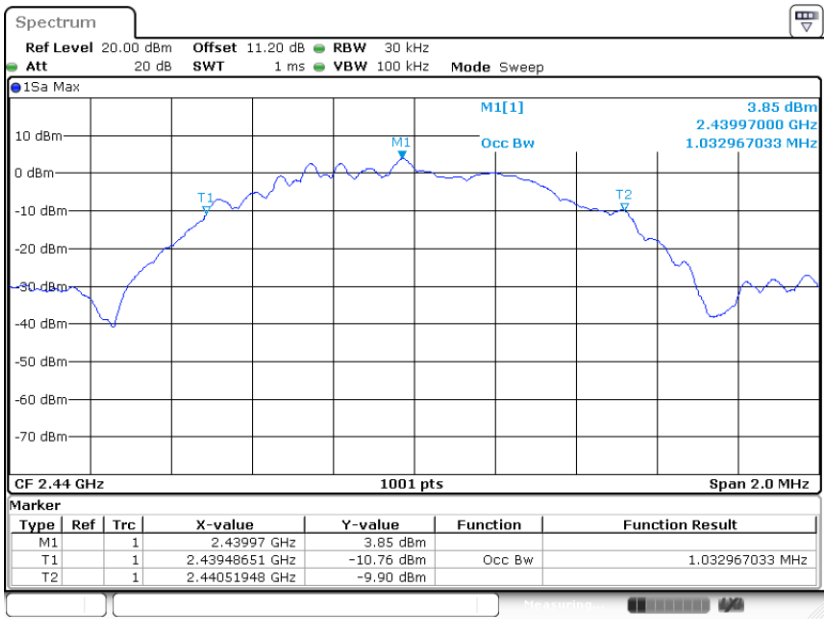

Date: 8.NOV.2022 17:30:23

99% Occupied Bandwidth Plot on Channel 39

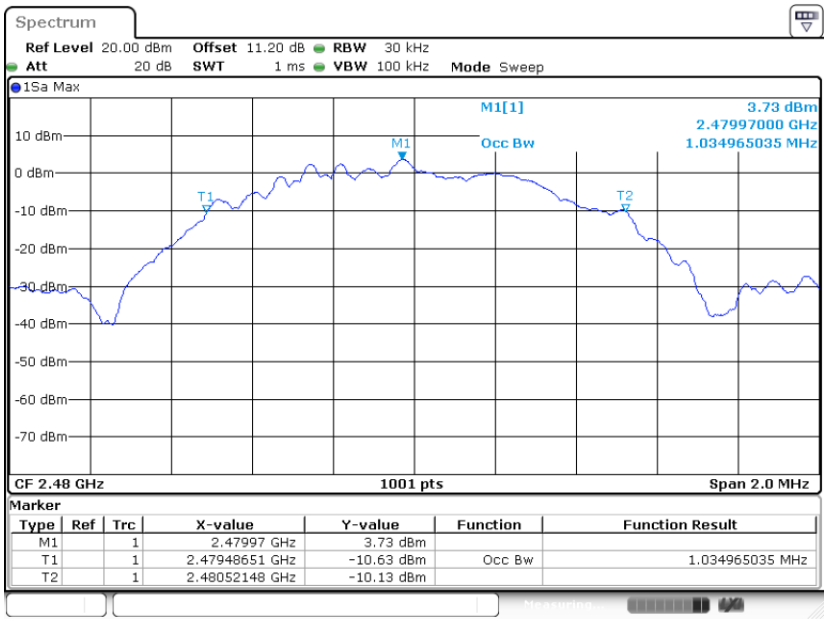

Date: 8.NOV.2022 17:35:35

Bluetooth LE 2Mbps

99% Occupied Bandwidth Plot on Channel 00

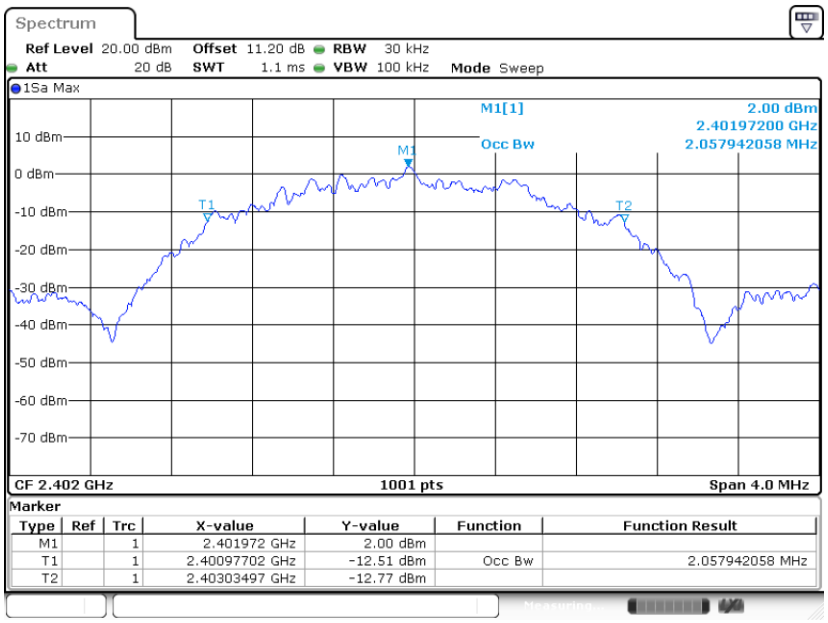

Date: 8.NOV.2022 17:41:57

99% Occupied Bandwidth Plot on Channel 19

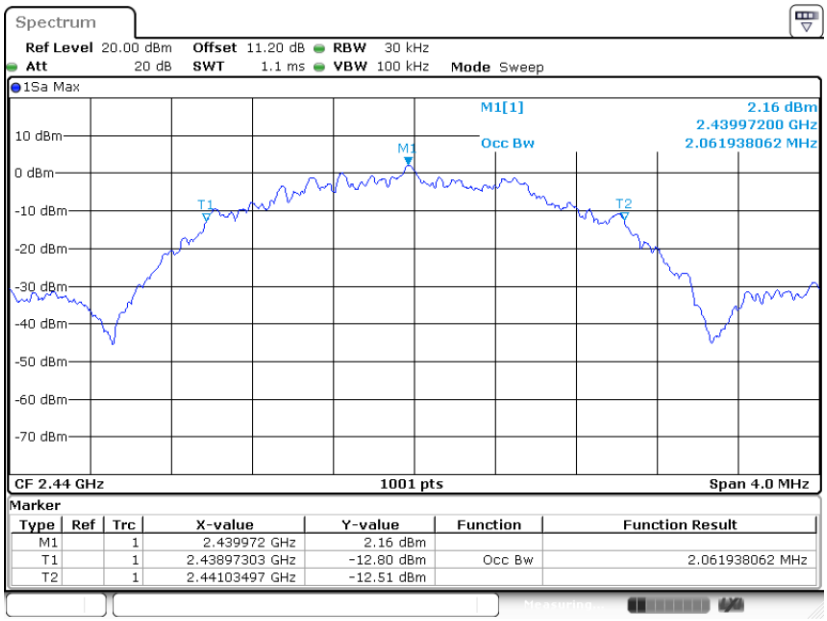

Date: 8.NOV.2022 17:46:34

99% Occupied Bandwidth Plot on Channel 39

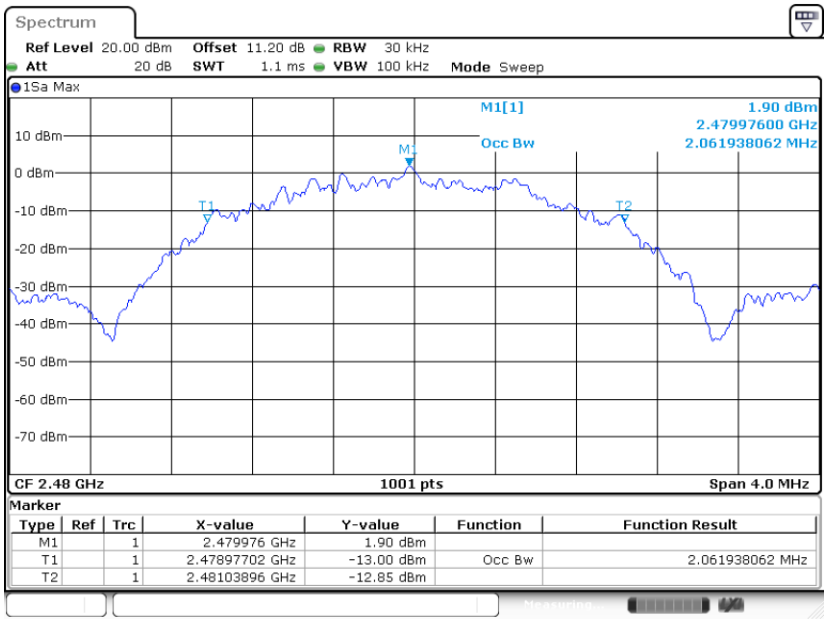

Date: 11.NOV.2022 03:41:30

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.

3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. Duty factor =10 log (1/x), where x is the measured duty cycle

3.2.4 Test Setup

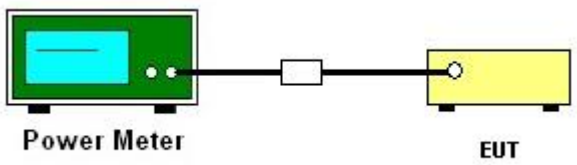

3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

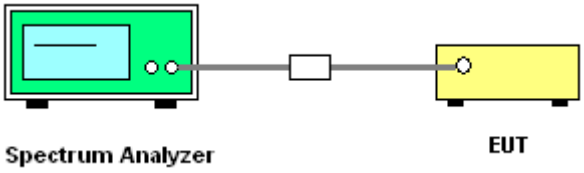

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.3.6 Test Result of Power Spectral Density Plots (100kHz)

Bluetooth LE 1Mbps

PSD 100kHz Plot on Channel 00

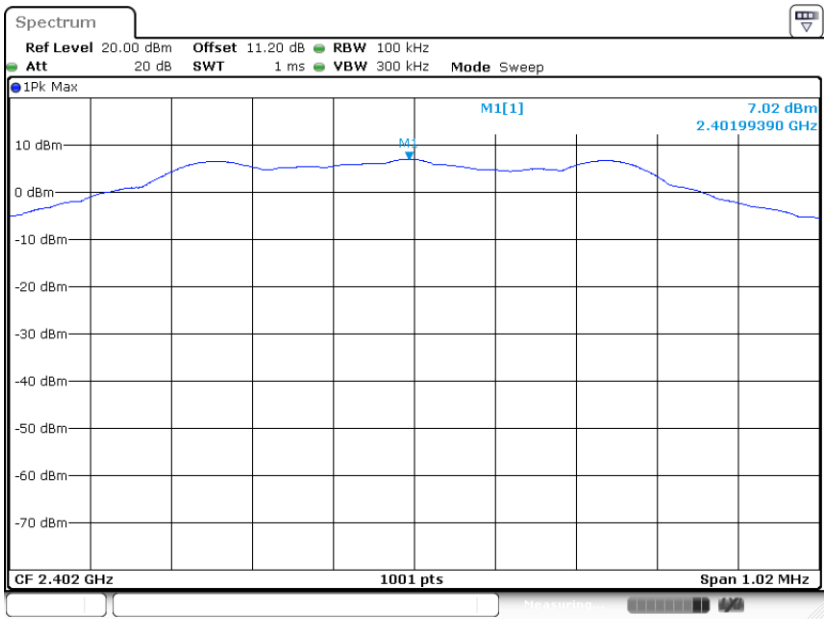

Date: 8.NOV.2022 17:26:16

PSD 100kHz Plot on Channel 19

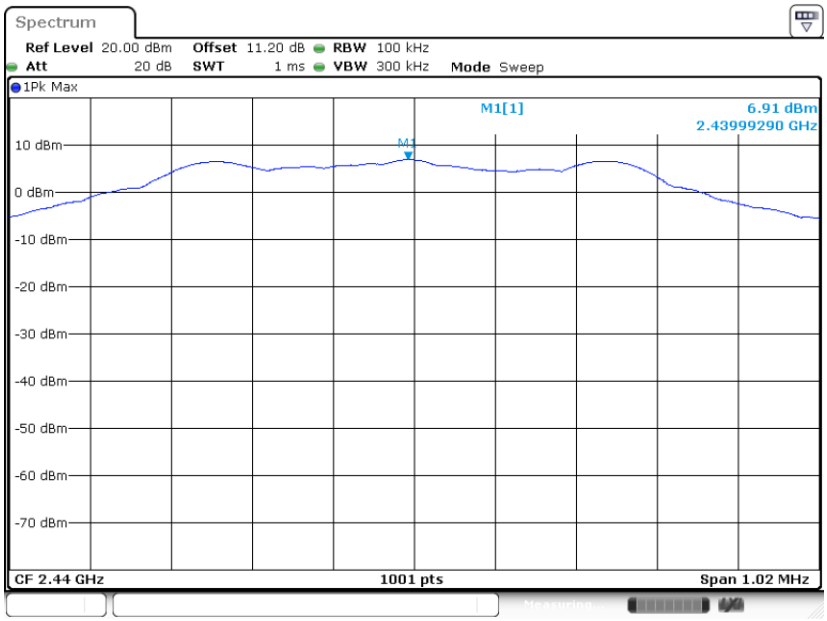

Date: 8.NOV.2022 17:29:45

PSD 100kHz Plot on Channel 39

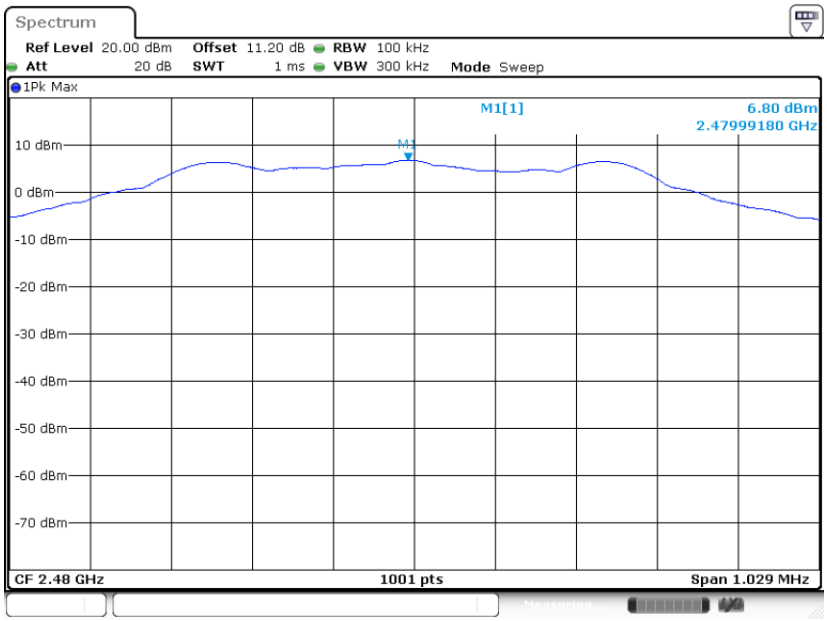

Date: 8.NOV.2022 17:32:49

Bluetooth LE 2Mbps

PSD 100kHz Plot on Channel 00

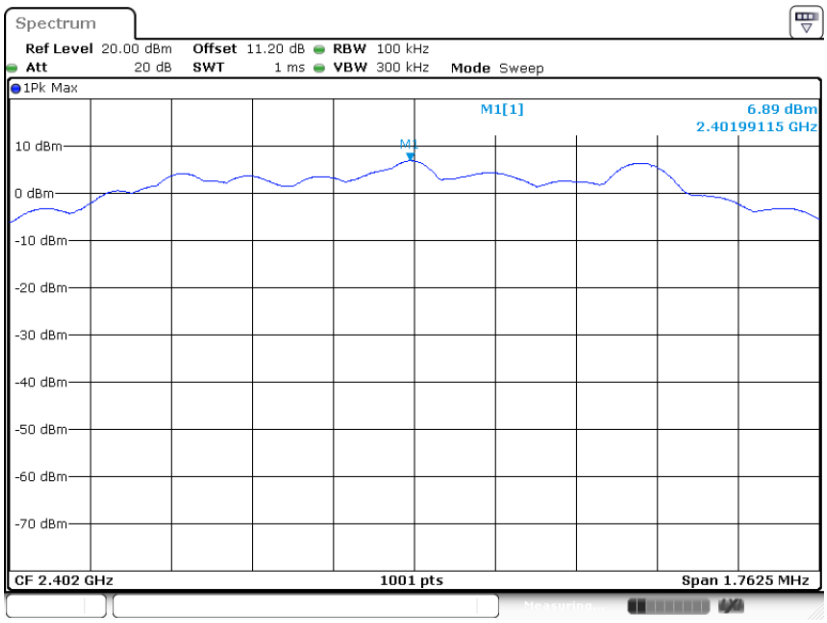

Date: 8.NOV.2022 17:37:27

PSD 100kHz Plot on Channel 19

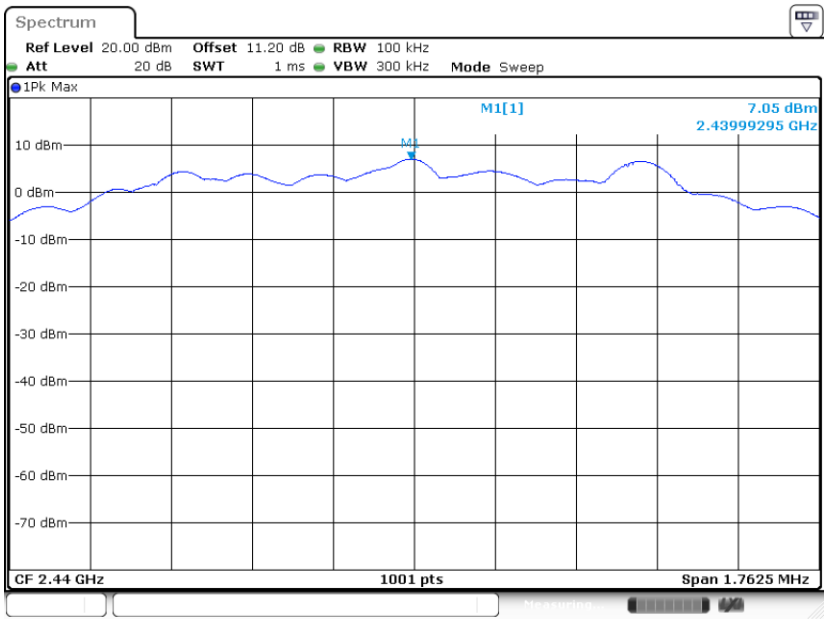

Date: 8.NOV.2022 17:43:45

PSD 100kHz Plot on Channel 39

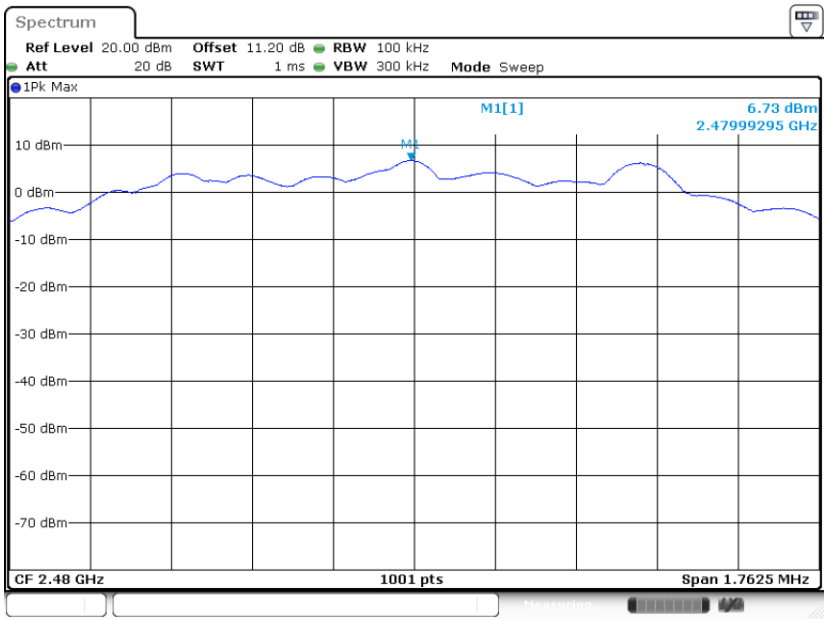

Date: 8.NOV.2022 17:47:57

3.3.7 Test Result of Power Spectral Density Plots (3kHz)

Bluetooth LE 1Mbps

PSD 3kHz Plot on Channel 00

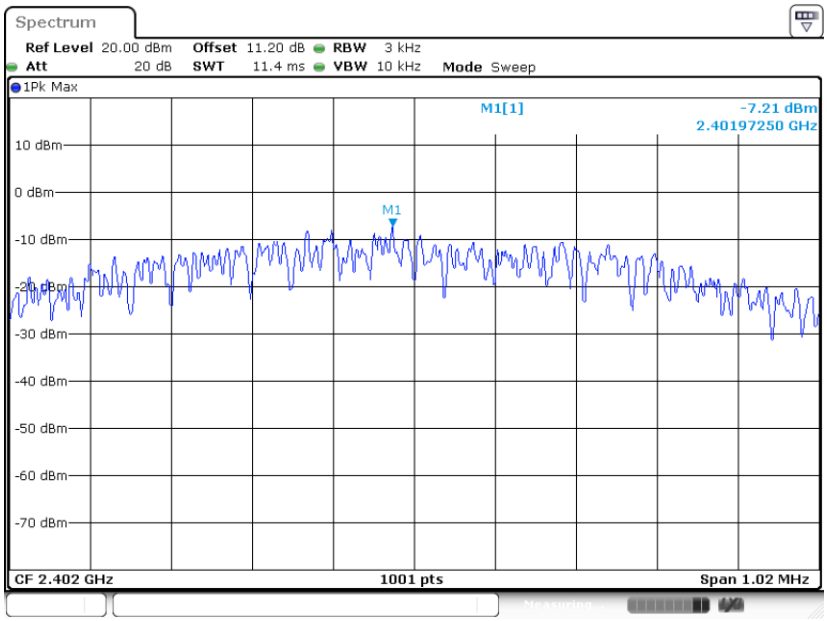

Date: 8.NOV.2022 17:25:49

PSD 3kHz Plot on Channel 19

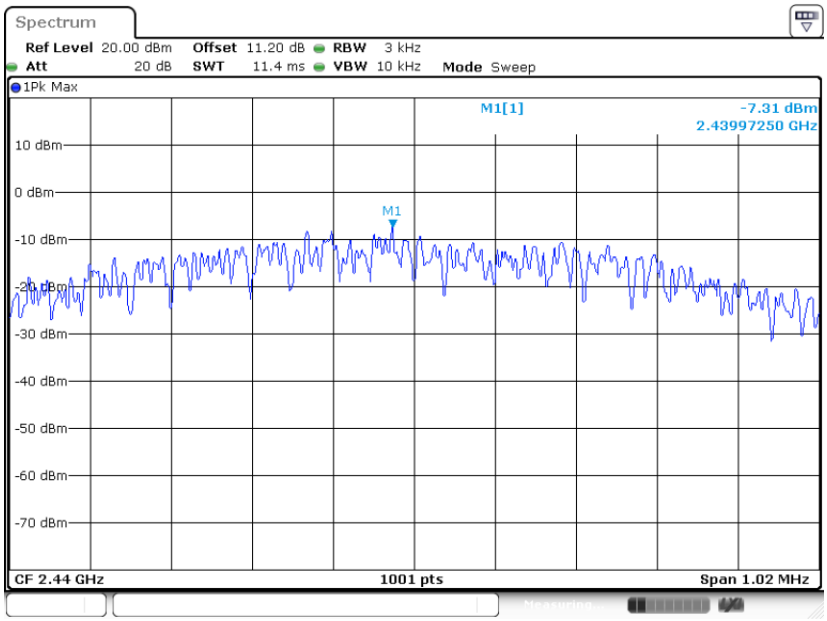

Date: 8.NOV.2022 17:29:33

PSD 3kHz Plot on Channel 39

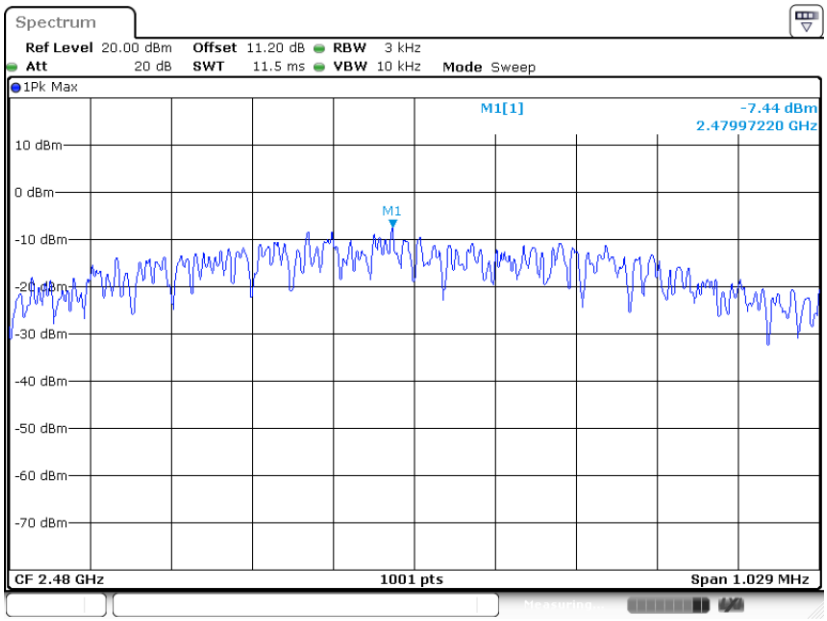

Date: 8.NOV.2022 17:32:34

Bluetooth LE 2Mbps

PSD 3kHz Plot on Channel 00

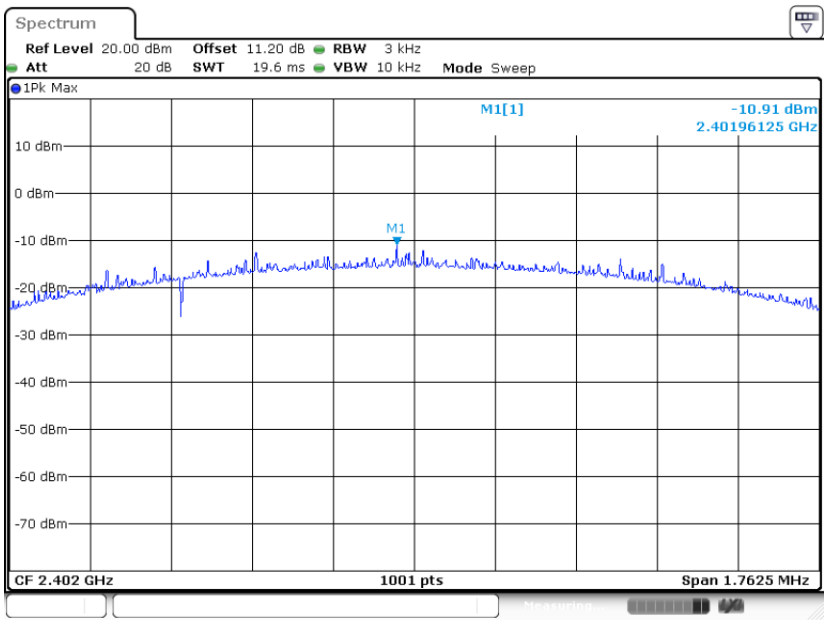

Date: 8.NOV.2022 17:37:11

PSD 3kHz Plot on Channel 19

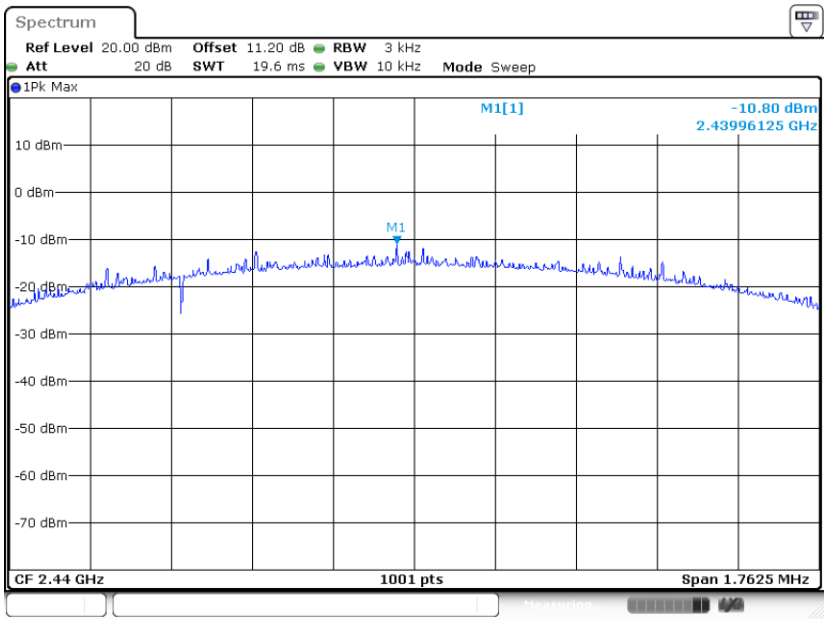

Date: 8.NOV.2022 17:43:32

PSD 3kHz Plot on Channel 39

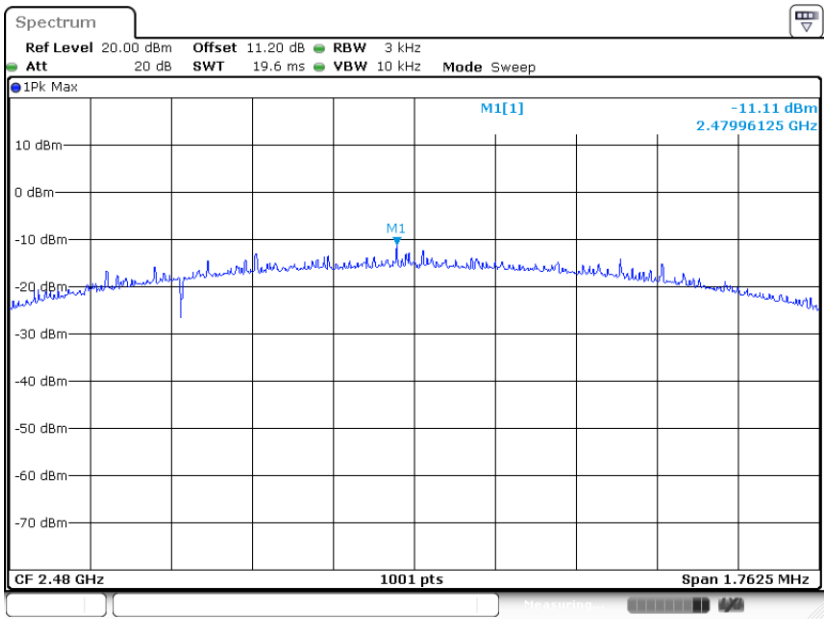

Date: 8.NOV.2022 17:47:44

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.

3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

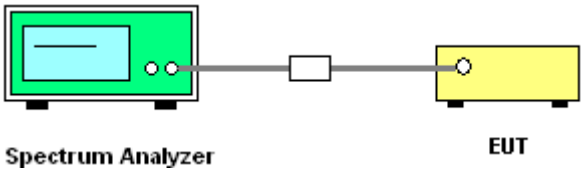

3.4.5 Test Result of Conducted Band Edges Plots

Bluetooth LE 1Mbps

Low Band Edge Plot on Channel 00

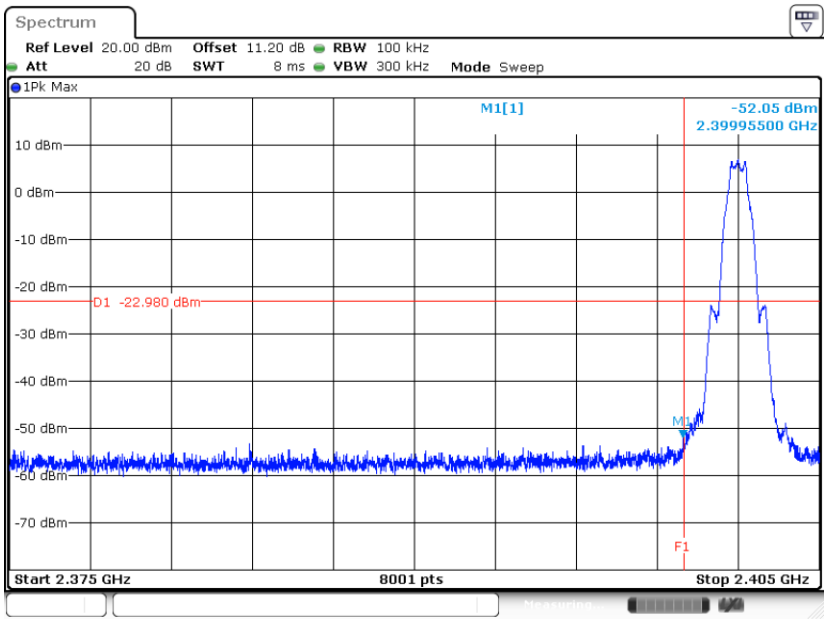

Date: 8.NOV.2022 17:27:26

High Band Edge Plot on Channel 39

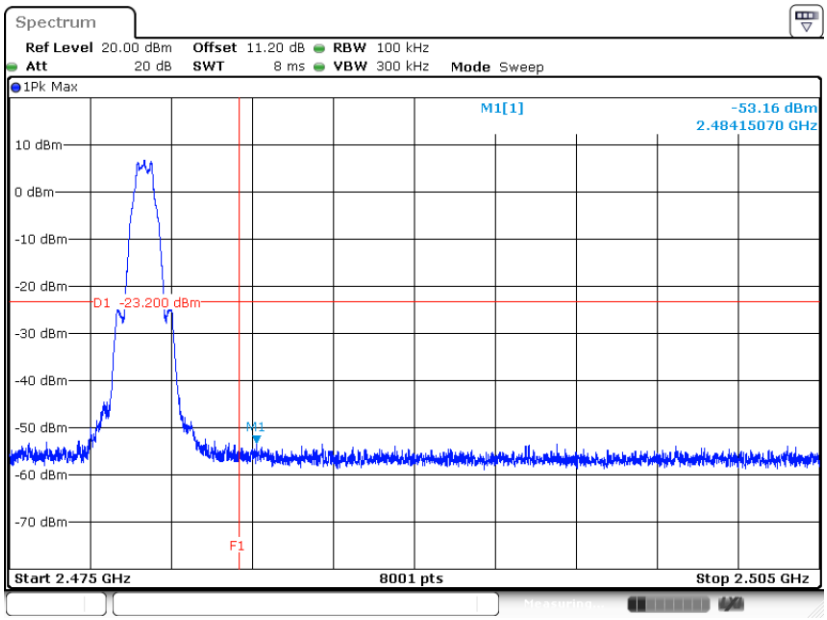

Date: 8.NOV.2022 17:34:02

Bluetooth LE 2Mbps

Low Band Edge Plot on Channel 00

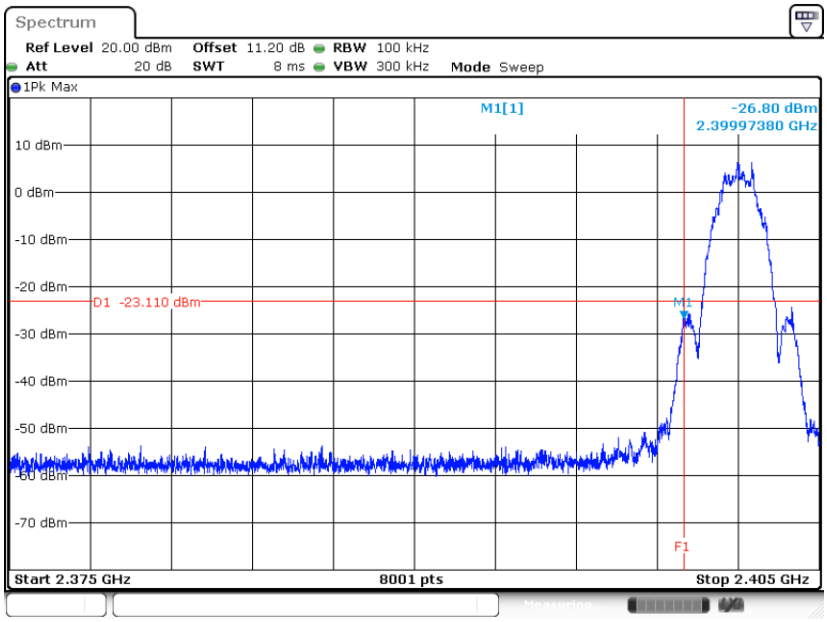

Date: 8.NOV.2022 17:40:13

High Band Edge Plot on Channel 39

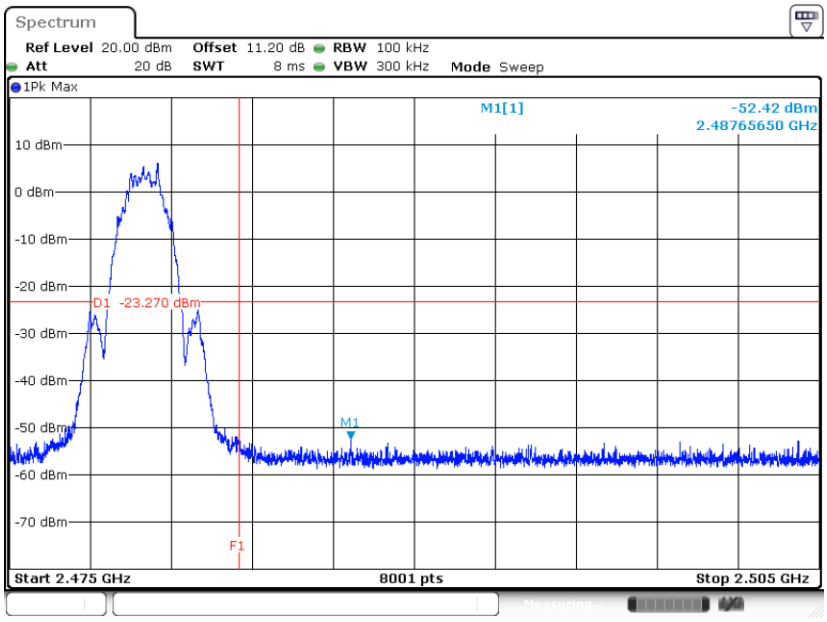

Date: 8.NOV.2022 17:48:13

3.4.6 Test Result of Conducted Spurious Emission Plots

Bluetooth LE 1Mbps

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 00

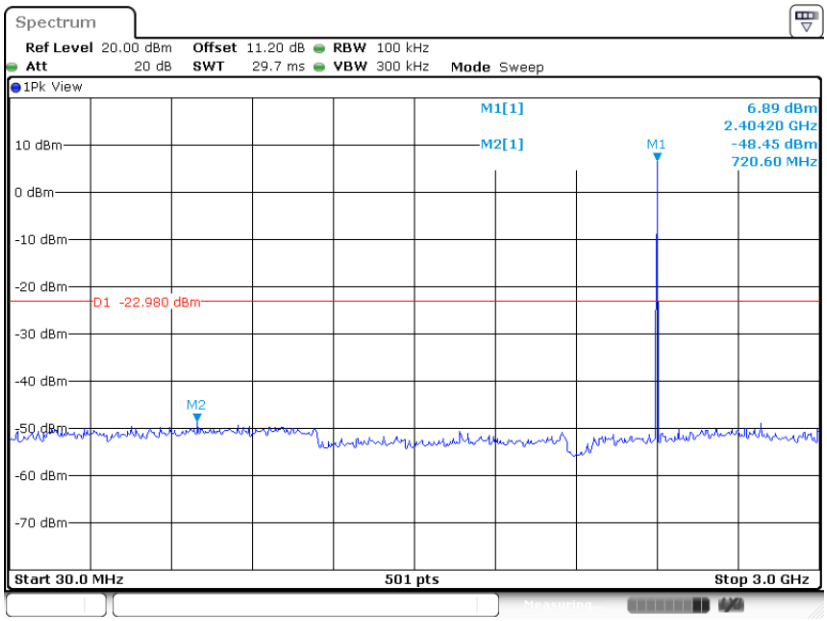

Date: 8.NOV.2022 17:27:49

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 00

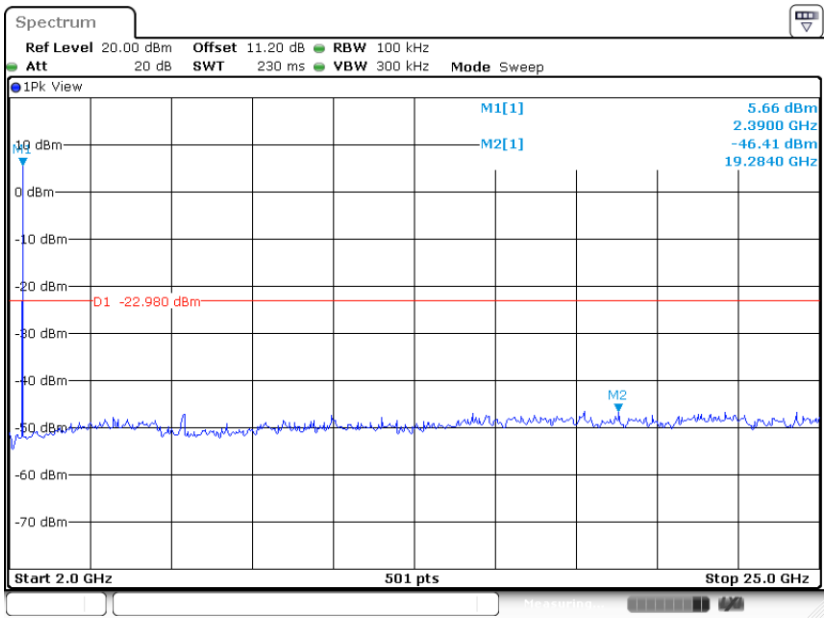

Date: 8.NOV.2022 17:28:00

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 19

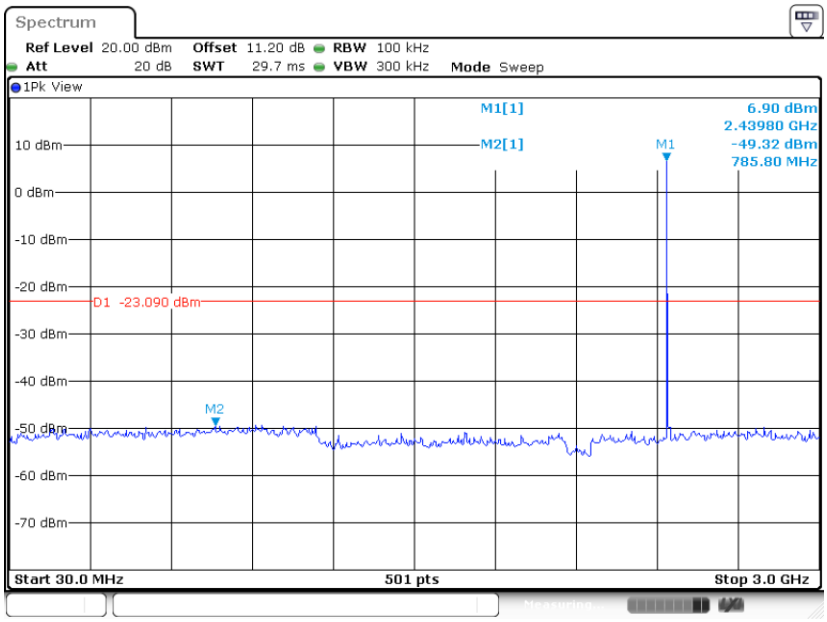

Date: 8.NOV.2022 17:30:00

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 19

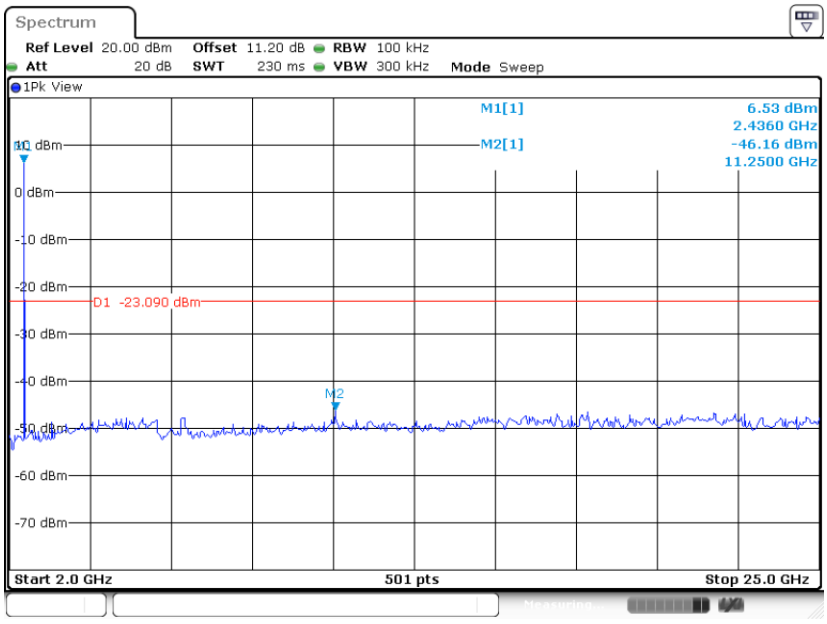

Date: 8.NOV.2022 17:30:11

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 39

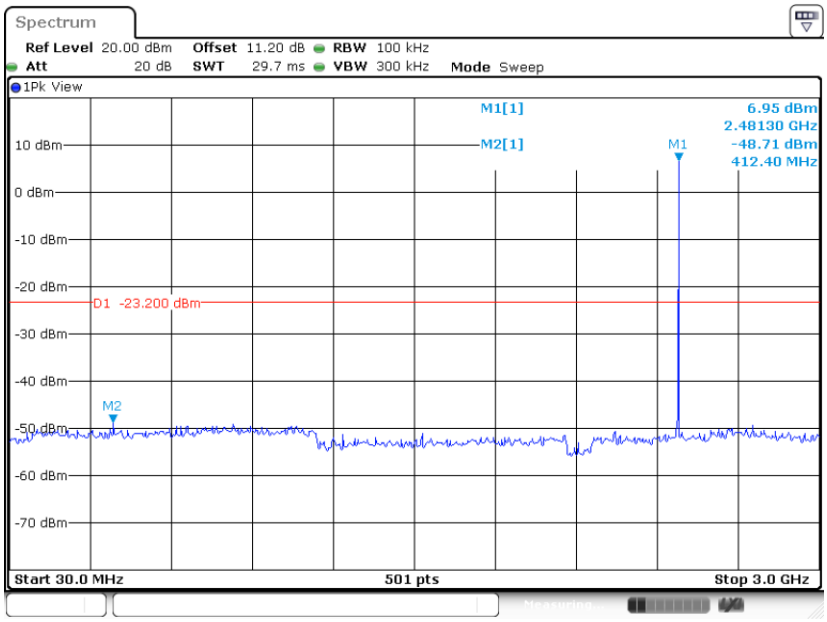

Date: 8.NOV.2022 17:34:45

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 39

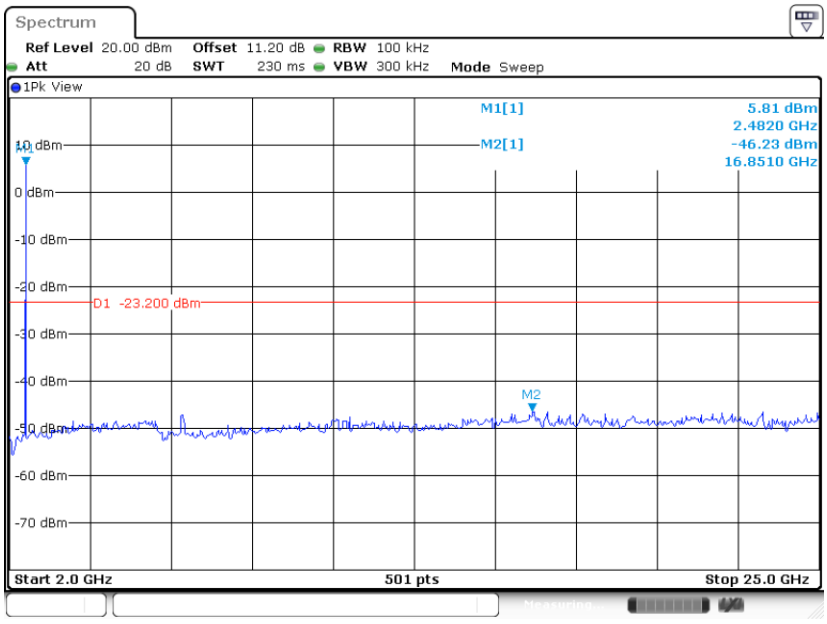

Date: 8.NOV.2022 17:35:13

Bluetooth LE 2Mbps

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 00

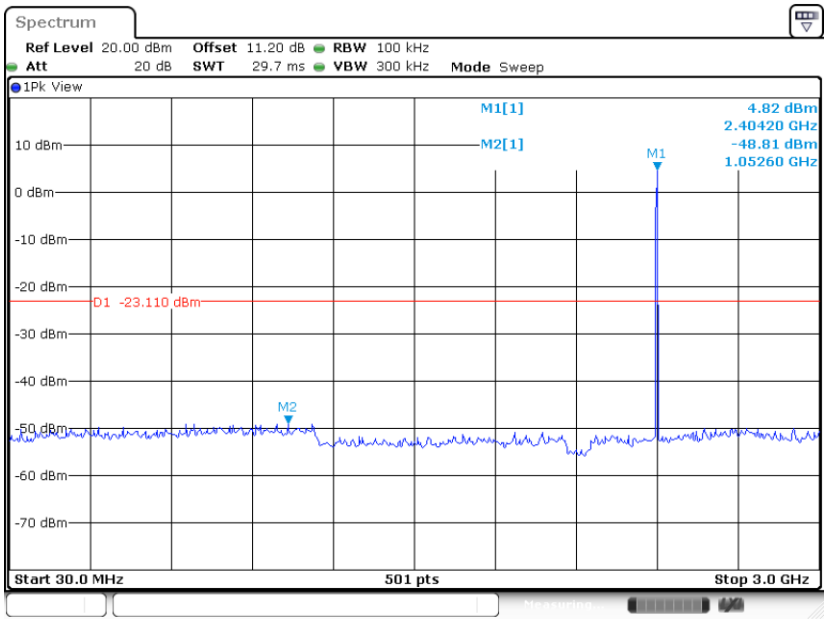

Date: 8.NOV.2022 17:41:27

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 00

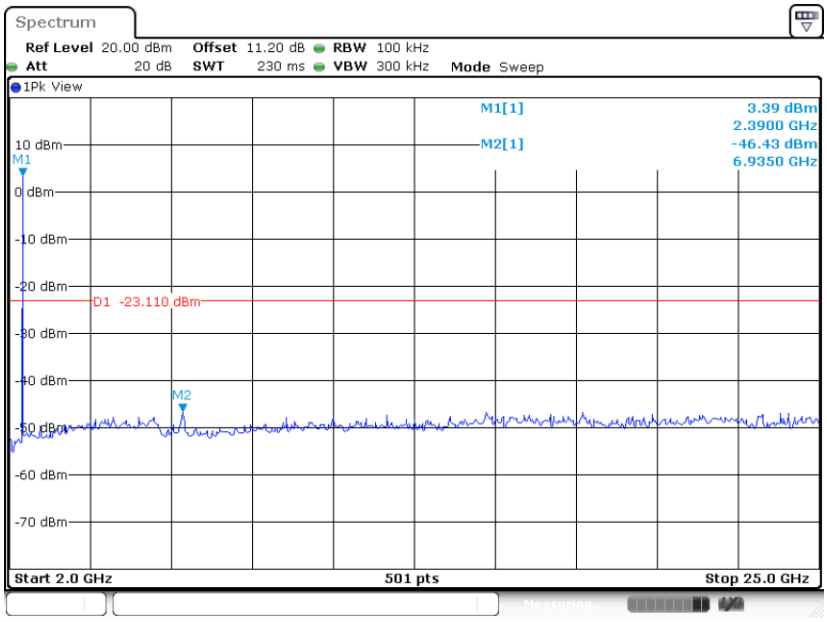

Date: 8.NOV.2022 17:41:39

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 19

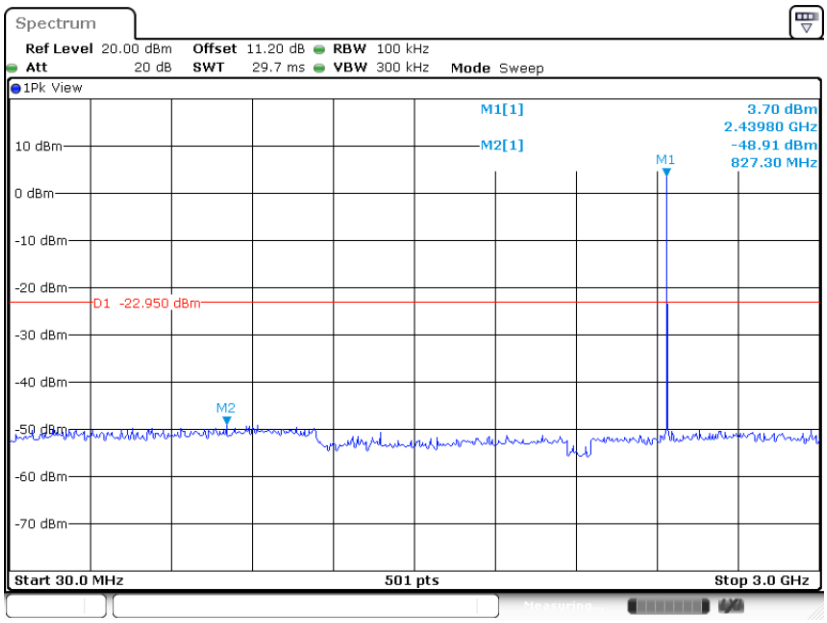

Date: 29.NOV.2022 23:44:57

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 19

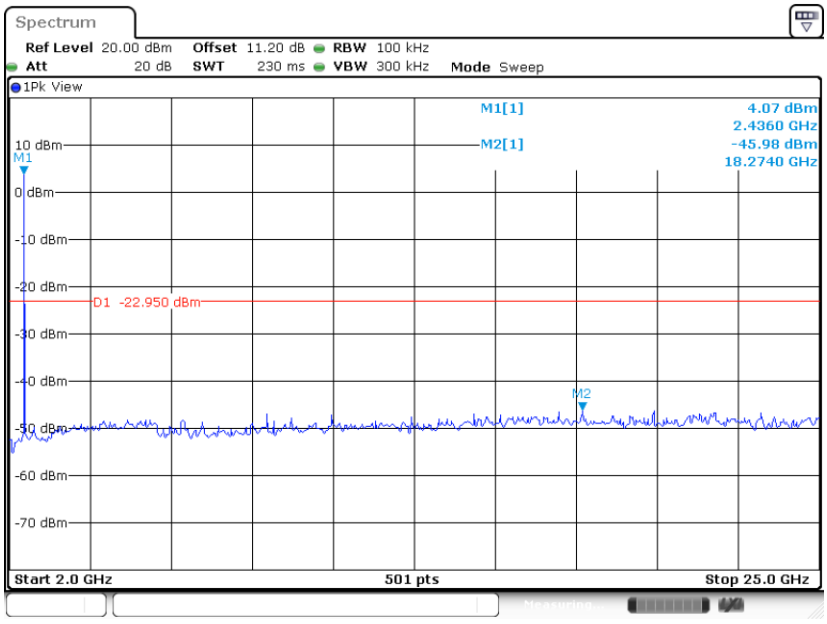

Date: 29.NOV.2022 23:45:11

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 39

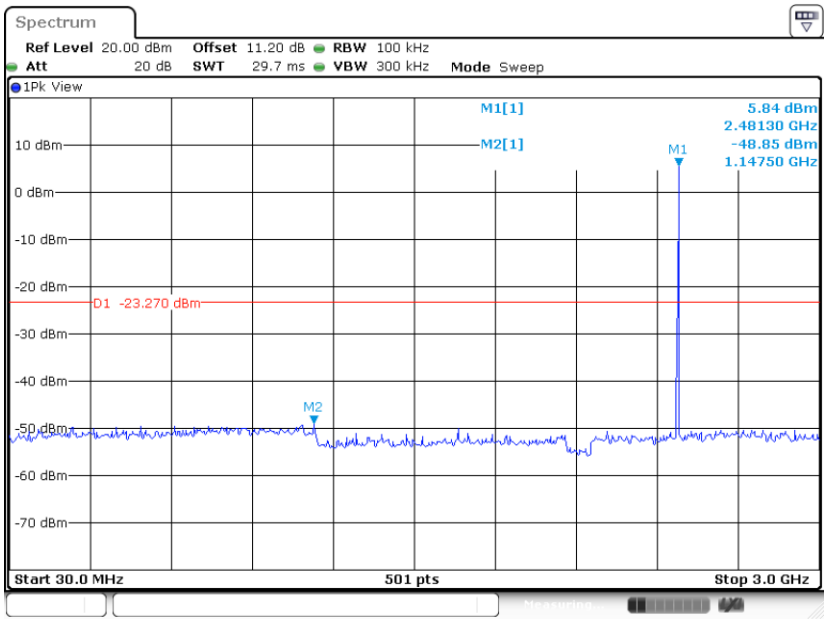

Date: 8.NOV.2022 17:48:34

Conducted Spurious Emission Plot on Bluetooth LE 1Mbps

GFSK Channel 39

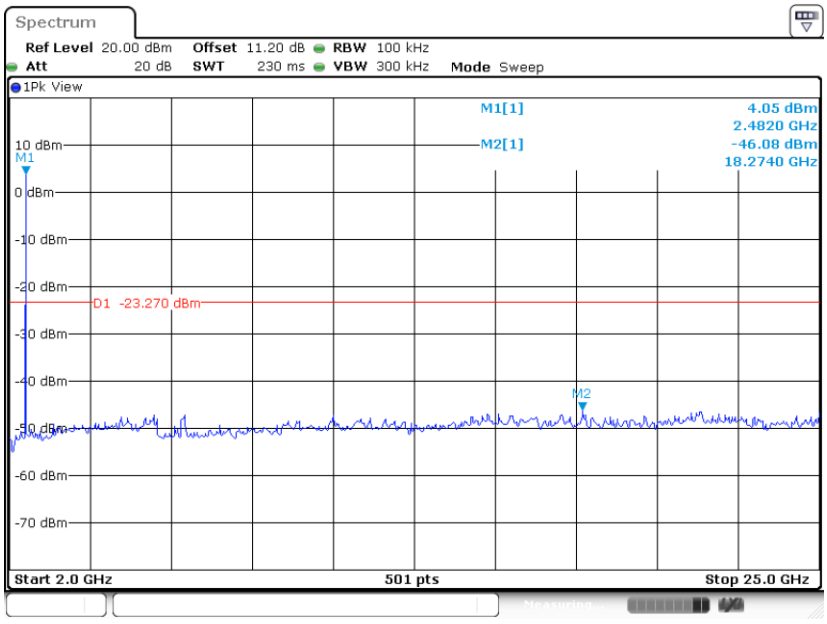

Date: 8.NOV.2022 17:48:52

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
   (1) Span shall wide enough to fully capture the emission being measured;
   (2) Set RBW=100 kHz for f < 1 GHz; VBW ≥ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
   (3) Set RBW = 1 MHz, VBW= 3MHz for f ≥ 1 GHz for peak measurement.
   For average measurement:
   - VBW = 10 Hz, when duty cycle is no less than 98 percent.
   - VBW ≥ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup

For radiated emissions below 30MHz

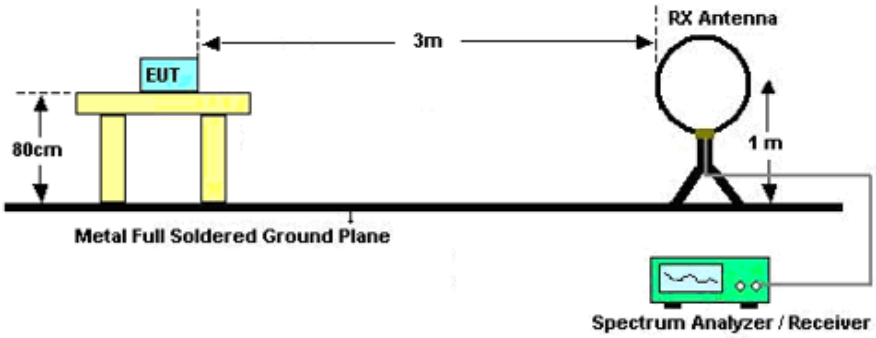

For radiated emissions from 30MHz to 1GHz

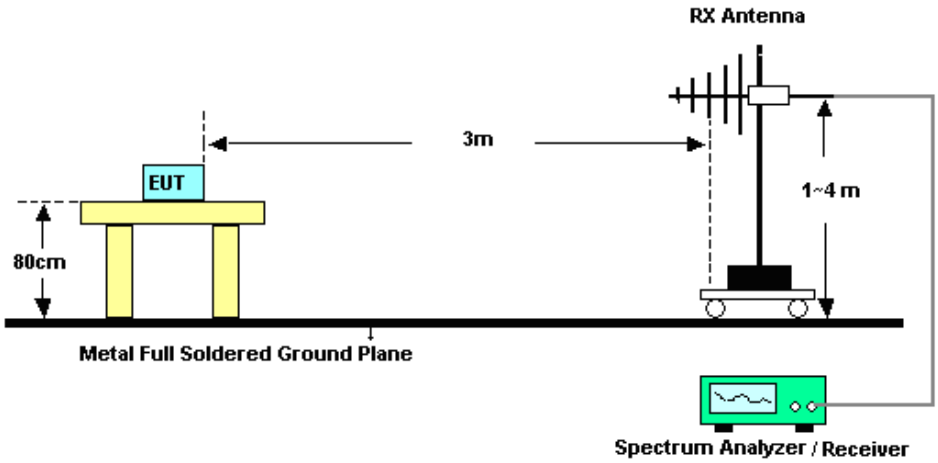

For radiated emissions above 1GHz

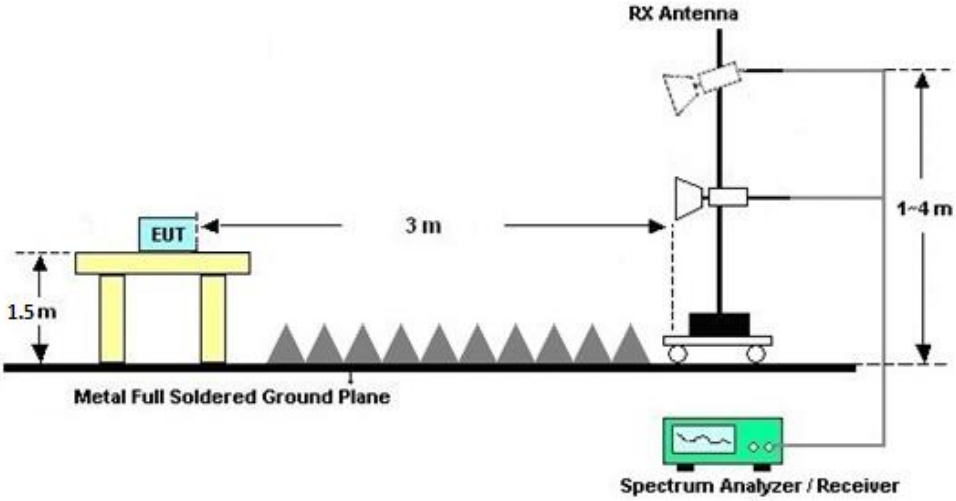

3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C&D.

3.5.7 Duty Cycle

Please refer to Appendix E.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C&D.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

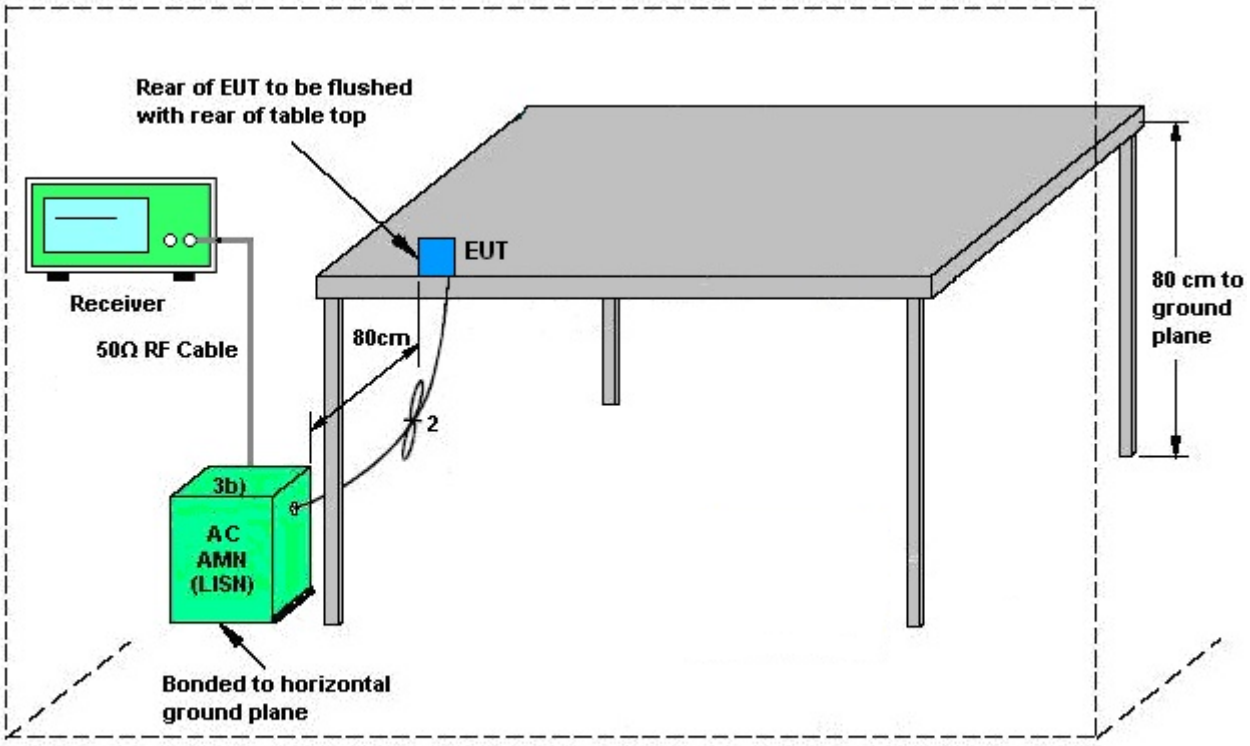

AMN = Artificial mains network (LISN)
AE = Associated equipment
EUT = Equipment under test
ISN = Impedance stabilization network

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.

3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 07, 2022	Nov. 08, 2022~ Nov. 17, 2022	Apr. 06, 2023	Conducted (TH01-SZ)
Pulse Power Senor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 28, 2021	Nov. 08, 2022~ Nov. 17, 2022	Dec. 27, 2022	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1542004	50MHz Bandwidth	Dec. 28, 2021	Nov. 08, 2022~ Nov. 17, 2022	Dec. 27, 2022	Conducted (TH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2022	Nov. 15, 2022	Jul. 06, 2023	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Nov. 15, 2022	Jul. 27, 2024	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Sep. 28, 2022	Nov. 15, 2022	Sep. 27, 2023	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 07, 2022	Nov. 15, 2022	Jul. 06, 2023	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 07, 2022	Nov. 15, 2022	Jul. 06, 2023	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 10, 2022	Nov. 15, 2022	Apr. 10, 2023	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 19, 2022	Nov. 15, 2022	Oct. 18, 2023	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 19, 2022	Nov. 15, 2022	Oct. 18, 2023	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5Ghz	Oct. 19, 2022	Nov. 15, 2022	Oct. 18, 2023	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010003043	N/A	Nov. 10, 2022	Nov. 15, 2022	Nov. 10, 2023	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Nov. 15, 2022	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Nov. 15, 2022	NCR	Radiation (03CH02-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 06, 2022	Dec. 03, 2022	Jul. 05, 2023	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 06, 2022	Dec. 03, 2022	Jul. 05, 2023	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	NCR	Dec. 03, 2022	NCR	Conduction (CO02-SZ)
Thermo meter	Anymetre	JR593	#14	- 10℃ ~ 50℃ 10%RH~99%RH	Jul. 19, 2022	Dec. 03, 2022	Jul. 18, 2023	Conduction (CO02-SZ)

NCR: No Calibration Required

5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB
Conducted Emissions	±1.34 dB
Occupied Channel Bandwidth	±1.2 %
Conducted Power Spectral Density	±1.32 dB

Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.2 dB

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1 dB

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1 dB

---------- THE END ----------

Appendix A. Conducted Test Results

Report Number : FR1D0301-03B

Test Engineer:	Liu Qiu Qiu	Temperature:	21~25	°C
Test Date:	2022/11/08~2022/11/17	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	1.033	0.680	0.50	Pass
BLE	1Mbps	1	19	2440	1.033	0.680	0.50	Pass
BLE	1Mbps	1	39	2480	1.035	0.686	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	2.14	7.60	30.00	2.10	9.70	36.00	Pass
BLE	1Mbps	1	19	2440	2.14	7.70	30.00	2.10	9.80	36.00	Pass
BLE	1Mbps	1	39	2480	2.14	7.60	30.00	2.10	9.70	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	7.02	-7.21	2.10	8.00	Pass
BLE	1Mbps	1	19	2440	6.91	-7.31	2.10	8.00	Pass
BLE	1Mbps	1	39	2480	6.80	-7.44	2.10	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

Report Number : FR1D0301-03B

Test Engineer:	Liu Qiu Qiu	Temperature:	21~25	°C
Test Date:	2022/11/08~2022/11/17	Relative Humidity:	51~54	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	2.058	1.175	0.50	Pass
BLE	2Mbps	1	19	2440	2.062	1.175	0.50	Pass
BLE	2Mbps	1	39	2480	2.062	1.175	0.50	Pass

TEST RESULTS DATA
Average Power Table

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	2.43	7.50	30.00	2.10	9.60	36.00	Pass
BLE	2Mbps	1	19	2440	2.43	7.60	30.00	2.10	9.70	36.00	Pass
BLE	2Mbps	1	39	2480	2.43	7.50	30.00	2.10	9.60	36.00	Pass

TEST RESULTS DATA
Peak Power Density

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	6.89	-10.91	2.10	8.00	Pass
BLE	2Mbps	1	19	2440	7.05	-10.80	2.10	8.00	Pass
BLE	2Mbps	1	39	2480	6.73	-11.11	2.10	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

Appendix B. AC Conducted Emission Test Results

Test Engineer :	ZhangTao	**Temperature :**	22~25℃
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	**Phase :**	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

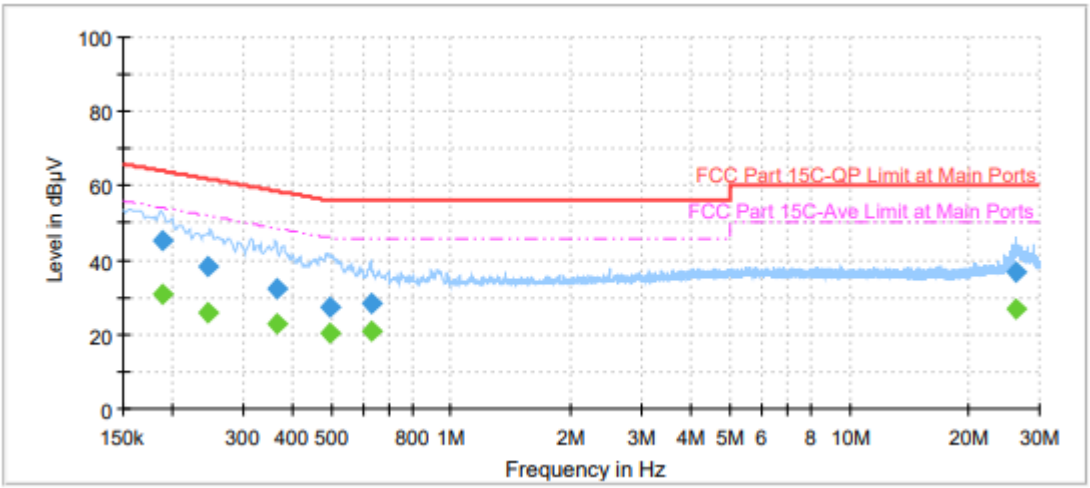

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.187800	45.15	---	64.13	18.98	L1	OFF	19.7
0.187800	---	30.92	54.13	23.21	L1	OFF	19.7
0.245130	38.24	---	61.92	23.68	L1	OFF	19.7
0.245130	---	25.70	51.92	26.22	L1	OFF	19.7
0.365460	32.37	---	58.60	26.23	L1	OFF	19.7
0.365460	---	23.00	48.60	25.60	L1	OFF	19.7
0.494250	27.16	---	56.10	28.94	L1	OFF	19.7
0.494250	---	20.48	46.10	25.62	L1	OFF	19.7
0.629070	28.49	---	56.00	27.51	L1	OFF	19.8
0.629070	---	20.97	46.00	25.03	L1	OFF	19.8
26.232000	36.92	---	60.00	23.08	L1	OFF	20.5
26.232000	---	26.87	50.00	23.13	L1	OFF	20.5

Test Engineer :	ZhangTao	**Temperature :**	22~25℃
		Relative Humidity :	50~55%
Test Voltage :	120Vac / 60Hz	**Phase :**	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

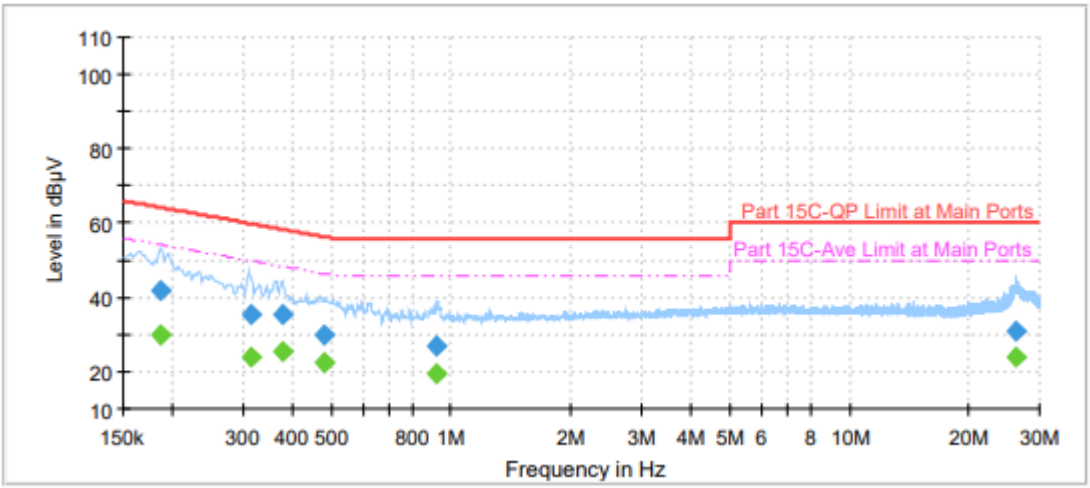

Final Result

Frequency (MHz)	QuasiPeak (dBµV)	CAverage (dBµV)	Limit (dBµV)	Margin (dB)	Line	Filter	Corr. (dB)
0.186990	41.84	---	64.17	22.33	N	OFF	19.7
0.186990	---	29.69	54.17	24.48	N	OFF	19.7
0.314250	35.26	---	59.86	24.60	N	OFF	19.7
0.314250	---	23.70	49.86	26.15	N	OFF	19.7
0.375900	35.18	---	58.37	23.19	N	OFF	19.7
0.375900	---	25.20	48.37	23.17	N	OFF	19.7
0.480390	29.78	---	56.33	26.56	N	OFF	19.7
0.480390	---	22.45	46.33	23.89	N	OFF	19.7
0.919500	26.81	---	56.00	29.19	N	OFF	19.7
0.919500	---	19.41	46.00	26.59	N	OFF	19.7
26.225250	30.84	---	60.00	29.16	N	OFF	20.5
26.225250	---	23.81	50.00	26.19	N	OFF	20.5

Appendix C. Radiated Spurious Emission

BLE 1M:

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2382.24	52.07	-21.93	74	45.14	32.35	6.37	31.79	125	277	P	H
		2389.275	43.38	-10.62	54	36.31	32.36	6.44	31.73	125	277	A	H
	*	2402	102.16	-	-	95.09	32.36	6.44	31.73	125	277	P	H
	*	2402	101.36	-	-	94.29	32.36	6.44	31.73	125	277	A	H
		2353.05	52.99	-21.01	74	46.13	32.34	6.37	31.85	105	232	P	V
		2384.235	43.32	-10.68	54	36.39	32.35	6.37	31.79	105	232	A	V
	*	2402	98.59	-	-	91.52	32.36	6.44	31.73	105	232	P	V
	*	2402	97.34	-	-	90.27	32.36	6.44	31.73	105	232	A	V
BLE CH 19 2440MHz		2353.96	52.39	-21.61	74	45.53	32.34	6.37	31.85	113	273	P	H
		2384.9	43.21	-10.79	54	36.21	32.35	6.44	31.79	113	273	A	H
	*	2440	103	-	-	95.76	32.38	6.48	31.62	113	273	P	H
	*	2440	100.28	-	-	74	32.38	6.48	31.62	113	273	A	H
		2498.88	52.16	-21.84	74	44.73	32.4	6.53	31.5	113	273	P	H
		2496.01	43.44	-10.56	54	36.01	32.4	6.53	31.5	113	273	A	H
		2348.36	52.52	-21.48	74	45.66	32.34	6.37	31.85	100	239	P	V
		2343.18	43.29	-10.71	54	36.5	32.34	6.3	31.85	100	239	A	V
	*	2440	99.06	-	-	91.82	32.38	6.48	31.62	100	239	P	V
	*	2440	97.28	-	-	90.04	32.38	6.48	31.62	100	239	A	V
		2493.28	52.35	-21.65	74	44.92	32.4	6.53	31.5	100	239	P	V
		2498.04	43.55	-10.45	54	36.12	32.4	6.53	31.5	100	239	A	V

BLE CH 39 2480MHz	*	2480	102.34	-	-	94.98	32.39	6.53	31.56	100	275	P	H
	*	2480	101.34	-	-	93.98	32.39	6.53	31.56	100	275	A	H
		2485.8	52.97	-21.03	74	45.61	32.39	6.53	31.56	100	275	P	H
		2484.52	43.53	-10.47	54	36.17	32.39	6.53	31.56	100	275	A	H
	*	2480	102.34	-	-	94.98	32.39	6.53	31.56	100	275	P	V
	*	2480	101.34	-	-	93.98	32.39	6.53	31.56	100	275	A	V
		2485.8	52.97	-21.03	74	45.61	32.39	6.53	31.56	100	275	P	V
		2484.52	43.53	-10.47	54	36.17	32.39	6.53	31.56	100	275	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	43.1	-30.9	74	57.12	34.41	9.47	57.9	-	-	P	H
		4804	42.68	-31.32	74	56.7	34.41	9.47	57.9	-	-	P	V
BLE CH 19 2440MHz		4880	43.79	-30.21	74	57.82	34.37	9.5	57.9	-	-	P	H
		7320	45.59	-28.41	74	57.83	36.04	11.24	59.52	-	-	P	H
		4880	43.58	-30.42	74	57.61	34.37	9.5	57.9	-	-	P	V
		7320	45.8	-28.2	74	58.04	36.04	11.24	59.52	-	-	P	V
BLE CH 39 2480MHz		4960	44.07	-29.93	74	58.06	34.32	9.59	57.9	-	-	P	H
		7440	44.88	-29.12	74	57.51	35.94	11.29	59.86	-	-	P	H
		4960	43.79	-30.21	74	57.78	34.32	9.59	57.9	-	-	P	V
		7440	45.25	-28.75	74	57.88	35.94	11.29	59.86	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

BLE 2M:

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2361.03	53.21	-20.79	74	46.29	32.34	6.37	31.79	125	274	P	H
		2378.67	43.67	-10.33	54	36.74	32.35	6.37	31.79	125	274	A	H
	*	2402	103.87	-	-	96.8	32.36	6.44	31.73	125	274	P	H
	*	2402	102.01	-	-	94.94	32.36	6.44	31.73	125	274	A	H
		2372.895	52.77	-21.23	74	45.84	32.35	6.37	31.79	100	238	P	V
		2358.825	43.69	-10.31	54	36.83	32.34	6.37	31.85	100	238	A	V
	*	2402	99.09	-	-	92.02	32.36	6.44	31.73	100	238	P	V
	*	2402	97.35	-	-	90.28	32.36	6.44	31.73	100	238	A	V
BLE CH 19 2440MHz		2358.02	52.41	-21.59	74	45.55	32.34	6.37	31.85	117	274	P	H
		2388.82	43.36	-10.64	54	36.29	32.36	6.44	31.73	117	274	A	H
	*	2440	103.86	-	-	96.62	32.38	6.48	31.62	117	274	P	H
	*	2440	102.06	-	-	94.82	32.38	6.48	31.62	117	274	A	H
		2499.93	52.83	-21.17	74	45.4	32.4	6.53	31.5	117	274	P	H
		2492.3	43.95	-10.05	54	36.52	32.4	6.53	31.5	117	274	A	H
		2376.64	53.33	-20.67	74	46.4	32.35	6.37	31.79	101	238	P	V
		2380	43.48	-10.52	54	36.55	32.35	6.37	31.79	101	238	A	V
	*	2440	100.53	-	-	93.29	32.38	6.48	31.62	101	238	P	V
	*	2440	98.79	-	-	91.55	32.38	6.48	31.62	101	238	A	V
		2492.44	53.35	-20.65	74	45.92	32.4	6.53	31.5	101	238	P	V
		2496.57	44.05	-9.95	54	36.62	32.4	6.53	31.5	101	238	A	V

BLE CH 39 2480MHz	*	2480	102.4	-	-	95.04	32.39	6.53	31.56	119	283	P	H
	*	2480	100.6	-	-	93.24	32.39	6.53	31.56	119	283	A	H
		2485	53.48	-20.52	74	46.12	32.39	6.53	31.56	119	283	P	H
		2483.52	44.74	-9.26	54	37.38	32.39	6.53	31.56	119	283	A	H
	*	2480	98.41	-	-	91.05	32.39	6.53	31.56	108	238	P	V
	*	2480	96.45	-	-	89.09	32.39	6.53	31.56	108	238	A	V
		2483.96	53.49	-20.51	74	46.13	32.39	6.53	31.56	108	238	P	V
		2484.32	43.96	-10.04	54	36.6	32.39	6.53	31.56	108	238	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
BLE CH 00 2402MHz		4804	43.65	-30.35	74	57.67	34.41	9.47	57.9	-	-	P	H
		4804	43	-31	74	57.02	34.41	9.47	57.9	-	-	P	V
BLE CH 19 2440MHz		4880	43.37	-30.63	74	57.4	34.37	9.5	57.9	-	-	P	H
		7320	44.9	-29.1	74	57.14	36.04	11.24	59.52	-	-	P	H
		4880	43.36	-30.64	74	57.39	34.37	9.5	57.9	-	-	P	V
		7320	45.32	-28.68	74	57.56	36.04	11.24	59.52	-	-	P	V
BLE CH 39 2480MHz		4960	43.86	-30.14	74	57.85	34.32	9.59	57.9	-	-	P	H
		7440	44.63	-29.37	74	57.26	35.94	11.29	59.86	-	-	P	H
		4960	43.54	-30.46	74	57.53	34.32	9.59	57.9	-	-	P	V
		7440	45.47	-28.53	74	58.1	35.94	11.29	59.86	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BLE LF		89.17	20.04	-23.46	43.5	40.2	14.04	0.98	35.18	-	-	P	H
		196.84	23.73	-19.77	43.5	40.87	16.51	1.45	35.1	-	-	P	H
		317.12	25.19	-20.81	46	38.06	20.15	1.88	34.9	-	-	P	H
		681.84	25.57	-20.43	46	30.57	26.67	2.83	34.5	-	-	P	H
		828.31	27.62	-18.38	46	33.5	28.42	0	34.3	-	-	P	H
		974.78	29.12	-24.88	54	29.85	29.99	3.43	34.15	-	-	P	H
		36.79	27.86	-12.14	40	43.48	19.38	0	35	-	-	P	V
		196.84	29.01	-14.49	43.5	46.15	16.51	1.45	35.1	-	-	P	V
		332.64	23.29	-22.71	46	35.64	20.63	1.92	34.9	-	-	P	V
		512.09	24.04	-21.96	46	32.19	24.1	2.43	34.68	-	-	P	V
		842.86	28.45	-17.55	46	30.99	28.57	3.19	34.3	-	-	P	V
		988.36	29.84	-24.16	54	30.37	30.13	3.46	34.12	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

Note symbol

*	**Fundamental Frequency** which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is **Margin** line.
P/A	**P**eak or **A**verage
H/V	**H**orizontal or **V**ertical

A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) Preamp Factor(dB)

3. Margin (dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Margin (dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Margin (dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Radiated Spurious Emission Plots

BLE 1M:

Note symbol

-L	**Low channel location**
-R	**High channel location**

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	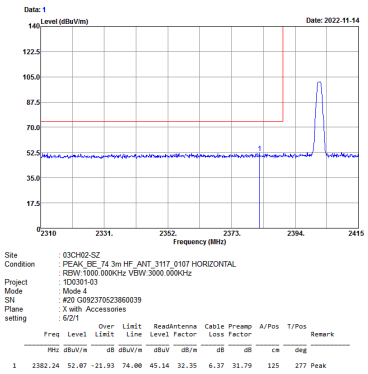	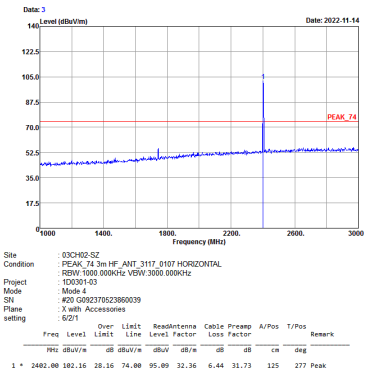

Avg.



Site : 03CH02-SZ
Condition : AVG_BE_54 3m HF_ANT_3117_0107 HORIZONTAL
: RBW:1000.000KHz VBW:3.000KHz
Project : 1D0301-03
Mode : Mode 4
SN : #20 G092370523860039
Plane : X with Accessories
setting : 6/2/1

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2389.28	43.38	-10.62	54.00	36.31	32.36	6.44	31.73	125	277	Average

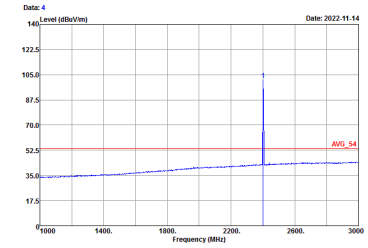

Site : 03CH02-SZ
Condition : AVG_54 3m HF_ANT_3117_0107 HORIZONTAL
: RBW:1000.000KHz VBW:3.000KHz
Project : 1D0301-03
Mode : Mode 4
SN : #20 G092370523860039
Plane : X with Accessories
setting : 6/2/1

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 *	2402.00	101.36	47.36	54.00	94.29	32.36	6.44	31.73	125	277	Average

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz Project : 1D0301-03 Mode : Mode 4 SN : #20 G092370523860039 Plane : X with Accessories setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 2353.05 52.99 -21.01 74.00 46.13 32.34 6.37 31.85 105 232 Peak	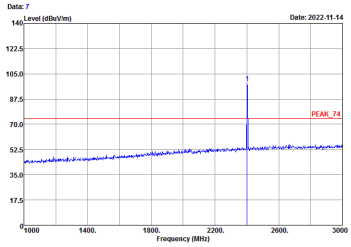 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz Project : 1D0301-03 Mode : Mode 4 SN : #20 G092370523860039 Plane : X with Accessories setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 * 2402.00 98.59 24.59 74.00 91.52 32.36 6.44 31.73 105 232 Peak
Avg	 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 VERTICAL : RBW:1000.000KHz VBW:3.000KHz Project : 1D0301-03 Mode : Mode 4 SN : #20 G092370523860039 Plane : X with Accessories setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 2384.24 43.32 -10.68 54.00 36.39 32.35 6.37 31.79 105 232 Average	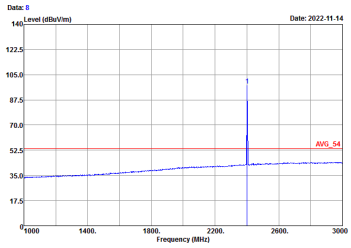 Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 VERTICAL : RBW:1000.000KHz VBW:3.000KHz Project : 1D0301-03 Mode : Mode 4 SN : #20 G092370523860039 Plane : X with Accessories setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 * 2402.00 97.34 43.34 54.00 90.27 32.36 6.44 31.73 105 232 Average

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Horizontal	Fundamental
Peak	 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz Project : 1D0301-03 Mode : Mode 5 SN : #20 G092370523860039 Plane : X with Accessories setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 2353.96 52.39 -21.61 74.00 45.53 32.34 6.37 31.85 113 273 Peak	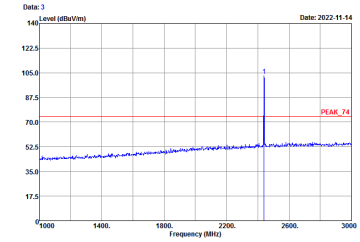 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz Project : 1D0301-03 Mode : Mode 5 SN : #20 G092370523860039 Plane : X with Accessories setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 * 2440.00 103.00 29.00 74.00 95.76 32.38 6.48 31.62 113 273 Peak
Avg.	 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz Project : 1D0301-03 Mode : Mode 5 SN : #20 G092370523860039 Plane : X with Accessories setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 2384.90 43.21 -10.79 54.00 36.21 32.35 6.44 31.79 113 273 Average	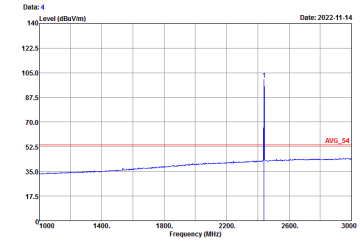 Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz Project : 1D0301-03 Mode : Mode 5 SN : #20 G092370523860039 Plane : X with Accessories setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 * 2440.00 100.28 46.28 54.00 93.04 32.38 6.48 31.62 113 273 Average

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
Peak	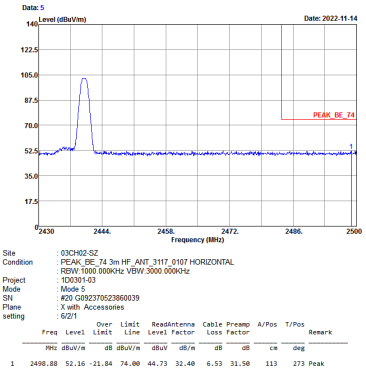	Left blank
Avg.	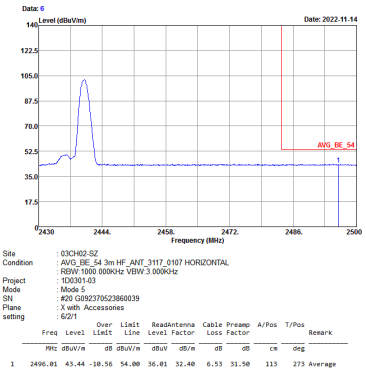	Left blank

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Vertical	Fundamental
Peak	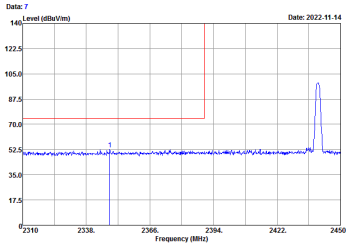 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz Project : 1D0301-03 Mode : Mode 5 SN : #20 G092370523860039 Plane : X with Accessories setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 2348.36 52.52 -21.48 74.00 45.66 32.34 6.37 31.85 100 239 Peak	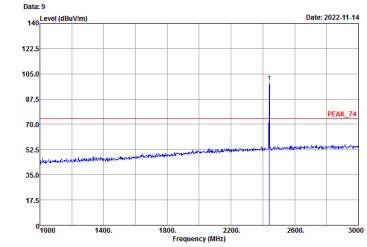 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz Project : 1D0301-03 Mode : Mode 5 SN : #20 G092370523860039 Plane : X with Accessories setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 * 2440.00 99.06 25.06 74.00 91.82 32.38 6.48 31.62 100 239 Peak
Avg.	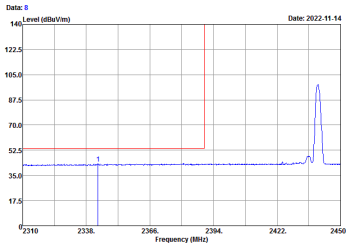 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 VERTICAL : RBW:1000.000KHz VBW:3.000KHz Project : 1D0301-03 Mode : Mode 5 SN : #20 G092370523860039 Plane : X with Accessories setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 2343.18 43.29 -10.71 54.00 36.50 32.34 6.30 31.85 100 239 Average	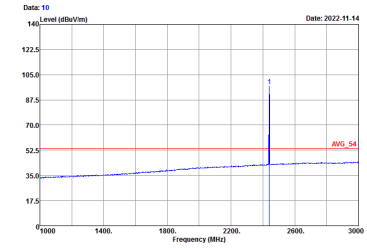 Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 VERTICAL : RBW:1000.000KHz VBW:3.000KHz Project : 1D0301-03 Mode : Mode 5 SN : #20 G092370523860039 Plane : X with Accessories setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 * 2440.00 97.28 43.28 54.00 90.04 32.38 6.48 31.62 100 239 Average

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
Peak	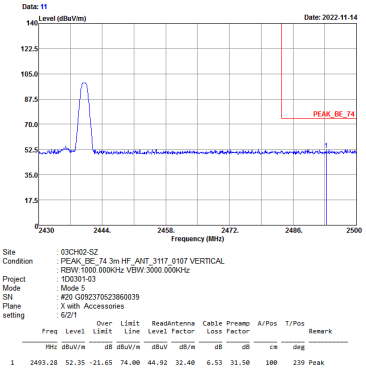	Left blank
Avg.	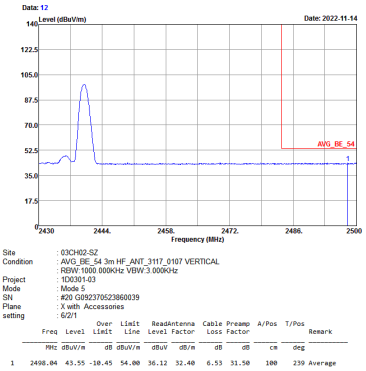	Left blank

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Fundamental
Peak	 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz Project : 1D0301-03 Mode : Mode 6 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 2485.80 52.97 -21.03 74.00 45.61 32.39 6.53 31.56 100 275 Peak	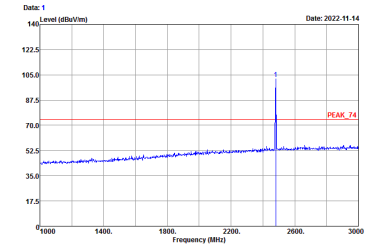 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz Project : 1D0301-03 Mode : Mode 6 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 * 2480.00 102.34 28.34 74.00 94.98 32.39 6.53 31.56 100 275 Peak
Avg.	 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz Project : 1D0301-03 Mode : Mode 6 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 2484.52 43.53 -10.47 54.00 36.17 32.39 6.53 31.56 100 275 Average	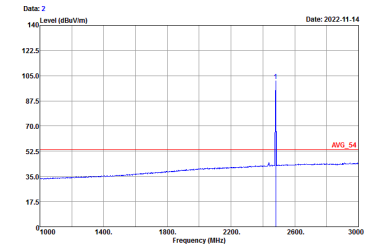 Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 HORIZONTAL : RBW:1000.000KHz VBW:3.000KHz Project : 1D0301-03 Mode : Mode 6 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 * 2480.00 101.34 47.34 54.00 93.98 32.39 6.53 31.56 100 275 Average

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Vertical	Fundamental
Peak	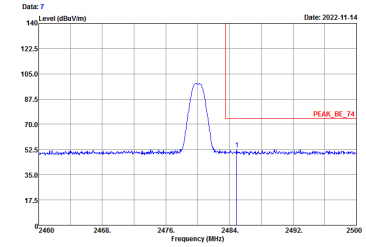 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz Project : 1D0301-03 Mode : Mode 6 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 2484.92 52.52 -21.48 74.00 45.16 32.39 6.53 31.56 107 248 Peak	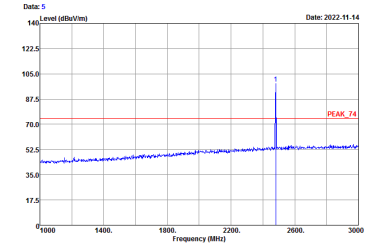 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz Project : 1D0301-03 Mode : Mode 6 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 * 2480.00 98.46 24.46 74.00 91.10 32.39 6.53 31.56 107 248 Peak
Avg.	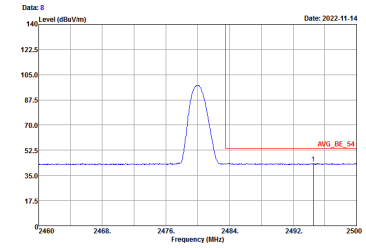 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 VERTICAL : RBW:1000.000KHz VBW:3.000KHz Project : 1D0301-03 Mode : Mode 6 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 2494.56 43.35 -10.65 54.00 35.92 32.40 6.53 31.50 107 248 Average	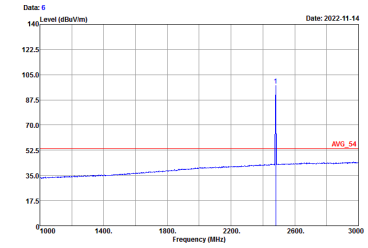 Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 VERTICAL : RBW:1000.000KHz VBW:3.000KHz Project : 1D0301-03 Mode : Mode 6 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 * 2480.00 97.64 43.64 54.00 90.28 32.39 6.53 31.56 107 248 Average

2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	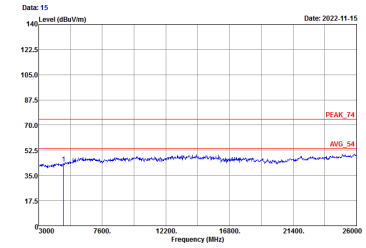 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 1D0301-03 Mode : Mode 4 SN : #20 G092370523860039 Plane : X with Accessories setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 4804.00 43.10 -30.90 74.00 57.12 34.41 9.47 57.90 --- --- Peak	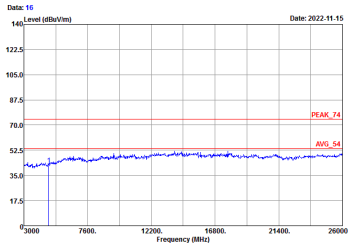 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 1D0301-03 Mode : Mode 4 SN : #20 G092370523860039 Plane : X with Accessories setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 4804.00 42.68 -31.32 74.00 56.70 34.41 9.47 57.90 --- --- Peak

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	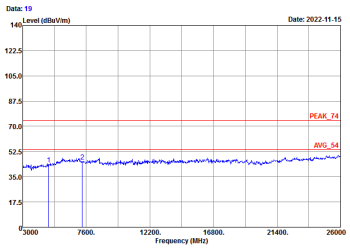 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 1D0301-03 Mode : Mode 5 SN : #20 G092370523860039 Plane setting : X with Accessories : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level factor Cable Loss factor Preamp factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 4880.00 43.79 -30.21 74.00 57.82 34.37 9.50 57.90 --- --- Peak 2 7320.00 45.59 -28.41 74.00 57.83 36.04 11.24 59.52 --- --- Peak	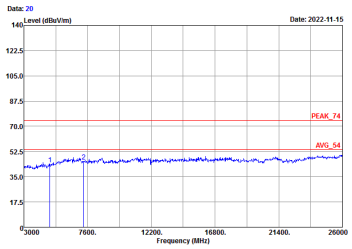 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 1D0301-03 Mode : Mode 5 SN : #20 G092370523860039 Plane setting : X with Accessories : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level factor Cable Loss factor Preamp factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 4880.00 43.58 -30.42 74.00 57.61 34.37 9.50 57.90 --- --- Peak 2 7320.00 45.80 -28.20 74.00 58.04 36.04 11.24 59.52 --- --- Peak

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak	 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 1D0301-03 Mode : Mode 6 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 4960.00 44.07 -29.93 74.00 58.06 34.32 9.59 57.90 --- --- Peak 2 7440.00 44.88 -29.12 74.00 57.51 35.94 11.29 59.86 --- --- Peak	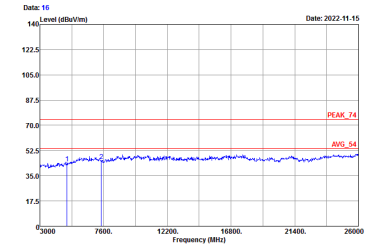 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 1D0301-03 Mode : Mode 6 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 4960.00 43.79 -30.21 74.00 57.78 34.32 9.59 57.90 --- --- Peak 2 7440.00 45.25 -28.75 74.00 57.88 35.94 11.29 59.86 --- --- Peak

BLE 2M:

Note symbol

-L	**Low channel location**
-R	**High channel location**

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	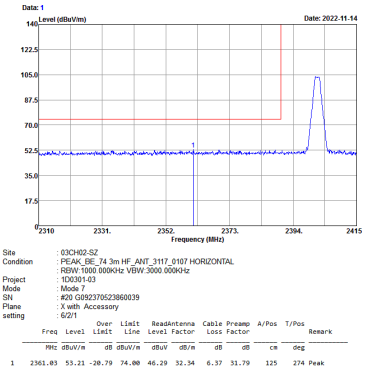 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz Project : 1D0301-03 Mode : Mode 7 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 2361.03 53.21 -20.79 74.00 46.29 32.34 6.37 31.79 125 274 Peak	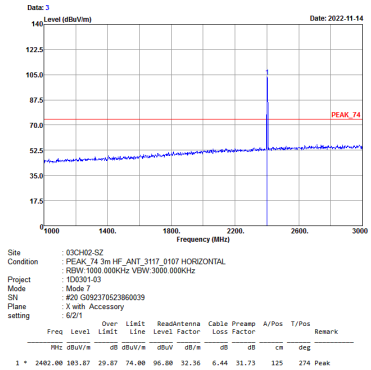 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz Project : 1D0301-03 Mode : Mode 7 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 * 2402.00 103.87 29.87 74.00 96.80 32.36 6.44 31.73 125 274 Peak

Avg.

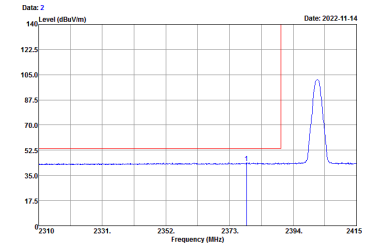

Site : 03CH02-SZ
Condition : AVG_BE_54 3m HF_ANT_3117_0107 HORIZONTAL
: RBW:1000.000KHz VBW:1.000KHz
Project : 1D0301-03
Mode : Mode 7
SN : #20 G092370523860039
Plane setting : X with Accessory
: 6/2/1

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1	2378.67	43.67	-10.33	54.00	36.74	32.35	6.37	31.79	125	274	Average

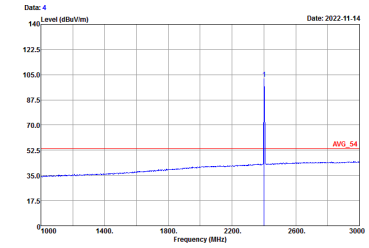

Site : 03CH02-SZ
Condition : AVG_54 3m HF_ANT_3117_0107 HORIZONTAL
: RBW:1000.000KHz VBW:1.000KHz
Project : 1D0301-03
Mode : Mode 7
SN : #20 G092370523860039
Plane setting : X with Accessory
: 6/2/1

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamp Loss	Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	
1 *	2402.00	102.01	48.01	54.00	94.94	32.36	6.44	31.73	125	274	Average

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	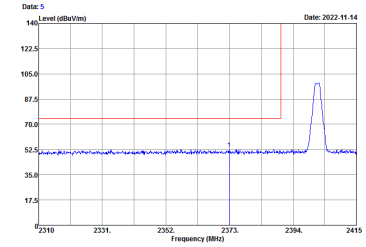 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz Project : 1D0301-03 Mode : Mode 7 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 2372.90 52.77 -21.23 74.00 45.84 32.35 6.37 31.79 100 238 Peak	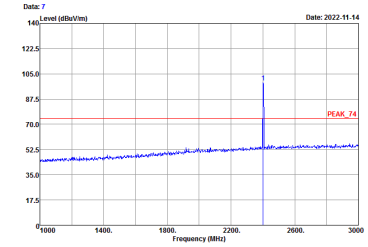 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz Project : 1D0301-03 Mode : Mode 7 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 * 2402.00 99.09 25.09 74.00 92.02 32.36 6.44 31.73 100 238 Peak
Avg	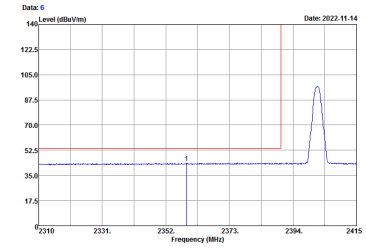 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 VERTICAL : RBW:1000.000KHz VBW:1.000KHz Project : 1D0301-03 Mode : Mode 7 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 2358.83 43.69 -10.31 54.00 36.83 32.34 6.37 31.85 100 238 Average	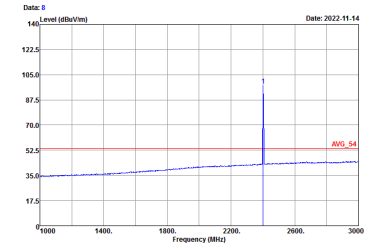 Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 VERTICAL : RBW:1000.000KHz VBW:1.000KHz Project : 1D0301-03 Mode : Mode 7 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 * 2402.00 97.35 43.35 54.00 90.28 32.36 6.44 31.73 100 238 Average

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Horizontal	Fundamental
Peak	 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz Project : 1D0301-03 Mode : Mode 8 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 2358.02 52.41 -21.59 74.00 45.55 32.34 6.37 31.85 117 274 Peak	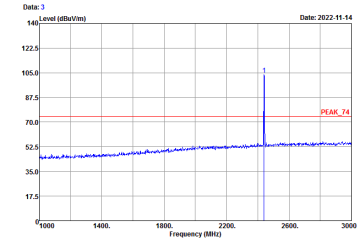 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz Project : 1D0301-03 Mode : Mode 8 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 * 2440.00 103.86 29.86 74.00 96.62 32.38 6.48 31.62 117 274 Peak
Avg.	 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz Project : 1D0301-03 Mode : Mode 8 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 2388.82 43.36 -10.64 54.00 36.29 32.36 6.44 31.73 117 274 Average	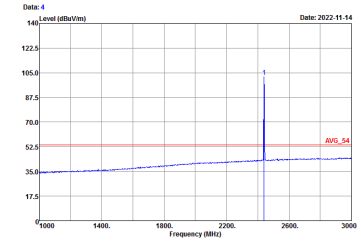 Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz Project : 1D0301-03 Mode : Mode 8 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 * 2440.00 102.06 48.06 54.00 94.82 32.38 6.48 31.62 117 274 Average

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Horizontal	Fundamental
Peak	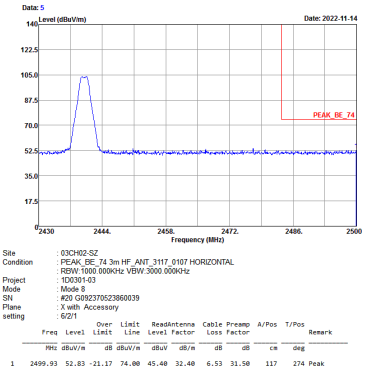	Left blank
Avg.	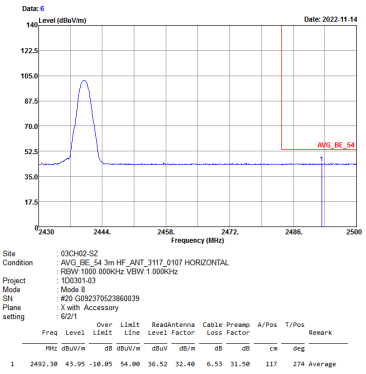	Left blank

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Vertical	Fundamental
Peak	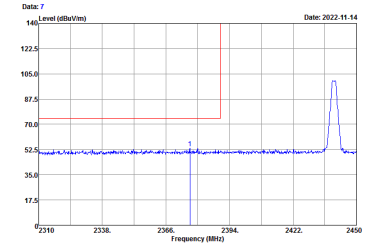 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz Project : 1D0301-03 Mode : Mode 8 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 2376.64 53.33 -20.67 74.00 46.40 32.35 6.37 31.79 101 238 Peak	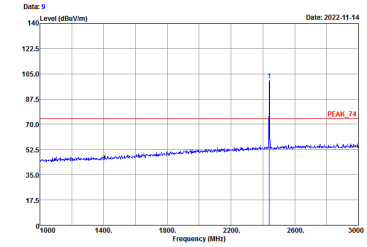 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz Project : 1D0301-03 Mode : Mode 8 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 * 2440.00 100.53 26.53 74.00 93.29 32.38 6.48 31.62 101 238 Peak
Avg.	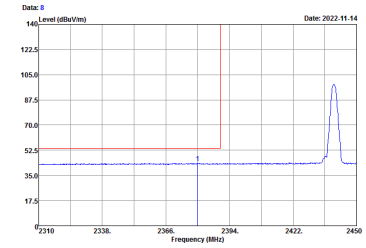 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 VERTICAL : RBW:1000.000KHz VBW:1.000KHz Project : 1D0301-03 Mode : Mode 8 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 2380.00 43.48 -10.52 54.00 36.55 32.35 6.37 31.79 101 238 Average	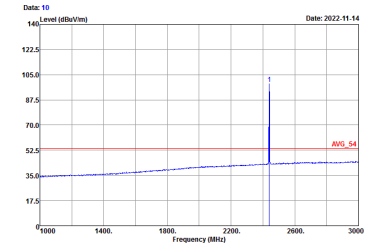 Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 VERTICAL : RBW:1000.000KHz VBW:1.000KHz Project : 1D0301-03 Mode : Mode 8 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 * 2440.00 98.79 44.79 54.00 91.55 32.38 6.48 31.62 101 238 Average

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - R	
	Vertical	Fundamental
Peak	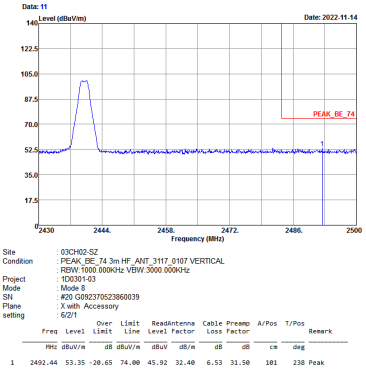	Left blank
Avg.	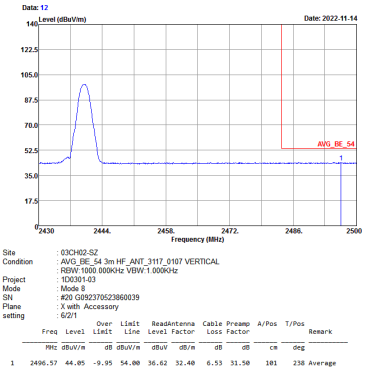	Left blank

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Fundamental
Peak	 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz Project : 1D0301-03 Mode : Mode 9 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level / Over Limit Limit / Limit Line / ReadAntenna Level Factor / Cable Loss Factor / Preamp Factor / A/Pos / T/Pos / Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 2485.00 53.48 -20.52 74.00 46.12 32.39 6.53 31.56 119 283 Peak	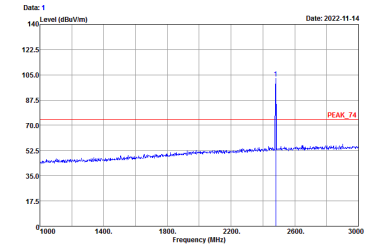 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz Project : 1D0301-03 Mode : Mode 9 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level / Over Limit Limit / Limit Line / ReadAntenna Level Factor / Cable Loss Factor / Preamp Factor / A/Pos / T/Pos / Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 * 2480.00 102.40 28.40 74.00 95.04 32.39 6.53 31.56 119 283 Peak
Avg.	 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz Project : 1D0301-03 Mode : Mode 9 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level / Over Limit Limit / Limit Line / ReadAntenna Level Factor / Cable Loss Factor / Preamp Factor / A/Pos / T/Pos / Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 2483.52 44.74 -9.26 54.00 37.38 32.39 6.53 31.56 119 283 Average	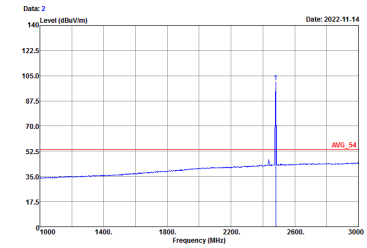 Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 HORIZONTAL : RBW:1000.000KHz VBW:1.000KHz Project : 1D0301-03 Mode : Mode 9 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level / Over Limit Limit / Limit Line / ReadAntenna Level Factor / Cable Loss Factor / Preamp Factor / A/Pos / T/Pos / Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 * 2480.00 100.60 46.60 54.00 93.24 32.39 6.53 31.56 119 283 Average

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Vertical	Fundamental
Peak	 Site : 03CH02-SZ Condition : PEAK_BE_74 3m HF_ANT_3117_0107 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz Project : 1D0301-03 Mode : Mode 9 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 2483.96 53.49 -20.51 74.00 46.13 32.39 6.53 31.56 108 238 Peak	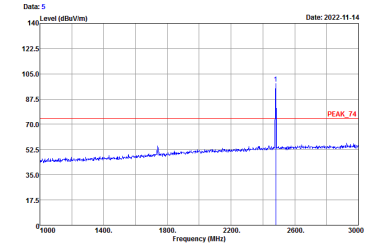 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz Project : 1D0301-03 Mode : Mode 9 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 * 2480.00 98.41 24.41 74.00 91.05 32.39 6.53 31.56 108 238 Peak
Avg.	 Site : 03CH02-SZ Condition : AVG_BE_54 3m HF_ANT_3117_0107 VERTICAL : RBW:1000.000KHz VBW:1.000KHz Project : 1D0301-03 Mode : Mode 9 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 2484.32 43.96 -10.04 54.00 36.60 32.39 6.53 31.56 108 238 Average	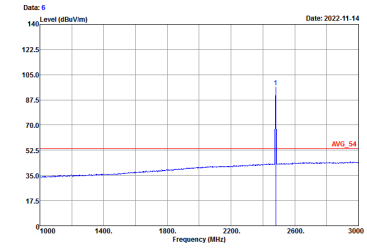 Site : 03CH02-SZ Condition : AVG_54 3m HF_ANT_3117_0107 VERTICAL : RBW:1000.000KHz VBW:1.000KHz Project : 1D0301-03 Mode : Mode 9 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Factor Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 * 2480.00 96.45 42.45 54.00 89.09 32.39 6.53 31.56 108 238 Average

2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	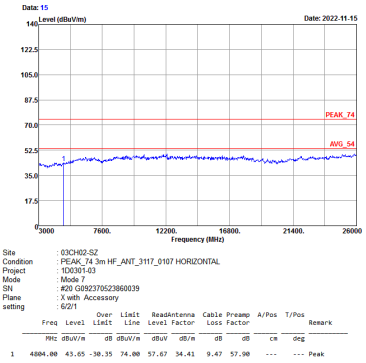	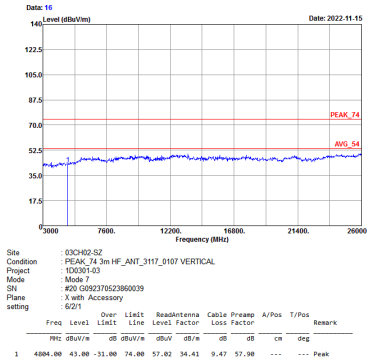

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	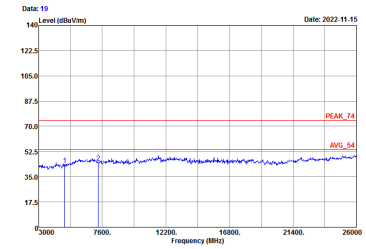 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 1D0301-03 Mode : Mode 8 SN : #20 G092370523860039 Plane setting : X with Accessory : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 4880.00 43.37 -30.63 74.00 57.40 34.37 9.50 57.90 --- --- Peak 2 7320.00 44.90 -29.10 74.00 57.14 36.04 11.24 59.52 --- --- Peak	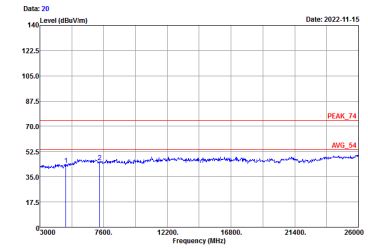 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 1D0301-03 Mode : Mode 8 SN : #20 G092370523860039 Plane setting : X with Accessory : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level Factor Cable Loss Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 4880.00 43.36 -30.64 74.00 57.39 34.37 9.50 57.90 --- --- Peak 2 7320.00 45.32 -28.68 74.00 57.56 36.04 11.24 59.52 --- --- Peak

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak	 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Project : 1D0301-03 Mode : Mode 9 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level factor Cable Loss Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 4960.00 43.86 -30.14 74.00 57.85 34.32 9.59 57.90 --- --- Peak 2 7440.00 44.63 -29.37 74.00 57.26 35.94 11.29 59.86 --- --- Peak	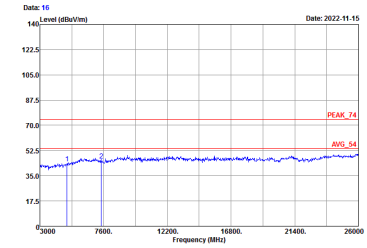 Site : 03CH02-SZ Condition : PEAK_74 3m HF_ANT_3117_0107 VERTICAL Project : 1D0301-03 Mode : Mode 9 SN : #20 G092370523860039 Plane : X with Accessory setting : 6/2/1 Freq Level Over Limit Limit Line ReadAntenna Level factor Cable Loss Preamp Factor A/Pos T/Pos Remark MHz dBuV/m dB dBuV/m dBuV dB/m dB dB cm deg 1 4960.00 43.54 -30.46 74.00 57.53 34.32 9.59 57.90 --- --- Peak 2 7440.00 45.47 -28.53 74.00 58.10 35.94 11.29 59.86 --- --- Peak

Emission below 1GHz

2.4GHz BLE (LF)

BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
QP / Peak	 Site : 03CH02-SZ Condition : FCC CLASS-B 3m VULB9168-01001 HORIZONTAL Project : 1D0301-03 Mode : Mode 9 IMEI : #20 G092370523860039 Plane : X with Accessory : 6/2/1 1 89.17 20.04 -23.46 43.50 40.20 14.04 0.98 35.18 --- --- Peak 2 196.84 23.73 -19.77 43.50 40.87 16.51 1.45 35.10 --- --- Peak 3 317.12 25.19 -20.81 46.00 38.06 20.15 1.88 34.90 --- --- Peak 4 681.84 25.57 -20.43 46.00 30.57 26.67 2.83 34.50 --- --- Peak 5 828.31 27.62 -18.38 46.00 33.50 28.42 0.00 34.30 --- --- Peak 6 974.78 29.12 -24.88 54.00 29.85 29.99 3.43 34.15 --- --- Peak	 Site : 03CH02-SZ Condition : FCC CLASS-B 3m VULB9168-01001 VERTICAL Project : 1D0301-03 Mode : Mode 9 IMEI : #20 G092370523860039 Plane : X with Accessory : 6/2/1 1 36.79 27.86 -12.14 40.00 43.48 19.38 0.00 35.00 --- --- Peak 2 196.84 29.01 -14.49 43.50 46.15 16.51 1.45 35.10 --- --- Peak 3 332.64 23.29 -22.71 46.00 35.64 20.63 1.92 34.90 --- --- Peak 4 512.09 24.04 -21.96 46.00 32.19 24.10 2.43 34.68 --- --- Peak 5 842.86 28.45 -17.55 46.00 30.99 28.57 3.19 34.30 --- --- Peak 6 988.36 29.84 -24.16 54.00 30.37 30.13 3.46 34.12 --- --- Peak

Appendix E. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 1Mbps	60.90	0.380	2.632	3KHz
Bluetooth LE 2Mbps	57.10	1.070	0.935	1KHz

Bluetooth LE 1Mbps

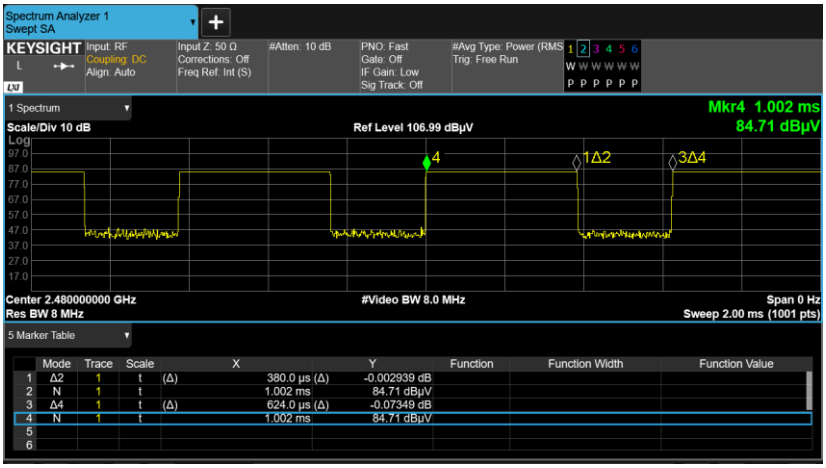
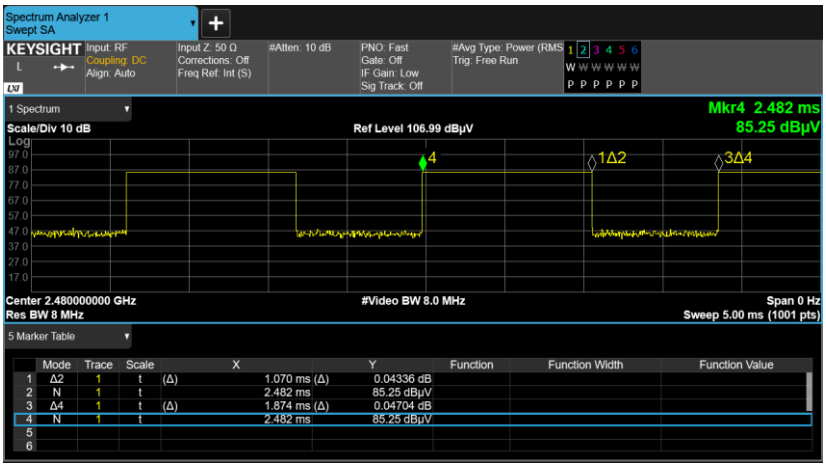
Bluetooth LE 2Mbps